

# **Fire Department & Project Submittal**

for

**Remote Station Monitoring of the Facility Fire Alarm  
Submitted per NFPA 72 & NFPA 13**

At

**Caliber Collision  
710 SE Blue Parkway  
Lees Summit, MO 64063**

**Remote Monitoring Central Station:**

**Via LTE/IP Single or Dual Path Commercial Fire Communicator**

**ADT**

**4221 W. John Carpenter Fwy  
Irving, TX 75063  
UUFX-S2684-20  
877-357-1808**



**Kansas City CCTV & Security  
6415 Universal Ave  
Kansas City, MO 64120  
855-452-2288**



**Jeff Stucker  
Archway Systems  
17020 East 40 Hwy, Suite #1  
Independence, MO. 64055  
(816) 709-3358**

# **Table of Contents**

<b>Part One</b>	<b>System Overview Outline</b>
<b>Part Two</b>	<b>Battery Calculations</b>
<b>Part Three</b>	<b>U.L. Certificates</b>
<b>Part Four</b>	<b>Equipment Data Sheets</b>
<b>Part Five</b>	<b>Floor Plan Layout</b>

**Part one**

**System Overview Outline**

- I. Location  
Caliber Collision,  
710 SE Blue Parkway  
Lees Summit, MO 64063
- II. Codes  
A. NFPA 72 Chapters as Applicable(Remote Station)  
B. NEC Articles as Applicable  
C. Local, City, State
- III. Control  
A. 1 ES-200X Intelligent Addressable FACP  
C. 1 HWF2-COM LTE/IP Single or Dual Path Commerical Fire Communicator  
D. 1 FDB-ACE-11 Fire Document Box
- Modules  
A. 5 MMF-300 Single Monitor Module  
B. 1 MDF-300 Dual Monitor Module  
C. 3 CRF-300 Relay Module  
D. 4 BG-12LX Addressable Manual Pull Station  
E. 1 DTK-2MHLP Modular Surge Protection
- IV. Fire Alarm Initiating Devices  
A. 3 SD365 Addressable Low-Profile Photoelectric Smoke Detector  
B. 3 Duct Detector Connection Only, Provided by Mechanical Contractor  
C. 1 Water Flow Connection Only, Provided by Sprinkler Contractor  
D. 2 Tamper Switch Connection Only, Provided by Sprinkler Contractor  
E. 1 Paint Booth Relay Shutdown Connection  
F. 2 Fan Relay Shutdown Connection  
G. 1 Sound System Relay Shutdown Connection
- V. Fire Alarm Indicating Devices  
A. 6 P2RL 2-Wire, Horn Strobe, Red  
B. 3 SRL 2 Wire Strobe Multi-CD, Red Wall Mount  
C. 4 PC2RL 2-Wire, Horn Strobe, Multi CD, Red, Ceiling Mount  
D. 1 P2RK 2-Wire Horn Strobe, Standard cd, Red, Outdoor
- VI. Zones  
Zoned Per Prints
- VII. Wiring  
All Circuits and Wiring Shall be "Power Limited"  
Initiating Zones Shall be 18/2 or 18/4 U.L. FPL Cable  
Indicating Circuits Shall be 14/2 U.L. FPL Cable  
System Ground Shall be 14 THHN Green Conductor  
Under Ground and Outside Wire shall be 14 THHN in Approved Raceway
- VIII. Listings  
A. All Equipment Shall Be U.L. Listed and Compatible
- IX. Power Supply  
A. Primary - 110 VAC Dedicated 20 Amp Circuit  
B. Secondary - 7 Amp Hour Batteries
- X. Alarm Supervision  
A. Human  
B. Remote Station Installing Branch/Contractor  
ADT Kansas City CCTV & Security  
4221 W. John Carpenter Fwy 6415 Universal Ave  
Irving, TX 75603 Kansas City, MO 64120  
UUFX-S2684-20 855-452-2288  
877-357-1808

# FIRE ALARM MATRIX WITH OCCUPANT NOTIFICATION

	ANNUNCIATES ALARM SIGNAL AT CONTROL PANEL AND REMOTE ANNUNCIATOR	ANNUNCIATES SUPERVISORY SIGNAL AT CONTROL PANEL AND REMOTE ANNUNCIATOR	TRANSMITS TROUBLE SIGNAL AT CONTROL CENTRAL STATION	TRANSMITS ALARM SIGNAL AT CONTROL PANEL CENTRAL STATION	TRANSMITS SUPERVISORY SIGNAL TO CENTRAL STATION	ACTIVATES TROUBLE SIGNAL TO CENTRAL STATION	ACTIVATES INTERIOR HORN/STROBES	ACTIVATES EXTERIOR HORN/STROBES	SHUTDOWN RTU	FAN SHUT DOWN		
SPRINKLER SYSTEM												
- WATERFLOW SWITCH	●			●		●	●		●			
- VALVE TAMPER SWITCH		●			●							
SMOKE DETECTOR	●			●		●			●			
MANUAL PULL STATION	●			●		●			●			
DUCT DETECTOR		●			●			●				
COMMUNICATOR - COMMUNICATION FAIL			●									
COMMUNICATOR - TROUBLE			●			●						
ABNORMAL CONTROL, CIRCUIT OR DEVICE			●			●						
LOSS OF POWER			●			●						

## **Part Two**

### **Battery Calculations**

## Standby Battery Calculations

### FIRELITE ES-200X

Caliber Collision,  
710 SE Blue Parkway  
Lees Summit, MO 64063

Part Number	Description	Quantity	Standby Per Device	Current All Devices	Alarm Per Device	Current All Devices
ES-200X	Intelligent Addressable FACP	1	0.141000	0.141000	0.257000	0.257000
IPOTS-COM	IP/POTS Communicator Card	1	0.040000	0.040000	0.041000	0.041000
PWRMOD24	Optional Power Module. Increases Alarm Power Output	1	0.000000	0.000000	0.000000	0.000000
MMF-300	Single Monitor Module	5	0.000350	0.001750	0.005000	0.025000
MDF-300	Dual Monitor Module	1	0.000750	0.000750	0.064000	0.064000
CRF-300	Relay Module	3	0.000300	0.000900	0.006500	0.019500
BG-12LX	Addressable Manual Pull Station	4	0.000400	0.001600	0.005000	0.020000
SD365	Addressable Low-Profile Photoelectric Smoke Detector	3	0.000200	0.000600	0.004500	0.013500
				0.000000		0.000000
				0.000000		0.000000
				0.000000		0.000000
			Standby	0.187	Alarm	0.440
Total Aux current		Maximum Amps:	2.0000			

### Signal Circuits

Circuit	Device	Quantity	Alarm Per Device	Current All Devices
Circuit 1	P2RK (75CD)	1	0.168	0.168
				0.000
				0.000
				0.000
				0.000
				0.000
Total 1	Maximum Amps:	2.5000		0.168
Circuit 2	P2RL (15CD)	3	0.083	0.249
	P2RL (30CD)	1	0.107	0.107
	P2RL (110CD)	1	0.198	0.198
	SRL (15CD)	3	0.060	0.180
				0.000
				0.000
Total 2	Maximum Amps:	2.5000		0.734
Circuit 3	PC2RL (177CD)	4	0.286	1.144
	P2RL (75CD)	1	0.156	0.156
				0.000
				0.000
				0.000
Total 3	Maximum Amps:	2.5000		1.300
Circuit 4				0.000
				0.000
				0.000
				0.000
				0.000
Total 4	Maximum Amps:	2.5000		0.000
			Notification Circuits Alarm	2.202
Totals	Maximum Amps:	6	Total Alarm Amp	2.642

Max Wire Run Distance For AWG 14	Circuit 1	Circuit 2	Circuit 3	Circuit 4
	3732	854	482	
Actual Wire run Distance	60	240	305	
Voltage Drop for 14 AWG wire	0.064	1.124	2.530	
Voltage Drop = 2 * Wire Run Distance * 3.07 Ohms Per 1000 ft 14 AWG * Total Current for Circuit / 100				

Standby Hours	24
Standby Battery Draw	0.187
Standby Amp Hrs	4.478

Alarm Minutes	5
Alarm Current	3.082
Alarm Current by Minutes	0.256

Battery Size Required with Alarm Time Minutes and 20% Reserve	5.681
---	-------

Batteries Size Supplied	7	Amp Hours
-------------------------	---	-----------

Current Draws for Fire Communicator					
HWF2-COM					
Device	Device Standby Current	Device Alarm Current	Quantity	Total Standby Draw	Total Alarm Draw
HWF2-COM	0.23	0.95	1	0.23	0.95
				0	0
				0	0
				0	0
				0	0
				Total Battery Calculation Standby:	5.520
				Alarm Current Min:	0.079
				Standby Hours	24
				Alarm Current:	0.950
				Battery size Required:	6.719
				Batteries Supplied (AH):	7

Wire Size	Alarm Min
18	5



**Part Three**

**U.L. Certificates**

# CERTIFICATE OF COMPLIANCE COVER PAGE

-

Applicant Subscriber No: 370746-011

Service Center Number: 22

Service Contract No: -

ACTIVE LISTINGS

<u>CCN</u>	<u>File No.</u>	<u>Vol. No.</u>
CRZM	BP10566	1
CPVX	BP1790	3
CRZH	BP6719	7
UUFY	S2684	20

Listed Service From: IRVING, TX

Alarm Service Company:

ADT COMMERCIAL  
4221 W JOHN CARPENTER FWY  
IRVING TX 75063-2924

Service Center:

ADT COMMERCIAL  
4221 W JOHN CARPENTER FWY  
IRVING TX 75063-2924



Applicant ID No: 370746-011  
Service Center No: 22  
Expires: 01-JAN-2023

## CERTIFICATE OF COMPLIANCE

**THIS IS TO CERTIFY** that the Alarm Service Company indicated below is included by Underwriters Laboratories Inc. (UL) in its Product Directories as eligible to use the UL Listing Mark in connection with Certificated Alarm Systems. The only evidence of compliance with UL's requirements is the issuance of a UL Certificate for the Alarm System and the Certificate is current under UL's Certificate Verification Service. This Certificate does not apply in any way to the communication channel between the protected property and any facility that monitors signals from the protected property unless the use of a UL listed or Classified Alarm Transport Company is specified on the Certificate.

**Listed Service From: IRVING, TX**

**Alarm Service Company: (370746-011)**

**ADT COMMERCIAL  
4221 W JOHN CARPENTER FWY  
IRVING TX 75063-2924**

**Service Center: (370746-011)**

**ADT COMMERCIAL  
4221 W JOHN CARPENTER FWY  
IRVING TX 75063-2924**

**The Alarm Service Company is Listed in the following Certificate Service Categories:**

<b><u>File - Vol No.</u></b>	<b><u>CCN</u></b>	<b><u>Listing Category</u></b>
BP1790-3	CPVX	[Burglar Alarm Systems] Central Station
BP6719-7	CRZH	[Burglar Alarm Systems] National Industrial Security Systems
BP10566-1	CRZM	Monitoring Stations, National Industrial Security
S2684-20	UUFx	[Signal and Fire Alarm Equipment and Services] (Protective Signaling Services) Central Station

**\*\*\*THIS CERTIFICATE EXPIRES ON 01-JAN-2023\*\*\***

**"LOOK FOR THE UL ALARM SYSTEM CERTIFICATE"**

## **Part Four**

### **Equipment Data Sheets**

# ES-200X

## Intelligent Addressable FACP with Communicator



### Addressable Fire Alarm Control Panels

#### General

The **ES-200X** is the latest intelligent addressable Fire Alarm Control Panel (FACP) from Fire•Lite Alarms and is a direct replacement for the MS-9200UDLS. The ES-200X comes with a pre-installed communicator and supports up to 198 addressable devices (99 detectors and 99 modules). With an extensive list of powerful features, the ES-200X programs just like Fire•Lite's other addressable products, yet fits into applications previously served only by conventional panels.

The pre-installed IPOTS-COM is a dual technology (POTS and IP) communicator. The POTS transmits system status (alarms, troubles, AC loss, etc.) to a Central Station via the public switched telephone network. The IP communicator's internet monitoring capability sends alarm signals over the Internet saving the monthly cost of two dedicated business telephone lines. Although not required, the secondary telephone line may be retained providing backup communication over the public switched telephone line. Optional cellular reporting is available using the CELL-MOD or CELL-CAB-FL.

Remote and local programming of the control panel is possible using the FS-Tools Upload/Download utility. Programming databases can be uploaded/downloaded via the panel's USB port (and USB cable) or via an ethernet connection using the IPOTS-COM communicator. The USB port also allows for the download or upload of the entire program, history file, walk-test data, current status and system voltages by means of a USB flash drive.

The power supply and all electronics are contained on a circuit board supported on a new quick install chassis and housed in a metal cabinet. Available accessories include local and remote upload/download software, remote annunciators, and reverse polarity/city box transmitter (4XTMF).

#### Features

- Listed to UL Standard 864, 10th edition
- Pre-installed IPOTS-COM Ethernet IP and POTS (Plain Old Telephone Service) Central Station Communicator over AlarmNet
- Optional CELL-MOD or CELL-CAB-FL GSM Central Station Communicator over AlarmNet®
- Automated activation of the ECC-50/100 Emergency Command Center
- ECC-FFT Firefighter Telephone option
- Compatible with SWIFT® wireless devices
- Auto-programming (learn mode) reduces installation time. Reports two devices set to the same address
- Four built-in, independently programmable Style Z (Class A) or Style Y (Class B) NAC circuits
- Selectable strobe synchronization for System Sensor, Wheelock, and Gentex devices
- Notification Appliance Circuit End of Line resistor matching
- Four programmable function keys for ease of maintenance
- Two programmable relays and one fixed trouble relay
- Built-in Programmer
- Integral 80-character LCD display with backlighting
- Real-time clock/calendar with automatic daylight savings control
- History file with 1,000 event capacity
- Addressable sounder base compatibility
- Multi-criteria detector (smoke, heat, CO) with programmable response
- Control module delay timer
- Automatic detector sensitivity testing (NFPA 72 compliant)
- Automatic device type-code verification
- Point trouble identification
- Waterflow selection per module point



- Alarm verification selection per detector point
- Maintenance alert warns when smoke detector dust accumulation is excessive
- One-person audible or silent walk test with walk-test log and printout
- System alarm verification selection per detector point
- PAS (Positive Alarm Sequence) and Pre-signal per point (NFPA 72 compliant)
- Up to 16 ANN-BUS annunciators- 8 per each ANN-Bus
- Remote Acknowledge, Alarm Silence, Reset and Drill via addressable modules or remote annunciator
- Upload/Download of program and data via USB with optional FS-Tools Programming Utility

#### SLC COMMUNICATION LOOP

- Supports LiteSpeed™ and CLIP protocols
- SLC operates up to 10,000 ft. (3,000 m) in LiteSpeed mode with twisted, unshielded wire
- Single addressable SLC loop which meets NFPA Class B and Class A requirements
- 198 addressable device capacity (99 addressable detectors and 99 modules)
- Compatible with Fire•Lite's addressable devices (refer to the *SLC Wiring Manual*)

#### NOTIFICATION APPLIANCE CIRCUITS (NACS)

- Four independently programmable output circuits. Circuits can be configured for the following outputs:
  - **Style Y** (Class B)
  - **Style Z** (Class A)
- Silence Inhibit and Autosilence timer options
- Continuous, March Time, Temporal, or California code for main circuit board NACs with two-stage capability
- Selectable strobe synchronization per NAC
- 2.5 A special application, 250mA regulated, total power for NACs

**NOTE:** Maximum or total 24VDC system power shared between all NAC circuits and the ANN-BUS is 2.7 A

## PROGRAMMING AND SOFTWARE

- Autoprogramming (learn mode) reduces installation time
- Custom English labels (per point) may be manually entered or selected from an internal library file
- Two programmable Form-C relay outputs
- 99 software zones
- Continuous fire protection during online programming
- Program Check automatically catches common errors not linked to any zone or input point
- **OFFLINE PROGRAMMING:** Create the entire program in your office using FS-Tools, a Windows®-based software package, and upload/download system programming locally. Offline programming requires an ethernet connection. FS-Tools is available on [www.firelite.com](http://www.firelite.com).

## User interface

### LED INDICATORS

- Fire Alarm (red)
- CO Alarm (red)
- AC Power (green)
- Supervisory (yellow)
- Trouble (yellow)
- Ground fault (yellow)
- Battery fault (yellow)
- Disabled (yellow)
- Maintenance (yellow)
- Communication (yellow)
- Alarm Silenced (yellow)
- F1-F4 Programmable Function Keys (yellow)

### KEYPAD

- 16 key alpha-numeric pad
- Acknowledge
- Alarm Silence
- Drill (Manual Evacuate)
- Four (4) programmable function keys
- Reset (lamp test)

## PRODUCT LINE INFORMATION

**ES-200X:** Addressable Fire Alarm Control Panel with one SLC loop. Includes main circuit board with display, pre-installed communicator, chassis with transformer, backbox with door, plastic bag containing screws, cables, key, etc. (For ES-200XC, refer to DF-60958.)

**FS-Tools:** Programming software for Windows®-based PC computer. Available for download at [www.firelite.com](http://www.firelite.com).

**CELL-CAB-FL/CELL-MOD:** Optional GSM communicators.

**IPOTS-COM:** Dual technology (POTS and IP) communicator. (replacement board)

**DP-ES-R:** Optional dress panel for the ES-200X.

**TR-CE:** Optional trim ring for semi-flush mounting.

**BB-2F:** Optional cabinet for one or two modules.

**BB-6F:** Optional cabinet for up to six modules mounted on CHS-6 chassis.

**BB-26:** Battery backbox, holds up to two 25 AH batteries and CHG-75.

**BB-55F:** Battery box, houses two 55 AH batteries

**CHS-6:** Chassis, mounts up to six multi-modules in a BB-6F cabinet.

**CHG-75:** Battery charger for lead-acid batteries with a rating of 25 to 75 AH.

**CHG-120F:** Remote battery charging system for lead-acid batteries with a rating of 55 to 120 AH. Requires additional BB-55F for mounting.

**BAT Series:** Batteries, see data sheet DF-52397.

**PRN Series:** UL listed compatible event printer. Uses tractor-fed paper.

## OPTIONAL MODULES

**4XTMF Reverse Polarity Transmitter Module:** Provides a supervised output for local energy municipal box transmitter, alarm and trouble. Includes a disable switch and disable trouble LED.

**PWRMOD24 Power Expander Module:** Optional power module. Increases alarm power output to 6 amps.

## COMPATIBLE ANNUNCIATORS

**ANN-80:** Remote LCD annunciator mimics the information displayed on the FACP LCD display. Recommended wire type is unshielded.

**ANN-100:** Remote LCD annunciator mimics the information displayed on the FACP LCD display. Recommended wire type is unshielded. For use in FM applications only.

**ANN-I/O:** LED Driver Module provides connections to a user supplied graphic annunciator. (See DF-52430.)

**ANN-LED:** Annunciator Module provides three LEDs for each zone: Alarm, Trouble, and Supervisory. Ships with red enclosure. (See DF-60241.)

**ANN-RLED:** Provides alarm (red) indicators for up to 30 input zones or addressable points. (See DF-60241.)

**ANN-RLY:** Relay Module provides 10 programmable Form-C relays. Can be mounted inside the cabinet. (See DF-52431.)

**ANN-S/PG:** Serial/Parallel Printer Gateway module provides a connection for a serial or parallel printer. (See DF-52429.)

## ADDRESSABLE DEVICES

*All feature a polling LED and rotary switches for addressing.*

**SD365:** Addressable low-profile photoelectric smoke detector. LiteSpeed only.

**SD365-IV:** Addressable low-profile photoelectric smoke detector. Ivory. LiteSpeed and CLIP mode.

**SD365T:** Addressable low-profile photoelectric smoke detector with thermal sensor. LiteSpeed only.

**SD365T-IV:** Addressable low-profile photoelectric smoke detector with thermal sensor. Ivory. LiteSpeed and CLIP mode.

**SD365R:** Remote test capable addressable photoelectric smoke detector for use with DNR(W) duct detector housing. LiteSpeed only.

**SD365R-IV:** Remote test capable addressable photoelectric smoke detector for use with DNR(W) duct detector housing. Ivory. LiteSpeed and CLIP mode.

**H365:** Low-profile 135°F fixed thermal sensor. LiteSpeed only.

**H365-IV:** Low-profile 135°F fixed thermal sensor. Ivory. LiteSpeed and CLIP mode.

**H365R:** Low-profile, intelligent, rate-of-rise thermal sensor. LiteSpeed only.

**H365R-IV:** Low-profile, intelligent, rate-of-rise thermal sensor. Ivory. LiteSpeed and CLIP mode.

**H365HT:** Low-profile intelligent 190°F/88°C fixed thermal sensor. LiteSpeed only.

**H365HT-IV:** Low-profile intelligent 190°F/88°C fixed thermal sensor. Ivory. LiteSpeed and CLIP mode.

## Legacy Devices

**CP355:** Addressable low-profile ionization smoke detector.

**SD355:** Addressable low-profile photoelectric smoke detector.

**SD355T:** Addressable low-profile photoelectric smoke detector with thermal sensor.

**SD355R:** Remote test capable addressable photoelectric smoke detector for use with DNR(W) duct detector housing.

**SD355CO:** Addressable, low-profile device that provides fire, heat, and carbon monoxide (CO) detection.

**H355:** Fast-response, low-profile heat detector.

**H355R:** Fast-response, low-profile heat detector with rate-of-rise option.

**H355HT:** Fast-response, low-profile heat detector that activates at 190°F/88°C.

**AD355:** Low-profile, intelligent, “Adapt” multi-sensor detector (B350LP base included).

**B200S:** Programmable, addressable sounder base.

**B200SR:** Addressable sounder base.

**BEAM355:** Intelligent beam smoke detector.

**BEAM355S:** Intelligent beam smoke detector with integral sensitivity test.

**D355PL:** InnovairFlex low-flow non-relay duct-detector housing; includes SD355R.

**DNR:** InnovairFlex low-flow non-relay duct-detector housing. (Order SD355R/SD365R separately.)

**DNRW:** InnovairFlex low-flow non-relay duct-detector housing, with NEMA-4 rating. Watertight. (Order SD355R/SD365R separately.)

### **Addressable Modules**

**MMF-300:** Addressable Monitor Module for one zone of normally-open dry-contact initiating devices. Mounts in standard 4.0" (10.16 cm.) box. Includes plastic cover plate and end-of-line resistor. Module may be configured for either a Style B (Class B) or Style D (Class A) IDC.

**MDF-300:** Dual Monitor Module. Same as MMF-300 except it provides two Style B (Class B) only IDCs.

**MMF-301:** Miniature version of MMF-300. Excludes LED and Style D option. Connects with wire pigtails. May mount in device backbox.

**MMF-302:** Similar to MMF-300. Addressable Monitor Module for one zone of conventional two-wire detectors. Requires resettable 24 VDC power. Refer to the *Device Compatibility Document* for listed compatible devices and quantity limitation.

**CMF-300:** Addressable Control Module for one Style Y/Z (Class B/A) zone of supervised polarized Notification Appliances. Mounts directly to a 4.0" (10.16 cm.) electrical box. NAC option requires external 24 VDC to power notification appliances.

**CRF-300:** Addressable relay module containing two isolated sets of Form-C contacts, which operate as a DPDT switch. Mounts directly to a 4.0" (10.16 cm.) box, surface mount using the SMB500.

**BG-12LX:** Addressable manual pull station with interface module mounted inside.

**I300:** This module isolates the SLC loop from short circuit conditions (required for Style 6 or 7 operation).

**ISO-6:** Six-fault isolator module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**SMB500:** Used to mount all modules except the MMF-301 and M301.

**MMF-300-10:** Ten-input monitor module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**MMF-302-6:** Six-zone interface module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**CMF-300-6:** Six-circuit supervised control module. Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

**CRF-300-6:** Six-relay control module (Form-C relays). Mount one or two modules in a BB-2F cabinet (optional). Mount up to six modules on a CHS-6 chassis in a BB-6F cabinet.

### **SWIFT Wireless Devices**

**W-GATE:** LiteSpeed Wireless Gateway

**W-SD355:** LiteSpeed intelligent, wireless photo detector.

**W-H355R:** LiteSpeed intelligent wireless rate of rise (135°) heat detector.

**W-SD355T:** Intelligent wireless photo/heat detector.

**W-H355:** LiteSpeed intelligent wireless fixed-temperature (135°) heat detector.

**W-MMF:** LiteSpeed Intelligent wireless monitor module.

**W-CRF:** LiteSpeed Intelligent wireless relay module.

**W-BG12LX:** LiteSpeed Intelligent wireless pull station.

**WAV-RL, WAV-WL, WAV-CRL, WAV-CWL:** LiteSpeed Intelligent AV bases.

**W-USB:** Wireless USB radio/antenna dongle that plugs into the USB port of a PC running SWIFT Tools.

**SWIFT Tools:** Programming and diagnostic utility for the Wireless Gateway and devices. Available for download from firelite.com.

**NOTE:** For more information on Compatible Addressable Devices for use with the ES-200X, see the following data sheets (document numbers): SD365 Series (DF-61010), H365 Series (DF-61011), AD355 (DF-52386), BG-12LX (DF-52013), CMF-300-6 (DF-52365), CRF-300-6 (DF-52374), CMF/CRF Series (DF-52130), CP355 (DF-52383), H355 Series (DF-52385), I300 (DF-52389), ISO-6 (DF-60485), MMF-300 Series/MDF-300 (DF-52121), MMF-300-10 (DF-52347), MMF-302-6 (DF-52356), SD355/SD355T (DF-52384), and SLC Wiring Manual (51309).

**NOTE:** Legacy 300 Series detection devices such as the CP300/CP350, SD300(T)/SD350(T) and older modules such as the M300, M301, M302, C304, and BG-10LX are not compatible with LiteSpeed polling. If the SLC contains one of these devices, polling must be set for standard CLIP protocol. Please consult factory for further information on previous 300 Series devices.

### **ADDRESSABLE DEVICE ACCESSORIES**

**End-of-Line Resistor Assembly (R-47K and R-3.9K):** The 47k ohm assembly supervises the MMF-300, MDF-300, MMF-301, and CMF-300 module circuits. The 3.9k ohm assembly supervises the MMF-302 module circuit. These resistors are included with each module.

**Power Supervision Relay:** Supervises the power to 4-wire smoke detectors and notification appliances.

### **Wiring Requirements**

While shielded wire is not required, it is recommended that all SLC wiring be twisted-pair to minimize the effects of electrical interference. Refer to the panel manual for wiring details.



# SYSTEM SPECIFICATIONS

## System Capacity

- Intelligent Signaling Line Circuits..... 1
- Addressable device capacity ..... 198
- Programmable software zones ..... 99
- Annunciators..... 16

## Electrical Specifications

**AC Power:** Operates in either 120 or 240 VAC, 50/60 Hz, 3.25 A, auto-sensing- no switch required. Wire size: minimum 14 AWG (2.00 mm<sup>2</sup>) with 600 V insulation. Nonpower-limited, supervised.

**Battery:** Two 12 V 18 AH lead-acid batteries. Battery Charger Capacity: 7-18 AH (ES-200X cabinet holds maximum of two 18 AH batteries.)

**Communication Loop:** Supervised and power-limited.

**Notification Appliance Circuits:** Terminal Block provides connections for four NACs, Style Y (Class B) or Style Z (Class A). Special Application power. Power-limited, supervised circuitry. Maximum signaling current per circuit: 2.5 amps special application, 250mA regulated. End-of-Line Resistor: 4.7k ohm, ½ watt (P/N 71252 UL listed) for Style Y (Class B) NAC; system capable of 1.9 kΩ - 22 kΩ ELR range. Refer to the *Fire•Lite Device Compatibility Document* for listed compatible devices.

**Two Programmable Relays and One Fixed Trouble Relay:** Contact rating: 2.0 A @ 30 VDC (resistive), 0.5 A @ 30 VAC (resistive). Form-C relays, non-power-limited, non-supervised.

## Cabinet Specifications

**Door:** 19.26" (48.92 cm.) high x 16.82" (42.73 cm.) wide x 0.72" (1.82 cm.) deep. **Backbox:** 19.00" (48.26 cm.) high x 16.65" (42.29 cm.) wide x 5.25" (13.34 cm.) deep. **Trim Ring (TR-CE):** 22.00" (55.88 cm.) high x 19.65" (49.91 cm.) wide.

## Shipping Specifications

**Weight:** 26.9 lbs. (12.20 kg.) **Dimensions:** 20.00" (50.80 cm.) high x 22.5" (57.15 cm.) wide x 8.5" (21.59 cm.) deep.

## Temperature and Humidity Ranges

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F). However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

## NFPA Standards

The ES-200X complies with the following NFPA 72 Fire Alarm Systems requirements:

- **LOCAL** (Automatic, Manual, Waterflow and Sprinkler Supervisory).
- **AUXILIARY** (Automatic, Manual and Waterflow) (requires 4XTMF).
- **REMOTE STATION** (Automatic, Manual and Waterflow) (Where a DACT is not accepted, the alarm, trouble and supervisory relays may be connected to UL 864 listed transmitters. For reverse polarity signaling of alarm and trouble, 4XTMF is required.)
- **PROPRIETARY** (Automatic, Manual and Waterflow).
- **CENTRAL STATION** (Automatic, Manual and Waterflow, and Sprinkler Supervised).
- **OT, PSDN** (Other Technologies, Packet-switched Data Network)
- **IBC 2012, IBC 2009, IBC 2006, IBC 2003, IBC 2000** (Seismic).
- **CBC 2007** (Seismic)

## Agency Listings and Approvals

The listings and approvals below apply to the basic ES-200X control panel. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S624
- **FM approved**
- **CSFM:** 7165-0075:500
- **FDNY:** COA #6261


**NOTE:** See DF-60958 for ULC-listed model.

AlarmNet®, Fire-Lite® Alarms, SWIFT®, and System Sensor® are registered trademarks of Honeywell International Inc. Microsoft® and Windows® are registered trademarks of the Microsoft Corporation.  
©2018 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
www.firelite.com



Country of Origin: USA



# HWF2-COM SERIES

## LTE / IP Single or Dual Path Commercial Fire Communicators

The HWF2-COM Series LTE / IP fire communicators are single or dual path commercial fire alarm communicators that offer Contact ID reporting with any FACP (fire alarm control panel) with a built-in dialer.

Models include:

HWF2A-COM (AT&T LTE & IP)

HWF2V-COM (Verizon LTE & IP)

Both models connect directly to the primary or secondary communication ports of a fire panel's digital alarm communicator transmitter (DACT).

Three selectable reporting paths include: LTE cellular only, IP only, or IP primary with LTE cellular backup. All signals from the HWF2-COM Series are delivered to the AlarmNet® network control center which routes highly encrypted, cybersecured Ethernet data packets via a customer-provided Internet connection or LTE cellular network to the appropriate central station. The AlarmNet® network control center is fully redundant and monitored 24/7. Installation and programming are easy using the handheld 7720P Programming tool.



## FEATURES AND BENEFITS

- LTE and IP connection tested every day
- Three selectable reporting paths: LTE cellular only, IP only, or IP Primary with LTE cellular backup
- Requires no change to the existing FACP configuration
- Connects directly to the primary and secondary telephone ports of a DACT
- Plan choices range from 5 minute, 60 minute, 6 hour, and 24 hour supervision intervals
- Operates over the following communication protocols: LTE, HSPA+(4G) HSPA (3G)
- Works over any type of customer provided Ethernet 10/100 based network
- connection (LAN or WAN), DSL modem or cable modem
- Data transmits over standard Contact ID protocol but is secured with the industry's advanced encryption standard (AES 256 bit)
- Supports both dynamic (DHCP) or public and private Static IP addressing
- Reliable connection: IP and cellular connection tested every day
- Built-in, standalone power supply module. Onboard charging circuit design accommodates battery backup. Includes primary power and battery supervision
- Diagnostic LEDs indicate signal strength and status
- Choice of LTE provider services
- QOS: Quality of Service diagnostics via AlarmNet conveys vital communicator information including signal strength, message path used, and when the message was received
- 7720P Handheld programmer for easy setup

**Honeywell**

The HWF2-COM LTE / IP fire communicators operate over the most modern and common cellular networks including LTE, 4G and 3G.

They connect to any customer provided Ethernet 10/100 base network connection (LAN or WAN), DSL or cable modem. Selectable reporting path feature allows the radios to be configured for a single or dual path, while providing appropriate supervision intervals based on NFPA 72 requirements. Selectable paths and supervision timing intervals include:

SELECTABLE PATH	DESCRIPTION	SUPERVISION TIMES
2010 Cell	Single path, cellular	5 Minutes
2010 IP	Single path, IP	5 Minutes
2010 IP & Cell	Dual path, IP and cellular	24 Hours
2013 Cell	Single path, cellular	60 Minutes
2013 IP	Single path, IP	60 Minutes
2013 IP & Cell	Dual path, IP and cellular	6 Hours

## OPERATION

When an event occurs, the FACP goes off-hook to dial the central station. The HWF2-COM Series dialer capture module detects the off-hook condition and provides the fire panel with a dial tone. When the fire panel detects the dial tone, it begins dialing the central station.

After the dialing is completed, the dialer capture module returns a signal to the fire panel. The fire panel then sends the Contact ID reports to the dialer capture module, which in turn sends a signal after the report is successfully received from the fire panel. The dialer capture module sends the Contact ID reports to the HWF2-COM Series communications module. When all the reports are sent, the fire panel goes on-hook. The HWF2-COM Series communications module then transmits the messages to the central station either over the LTE network or the Internet (depending on configuration).

## FIRE COMMUNICATOR / PANEL CAPABILITY

The HWF2-COM Series is compatible with fire alarm control panels that use the Contact ID communications format as described in the SIA DC-05 standard.

## EASY TO PROGRAM

The HWF2-COM communicator can be pre-programmed using the 7720P programmer to enter all central station information. This is saved to the HWF2-COM communicator panel memory. When the HWF2-COM is installed at the site and connected to the Internet/ Intranet, it registers with the AlarmNet Receiver.

For most installations, the only required parameters are:

- Primary City ID (two digits), obtained from your monitoring station
- Primary Central Station ID (two digits), obtained from your monitoring station

- Primary Subscriber ID (four digits), obtained from your monitoring station
- Communication Module MAC ID, and MAC CRC number located on the outside of the box and inside of the module

All parameters are assigned by the monitoring station.

## ALARMNET

AlarmNet communications technology provides a highly reliable alternative for the transmission of alarm signals. The network provides extensive coverage in the United States and Canada. The AlarmNet Network Control Center processes signals from powerful servers in multiple locations equipped with 24/7 infrastructure support. Redundant hardware servers, real-time backup databases, and generators with battery backup at all locations ensure continuity of service. Signals from AlarmNet are transmitted to central station receivers using multiple communication paths consisting of the Internet, LTE radio network, or toll free plain old telephone service (POTS). Visit [AlarmNet.com](http://AlarmNet.com) to learn more.

## INSTALLATION REQUIREMENTS, UL COMPLIANCE

To meet UL864/NFPA requirements, ensure the following:

- HWF2-COM Series must be installed in accordance with the National Fire Protection Association (NFPA) standards 70 and 72
- HWF2-COM Series must be mounted in the same room and within 20 feet of the fire panel.
- HWF2-COM Series and all equipment used for the IP connection (e.g., router, hub, modem, etc) must be UL-listed, powered from an unswitched branch circuit, and be provided with appropriate standby power.
- HWF2-COM Series must use the 7AH battery (not included) to provide 24 hour backup capability

# HWF2-COM SERIES TECHNICAL SPECIFICATIONS

## ELECTRICAL

Transformer:

- Primary: 120VAC, 60Hz, 0.5A
- Secondary: 18VDC, 50VA

Battery:

- One 12 V 7.0 AH lead-acid battery: (not supplied)
- Battery charging current: 1 Amp maximum
- Battery discharge current: Standby 230mA, Active 950mA

## CABINET SPECIFICATIONS

- Dimensions: 14.875" H x 12.75" W x 3.0" D (37.8cm H x 32.4cm W x 7.6cm D)
- Color: Red

## SHIPPING DIMENSIONS

- Weight: 5.3 lbs (6.94kg)
- Dimensions: 15.625" H x 13.79" W x 9.25" D (39.7cm H x 34.9cm W x 23.9cm D)

## TEMPERATURE AND HUMIDITY RANGES

This system meets NFPA requirements for operation at 0 - 49°C/32-120°F and at a relative humidity 93%+- 2% RH (non-condensing at 32°C +- 2°C(90°F +-3°F). However the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 - 27°C/60-80°F.

## PRODUCT LINE INFORMATION

**HWF2V-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, Verizon LTE / IP

**HWF2A-COM:** LTE Digital Cellular Fire Alarm Communicator and Internet Panel, AT&T LTE / IP

Both models include:

- Red cabinet with key and lock
- Wall outlet box
- Dialer capture module
- LTE communications module
- Antenna and mounting adapter
- PowerBoost1 power supply
- LED display board
- Transformer
- Manual and required screws
- Cables, etc.

## ANTENNA AND EXTERNAL HARDWARE

CELL-ANT3DB: 3dBA gain antenna  
WA7626-CA: SMA to N adapter cable  
7626-50HC: 50 ft. antenna cable, low loss

**Note:** The WA7626-CA adapter cable and 7626-50HC antenna cable are only required when installing the CELL-ANT3DB antenna remotely.

## OTHER ACCESSORIES

**7720P:** HWF2V-COM, HWF2A-COM and IPGSM-4G handheld programmer

**HPTCOVER:** Plug-in transformer box for HWF2V-COM, HWF2A-COM, and IPGSM-4G communicators

**BAT-1270:** Battery 12 Volts, 7AH, sealed

## AGENCY LISTINGS AND APPROVALS

The listings and approvals below apply to the HWF2-COM Series communicators. In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult the factory for latest listings.

**UL Listed:** S789

**CSFM:** 7300-1645:0511

**FDNY:** Approved

AlarmNet® is a registered trademarks of Honeywell International Inc.

©2019 by Honeywell International Inc. All rights reserved.

Unauthorized use of this document is strictly prohibited.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: USA

## Honeywell Power Products

12 Clintonville Road  
Northford, CT 06472-1610  
203.484.7161  
www.honeywellpower.com

DH-62010 | B | 06/19  
©2019 Honeywell International Inc.

THE  
FUTURE  
IS  
WHAT  
WE  
MAKE IT

Honeywell

**NO  
EXCUSES!**

**SIGNALING**



**FDB**  
**ACE-11**

## **FIRE DOCUMENT BOX**



The FDB is the perfect fit to meet the demanding code requirements today. SAE's number one goal is to manufacture code compliant solutions and this product allows you to do just that. NFPA 72 2007 section 6.2.2.1 states, "A record of installed software and firmware version numbers shall be maintained at the location of the fire alarm control unit."

This durable 16 gauge steel enclosure with a solid piano hinge and key lock will keep all of your code required documents in one safe place. Along with your fire alarm software you can store your test & inspection documents, service records, manuals & AS built drawings for the system.

The FDB is designed to hold critical manuals and documents with a durable steel retainer. It has designated hooks to organize key rings and hold important business cards for easy access and reference. Inside the cover it has a organized note table that allows for documentation for passwords and other critical system information.

### **Standard Features:**

- 2 Key ring hooks to hold system keys
- Business card holder for key contacts
- Overall Dimensions are 12" x 13" tall and 2 1/4" deep
- 16 gauge steel box and cover for security
- Durable powercoat baked on finish  
other colors available
- Standard 3/4" cat 30 key lock other lock assemblies available
- Solid stainless steel piano hinge
- Permanently screened white ink 1" high "Fire Alarm Documents"
- Legend sheet for passwords and system information



**ISO 9001  
REGISTERED  
COMPANY**

**ACEBOX**

Space Age Electronics, Inc.  
[www.1sae.com](http://www.1sae.com)  
**800.486.1723** Toll Free  
508.485.0966 Local  
508.485.4740 Fax



## Specifications:

The fire alarm documents box (FDB) shall be constructed of 18 gauge cold rolled steel. It shall have a red powder coat epoxy finish. The cover shall be permanently screened with 1" high lettering "FIRE ALARM DOCUMENTS" with white indelible ink. The access door shall be locked with a 3/4" barrel lock and the hinge shall be a solid width 12" stainless steel piano hinge. The enclosure will supply 4 mounting holes. Inside the enclosure will accommodate standard 8 1/2 x 11 manuals and loose document records that will be protected within the enclosure. A legend sheet will be permanently attached to the door for system required documentation, key contacts and system information. The enclosure shall also provide 2 key ring holders with a location to mount standard business type cards for key contact personnel.



Key Ring Hooks

Business Card Holder

For replacement forms order PIN: EA0316 (Qty. 10)

Property Information	Minimum Required Documentation (SIG-FUN)
Name of property: _____	(Reference NFPA-72 2013 Section 7.2.1)
Address: _____	1. Written narrative providing intent and system description
Description of property: _____	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
Occupancy type: _____	2. Riser diagram
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	3. Floor plan layout showing location of all devices and control equipment
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	4. Sequence of operation in either an input/output matrix or narrative form
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	5. Equipment technical data sheets
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	6. Manufacturers published instructions, including operation and maintenance instruction
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	7. Battery calculations (where batteries are provided)
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	8. Voltage drop calculations for notification appliance circuits
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	9. Completed record of inspection and testing in accordance with 7.6.6 and 7.8.2
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	10. Completed record of completion in accordance with 7.5.6 and 7.8.2
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	11. Copy of site specific software, where applicable
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	12. Record (as-built) drawings
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	13. Periodic inspection, testing, and maintenance documentation in accordance with Section 7.6
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	14. Records, record retention, and record maintenance in accordance with 7.7
	<input type="checkbox"/> N/A <input type="checkbox"/> Enclosed <input type="checkbox"/> Or Alt. Location
	Signed: _____ Date: ____/____/____

Space Age Electronics, Inc. 58 Chocksett Road Sterling, MA 01564 800-486-1723 www.1sae.com LT10644 Rev. 1

Legend sheet for storing system information including contacts, sign-off, maintenance & test information, and alternate locations of additional records.

## Ordering Information:

Part #	Description
SSU00672	Fire Document Box RED
SSU00673	Custom screening with your Logo
EA0315	10 pack door legend sheet

**ACEBOX**

Space Age Electronics, Inc.  
www.1sae.com  
800.486.1723 Toll Free  
508.485.0966 Local  
508.485.4740 Fax

This document is subject to change without notice, see doc # ED0479 for legal disclaimer

# MMF-300(A) Series, MDF-300

## Addressable Monitor Modules



### Addressable Devices

#### General

Four different monitor modules are available for Fire•Lite's intelligent control panels to suit a variety of applications. Monitor modules are used to supervise a circuit of dry-contact input devices, such as conventional heat detectors and pull stations, or monitor and power a circuit of two-wire smoke detectors (MMF-302(A)).

**MMF-300(A)** is a standard-sized module (typically mounts to a 4" [10.16 cm] square box) that supervises either a Style D (Class A) or Style B (Class B) circuit of dry-contact input devices.

**MMF-301(A)** is a miniature monitor module a mere 1.3" (3.302 cm) H x 2.75" (6.985 cm) W x 0.65" (1.651 cm) D that supervises a Style B (Class B) circuit of dry-contact input devices. Its compact design allows the MMF-301(A) to be mounted in a single-gang box behind the device it monitors.

**MMF-302(A)** is a standard-sized module used to monitor and supervise compatible two-wire, 24 volt, smoke detectors on a Style D (Class A) or Style B (Class B) circuit.

**MDF-300(A)** is a standard-sized dual monitor module used to monitor and supervise two independent two-wire Style B (Class B) dry-contact initiating device circuits (IDCs) at two separate, consecutive addresses in intelligent, two-wire systems.

LiteSpeed™ is a communication protocol developed by Fire•Lite Engineering that greatly increases the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other communication protocols.

#### MMF-300(A) Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the control panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems.
- LED flashes during normal operation and latches on steady to indicate alarm.

The MMF-300(A) Monitor Module is intended for use in intelligent, two-wire systems, where the individual address of each module is selected using the built-in rotary switches. It provides either a two-wire or four-wire fault-tolerant Initiating Device Circuit (IDC) for normally-open-contact fire alarm and supervisory devices. The module has a panel-controlled LED indicator. The MMF-300(A) can be used to replace M300(A) modules in existing systems.

#### MMF-300(A) APPLICATIONS

Use to monitor a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-open dry-contact alarm activation devices. May also be used to monitor normally-open supervisory devices with special



MMF-300(A) (Type H)

supervisory indication at the control panel. Monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the Style B circuit. No resistor is required for supervision of the Style D circuit.

#### MMF-300(A) OPERATION

Each MMF-300(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

#### MMF-300(A) SPECIFICATIONS

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.0 mA (LED on).

**Average operating current:** 375  $\mu$ A (LED flashing), 1 communication every 5 seconds, 47k EOL.

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**EOL resistance:** 47K Ohms.

**Temperature range:** 32°F to 120°F (0°C to 49°C).


**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

#### MMF-301(A) Mini Monitor Module

- Built-in type identification automatically identifies this device as a monitor module to the panel.
- Powered directly by two-wire SLC loop. No additional power required.
- High noise (EMF/RFI) immunity.

- Tinned, stripped leads for ease of wiring.
- Direct-dial entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems

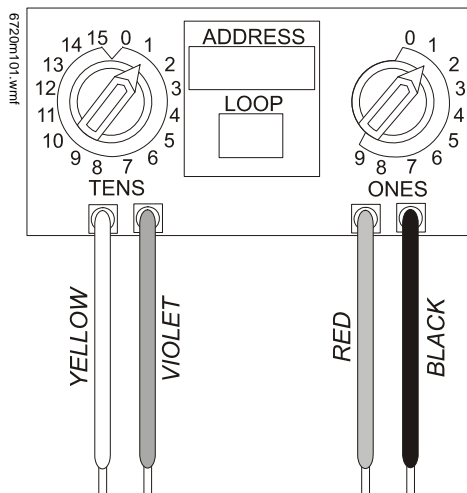

The MMF-301(A) Mini Monitor Module can be installed in a single-gang junction directly behind the monitored unit. Its small size and light weight allow it to be installed without rigid mounting. The MMF-301(A) is intended for use in intelligent, two-wire systems where the individual address of each module is selected using rotary switches. It provides a two-wire initiating device circuit for normally-open-contact fire alarm devices. The MMF-301(A) can be used to replace M301(A) modules in existing systems.

#### **MMF-301(A) APPLICATIONS**

Use to monitor a single device or a zone of four-wire smoke detectors, manual fire alarm pull stations, waterflow devices, or other normally-open dry-contact devices. May also be used to monitor normally-open supervisory devices with special supervisory indication at the control panel. Monitored circuit/device is wired as an NFPA Style B (Class B) Initiating Device Circuit. A 47K Ohm End-of-Line Resistor (provided) terminates the circuit.

#### **MMF-301(A) OPERATION**

Each MMF-301(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC).

#### **MMF-301(A) SPECIFICATIONS**

**Nominal operating voltage:** 15 to 32 VDC.

**Average operating current:** 350  $\mu$ A, 1 communication every 5 seconds, 47k EOL; 600  $\mu$ A Max. (Communicating, IDC Shorted).

**Maximum IDC wiring resistance:** 1500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 450  $\mu$ A.

**EOL resistance:** 47K Ohms.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 1.3" (3.302 cm) high x 2.75" (6.985 cm) wide x 0.65" (1.651 cm) deep.

**Wire length:** 6" (15.24 cm) minimum.

### **MMF-302(A) Interface Module**

- Supports compatible two-wire smoke detectors.

- Supervises IDC wiring and connection of external power source.
- High noise (EMF/RFI) immunity.
- SEMS screws with clamping plates for ease of wiring.
- Direct-dial entry entry of address: 01 – 159 on MS-9600 series panels, 01 – 99 on other compatible systems.
- LED flashes during normal operation.
- LED latches steady to indicate alarm on command from control panel.

The MMF-302(A) Interface Module is intended for use in intelligent, addressable systems, where the individual address of each module is selected using built-in rotary switches. This module allows intelligent panels to interface and monitor two-wire conventional smoke detectors. It transmits the status (normal, open, or alarm) of one full zone of conventional detectors back to the control panel. All two-wire detectors being monitored must be UL compatible with the module. The MMF-302(A) can be used to replace M302(A) modules in existing systems.

#### **MMF-302 (A) APPLICATIONS**

Use the MMF-302(A) to monitor a zone of two-wire smoke detectors. The monitored circuit may be wired as an NFPA Style B (Class B) or Style D (Class A) Initiating Device Circuit. A 3.9 K Ohm End-of-Line Resistor (provided) terminates the end of the Style B or D (class B or A) circuit (maximum IDC loop resistance is 25 Ohms). Install ELR across terminals 8 and 9 for Style D application.

#### **MMF-302(A) OPERATION**

Each MMF-302(A) uses one of the available module addresses on an SLC loop. It responds to regular polls from the control panel and reports its type and the status (open/normal/short) of its Initiating Device Circuit (IDC). A flashing LED indicates that the module is in communication with the control panel. The LED latches steady on alarm (subject to current limitations on the loop).

#### **MMF-302(A) SPECIFICATIONS**

**Nominal operating voltage:** 15 to 32 VDC.

**Maximum current draw:** 5.1 mA (LED on).

**Maximum IDC wiring resistance:** 25 Ohms.

**Average operating current:** 270  $\mu$ A, 1 communication and 1 LED flash every 5 seconds, 3.9k eol.

**EOL resistance:** 3.9K Ohms.

**External supply voltage (between Terminals T10 and T11):**

- DC voltage: 24 volts power limited.
- Ripple voltage: 0.1 Vrms maximum.
- Current: 90 mA per module maximum.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% noncondensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

### **MDF-300(A) Dual Monitor Module**

The MDF-300(A) Dual Monitor Module is intended for use in intelligent, two-wire systems. It provides two independent two-wire initiating device circuits (IDCs) at two separate, consecutive addresses. It is capable of monitoring normally open contact fire alarm and supervisory devices. The module has a single panel-controlled LED.

**NOTE:** The MDF-300(A) provides two Style B (Class B) IDC circuits ONLY. Style D (Class A) IDC circuits are NOT supported in any application.

#### **MDF-300(A) SPECIFICATIONS**

**Normal operating voltage range:** 15 to 32 VDC.

**Maximum current draw:** 6.4 mA (LED on).

**Average operating current:** 750  $\mu$ A (LED flashing).

**Maximum IDC wiring resistance:** 1,500 Ohms.

**Maximum IDC Voltage:** 11 Volts.

**Maximum IDC Current:** 240  $\mu$ A

**EOL resistance:** 47K Ohms.

**Temperature range:** 32° to 120°F (0° to 49°C).

**Humidity range:** 10% to 93% (non-condensing).

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 cm) deep box.

#### **MDF-300(A) AUTOMATIC ADDRESSING**

The MDF-300(A) automatically assigns itself to two addressable points, starting with the original address. For example, if the MDF-300(A) is set to address "26", then it will automatically assign itself to addresses "26" and "27".

**NOTE:** "Ones" addresses on the MDF-300(A) are 0, 2, 4, 6, or 8 only. Terminals 6 and 7 use the first address, and terminals 8 and 9 use the second address.

---

#### **CAUTION:**

Avoid duplicating addresses on the system.

---

**MDF-300(A):** Monitor module, dual, two independent Class B circuits.

**SMB500:** Optional surface-mount backbox.

**NOTE:** See installation instructions and refer to the SLC Wiring Manual, PN 51309.

### **Architects'/Engineers' Specifications**

Specifications of these devices and all FireLite products are available from FireLite.

## **Installation**

MMF-300(A), MMF-302(A), and MDF-300(A) modules mount directly to a standard 4" (10.16 cm) square, 2.125" (5.398 cm) deep, electrical box. They may also be mounted to the SMB500 surface-mount box. Mounting hardware and installation instructions are provided with each module. All wiring must conform to applicable local codes, ordinances, and regulations. These modules are intended for power-limited wiring only.

The MMF-301(A) module is intended to be wired and mounted without rigid connections inside a standard electrical box. All wiring must conform to applicable local codes, ordinances, and regulations.

## **Agency Listings and Approvals**

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S2424.
- **ULC:** S2424.
- **FM Approved.**
- **CSFM:** 7300-0075:0185.
- **MEA:** 72-01-E.

## **Product Line Information**

**NOTE:** "A" suffix indicates ULC-listed model.

**MMF-300(A):** Monitor module.

**MMF-301(A):** Monitor module, miniature.

**MMF-302(A):** Monitor module, two-wire detectors.



---

Fire-Lite® is a registered trademark and LiteSpeed™ and FireWatch™ are trademarks of Honeywell International Inc.  
©2015 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)

# CRF-300(A)

## Relay Module



### Addressable Devices

### General

The **CRF-300(A)** Addressable Relay Module provides the system with a dry-contact output for activating a variety of auxiliary devices, such as fans, door holders, dampers, control equipment, etc. Addressability allows the dry contact to be activated through panel programming, on a select basis.

LiteSpeed™ is a communication protocol developed by Fire•Lite Engineering that greatly enhances the speed of communication between analog intelligent devices. Intelligent devices communicate in a grouped fashion. If one of the devices within the group has new information, the panel CPU stops the group poll and concentrates on single points. The net effect is response speed greater than five times that of other designs.

### Features

- Built-in type identification automatically identifies these devices to the control panel.
- Internal circuitry and relay powered directly by two-wire SLC loop.
- Integral LED “blinks” green each time a communication is received from the control panel and turns on in steady red when activated.
- High noise immunity (EMF/RFI).
- Wide viewing angle of LED.
- SEMS screws with clamping plates for wiring ease.
- Direct-dial entry of address: 01– 159 for MS-9600(A) series panels, 01 – 99 on MS-9200UDLS(A) and MS-9050UD(A).

### Applications

The CRF-300(A) may be programmed to operate dry contacts for door holders, Air Handling Unit shutdown, etc., and to reset four-wire smoke detector power.

### Construction

- The face plate is made of off-white heat-resistant plastic.
- Controls include two rotary switches for direct-dial entry of address setting.
- The CRF-300(A) is configured for a single Class B (Style Y) or Class A (Style Z) Notification Appliance Circuit.
- The CRF-300(A) provides two Form-C dry contacts that switch together.

### Operation

Each CRF-300(A) uses one of the addresses on a SLC loop. It responds to regular polls from the control panel and reports its type and status, including the open/normal/short status of its Notification Appliance Circuit (NAC). The LED blinks with each poll received. On command, it activates its internal relay.

**NOTE:** Open/short supervision is suspended with the CRF-300.

Rotary switches set a unique address for each module. The address may be set before or after mounting. The built-in TYPE CODE (not settable) will identify the module to the control panel, so as to differentiate between a control module and a relay module.



CRF-300(A)

### Specifications

**Normal operating voltage:** 15 to 32 VDC.

**Maximum SLC current draw:** 6.5 mA (LED on).

**Average operating current:** 230  $\mu$ A direct poll (CLIP mode), 255  $\mu$ A group poll (LiteSpeed mode) with LED flashing.

**EOL resistance:** not used.

**Temperature range:** 32°F to 120°F (0°C to 49°C).

**Humidity range:** 10% to 93% non-condensing.

**Dimensions:** 4.5" (11.43 cm) high x 4" (10.16 cm) wide x 1.25" (3.175 cm) deep. Mounts to a 4" (10.16 cm) square x 2.125" (5.398 mm) deep box.

### Relay Contact Ratings

Load Description	Application	Maximum Voltage	Current Rating
Resistive	Non-Coded	30 VDC	3.0 A
Resistive	Coded	30 VDC	2.0 A
Resistive	Non-Coded	110 VDC	0.9 A
Resistive	Non-Coded	125 VAC	0.9 A
Inductive (L/R=5ms)	Coded	30 VDC	0.5 A
Inductive (L/R=2ms)	Coded	30 VDC	1.0 A
Inductive (PF=0.35)	Non-Coded	125 VAC	0.5 A

## Agency Listings and Approvals

In some cases, certain modules may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL:** S2424
- **ULC:** S2424
- **FM approved**
- **CSFM:** 7300-0075:185
- **MEA:** 72-01-E

## Product Line Information

**CRF-300(A):** Intelligent addressable relay module.

: Intelligent addressable relay module, ULC listed model.

**SMB500:** Optional surface-mount backbox.

**NOTE:** For installation instructions, see document I56-1190-005 and refer to the SLC Wiring Manual, document 51309.

**LiteSpeed™** is a trademark and **Fire•Lite®** Alarms is a registered trademark of Honeywell International Inc.  
©2009 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)

# BG-12LX

## Addressable Manual Pull Station



### Addressable Devices

#### General

The Fire-Lite BG-12LX is a state-of-the-art, dual-action (i.e., requires two motions to activate the station) pull station that includes an addressable interface (mounted inside) for Fire-Lite's addressable fire alarm control panels (FACPs). Because the BG-12LX is addressable, the control panel can display the exact location of the activated manual station. This leads fire personnel quickly to the location of the alarm.

#### Features

- Maintenance personnel can open station for inspection and address setting without causing an alarm condition.
- Built-in bicolor LED, which is visible through the handle of the station, flashes in normal operation and latches steady red when in alarm.
- Handle latches in down position and the word "ACTIVATED" appears to clearly indicate the station has been operated.
- Captive screw terminals wire-ready for easy connection to SLC loop (accepts up to 12 AWG/3.25 mm<sup>2</sup> wire).
- Can be surface mounted (with SB-10 or SB-I/O) or semi-flush mounted. Semi-flush mount to a standard single-gang, double-gang, or 4" (10.16 cm) square electrical box.
- Smooth dual-action design.
- Meets ADAAG controls and operating mechanisms guidelines (Section 4.1.3[13]); meets ADA requirement for 5 lb. maximum activation force.
- Highly visible.
- Attractive shape and textured finish.
- Key reset.
- Includes Braille text on station handle.
- Optional trim ring (BG12TR).
- Meets UL 38, Standard for Manually Actuated Signaling Boxes.

#### Construction

Shell, door, and handle are molded of durable polycarbonate material with a textured finish.

#### Specifications

- **Shipping Weight:** 9.6 oz. (272.15 g)
- **Normal operating voltage:** 24 VDC.
- **Maximum SLC loop voltage:** 28.0 VDC.
- **Maximum SLC standby current:** 375  $\mu$ A.
- **Maximum SLC alarm current:** 5 mA.
- **Temperature Range:** 32°F to 120°F (0°C to 49°C)
- **Relative Humidity:** 10% to 93% (noncondensing)
- **For use indoors in a dry location**

#### Installation

The BG-12LX will mount semi-flush into a single-gang, double-gang, or standard 4" (10.16 cm) square electrical outlet box, or will surface mount to the model SB-10 or SB-I/O surface backbox. If the BG-12LX is being semi-flush mounted, then the optional trim ring (BG12TR) may be used. The BG12TR is



FL PullStation.jpg

usually needed for semi-flush mounting with 4" (10.16 cm) or double-gang boxes (not with single-gang boxes).

#### Operation

Pushing in, then pulling down on the handle causes it to latch in the down/activated position. Once latched, the word "ACTIVATED" (in bright yellow) appears at the top of the handle, while a portion of the handle protrudes from the bottom of the station. To reset the station, simply unlock the station with the key and pull the door open. This action resets the handle; closing the door automatically resets the switch.

Each manual station, on command from the control panel, sends data to the panel representing the state of the manual switch. Two rotary decimal switches allow address settings (1 – 159 with Breakaway Tab removed for MS-9600 Series, 1 – 99 and MS-9200UDLS, 1 – 50 for MS-9050UD).

#### Architectural/Engineering Specifications

Manual Fire Alarm Stations shall be non-coded, with a key-operated reset lock in order that they may be tested, and so designed that after actual Emergency Operation, they cannot be restored to normal except by use of a key. An operated station shall automatically condition itself so as to be visually detected as activated. Manual stations shall be constructed of red-colored polycarbonate material with clearly visible operating instructions provided on the cover. The word FIRE shall appear on the front of the stations in white letters, 1.00 inches (2.54 cm) or larger. Stations shall be suitable for surface mounting on matching backbox SB-10 or SB-I/O; or semi-flush mounting on a standard single-gang, double-gang, or 4" (10.16 cm) square electrical box, and shall be installed

within the limits defined by the Americans with Disabilities Act (ADA) or per national/local requirements. Manual Stations shall be Underwriters Laboratories listed.

Manual stations shall connect with two wires to one of the control panel SLC loops. The manual station shall, on command from the control panel, send data to the panel representing the state of the manual switch. Manual stations shall provide address setting by use of rotary decimal switches.

## Product Line Information

**BG-12LX:** Dual-action addressable pull station. Includes key locking feature. (Listed for Canadian and non-Canadian applications.)

**SB-10:** Surface backbox; metal.

**SB-I/O:** Surface backbox; plastic.

**BG12TR:** Optional trim ring.

**17003:** Keys, set of two.

## Agency Listings and Approvals

In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- **UL/ULC Listed:** S711 (listed for Canadian and non-Canadian applications).
- **MEA:** 67-02-E.
- **CSFM:** 7150-0075:0184.
- **FM Approved.**

**Patented:** U.S. Patent No. D428,351; 6,380,846; 6,314,772; 6,632,108.

---

FireLite® Alarms® is a registered trademark of Honeywell International Inc.  
©2012 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.



Made in the U.S. A.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)

# DTK-2MHLP SERIES

Voice, Data and Signaling Circuit Modular Surge Protection



## Product Features

- Protects two pairs per module
- Multi-stage, SAD technology, hybrid design, provides the best possible protection
- Field replaceable, modular edge card connection design with a single point ground for fast installation, saves time
- Six voltage levels available to protect all types of voice/data applications
- Hard-wired multi-base mounting system allows you to protect up to ten pairs with a common ground. See next page for base part numbers
- Suitable for use on both AC and DC circuits

## Applications

- Fire Alarm Panel NAC, SLC, PIV and IDC Circuits
- Burglar Alarm Panels NAC and IDC Circuits
- 4-20mA Current Loops

## Selection Guide

DTK- 2MHLP

WB

Modular Hybrid Low  
Voltage Protector

Voltage  
Code

WB: With MB10 Base  
Blank: Module Only

Example to protect 2 pairs 36 V:

**DTK-2MHLP36BWB** (With DTK-MB10 base)

**DTK-2MHLP36B** (Module only)

Example to protect 6 pairs 24V, using multi-base options:

**3 x DTK-2MHLP24B** (Modules)

**1 x DTK-3MB** (Base for 3 modules)

## Technical Specifications

2MHLP	5B	12B	24B	36B	48B	75B
Service Voltage:	5V	12V	24V	36V	48V	75V
MCOV:	6V	18V	33V	48V	64V	90V
Clamping Voltage:	6.8V	21.6V	39V	57V	76V	108V
Max Surge Current:	20,000 Amps					
Max Continuous Current:	5 Amps					
Protection Modes:	Line-Ground (All)					
Data Rate:	200kbps to 2Mbps					

## Mechanical Characteristics

Base Connection Method:	10AWG max screw terminals	
Module Connection Method:	Edge card into mounting base	
Housing:	ABS	
Operating Temperature:	-40°F - 158°F (-40°C - 70°C)	
Maximum Humidity:	95% non-condensing	
Dimensions:	<b>Module</b>	<b>Module with Base</b>
	1.9"H x 2.1"W x 1.4"D (48mm x 53mm x 36mm)	2.6"H x 3.25"W x 1.5"D (66mm x 83mm x 38mm)
Weight:	1.2 oz (34g)	2.8 oz (79g)

## Quality, Standards & Approval

Agency Approvals:	UL497B
Warranty:	Ten Year Limited Warranty

Every precaution has been taken to ensure that this literature is accurate and complete. DITEK Corporation assumes no responsibility and disclaims all liability for damages resulting from the use of this information or for any errors or omissions.



# DTK-2MHLP SERIES

Voice, Data and Signaling Circuit Modular Surge Protection




## Base Part Number and Dimensions


Part Number	# Pairs Protected	Dimensions
DTK-MBV	2	3.25"H x 1.50"W (82.5mm x 38.1mm)
DTK-MB10	2	3.25"H x 1.50"W (82.5mm x 38.1mm)
DTK-2MB	4	3.25"H x 3.00"W (82.5mm x 76.2mm)
DTK-3MB	6	3.25"H x 4.50"W (82.5mm x 114.3mm)
DTK- 4MB	8	3.25"H x 6.00"W (82.5mm x 152.4mm)
DTK- 5MB	10	3.25"H x 7.50"W (82.5mm x 190.5mm)



DTK-MB10

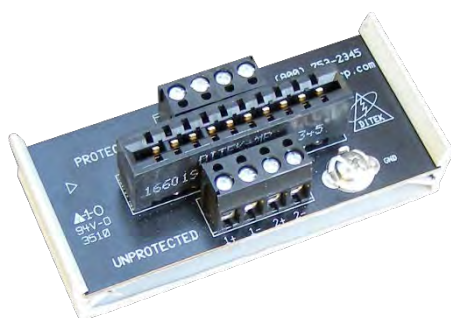


DTK-MBV  
Horizontal wiring across base




DTK-2MB



DTK-3MB

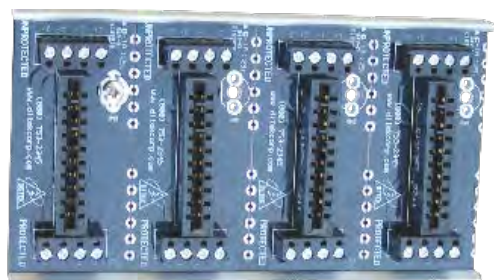

DTK-4MB

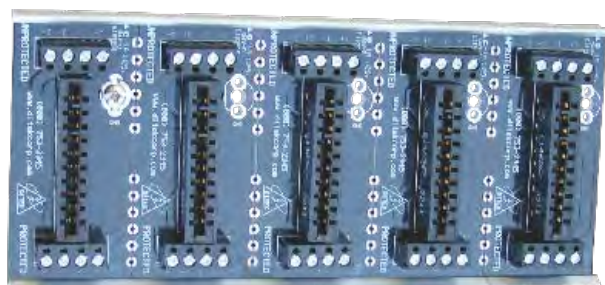

DTK-5MB

# SD365(A) Series

## Addressable Photoelectric Detectors



### Addressable Devices

### General

The Fire-Lite SD365(A), SD365T(A), and SD365R(A) Series addressable plug-in photoelectric smoke detectors are designed for both performance and aesthetics. A new modern, sleek, contemporary design and enhanced optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards.

Exclusively for use with Fire-Lite's addressable fire alarm control panels, the SD365(A) Series point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for emergency personnel to quickly locate a fire during its early stages, potentially saving precious rescue time while also reducing property damage. Two LEDs on each sensor light to provide a local, visible sensor indication.

The SD365(A) Series also offers 135°F (57°C) fixed temperature thermal sensing on the SD365T(A) and a remote test capable detector on the SD365R(A) for use with DNR(A)/DNRW duct smoke detector housings.

### Features

#### SLC LOOP

- Two-wire loop connection.
- Unit uses base for wiring.

#### ADDRESSING

- Addressable by device.
- Rotary, decimal addressing: *Please refer to the Fire-Lite panel manuals for device capacity.*

#### ARCHITECTURE

- New modern profile for improved aesthetics.
- Unique single-source design to respond quickly and dependably to a broad range of fires.
- Integral communications and built-in type identification.
- Built-in tamper-resistant feature.
- Removable cover and insect-resistant screen for simple field cleaning.

#### OPERATION

- Designed to meet UL 268 7th Edition.
- Factory preset at 1.5% nominal sensitivity for panel alarm threshold level.
- Visible LED "blinks" when the unit is addressed (communicating with the fire panel) and latches on in alarm.
- Low standby current.

#### MECHANICALS

- Sealed against back pressure.
- Mounts to: single-gang box, 3.5" (8.89 cm) or 4.0" (10.16 cm) octagonal box, or 4.0" (10.16 cm) square electrical box (*with or without a mud ring - not included*).

#### OPTIONS

- Remote LED output connection, RA100Z.



SD365

### Installation

SD365(A) series plug-in detectors use a detachable mounting base to simplify installation, service and maintenance.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see DF-60059.

**NOTE:** Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class B) wiring. SD365R(A) mounts in a D355PL(A) or DNR(A) /DNRW duct detector housing.

### Operation

Each SD365(A) Series detector uses one possible addresses on the Fire-lite Signaling Line Circuit (SLC). It responds to regular polls from the system and reports its type and status.

### Detector Sensitivity Test

Each detector can have its sensitivity tested (required per NFPA 72, Chapter 14 on *Inspection, Testing and Maintenance*) when installed/connected to an ES-50X or ES-200X addressable fire alarm control panel. The results of the sensitivity test can be printed off the for record keeping.

### Specification

**Voltage range:** 15 – 32 VDC (peak).

**Standby current:** 200 µA @ 24 VDC.

**Max current:** 4.5 mA @ 24 VDC (latched "ON").

**Air velocity:** 4,000 ft./min. (20 m/sec.) maximum.

**Sensitivity:** UL Applications: 0.5% to 4.0% per foot obscuration

**Size:** 2.0" (5.3 cm) high; base determines diameter.

– B300-6: 6.1" (15.6 cm) diameter.

– B501: 4" (10.2 cm) diameter.

For a complete list of detector bases see DN-60981.

**Shipping weight:** 3.4 oz. (95 g).



#### Operating temperature range:

- SD365(A): 0°C to 50°C (32°F to 122°F);
- SD365T(A): 0°C to 38°C (32°F to 100°F).
- SD365R(A): installed in a DNR(A)/DNRW -20°C to 70°C (-4°F to 158°F).

**Relative humidity:** 10%-93%, non-condensing.

## Listings

Listings and approvals below apply to the SD365 Series detectors. In some cases, certain detectors may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

- UL/ULC Listed: S1059
- CSFM: 7272-0075-0502
- FM Approved

## Product Line Information

**NOTE:** Detectors must be mounted to one of the Intelligent Bases listed below.

**NOTE:** “IV” suffix indicates LiteSpeed® and CLIP device.

**NOTE:** “A” suffix indicates Canadian version.

**SD365(A):** White, Addressable photoelectric detector; B300-6 base included. LiteSpeed only.

**SD365(A)-IV:** Ivory, Addressable photoelectric detector; B300-6 base included.

**SD365T(A):** White, Same as SD365 but with thermal element; B300-6 base included. LiteSpeed only.

**SD365T(A)-IV:** Ivory, Same as SD365 but with thermal element; B300-6 base included.

**SD365R(A):** White, Remote test capable addressable photoelectric detector for use with DNR(A)/DNRW. LiteSpeed only.

**SD365R(A)-IV:** Ivory, Remote test capable addressable photoelectric detector; for use with DNR(A)/DNRW.

### INTELLIGENT BASES

**NOTE:** For details on intelligent bases, see DN-60981.

**B300-6:** White, 6” base, standard flanged low-profile mounting base. (CSFM: 7300-1653:0109 Pending)

**B300-6-IV:** Ivory, 6” base, standard flanged low-profile mounting base. (CSFM: 7300-1653:0109 Pending)

**B300A-6:** Same as B300-6, ULC listed.

**B300A-6-IV:** Ivory, 6” standard flanged low-profile mounting base, ULC listed.

**B300-6-BP:** Bulk pack of B300-6, package contains 10

**B501-WHITE:** White, 4” standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-BL:** Black, 4” standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-IV:** Ivory color, 4” standard European flangeless mounting base. UL/ULC listed. (CSFM: 7300-1653:0109 Pending)

**B501-WHITE-BP:** Bulk pack of B501-WHITE contains 10.

**B224RB-WH:** White, relay base. (CSFM: 7300-1653:0216 Pending)

**B224RB-IV:** Ivory, relay base. (CSFM: 7300-1653:0216 Pending)

**B224RBA-WH:** White, relay base, ULC listing.

**B224RBA-IV:** Ivory, relay base, ULC listing.

**B224BI-WH:** White, **isolator** detector base. (CSFM: 7300-1653:0216 Pending)

**B224BI-IV:** Ivory **isolator** detector base. (CSFM: 7300-1653:0216 Pending)

**B224BIA-WH:** White, **isolator** detector base, ULC listing.

**B224BIA-IV:** Ivory **isolator** detector base, ULC listing.

**B200S-WH:** White, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213 Pending)

**B200S-IV:** Ivory, Intelligent addressable sounder base capable of producing sound output in high or low volume with ANSI Temporal 3, ANSI Temporal 4, continuous tone, marching tone, and custom tone. Uses FlashScan protocol. (CSFM: 7300-1653:0213 Pending)

**B200SA-WH:** Same as B200S-WH, ULC listing.

**B200SA-IV:** Same as B200S-IV, ULC listing.

**B200SCOA-WH:** White, Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications).

**B200SCOA-IV:** Ivory Intelligent, programmable sounder base in English/French (required in Canada for ULC applications with CO Series detector applications, ULC listing).

**B200S-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238 Pending)

**B200S-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. (CSFM: 7300-1653:0238 Pending)

**B200SR-WH:** White, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213 Pending)

**B200SR-IV:** Ivory, Intelligent sounder base capable of producing sound output with ANSI Temporal 3 or continuous tone. Intended for retrofit applications. (CSFM: 7300-1653:0213 Pending)

**B200SRA-WH:** Same as B200SR-WH with, ULC listing.

**B200SRA-IV:** Same as B200SR-IV in Ivory color, ULC listing.

**B200SR-LF-WH:** White, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238 Pending)

**B200SR-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base. Produces a fundamental frequency of 520 Hz +/- 10% with a square wave or its equivalent; designed to meet the NFPA 72 sleeping space requirement. Intended for retrofit applications. (CSFM: 7300-1653:0238 Pending)

### MOUNTING KITS AND ACCESSORIES

**TR300:** White, replacement flange for B210LP(A) base.

**TR300-IV:** Ivory, replacement flange for B210LP(A) base.

**RA100Z(A):** Remote LED annunciator. 3 – 32 VDC. Mounts to a U.S. single-gang electrical box. For use with B501(A) and B300-6(A).

**M02-04-00:** Test magnet.

**M02-09-00:** Test magnet with telescoping handle.

**CK300:** Color Kit (includes cover and trim ring), white, 10-pack.

**CK300-IV:** Color Kit (includes cover and trim ring), ivory, 10-pack.

**CK300-BL:** Color Kit (includes cover and trim ring), black, 10-pack.

---

**FireLite® Alarms** is a registered trademark of Honeywell International Inc.  
©2018 by Honeywell International Inc. All rights reserved. Unauthorized use of this document is strictly prohibited.



This document is not intended to be used for installation purposes.  
We try to keep our product information up-to-date and accurate.  
We cannot cover all specific applications or anticipate all requirements.  
All specifications are subject to change without notice.

For more information, contact Fire•Lite Alarms. Phone: (800) 627-3473, FAX: (877) 699-4105.  
[www.firelite.com](http://www.firelite.com)



# Indoor Selectable-Output Horns, Strobes, and Horn Strobes for Wall Applications

*System Sensor L-Series audible visible notification products are rich with features guaranteed to cut installation times and maximize profits with lower current draw and modern aesthetics.*

## Features

- Updated Modern Aesthetics
- Small profile devices for Horns and Horn Strobes
- Plug-in design with minimal intrusion into the back box
- Tamper-resistant construction
- Automatic selection of 12- or 24-volt operation at 15 and 30 candela
- Field-selectable candela settings on wall units: 15, 30, 75, 95, 110, 135, and 185
- Horn rated at 88+ dBA at 16 volts
- Rotary switch for horn tone and two volume selections
- Mounting plate for all standard and all compact wall units
- Mounting plate shorting spring checks wiring continuity before device installation
- Electrically Compatible with legacy SpectraAlert and SpectAlert Advance devices
- Compatible with MDL3 sync module
- Listed for wall mounting only

## Agency Listings



**The System Sensor L-Series** offers the most versatile and easy-to-use line of horns, strobes, and horn strobes in the industry with lower current draws and modern aesthetics. With white and red plastic housings, standard and compact devices, and plain, FIRE, and FUEGO-printed devices, System Sensor L-Series can meet virtually any application requirement.

The L-Series line of wall-mount horns, strobes, and horn strobes include a variety of features that increase their application versatility while simplifying installation. All devices feature plug-in designs with minimal intrusion into the back box, making installations fast and foolproof while virtually eliminating costly and time-consuming ground faults.

To further simplify installation and protect devices from construction damage, the L-Series utilizes a universal mounting plate for all models with an onboard shorting spring, so installers can test wiring continuity before the device is installed.

Installers can also easily adapt devices to suit a wide range of application requirements using field-selectable candela settings, automatic selection of 12- or 24-volt operation, and a rotary switch for horn tones with two volume selections.

## L-Series Specifications

### Architect/Engineer Specifications

#### General

L-Series standard horns, strobes, and horn strobes shall mount to a standard 2 x 4 x 1 7/8-inch back box, 4 x 4 x 1 1/2-inch back box, 4-inch octagon back box, or double-gang back box. L-Series compact products shall mount to a single-gang 2 x 4 x 1 7/8-inch back box. A universal mounting plate shall be used for mounting ceiling and wall products for all standard models and a separate universal mounting plate shall be used for mounting wall compact models. The notification appliance circuit wiring shall terminate at the universal mounting plate. Also, L-Series products, when used with the Sync•Circuit™ Module accessory, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts. When used with the Sync•Circuit Module, 12-volt-rated notification appliance circuit outputs shall operate between 8.5 and 17.5 volts; 24-volt-rated notification appliance circuit outputs shall operate between 16.5 and 33 volts. Indoor L-Series products shall operate between 32 and 120 degrees Fahrenheit from a regulated DC or full-wave rectified unfiltered power supply. Strobes and horn strobes shall have field-selectable candela settings including 15, 30, 75, 95, 110, 135, and 185.

#### Strobe

The strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and shall be approved for fire protective service. The strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system.

#### Horn Strobe Combination

The horn strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and UL 464 and shall be approved for fire protective service. The horn strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The horn shall have two audibility options and an option to switch between a temporal three pattern and a non-temporal (continuous) pattern. These options are set by a multiple position switch. The horn on horn strobe models shall operate on a coded or non-coded power supply.

#### Synchronization Module

The module shall be a System Sensor Sync•Circuit model MDL3 listed to UL 464 and shall be approved for fire protective service. The module shall synchronize SpectraAlert strobes at 1 Hz and horns at temporal three. Also, while operating the strobes, the module shall silence the horns on horn strobe models over a single pair of wires. The module shall mount to a 4 1/16 x 4 1/16 x 2 1/8-inch back box. The module shall also control two Style Y (class B) circuits or one Style Z (class A) circuit. The module shall synchronize multiple zones. Daisy chaining two or more synchronization modules together will synchronize all the zones they control. The module shall not operate on a coded power supply.

### Physical/Electrical Specifications

<b>Standard Operating Temperature</b>	32°F to 120°F (0°C to 49°C)
<b>Humidity Range</b>	10 to 93% non-condensing
<b>Strobe Flash Rate</b>	1 flash per second
<b>Nominal Voltage</b>	Regulated 12 DC or regulated 24 DC/FWR <sup>1,2</sup>
<b>Operating Voltage Range</b>	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
<b>Operating Voltage Range MDL3 Sync Module</b>	8.5 to 17.5 V (12 V nominal) or 16.5 to 33 V (24 V nominal)
<b>Input Terminal Wire Gauge</b>	12 to 18 AWG
<b>Wall-Mount Dimensions (including lens)</b>	5.6" L x 4.7" W x 1.91" D (143 mm L x 119 mm W x 49 mm D)
<b>Compact Wall-Mount Dimensions (including lens)</b>	5.26" L x 3.46" W x 1.91" D (133 mm L x 88 mm W x 49 mm D)
<b>Horn Dimensions</b>	5.6" L x 4.7" W x 1.25" D (143 mm L x 119 mm W x 32 mm D)
<b>Compact Horn Dimensions</b>	5.25" L x 3.45" W x 1.25" D (133mm L x 88mm W x 32mm D)

1. Full Wave Rectified (FWR) voltage is a non-regulated, time-varying power source that is used on some power supply and panel outputs.

2. Strobe products will operate at 12 V nominal only for 15 cd and 30 cd.

## UL Current Draw Data

UL Max. Strobe Current Draw (mA RMS)				
	Candela	8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Candela Range	15	88	43	60
	30	143	63	83
	75	N/A	107	136
	95	N/A	121	155
	110	N/A	148	179
	135	N/A	172	209
	185	N/A	222	257

UL Max. Horn Current Draw (mA RMS)				
		8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Sound Pattern	dB			
Temporal	High	39	44	54
Temporal	Low	28	32	54
Non-Temporal	High	43	47	54
Non-Temporal	Low	29	32	54
3.1 KHz Temporal	High	39	41	54
3.1 KHz Temporal	Low	29	32	54
3.1 KHz Non-Temporal	High	42	43	54
3.1 KHz Non-Temporal	Low	28	29	54
Coded	High	43	47	54
3.1 KHz Coded	High	42	43	54


UL Max. Current Draw (mA RMS), 2-Wire Horn Strobe, Candela Range (15–115 cd)									
DC Input	8-17.5 Volts		16-33 Volts						
	15cd	30cd	15cd	30cd	75cd	95cd	110cd	135cd	185cd
Temporal High	98	158	54	74	121	142	162	196	245
Temporal Low	93	154	44	65	111	133	157	184	235
Non-Temporal High	106	166	73	94	139	160	182	211	262
Non-Temporal Low	93	156	51	71	119	139	162	190	239
3.1K Temporal High	93	156	53	73	119	140	164	190	242
3.1K Temporal Low	91	154	45	66	112	133	160	185	235
3.1K Non-Temporal High	99	162	69	90	135	157	175	208	261
3.1K Non-Temporal Low	93	156	52	72	119	138	162	192	242
FWR Input	16-33 Volts								
	15cd	30cd	75cd	95cd	110cd	135cd	185cd		
Temporal High	83	107	156	177	198	234	287		
Temporal Low	68	91	145	165	185	223	271		
Non-Temporal High	111	135	185	207	230	264	316		
Non-Temporal Low	79	104	157	175	197	235	283		
3.1K Temporal High	81	105	155	177	196	234	284		
3.1K Temporal Low	68	90	145	166	186	222	276		
3.1K Non-Temporal High	104	131	177	204	230	264	326		
3.1K Non-Temporal Low	77	102	156	177	199	234	291		

## Horn Tones and Sound Output Data


Horn and Horn Strobe Output (dBA)					
Switch Position	Sound Pattern	dB	8–17.5 Volts	16–33 Volts	
			DC	DC	FWR
1	Temporal	High	84	89	89
2	Temporal	Low	75	83	83
3	Non-Temporal	High	85	90	90
4	Non-Temporal	Low	76	84	84
5	3.1 KHz Temporal	High	83	88	88
6	3.1 KHz Temporal	Low	76	82	82
7	3.1 KHz Non-Temporal	High	84	89	89
8	3.1 KHz Non-Temporal	Low	77	83	83
9*	Coded	High	85	90	90
10*	3.1 KHz Coded	High	84	89	89

\* Settings 9 and 10 are not available on the 2-wire horn strobes.


## L-Series Dimensions

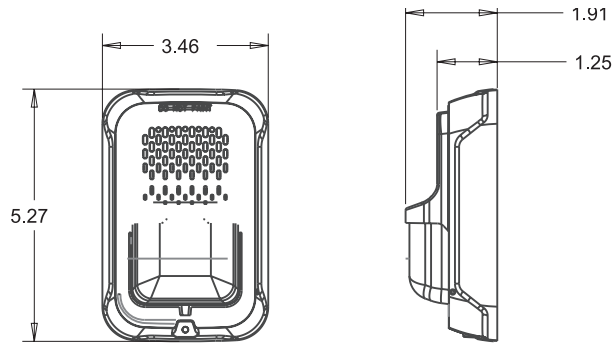


**Compact Strobe / Horn Strobe**

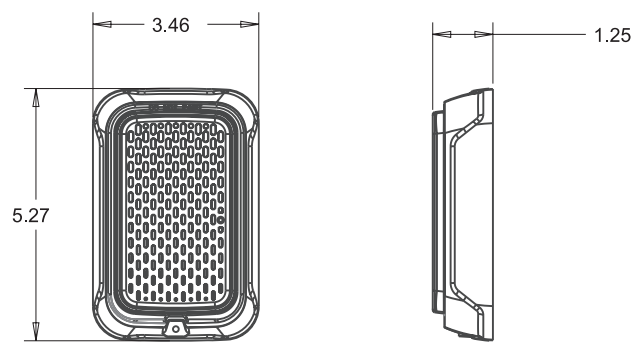

**Compact Horn**

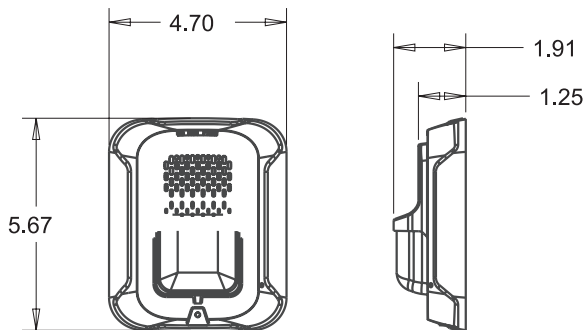

**Strobe / Horn Strobe**

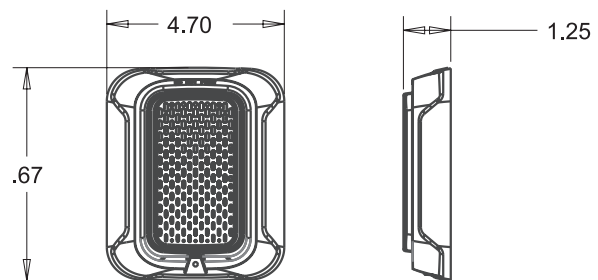

**Horn**

## L-Series Ordering Information

Model	Description
<b>Wall Horn Strobes</b>	
P2RL	2-Wire, Horn Strobe, Red
P2WL	2-Wire, Horn Strobe, White
P2GRL	2-Wire, Compact Horn Strobe, Red
P2GWL	2-Wire, Compact Horn Strobe, White
P2RL-P	2-Wire, Horn Strobe, Red, Plain
P2WL-P	2-Wire, Horn Strobe, White, Plain
P2RL-SP	2-Wire, Horn Strobe, Red, FUEGO
P2WL-SP	2-Wire, Horn Strobe, White, FUEGO
<b>Wall Strobes</b>	
SRL	Strobe, Red
SWL	Strobe, White
SGRL	Compact Strobe, Red
SGWL	Compact Strobe, White
SRL-P	Strobe, Red, Plain
SWL-P	Strobe, White, Plain
SRL-SP	Strobe, Red, FUEGO
SWL-CLR-ALERT	Strobe, White, ALERT

Model	Description
<b>Horns</b>	
HRL	Horn, Red
HWL	Horn, White
HGRL	Compact Horn, Red
HGWL	Compact Horn, White
<b>Accessories</b>	
TR-2	Universal Wall Trim Ring Red
TR-2W	Universal Wall Trim Ring White
SBBRL	Wall Surface Mount Back Box, Red
SBBWL	Wall Surface Mount Back Box, White
SBBGRL	Compact Wall Surface Mount Back Box, Red
SBBGWL	Compact Wall Surface Mount Back Box, White

### Notes:

All -P models have a plain housing (no "FIRE" marking on cover)

All -SP models have "FUEGO" marking on cover

All -ALERT models have "ALERT" marking on cover



3825 Ohio Avenue • St. Charles, IL 60174  
 Phone: 800-SENSOR2 • Fax: 630-377-6495  
[www.systemsensor.com](http://www.systemsensor.com)

©2017 System Sensor.  
 Product specifications subject to change without notice. Visit [systemsensor.com](http://systemsensor.com)  
 for current product information, including the latest version of this data sheet.  
 AVDS86503 • 03/17





# Indoor Selectable-Output Strobes and Horn Strobes for Ceiling Applications

*System Sensor L-Series audible visible notification products are rich with features guaranteed to cut installation times and maximize profits with lower current draw and modern aesthetics.*

## Features

- Plug-in design with minimal intrusion into the back box
- Tamper-resistant construction
- Automatic selection of 12- or 24-volt operation at 15 and 30 candela
- Field-selectable candela settings on ceiling units: 15, 30, 75, 95, 115, 150, and 177
- Horn rated at 88+ dBA at 16 volts
- Rotary switch for horn tone and two volume selections
- Universal mounting plate for ceiling units
- Mounting plate shorting spring feature checks wiring continuity before device installation
- Electrically Compatible with legacy SpectrAlert and SpectrAlert Advance devices
- Compatible with MDL3 sync module
- Listed for ceiling mounting only



**The System Sensor L-Series** offers the most versatile and easy-to-use line of horns, strobes, and horn strobes in the industry with lower current draws and modern aesthetics. With white and red plastic housings, wall and ceiling mounting options, System Sensor L-Series can meet virtually any application requirement.

The entire L-Series product line of ceiling-mount strobes and horn strobes include a variety of features that increase their application versatility while simplifying installation. All devices feature a plug-in design with minimal intrusion into the back box, making installations fast and foolproof while virtually eliminating costly and time-consuming ground faults.

To further simplify installation, the L-Series utilizes a universal mounting plate so installers can mount them to a wide array of back boxes. With an onboard shorting spring, installers can test wiring continuity before the device is installed.

Installers can also easily adapt devices to suit a wide range of application requirements using field-selectable candela settings, automatic selection of 12- or 24-volt operation, and a rotary switch for horn tones with two volume selections.

## Agency Listings



## L-Series Specifications

### Architect/Engineer Specifications

#### General

L-Series ceiling-mount strobes and horn strobes shall mount to a standard 4 × 4 × 1½-inch back box, 4-inch octagon back box, or double-gang back box. Two-wire products shall also mount to a single-gang 2 × 4 × 17/8-inch back box. A universal mounting plate shall be used for mounting ceiling and wall products. The notification appliance circuit wiring shall terminate at the universal mounting plate. Also, L-Series products, when used with the Sync•Circuit™ Module accessory, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts. When used with the Sync•Circuit Module, 12-volt-rated notification appliance circuit outputs shall operate between 8.5 and 17.5 volts; 24-volt-rated notification appliance circuit outputs shall operate between 16.5 and 33 volts. Indoor L-Series products shall operate between 32 and 120 degrees Fahrenheit from a regulated DC or full-wave rectified unfiltered power supply. Ceiling strobes and horn strobes shall have field-selectable candela settings including 15, 30, 75, 95, 115, 150, and 177.

#### Strobe

The strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and shall be approved for fire protective service. The strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system.

#### Horn Strobe Combination

The horn strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and UL 464 and shall be approved for fire protective service. The horn strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The horn shall have two audibility options and an option to switch between a temporal three pattern and a non-temporal (continuous) pattern. These options are set by a multiple position switch. The horn on horn strobe models shall operate on a coded or non-coded power supply.

#### Synchronization Module

The module shall be a System Sensor Sync•Circuit model MDL3 listed to UL 464 and shall be approved for fire protective service. The module shall synchronize L-Series strobes at 1 Hz and horns at temporal three. Also, while operating the strobes, the module shall silence the horns on horn strobe models over a single pair of wires. The module shall mount to a 4 11/16 × 4 11/16 × 2 1/8-inch back box. The module shall also control two Style Y (class B) circuits or one Style Z (class A) circuit. The module shall synchronize multiple zones. Daisy chaining two or more synchronization modules together will synchronize all the zones they control. The module shall not operate on a coded power supply.

### Physical/Electrical Specifications

<b>Standard Operating Temperature</b>	32°F to 120°F (0°C to 49°C)
<b>Humidity Range</b>	10 to 93% non-condensing
<b>Strobe Flash Rate</b>	1 flash per second
<b>Nominal Voltage</b>	Regulated 12 VDC or regulated 24 DC/FWR <sup>1</sup>
<b>Operating Voltage Range<sup>2</sup></b>	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
<b>Operating Voltage Range (MDL3)</b>	8.5 to 17.5V (12 V nominal) or 16.5 to 33 V (24V nominal)
<b>Input Terminal Wire Gauge</b>	12 to 18 AWG
<b>Ceiling-Mount Dimensions (including lens)</b>	6.8" diameter × 2.5" high (173 mm diameter × 64 mm high)
<b>Ceiling-Mount Surface Mount Back Box Skirt Dimensions (SBBCRL, SBBCWL)</b>	6.9" diameter × 3.4" high (175 mm diameter × 86 mm high)

#### Notes:

1. Full Wave Rectified (FWR) voltage is a non-regulated, time-varying power source that is used on some power supply and panel outputs.
2. P, S, PC, and SC products will operate at 12 V nominal only for 15 and 30 cd.



## UL Current Draw Data


UL Max. Strobe Current Draw (mA RMS)			
Candela	8–17.5 Volts	16–33 Volts	
	DC	DC	FWR
15	87	41	60
30	153	63	86
75	N/A	111	142
95	N/A	134	164
115	N/A	158	191
150	N/A	189	228
177	N/A	226	264

UL Max. Current Draw (mA RMS), 2-Wire Horn Strobe									
DC Input	8-17.5 Volts		16-33 Volts						
	15cd	30cd	15cd	30cd	75cd	95cd	115cd	150cd	177cd
Temporal High	103	167	71	90	143	165	187	217	254
Temporal Low	96	165	54	71	137	161	185	211	249
Non-Temporal High	106	173	71	90	141	165	187	230	273
Non-Temporal Low	95	166	54	71	124	161	170	216	258
3.1K Temporal High	111	164	69	94	147	163	184	229	257
3.1K Temporal Low	103	163	54	88	143	155	185	212	252
3.1K Non-Temporal High	111	172	69	94	144	164	202	229	271
3.1K Non-Temporal Low	103	169	54	88	131	155	187	217	259
FWR Input	16-33 Volts								
	15cd	30cd	75cd	95cd	115cd	150cd	177cd		
Temporal High	107	135	179	198	223	254	286		
Temporal Low	78	101	151	172	199	229	262		
Non-Temporal High	107	135	179	198	223	254	286		
Non-Temporal Low	78	101	151	172	199	229	262		
3.1K Temporal High	108	135	179	200	225	255	289		
3.1K Temporal Low	79	101	150	171	196	229	260		
3.1K Non-Temporal High	108	135	179	200	225	255	289		
3.1K Non-Temporal Low	79	101	150	171	196	229	260		


## Horn Strobe Tones and Sound Output Data

Horn and Horn Strobe Output (dBA)					
Switch Position	Sound Pattern	dB	8–17.5 Volts	16–33 Volts	
			DC	DC	FWR
1	Temporal	High	84	89	89
2	Temporal	Low	75	83	83
3	Non-Temporal	High	85	90	90
4	Non-Temporal	Low	76	84	84
5	3.1 KHz Temporal	High	83	88	88
6	3.1 KHz Temporal	Low	76	82	82
7	3.1 KHz Non-Temporal	High	84	89	89
8	3.1 KHz Non-Temporal	Low	77	83	83


## L-Series Dimensions

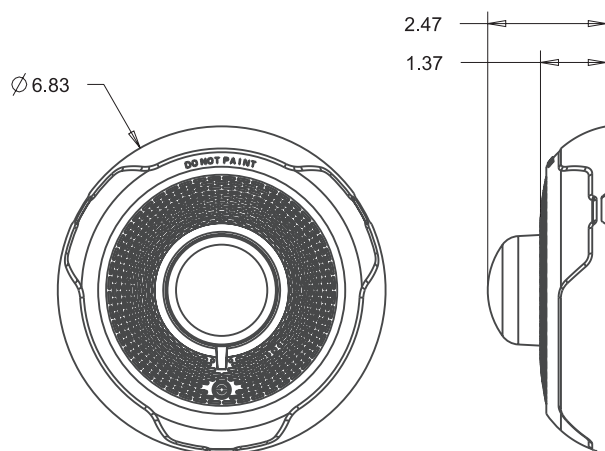

Ceiling-Mount Horn Strobes

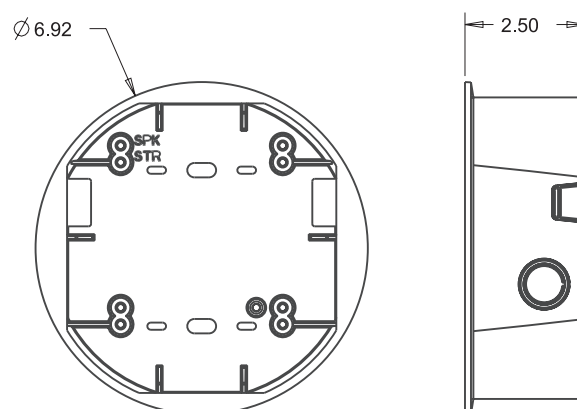

Ceiling Surface Mount Back Box

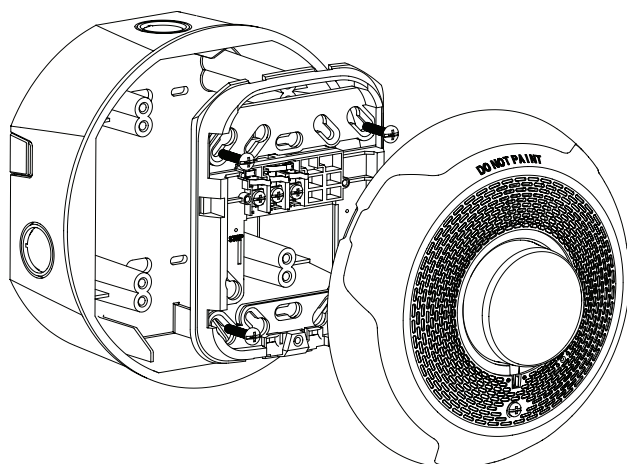

Ceiling Mount Horn Strobes with Ceiling Surface Mount Back Box

## L-Series Ordering Information

Model	Description
<b>Ceiling Horn Strobes</b>	
PC2RL	2-Wire, Horn Strobe, Red
PC2WL	2-Wire, Horn Strobe, White

Model	Description
<b>Ceiling Strobes</b>	
SCRL	Strobe, Red
SCWL	Strobe, White
SCWL-CLR-ALERT	Strobe, White, ALERT
<b>Accessories</b>	
TRC-2	Universal Ceiling Trim Ring Red
TRC-2W	Universal Ceiling Trim Ring White
SBBCRL	Ceiling Surface Mount Back Box, Red
SBBCWL	Ceiling Surface Mount Back Box, White



3825 Ohio Avenue • St. Charles, IL 60174  
Phone: 800-SENSOR2 • Fax: 630-377-6495

©2017 System Sensor.  
Product specifications subject to change without notice. Visit [systemsensor.com](http://systemsensor.com)  
for current product information, including the latest version of this data sheet.  
AVDS86801 • 03/17



# Outdoor Selectable-Output Horns, Strobes, and Horn Strobes for Wall Applications

*SpectrAlert® Advance outdoor audible visible products are rich with features that cut installation times and maximize profits.*

## Features

- Weatherproof per NEMA 4X, IP56
- Listed to UL 1638 (strobe) and UL 464 (horn)
- Compatible with System Sensor synchronization protocol and legacy SpectrAlert products
- Field-selectable candela settings: 15, 15/75, 30, 75, 95, 110, 115, 135, 150, 177, and 185
- Automatic selection of 12- or 24-volt operation at 15 and 15/75 candela
- Rotary switch for horn tone and three volume selections
- Horn rated at 88+ dBA at 16 volts
- Rated from -40°F to 151°F
- Universal mounting plate with an onboard shorting spring that tests wiring continuity before devices are installed
- Plug-in design with minimal intrusion into the back box
- Tamper-resistant construction
- Listed for ceiling or wall mounting

## Agency Listings



S4011 (chimes, horn strobes, horns)  
S3593 (outdoor and alert strobes)



3023572



MEA452-05-E



7300-1653-187 (outdoor strobes)  
7125-1653-188 (horn strobes,  
chime strobes)  
7135-1653-189 (horns, chimes)



**SpectrAlert Advance** offers the broadest line of outdoor horns, strobes, and horn strobes in the industry. With white or red plastic housings, wall or ceiling mounting options, and plain or FIRE-printed devices, SpectrAlert Advance can meet virtually any application requirement, including indoor, outdoor, wet, and dry applications in temperatures from -40°F to 151°F.

Like the entire SpectrAlert Advance line, outdoor horns, strobes, and horn strobes for wall applications include a variety of features that increase application flexibility and simplify installation. First, field-selectable settings, including candela, automatic selection of 12- or 24-volt operation, horn tones, and three volume options enable installers to easily adapt devices to meet requirements.

Next, SpectrAlert Advance devices use a universal mounting plate for both wall and ceiling applications. This mounting plate includes an onboard shorting spring that ensures wiring continuity before devices are installed, so installers can verify proper wiring without mounting the devices and exposing them to potential construction damage. Once the plates are mounted, all SpectrAlert Advance devices utilize a plug-in design with a single captured screw to speed installation and virtually eliminate costly ground faults.

Outdoor devices ship with weatherproof plastic back boxes (metal back boxes are available separately) that accommodate in-and-out wiring for daisy chaining devices. Plastic back boxes feature removable side flanges and improved resistance to saltwater corrosion. Knock-outs located on the back eliminate the need to drill holes for screw-in mounting. Plastic and metal weatherproof back boxes come with 3/4-inch top and bottom conduit entries and 3/4-inch knock-outs at the back. A screw-in NPT plug with an O-ring gasket for a watertight seal is included with each back box.

# SpectrAlert Advance Outdoor Horn, Strobe, and Horn Strobe Specifications

## Architect/Engineer Specifications

### General

SpectrAlert Advance outdoor horns, strobes, and horn strobes shall mount to a weatherproof back box. A universal mounting plate shall be used for mounting ceiling and wall products. The notification appliance circuit wiring shall terminate at the universal mounting plate. Also, SpectrAlert Advance products, when used with the Sync•Circuit™ Module accessory, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts. When used with the Sync•Circuit Module, 12-volt-rated notification appliance circuit outputs shall operate between 9 and 17.5 volts; 24-volt-rated notification appliance circuit outputs shall operate between 17 and 33 volts. Outdoor SpectrAlert Advance products shall operate between –40 and 151 degrees Fahrenheit from a regulated DC or full-wave rectified unfiltered power supply. Strobes and horn strobes shall have field-selectable candela settings including 15, 15/75, 30, 75, 95, 110, 115, 135, 150, 177, and 185.

### Strobe

The strobe shall be a System Sensor SpectrAlert Advance Model \_\_\_\_\_ listed to UL 1971 and shall be approved for fire protective service. The strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The strobe must be installed with its weatherproof back box in order to remain outdoor approved per UL. The strobe shall be suitable for use in wet environments.

### Horn Strobe Combination

The horn strobe shall be a System Sensor SpectrAlert Advance Model \_\_\_\_\_ listed to UL 1971 and UL 464 and shall be approved for fire protective service. The horn strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The horn shall have three audibility options and an option to switch between a temporal three pattern and a non-temporal (continuous) pattern. These options shall be set by a multiple position switch. On four-wire products, the strobe shall be powered independently of the sounder. The horn or horn strobe models shall operate on a coded or non-coded power supply. The horn strobe must be installed with its weatherproof back box in order to remain outdoor approved per UL. The horn strobe shall be suitable for use in wet environments.

## Physical/Electrical Specifications

<b>Operating Temperature</b>	–40°F to 151°F (–40°C to 66°C)
<b>Strobe Flash Rate</b>	1 flash per second
<b>Nominal Voltage</b>	Regulated 12 DC/FWR or regulated 24 DC/FWR <sup>1</sup>
<b>Operating Voltage Range<sup>2</sup></b>	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
<b>Input Terminal Wire Gauge</b>	12 to 18 AWG
<b>Wall-Mount Dimensions (including lens)</b>	5.6" L x 4.7" W x 2.5" D (142 mm L x 119 mm W x 64 mm D)
<b>Horn Dimensions</b>	5.6" L x 4.7" W x 1.3" D (142 mm L x 119 mm W x 33 mm D)
<b>Wall-Mount Weatherproof Back Box Dimensions (SA-WBB)</b>	5.7" L x 5.1" W x 2.0" D (145 mm L x 130 mm W x 51 mm D)

### Notes:

1. Full Wave Rectified (FWR) voltage is a non-regulated, time-varying power source that is used on some power supply and panel outputs.
2. P, S, PC, and SC products will operate at 12 V nominal only for 15 and 15/75 cd.

## UL Current Draw Data

UL Max. Strobe Current Draw (mA RMS)						UL Max. Horn Current Draw (mA RMS)					
	Candela	8–17.5 Volts		16–33 Volts		Sound Pattern	dB	8–17.5 Volts		16–33 Volts	
		DC	FWR	DC	FWR			DC	FWR	DC	FWR
Standard Candela Range	15	123	128	66	71	Temporal	High	57	55	69	75
	15/75	142	148	77	81	Temporal	Medium	44	49	58	69
	30	NA	NA	94	96	Temporal	Low	38	44	44	48
	75	NA	NA	158	153	Non-Temporal	High	57	56	69	75
	95	NA	NA	181	176	Non-Temporal	Medium	42	50	60	69
	110	NA	NA	202	195	Non-Temporal	Low	41	44	50	50
	115	NA	NA	210	205	Coded	High	57	55	69	75
High Candela Range	135	NA	NA	228	207	Coded	Medium	44	51	56	69
	150	NA	NA	246	220	Coded	Low	40	46	52	50
	177	NA	NA	281	251						
	185	NA	NA	286	258						

UL Max. Current Draw (mA RMS), 2-Wire Horn Strobe, Standard Candela Range (15–115 cd)									
DC Input	8–17.5 Volts		16–33 Volts						
	15	15/75	15	15/75	30	75	95	110	115
Temporal High	137	147	79	90	107	176	194	212	218
Temporal Medium	132	144	69	80	97	157	182	201	210
Temporal Low	132	143	66	77	93	154	179	198	207
Non-Temporal High	141	152	91	100	116	176	201	221	229
Non-Temporal Medium	133	145	75	85	102	163	187	207	216
Non-Temporal Low	131	144	68	79	96	156	182	201	210
FWR Input									
Temporal High	136	155	88	97	112	168	190	210	218
Temporal Medium	129	152	78	88	103	160	184	202	206
Temporal Low	129	151	76	86	101	160	184	194	201
Non-Temporal High	142	161	103	112	126	181	203	221	229
Non-Temporal Medium	134	155	85	95	110	166	189	208	216
Non-Temporal Low	132	154	80	90	105	161	184	202	211

UL Max. Current Draw (mA RMS), 2-Wire Horn Strobe, High Candela Range (135–185 cd)									
DC Input	16–33 Volts				FWR Input	16–33 Volts			
	135	150	177	185		135	150	177	185
Temporal High	245	259	290	297	Temporal High	215	231	258	265
Temporal Medium	235	253	288	297	Temporal Medium	209	224	250	258
Temporal Low	232	251	282	292	Temporal Low	207	221	248	256
Non-Temporal High	255	270	303	309	Non-Temporal High	233	248	275	281
Non-Temporal Medium	242	259	293	299	Non-Temporal Medium	219	232	262	267
Non-Temporal Low	238	254	291	295	Non-Temporal Low	214	229	256	262

## Candela Derating

For K series products used at low temperatures, listed candela ratings must be reduced in accordance with this table.


Strobe Output (cd)	
Listed Candela	Candela rating at –40°F
15	Do not use below 32°F
15/75	
30	
75	44
95	70
110	110
115	115
135	135
150	150
177	177
185	185

## Horn Tones and Sound Output Data


Horn and Horn Strobe Output (dBA)										
Switch Position	Sound Pattern	dB	8–17.5 Volts		16–33 Volts		24-Volt Nominal			
							Reverberant		Anechoic	
			DC	FWR	DC	FWR	DC	FWR	DC	FWR
1	Temporal	High	78	78	84	84	88	88	99	98
2	Temporal	Medium	74	74	80	80	86	86	96	96
3	Temporal	Low	71	73	76	76	83	80	94	89
4	Non- Temporal	High	82	82	88	88	93	92	100	100
5	Non- Temporal	Medium	78	78	85	85	90	90	98	98
6	Non- Temporal	Low	75	75	81	81	88	84	96	92
7†	Coded	High	82	82	88	88	93	92	101	101
8†	Coded	Medium	78	78	85	85	90	90	97	98
9†	Coded	Low	75	75	81	81	88	85	96	92

†Settings 7, 8, and 9 are not available on 2-wire horn strobe.


## SpectrAlert Advance Diagrams

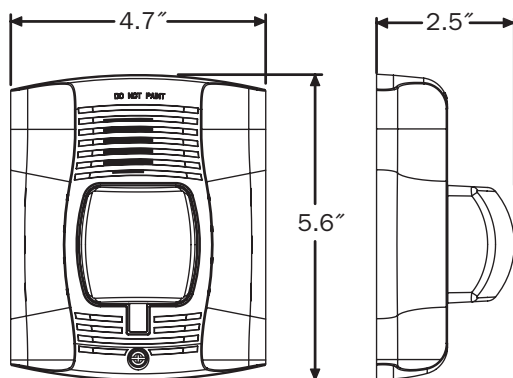

Wall-Mount Horn Strobes

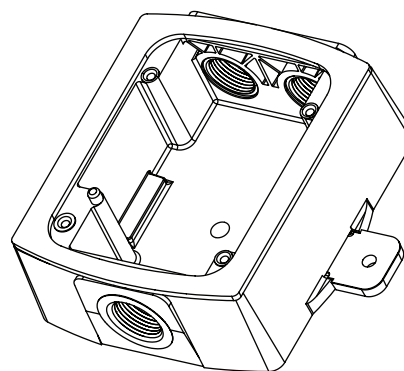

Wall Plastic Weatherproof Back Box

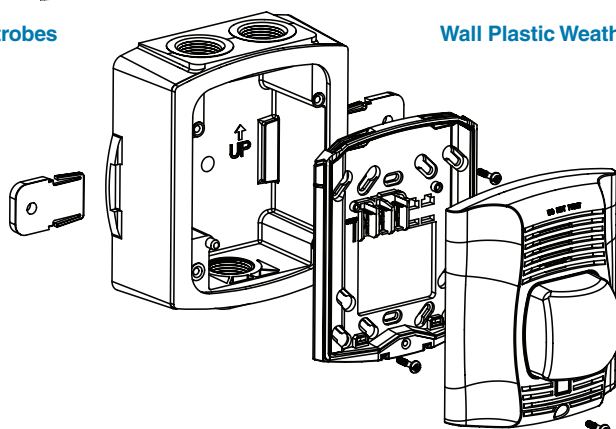

Wall-Mount Horn Strobe with Plastic Weatherproof Back Box

## SpectrAlert Advance Ordering Information

Model	Description
<b>Wall Horn Strobes</b>	
P2RK*†	2-Wire Horn Strobe, Standard cd, Red, Outdoor (includes plastic weatherproof back box)
P2RHK*†	2-Wire Horn Strobe, High cd, Red, Outdoor (includes plastic weatherproof back box)
P2WK*†	2-Wire Horn Strobe, Standard cd, White, Outdoor (includes plastic weatherproof back box)
P2WHK*†	2-Wire Horn Strobe, High cd, White, Outdoor (includes plastic weatherproof back box)
P4RK†	4-Wire Horn Strobe, Standard cd, Red, Outdoor (includes plastic weatherproof back box)
P4WK	4-Wire Horn Strobe, Standard cd, White, Outdoor (includes plastic weatherproof back box)
P2RHK-120	2-Wire Horn Strobe, High cd, Red, Outdoor, 120 V (includes plastic weatherproof back box)
<b>Wall Strobes</b>	
SRK*†	Strobe, Standard cd, Red, Outdoor (includes plastic weatherproof back box)
SRHK*†	Strobe, High cd, Red, Outdoor (includes plastic weatherproof back box)
SWK*†	Strobe, Standard cd, White, Outdoor (includes plastic weatherproof back box)
SWHK*†	Strobe, High cd, White, Outdoor (includes plastic weatherproof back box)
<b>Horns</b>	
HRK†	Horn, Red, Outdoor (includes plastic weatherproof back box)
<b>Accessories</b>	
SA-WBB	Red, Metal Weatherproof Back Box
SA-WBBW	White, Metal Weatherproof Back Box

### Notes:

\* Add "-P" to model number for plain housing (no "FIRE" marking on cover), e.g., P2RK-P.

† Add "-R" to model number for weatherproof replacement device (no back box included), only for use with weatherproof outdoor flush mounting plate, WTP and WTPW.

"Standard cd" refers to strobes that include 15, 15/75, 30, 75, 95, 110, and 115 candela settings. "High cd" refers to strobes that include 135, 150, 177, and 185 candela settings. **When replacing standard outdoor units both the device and back box must be replaced.**



3825 Ohio Avenue • St. Charles, IL 60174  
Phone: 800-SENSOR2 • Fax: 630-377-6495

©2012 System Sensor.  
Product specifications subject to change without notice. Visit [systemsensor.com](http://systemsensor.com)  
for current product information, including the latest version of this data sheet.  
AVDS01201 • 3/12



## **Part Five**

### **Floor Plan Layout**