

# Submittal Catalog

For

H&R BLOCK  
1220 NW MAIN ST  
LEE SUMMIT, MO 64086

Prepared By:



19430 W 200<sup>th</sup> Terr, Spring Hill, Ks 66083

Tel: 816-918-9917

## **Table of Contents**

FACP SILENT KNIGHT 6808

SILENT KNIGHT SK-PHOTO-W

SILENT KNIGHT SK-PULL

SILENT KNIGHT MINI MON

SILENT KNIGHT SK-DUCT

SILENT KNIGHT SL-RELAY

SYSTEM SENSOR CEILING MOUNT HORN STROBE

SYSTEM SENSOR WALL MOUNT HORN STROBE



## Addressable Fire Alarm Control Panels

# 6808

## Addressable Fire Alarm Control Panel

The 6808 is an addressable fire alarm control panel (FACP) that is a direct replacement for the 5808 FACP. The 6808 can be configured to achieve a point capacity of 198 points. It has one built-in signaling line circuit (SLC), which can support 99 System Sensor® (SK) sensors and 99 SK modules or 127 Hochiki® (SD) devices per loop.

A common communications and annunciation link allows up to 17 panels to be connected via copper or fiber optic cable. A designated panel is configured as the communicator for all panels in the link for convenient single-point communications. It also has a built-in, dual-line POTS and IP communicator with additional cellular options available.

The 6808 system can be enhanced by adding modules such as the 6860 remote annunciator which also has four programmable function buttons to help automate tasks and reduce time spent at the panel.

SWIFT® wireless compatibility provides options for wireless detection through a Class A mesh network. It is ideal for hard-to-wire locations, buildings where new wiring is not allowed, or to provide an easy install fire system for new construction projects. SWIFT devices can be combined with other hard-wired 6808 compatible devices.

The 6808 also has a form-C trouble relay, two programmable form-C relays, along with powerful features such as drift compensation, pre-trouble maintenance alert, a built-in sensor test to comply with NFPA 72 calibration testing requirements, and calibration trouble alert.



6808

The supports a variety of devices, including the 6860, 5860, and 6855 remote annunciators, 5824 serial parallel printer interface module (for printing system reports), the 5496 NAC expander, 5895XL power module, and SK or SD devices.

## FEATURES & BENEFITS

- Capable of providing up to 198 points to satisfy smaller installation needs
- Connect up to 17 panels on one site with convenient single-point access using the SK-NIC Network Interface Card. Connected panels can have mixed compatible FACP models
- Convenient field-upgradeable firmware
- Built-in dual path POTS and IP communications with optional cellular models available for reliable backup reporting
- 6860 annunciator with a 4 x 40 large display
- Four user-programmable buttons minimize time spent executing complex or routine tasks
- Built-in USB interface for convenient and quick programming
- Programmable date setting for automatic and convenient Daylight Saving Time changes
- JumpStart® auto programming reduces installation time
- 125 software zones and 125 output groups for flexible design options

## SIGNAL LINE CIRCUIT (SLC)

The 6808 SLC loop supports multiple device types, maintenance alerts, and a built-in sensor test to comply with NFPA 72 calibration testing requirements.

## INDICATOR LIGHTS

- **General Alarm (Red):** Flashes if in alarm; solid when alarm is silenced
- **Supervisory (Yellow):** Flashes if a supervisory condition exists; solid when supervisory is silenced
- **System Troubles (Yellow):** Flashes if a trouble condition exists; solid when trouble is silenced
- **System Silenced (Yellow):** On when an alarm, trouble or supervisory condition has been silenced but not yet cleared
- **System Power (Green):** Flashes for AC failure; solid when power systems are normal

## USER INTERFACE

The 6808 built-in 4 x 20 annunciator with 80 character LCD display and large easy-to-use tactile touchpad can be used for system operation, programming and maintenance. It has five LEDs for alarm, supervisory, system trouble, system silenced and system power.

System operations include silencing alarms and troubles, resetting alarms and the display of alarm troubles and memory. The system's non-volatile event history buffer stores 1,000 events for viewing from the built-in or remote annunciator. System operations can be initiated with a mechanical firefighter's key or a valid 4- to 7-digit operator's code.

## PROGRAMMING

The 6808 system offers several options to simplify and speed-up programming. JumpStart® auto programming minimizes programming required to start a new system. The built-in keypad, or the 6860, 5860 or 6855 remote annunciators give you on-site access to current system programming. Programming can also be accomplished using the Windows®-based Honeywell Fire Software Suite (HFSS) program.

## SOFTWARE TOOLS

**SKST:** Silent Knight Selection Tool provides the installer or design architect with a Windows® software system configuration tool to create a detailed Bill of Material (BOM) and battery calculations.

**HFSS:** Honeywell Fire Software Suite provides communication and panel programming, detector status, event history and additional data. Requires a PC running Microsoft® Windows®.

## ADDITIONAL INFORMATION

Twisted-unshielded pair wire is recommended.

The 6808 also has 13 preset notification cadence patterns (including ANSI 3.41).

## AGENCY LISTINGS AND APPROVALS

**NPFA 13, NFPA 15, NFPA 16, NFPA 70, NFPA 72:** Central station; remote Signaling; Local Protective Signaling Systems; Auxiliary Protected Premises Unit; Water Deluge releasing service. Suitable for automatic, manual, waterflow, sprinkler supervisory (DACT non-coded) signaling services

- **UL Listed:** S2766
- **CSFM:** 7165-0559:0502
- **FDNY:** COA# 6246
- **FM approved**

## ORDERING INFORMATION

6808: Addressable Fire Alarm Control Panel. (Red cabinet).

## COMPATIBLE ANNUNCIATORS

**6860:** 4x40 LCD remote fire annunciator (4 lines and up to 160 characters) per system; four programmable buttons  
**5860:** 4x20 LCD remote fire annunciator. 5860 is gray; 5860R is red  
**6855:** 4x20 LCD remote fire annunciator

**5865-3 or 5865-4:** LED annunciators can display up to 30 LEDs (15 red and 15 yellow). The 5865-4 has key switches for silence and reset, and a system trouble LED.

**5880:** LED / IO module has 40 programmable LED outputs and eight supervised dry contact inputs which are useful for custom applications. You can use up to eight 5880 modules on one control panel for maximum flexibility. Its compact size allows mounting inside the annunciator, or in an accessory cabinet.

## 6808 COMPATIBLE DEVICES AND ACCESSORIES

See the data sheets listed below for a complete listing of the SK, SD or SWIFT devices.

53623: SK Devices Data Sheet

53624: SD Devices Data Sheet

350614, 350616 & 350618: SWIFT wireless devices

For a complete and current listing of compatible devices and accessories, visit [www.silentknight.com](http://www.silentknight.com).

**Important:** You cannot mix SK and SD devices in the same fire alarm system.

## **SK COMPATIBLE ADDRESSABLE DEVICES**

**SK-ACCLIMATE:** Multi criteria photoelectric smoke detector with thermal 135°F fixed temperature

**SK-BEAM:** Reflected beam smoke detector without test feature

**SK-BEAM-T:** Reflected beam smoke detector with test feature

**SK-CONTROL:** Supervised control module

**SK-CONTROL-6:** Six circuit supervised control module

**SK-DUCT:** Photoelectric duct smoke detector with extended air speed range

**SK-FIRE-CO:** Four criteria fire and carbon monoxide detector

**SK-HEAT:** Fixed thermal detector (135°F)

**SK-HEAT-W:** Fixed thermal detector (135°F), white

**SK-HEAT-ROR:** Fixed rate of rise detector (135°F)

**SK-HEAT-ROR-W:** Fixed rate of rise detector (135°F), white

**SK-HEAT-HT:** Fixed high temperature thermal detector (190°F)

**SK-HEAT-HT-W:** Fixed high temperature thermal detector (190°F), white

**SK-ISO:** Fault isolator module

**SK-MINIMON:** Mini monitor module

**SK-MONITOR:** Monitor module

**SK-MONITOR-2:** Dual input monitor module

**SK-MON-10:** 10 input monitor module

**SK-PHOTO:** Photoelectric smoke detector

**SK-PHOTO-W:** Photoelectric smoke detector, white

**SK-PHOTO-T:** Photoelectric smoke detector with thermal (135°F fixed temperature)

**SK-PHOTO-T-W:** Photoelectric smoke detector with thermal (135°F fixed temperature), white

**SK-PHOTOR:** Photoelectric detector with remote test capability

**SK-PHOTO-R-W:** Photoelectric detector with remote test capability, white

**SK-PULL-SA:** Addressable single action pull station

**SK-PULL-DA:** Addressable dual action pull station

**SK-RELAY:** Addressable relay module

**SK-RELAY-6:** Addressable Six relay control module

**SK-RELAYMON-2:** Addressable Dual relay/monitor module

**SK-ZONE:** Addressable zone interface module

**SK-ZONE-6:** Six zone interface module

**B300-6(-IV):** 6" base for SK-W Series

**B210LP:** 6" mounting base

**B501(-BL,-IV,-WHITE):** 4" flangeless base

**B501:** 4" Flangeless mounting base

**B200S(-IV,-WH):** Intelligent sounder base

**B200S:** Intelligent sounder base

**B200S-LF(-IV,-WH):** Low-Frequency intelligent sounder base

**B200S-LF:** Low-frequency intelligent sounder base

**B224RB(-IV,-WH):** Relay base

**B224RB:** Relay base

**B224BI(-IV,-WH):** Isolator base

**B224BI:** Isolator base

## **SD COMPATIBLE ADDRESSABLE DEVICES**

**SD505-6AB:** Addressable 6" base

**SD505-6IB:** Addressable 6" short circuit isolator base

**SD505-6RB:** Addressable 6" relay base

**SD505-6SB:** Addressable 6" sounder base

**SD500-AIM:** Addressable input module (switch input)

**SD500-ANM:** Addressable notification module

**SD500-ARM:** Addressable relay module

**SD505-DTS-K:** Remote test switch and LED indicator for the SD505-DUCTR

**SD505-DUCT:** Addressable Duct Smoke Detector.

**SD505-DUCTR:** Addressable Duct Detector housing with relay base.

**SD505-HEAT:** Absolute temperature heat detector. Trip point range from 135°F–150°F (0°C–37°C).

**SD500-LIM:** Addressable Line isolator module

**SD500-MIM:** Addressable Mini input monitor module (switch input)

**SD505-PHOTO:** Photoelectric smoke detector

**SD500-PS/-PSDA:** Addressable Single or dual action pull station

**SD500-SDM:** Addressable smoke detector module

## **AUDIBLE/VISIBLE DEVICES**

These AV devices are all 2-wire. Color: "R" indicates red; "W" denotes white. For a complete listing of Silent Knight AV devices go to [www.silentknight.com](http://www.silentknight.com).

**CHSRL/CHSWL:** Wall chime/strobe

**CHSCRL/CHSCWL:** Ceiling chime/strobe

**CHRL/CHWL:** Wall chime

**HRL/HWL:** Wall horn

**P2RL/P2WL:** Wall horn/strobe

**PC2RL/PC2WL:** Ceiling horn/strobe

**SRL/SWL:** Wall strobe

**SCRL/SCWL:** Ceiling strobe

**SPSCRL/SPSCWL:** Ceiling speaker/strobe

**SPSRL/SPSWL:** Wall speaker/strobe

**SPRL/SPWL:** Wall speaker

**SPCRL/SPCWL:** Ceiling speaker

## **SWIFT WIRELESS DEVICES**

*SWIFT is only compatible with System Sensor (SK) devices. It is not compatible with Hochiki (SD) devices.*

**WSK-WGI:** Wireless Gateway

**WSK-PHOTO:** Wireless Photoelectric smoke detector

**WSK-PHOTO-T:** Wireless Multi-criteria photoelectric smoke detector with thermal detection (135°F fixed temperature) and B510W 4" base

**WSK-HEAT:** Wireless Heat, (135°F fixed temperature) and B510W 4" base

**WSK-HEAT-ROR:** Wireless heat, ROR (135°F fixed temperature) and B510W 4" base

**WSK-MONITOR:** Wireless monitor module

**WSK-RELAY:** Wireless relay module

**W-USB:** SWIFT Tools USB transceiver used for communication with SWIFT devices

## **SBUS ACCESSORIES**

**5496:** A 6 amp notification power expander with four power-limited notification appliance circuit outputs.

**5883:** Relay Interface. Provides 10 Form C relays.

**5824:** Serial/Parallel Printer Interface Module for printer connection.

**5895XL:** Power Supply with six Flexput™ circuits, and two Form C relays. Max. 16 per system.

**5815RMK:** Remote mounting kit. Dimensions: 10 3/8"W x 10-3/16"H x 3"D

## **COMMUNICATION OPTIONS**

**CELL-CAB-SK:** Cellular communicator, metal enclosure with lock/key\*

**CELL-MOD:** Cellular communicator, plastic enclosure\*

\*Sole path, powered by panel.

**IPGSM-4G:** Dual path fire alarm communicator, cellular and/or IP (primary or backup, selectable)

**SK-IP-2:** Remote reporting via the Internet. Requires a VisorAlarm® receiver at the central station

## **MISC. ACCESSORIES**

**SK-NIC:** Network Interface Card. Provides a common communications link for the 6808.

**SK-NIC-KIT:** Installation Accessory Kit

**SK-FML:** Fiber-Optic Multi Mode, transmitter and receiver

**SK-FSL:** Fiber-Optic Single Mode

**RBB:** Remote battery box accessory cabinet for batteries that are too large to fit in the FACP cabinet. Dimensions: 16" W x 10" H x 6" D (406mm W x 254mm H x 152mm D).

**SK-SCK:** Seismic Compliance Kit used to securely fasten batteries to the fire panel.

# 6808 Technical Specifications

## PHYSICAL

**Overall Dimensions:** 16.36"W x 26.37"H x 3.91"D

**Shipping Weight:** 32 lbs.

**Color:** Red

## ENVIRONMENTAL

**Operating Temperature:** 32°F to 120°F (0°C to 49°C)

**Humidity:** 0 to 93% relative humidity (non-condensing)

## ELECTRICAL

**6808 Primary AC:** 120 VAC @ 60Hz, 3.3A Total

Accessory Load: 6A @ 27.4VDC power-limited

**Standby Current:** 190mA

**Alarm Current:** 250mA

**Battery Charging Capacity:** 7 to 35AH

**Battery Size:** 7AH to 18AH max. allowed in control panel cabinet. Larger capacity batteries can be housed in RBB accessory cabinet.

## NOTIFICATION APPLIANCE CIRCUITS (NACs)

**Four programmable circuits which can be programmed individually as:**

**NACs:** 3A @ 27.4VDC per circuit, power-limited (with a maximum current of 6A)

**Auxiliary Power Circuits:** 3A @ 27.4VDC per circuit, power-limited

Supports Class B (Style 4) and Class A (Style 6 or 7) configuration for the SLC

**WIRING:** See the product manual for wiring details

Flexput®, Honeywell®, JumpStart®, Silent Knight®, SWIFT®, and System Sensor® are registered trademarks of Honeywell International Inc.

Hochiki® is a registered trademark of Hochiki Corporation. Microsoft® and Windows® are registered trademarks of Microsoft Corporation.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

## Honeywell Silent Knight

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

351608 | B | 09/18  
© 2018 Honeywell International Inc.



# SK-PHOTO-W SERIES

## Addressable Photoelectric Smoke Detectors

**The Silent Knight® SK-PHOTO-W Series feature a modern design and expanded color options support a variety of contemporary aesthetic demands. In addition, each detector is constructed for exceptional installation and maintenance efficiency.**



The SK-PHOTO-W Series intelligent plug-in smoke detectors are designed for both performance and aesthetics, and are direct replacements for the SK-PHOTO Series detectors. A new modern, sleek, contemporary design and enhanced optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards. The SK-PHOTO-W Series detector sensitivity can be programmed in the control panel software. Sensitivity is continuously monitored and reported to the panel. Point ID capability allows each detector's address to be set with rotary, decimal address switches, providing exact detector location for selective maintenance when chamber contamination reaches an unacceptable level. Dual electronic thermistors add 135°F (57°C) fixed temperature thermal sensing on the SK-PHOTO-T-W. The SK-PHOTO-R-W is a remote test capable detector for use with DNR Series duct detector housings.

## FEATURES AND BENEFITS

- Designed to meet UL 1268 7th Edition
- Sleek and stylish contemporary design
- Stable communication technique with noise immunity
- Addressable by device
- Rotary, decimal addressing (Refer to the Silent Knight panel manuals for device capacity)
- Two-wire SLC connection
- LEDs blink every time the unit is polled
- 360°-field viewing angle of the visual alarm indicators (two bi-color LEDs); LEDs blink green in Normal condition and turn on steady red in Alarm
- Integral communications and built-in device-type identification
- Remote test feature from the panel
- Built-in functional test switch activated by external magnet
- Walk test with address display (an address of 121 will blink the detector LED 12-(pause)-1)
- Low standby current
- Built-in tamper-resistant feature
- Designed for direct-surface or electrical-box mounting
- Sealed against back pressure
- Plugs into separate base for ease of installation and maintenance
- Expanded color options
- SEMS screws for wiring of the separate base
- Optional remote, single-gang LED accessory
- Optional sounder, relay, and isolator bases

## INSTALLATION

The SK-PHOTO-W Series plug-in intelligent thermal detectors use a separate base to simplify installation, service, and maintenance. Installation instructions are shipped with each detector.

Mount base (all base types) on an electrical backbox which is at least 1.5" (3.81 cm) deep. For a chart of compatible junction boxes, see SK-61045.

**Note:** Because of the inherent supervision provided by the SLC loop, end-of-line resistors are not required. Wiring "T-taps" or branches are permitted for Style 4 (Class "B") wiring.

**Note:** When using relay or sounder bases, consult the SK-ISO installation sheet I56-3627 for device limitations between isolator modules and isolator bases.

## OPERATION

Each SK-PHOTO-W Series detector uses one of the panel's addresses (total limit is panel dependent) on the Signaling Line Circuit (SLC). It responds to regular polls from the control panel and reports its type and the status. If it receives a test command from the panel (or a local magnet test), it stimulates its electronics and reports an alarm. It blinks its LEDs when polled and turns the LEDs on when commanded by the panel. The SK-PHOTO-W Series offers features and performance that represent the latest in smoke detector technology.

## PRODUCT LINE INFORMATION

**Note:** "-IV" suffix indicates ivory color.

**SK-PHOTO-W:** White, low-profile photoelectric sensor

**SK-PHOTO-T-W:** White, same as SK-PHOTO-W but includes a built-in 135°F (57°C) fixed-temperature thermal device

**SK-PHOTO-R-W:** White, low-profile intelligent photoelectric sensor, remote test capable, for use with DNR/DNRW

**B300-6:** White, standard flanged low-profile mounting base

**B300-6-BP:** Bulk pack of B300-6, package contains 10

**B300-6-IV:** Ivory, standard flanged low-profile mounting base

**B501-WHITE:** White, standard European flangeless mounting base

**B501-BL:** Black, standard European flangeless mounting base

**B501-IV:** Ivory, standard European flangeless mounting base

**B501-WHITE-BP:** Bulk pack of B501-WHITE, contains 10

**B200S-WH:** White, Intelligent, programmable sounder base

**B200S-IV:** Ivory, Intelligent, programmable sounder base

**B200SR-WH:** White, Intelligent sounder base for retrofit applications

**B200SR-IV:** Ivory, Intelligent sounder base for retrofit applications

**B200S-LF-WH:** White, Low Frequency Intelligent, programmable sounder base

**B200S-LF-IV:** Ivory, Low Frequency Intelligent, programmable sounder base

**B200SR-LF-WH:** White, Low Frequency Intelligent sounder base for retrofit applications

**B200SR-LF-IV:** Ivory, Low Frequency Intelligent sounder base for retrofit applications

**B224RB-WH:** White, plug-in System Sensor® relay base

**B224RB-IV:** Ivory, plug-in System Sensor relay base

**B224BI-WH:** White, plug-in System Sensor isolator detector base

**B224BI-IV:** Ivory, plug-in System Sensor isolator detector base

## ACCESSORIES

**TR300:** White, replacement flange for B210LP or B300-6 bases

**TR300-IV:** Ivory, replacement flange for B210LP or B300-6 bases

**RA100Z(A):** Remote 3 – 32 VDC LED annunciator, mounts to a U.S. single-gang electrical box, for use with B501 and B300-6 bases only

**M02-04-00:** Test magnet

**M02-09-00:** Test magnet with telescoping handle

**CK300:** White, detector color kit, pack of 10

**CK300-IV:** Ivory, detector color kit, pack of 10

**CK300-BL:** Black, detector color kit, pack of 10



# SK-PHOTO-W SERIES TECHNICAL SPECIFICATIONS

## PHYSICAL/ENVIRONMENTAL

### Sensitivity:

- UL Applications: 0.5% to 4.0% per foot obscuration.
- ULC Applications: 0.5% to 3.5% per foot obscuration

**Size:** 2.0" (5.3 cm) high; base determines diameter

- **B300-6:** 6.1" (15.6 cm) diameter
- **B501:** 4" (10.2 cm) diameter

For a complete list of detector bases, see SK-61045.

**Shipping weight:** 3.4 oz. (95 g)

### Operating temperature range:

- SK-PHOTO-W: 32°F to 122°F (0°C to 50°C)
- SK-PHOTO-T-W: 32°F to 100°F (0°C to 38°C)
- SK-PHOTO-R-W installed in a DNR/DNRW: -4°F to 158°F (-20°C to 70°C)

**UL/ULC Listed Velocity Range:** 0-4000 ft/min. (1219.2 m/min.), suitable for installation in ducts

**Relative humidity:** 10% – 93% non-condensing

**Thermal ratings:** fixed-temperature set point 135°F (57°C), rate-of-rise detection 15°F (8.3°C) per minute, high temperature heat 190°F (88°C)

## ELECTRICAL SPECIFICATIONS

**Voltage range:** 15 – 32 volts DC peak

**Standby current (max. avg.):** 200µA @ 24 VDC (one communication every 5 seconds with LED enabled)

**Max current:** 4.5 mA @ 24 VDC ("ON")

## DETECTOR SPACING AND APPLICATIONS

Silent Knight recommends spacing detectors in compliance with NFPA 72. In low airflow applications with smooth ceiling, space detectors 30 feet (9.1m). For specific information regarding detector spacing, placement, and special applications refer to NFPA 72. A *System Smoke Detector Application Guide*, document A05-1003, is available at [www.systemsensor.com](http://www.systemsensor.com).

## AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. *Consult factory for latest listing status.*

- **UL Listed:** S6173
- **FM Approved**
- **CSFM:** 7272-0559:0512

Silent Knight® and System Sensor® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

Country of origin: Mexico



# SK-PULL-SA / SK-PULL-DA

## Intelligent Pull Stations

The SK-PULL-SA is a single action pull station requiring only one motion to activate the station. The SK-PULL-DA is a dual action pull station requiring two motions to activate the station. The SK-PULL-SA and SK-PULL-DA are for use with Honeywell Silent Knight Series fire control panel (FACP).

Extremely easy to operate, the SK-PULL-DA and SK-PULL-SA provide a fast and practical means of manually initiating a fire alarm signal. The FACP recognizes each manual pull station by its specific address saving precious seconds in determining the location of an alarm.

### INSTALLATION

The SK-PULL-SA and SK-PULL-DA can be surface mounted to an SB-I/O surface back box or semi-flush mounted on a standard single-gang with a minimum depth of 2.13"(5.40 cm) or double gang or 4" (10.61 cm) square electrical box. You can also use the optional (System Sensor® PN BG-TR) trim ring if the station is being semi-flush mounted.



**SK-PULL-SA**



**SK-PULL-DA**

## FEATURES & BENEFITS

- Installer can open station without causing an alarm condition
- Dual-color LED is visible through handle of station blinks green to indicate normal operation and remains steady red in an alarm condition
- Key operated test and reset lock using lock plate actuator
- Key matches compatible FACP locks
- Meets ADA requirement for 5 lbs maximum pull force to active
- Meets the Americans with Disabilities Act Accessibility Guidelines (ADAAG) controls and operating mechanisms guidelines (Section 4.1.3[13])
- Shell, door, and handle molded from durable LEXAN®
- Reliable analog communications for trouble-free operation
- Braille text on station handle
- Rotary address switches for fast installation
- Handle latches in down position and the word Activated appears, clearly indicating the station has been pulled
- UL Listed, including UL 38, Standard of Manually Actuated Signaling System
- CSFM Listed
- MEA Listed

# SK-PULL-SA / SK-PULL-DA Technical Specifications

## PHYSICAL

**Dimensions:** 5.5" H x 4" W x 1.45" D (14 x 10.2 x 3.7cm)

**Housing Material:** LEXAN polycarbonate resin

### Bi-Colored LED:

**Blinking Green:** Normal

**Steady Red:** Alarm

**Switch:** Single pole, single throw (SPST) normally open (N/O) switch which closes upon activation of the pull station

## ELECTRICAL

**Operating Voltage:** 15 – 32VDC

**SLC Standby and Alarm Current:** 350µA

**Wire Gauge:** Up to 12AWG (3.1 mm<sup>2</sup>)

## ENVIRONMENTAL

**Operating Temperature:** 32°F – 120°F (0°C – 49°C)

**Humidity:** 10% – 93% non-condensing

## ORDERING INFORMATION

**SK-Pull-SA:** Single Action Pull Station

**SK-Pull-DA:** Dual Action Pull Station

## ACCESSORIES

**BG-TR:** Optional trim ring.

**SB-I/O:** Surface backbox, indoor/outdoor.

\* Unless otherwise noted, specifications apply to SK-Pull-SA and SK-Pull-DA

## COMPATIBILITY

**The SK-PULL-SA AND SK-PULL-DA are compatible with the following Honeywell Silent Knight fire alarm control panels:**

**6820:** Addressable fire alarm control panel

**6820EVS:** Addressable fire alarm control panel with an emergency voice system.

**6808:** Addressable fire alarm control panel

**6700:** Addressable fire alarm control panel

**5700:** Addressable fire alarm control panel

**5808:** Addressable fire alarm control panel

**5820XL:** Addressable fire alarm control panel

**5820XL-EVS:** Addressable fire alarm control panel with an emergency voice system

For a complete listing of all compliance approvals and certifications, please visit [www.silentknight.com](http://www.silentknight.com).

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight®, System Sensor® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

## For more information

Learn more about Honeywell Silent Knight and other products by visiting [www.silentknight.com](http://www.silentknight.com)

## Honeywell Silent Knight

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

Doc 350135 | Rev E | 11/17  
© 2017 Honeywell International Inc.





# SK-MINIMON

## Intelligent Mini Monitor Module

The SK-MINIMON is an addressable monitor modules for use with the Honeywell Silent Knight fire alarm control panels (FACPs). The SK-MINIMON acts as an interface to contact devices, such as waterflow switches and pull stations. The SK-MINIMON supports Class B supervised wiring to the load device. Conventional 4-wire smoke detectors can be monitored for alarm and trouble conditions

The SK-MINIMON can be mounted in a single gang junction box directly behind the monitored device. Its small size and light weight allow it to be installed without rigid mounting requirements.

### INSTALLATION

The SK-MINIMON can be mounted in a single gang junction box directly behind the monitored device. Its small size and light weight allow it to be installed without rigid mounting requirements.



**SK-MINIMON**

## FEATURES & BENEFITS

- Single contact monitor
- SK-Minimon support for Class B (Style B) contact monitor wiring
- Small and lightweight size allows for flexible mounting options
- Rotary address switches for fast installation
- UL Listed
- CSFM Listed
- FM Approved

# SK-MINIMON Technical Specifications

## PHYSICAL

**Dimensions:** 2.75" W x 1.3" H x 0.5" D

**Weight:** 1.2 oz (37 g)

## ELECTRICAL

**Operating Voltage:** 15 – 32VDC

**SLC Standby and Alarm Current:** 350  $\mu$ A

**End-of-Line Resistance:** 47K  $\Omega$

**Initiating device circuit wiring resistance:** 1,500 $\Omega$  max

**SLC loop resistance:** 40 $\Omega$  max

**Wire Length:** 6" min.

## ENVIRONMENTAL

**Operating Temperature:** 32°F – 120°F (0°C – 49°C)

**Humidity:** 10% – 93% non-condensing

## ORDERING INFORMATION

**SK-MINIMON:** Mini monitoring module

## COMPATIBILITY

The SK-MINIMON is compatible with the following Honeywell Silent Knight fire alarm control panels:

**6820:** Addressable fire alarm control panel

**6820EVS:** Addressable fire alarm control panel with an emergency voice system.

**6808:** Addressable fire alarm control panel

**6700:** Addressable fire alarm control panel

**5700:** Addressable fire alarm control panel

**5808:** Addressable fire alarm control panel

**5820XL:** Addressable fire alarm control panel

**5820XL-EVS:** Addressable fire alarm control panel with an emergency voice system

For a complete listing of all compliance approvals and certifications, please visit [www.silentknight.com](http://www.silentknight.com).

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight®, System Sensor® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

## For more information

Learn more about Honeywell Silent Knight and other products by visiting [www.silentknight.com](http://www.silentknight.com)

## Honeywell Silent Knight

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

Doc 350133 | Rev G | 11/17  
© 2017 Honeywell International Inc.





# SK-DUCT

## Intelligent Air Duct Smoke Detector

The SK-DUCT Intelligent air duct smoke detector is used with SK-PHOTOR (included) for detecting smoke and products of combustion present in air moving through an HVAC air handling system. When smoke is detected in a duct, the unit communicates the condition to the Honeywell Silent Knight control panel. The panel, in turn, depending on programming and wiring, turns off fans, blowers, and other devices. The duct housing allows for mounting of SK-RELAY addressable relay module.

The Model SK-DUCT Air Duct Smoke Detector utilizes photoelectric technology for the detection of smoke. It provides early detection of smoke and products of combustion present in air moving through HVAC ducts in Commercial and Industrial applications.

The SK-DUCT is in a heavy duty gray steel back box with a clear cover. It features a pivoting housing that fits both square and rectangular footprints capable of mounting to a round or rectangular duct. It installs quickly and easily.

The unit senses smoke in the most challenging conditions, operating in airflow speeds of 100 to 4000 feet per minute, temperatures of -4°F to 158°F, and a humidity range of 0 to 95 percent (non-condensing).



**SK-DUCT**

## FEATURES & BENEFITS

- Versatile mounting options: square or rectangular configuration
- New Cover tamper signal
- LED alarm indication and communication on sensor head
- Detects and limits the spread of smoke
- Rugged steel back box with clear plastic cover
- Easy to clean
- Large terminal connection screws
- Transparent cover for convenient visual inspection
- Patented sampling tube installs from front or back of the detector with no tools required
- Available space within housing to accommodate mounting of relay module
- UL listed

# SK-DUCT Technical Specifications

## PHYSICAL

(Rectangular): 14.38" (37 cm) L X 5" (12.7 cm) W X 2.5" (6.6 cm) D

(Square): 7.75" (19.7cm) L x 9"(22.9cm) W x 2.5" D (6.35cm)

Weight: 1.6lb (0.73kg)

## ELECTRICAL (using SK-Photo or SK-PhotoR)

Operating Voltage: 15–32 VDC

Standby Current: 300  $\mu$ A @ 24 VDC max.

Alarm Current: 6.5 mA @ 24 VDC max (with LED on)

## ENVIRONMENTAL

Operating Temperature: -4°F – 158°F (-20°C – 70°C)

Humidity: 0% – 95% (non-condensing)

## AIR VELOCITY

100 to 4000 ft/min: (0.5 – 20.3 m/sec.)

## ORDERING INFORMATION

**SK-DUCT:** Intelligent non-relay duct smoke detector

**SK-PHOTO:** Addressable Photo Detector

**SK-PHOTOR:** Addressable Photo Detector with remote test capability (included with SK-Duct)

**SK-RELAY:** Addressable Relay Module, must be added if relay function is required, (fits in housing)

## ACCESSORIES

**DST1:** Metal Sampling Tube Duct Width up to 1'

**DST1.5:** Metal Sampling Tube Duct Widths 1' – 2'

**DST3:** Metal Sampling Tube Duct Widths 2' – 4'

**DST5:** Metal Sampling Tube Duct Widths 4' – 8'

**DST10:** Metal Sampling Tube Duct Widths 8' – 12'

**DH400OE-1:** Weatherproof Enclosure

**ETX:** Metal Exhaust Tube Duct width 1'

**RA100Z:** Remote LED Annunciator

**DCOIL:** Duct accessory coil, required if using with SK-PHOTO and not SK-PHOTOR (included) with SK-DUCT

**RTS151:** Magnetic Remote Test station

**RTS151KEY:** Key-Activated Remote Test station  
M02-04-00 Test Magnet P48-21-00 Replacement End Cap for Metal Sampling Tube

**APA151:** Remote annunciator with piezo alarm

## IMPORTANT NOTES:

- The use of either RTS151 or RTS151KEY requires the installation of an accessory coil, DCOIL, sold separately. Please refer to the SK-DUCT installation instructions for more information
- The RTS151/RTS151KEY test coil circuit requires an external 24VDC power supply which must be UL listed.

ACCESSORY CURRENT LOADS AT 24VDC		
Device	Standby	Alarm
RA100Z	0mA	12mA Max.
RTS151	0mA	12mA Max
RTS151KEY	12mA	12mA Max

## COMPATIBILITY

The SK-DUCT is compatible with the following Honeywell Silent Knight fire alarm control panels:

**6820:** Addressable fire alarm control panel

**6820EVS:** Addressable fire alarm control panel with an emergency mass notification system.

**6808:** Addressable fire alarm control panel

**6700:** Addressable fire alarm control panel

**5700:** Addressable fire alarm control panel

**5808:** Addressable fire alarm control panel

**5820XL:** Addressable fire alarm control panel

**5820XL-EVS:** Addressable fire alarm control panel with an emergency mass notification system.

For a complete listing of all compliance approvals and certifications, please visit [www.silentknight.com](http://www.silentknight.com).

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight®, System Sensor® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

## For more information

Learn more about Honeywell Silent Knight and other products by visiting [www.silentknight.com](http://www.silentknight.com)

## Honeywell Silent Knight

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

Doc 350122 | Rev F | 11/17  
© 2017 Honeywell International Inc.





# SK-RELAY

## Intelligent Relay Module

The SK-RELAY is an addressable relay module for use with Honeywell Silent Knight Series fire alarm control panels (FACPs). The SK-RELAY allows a Silent Knight FACP to switch discrete contacts by code command. The relay contains two isolated sets of Form C contacts, which operate as a DPDT switch. No supervision is provided for the notification appliance circuit.

The SK-RELAY contacts can be used for virtually any normally open or normally closed application. Each SK-RELAY is programmed with a unique signaling line circuit (SLC) loop address. When an event occurs that controls the SK-RELAY, the relay is triggered by the FACP.

### INSTALLATION

The SK-RELAY mounts directly into a 4" square electrical box. The box must have a minimum depth of 2-1/8". A surface mount electrical box (System Sensor® PN SMB500) is available from Silent Knight.



**SK-RELAY**

## FEATURES & BENEFITS

- Two sets of Form C contacts
- Rotary address switches for fast installation
- Contacts are rated for a variety of amps (see Specifications)
- Panel controlled status LED that flashes green in normal state and is solid red in alarm
- Relay programming is completely flexible—can be mapped to zone conditions
- Polling LED visible through the cover plate
- SEMS screws for easy wiring
- UL Listed



# SK-RELAY Technical Specifications

## PHYSICAL

4.675" H x 4.275" W x 1.4" D

Shipping Weight: 6.3 oz (196 g)

## ELECTRICAL

Operating Voltage: 15 – 32 VDC

End-of-Line Resistance: Not used

SLC Standby & Alarm Current: .255mA max @ 24VDC (one communication every 5 sec with LED enabled)

## ENVIRONMENTAL

Operating Temperature: 32°F – 120°F (0°C – 49°C)

Humidity: 10% – 93% non-condensing

## RELAY CONTACT RATINGS

3.0A @ 30VDC resistive

0.9A @ 110VDC resistive

0.9A @ 125VAC resistive

0.5A @ 125VAC inductive (PF = .35)

0.7A @ 75VAC inductive (PF = .35)

## ORDERING INFORMATION

SK-RELAY: Relay Module

## ACCESSORIES

SMB500: 4" Square Surface Mount Electrical Box

CB500 :Module Barrier

## COMPATIBILITY

The SK-RELAY is compatible with the following Honeywell Silent Knight fire alarm control panels:

6820: Addressable fire alarm control panel

6820EVS: Addressable fire alarm control panel with an emergency mass notification system.

6808: Addressable fire alarm control panel

6700: Addressable fire alarm control panel

5700: Addressable fire alarm control panel

5808: Addressable fire alarm control panel

5820XL: Addressable fire alarm control panel

5820XL-EVS: Addressable fire alarm control panel with an emergency mass notification system.

For a complete listing of all compliance approvals and certifications, please visit [www.silentknight.com](http://www.silentknight.com).

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Silent Knight®, System Sensor® and Honeywell® are registered trademarks of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

## For more information

Learn more about Honeywell Silent Knight and other products by visiting [www.silentknight.com](http://www.silentknight.com)

## Honeywell Silent Knight

12 Clintonville Road  
Northford, CT 06472  
800-328-0103

Doc 350127| Rev GI 11/17  
© 2017 Honeywell International Inc.





3825 Ohio Avenue, St. Charles, Illinois 60174  
800/736-7672, FAX: 630/377-6495  
www.systemsensor.com

# Selectable Output Horn Strobes, Chime Strobes and Strobes – Ceiling Mount

For use with the following models:

Ceiling Mount Horn Strobes: PC2RL, PC2WL

Ceiling Mount Chime Strobes: CHSCRL, CHSCWL

Ceiling Mount Strobes: SCRL, SCWL, SCWL-CLR-ALERT

PRODUCT SPECIFICATIONS	
Standard Operating Temperature:	32°F to 120°F (0°C to 49°C)
Humidity Range:	10 to 93% Non-condensing
Strobe Flash Rate	1 flash per second
Nominal Voltage:	Regulated 12VDC or regulated 24DC/FWR
Operating Voltage Range:	8 to 17.5V (12V nominal) or 16 to 33V (24V nominal)
Operating Voltage with MDL3 Sync Module:	8.5 to 17.5V (12V nominal) or 16.5 to 33V (24V nominal)
Input terminal wire gauge:	12 to 18 AWG

DIMENSIONS FOR PRODUCTS AND ACCESSORIES		
CEILING PRODUCTS	Diameter	Depth
Strobe, Chime Strobe and Horn Strobe	6.83" (173.5mm)	2.47" (62.7mm)
Strobe, Chime Strobe, and Horn Strobe with SBBCL/WL Surface Mount Back Box	6.92" (175.8mm)	2.50" (63.5mm)

MOUNTING BOX OPTIONS
2-Wire Indoor Products
4" x 4" x 1 1/2", Single Gang, Double Gang, 4" Octagon, SBBCL/WL (ceiling)

**NOTICE:** This manual shall be left with the owner/user of this equipment.

## BEFORE INSTALLING

Please read the System Sensor Audible Visible Application Reference Guide, which provides detailed information on notification devices, wiring and special applications. Copies of this manual are available from System Sensor. NFPA 72 and NEMA guidelines should be observed.

**Important:** The notification appliance used must be tested and maintained following NFPA 72 requirements.

## GENERAL DESCRIPTION

System Sensor series of notification appliances offer a wide range of audible and visible devices for life safety notification. Our 2-wire horn strobes, chime strobes and strobes come with 8 field selectable tone and volume combinations and 7 field selectable candela settings. Intended for indoor applications and approved for ceiling mount installations.

2-wire horn strobes and strobes are public mode notification appliances intended to alert occupants of a life safety event. The 2-wire chime strobe is a private mode notification appliance. The horn is listed to ANSI/UL 464 requirements (public mode) and the strobe is listed to ANSI/UL 1638 (public mode). 2-wire chime strobe is a private mode notification appliances intended to alert trained personnel to investigate a life safety event and take appropriate actions. The chime portion of the chime strobe is listed to ANSI/UL 464 (private mode) and the strobe portion is listed to ANSI/UL 1638 (private mode).

System Sensor strobes are designed to be used in 12 VDC, 24VDC, or 24V FWR (full wave rectified) systems. System Sensor AV devices can be activated by a compatible fire alarm control panel or power supply. Refer to the appropriate fire alarm control panel manufacturer or power supply for more information.

System Sensor ceiling 2-wire horn strobes, 2-wire chime strobes, and strobes are electrically backward compatible with the previous generation, since 1996, of notification appliances. They come enabled with System Sensor synchronization protocol which requires connections to a power supply capable of generating the System Sensor synchronization pulses, a FACP NAC output configured to System Sensor synchronization protocol, or the use of MDL3 module to generate the synchronization protocol.

## FIRE ALARM SYSTEM CONSIDERATIONS

The National Fire Alarm and Signaling Code, NFPA 72, requires that all notification appliances, used for building evacuation installed after July 1, 1996,

produce temporal coded signals. Signals other than those used for evacuation purposes do not have to produce the temporal coded signal. System Sensor recommends spacing notification appliances in compliance with NFPA 72.

## SYSTEM DESIGN

The system designer must make sure that the total current draw by the devices on the loop does not exceed the current capability of the panel supply, and that the last device on the circuit is operated within its rated voltage. The current draw information for making these calculations can be found in the tables within the manual. For convenience and accuracy, use the voltage drop calculator on the System Sensor website (www.systemsensor.com).

When calculating the voltage available to the last device, it is necessary to consider the voltage due to the resistance of the wire. The thicker the wire, the smaller the voltage drop. Wire resistance tables can be obtained from electrical handbooks. Note that if Class A wiring is installed, the wire length may be up to twice as long as it would be for circuits that are not fault tolerant. The total number of strobes on a single NAC must not exceed 69 for 24 volt applications.

## AVAILABLE TONES

System Sensor offers a wide variety of tones for your life safety needs, including temporal 3 pattern (1/2 second on, 1/2 second off, 1/2 second on, 1/2 second off, 1/2 second on, 1 1/2 off and repeat) which is specified by ANSI and NFPA 72 for standard emergency evacuation signaling.

To select the tone, turn the rotary switch on the back of the product to the desired setting. (See Figure 1.) Available horn settings can be found in Table 1. Available chime settings can be found in Table 2.

## AVAILABLE CANDELA SETTINGS

System Sensor offers a wide range of candela settings for your life safety needs. In order to select your candela output, adjust the slide switch on the rear of the product to the desired candela setting on the selector switch. (See Figure 2.)


The candela setting can also be verified by looking into the small window on the front of the unit. See Table 3 for candela settings for ceiling products. All products meet the light output profiles specified in the appropriate UL Standards. (See Figures 3 to 5.)

**FIGURE 1. AUDIO SELECTOR**



A0518-00

**FIGURE 2. CANDELA SELECTOR**



A0486-00

**TABLE 1. HORN TONES**

Pos	Tone	Volume Setting
1	Temporal	High
2	Temporal	Low
3	Non-Temporal	High
4	Non-Temporal	Low
5	3.1 KHz Temporal	High
6	3.1 KHz Temporal	Low
7	3.1 KHz Non-Temporal	High
8	3.1 KHz Non-Temporal	Low

**TABLE 2. CHIME TONES**

Pos	Tone	Volume Setting
1	1 Second Chime	High
2	1 Second Chime	Low
3	¼ Second Chime	High
4	¼ Second Chime	Low
5	Temporal Chime	High
6	Temporal Chime	Low
7	5 Second Whoop	High
8	5 Second Whoop	Low

**TABLE 3. CEILING-MOUNT STROBE CURRENT DRAW (mA)**


Candela	8-17.5 Volts	16-33 Volts	
	DC	DC	FWR
15	87	41	60
30	153	63	86
75	-	111	142
95	-	134	164
115	-	158	191
150	-	189	228
177	-	226	264

**NOTE:** Products set at 15 and 30 candela automatically work on either 12V or 24V power supplies. The products are not listed for 12V DC operation when set to any other candela settings.

**CURRENT DRAW AND AUDIBILITY RATINGS**

For the horn strobe, the current draw and audibility ratings for each setting is listed in Table 4. For the chime strobe, the current draw and audibility ratings for each setting is listed in Table 5. For the strobe, the current draw for each setting is listed in Table 3.

**FIGURE 3. LIGHT OUTPUT - VERTICAL DISPERSION, CEILING TO WALLS TO FLOOR**

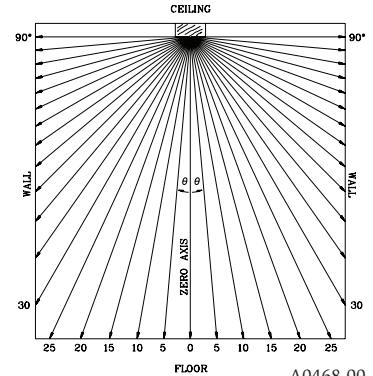


**FIGURE 4. LIGHT OUTPUT – HORIZONTAL DISPERSION**


Degrees*	Percent of Rating
0	100
5-25	90
30-45	75
50	55
55	45
60	40
65	35
70	35
75	30
80	30
85	25
90	25
Compound 45 to the left	24
Compound 45 to the right	24

**FIGURE 5. VERTICAL DISPERSION, WALL TO FLOOR**

Degrees*	Percent of Rating
0	100
5-30	90
35	65
40	46
45	34
50	27
55	22
60	18
65	16
70	15
75	13
80	12
85	12
90	12



A0467-00



A0469-00

\*Tolerance of ± 1 degree is permitted.

**TABLE 4. CEILING-MOUNT HORN STROBE CURRENT DRAW (mA) AND SOUND OUTPUT (dBA)**

			Current draw (mA)																Sound Output (dBA)		
Pos	Tone	Volume Setting	8-17.5 VDC		16-33 VDC							16-33 FWR							8-17.5 V		16-33 V
			15	30	15	30	75	95	115	150	177	15	30	75	95	115	150	177	DC	DC	FWR
1	Temporal	High	103	167	71	90	143	165	187	217	254	107	135	179	198	223	254	286	84	89	89
2	Temporal	Low	96	165	54	71	137	161	185	211	249	78	101	151	172	199	229	262	75	83	83
3	Non-Temporal	High	106	173	71	90	141	165	187	230	273	107	135	179	198	223	254	286	85	90	90
4	Non-Temporal	Low	95	166	54	71	124	161	170	216	258	78	101	151	172	199	229	262	76	84	84
5	3.1 KHz Temporal	High	111	164	69	94	147	163	184	229	257	108	135	179	200	225	255	289	83	88	88
6	3.1 KHz Temporal	Low	103	163	54	88	143	155	185	212	252	79	101	150	171	196	229	260	76	82	82
7	3.1 KHz Non-Temporal	High	111	172	69	94	144	164	202	229	271	108	135	179	200	225	255	289	84	89	89
8	3.1 KHz Non-Temporal	Low	103	169	54	88	131	155	187	217	259	79	101	150	171	196	229	260	77	83	83

**NOTE:** Products set at 15 and 30 candela automatically work on either 12V or 24V power supplies. The products are not listed for 12VDC operation when set to any other candela settings.

## WIRING AND MOUNTING

All wiring must be installed in compliance with the National Electric Code and the local codes as well as the authority having jurisdiction. Wiring must not be of such length or wire size which would cause the notification appliance to operate outside of its published specifications. Improper connections can prevent the system from alerting occupants in the event of an emergency.

Wire sizes up to 12 AWG (2.5 mm<sup>2</sup>) may be used with the mounting plate. The mounting plate ships with the terminals set for 12 AWG wiring.

Make wire connections by stripping about 3/8" of insulation from the end of the wire. Then slide the bare end of the wire under the appropriate clamping plate and tighten the clamping plate screw. We provide a wire strip guide. See Figure 6 for wiring terminals and strip guide reference.


### CAUTION

Factory finish should not be altered: Do not paint!

### CAUTION

Do not over tighten mounting plate screws; this may cause mounting plate to flex.

**FIGURE 6. WIRING TERMINALS, SHORTING SPRING, AND STRIP GUIDE**

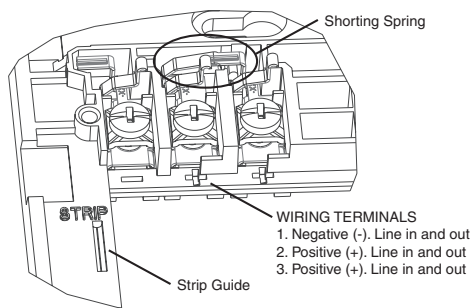


A0475-01

## SYSTEM WIRING

The 2-wire horn strobe, chime strobe and strobe only require two wires for power and supervision. (See Figure 7.) Please consult your FACP manufacturer or power supply manufacturer for specific wiring configurations and special cases.

**FIGURE 7. 2-WIRE CIRCUIT**

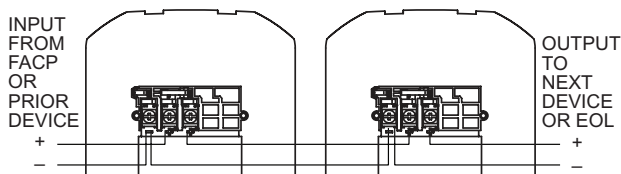

A0367-02

## SHORTING SPRING FEATURE


System Sensor notification appliances come with a shorting spring that is provided between terminals 2 and 3 of the mounting plate to enable system continuity checks after the system has been wired, but prior to installation of the final product. (See Figure 6.) This spring will automatically disengage when the product is installed, to enable supervision of the final system.

## MOUNTING AND REMOVING APPLIANCE

1. Attach mounting plate to junction box using two of the provided Philips head screws. (See Figure 8.)
2. Connect field wiring according to terminal designations. (See Figures 6 and 7.)
3. If the product is not to be installed at this point, use the protective dust cover to prevent contamination of the wiring terminals on the mounting plate.
4. To attach product to mounting plate:
  - a. Remove the protective dust cover.
  - b. Hook the tabs on the top of the product housing into the grooves on mounting plate.
  - c. Pivot the product into position to engage the terminals on the mounting plate. Make sure that the tabs on the back of the product housing fully engage with the mounting plate.
  - d. Hold product in place with one hand, and secure product by tightening the single mounting screw in the front of the product housing.

*Ceiling Models only:* To remove product from the mounting plate, loosen the captive mounting screw and press the locking button.

**FIGURE 8. MOUNTING**

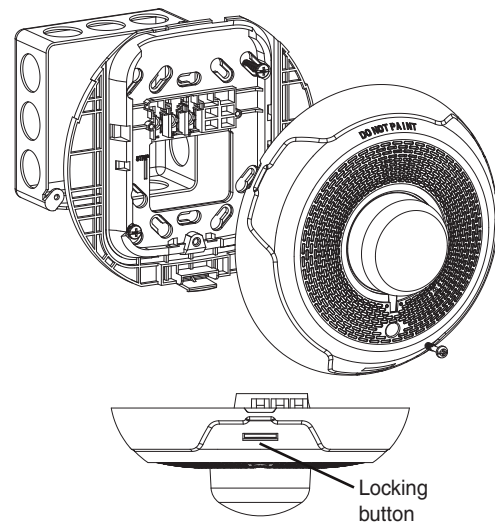

A0492-01

A0574-00

**TABLE 5. CEILING-MOUNT CHIME STROBE CURRENT DRAW (mA) AND SOUND OUTPUT (dBA)**

			Current draw (mA)																Sound Output (dBA)					
Pos	Chime Tone	Volume Setting	8-17.5 VDC		16-33 VDC								16-33 FWR								8-17.5 V		16-33 V	
			15	30	15	30	75	95	115	150	177	15	30	75	95	115	150	177	DC	DC	FWR			
1	1 Second	High	96	165	47	69	117	137	165	202	238	63	90	147	169	184	212	245	61	62	62			
2	1 Second	Low	93	162	47	68	116	137	165	200	238	63	88	147	169	183	212	244	56	55	55			
3	¼ Second	High	94	161	48	70	117	138	166	202	237	65	90	149	170	184	213	246	67	70	70			
4	¼ Second	Low	93	157	48	69	116	137	164	199	236	64	89	148	168	184	216	244	61	61	61			
5	Temporal	High	93	163	48	70	116	138	165	199	238	64	89	148	169	184	212	245	64	66	66			
6	Temporal	Low	92	160	47	69	116	136	164	198	237	63	88	147	169	183	212	245	59	60	60			
7	5 Second Whoop	High	98	169	54	77	124	146	173	206	245	75	100	155	178	193	221	255	76	78	78			
8	5 Second Whoop	Low	95	166	49	71	117	144	168	202	239	68	91	148	170	186	217	248	62	64	64			


**NOTE:** Products set at 15 and 30 candela automatically work on either 12V or 24V power supplies. The products are not listed for 12VDC operation when set to any other candela settings.

### TAMPER SCREW

For tamper resistance, the standard captive screw may be replaced with a Torx screw (sold separately).

1. To remove the captive screw, back out the screw and apply pressure to the back of the screw until it disengages from the housing. Replace with Torx screw. (See Figure 9.)

**FIGURE 9. TAMPER SCREW**



A0493-01

### INSTALLING A SURFACE MOUNT BACK BOX


1. The ceiling surface mount back box may be secured directly to the wall or ceiling. Use of grounding bracket with ground screw is optional. (See Figure 10.)
2. The ceiling mount box can be used on ceiling horn strobe, chime strobe, strobe as well as ceiling speaker and speaker strobe models. Use the STR cut-outs for ceiling horn strobe, chime strobe and strobe installation needs. (See Figure 11.)
3. Threaded knockout holes are provided for the sides of the box for 3/4 inch and 1/2 inch conduit adapter. Knockout holes in the back of the box can be used for 3/4 inch and 1/2 inch rear entry.
4. To remove the 3/4 inch knockout, place the blade of a flat-head screwdriver along the outer edge and work your way around the knockout as you strike the screwdriver. (See Figure 12.)

**NOTE:** Use caution not to strike the knockout near the top edge of the surface mount back box.

5. V500 and V700 raceway knockouts are also provided. Use V500 for low profile applications and V700 for high profile applications.
6. To remove the knockout, turn pliers up. (See Figure 12.)


**FIGURE 10. SURFACE MOUNTING ON CEILING**

SBBCRL/SBBCWL

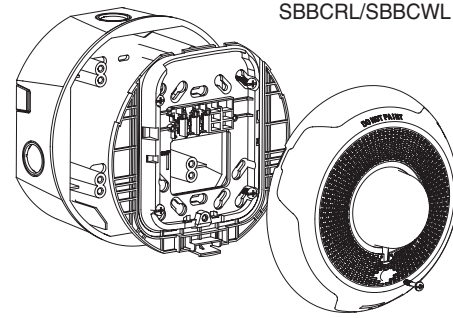


A0494-02

**FIGURE 11. CUT-OUTS FOR SPEAKER (SPK) AND STROBE (STR)**




A0495-00

**FIGURE 12. KNOCKOUT AND V500/V700 REMOVAL FOR SURFACE MOUNT BACK BOX**



A0465-01



A0466-01

### WARNING

#### THE LIMITATIONS OF HORN/STROBES

**The horn and/or strobe will not work without power.** The horn/strobe gets its power from the fire/security panel monitoring the alarm system. If power is cut off for any reason, the horn/strobe will not provide the desired audio or visual warning.

**The horn may not be heard.** The loudness of the horn meets (or exceeds) current Underwriters Laboratories' standards. However, the horn may not alert a sound sleeper or one who has recently used drugs or has been drinking alcoholic beverages. The horn may not be heard if it is placed on a different floor from the person in hazard or if placed too far away to be heard over the ambient noise such as traffic, air conditioners, machinery or music appliances that may prevent alert persons from hearing the alarm. The horn may not be heard by persons who are hearing impaired.

**NOTE:** Strobes must be powered continuously for horn operation.

**The signal strobe may not be seen.** The electronic visual warning signal uses an extremely reliable xenon flash tube. It flashes at least once every second. The strobe must not be installed in direct sunlight or areas of high light intensity (over 60 foot candles) where the visual flash might be disregarded or not seen. The strobe may not be seen by the visually impaired.

**The signal strobe may cause seizures.** Individuals who have positive photoic response to visual stimuli with seizures, such as persons with epilepsy, should avoid prolonged exposure to environments in which strobe signals, including this strobe, are activated.

**The signal strobe cannot operate from coded power supplies.** Coded power supplies produce interrupted power. The strobe must have an uninterrupted source of power in order to operate correctly. System Sensor recommends that the horn and signal strobe always be used in combination so that the risks from any of the above limitations are minimized.

#### FCC STATEMENT

System Sensor Strobes and Horn/Strobes have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and

can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

#### SUPPLEMENTAL INFORMATION

For the latest Warranty information, please go to:  
<http://www.systemsensor.com/en-us/Documents/E56-4000.pdf>

For Limitations of Fire Alarm Systems, please go to:  
<http://www.systemsensor.com/en-us/Documents/I56-1558.pdf>

Speakers only: For the latest Important Assembly Information, please go to:  
<http://www.systemsensor.com/en-us/Documents/I56-6556.pdf>



Warranty



Limitations of  
Fire Alarm Systems



Speakers Only:  
Assembly Information





# Indoor Selectable-Output Horns, Strobes, and Horn Strobes for Wall Applications

*System Sensor L-Series audible visible notification products are rich with features guaranteed to cut installation times and maximize profits with lower current draw and modern aesthetics.*

## Features

- Updated Modern Aesthetics
- Small profile devices for Horns and Horn Strobes
- Plug-in design with minimal intrusion into the back box
- Tamper-resistant construction
- Automatic selection of 12- or 24-volt operation at 15 and 30 candela
- Field-selectable candela settings on wall units: 15, 30, 75, 95, 110, 135, and 185
- Horn rated at 88+ dBA at 16 volts
- Rotary switch for horn tone and two volume selections
- Mounting plate for all standard and all compact wall units
- Mounting plate shorting spring checks wiring continuity before device installation
- Electrically compatible with legacy SpectrAlert and SpectrAlert Advance devices
- Compatible with MDL3 sync module
- Strobes and Horn Strobes listed for wall mounting only
- Horns listed for wall or ceiling use

## Agency Listings



**The System Sensor L-Series** offers the most versatile and easy-to-use line of horns, strobes, and horn strobes in the industry with lower current draws and modern aesthetics. With white and red plastic housings, standard and compact devices, and plain, FIRE, and FUEGO-printed devices, System Sensor L-Series can meet virtually any application requirement.

The L-Series line of wall-mount horns, strobes, and horn strobes include a variety of features that increase their application versatility while simplifying installation. All devices feature plug-in designs with minimal intrusion into the back box, making installations fast and foolproof while virtually eliminating costly and time-consuming ground faults.

To further simplify installation and protect devices from construction damage, the L-Series utilizes a universal mounting plate for all models with an onboard shorting spring, so installers can test wiring continuity before the device is installed.

Installers can also easily adapt devices to suit a wide range of application requirements using field-selectable candela settings, automatic selection of 12- or 24-volt operation, and a rotary switch for horn tones with two volume selections.

# L-Series Specifications

## Architect/Engineer Specifications

### General

L-Series standard horns, strobes, and horn strobes shall mount to a standard 2 x 4 x 1<sup>7</sup>/<sub>8</sub>-inch back box, 4 x 4 x 1<sup>1</sup>/<sub>2</sub>-inch back box, 4-inch octagon back box, or double-gang back box. L-Series compact products shall mount to a single-gang 2 x 4 x 1<sup>7</sup>/<sub>8</sub>-inch back box. A universal mounting plate shall be used for mounting ceiling and wall products for all standard models and a separate universal mounting plate shall be used for mounting wall compact models. The notification appliance circuit wiring shall terminate at the universal mounting plate. Also, L-Series products, when used with the Sync•Circuit™ Module accessory, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts. When used with the Sync•Circuit Module, 12-volt-rated notification appliance circuit outputs shall operate between 8.5 and 17.5 volts; 24-volt-rated notification appliance circuit outputs shall operate between 16.5 and 33 volts. Indoor L-Series products shall operate between 32 and 120 degrees Fahrenheit from a regulated DC or full-wave rectified unfiltered power supply. Strobes and horn strobes shall have field-selectable candela settings including 15, 30, 75, 95, 110, 135, and 185.

### Strobe

The strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and shall be approved for fire protective service. The strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system.

### Horn Strobe Combination

The horn strobe shall be a System Sensor L-Series Model \_\_\_\_\_ listed to UL 1971 and UL 464 and shall be approved for fire protective service. The horn strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The horn shall have two audibility options and an option to switch between a temporal three pattern and a non-temporal (continuous) pattern. These options are set by a multiple position switch. The horn on horn strobe models shall operate on a coded or non-coded power supply.

### Synchronization Module

The module shall be a System Sensor Sync•Circuit model MDL3 listed to UL 464 and shall be approved for fire protective service. The module shall synchronize Strobes at 1 Hz and horns at temporal three. Also, while operating the strobes, the module shall silence the horns on horn strobe models over a single pair of wires. The module shall mount to a 4<sup>11</sup>/<sub>16</sub> x 4<sup>11</sup>/<sub>16</sub> x 2<sup>1</sup>/<sub>8</sub>-inch back box. The module shall also control two Style Y (class B) circuits or one Style Z (class A) circuit. The module shall synchronize multiple zones. Daisy chaining two or more synchronization modules together will synchronize all the zones they control. The module shall not operate on a coded power supply.

## Physical/Electrical Specifications

<b>Standard Operating Temperature</b>	32°F to 120°F (0°C to 49°C)
<b>Humidity Range</b>	10 to 93% non-condensing
<b>Strobe Flash Rate</b>	1 flash per second
<b>Nominal Voltage</b>	Regulated 12 DC or regulated 24 DC/FWR <sup>1</sup>
<b>Operating Voltage Range<sup>2</sup></b>	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
<b>Operating Voltage Range MDL3 Sync Module</b>	8.5 to 17.5 V (12 V nominal) or 16.5 to 33 V (24 V nominal)
<b>Input Terminal Wire Gauge</b>	12 to 18 AWG
<b>Wall-Mount Dimensions (including lens)</b>	5.6" L x 4.7" W x 1.91" D (143 mm L x 119 mm W x 49 mm D)
<b>Compact Wall-Mount Dimensions (including lens)</b>	5.26" L x 3.46" W x 1.91" D (133 mm L x 88 mm W x 49 mm D)
<b>Horn Dimensions</b>	5.6" L x 4.7" W x 1.25" D (143 mm L x 119 mm W x 32 mm D)
<b>Compact Horn Dimensions</b>	5.25" L x 3.45" W x 1.25" D (133 mm L x 88 mm W x 32 mm D)

1. Full Wave Rectified (FWR) voltage is a non-regulated, time-varying power source that is used on some power supply and panel outputs.

2. Strobe products will operate at 12 V nominal only for 15 cd and 30 cd.

## UL Current Draw Data

UL Max. Strobe Current Draw (mA RMS)				
	Candela	8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Candela Range	15	88	43	60
	30	143	63	83
	75	N/A	107	136
	95	N/A	121	155
	110	N/A	148	179
	135	N/A	172	209
	185	N/A	222	257

UL Max. Horn Current Draw (mA RMS)				
		8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Sound Pattern	dB			
Temporal	High	39	44	54
Temporal	Low	28	32	54
Non-Temporal	High	43	47	54
Non-Temporal	Low	29	32	54
3.1 KHz Temporal	High	39	41	54
3.1 KHz Temporal	Low	29	32	54
3.1 KHz Non-Temporal	High	42	43	54
3.1 KHz Non-Temporal	Low	28	29	54
Coded	High	43	47	54
3.1 KHz Coded	High	42	43	54

UL Max. Current Draw (mA RMS), Wall Horn Strobe, Candela Range (15–185 cd)									
DC Input	8–17.5 Volts		16–33 Volts						
	15cd	30cd	15cd	30cd	75cd	95cd	110cd	135cd	185cd
Temporal High	98	158	54	74	121	142	162	196	245
Temporal Low	93	154	44	65	111	133	157	184	235
Non-Temporal High	106	166	73	94	139	160	182	211	262
Non-Temporal Low	93	156	51	71	119	139	162	190	239
3.1K Temporal High	93	156	53	73	119	140	164	190	242
3.1K Temporal Low	91	154	45	66	112	133	160	185	235
3.1K Non-Temporal High	99	162	69	90	135	157	175	208	261
3.1K Non-Temporal Low	93	156	52	72	119	138	162	192	242
FWR Input	16–33 Volts								
	15cd	30cd	75cd	95cd	110cd	135cd	185cd		
Temporal High	83	107	156	177	198	234	287		
Temporal Low	68	91	145	165	185	223	271		
Non-Temporal High	111	135	185	207	230	264	316		
Non-Temporal Low	79	104	157	175	197	235	283		
3.1K Temporal High	81	105	155	177	196	234	284		
3.1K Temporal Low	68	90	145	166	186	222	276		
3.1K Non-Temporal High	104	131	177	204	230	264	326		
3.1K Non-Temporal Low	77	102	156	177	199	234	291		


## Horn Tones and Sound Output Data

Horn and Horn Strobe Output (dBA)					
Switch Position	Sound Pattern	dB	8–17.5 Volts	16–33 Volts	FWR
			DC	DC	
1	Temporal	High	84	89	89
2	Temporal	Low	75	83	83
3	Non-Temporal	High	85	90	90
4	Non-Temporal	Low	76	84	84
5	3.1 KHz Temporal	High	83	88	88
6	3.1 KHz Temporal	Low	76	82	82
7	3.1 KHz Non-Temporal	High	84	89	89
8	3.1 KHz Non-Temporal	Low	77	83	83
9*	Coded	High	85	90	90
10*	3.1 KHz Coded	High	84	89	89

\* Settings 9 and 10 are not available on 2-wire horn strobes. Temporal coding must be provided by the NAC. If the NAC voltage is held constant, the horn output remains constantly on.



## L-Series Dimensions

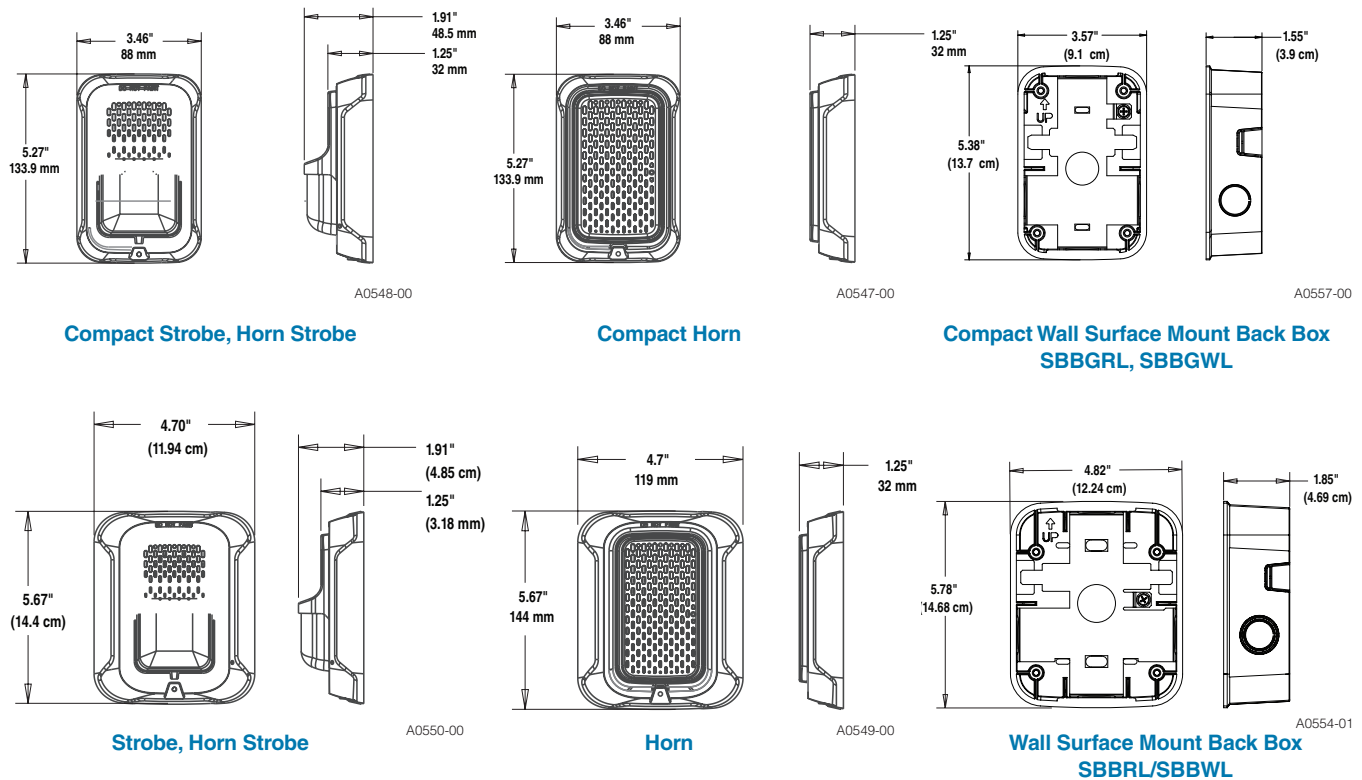

## L-Series Ordering Information

Model	Description
<b>Wall Horn Strobes</b>	
P2RL	2-Wire, Horn Strobe, Red
P2WL	2-Wire, Horn Strobe, White
P2GRL	2-Wire, Compact Horn Strobe, Red
P2GWL	2-Wire, Comp 2 fils act Horn Strobe, White
P2RL-P	2-Wire, Horn Strobe, Red, Plain
P2WL-P	2-Wire, Horn Strobe, White, Plain
P2RL-SP	2-Wire, Horn Strobe, Red, FUEGO
P2WL-SP	2-Wire, Horn Strobe, White, FUEGO
P4RL	4-Wire, Horn Strobe, Red
P4WL	4-Wire, Horn Strobe, White
<b>Wall Strobes</b>	
SRL	Strobe, Red
SWL	Strobe, White
SGRL	Compact Strobe, Red
SGWL	Compact Strobe, White
SRL-P	Strobe, Red, Plain
SWL-P	Strobe, White, Plain
SRL-SP	Strobe, Red, FUEGO
SWL-CLR-ALERT	Strobe, White, ALERT

Model	Description
<b>Horns*</b>	
HRL*	Horn, Red
HWL*	Horn, White
HGRL*	Compact Horn, Red
HGWL*	Compact Horn, White
<b>Accessories</b>	
TR-2	Universal Wall Trim Ring Red
TR-2W	Universal Wall Trim Ring White
SBBRL	Wall Surface Mount Back Box, Red
SBBWL	Wall Surface Mount Back Box, White
SBBGRL	Compact Wall Surface Mount Back Box, Red
SBBGWL	Compact Wall Surface Mount Back Box, White

### Notes:

All -P models have a plain housing (no "FIRE" marking on cover).

All -SP models have "FUEGO" marking on cover.

All -ALERT models have "ALERT" marking on cover.

\*Horn-only models are listed for wall or ceiling use.



3825 Ohio Avenue • St. Charles, IL 60174  
 Phone: 800-SENSOR2 • Fax: 630-377-6495  
[www.systemsensor.com](http://www.systemsensor.com)

©2018 System Sensor.  
 Product specifications subject to change without notice. Visit [systemsensor.com](http://systemsensor.com)  
 for current product information, including the latest version of this data sheet.  
 AVDS865-05 • 2/22/2018