



Ancho & Agave

860-A NW BLUE PARKWAY
LEE'S SUMMIT, MO 64086

FIRE ALARM MODIFICATIONS

Job # 41434994

June 24, 2025

EQUIPMENT SUBMITTAL

CONTENTS

SECTION	DESCRIPTION
1	Equipment Data Sheets
.	

Initiating Devices

Velociti Series® AMM-4F

Addressable Monitor Module

General

The Gamewell-FCI Velociti® Series, addressable monitor module (AMM-4F) features a single Style D, Class A initiating device circuit. It may also be configured as a Style B, Class B initiating circuit with end-of-line resistor. This module provides an address for any device or group of devices connected to this circuit. Any alarm initiating devices with normally open (N.O.) dry contacts, such as heat detectors, linear heat detection devices, 4-wire projected beam smoke detectors, 4-wire smoke detectors, water flow switches, tamper switches, manual stations, etc. may be installed in this circuit.


The Velociti® Series use a communication protocol that substantially increases the speed of communication between the sensors and certain Gamewell-FCI analog addressable fire alarm controls. These devices operate in a grouped fashion. If one of the devices in the group has a status change, the panel's microprocessor stops the group poll and concentrates on the single device. The net effect is response speed up to five times greater than earlier designs.

The AMM-4F module is designed for installation in the signaling line circuit of any Gamewell-FCI analog addressable control panel. The initiating circuit of the AMM-4F has a maximum line resistance of 40 ohms, allowing the module to accommodate a number of initiating devices at a distance from the module. The AMM-4F is designed to mount in a 4" square junction box 2 1/8" deep.

The initiating device circuit of the AMM-4F can support a maximum line resistance of up to 40 ohms allowing the use of linear heat detection devices.

Ordering Information

AMM-4F: Addressable monitor module, single circuit Style D, Class A or Style BC/A and B

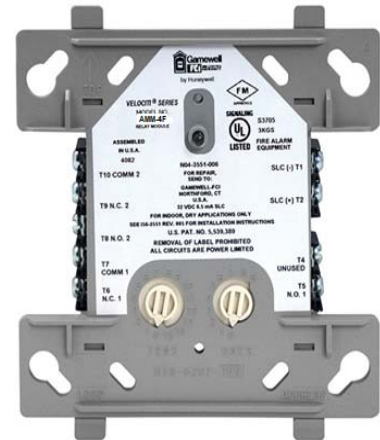

AMM-4F

FEATURES & BENEFITS

- Compact size allows easy installation
- Includes Class A, Style D, or Class B, Style B initiating circuit
- Offers a visual rotary, decimal switch addressing (01-159)
- Provides a 40 ohm line resistance for each initiating device circuit
- Accommodates any N/O dry contact device
- Bi-color LEDs flash green whenever the module is addressed, and light steady red on alarm*

*Note: Only the red LED is operative in panels that do not operate in Velociti® mode.

Velociti Series® AMM-4F Technical Specifications

SYSTEM

Supervisory Current: .000375 amps. (LED flashing)

Alarm Current: .005 amps. (LED lit)

Operating Temperature: 32° to 120° F (0° to 49° C)

Relative Humidity: 10 to 93% (non-condensing)

End-of-Line resistor: 47K ohms

Dimensions: 4 1/2" H x 4" W x 1 1/4" D
(11.4 x 10.2 x 3.2 cm)

TEMPERATURE AND HUMIDITY RANGES

This system meets NFPA requirements for operation at 0 – 49°C/32 – 120°F and at a relative humidity 93% ± 2% RH (noncondensing) at 32°C ± 2°C (90°F ± 3°F).

However, the useful life of the system's standby batteries and the electronic components may be adversely affected by extreme temperature ranges and humidity. Therefore, it is recommended that this system and its peripherals be installed in an environment with a normal room temperature of 15 – 27°C/60 – 80°F.

STANDARDS

The Velociti Series® AMM-4F is designed to comply with the following standard:

UL Standard: UL 864 9th Edition

AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules specified in this document. In some cases, certain modules or applications may not be listed by certain approval agencies, or listing may be in process. Consult factory for latest listing status.

UL: S1949

FM: 3023594

MEA FDNY: 277-03-E Vol. VI

CSFM: 7300-1703:0102

ISO 9001 Certification

For a complete listing of all compliance approvals and certifications, please visit:

<http://www.gamewell-fci.com/en-US/documentation/Pages/Listings.aspx>

Velociti®, E3 Series® and Gamewell-FCI® are registered trademarks of Honeywell International Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to-date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For more information

Learn more about Gamewell-FCI's Velociti Series® AMM-4F and other products available by visiting www.Gamewell-FCI.com

Honeywell Gamewell-FCI

12 Clintonville Road
Northford, CT 06472-1610
203.484.7161
www.honeywell.com

9020-0624 | F | 11/17
©2017 Honeywell International Inc.

Honeywell

Velociti® Series 3 Detectors

Photoelectric Detectors

Description

The Gamewell-FCI, Velociti® Series 3 intelligent photoelectric detectors with integral communication provide point location for alarm communication and selective maintenance. Designed in a modern bright white color, the Velociti Series 3 is aesthetically pleasing for today's contemporary buildings.

The Velociti Series 3 smoke detectors are intelligent addressable detectors with point ID capability that enable each detector address to be set with rotary address switches providing exact device locations. The photoelectric detector continually monitors the detected temperature and reports it to the fire alarm control panel. The modern design and expanded color options support a variety of contemporary aesthetic demands. In addition, each detector is constructed for exceptional installation and maintenance efficiency.

The Gamewell-FCI, ASD-PL3 photoelectric detector's re-designed optical sensing chamber is engineered to sense smoke produced by a wide range of combustion sources in accordance with more stringent code standards. The sensitivity of Velociti series detectors can be programmed using the control panel software to suit the environment. The ASD-PL3R photoelectric detector is also remote test capable that may be used with a DNR (DNRW) duct smoke detector housing. The ASD-PTL3 multi-sensor detector offers either photoelectric detection or thermal detection through dual electronic thermistors at 135°F fixed temperature thermal sensing.

For legacy installations, service detectors are available in the classic ivory color that will operate in both Velociti and CLIP protocol for backwards compatibility. Service models are designated by the -IV part number after the detector model.

Note: Although the E3 Series® and S3 Series panels support both the Velociti® and CLIP™ protocols, the GWF-7075 panel does not support the CLIP protocol. To obtain a complete list of panels that are listed to Velociti Series 3 detectors, refer to the Compatibility Addendum for Gamewell-FCI Manuals, P/N:9000-0427-L8.



Photoelectric Detector

FEATURES & BENEFITS

- Complies with UL® Standard 268 7th Edition
- Designed with a new profile to offer modern and improved aesthetics
- Contains a built-in functional test switch activated by external magnet
- Supports a low standby current
- Provides rotary address switches (01-159)
- Supplies optional relay, isolator, or sounder bases (standard or low frequency)
- Includes dual LEDs for 360° visibility
- Offers expanded color options

Ordering Information

NOTE: "-IV" suffix indicates Ivory color model.

NOTE: "-BL" suffix indicates Black color model.

NOTE: "WH" suffix indicates Bright White color model.

ASD-PL3: Photoelectric smoke detector, bright white, Velociti

ASD-PL3R: Photoelectric smoke detector, remote test capable, for use with DNR(W) duct smoke detectors, bright white, Velociti

ASD-PTL3: Photoelectric smoke detector with thermal sensing, bright white, Velociti

ASD-PL3-IV : Photoelectric smoke detector, ivory, Velociti/CLIP

ASD-PL3R-IV: Photoelectric smoke detector, remote test capable, for use with DNR(W) duct smoke detectors, ivory, Velociti/CLIP

ASD-PTL3-IV : Photoelectric smoke detector with thermal sensing, ivory, Velociti/CLIP

Intelligent Bases

For details on intelligent bases, refer to Data Sheet P/N: 9021-60540.

Note: "IV" suffix indicates Flashscan and CLIP devices.
"WH" suffix indicates bright white

B501-WHITE: 4" Flangeless mounting base, bright white

B501-WHITE-BP: 4" Flangeless mounting base bulk pack, bright white

B501-IV: 4" Flangeless mounting base, ivory

B300-6: 6" Flanged mounting base, bright white

B300-6-IV: 6" Flanged mounting base, ivory

B300-6-BP: 6" Flanged mounting base bulk (Pack of 10)

B200SR-WH: Standard sounder base, bright white

B200SR-IV: Standard sounder base, ivory

B200S-WH: Intelligent addressable sounder base, bright white

B200S-IV: Intelligent addressable sounder base, ivory

B200SR-LF-WH: Standard low frequency sounder base, bright white

B200SR-LF-IV: Standard low frequency sounder base, ivory

B200S-LF-WH: Intelligent addressable low frequency sounder base, bright white

B200S-LF-IV: Intelligent addressable low frequency sounder base, ivory

B224RB-WH: Relay base, bright white

B224RB-IV: Relay base, ivory

B224BI-WH: Isolator base, bright white

B224BI-IV: Isolator base, ivory

DNR: Intelligent duct detector housing, non-relay

DNRW: Intelligent duct detector housing, non-relay, watertight

Ordering Information

Accessories

SMB600: Surface Mounting Kit (flanged)

TR300: Accessory Flange Ring for B300 6" Base, bright white

TR300-IV: Accessory Flange Ring for B300 6" Base, ivory

RA100Z: Remote LED annunciator, 3-32 VDC

The annunciator mounts to a U.S. single-gang electrical box. For use with B501 and B300-6.

CK300: Bright White detector kit (Pack of 10)

CK300-IR: White, detector color kit for use with MCS-COF Series Detectors. (Pack of 10)

CK300-IV: Ivory, detector color kit. (Pack of 10)

CK300-IR-IV: Ivory, detector color kit for use with MCS-COF Series detectors. (Pack of 10)

CK300-BL: Black detector kit. (Pack of 10)

CK300-IR-BL: Black, detector color kit for use with MCS-COF Series detectors. (Pack of 10)

M02-04-01: Detector test magnet.

M02-09-00: Test magnet with telescoping handle.

XR2B: Detector removal tool. Allows the installation and/or removal of the detector heads from the bases in high ceiling applications.

XP-4: Extension pole for XR2B. Shipped with three, 5-foot (1.524,m) sections.

Velociti® Series 3 Detectors Technical Specifications

SYSTEMS

Photoelectric Intelligent Detector:

Physical Specifications

Height: 2.0 inches (51 mm) installed in B300-6 base

Diameter:

6.1 inches (15.49 cm) installed in B300-6 base

4 inches (10.16 cm) installed in B501 base

Shipping Weight: 3.4 oz (96.4 g)

Operating Temperature Range:

Photo: 32° F to 122° F (0° C to 50° C)

Photo in Duct Applications: -4° F to 158° F
(-20° C to 70° C)

Photo with Thermal: 32° F to 100° F (0° C to 38° C)

Operating Humidity Range: 10% to 93%
non-condensing

Rate-of-Rise Detection: Responds to greater than
15°F/minute or 135°F (8.3° C/minute or 57°C)

Air Velocity Range: 0 to 4,000 ft/min
(0 to 1219.2 m/min)

Electrical Specifications

Voltage Range: 15 to 32 VDC

Standby Current (@ 24 VDC): 200 UA (one
communication every 5 seconds with green LED
enabled)

Max Alarm Current (max.): 2 mA @ 24 VDC (one
communication every 5 seconds with red LED
enabled)

Max Current (max.): 4.5 mA @ 24 VDC (one
communication every 5 seconds with amber LED
enabled)

Isolator Load Rating: 0.0063

STANDARDS

The Velociti® Series 3 Photoelectric Detectors are
designed to comply with the following standard:

UL Standard: UL 268

AGENCY LISTINGS AND APPROVALS

These listings and approvals apply to the modules
specified in this document. In some cases, certain
modules or applications may not be listed by certain
approval agencies, or listing may be in process.
Consult factory for latest listing status.

UL: S2332

FM: 3023594

MEA FDNY: COA-219-02-E Vol. VI

CSFM: 7272-1703:0501

ISO 9001 Certification

For a complete listing of all
compliance approvals and
certifications, please visit:

<http://www.gamewell-fci.com/en-US/documentation/Pages/Listings.aspx>

E3 Series®, Velociti® and
Gamewell-FCI® are registered
trademarks of Honeywell
International Inc.

UL® is a registered trademark
of Underwriter's Laboratories
Inc.

This document is not intended
to be used for installation
purposes. We try to keep our
product information up-to-
date and accurate. We cannot
cover all specific applications
or anticipate all requirements.
All specifications are subject to
change without notice.

For more information

Learn more about Gamewell-FCI's Velociti® Series 3 Detectors
and other products available by visiting www.Gamewell-FCI.com

Honeywell Gamewell-FCI

12 Clintonville Road
Northford, CT 06472-1610
203.484.7161
www.honeywell.com

9020-0617 | K | 04/2018
©2018 Honeywell International Inc.

Honeywell



by Honeywell

MS-7AF, MS-7 and MS-7S

Description

The Gamewell-FCI MS-7 Style manual fire alarm stations are available in a wide variety of configurations. The Stations comply with the Americans with Disabilities Act (ADA) 5-lb. maximum pull force requirement. Operating instructions and Braille text are engraved in the handle. All stations have a key lock/reset which is keyed alike with Gamewell-FCI fire alarm control panels and other manual fire alarm stations.

MS-7AF Velociti® Addressable Station

The MS-7AF Velociti® Series addressable station is a double action station designed for installation in the signaling line circuit of Gamewell-FCI analog addressable control panels. Activation of the station causes its assigned address to register at the control panel. The door contains an LED which flashes green in normal condition and lights steady red when the station has been activated.* The station features screw terminals.

MS-7ASF Velociti® Addressable Station

The MS-7ASF Velociti® Series addressable station is a single action station designed for installation in the signaling line circuit of Gamewell-FCI analog addressable control panels. Activation of the station causes its assigned address to register at the control panel. The door contains an LED which flashes green in normal condition and lights steady red when the station has been activated.* The station features screw terminals.

The Velociti® Series stations use a communication protocol that substantially increases the speed of communication between the sensors and certain Gamewell-FCI analog addressable fire alarm controls. These devices operate in a grouped fashion. If one of the devices in the group has a status change, the panel's microprocessor stops the group poll and focuses on the single device. The net effect is response speed up to five times greater than earlier designs.

MS-7 Double Action Station

The MS-7 double action station is used with conventional fire alarm control panels. It features a set of single pole contacts and screw terminals for connection to an initiating circuit.

Velociti® is a registered trademark of Honeywell International Inc.

UL® is a registered trademark of Underwriter's Laboratories Inc.

LEXAN® is a registered trademark of GE Plastics, a subsidiary of General Electric Company.

Non-Coded, Manual Fire Alarm Stations




MS-7

Features

- Addressable stations compatible with all Gamewell-FCI analog addressable fire alarm controls
 - Conventional stations suitable for use with any UL® Listed control panel
 - Both single and double action stations available
 - Tumbler lock for test and reset keyed alike with Gamewell-FCI controls
 - Surface or semi-flush mounting
 - Shock and vibration resistant
 - Stations (MS-7LOB) Listed for outdoor applications
 - Complies with ADA pull force requirements
- Only the red LED is operative in panels that do not operate in Velociti mode.

An ISO 9001-2000 Company



GAMEWELL-FCI

12 Clintonville Road, Northford, CT 06472-1610 USA • Tel: (203) 484-7161 • Fax: (203) 484-7118

Specifications are for information only, are not intended for installation purposes, and are subject to change without notice. No responsibility is assumed by Gamewell-FCI for their use.

©2008 by Honeywell International Inc. All rights reserved.

www.gamewell-fci.com

9020-0616 Rev. B2 page 1 of 2

MS-7S Single Action Station

The MS-7S single action station is used with conventional fire alarm control panels. It features a set of single pole contacts and wire leads for connection to an initiating circuit.

MS-7SP Double Action Station

The MS-7SP is a double action station similar to the MS-7 station, with the additional feature of both English and Spanish instructions molded into the unit.

MS-7LOB Double Action Station (Listed for Outdoor Applications)

The MS-7LOB station must be mounted on a Model SB-I/O backbox. In retrofit applications, the station is UL Listed for use with the WP-10 backbox. It is intended for use with conventional control panels and has a set of single pole contacts and screw terminals.

Mounting

The MS-7 interior stations may be surface mounted (use backbox SB-I/O) or semi-flush mounted on a standard double-gang, or 4-inch (10.2 cm) square electrical box. An optional trim ring (BG-TR) may also be used for semi-flush mounting.

NYC-Plate

The NYC-Plate provides the backplate for the manual pull station. (See Figure 1).



Figure 1 NYC-Plate

Specifications

Material:	Lexan®
Contact Ratings:	0.25 amps. @ 30 VAC/VDC (resistive)
Dimensions:	5 5/8" H x 4 1/4" W x 1 1/4" D (14 x 10.1 x 3.2 cm)
Operating Temperature (MS-7AF):	32° to 120° F (0° to 49° C)
Relative Humidity (MS-7AF):	10 to 93% (non-condensing)
Alarm Current:	.0030 amp. 0.007 for LED
Supervisory Current (MS-7AF):	.00030 amps.

Ordering Information

Model	Description
MS-7	Double action station.
MS-7AF**	Velociti addressable double action station.
MS-7ASF	Velociti addressable single action station
MS-7S	Single action station, wire leads.
MS-7SP	Double action station, English and Spanish instructions.
MS-7LOB	Double action station, outdoor use. (Must use SB-I/O - Indoor/outdoor use backbox).
SB-I/O	Indoor/outdoor use backback-box.
SB-10	Surface backbox.
BG-TR.	Trim ring for semi-flush mount
NYC-Plate	NYC backplate for manual pull station

**For use with Gamewell-FCI analog addressable control panels only.

GAMEWELL-FCI

Notification Appliances




L-Series and L-Series with LED Indoor Selectable Horns, Strobes and Horn Strobes

System Sensor L-Series and L-Series with LED audible visible notification products are rich with features guaranteed to cut installation times and maximize profits with lower current draw and modern aesthetics.

Features

- LED technology provides lower current draw
- Digital Voltage Meter (DVM) diagnostic test points for Horn Strobes and Strobes
- Common aesthetics across the L-Series platform
- Standard and compact sizes
- Tamper-resistant construction
- Field-selectable candela settings on wall units: 15, 30, 75, 95, 110, 135, and 185
- Field-selectable candela settings on ceiling units: 15, 30, 75, 95, 115, 150, and 177
- Rotary switches for candela, tone and volume selections
- Mounting plate provides plug-in design for easier installation and shorting springs to check wiring continuity
- Electrically compatible with legacy SpectrAlert, SpectrAlert Advance and L-series devices
- Synchronization through use of UL approved power supplies that support System Sensor Sync protocol or System Sensor MDL3 Sync Module
- Horns, Strobes and Horn Strobes listed for wall or ceiling use

Agency Listings



The System Sensor L-Series and L-Series with LED

platform offers the most versatile and easy-to-use line of horns, strobes, and horn strobes in the industry with lower current draw and modern aesthetics. LED lighting technology offers significantly lower current draw compared to older Xenon bulbs across a full candela range. This improves design flexibility for notification appliance circuits (NACs) while also reducing power supply requirements allowing for simpler and lower cost installations.

Flexible design options meet virtually any application requirement: wall or ceiling mount, standard or compact sizes, red or white color choices, bezel kits for alternate markings and languages, and LED color lenses for distinctive visual signaling. In addition, installers can easily adapt devices using field selectable candela, tone and volume settings using rotary switches.

The L-Series and L-Series with LED line is developed to simplify installation. All devices feature plug-in designs with minimal intrusion into the back box, making installations fast and foolproof while virtually eliminating costly and time-consuming ground faults. The universal mounting plate includes an onboard shorting spring, so installers can test wiring continuity before the device is installed.

In addition, the System Sensor L-Series with LED notification appliances offer a new diagnostic test point feature that allows you to measure device voltage with a digital voltage meter (DVM) without removing the appliance from the wall or ceiling. The DVM test points are discreetly located on the face of the notification appliance which enable faster troubleshooting and end of line (EOL) voltage checks while greatly reducing the risk of misplacing or damaging appliances during troubleshooting.

L-Series and L-Series with LED Specifications

Physical/Electrical Specifications	
Standard Operating Temperature	32°F to 120°F (0°C to 49°C)
Humidity Range	10 to 93% non-condensing
Strobe Flash Rate	1 flash per second
Nominal Voltage, LED Strobes and Horn Strobes	Regulated 24 VDC
Nominal Voltage, Horns	Regulated 12 VDC or regulated 24 DC/FWR
Operating Voltage Range, LED Strobes and Horn Strobes	16 to 33 V (24 V nominal)
Operating Voltage Range, Horns	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
Input Terminal Wire Gauge	12 to 18 AWG


UL/ULC Current Draw Data, Horn Tones, and Sound Output Data

UL/ULC Maximum Strobe Current Draw (mA)			
	Candela Rating	16–33 Volts	
		Wall	Ceiling
Candela Range	15	18	18
	30	22	22
	75	70	70
	95	75	75
	110	85	—
	115	—	90
	135	105	—
	150	—	110
	177	—	115
	185	120	—


UL/ULC Maximum Horn Current Draw (mA RMS)				
Sound Pattern	dB	8–17.5 Volts	16–33 Volts	
		DC	DC	FWR
Temporal	High	39	44	54
Temporal	Low	28	32	54
Non-Temporal	High	43	47	54
Non-Temporal	Low	29	32	54
3.1 KHz Temporal	High	39	41	54
3.1 KHz Temporal	Low	29	32	54
3.1 KHz Non-Temporal	High	42	43	54
3.1 KHz Non-Temporal	Low	28	29	54
Coded	High	43	47	54
3.1 KHz Coded	High	42	43	54

UL/ULC Maximum Horn Strobe Current Draw (mA) and Sound Output (dBA)													
Switch Pos.	Sound Pattern	Volume Setting	Current Draw (mA RMS), Horn Strobe, Candela Range (15-185 cd)										Sound Output (dBA)
			16-33 Volts										16-33V
			15cd	30cd	75cd	95cd	110cd	115cd	135cd	150cd	177cd	185cd	DC
			WALL	CEILING	WALL	CEILING	WALL	CEILING	WALL	CEILING	CEILING	WALL	
1	Temporal 3	High	35	38	87	92	94	120	189	189	190	190	87
2	Temporal 3	Low	35	38	87	92	94	120	135	135	145	145	79
3	Non-Temporal	High	50	52	87	92	94	120	127	127	135	135	87
4	Non-Temporal	Low	35	38	87	92	94	120	125	125	130	130	79
5	3.1KHz Temporal 3	High	35	38	87	89	91	115	155	155	165	165	86
6	3.1KHz Temporal 3	Low	35	38	87	89	91	115	128	130	135	135	80
7	3.1KHz Non-Temporal	High	40	42	87	89	91	115	125	125	135	135	86
8	3.1KHz Non-Temporal	Low	35	38	87	89	91	115	120	120	130	130	80

L-Series with LED Dimensions: Wall-Mounted Equipment

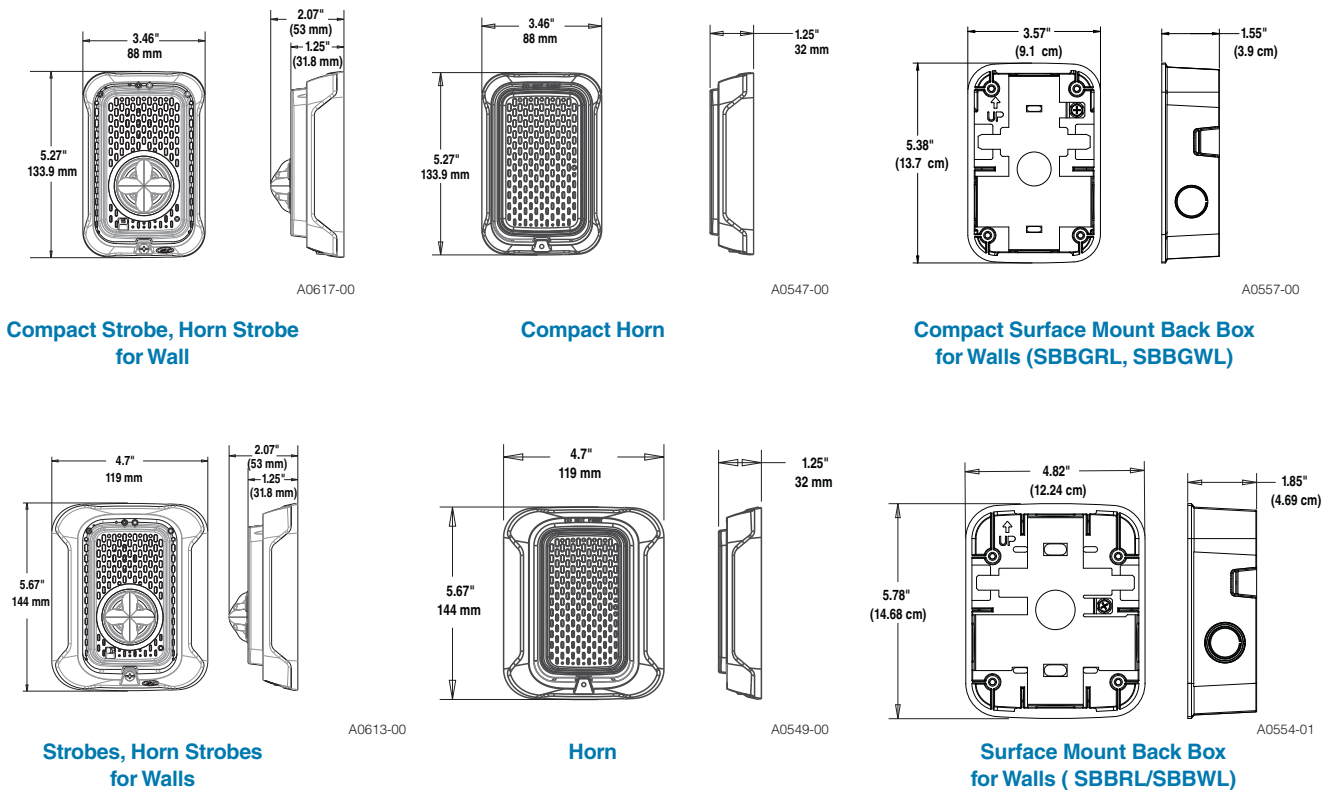

L-Series with LED Dimensions: Ceiling-Mounted Equipment

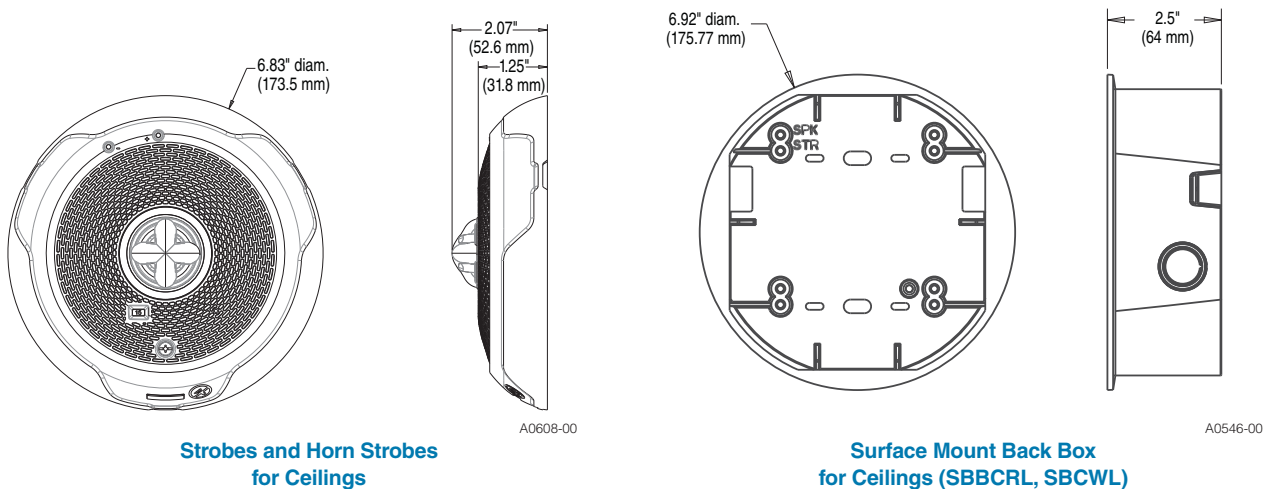

L-Series with LED: Ordering Information

Model	Description
L-Series with LED Horn Strobes	
P2RLED	2-Wire, Horn Strobe, Wall, Red
P2RLED-B	2-Wire, Horn Strobe, Wall, Red, Bilingual
P2WLED	2-Wire, Horn Strobe, Wall, White
P2WLED-B	2-Wire, Horn Strobe, Wall, White, Bilingual
P2GRLED	2-Wire, Compact Horn Strobe, Wall, Red
P2GRLED-B	2-Wire, Compact Horn Strobe, Wall, Red, Bilingual
P2GWLED	2-Wire, Compact Horn Strobe, Wall, White
P2GWLED-B	2-Wire, Compact Horn Strobe, Wall, White, Bilingual
P2RLED-P	2-Wire, Horn Strobe, Wall, Red, Plain
P2WLED-P	2-Wire, Horn Strobe, Wall, White, Plain
P2RLED-SP	2-Wire, Horn Strobe, Wall, Red, FUEGO
P2WLED-SP	2-Wire, Horn Strobe, Wall, White, FUEGO
PC2RLED	2-Wire, Horn Strobe, Ceiling, Red
PC2RLED-B	2-Wire, Horn Strobe, Ceiling, Red, Bilingual
PC2WLED	2-Wire, Horn Strobe, Ceiling, White
PC2WLED-B	2-Wire, Horn Strobe, Ceiling, White, Bilingual
L-Series with LED Strobes	
SRLED	Strobe, Wall, Red
SRLED-B	Strobe, Wall, Red, Bilingual
SWLED	Strobe, Wall, White
SWLED-B	Strobe, Wall, White, Bilingual
SGRLED	Strobe, Compact, Wall, Red
SGRLED-B	Strobe, Compact, Wall, Red, Bilingual
SGWLED	Strobe, Compact, Wall, White
SGWLED-B	Strobe, Compact, Wall, White, Bilingual
SRLED-P	Strobe, Wall, Red, Plain
SWLED-P	Strobe, Wall, White, Plain
SRLED-SP	Strobe, Wall, Red, FUEGO
SWLED-CLR-ALERT	Strobe, Wall, White, ALERT
SWLED-ALERT	Strobe, Wall, White, ALERT, Amber Lens
SCRLED	Strobe, Ceiling, Red
SCRLED-B	Strobe, Ceiling, Red, Bilingual
SCRLED-P	Strobe, Ceiling, White, Plain
SCWLED	Strobe, Ceiling, White
SCWLED-B	Strobe, Ceiling, White, Bilingual
SCWLED-P	Strobe, Ceiling, White, Plain
SCWLED-CLR-ALERT	Strobe, Ceiling, White, ALERT
L-Series Horns	
HRL*	Horn, Red
HRLA*	Horn, Red, Plain, ULC
HWL*	Horn, White
HWLA*	Horn, White, Plain, ULC
HGRL*	Compact Horn, Red
HGRLA*	Compact Horn, Red, Plain, ULC
HGWL*	Compact Horn, White
HGWLA*	Compact Horn, White, Plain, ULC

Model	Description
LED Lenses	
LENS-A3	Lens LED Amber Wall/Ceiling
LENS-B3	Lens LED Blue Wall/Ceiling
LENS-G3	Lens LED Green Wall/Ceiling
LENS-R3	Lens LED Red Wall/Ceiling
Accessories	
TR-2	Universal Wall Trim Ring Red
TR-2W	Universal Wall Trim Ring White
SBBRL	Wall Surface Mount Back Box, Red
SBBWL	Wall Surface Mount Back Box, White
SBBGRL	Compact Wall Surface Mount Back Box, Red
SBBGWL	Compact Wall Surface Mount Back Box, White
TRC-2	Universal Ceiling Trim Ring, Red
TRC-2W	Universal Ceiling Trim Ring, White
SBBCRL	Ceiling Surface Mount Back Box, Red
SBBCWL	Ceiling Surface Mount Back Box, White
Bezels†	
BZR	Wall Red Bezel Kit
BZW	Wall White Bezel Kit
BZGR	Compact Wall Red Bezel Kit
BZGW	Compact Wall White Bezel Kit
BZRC	Horn Strobe Ceiling Red Bezel Kit
BZWC	Horn Strobe Ceiling White Bezel Kit

Notes for L-Series With LED Horn Strobes and Strobes:

All -P models have a plain housing (no "FIRE" marking on cover).
 All -SP models have "FUEGO" marking on cover.
 All -ALERT models have "ALERT" marking on cover.
 All -B models have "FIRE/FEU" marking on cover for use in Canadian applications.
 Amber lenses are not for use in Canadian applications

Notes for L-Series Horns:

*Horn-only models are listed for wall or ceiling use.

Notes for Bezels:

†Each bezel pack ships in a package of 5.
 Add one of the following extensions for print/language options: -F (FIRE), -AL (ALERT), -EV (EVAC), -AG (AGENT), -P (Plain), -FR (FEU), -PG (FOGO), -SP (FUEGO), -SPE (FUEGO/FIRE).

3825 Ohio Avenue • St. Charles, IL 60174 USA
 Phone: 800-SENSOR2 • Fax: 630-377-6495
www.systemsensor.com

3333 Unity Drive, Mississauga, ON L5L 3S6 Canada
 Phone: 800-SENSOR2 • Fax: 905-812-0771
www.systemsensor.ca

System Sensor® is a registered trademark
 of Honeywell International, Inc.



©2023 System Sensor.
 Product specifications subject to change without notice. Visit www.systemsensor.com
 for current product information, including the latest version of this data sheet.
 AVDS916-01 • 10/03/2023