




E1 ELEVATION
NOTE: ELEVATIONS 2:1




E2 ELEVATION

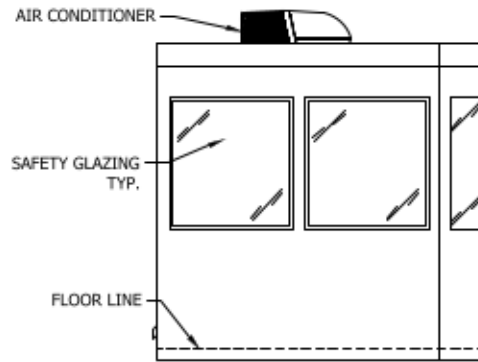

E3 ELEVATION

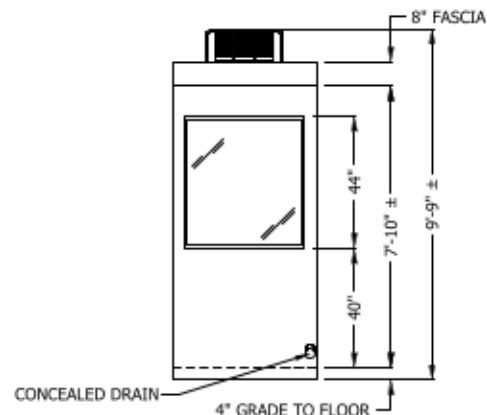


E4 ELEVATION

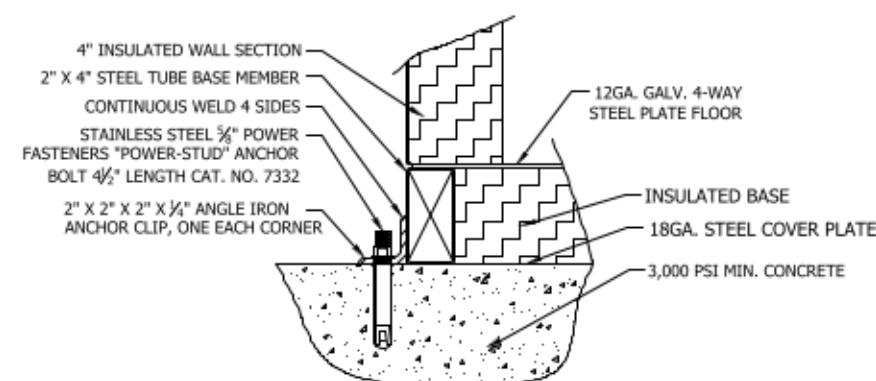

FIELD DRILLED ANCHOR BOLT DETAIL
NO SCALE

THIS DRAWING IS FOR REFERENCE PURPOSES ONLY. PAR-KUT BOOTHS MUST BE SECURELY ANCHORED IN PLACE AND ELECTRICAL SYSTEM MUST BE PROPERLY GROUNDED. ADEQUATE SIZED ANCHOR BOLTS SHALL BE USED. THE SIZE AND DEPTH OF THE ANCHORS SHOULD BE OF SUFFICIENT DESIGN TO WITHSTAND THE HIGHEST RECORDED WIND SPEEDS/SEISMIC DESIGN CATEGORY IN THE AREA OF INSTALLATION. CONSULT A PROFESSIONAL ENGINEER FAMILIAR WITH THE WEATHER CONDITIONS IN THE AREA.

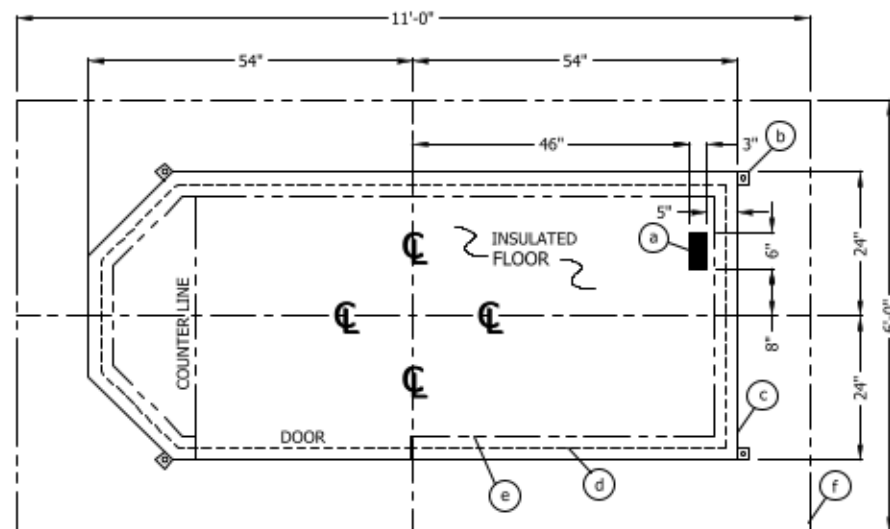

E1 PLAN VIEW

| SERVICE ENTRANCE/ANCHOR BOLT LAYOUT | | |
|-------------------------------------|---|------|
| ITEM | DESCRIPTION | QTY. |
| a | 3" X 6" SLOT IN FLOOR WITH 5" X 8" REMOVABLE SCREW-DOWN ALUMINUM TREADPLATE LID, (2) SCREWS REQ'D. ONE AT EACH END, FOR ELECTRICAL SERVICE ENTRANCE TO C.B. PANEL | 1 |
| b | 2" X 2" X 1/4" (MIN) STEEL ANCHOR CLIP WITH A 3/4" ANCHOR BOLT HOLE. ONE EACH CORNER. ANCHOR BUILDING AFTER FINAL LOCATION. ANCHOR BOLTS NOT INCLUDED. | 4 |
| c | OUTER EDGE OF BUILDING | 1 |
| d | BASE PERIMETER FRAME | 1 |
| e | INTERIOR WALL FACE | 1 |
| f | SUGGESTED MINIMUM FOUNDATION | 1 |

GENERAL CONSTRUCTION NOTES

PAR-KUT BOOTHS ARE OF SINGLE UNIT WELDED STEEL CONSTRUCTION, FACTORY ASSEMBLED AND DELIVERED SET UP. FAILURE TO SECURELY ANCHOR BOOTH MAY RESULT IN OVERTURNING OF UNIT AND SERIOUS INJURY TO OCCUPANT.

GLAZING - TINTED INSULATED TEMPERED SAFETY GLAZING SET IN PAINTED GALVANIZED STEEL EXTERIOR WINDOW FRAMES WITH INTERIOR ALUMINUM GLAZING STOPS.

PAINT - FINISH SHALL BE SINGLE COLOR OF CHOICE UNLESS OTHERWISE SPECIFIED, AXALTA IMRON POLYURETHANE INDUSTRIAL COATING. SHALL BE APPLIED TO ALL EXPOSED METAL SURFACES. THIS EXCLUDES ROOF SURFACE, ALUMINUM WINDOW FRAMES AND ANY STAINLESS STEEL COMPONENTS (IF USED).

ELECTRICAL - ALL WIRING BY PAR-KUT TO BE #12(MIN) STRANDED COPPER, THHN ENCLOSED IN 1/2"(MIN) E.M.T. AND FLEXIBLE METAL CONDUIT WHERE APPLICABLE PER NATIONAL ELECTRIC CODE. ALL ELECTRICAL EQUIPMENT WILL BE LISTED BY U.L. OR EQUIVALENT RECOGNIZED NATIONAL TESTING LABORATORY. ALL WIRING TO TERMINATE AT C.B. PANEL. ALL CIRCUITS HAVE GREEN GROUND WIRE.

BOOTH WILL HAVE **NO** CANOPY OVERHANG.

LIFTING RING(S) ARE PROVIDED ON ROOF.

LIFTING RING(S) ARE DESIGNED FOR A STRAIGHT VERTICAL LIFT ONLY. SPREADER BARS MUST BE USED WHERE APPLICABLE TO ENSURE STRAIGHT VERTICAL LIFT. ALL WARRANTIES WILL BE **VOID** IF NOT LIFTED IN THIS MANNER.

NO ON SITE WORK BY PAR-KUT.


ACTUAL LOCATION OF ELECTRICAL DEVICES MAY VARY DUE TO INSTALLATION CONSTRAINTS, SHIPPING RESTRICTIONS, OR FOR PROPER PLACEMENT TO SATISFY APPLICABLE CODES.

LINE ITEMS

| ITEM # | DESCRIPTION | QTY |
|--------|--|-----|
| 1 | COUNTER - 18" DEEP PAINTED GALVANIZED STEEL MOUNTED 40" A.F.F. | 1 |
| 2 | PAINTED STORAGE DRAWER. | 1 |
| 3 | DOOR - 36" SLIDING STEEL WITH WEATHER-STRIPPING, BALL BEARING HANGERS, HEAVY DUTY TRACK, SAFETY GLAZING, HOOK BOLT LOCK, AND HARDWARE. | 1 |
| 4 | 2" DIAMETER HOLE IN COUNTER FOR DROP CORDS. | 1 |
| 5 | DUPLEX OUTLET MOUNTED BELOW COUNTER. | 1 |
| 6 | INTERIOR LIGHT WITH WALL SWITCH - CSE 6 (#1320-140) 13 WATT LED FIXTURE. | 1 |
| 7 | WALL SWITCH FOR INTERIOR LIGHT. | 1 |
| 8 | HEATER - LFK 484 - 240V/4,800 WATT WALL MOUNTED WITH INTEGRAL THERMOSTAT CONTROL. | 1 |
| 9 | AIR CONDITIONER WITH WALL MOUNTED THERMOSTAT CONTROL - 120V/13,500 BTU ROOF MOUNTED WITH BLACK SHROUD . | 1 |
| 10 | THERMOSTAT FOR AIR CONDITIONER. | 1 |
| 11 | CIRCUIT BREAKER PANEL - 120/240V RATED (CAN BE FED WITH 120/208V), 12 SPACE, 10-3 WIRE WITH GROUND BAR, 100 AMP MAIN BREAKER AND BRANCH BREAKERS FOR FACTORY INSTALLED DEVICES PROVIDED. | 1 |

GENERAL SITE INSTALLED ITEMS PROVIDED BY OTHERS

| | |
|---|--|
| 1 | PROVIDE 120V/240V, SINGLE PHASE, 3-WIRE SERVICE WITH GROUND. (CAN BE WIRED AS SINGLE PHASE 120/208V) |
| 2 | CONCRETE FOUNDATION MINIMUM 6" DEEP, 3,000 PSI MINIMUM (28 DAY ACI 318). THE FOUNDATION SHOULD BE A MINIMUM OF 24" WIDER THAN THE BUILDING FOOT PRINT DIMENSIONS. THIS IS TO PROVIDE A 12" CONCRETE BORDER ON EACH SIDE OF THE BUILDING. |
| 3 | ADEQUATE SIZE DRILLED ANCHOR BOLTS. SUGGESTED SIZE: 5/8" X 4 1/2" POWER FASTENERS "POWER STUD" CATALOG #7332. |

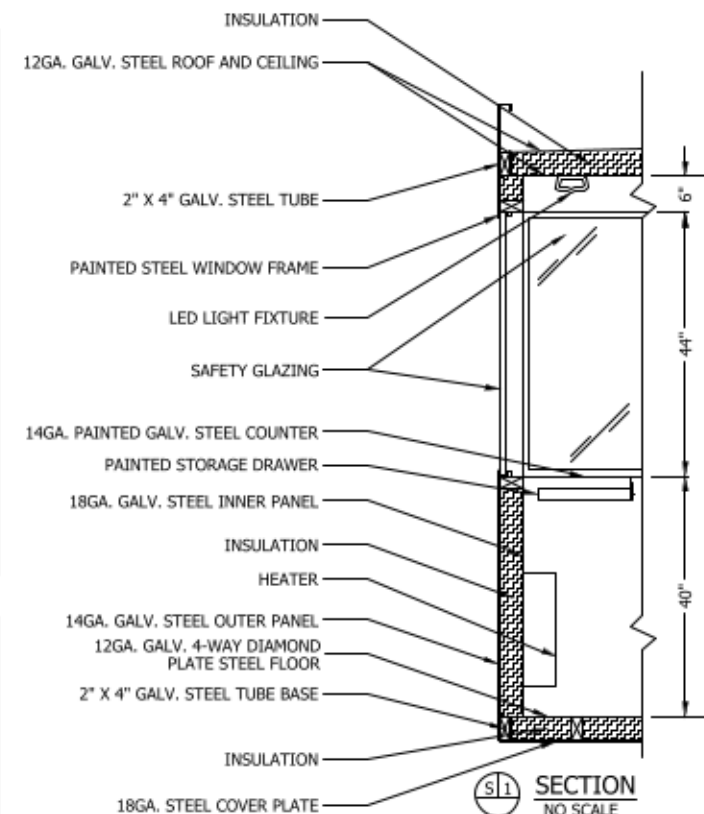

SECTION
NO SCALE

NOTE: THIS PRINT AND DESIGN ARE THE PROPERTY OF PAR-KUT INTERNATIONAL, INC. IT MUST NOT BE REPRODUCED IN ANY MANNER, NOR SHALL IT BE SUBMITTED TO OUTSIDE PARTIES FOR EXAMINATION WITHOUT OUR CONSENT. IT SHALL BE USED ONLY AS A MEANS OF REFERENCE TO WORK DESIGNED AND FURNISHED BY PAR-KUT. PAR-KUT RESERVES THE RIGHT TO MAKE CHANGES TO DESIGN FOR ENGINEERING PURPOSES WITHOUT NOTICE. REVISIONS MAY NOT BE NOTED.

PAR-KUT INTERNATIONAL, INC.
40961 Production Drive
Harrison Twp., Mich.
48045-1351
PH. (586) 468-2947
www.parkut.com



GENERAL NOTES & COLORS

HIGH GLOSS PAINT COLOR: #1640 BLACK
GLAZING TINT COLOR: GRAY

SHIPPING NOTES

OVERALL SHIPPING DIMENSIONS: 4'W X 9'L X 9'-9"H
ESTIMATED WEIGHT: 3,500 LBS. ±

SOME ITEMS MAY BE SHIPPED LOOSE TO MEET SHIPPING CONSTRAINTS.
DRAIN DOWNSPOUTS ARE SHIPPED LOOSE AND INSTALLED ON SITE BY OTHERS.

DWG# 23-225-44 SHEET A-1

CLUB CAR WASH
COLUMBIA, MO

FO#
SCALE 3/8"=12"
DATE 11-21-2023
CHK'D BY:
DRAWN BY EIL
SIZE 4' X 9'
QTY 20
SALES REPRESENTATIVE
GARY HURST