

**Corrosion Resistant Equipment CO., Inc.**  
 24445 S. Klemme Road ■ Crete, IL ■ 60417  
 Phone (708) 367-1111 ■ Fax (708) 367-1160  
 www.crecoinc.com

(all dimensions in inches)

PART # TANKS: 8020--MT


BASE FITTINGS TO BE LEFT INSTALLED AT TIME OF SHIPMENT PER SII PROCEDURE

200 GALLON VERTICAL TANK

REF#: 0000

03/03/03

Copyright. All information furnished within this document, electronic file or design correspondence is the property of Den Hartog industries, Inc. and shall not be used, disclosed to others or copied without the expressed

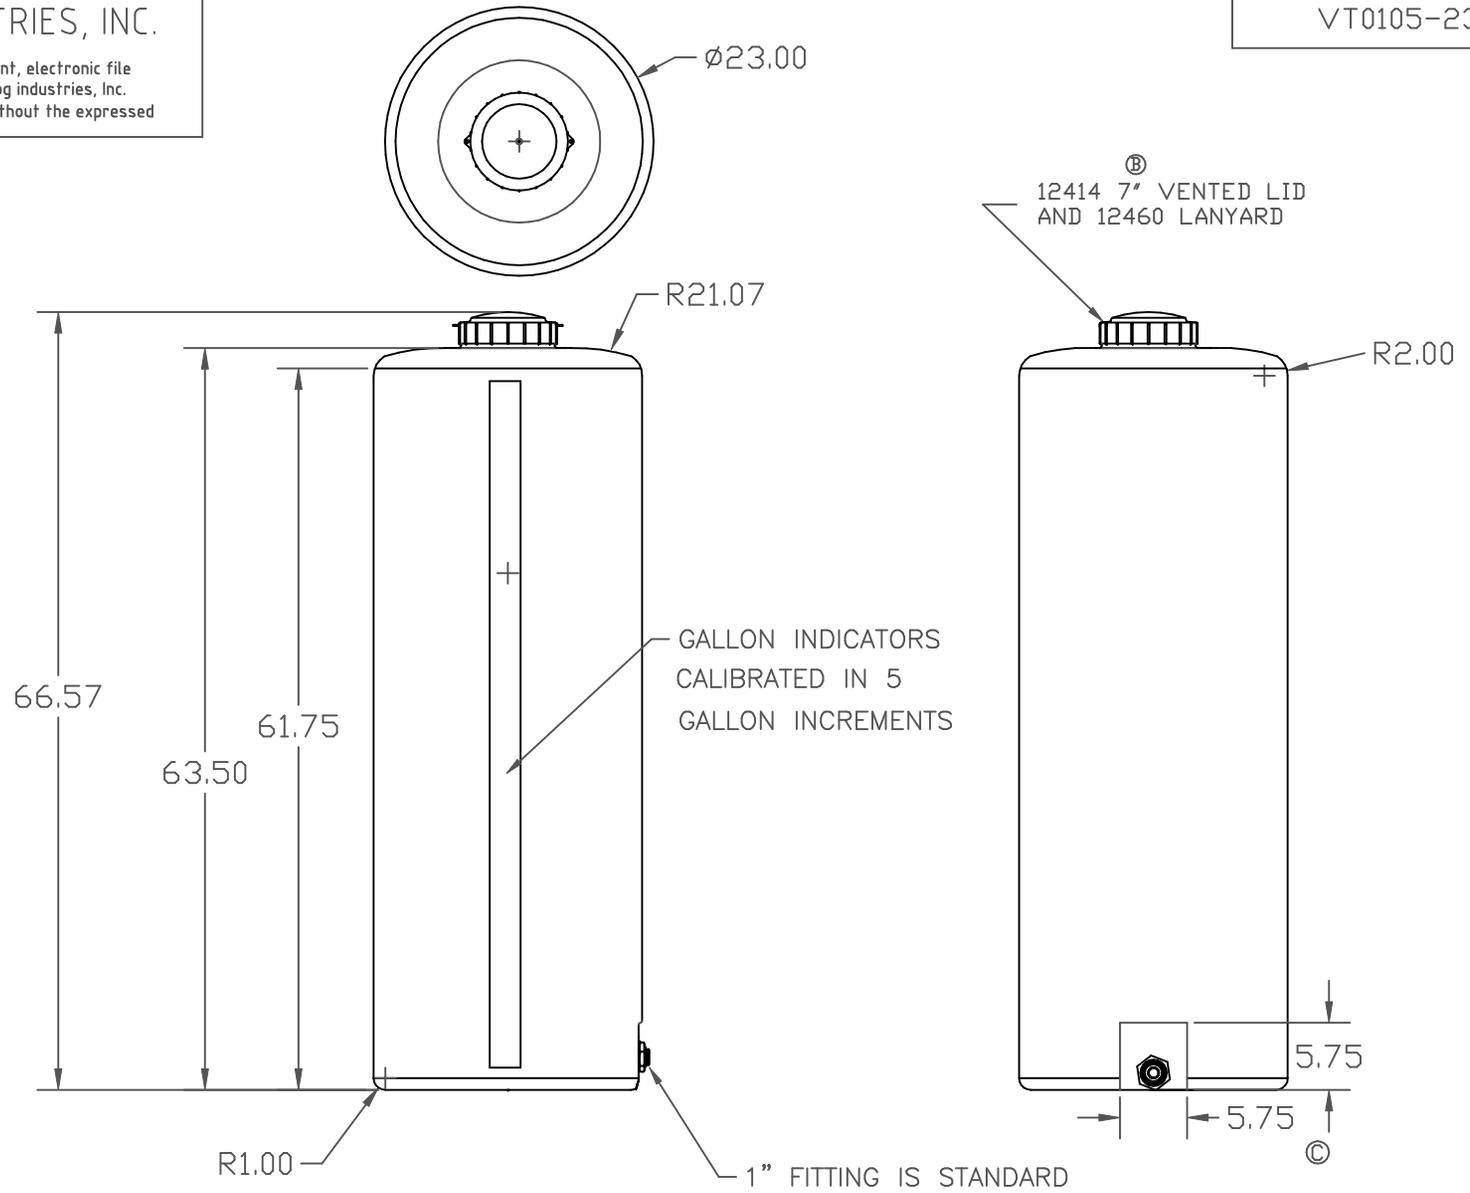

C	FLAT DIMENSIONS ADDED CCN 1701	8/8/08	ADH	DRAWN / DATE	MATERIAL
B	CHANGE TO 7" LID CCN1376	6/29/07	GWC	REH 4/10/02	
A	ADD SIDE WALL HEIGHT	9/6/06		APPRD. / DATE	MOBIL 134 HDPE OR EQUIVALENT REFERENCE MATERIAL DATA SHEET FOR SPECIFIC PROPERTIES.
REV	DESCRIPTION	DATE	APPRD	GWC 6/29/07	
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED ± 1% @ 68° F				THIRD ANGLE PROJECTION ANSI 14.5M 	NOTES: 1. YELLOW, WHITE, OR YELLOW COLOR 2. SHOT WEIGHT 38 LBS. 2. NOM. WALL .195




## ACE ROTO-MOLD

A DIVISION OF DEN HARTOG INDUSTRIES, INC.  
 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0421

CLIENT / DESCRIPTION	
105 GALLON VERTICAL TANK	
SCALE	PART NO.
N.S.	VT0105-23

# Windshield Wiper Fluid routing from tank to Dispenser

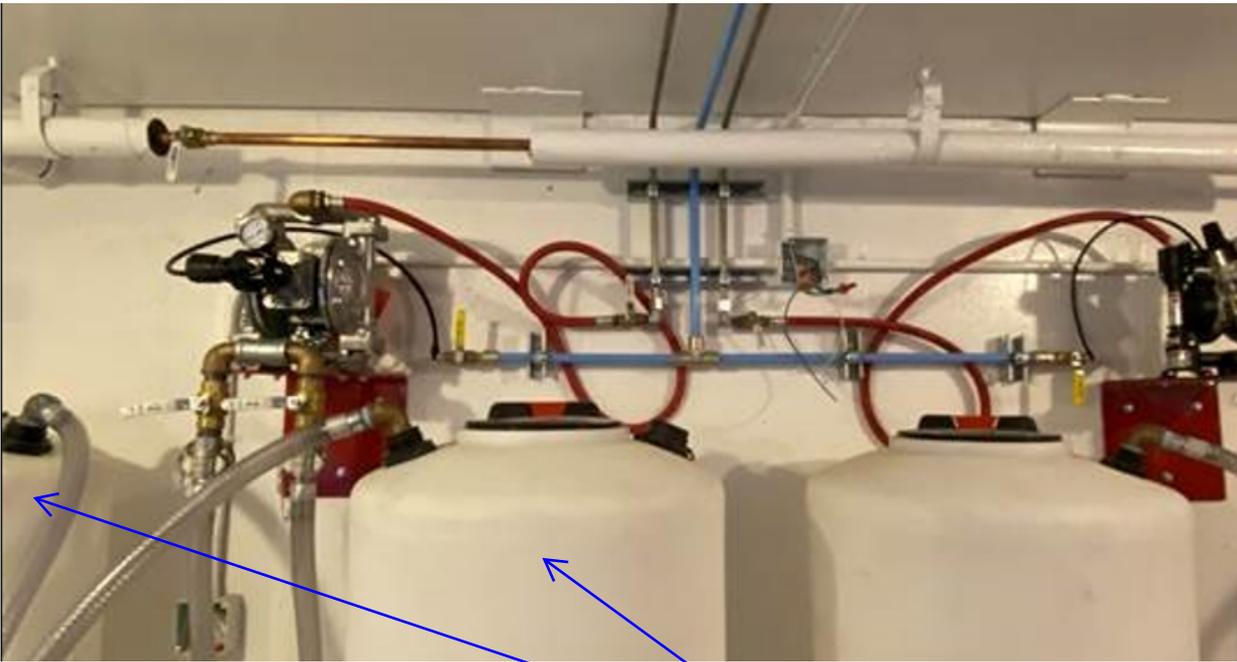

Two Poly tanks "T" together and enter pump




Red rubber hose from pump to stainless steel hard line. Hardline runs beneath floor to dispensing console.

Pump



Windshield wiper fluid dispenser. Blue hose hangs down in pit via gravity and connects to stainless steel hard line beneath floor.

Copyright. All information furnished within this document, electronic file or design correspondence is the property of Den Hartog industries, Inc. and shall not be used, disclosed to others or copied without the expressed

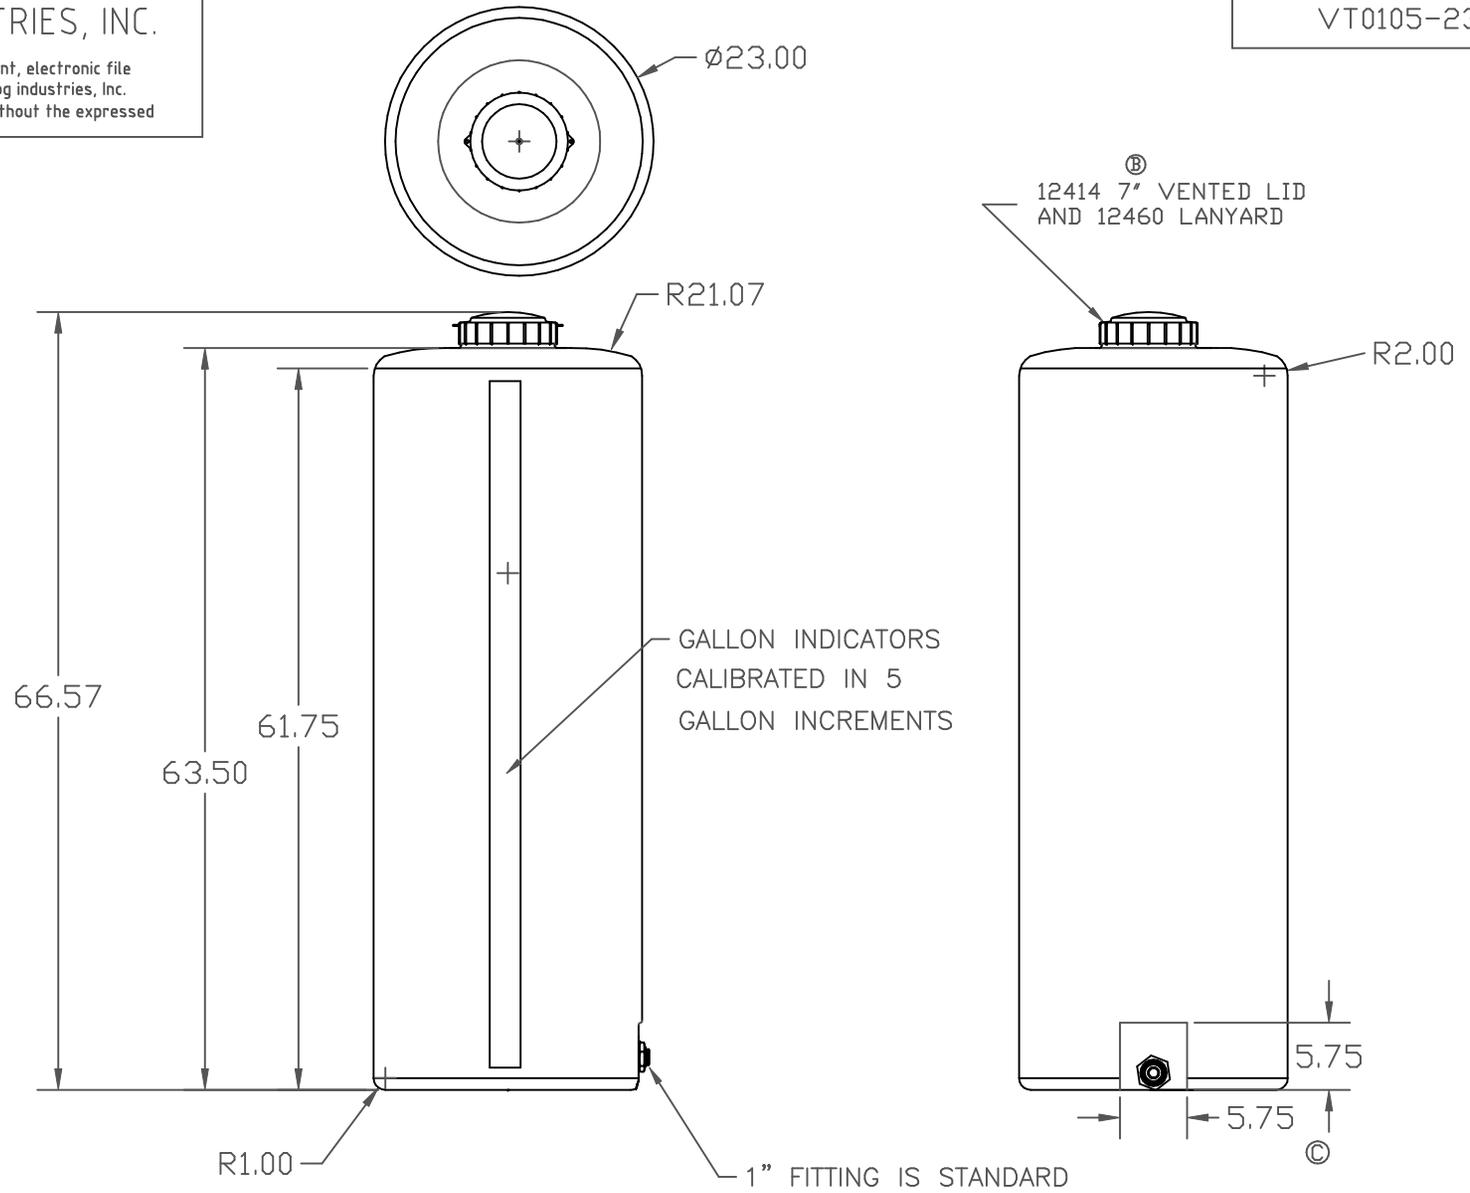

C	FLAT DIMENSIONS ADDED CCN 1701	8/8/08	ADH	DRAWN / DATE	MATERIAL
B	CHANGE TO 7" LID CCN1376	6/29/07	GWC	REH 4/10/02	
A	ADD SIDE WALL HEIGHT	9/6/06		APPRD. / DATE	MOBIL 134 HDPE OR EQUIVALENT REFERENCE MATERIAL DATA SHEET FOR SPECIFIC PROPERTIES.
REV	DESCRIPTION	DATE	APPRD	GWC 6/29/07	
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED ± 1% @ 68° F				THIRD ANGLE PROJECTION ANSI 14.5M 	NOTES: 1. YELLOW, WHITE, OR YELLOW COLOR 2. SHOT WEIGHT 38 LBS. 2. NOM. WALL .195

**ACE ROTO-MOLD**  
 A DIVISION OF DEN HARTOG INDUSTRIES, INC.  
 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0421

CLIENT / DESCRIPTION	
105 GALLON VERTICAL TANK	
SCALE	PART NO.
N.S.	VT0105-23

## OIL PUMPS

Alemite Oil Pumps are ideal for applications where fluids are piped to multiple outlets. Combined with Alemite Hose Reels, Dispensing Valves and Meters, Alemite Oil Pumps deliver motor oils, gear oils, cutting oils, hydraulic oils, machine coolants, automatic transmission fluids and a wide range of petroleum based fluids from tanks, drums, totes and pails. Alemite Oil Pumps can be used for bulk transfer or direct delivery from the original container.

### Pneumatic RAM - Stationary

Alemite Stationary RAM Pumps deliver fast, quiet and efficient operation, and are rugged enough to handle challenging oil applications. RAM pumps are durable, and can operate at rates up to 20 gallons per minute.



**9968**


**FEATURES:**

- Handles fluids up to SAE 140
- Meets OSHA noise requirements (85dB)
- 3" diameter air motor
- Will mount to 1 1/2" suction pipe from remote tank (1" for model 9970)
- Recommended for piped installations of short to moderate length
- Easy serviceability
- 1/4" air inlet




Product #	Drum Size	Material Inlet	Material Outlet	Pump Ratio	Delivery	Bung Adapter	Weight
9916-A1	Stub	1 1/2" NPTF(f)	1/2" NPTF(f)	1:1	16 gpm	Integral	17 Lb.
9918-A	Stub	1 1/2" NPTF(f)	1/2" NPTF(f)	3:1	9 gpm	Integral	17 Lb.
9920	N/A	1" NPTF(f)	1" NPTF(f)	1:1	20 gpm	No	18 Lb.
9960	16 gallon	1 1/2" NPTF(f)	1/2" NPTF(f)	5:1	7 gpm	326750-B1	18 Lb.
9960-A <sup>(1)</sup> <sup>(2)</sup>	16 gallon	1 1/2" NPTF(f)	1/2" NPTF(f)	5:1	7 gpm	No	17 Lb.
9968	Stub	1 1/2" NPTF(f)	1/2" NPTF(f)	5:1	7 gpm	326750-B1	14 Lb.
9968-A	Stub	1 1/2" NPTF(f)	1/2" NPTF(f)	5:1	7 gpm	No	17 Lb.
9969-B <sup>(2)</sup>	55 gallon	1 1/2" NPTF(f)	1/2" NPTF(f)	5:1	7 gpm	326750-B1	18 Lb.
9970	Stub	1" NPTF(f)	3/8" NPTF(f)	10:1	3.5 gpm	326750-E1	11 Lb.

<sup>(1)</sup> Includes drum cover

<sup>(2)</sup> Includes downtube

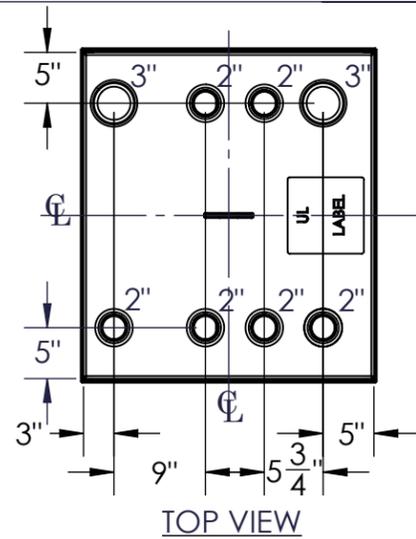

NOZZLE SCHEDULE							
ITEM	SIZE	RATING	TYPE	MATL.	PROJ. IN	PROJ. OUT	REMARKS
A	3"	N.P.T.	W.F.	C.S.	STD.	STD.	EMERGENCY VENT OPENING
B	2"	N.P.T.	W.F.	C.S.	STD.	STD.	-

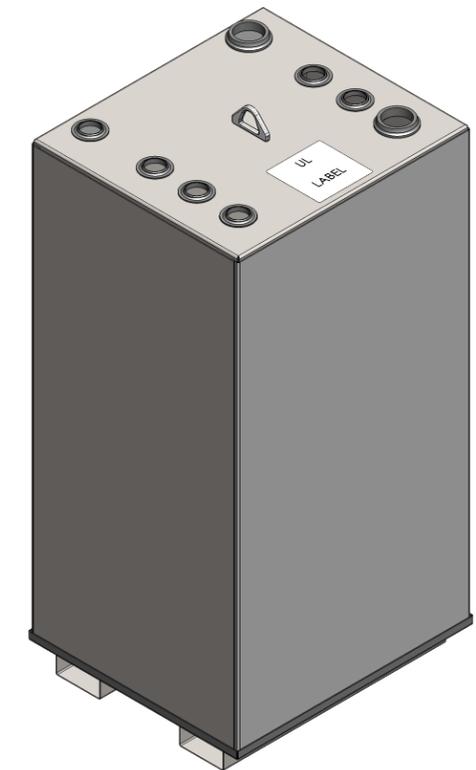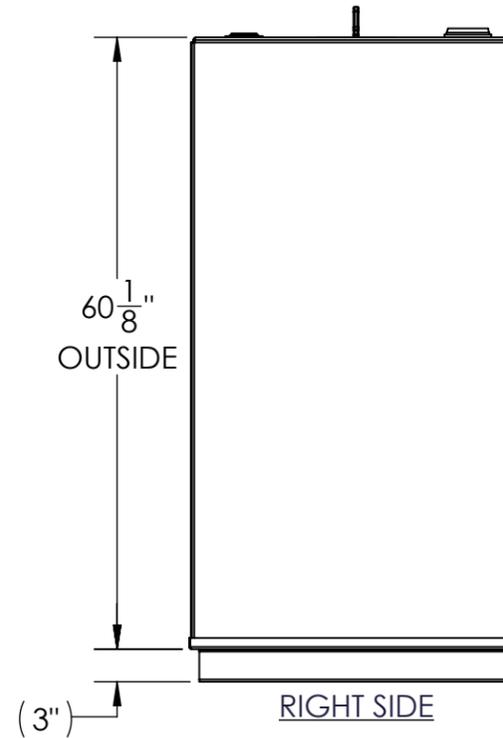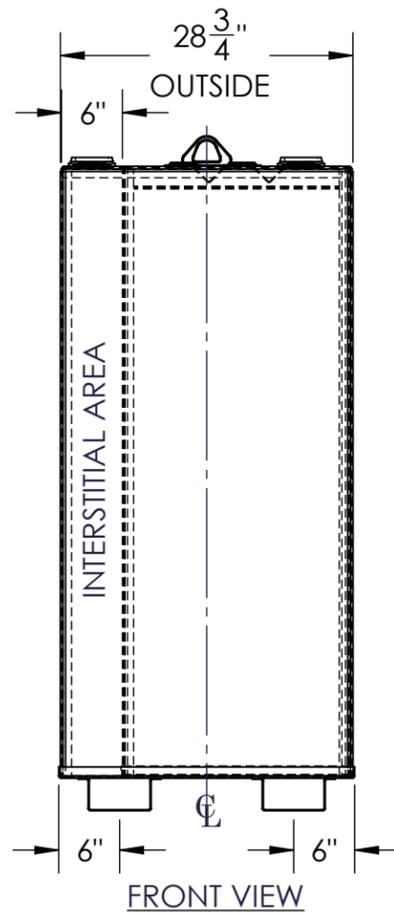

- NOTES:
- A. INTERNAL MATERIAL: 304 STAINLESS STEEL
  - B. EXTERNAL MATERIAL: H.R. CARBON
  - C. DESIGN & OPERATING PRESSURE: ATMOSPHERIC.
  - D. DESIGN & OPERATING TEMPERATURE: AMBIENT.
  - E. TANK TO BE BUILT & LABELED PER U.L. SPEC. #142.
  - F. TANK TO BEAR MANUFACTURERS & U.L. LABELS ONLY.
  - G. TANK TO BE AIR TESTED WITH WATER & SOAP SUDS SOLUTION.
  - H. INTERIOR: REMOVE WELD SLAG (SHIP CLEAN & DRY).
  - I. EXTERIOR: GRAY PRIMER INCLUDED; SEE SALES ORDER FOR TOP COAT.
  - J. ALL FITTINGS TO BE PROTECTED FOR SHIPMENT.
  - K. CUSTOMER HAS THE RESPONSIBILITY TO VERIFY ALL DIMENSIONS.

APPROVAL FOR CONSTRUCTION  
SCHEDULE A - MASTER TERMS &  
CONDITION OF SALE\*

APPROVED AS DRAWN.

APPROVED WITH NOTED CHANGES,  
CONSTRUCTION WILL BE SCHEDULED  
WHEN SIGNED DRAWING AND  
CONFIRMED ORDER ARE RECEIVED.

SIGNATURE: \_\_\_\_\_

DATE: \_\_\_\_\_

\*All pages of this Schedule A are incorporated by  
reference and are a part of the additional terms of  
the Master Terms & Conditions of Sale.  
www.newberrytanks.com/masterterms.pdf

SALES ORDER: -			WEIGHT (LBS): 551
			All units inches unless stated otherwise
Phone: 870-735-4473			
DESCRIPTION: 180 GALLON RECTANGULAR UL 142 DOUBLE WALL TANK STAINLESS STEEL INNER			
CUSTOMER:			P.O.#
DATE: 1/10/2025	SCALE:	DWG.# FTDBSW-180DI	DRAWN BY: AJC CHKD BY: -