


1 - FRONT ELEVATION - FARMHOUSE 2
1/4" = 1'-0"

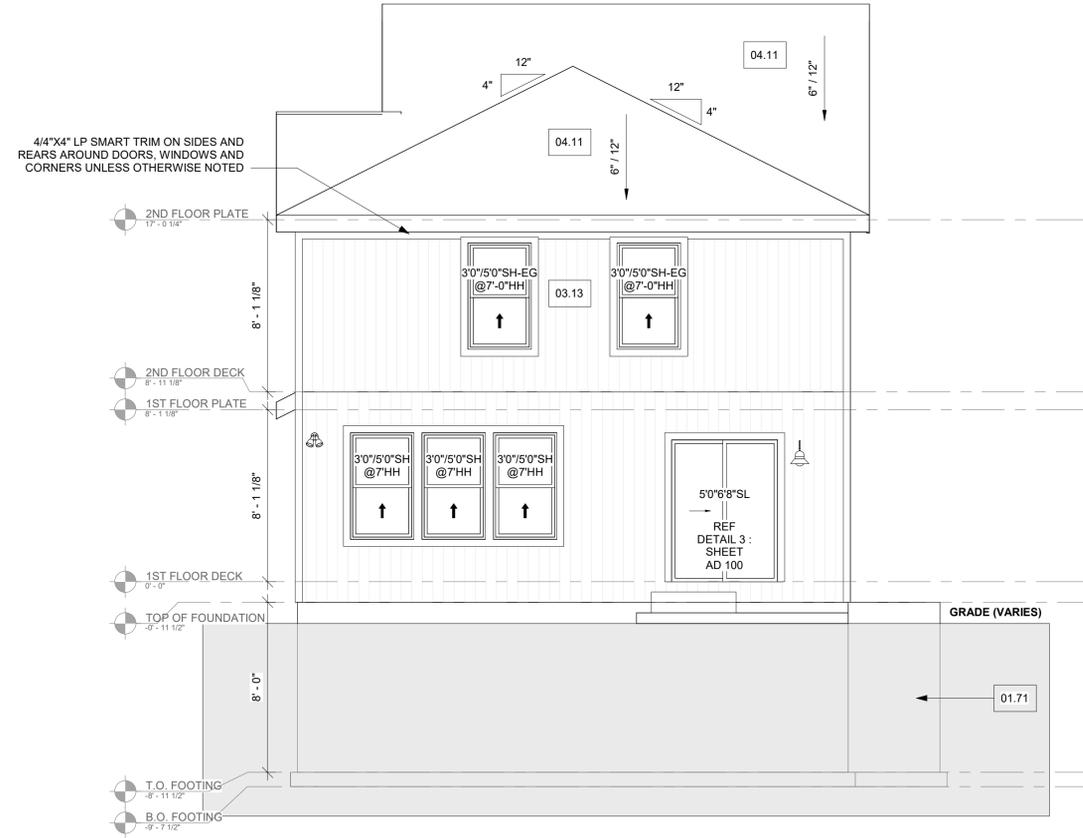

3 - REAR ELEVATION - FARMHOUSE FULL
1/4" = 1'-0"


REFERENCE NOTES

- 01.12 - TOP OF FOOTING DEPTH DETERMINED PER SITE.
- 01.41 - 6X6 CEDAR POST
- 01.71 - CONCRETE WINDOW WELL FOR EGRESS WITH LADDER. PROVIDE SLEEVE THROUGH WALL FOR FOUNDATION DRAIN. TOP OF WINDOW WELL TO BE 3" BELOW TOP OF FOUNDATION WALL.
- 02.61 - 5/4"x8" LP SMART TRIM UNLESS NOTED OTHERWISE.
- 02.62 - DOUBLED 1"x8" LP SMART TRIM UNLESS NOTED OTHERWISE.
- 03.11 - LP SMART LAP SIDING. BOTTOM OF SIDING SHALL BE A MINIMUM OF 6" ABOVE GRADE.
- 03.13 - LP SMART PANEL SIDING. BOTTOM OF SIDING SHALL BE A MINIMUM OF 6" ABOVE GRADE.
- 03.15 - LP SMART BOARD AND BATTEN
- 03.17 - MANUFACTURED STONE VENEER
- 03.18 - CAST STONE CAP
- 03.38 - 6X6 CEDAR POST. 1X6 TRIM AT BASE. 1X4 TRIM AT TOP.
- 03.62 - CEDAR SHUTTERS. ALL SHUTTERS TO BE 18" WIDE USING (3) 2X6 BOARDS. LP MART TRIM TO BE INSTALLED AROUND WINDOW PRIOR TO SHUTTER INSTALLATION.
- 03.57 - 26"x6"x11" CEDAR BRACKET
- 03.66 - DECORATIVE FALSE LOUVERED VENT.
- 04.11 - MINIMUM ROOFING COMPOSITION. 30 YR COMPOSITE SHINGLES ON 15# FELT ON 7/16" OSB SHEATHING OR AS REQUIRED BY CODE.

8'-0" FOUNDATION WALL EXCEPT AT STEP DOWNS TO BE LOCATED IN THE FIELD

UNBALANCED FILL NOT TO EXCEED 4'-0" AT UNRESTRAINED WALLS

ALL FOOTING TO BE BELOW FROST LINE (3'-0") AS REQUIRED PER SITE

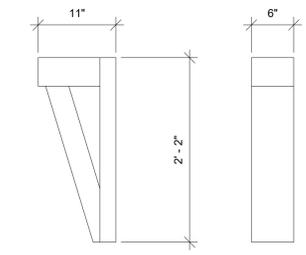

CEDAR BRACKET DETAIL NTS

WALL LEGEND

| | |
|-----------|--------------------------------|
| [Pattern] | DEMO WALL |
| [Pattern] | FOUNDATION WALL - EXISTING |
| [Pattern] | FOUNDATION WALL - NEW |
| [Pattern] | EXISTING WALL TYPE |
| [Pattern] | EXISTING LOAD BEARING WALL |
| [Pattern] | NEW 4" WALL TYPE |
| [Pattern] | NEW 6" WALL TYPE |
| [Pattern] | NEW 4" LOAD BEARING WALL |
| [Pattern] | NEW 6" LOAD BEARING WALL |
| [Pattern] | NEW WALL INFILL OF EX. OPENING |

BUILDING SQUARE FOOTAGE (SQFT)

| TYPE | NAME | SQ FT |
|------------|-------------------------|-------------|
| FINISHED | MAIN LEVEL | 764 |
| | UPPER LEVEL | 1097 |
| | TOTAL FINISHED | 1861 |
| UNFINISHED | FRONT PORCH | 33 |
| | GARAGE | 419 |
| | LOWER LEVEL | 681 |
| | PATIO | 120 |
| | TOTAL UNFINISHED | 1253 |

TABLE OF CONTENTS

| SHEET NUMBER | SHEET NAME |
|--------------|-------------------------------|
| G000 | COVER - FARMHOUSE |
| G001 | ELEVATIONS - FARMHOUSE 2 |
| G101 | LOWER LEVEL / FOUNDATION PLAN |
| G102 | MAIN LEVEL PLAN |
| G103 | UPPER LEVEL PLAN |
| G104 | ROOF PLAN |
| S100 | STRUCTURAL GENERAL NOTES |
| S501 | FOUNDATION DETAILS |
| S503 | GARAGE/SLAB DETAILS |
| S510 | FRAMING STANDARDS |
| S520 | DECK DETAILS |
| S530 | BRACING DETAILS |
| S550 | FASTENING SCHEDULE |
| S560 | EGRESS WINDOW |

CPG DBA

summit HOMES
A CLAYTON COMPANY

10450 HOLMES RD. STE. 100
KANSAS CITY, MO 64131
816-246-6700

EVERSTEAD ENGINEERING & DESIGN

3741 NE TROON DR.
LEE'S SUMMIT MO 64064
816-399-4901

EVERSTEAD IS RESPONSIBLE FOR STRUCTURAL SPECIFICATIONS ONLY. ARCHITECTURAL PLANS WERE PROVIDED BY OTHERS.

COPYRIGHT 2020

THIS DRAWING HAS BEEN PREPARED BY SUMMIT HOMES, OR UNDER THEIR DIRECT SUPERVISION AS AN INSTRUMENT OF SERVICE AND IS INTENDED FOR USE ONLY ON THIS PROJECT. ALL DRAWINGS, SPECIFICATIONS, AND DESIGNS, INCLUDING THE OVERALL LAYOUT, FORM, AND COMPOSITION OF SPACES ARE PROTECTED BY COPYRIGHT REGISTERED TO CPG, INC. ANY REPRODUCTION, USE, OR DISCLOSURE OF THE INFORMATION CONTAINED HEREIN WITHOUT THE WRITTEN CONSENT FROM CPG, INC. OR A SUMMIT HOMES EMPLOYEE IS STRICTLY PROHIBITED.

ADDRESS:
1340 SE Windbreak Dr
Lee's Summit, MO 64082

BAILEY FARMS #1250
HONEYDEW FARMHOUSE 2

PROFESSIONAL SEAL:

VERSION:
6.0

COVER - FARMHOUSE

G000

DATE 3/12/2026 9:55:17 AM
SCALE As indicated

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 03/17/2026 4:26:14

EVERSTEAD HAS PRODUCED THIS PLAN SET FOR THE CLIENT LISTED IN ACCORDANCE WITH THE 2018 INTERNATIONAL RESIDENTIAL CODE FOR THE PROJECT AT THE ADDRESS LISTED ON THE PLANS. USE OF ANY PART OF THIS PLAN SET TO DEMOLISH, CONSTRUCT OR BUILD IN ANY MANNER ON PROPERTY OTHER THAN THE LISTED ADDRESS IS PROHIBITED WITHOUT WRITTEN CONSENT FROM EVERSTEAD.

ALL THIRD PARTY INSPECTIONS MUST BE PERFORMED BY EVERSTEAD. THIRD PARTY INSPECTIONS INCLUDE BUT ARE NOT LIMITED TO INSPECTIONS OF THE BEARING SOIL, FOOTINGS, PIERS, FOUNDATIONS, STRUCTURAL / SUSPENDED SLABS, RETAINING WALLS BACKFILL AND REINFORCEMENT, LUMBER FRAMED CONSTRUCTIBILITY ISSUES, AND STRUCTURAL ITEMS IDENTIFIED BY THE LOCAL CODE INSPECTOR.

EVERSTEAD MUST BE NOTIFIED OF ANY AND ALL POTENTIAL DISPUTES, CLAIMS, ARBITRATION AND/OR LITIGATION THAT THE OWNER MAY PURSUE AGAINST THE CONTRACTOR AND/OR BUILDER. FAILURE TO NOTIFY EVERSTEAD AND ALLOW EVERSTEAD TO PROVIDE THEIR OPINION ON ANY DISPUTE, CLAIM, ARBITRATION AND/OR LITIGATION PERTAINING TO ANY STRUCTURAL ASPECT OF THE PROJECT SHALL ABSOLVE EVERSTEAD OF ALL RESPONSIBILITY.



2 - RIGHT ELEVATION - FARMHOUSE 2
1/4" = 1'-0"



4 - LEFT ELEVATION - FARMHOUSE 2
1/4" = 1'-0"

ELEVATION NOTES

1. GRADE IS APPROXIMATE AND SHOWN FOR REFERENCE ONLY. CONTRACTOR TO VERIFY SITE CONDITIONS.
2. UNBALANCED FILL NOT TO EXCEED 4'-0" AT UNRESTRAINED WALLS.
3. ALL FOOTINGS TO BE BELOW FROST LINE (3'-0") AS REQUIRED PER SITE.

REFERENCE NOTES

- 01.12 - TOP OF FOOTING DEPTH DETERMINED PER SITE.
- 01.23 - STEP FOUNDATION TO BELOW FROST LINE AS REQUIRED PER SITE.
- 01.41 - 6X6 CEDAR POST.
- 01.71 - CONCRETE WINDOW WELL FOR EGRESS WITH LADDER. PROVIDE SLEEVE THROUGH WALL FOR FOUNDATION DRAIN. TOP OF WINDOW WELL TO BE 3" BELOW TOP OF FOUNDATION.
- 03.11 - LP SMART LAP SIDING. BOTTOM OF SIDING SHALL BE A MINIMUM OF 6" ABOVE GRADE.
- 03.13 - LP SMART PANEL SIDING. BOTTOM OF SIDING SHALL BE A MINIMUM OF 6" ABOVE GRADE.
- 03.15 - LP SMART BOARD AND BATTEN.
- 03.38 - 6X6 CEDAR POST. 1X6 TRIM AT BASE. 1X4 TRIM AT TOP.
- 03.57 - 26"X6" CEDAR BRACKET.
- 03.66 - DECORATIVE FALSE LOUVERED VENT.
- 04.11 - MINIMUM ROOFING COMPOSITION - 30 YR COMPOSITE SHINGLES ON 5/8 FELT ON 7/16" OSB SHEATHING OR AS REQUIRED BY CODE.
- 07.67 - BACK WALL OF GARAGE.

8'-0" FOUNDATION WALL EXCEPT AT STEP DOWNS TO BE LOCATED IN THE FIELD

UNBALANCED FILL NOT TO EXCEED 4'-0" AT UNRESTRAINED WALLS

ALL FOOTING TO BE BELOW FROST LINE (3'-0") AS REQUIRED PER SITE

4/4"X4" LP SMART TRIM ON SIDES AND REARS AROUND DOORS, WINDOWS AND CORNERS UNLESS OTHERWISE NOTED

CPG DBA



10450 HOLMES RD. STE. 100
KANSAS CITY, MO 64131
816-246-6700



EVERSTEAD
ENGINEERING & DESIGN

3741 NE TROON DR.
LEE'S SUMMIT MO 64064
816-399-4901

EVERSTEAD IS RESPONSIBLE FOR STRUCTURAL SPECIFICATIONS ONLY. ARCHITECTURAL PLANS WERE PROVIDED BY OTHERS.

COPYRIGHT 2020

THIS DRAWING HAS BEEN PREPARED BY SUMMIT HOMES, OR UNDER THEIR DIRECT SUPERVISION AS AN INSTRUMENT OF SERVICE AND IS INTENDED FOR USE ONLY ON THIS PROJECT. ALL DRAWINGS, SPECIFICATIONS, AND DESIGNS, INCLUDING THE OVERALL LAYOUT, FORM, AND COMPOSITION OF SPACES ARE PROTECTED BY COPYRIGHT REGISTERED TO CPG, INC. ANY REPRODUCTION, USE, OR DISCLOSURE OF THE INFORMATION CONTAINED HEREIN WITHOUT THE WRITTEN CONSENT FROM CPG, INC. OR A SUMMIT HOMES EMPLOYEE IS STRICTLY PROHIBITED.

ADDRESS:

1340 SE Windbreak Dr
Lee's Summit, MO 64082

BAILEY FARMS #1250
HONEYDEW FARMHOUSE 2

PROFESSIONAL SEAL:



VERSION:

6.0

**ELEVATIONS -
FARMHOUSE 2**

G001

DATE 3/17/2026 FOR CONSTRUCTION
SCALE AS NOTED ON PLANS REVIEW
03/17/2026 4:26:14



Window Schedule Lower Level_Full

Table with 3 columns: Count, Type, Head Height. Row 1: 1, 4'0\"/>

REFERENCE NOTES

- 01.11 - CONTINUOUS CONCRETE FOOTING
01.21 - RECESS TOP OF FOUNDATION WALL
01.31 - 2X4 STUD WALL WITH TREATED SILL PLATE
01.32 - 2X6 STUD WALL WITH TREATED SILL PLATE
01.71 - CONCRETE WINDOW WELL FOR EGRESS WITH LADDER, PROVIDE SLEEVE THROUGH WALL FOR FOUNDATION DRAIN, TOP OF WINDOW WELL TO BE 3\"/>

ALL NON TREATED LUMBER SIZES, UNLESS NOTED OTHERWISE ARE:
SOUTHERN YELLOW PINE #1, #2, OR DOUGLAS FIR-LARCH #2 FOR VERTICAL MEMBERS, 2X4 AND 2X6
SOUTHERN YELLOW PINE #1 OR DOUGLAS FIR-LARCH #2 FOR HORIZONTAL MEMBERS, 2X10 AND 2X12
ALL TREATED/ROT RESISTANT LUMBER SIZES ARE #2 TREATED SOUTHERN YELLOW PINE, UNLESS OTHERWISE NOTED
8'-0\"/>

CONSTRUCTION NOTES - ADDITIONS

- 1. ALL NEW WALL DIMENSIONS ARE MEASURED TO THE FACE OF STUD UNO.
2. ALL EXISTING WALLS ARE MEASURED TO THE PRESUMED FINISHED FACE OF WALL UNO.
3. ALL STRUCTURAL BEAMS ARE MEASURED TO THE CENTER OF THE MEMBER.
4. ALL CRITICAL DIMENSIONS TO BE FIELD VERIFIED BY CONTRACTOR.
5. NEW DOORS AND WINDOWS ARE TAGGED IN FEET AND INCHES.
6. ALL VANITIES, SHOWERS, AND TUBS ARE TAGGED IN INCHES UNO.
7. ALL TOILETS TO BE INSTALLED WITH A MINIMUM OF 15\"/>

FOUNDATION NOTES:

- 1. ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE (IRC).
2. FOOTING ELEVATION TO BE DETERMINED BASED ON FINAL GRADE: ALL FOOTINGS MEET OR EXCEED MINIMUM FROST DEPTH OF 36\"/>

CRAWL SPACE NOTES:

- 1. UNDER-FLOOR SPACE SHALL CONFORM TO 2018 IRC SECTION R408
2. PER 2018 IRC R408.3 UNDER-FLOOR VENTILATION IS NOT REQUIRED WHERE:
- EXPOSED EARTH IS COVERED W/ CONTINUOUS CLASS 1 VAPOR RETARDER.
- JOINTS SHALL OVERLAP 6\"/>

FOUNDATION WALL AND FOOTING TABLE (3000 PSI CONCRETE AND 40 KSI REBAR PLACED 2\"/>

ISOLATED FOOTINGS AND COLUMN PADS
SYM PIER PAD SIZE DEPTH MINIMUM REINFORCEMENT GRADE 40 KSI STEEL SCHEDULE 40 STEEL COLUMN MIN FTS = 35 KSI

ISOLATED FOOTINGS AND COLUMN PADS
SYM PIER DIAMETER DEPTH
G 12\"/>

WALL LEGEND
[---] DEMO WALL
[---] FOUNDATION WALL - EXISTING
[---] FOUNDATION WALL - NEW
[---] EXISTING WALL TYPE
[---] EXISTING LOAD BEARING WALL
[---] NEW 4\"/>

GENERAL PLAN NOTES


- 1. ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE OR ENGINEERING SPECIFICATIONS WHERE APPLICABLE.
2. ALL DIMENSIONS ARE FROM FACE OF STUD UNO.
3. MINIMUM DOUBLE JOIST UNDER INTERIOR NON-LOAD BEARING WALLS.
4. CANTILEVERS, OVER BEAMS, AND DOOR JAMBS SHALL BE BLOCKED.
5. CEILING JOISTS SHALL BE 2x6 @ 16\"/>

WALL BRACING NOTES:


- 1. WALL BRACING IS DESIGNED IN ACCORDANCE WITH IRC R602.10
2. BRACING METHODS SHALL BE PER PLAN AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH 2018 IRC R602.10.4 AND R602.10.5
3. FOR METHOD CS-WSP STRUCTURAL PANEL SHEATHING SHALL BE INSTALLED ON ALL SHEATHABLE SURFACES ON ONE SIDE OF THE BRACED WALL LINE INCLUDING AREAS ABOVE AND BELOW OPENINGS AND GABLE END WALLS. END CONDITIONS SHALL MEET THE REQUIREMENTS OF R602.10.7 AND DETAIL 9-S400.
4. ALL HORIZONTAL PANEL JOINTS SHALL OCCUR OVER AND BE NAILED TO COMMON FRAMING OR BLOCKING WITH AN APPROPRIATE PANEL EDGE-NAILING SCHEDULE IN ACCORDANCE WITH IRC R602.10.4.4
5. INTERIOR FINISH OF EXTERIOR WALLS SHALL BE MINIMUM 1/2\"/>

BRACING METHODS

- [---] BRACING CS-PF PER IRC R602.10.6.4
[---] BRACING CS-WSP PER IRC R602.10
[---] BRACING WSP PER IRC R602.10 (4\"/>

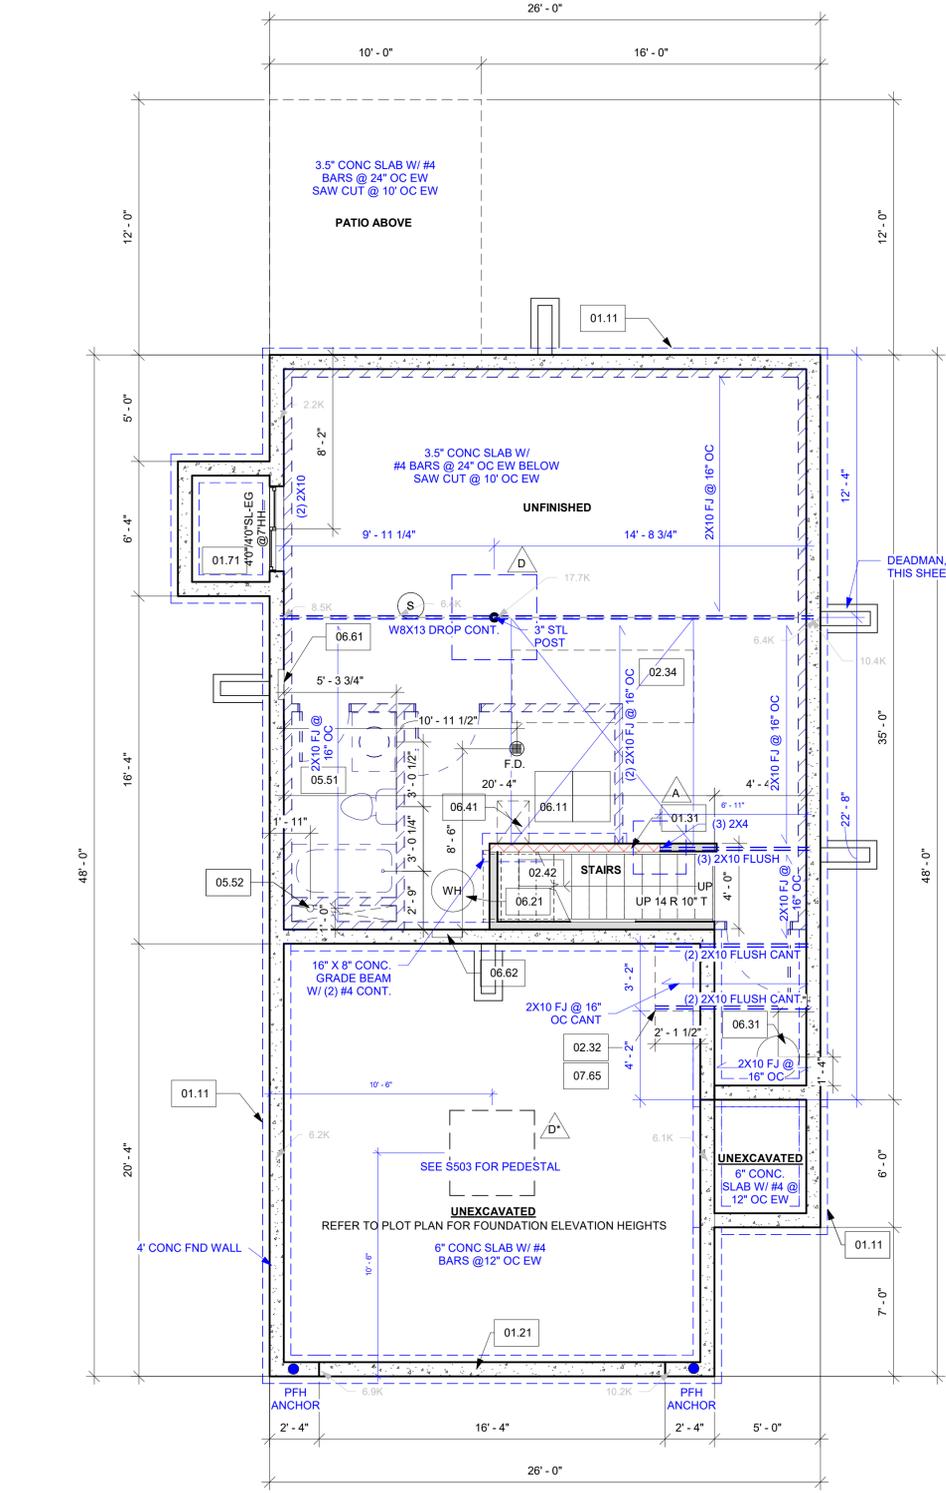

1 - LOWER LEVEL PLAN - FULL UNF 1/4\"/>

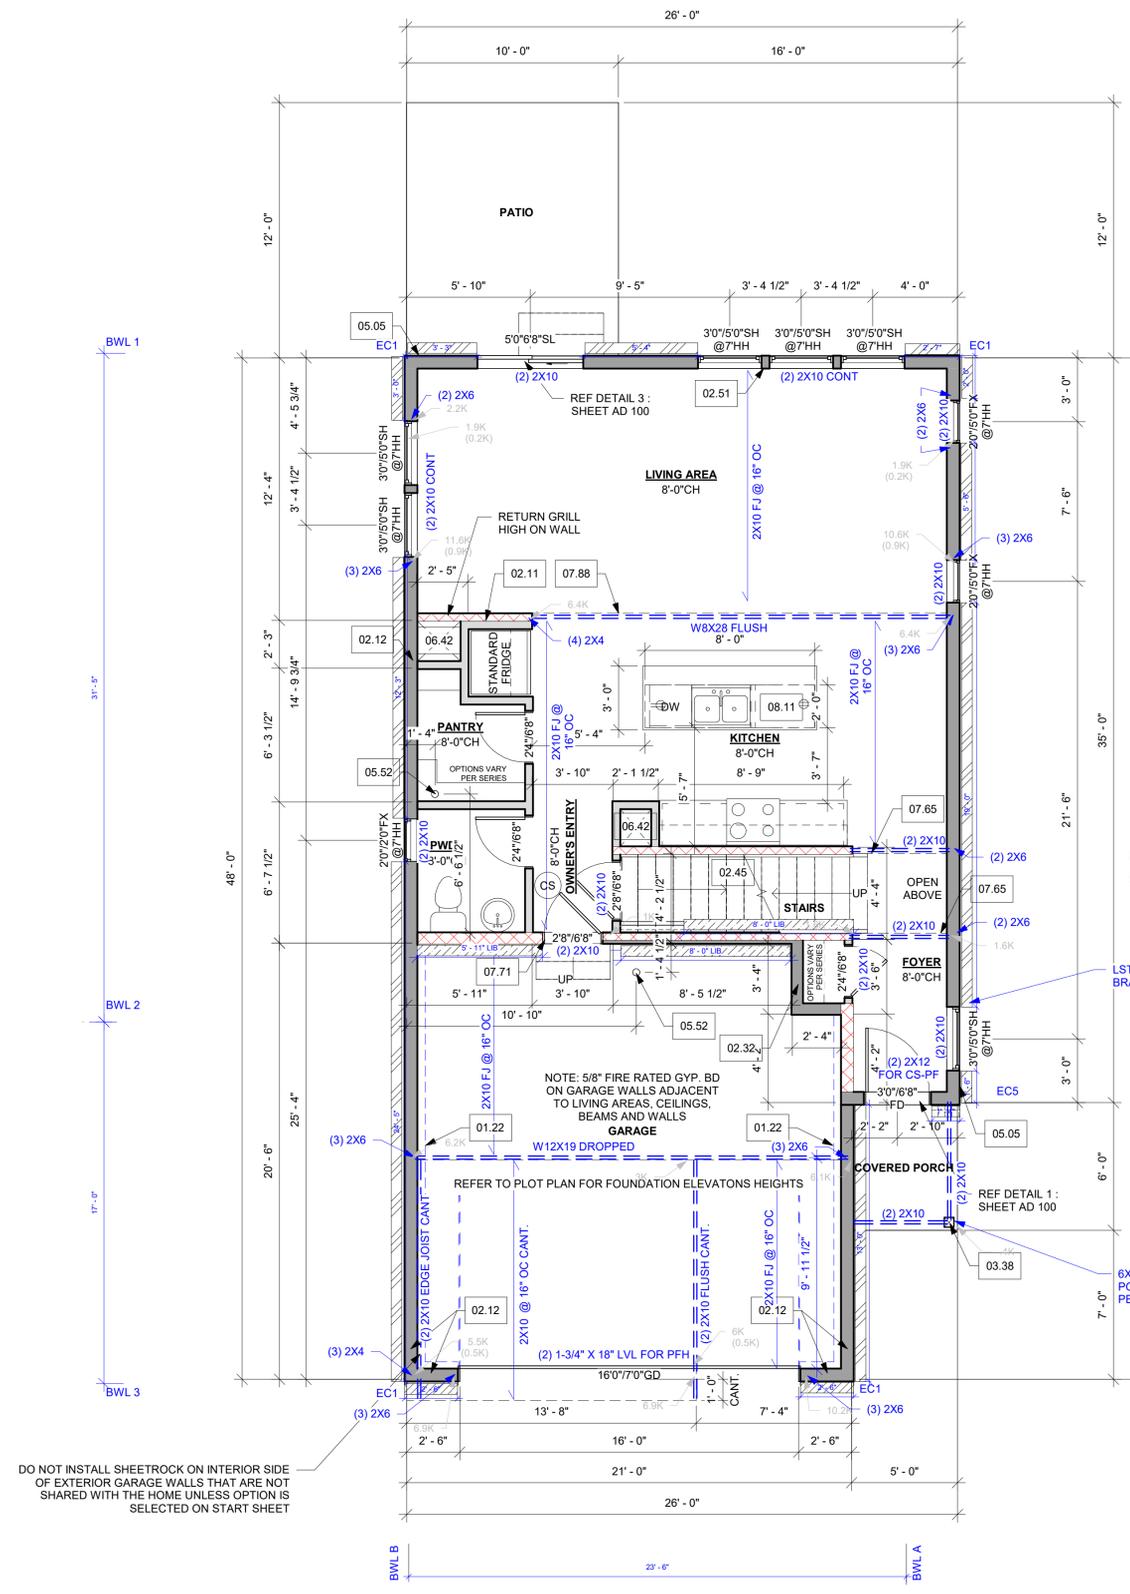

1 2 - MAIN LEVEL PLAN (BASE)
1/4" = 1'-0"

DO NOT INSTALL SHEETROCK ON INTERIOR SIDE OF EXTERIOR GARAGE WALLS THAT ARE NOT SHARED WITH THE HOME UNLESS OPTION IS SELECTED ON START SHEET

| Door Schedule Main Level_Farmhouse_2 car | | |
|--|-------------|----------------|
| Count | Door Size | Level |
| 3 | 2'4"6'8" | 1ST FLOOR DECK |
| 2 | 2'8"6'8" | 1ST FLOOR DECK |
| 1 | 3'0"6'8" FD | 1ST FLOOR DECK |
| 1 | 5'0"6'8"SL | 1ST FLOOR DECK |

| Window Schedule Main Level_Farmhouse | | |
|--------------------------------------|-----------------|-------------|
| Count | Type | Head Height |
| 1 | 2'0"2'0"FX @7HH | 7' - 0" |
| 2 | 2'0"5'0"FX @7HH | 7' - 0" |
| 6 | 3'0"5'0"SH @7HH | 7' - 0" |

REFERENCE NOTES

- 01.22 - EXPOSED TOP OF FOUNDATION WALL
- 02.12 - 2X6 STUD WALL
- 02.32 - INSULATE CANTILEVER AS REQUIRED PRIOR TO BLOCKING.
- 02.41 - CURB STAIR SYSTEM WITH OPEN HANDRAILS.
- 02.45 - STAIRS TO LOWER LEVEL UNFINISHED.
- 02.51 - 3 STUDS BETWEEN WINDOW UNITS.
- 03.38 - 6X6 CEDAR POST. 1X6 TRIM AT BASE. 1X4 TRIM AT TOP.
- 05.05 - HOSE BIBB
- 05.52 - PLUMBING FLANGE ABOVE. HEADER JOISTS AS NEEDED.
- 06.42 - HVAC FLOOR OPENING. HEADER OFF FLOOR JOISTS AS REQUIRED. BUMP TRUSSES AS NECESSARY FOR HVAC ACCESS.
- 07.65 - LINE OF FLOOR ABOVE.
- 07.71 - 20 MINUTE FIRE RATED SOLID CORE WITH SELF-CLOSING HINGES.
- 07.88 - CHANGE IN FLOORING MATERIAL.
- 08.11 - 24" CABINET + 12" OVERHANG FLAT ISLAND. VERIFY LOCATION WITH PERSONAL BUILDER.

ALL NON TREATED LUMBER SIZES, UNLESS NOTED OTHERWISE ARE:
SOUTHERN YELLOW PINE #1, #2, OR DOUGLAS FIR-LARCH #2 FOR VERTICAL MEMBERS, 2X4 AND 2X6
SOUTHERN YELLOW PINE #1 OR DOUGLAS FIR-LARCH #2 FOR HORIZONTAL MEMBERS, 2X10 AND 2X12
ALL TREATED/ROT RESISTANT LUMBER SIZES ARE #2 TREATED SOUTHERN YELLOW PINE, UNLESS OTHERWISE NOTED

- GENERAL PLAN NOTES**
- ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE OR ENGINEERING SPECIFICATIONS WHERE APPLICABLE.
 - ALL DIMENSIONS ARE FROM FACE OF STUD U.N.O.
 - MINIMUM DOUBLE JOIST UNDER INTERIOR NON-LOAD BEARING WALLS.
 - CANTILEVERS, OVER BEAMS, AND DOOR JAMBS SHALL BE BLOCKED.
 - CEILING JOISTS SHALL BE 2x6 @ 16" O.C. U.N.O.
 - WALL CONSTRUCTION SHALL BE CAPABLE OF ACCOMMODATING ALL LOADS IMPOSED ACCORDING TO IRC R301.
 - EXTERIOR WALLS SHALL BE CONSTRUCTED IN ACCORDANCE WITH IRC 602 & FIGURES R602.3(1) AND R602.3(2).
 - ANY WOOD MEMBERS IN CONTACT WITH CONCRETE OR MASONRY (OR THE FURRING THEY ARE ATTACHED TO) SHALL BE OF DECAY RESISTANT MATERIAL.
 - INTERIOR NON-LOAD BEARING WALLS SHALL BE ISOLATED FROM THE FLOOR FRAMING ABOVE UNLESS THE INTERIOR NON-LOAD BEARING WALL RESTS DIRECTLY ON A FOOTING. SOLID BLOCKING BETWEEN JOISTS AT 48" O.C. AND EXTEND BLOCKING ONE JOIST BAY PAST EACH SIDE OF KITCHEN ISLAND.
 - DOUBLE JOIST UNDER KITCHEN ISLAND AND TUBS.
 - ALL JOIST HANGERS TO BE SIMPSON LUS HANGERS UNO.
 - ALL WINDOW HEADERS TO BE (2) 2X10 UNO.
 - ALL EXTERIOR WALLS, INTERIOR BEARING WALLS, AND INTERIOR BRACED WALLS SHALL BE @ 16" OC UNO.
 - ALL INTERIOR NON-LOAD BEARING, NON-BRACED, NON-CABINET WALLS ARE ALLOWED @ 24" OC.

- WALL BRACING NOTES:**
- WALL BRACING IS DESIGNED IN ACCORDANCE WITH IRC R602.10 BRACING METHODS SHALL BE PER PLAN AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH 2018 IRC R602.10.4 AND R602.10.5
 - FOR METHOD CS-WSP STRUCTURAL PANEL SHEATHING SHALL BE INSTALLED ON ALL SHEATHABLE SURFACES ON ONE SIDE OF THE BRACED WALL LINE INCLUDING AREAS ABOVE AND BELOW OPENINGS AND GABLE END WALLS. END CONDITIONS SHALL MEET THE REQUIREMENTS OF R602.10.7 AND DETAIL 9-S400.
 - ALL HORIZONTAL PANEL JOINTS SHALL OCCUR OVER AND BE NAILED TO COMMON FRAMING OR BLOCKING WITH AN APPROPRIATE PANEL EDGE-NAILING SCHEDULE IN ACCORDANCE WITH IRC R602.10.4.
 - INTERIOR FINISH OF EXTERIOR WALLS SHALL BE MINIMUM 1/2" GYPSUM BOARD INSTALLED ON THE INTERIOR SIDE.

- BRACING METHODS**
- BRACING CS-PF PER IRC R602.10.6.4
 - BRACING CS-WSP PER IRC R602.10
 - BRACING WSP PER IRC R602.10 (4' MIN PANEL LENGTH, UNO) (PARTIAL PANELS PER IRC R602.10.5.2. NOTED ON PLANS W/ LENGTH)
 - BRACING LIB PER IRC R602.10
MINIMUM LIB LENGTH PER 2018 IRC TABLE R602.10.5:
• 55' - 8' TALL WALL HEIGHT
• 62' - 9' TALL WALL HEIGHT
• 69' - 10' TALL WALL HEIGHT
 - BRACING PFH PER IRC R602.10.6.2

- CONSTRUCTION NOTES - ADDITIONS**
- ALL NEW WALL DIMENSIONS ARE MEASURED TO THE FACE OF STUD UNO.
 - ALL EXISTING WALLS ARE MEASURED TO THE PRESUMED FINISHED FACE OF WALL UNO.
 - ALL STRUCTURAL BEAMS ARE MEASURED TO THE CENTER OF THE MEMBER.
 - ALL CRITICAL DIMENSIONS TO BE FIELD VERIFIED BY CONTRACTOR.
 - NEW DOORS AND WINDOWS ARE TAGGED IN FEET AND INCHES.
 - ALL VANITIES, SHOWERS, AND TUBS ARE TAGGED IN INCHES UNO.
 - ALL TOILETS TO BE INSTALLED WITH A MINIMUM OF 15" O.C. CLEARANCE ON EACH SIDE OF TOILET. ALL TOILETS TO HAVE 21" CLEARANCE AT FRONT OF TOILET.
 - ALL SINKS TO HAVE 21" CLEARANCE AT FRONT OF SINK.
 - ALL SHOWERS TO HAVE 24" CLEARANCE AT OPENING.

WALL LEGEND

| | |
|----------|--------------------------------|
| [Symbol] | DEMO WALL |
| [Symbol] | FOUNDATION WALL - EXISTING |
| [Symbol] | FOUNDATION WALL - NEW |
| [Symbol] | EXISTING WALL TYPE |
| [Symbol] | EXISTING LOAD BEARING WALL |
| [Symbol] | NEW 4" WALL TYPE |
| [Symbol] | NEW 6" WALL TYPE |
| [Symbol] | NEW 4" LOAD BEARING WALL |
| [Symbol] | NEW 6" LOAD BEARING WALL |
| [Symbol] | NEW WALL INFILL OF EX. OPENING |

| IRC TABLE N1102.1.2 (R402.1.2) INSULATION AND FENESTRATION REQUIREMENTS BY COMPONENT (PARTIAL) AND ENERGY CONSERVATION CODE COMPLIANCE | | | | | | | | | | | |
|--|-----------------------|-------------------|--------------------------|----------------------------|----------------|-------------------------|---------------|-----------------------|----------------------|--------------------------|------------------|
| CLIMATE ZONE | FENESTRATION U-FACTOR | SKYLIGHT U-FACTOR | GLAZED FENESTRATION SHGC | CEILING AND ATTICS R-VALUE | VAULTS R-VALUE | WOOD FRAME WALL R-VALUE | FLOOR R-VALUE | BASEMENT WALL R-VALUE | SLAB R-VALUE & DEPTH | CRAWL SPACE WALL R-VALUE | DUCTWORK R-VALUE |
| 4 EXCEPT MARINE | .32 | .55 | .40 | 49 | 49 | 20 OR 13+5H | 19 | 10/13 | 10, 2 FT | 10/13 | 8 |

CPG DBA
summit HOMES
A CLAYTON COMPANY
10450 HOLMES RD. STE. 100
KANSAS CITY, MO 64131
816-246-6700

EVERSTEAD ENGINEERING & DESIGN
3741 NE TROON DR.
LEE'S SUMMIT, MO 64064
816-399-4901
EVERSTEAD IS RESPONSIBLE FOR STRUCTURAL SPECIFICATIONS ONLY. ARCHITECTURAL PLANS WERE PROVIDED BY OTHERS.

COPYRIGHT 2020
THIS DRAWING HAS BEEN PREPARED BY SUMMIT HOMES, OR UNDER THEIR DIRECT SUPERVISION AS AN INSTRUMENT OF SERVICE AND IS INTENDED FOR USE ONLY ON THIS PROJECT. ALL DRAWINGS, SPECIFICATIONS, AND DESIGNS, INCLUDING THE OVERALL LAYOUT, FORM, AND COMPOSITION OF SPACES ARE PROTECTED BY COPYRIGHT REGISTERED TO CPG, INC. ANY REPRODUCTION, USE, OR DISCLOSURE OF THE INFORMATION OR CONTENTS HEREIN WITHOUT THE WRITTEN CONSENT FROM CPG, INC. OR A SUMMIT HOMES EMPLOYEE IS STRICTLY PROHIBITED.
ADDRESS:
1340 SE Windbreak Dr
Lee's Summit, MO 64082

BAILEY FARMS #1250
HONEYDEW FARMHOUSE 2

PROFESSIONAL SEAL:
MISSOURI PROFESSIONAL ENGINEER
HANNAH CHRISTINE JONES
NUMBER PE-3023846346
03/12/2026

VERSION:
6.0

MAIN LEVEL PLAN
G102

DATE 3/17/2026 FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPER'S REVIEW
SCALE
03/17/2026 4:26:15



GENERAL PLAN NOTES

- ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE OR ENGINEERING SPECIFICATIONS WHERE APPLICABLE.
- ALL DIMENSIONS ARE FROM FACE OF STUD U.N.O.
- MINIMUM DOUBLE JOIST UNDER INTERIOR NON-LOAD BEARING WALLS.
- CANTILEVERS, OVER BEAMS, AND DOOR JAMBS SHALL BE BLOCKED.
- CEILING JOISTS SHALL BE 2x6 @ 16" O.C. U.N.O.
- WALL CONSTRUCTION SHALL BE CAPABLE OF ACCOMMODATING ALL LOADS IMPOSED ACCORDING TO IRC R301.
- EXTERIOR WALLS SHALL BE CONSTRUCTED IN ACCORDANCE WITH IRC 602 & FIGURES R602.3(1) AND R602.3(2).
- ANY WOOD MEMBERS IN CONTACT WITH CONCRETE OR MASONRY (OR THE FURRING THEY ARE ATTACHED TO) SHALL BE OF DECAY RESISTANT MATERIAL.
- INTERIOR NON-LOAD BEARING WALLS SHALL BE ISOLATED FROM THE FLOOR FRAMING ABOVE UNLESS THE INTERIOR NON-LOAD BEARING WALL RESTS DIRECTLY ON A FOOTING. SOLID BLOCKING BETWEEN JOISTS AT 48" O.C. AND EXTEND BLOCKING ONE JOIST BAY PAST EACH SIDE OF KITCHEN ISLAND.
- DOUBLE JOIST UNDER KITCHEN ISLAND AND TUBS.
- ALL JOIST HANGERS TO BE SIMPSON LUS HANGERS UNO.
- ALL WINDOW HEADERS TO BE (2) 2X10 UNO.
- ALL EXTERIOR WALLS, INTERIOR BEARING WALLS, AND INTERIOR BRACED WALLS SHALL BE @ 16" OC UNO.
- ALL INTERIOR NON-LOAD BEARING, NON-BRACED, NON-CABINET WALLS ARE ALLOWED @ 24" OC.

INTERIOR LOAD BEARING WALL

WALL BRACING NOTES:

- WALL BRACING IS DESIGNED IN ACCORDANCE WITH IRC R602.10 BRACING METHODS SHALL BE PER PLAN AND SHALL BE CONSTRUCTED IN CONFORMANCE WITH 2018 IRC R602.10.4 AND R602.10.5
- FOR METHOD CS-WSP STRUCTURAL PANEL SHEATHING SHALL BE INSTALLED ON ALL SHEATHABLE SURFACES ON ONE SIDE OF THE BRACED WALL LINE INCLUDING AREAS ABOVE AND BELOW OPENINGS AND GABLE END WALLS. END CONDITIONS SHALL MEET THE REQUIREMENTS OF R602.10.7 AND DETAIL 9-5400.
- ALL HORIZONTAL PANEL JOINTS SHALL OCCUR OVER AND BE NAILED TO COMMON FRAMING OR BLOCKING WITH AN APPROPRIATE PANEL EDGE-NAILING SCHEDULE IN ACCORDANCE WITH IRC R602.10.4.4.
- INTERIOR FINISH OF EXTERIOR WALLS SHALL BE MINIMUM 1/2" GYPSUM BOARD INSTALLED ON THE INTERIOR SIDE.

BRACING METHODS

- BRACING CS-PF PER IRC R602.10.6.4
- BRACING CS-WSP PER IRC R602.10
- BRACING WSP PER IRC R602.10 (4' MIN PANEL LENGTH, UNO) (PARTIAL PANELS PER IRC R602.10.5.2, NOTED ON PLANS W/ LENGTH)
- BRACING LIB PER IRC R602.10
MINIMUM LIB LENGTH PER 2018 IRC TABLE R602.10.5:
 • 55'-8" TALL WALL HEIGHT
 • 62'-9" TALL WALL HEIGHT
 • 69'-10" TALL WALL HEIGHT
- BRACING PFH PER IRC R602.10.6.2

CONSTRUCTION NOTES - ADDITIONS

- ALL NEW WALL DIMENSIONS ARE MEASURED TO THE FACE OF STUD UNO.
- ALL EXISTING WALLS ARE MEASURED TO THE PRESUMED FINISHED FACE OF WALL UNO.
- ALL STRUCTURAL BEAMS ARE MEASURED TO THE CENTER OF THE MEMBER.
- ALL CRITICAL DIMENSIONS TO BE FIELD VERIFIED BY CONTRACTOR.
- NEW DOORS AND WINDOWS ARE TAGGED IN FEET AND INCHES.
- ALL VANITIES, SHOWERS, AND TUBS ARE TAGGED IN INCHES UNO.
- ALL TOILETS TO BE INSTALLED WITH A MINIMUM OF 15" O.C. CLEARANCE ON EACH SIDE OF TOILET. ALL TOILETS TO HAVE 21" CLEARANCE AT FRONT OF TOILET.
- ALL SINKS TO HAVE 21" CLEARANCE AT FRONT OF SINK.
- ALL SHOWERS TO HAVE 24" CLEARANCE AT OPENING.

CEILING TRANSITION

WALL LEGEND


- DEMO WALL
- FOUNDATION WALL - EXISTING
- FOUNDATION WALL - NEW
- EXISTING WALL TYPE
- EXISTING LOAD BEARING WALL
- NEW 4" WALL TYPE
- NEW 6" WALL TYPE
- NEW 4" LOAD BEARING WALL
- NEW 6" LOAD BEARING WALL
- NEW WALL INFILL OF EX. OPENING

| Door Schedule Upper Level_Farmhouse | | |
|-------------------------------------|----------------|----------------|
| Count | Door Size | Level |
| 3 | (2)2'0"/6'8"DB | 2ND FLOOR DECK |
| 1 | 2'0"/6'8" | 2ND FLOOR DECK |
| 4 | 2'4"/6'8" | 2ND FLOOR DECK |
| 3 | 2'6"/6'8" | 2ND FLOOR DECK |
| 1 | 2'6"/6'8"DO | 2ND FLOOR DECK |
| 2 | 2'8"/6'8" | 2ND FLOOR DECK |


| Window Schedule Upper Level_Farmhouse | | |
|---------------------------------------|-------------------------|-------------|
| Count | Type | Head Height |
| 1 | 2'0"/2'0"FX @6'HH | 6' - 0" |
| 2 | 2'0"/2'0"FX @7'HH | 7' - 0" |
| 2 | 3'0"/5'0"SH @7'HH | 7' - 0" |
| 4 | 3'0"/5'0"SH-EG @7'-0"HH | 7' - 0" |

REFERENCE NOTES

- 02.12 - 2X6 STUD WALL
 - 02.31 - SIX SIDED TUB ASSEMBLY INCLUDING A THERMAL BARRIER ON EXTERIOR WALL TO 2" ABOVE TOP OF TUB/SHOWER
 - 05.01 - PLUMBING FOR WASHER ON INTERIOR WALL
 - 05.21 - FIBERGLASS BASE WITH TILE WALLS. VERIFY WITH STARTS SHEET.
 - 05.23 - FIBERGLASS UNIT. VERIFY WITH STARTS SHEET.
 - 06.42 - HVAC FLOOR OPENING. HEADER OFF FLOOR JOISTS AS REQUIRED. BUMP TRUSSES AS NECESSARY FOR HVAC ACCESS.
 - 06.51 - 1'10" X 3'-0" MINIMUM ATTICE ACCESS WITH 3/4" BACKER BOARD AND 2 LATCHES. BUMP TRUSSES FOR ATTIC ACCESS.
 - 07.41 - OPEN HANDRAILS.
 - 07.66 - LINE OF FLOOR BELOW.
 - 08.22 - CONTINUOUS FLAT VANITY.
- ALL NON TREATED LUMBER SIZES, UNLESS NOTED OTHERWISE ARE:
SOUTHERN YELLOW PINE #1, #2, OR DOUGLAS FIR-LARCH #2 FOR VERTICAL MEMBERS, 2X4 AND 2X6
SOUTHERN YELLOW PINE #1 OR DOUGLAS FIR-LARCH #2 FOR HORIZONTAL MEMBERS, 2X10 AND 2X12
ALL TREATED/ROT RESISTANT LUMBER SIZES ARE #2 TREATED SOUTHERN YELLOW PINE, UNLESS OTHERWISE NOTED

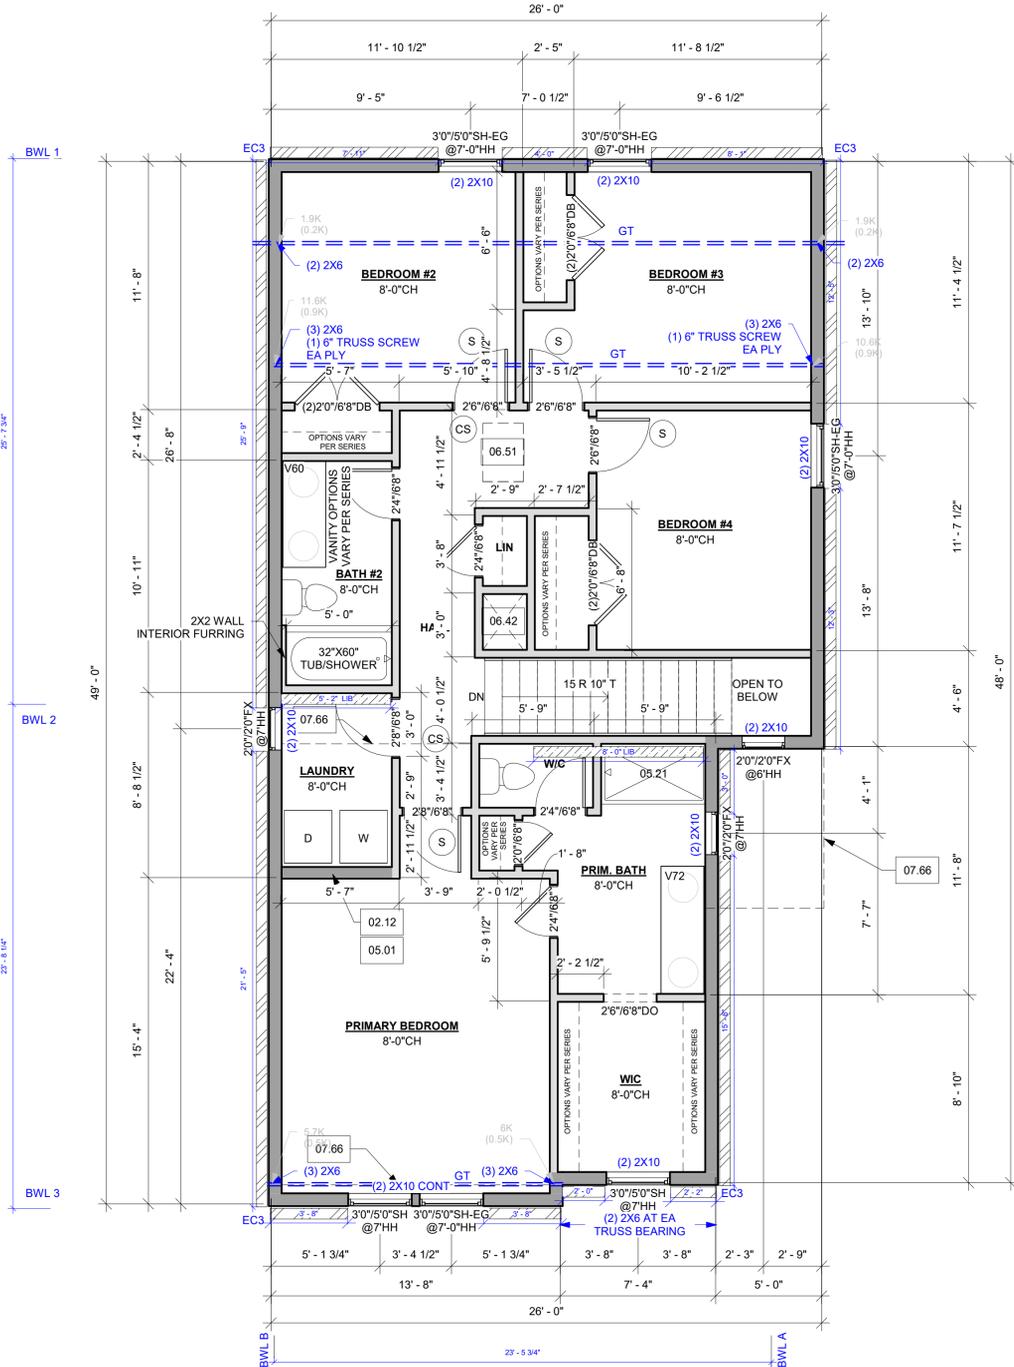

3 - UPPER LEVEL PLAN (BASE)
1/4" = 1'-0"

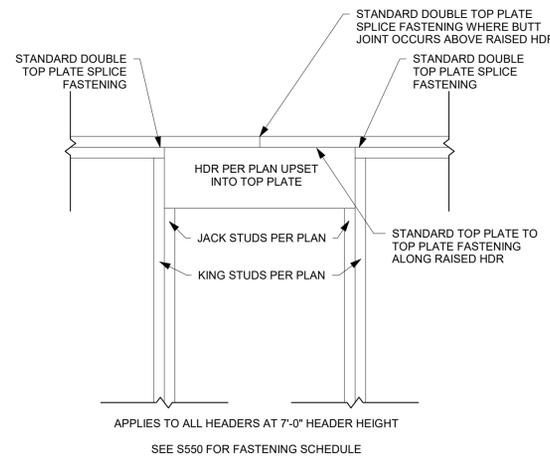

| IRC TABLE N1102.1.2 (R402.1.2) INSULATION AND FENESTRATION REQUIREMENTS BY COMPONENT (PARTIAL) AND ENERGY CONSERVATION CODE COMPLIANCE | | | | | | | | | | | |
|--|-----------------------|-------------------|--------------------------|----------------------------|----------------|-------------------------|---------------|------------------|----------------------|---------------------|------------------|
| CLIMATE ZONE | FENESTRATION U-FACTOR | SKYLIGHT U-FACTOR | GLAZED FENESTRATION SHGC | CEILING AND ATTICS R-VALUE | VAULTS R-VALUE | WOOD FRAME WALL R-VALUE | FLOOR R-VALUE | BASEMENT R-VALUE | SLAB R-VALUE & DEPTH | CRAWL SPACE R-VALUE | DUCTWORK R-VALUE |
| 4 EXCEPT MARINE | .32 | .55 | .40 | 49 | 49 | 20 OR 13+5H | 19 | 10/13 | 10, 2 FT | 10/13 | 8 |



BAILEY FARMS #1250
HONEYDEW FARMHOUSE 2




TRUSS FRAMED ROOF NOTES

1. ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE OR ATTACHED ENGINEER SPECIFICATIONS WHERE APPLICABLE.
2. DESIGNED FOR LIGHT ROOF COVERING. UNO. SEE G000 FOR MINIMUM LOADING.
3. ALL EXTERIOR AND/OR LOAD BEARING WALL HEADERS SHALL BE MIN. (2) #2 2X10 UNO. CONSULT ENGINEER IF TRUSSES BEAR ON INTERIOR WALLS SHOWN AS NON-LOAD BEARING ON APPROVED PRINTS.
4. PROVIDE 2X SOLID BLOCKING SUPPORT BELOW ALL POINT LOADS CONTINUOUS TO BEARING STRUCTURE AND/OR FOUNDATION BELOW.
5. WOOD TRUSSES SHALL BE IN ACCORDANCE WITH IRC 802.10.
6. CONSULT ENGINEER IF TRUSSES BEAR ON INTERIOR WALLS SHOWN AS NON-LOAD BEARING ON APPROVED PRINTS.
7. GIRDER TRUSSES MUST HAVE LOAD CARRIED DOWN TO THE FOUNDATION OR LOAD SUPPORTING MEMBER. STUD PACK / COLUMN SHOWN ON PLANS.
8. ROOF COVERING SHALL BE ASPHALT SHINGLES AND SHALL COMPLY WITH IRC 2018 SECT. R905.2
9. MINIMUM ROOF SLOPE FOR ASPHALT SHINGLES SHALL BE 2:12.
10. ROOF SLOPES IN BETWEEN 4:12 AND 2:12 SHALL REQUIRE DOUBLE UNDERLAYMENT IN ACCORDANCE WITH IRC 2018 TABLE R905.1.1(2).
11. EVERSTEAD STRUCTURAL SCOPE ENDS AT TOP PLATE FOR ROOF TRUSSES.

TRUSS SCREWS

1. TRUSS SCREWS MAY BE USED INSTEAD OF THE FASTENING NOTED IN TABLE R602.3(1)
2. TRUSS SCREWS MUST BE INSTALLED PER MANUFACTURER'S INSTRUCTIONS.
3. BASIS OF DESIGN SHOWN ON PLANS:
 - A. SIMPSON STRONG DRIVE SDWC TRUSS SCREW
 - B. LENGTH: 6"
 - C. FASTENED THROUGH THE BOTTOM SIDE OF A DOUGLAS FIR - LARCH OR SOUTHERN YELLOW PINE DOUBLE TOP PLATE INTO THE BEARING END OF A TRUSS
 - a. (1) 6" SCREW - MAX 835 LBS UPLIFT WHEN INSTALLED IN THE CENTER OF THE TOP PLATE ON A MAX 20 DEG. ANGLE FROM VERTICAL (INSTALLATION TYPE 1)
 - b. (2) 6" SCREWS - MAX 1195 LBS UPLIFT WHEN BOTH SCREWS ARE INSTALLED VERTICALLY INTO TRUSS. (INSTALLATION CONF. B)
 - c. (1) 6" SCREW EA PLY AT STUD - MAX 1287LBS UPLIFT FOR 2 PLY, MAX 1930LBS UPLIFT FOR 3 PLY WHEN INSTALLED FROM FACE OF STUD ALIGNED WITH TRUSS ON A MAX 20 DEG. ANGLE FROM VERTICAL (INSTALLATION TYPES 3 AND 4)
 - d. (2) 6" SCREWS EA PLY AT STUD - MAX 1629 LBS UPLIFT FOR 2 PLY, MAX 2443 LBS UPLIFT FOR 3 PLY WHEN BOTH SCREWS INSTALLED AT A 16 DEG TO 30 DEG ANGLE OFFSET 1/2" FROM THE OPPOSITE EDGES OF RAFTER/TRUSS (INSTALLATION CONF. C)
4. TRUSS BEARING WITH UPLIFT THAT EXCEEDS THE TRUSS SCREW CAPACITY LISTED ABOVE MUST HAVE ADDITIONAL FASTENING, AS SHOWN ON PLAN.

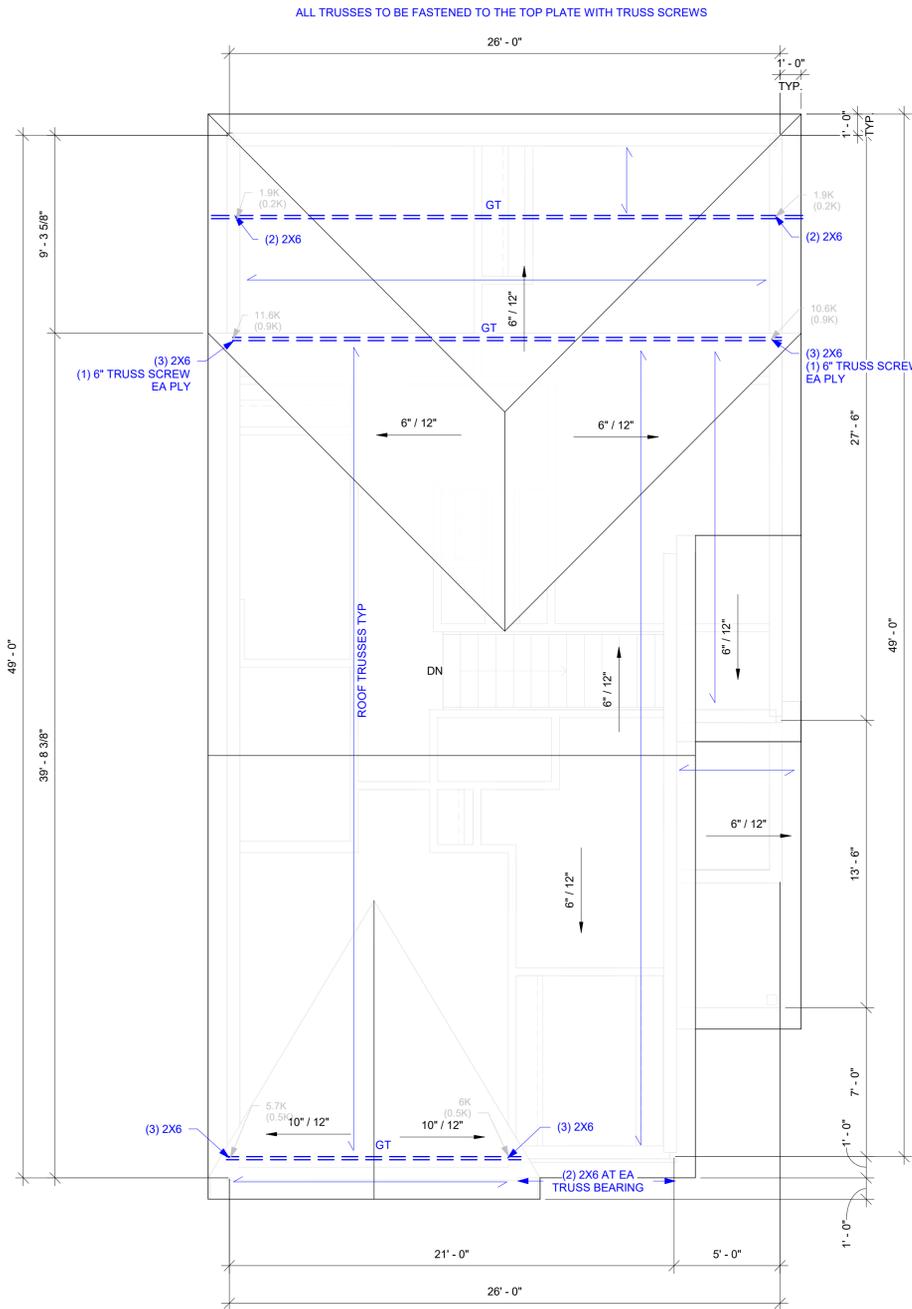

1 4 - ROOF PLAN - FARMHOUSE 2
1/4" = 1'-0"



EVERSTEAD
ENGINEERING & DESIGN



EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES

BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082

REVISIONS

STRUCTURAL
GENERAL NOTES

S100

DATE 12/22/2025
SCALE

2025-11-19 9:08 AM
AS NOTED ON PLANS REVIEW
DEVELOPER'S REVIEW
LEE'S SUMMIT, MISSOURI
03/17/2026 4:26:15

A. GENERAL NOTES IRC 2018

A.1 PLANS SHALL COMPLY WITH 2018 INTERNATIONAL RESIDENTIAL CODE (IRC) WITH AMENDMENTS AS ADOPTED BY THE APPROPRIATE GOVERNING JURISDICTION. THE CONTRACTOR SHALL NOTIFY THE EVERSTEAD IF ANY CHANGES OR DEVIATIONS FROM THE PLAN ARE MADE DURING CONSTRUCTION. EVERSTEAD MAY REQUIRE REVISED DRAWING OR CALCULATIONS AT ITS DISCRETION. IF DISCREPANCIES ARE IDENTIFIED THE MOST CONSERVATIVE SPECIFICATION SHALL APPLY.

A.2 LOADING ASSUMPTIONS

Table with 2 columns: Component (e.g., ROOF, CEILING, FLOOR, GARAGE, STORAGE, GUARDRAIL) and Load Value (e.g., 10 PSF UNO, 15 PSF, 20 PSF).

Table with 2 columns: Component (e.g., LIVE ROOF, FLOOR, GARAGE, STORAGE, GUARDRAIL) and Load Value (e.g., 20 PSF, 40 PSF, 50 PSF).

Table with 2 columns: Component (e.g., SNOW, GROUND SNOW LOAD) and Load Value (e.g., 20 PSF).

Table with 2 columns: Component (e.g., WIND VELOCITY, EXPOSURE CATEGORY) and Load Value (e.g., 115 MPH).

B. SOIL AND SITE ASSUMPTIONS

B.1 FOUNDATION DESIGN ASSUMES MINIMUM SOIL BEARING FOR THE SITE OF 1,500 PSF (2,000 PSF FOR KANSAS CITY, MO) UNLESS OTHERWISE NOTED. CONTRACTOR TO VISUALLY INSPECT THE SITE OR PROVIDE GEOTECHNICAL INVESTIGATION TO VERIFY MINIMUM ACCEPTABLE SOIL CONDITIONS FOR CL (SILTY CLAY) AS DEFINED BY 2018 IRC. THE CONTRACTOR IS RESPONSIBLE FOR ANY SOIL CONDITION THAT DOES NOT MEET THE MINIMUM REQUIREMENTS AND FOR CONTACTING EVERSTEAD.

B.2 ACCESSORY STRUCTURES WITH AN EAVE HEIGHTS LESS THAN 10'-0" AND AN AREA LESS THAN 600 FT MAT PROVIDE A MINIMUM SOIL COVER OF 12 INCHES MEASURED FROM THE BOTTOM OF CONCRETE.

B.3 LATERAL SOIL PRESSURES UNLESS OTHERWISE NOTED ACTIVE AT REST 100 PSF

B.4 SITE GRADING SHALL PROVIDE POSITIVE DRAINAGE AWAY FROM THE STRUCTURE AT A MINIMUM OF 0.5% (6" IN THE FIRST 10'-0"). ALTERNATE APPROACHES MAY BE APPROVED IF THE ALTERNATE DESIGN IS EQUIVALENT IN EFFECTIVENESS AND PERFORMANCE. AND PROVIDES FOR POSITIVE SITE DRAINAGE.

C. FOUNDATION NOTES

C.1 FOUNDATION ANCHORAGE (IRC R403.1.6)

- SILL PLATES SHALL BE BOLTED TO THE FOUNDATION WALL WITH A MINIMUM 1/2" DIAMETER ANCHOR BOLTS EMBEDDED AT LEAST 7" INTO THE CONCRETE.
- BOLTS SHALL BE SPACED NO GREATER THAN 6'-0" O.C.
- THERE SHALL BE A MINIMUM OF TWO BOLTS PER PLATE SECTION, WITH A BOLT PLACED WITHIN 12" AND NOT CLOSER THAN 7 BOLT DIAMETERS OF THE END OF EACH PLATE SECTION.
- A PROPERLY SIZED NUT AND WASHER SHALL BE TIGHTENED ON EACH BOLT TO THE PLATE. (NOTE: 7" EMBEDMENT + 1-1/2" SILL PLATE + 3/4" FOR NUT AND WASHER EQUALS A 9-1/4" LONG BOLT).
- WALL BRACING METHODS (IRC R602) MAY REQUIRE ADDITIONAL ANCHORAGE.

C.2 CONCRETE SLABS

- CONCRETE SLABS PLACED ON FILL MATERIAL WHICH SHALL BE COMPARED TO ENSURE UNIFORM SUPPORT OF THE SLAB AND SHALL NOT EXCEED 24" OF COMPACTED GRANULATED MATERIAL (SAND OR GRAVEL) OR 8" OF EARTH:
 - THIS MAY OCCUR AT GARAGE FLOOR FILLS, OR OVER EXCAVATED AREAS UNDER FLOOR SLABS.
- THE DESIGN AND INSTALLATION DETAILS IN THIS DOCUMENT (WHERE APPLICABLE BASED ON SIZE AND SPACING LIMITATIONS) MAY BE USED IN LIEU OF PROVIDING A SEPARATE DESIGN.
- STRUCTURAL SLABS EXCEEDING THE SPANS AND CONDITIONS OF THE APPROVED DETAILS SHALL BE DESIGNED BY A PROFESSIONAL ENGINEER.
- SLABS AT MAX 4'-0" OVER-DIG ADJACENT TO FOUNDATION WALL:
 - WHERE SOIL IS EXCAVATED FOR A MAXIMUM DIMENSION OF 4'-0" HORIZONTALLY ADJACENT TO A FOUNDATION WALL, THE STANDARD OVER-DIG DETAIL MAY BE USED IN LIEU OF A COMPLETE STRUCTURAL SLAB.
 - SEE "TYPICAL FOOTING/FOUNDATION WALL/STANDARD SLAB AT MAX 4'-0" OVER-DIG" DETAIL.

C.3 VAPOR RETARDER / BARRIER (IRC R506.2.3)

- A 6 MILLIMETER POLYETHYLENE OR APPROVED VAPOR RETARDER WITH JOINTS LAPPED A MINIMUM OF 6" IS REQUIRED BETWEEN THE CONCRETE FLOOR SLAB AND THE BASE COURSE OR PREPARED SUBGRADE. (NOT REQUIRED FOR GARAGE SLABS OR DETACHED UNHEATED ACCESSORY BUILDINGS).

C.4 FOOTINGS

- THE BOTTOM OF ALL FOOTINGS SHALL EXTEND NOT LESS THAN 36" BELOW GRADE FOR FROST PROTECTION (IRC R403.1.4).
- FOOTINGS FOR FREESTANDING ACCESSORY STRUCTURES WITH AN AREA OF 600 SQ. FT. OR LESS AND AN EAVE HEIGHT OF 10'-0" OR LESS SHALL EXTEND BELOW GRADE A MINIMUM OF 12".
- EXTERIOR WALLS, BEARING WALLS, COLUMNS AND PIERS SHALL BE SUPPORTED ON CONTINUOUS SOLID MASONRY OR CONCRETE FOOTINGS, OR APPROVED STRUCTURAL SYSTEM TO SAFELY SUPPORT THE IMPOSED LOADS AND SHALL BE SIZED AND REINFORCED IN ACCORDANCE WITH THIS STANDARD OR SHALL BE ENGINEERED DESIGN.
- FOOTINGS UNDER FOUNDATION WALLS SHALL BE CONTINUOUS AROUND THE STRUCTURE AND FROM ONE LEVEL TO THE NEXT.
- THE CONTINUOUS TRANSITIONS BETWEEN FOOTINGS AT DIFFERENT LEVELS ENCLOSING USABLE SPACE SHALL BE MADE BY APPROVED SOLID JUMPS OR SUPPORT SYSTEMS TO PROVIDE SAFE SUPPORT OF THE STRUCTURE.
- SEE "TYPICAL FOOTING/FOUNDATION WALLS/STANDARD SLAB AT MAXIMUM 4' OVER-DIG" AND "FOOTING JUMP" DETAILS.

C.5 CONCRETE

- ALL CONCRETE CONSTRUCTION SHOULD CONFORM TO ACI 318-14 (OR ACI 332) OR 2018 IRC.
- THE MINIMUM CONCRETE 28 DAY COMPRESSIVE STRENGTH SHALL BE AS SPECIFIED IN IRC TABLE R402.2.

C.5 CONCRETE (CONT.)

- CONCRETE MIX TO UTILIZE A MAXIMUM WATER-CEMENT MATERIALS RATIO OF 0.45 FOR ALL APPLICATIONS. ADMIXTURES SHALL NOT CONTAIN ANY CHLORIDES.
- CONCRETE POURED AGAINST AN EXISTING SURFACE SHOULD BE ROUGHENED TO A MINIMUM OF 1/4 INCH AMPLITUDE.
- REBAR PLACEMENT SHALL BE AS FOLLOWS:
 - CONCRETE CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH 3/0 IN CLR
 - CONCRETE EXPOSED TO EARTH OR WEATHER 1.5 IN CLR
 - NOT EXPOSED TO WEATHER OR GROUND
 - 1) SLABS, WALLS, JOISTS 3/4 IN CLR
 - 2) BEAMS, COLUMNS 1.5 IN CLR
- CONCRETE MIX DESIGN SHALL BE 6% (+1%) AIR-ENTRAINED FOR GARAGE SLABS, FOOTINGS, WALLS, OR FLATWORK EXPOSED TO WEATHER
- SHORING AND SUPPORTING FORMWORK SHALL NOT BE REMOVED FROM HORIZONTAL MEMBERS BEFORE CONCRETE STRENGTH REACHES 70% OF STRENGTH DETERMINED BY CYLINDERS OR 28 DAYS.
- ALL FOUNDATION WALLS ENCLOSING BELOW GRADE SPACE SHALL BE DAMPROOFED. THE DAMPROOFING SHALL EXTEND FROM THE EDGE OF THE FOOTING TO THE FINISHED GRADE. (IRC R406.1)

C.6 CONCRETE WALLS WITH REINFORCEMENT STEEL

- REINFORCING STEEL SHALL CONFORM TO ASTM A615, GRADE 40.
- SMOOTH BARS OR WELDED WIRE FABRIC SHALL CONFORM TO ASTM 185.
- 90 DEG. HOOK SHOWN IN DRAWINGS SHALL BE STANDARD PER ACI 318-14.
 - STRAIGHT EXTENSION LENGTH = 12X BAR DIA.
 - BEND DIAMETER = 12X BAR DIA.
- HOOKED DOWELS:
 - HOOKED DOWELS FROM FOUNDATIONS TO WALL SHALL BE PROVIDED TO MATCH VERTICAL WALL REINFORCING AND EXTENDED TO 3" CLEAR FROM BOTTOM OF FOUNDATION.
 - HOOKED DOWELS MATCH SLAB REINFORCING FROM SLAB TO WALLS OR SLAB TO FOUNDATION.
- PROVIDE (2) - #5 BARS AROUND PERIMETER OF ALL SUSPENDED SLABS.
- WHERE SPLICES ARE NECESSARY IN REINFORCEMENT, THE LENGTH OF LAP SPlice SHALL BE IN ACCORDANCE WITH TABLE R608.5.4(1) AND FIGURE R608.5.4(1). THE MAXIMUM GAP BETWEEN ADJACENT PARALLEL BARS AT A LAP SPlice SHALL NOT EXCEED THE SMALLER OF ONE-FIFTH THE REQUIRED LAP LENGTH AND 6 INCHES (152MM) [SEE FIGURE R608.5.4.(1)].
- TOP HORIZONTAL REINFORCEMENT SHALL BE PLACED WITHIN 12" FROM THE TOP OF THE WALL.
- HORIZONTAL WALL REINFORCEMENT SHALL TERMINATE AT THE END OF THE WALL WITH A STANDARD HOOK

C.7 COLD WEATHER CONCRETE

- COLD WEATHER IS DEFINED AS THREE CONSECUTIVE DAYS WHERE THE AVERAGE DAILY TEMPERATURE DROPS BELOW 40 DEGREES FAHRENHEIT AND NOT ABOVE 50 DEGREES FAHRENHEIT FOR MORE THAN HALF OF ANY ONE OF THOSE THREE DAYS.
- COLD WEATHER CONCRETE WORK SHALL CONFORM TO ACI 306.
- ALL MATERIALS AND EQUIPMENT REQUIRED FOR PROTECTION SHALL BE AVAILABLE AT THE PROJECT SITE BEFORE COLD WEATHER CONCRETING BEGINS.
- THE CONCRETE MIX DESIGN PROVIDED BY THE SUPPLIER SHALL AT A MINIMUM REACH THE AVERAGE 28 DAY MIX DESIGN COMPRESSIVE STRENGTH IN MINIMUM 72 HOURS OR 2000 PSI - WHICHEVER IS GREATER.
- THE TEMPERATURE OF CONCRETE AT PLACEMENT SHALL BE A MINIMUM OF 55 DEGREES FAHRENHEIT.
- THE MINIMUM CONCRETE TEMPERATURE AT THE TIME OF MIXING SHALL NOT BE BELOW 65 DEGREES FAHRENHEIT.
- ALL SNOW, ICE AND FROST MUST BE REMOVED PRIOR TO PLACING CONCRETE.
- THE CONTRACTOR SHALL PROVIDE ADEQUATE PROTECTION FOR CONCRETE AGAINST FREEZING AND MAINTAIN A CONCRETE TEMPERATURE OF 55 DEGREES FAHRENHEIT FOR A 72 HOUR PERIOD AFTER CONCRETE PLACEMENT. THIS MAY BE ACHIEVED WITH THE USE OF INSULATING BLANKETS AND/OR THE USE OF TEMPORARY HEATERS.
- GROUND TEMPERATURE AT THE TIME OF PLACEMENT OF SLAB OR FOOTINGS SHALL NOT BE LESS THAN 35 DEGREES FAHRENHEIT.
- INSULATION, FORMS AND HEATERS MAY BE REMOVED AFTER 72 HOURS.
- MAINTAIN ADEQUATE PROTECTION OF SUB GRADE AND ADEQUATE DRAINAGE AWAY FROM EXPOSED CONCRETE ELEMENT TO PREVENT FREEZING.

C.8 FOOTNOTES

- VERTICAL REINFORCEMENT FOR CONCRETE WALLS THAT ARE NOT FULL HEIGHT AND FOR REINFORCEMENT SPACED 24" O.C. MAY BE PLACED IN THE MIDDLE OF THE WALL. OTHER WALLS SHALL HAVE VERTICAL REINFORCEMENT PLACED AS FOLLOWS:
 - 8" WALL - MINIMUM 2" FROM TENSION FACE
 - 10" WALL - MINIMUM 6-3/4" FROM THE OUTSIDE FACE
 - EXTEND BARS TO WITHIN 8" OF THE TOP OF THE WALL
- HORIZONTAL REINFORCEMENT:
 - ONE BAR SHALL BE PLACED WITHIN 12" OF THE TOP OF THE WALL
 - OTHER BARS SHALL BE EQUALLY SPACED WITH SPACING NOT TO EXCEED 24" O.C.
 - HORIZONTAL BARS SHOULD BE AS CLOSE TO THE TENSION FACE AS POSSIBLE (INTERIOR); AND BEHIND THE VERTICAL REINFORCEMENT (I.E. 2" FROM INSIDE FACE)
 - SUPPLEMENTAL REINFORCEMENT AT CORNERS - PLACE 1 #4 REBAR 48" LONG AT 45 DEGREE ANGLE AT CORNERS OF OPENINGS. PLACE REINFORCEMENT WITHIN 6" OF THE EDGE OF INSIDE CORNERS.
 - AT MASONRY LEDGES THE MINIMUM WALL THICKNESS SHALL BE 3-1/2". LEDGES SHALL NOT EXCEED A DEPTH OF MORE THAN 24" BELOW THE TOP OF THE WALL FOR WALL THICKNESS LESS THAN 4". PROVIDE #4 BARS AT MAXIMUM 24" O.C. TO WITHIN 8" OF THE TOP OF THE WALL.
- STRAIGHT WALLS MORE THAN 5'-0" TALL AND MORE THAN 16'-0" LONG SHALL BE PROVIDED WITH EXTERIOR BRACED RETURN WALLS. WALL LENGTH SHALL BE MEASURED USING INSIDE THE SHORTEST DIMENSION BETWEEN INTERSECTING WALLS (SEE TYPICAL DEAD MAN SECTION).

Table with 2 columns: TYPE OR LOCATION OF CONCRETE CONSTRUCTION and MINIMUM SPECIFIED COMPRESSIVE STRENGTH (f'c) FOR SEVER WEATHERING POTENTIAL. Rows include BASEMENT WALLS, BASEMENT SLABS, PORCHES, CARPORT SLABS, and SUSPENDED SLABS.

D. FRAMING/STRUCTURE

D.1 FRAMING NOTES

- ALL NON TREATED LUMBER SIZES ARE DOUGLAS FIR-LARCH #2 OR SOUTHERN YELLOW PINE #1 UNLESS OTHERWISE NOTED.
- ALL TREATED/ROT RESISTANT LUMBER SIZES ARE #2 TREATED SOUTHERN YELLOW PINE, UNLESS OTHERWISE NOTED.
- ALL UNMARKED HEADERS SHALL BE A MINIMUM #2 DOUGLAS FIR-LARCH OR SOUTHERN YELLOW PINE #1 (2) 2X10 ON LOAD BEARING WALLS.
- ALL HEADERS/BEAMS TO BEAR ON A MINIMUM OF (2) 2X4 JACK STUDS UNO. KING STUDS SHALL BE PROVIDED AT ALL HEADERS IN ACCORDANCE WITH IRC TABLE R602.7.5.
- DOUBLE JOIST UNDER PARALLEL INTERIOR NON-LOAD BEARING WALLS.
- CANTILEVERS, OVER BEAMS AND DOOR JAMBS SHALL BE BLOCKED.
- ANY WOOD MEMBER IN CONTACT WITH CONCRETE OR MASONRY (OR THE FURRING THEY ARE ATTACHED TO) SHALL BE OF DECAY RESISTANT MATERIAL.
- IN BEARING WALLS, STUDS WHICH ARE NOT MORE THAN 10'-0" FEET IN LENGTH SHALL BE SPACED NOT MORE THAN IS SPECIFIED IN IRC TABLE R602.3(5) FOR THE CORRESPONDING STUD SIZE. THOSE STUDS GREATER THAN 10'-0" FEET IN LENGTH SHALL BE DESIGNED BY A PROFESSIONAL ENGINEER OR REGISTERED ARCHITECT.

- ALL WOOD STRUCTURAL PANELS SHALL CONFORM TO THE MOST CURRENT APPLICABLE SPECIFICATION AND SUPPLEMENTS OF THE APA OR EQUIVALENT. ALL PANEL END JOINTS SHALL OCCUR OVER SUPPORTS AND SHALL BE STAGGERED ONE HALF PANEL LENGTH FROM ADJACENT PANELS. PROVIDE 1/8" INCH SPACE AT PANEL ENDS. WOOD STRUCTURAL PANEL MOISTURE CONTENT SHALL BE LESS THEN OR EQUAL TO 16%.

- ALL STRUCTURAL FRAMING MEMBERS SHALL BE AS FOLLOWS UNO:
 - 2X4 OR 2X6 EXTERIOR WALLS AS PERMITTED BY CODE: DOUGLAS FIR-LARCH #2 (DF-L #2), SOUTHERN YELLOW PINE #1 OR BETTER.
 - EXTERIOR WALLS TO BE CONTINUOUSLY SHEATHED WITH MIN. 7/16" OSB., UNLESS BRACING IS SHOWN ON PLANS
 - EXTERIOR OSB SHEATHING TO BE FASTENED WITH 8D COMMON NAILS; 6" O. C. AT PANEL EDGES; 12" O. C. IN THE FIELD.
 - 2X4 OR 2X6 INTERIOR LOAD BEARING WALLS DF-L #2 OR BETTER.
 - LOAD BEARING, BRACED, AND SHEAR WALLS, REQUIRE A DOUBLE TOP PLATE. THE TOP PLY BEING FIELD APPLIED WITH A MIN. 24" LAP SPlice
 - FIELD APPLIED LAP SPliced TOP PLATE: DF-L #2 OR BETTER
 - LOAD BEARING HEADERS PER HEADER SCHEDULE OR AS SHOWN ON FRAMING PLANS.
 - LOAD BEARING HEADERS TO BE FABRICATED WITH THE HEADER AT THE UNDER SIDE OF THE TOP PLATE WITH CRIPPLE FRAMING BELOW AS NEEDED UNO.
 - INTERIOR NON LOAD BEARING WALLS: DF-L #2 STUD GRADE OR BETTER
 - DOUBLE TOP PLATE IS NOT REQUIRED FOR INTERIOR NON LOAD BEARING WALLS
 - HEADER CRIPPLE SPACING CAN BE 24" O. C. REGARDLESS OF WALL STUD SPACING FOR NON LOAD BEARING WALLS
 - CRIPPLE FRAMING NOT REQUIRED ABOVE OR BELOW OPENINGS WHERE THE VERTICAL CLEAR HEIGHT IS 22" OR LESS FOR NON-LOAD BEARING WALLS.

- ALL LUMBER IN CONTACT WITH MASONRY OR OTHERWISE EXPOSED TO WEATHERING TO BE PRESSURE TREATED (PT).
 - FIELD APPLIED SILL PLATE: TREATED LUMBER
 - BOTTOM (SOLE) PLATE IN CONTACT WITH MASONRY: TREATED LUMBER

- ALL PRESSURE TREATED WOOD SHALL BE PRESSURE TREATED WITH WATER-BORNE PRESERVATIVES. PRESSURE TREATMENT SHALL COMPLY WITH THE REQUIREMENTS OF AWPB, C2, LP-22, AND IRC SECTION R317. ALL LUMBER < 6" ABOVE THE FINISHED GRADE SHALL BE PRESSURE TREATED.

- FASTENERS, INCLUDING NUTS AND WASHERS, FOR PRESSURE TREATED WOOD SHALL BE HOT-DIPPED, ZINC-COATED GALVANIZED STEEL, STAINLESS STEEL, SILICON BRONZE OR COPPER. COATING TYPES AND WEIGHTS FOR CONNECTORS IN CONTACT WITH PRESSURE TREATED WOOD SHALL BE IN ACCORDANCE WITH THE CONNECTOR MANUFACTURER'S RECOMMENDATIONS. IN THE ABSENCE OF MANUFACTURER'S RECOMMENDATIONS, A MIN. OF ASTM A653 TYPE G185 ZINC-COATED GALVANIZED STEEL, OR EQUIVALENT, SHALL BE USED. FOR EXCEPTIONS, REFER TO R317.3.1.

Table: ENGINEERED LUMBER MINIMUM DESIGN REQUIREMENTS. Columns: Fc (PSI), E (PSI), Fv (PSI). Rows: LVL, GLU-LAM.

D.2 STRUCTURAL STEEL

- STEEL DESIGN, FABRICATION, AND ERECTION SHALL CONFORM WITH AMERICAN INSTITUTE OF STEEL CONSTRUCTION.
- STEEL PIPE COLUMNS SHALL BE A MINIMUM OF SCHEDULE 40.
- STEEL GRADE AND SPECIFICATION SHALL BE AS FOLLOWS:
 - HOLLOW STRUCTURAL SECTIONS: ASTM A500 (Fy = 46 KSI)
 - CHANNELS, PLATES, ANGLES, AND COLUMNS: ASTM A36 (Fy = 36 KSI)
 - WIDE FLANGES: ASTM A992 (Fy = 50 KSI)
 - STEEL PIPE COLUMN: ASTM A53 GR.B (Fy = 35 KSI)
 - ANCHOR RODS: ASTM F1554 (Fy = 36 KSI)
- BOLTS SHALL CONFORM TO ASTM A307
- WELDING SHALL CONFORM TO THE AWS CODES FOR BUILDING CONSTRUCTION, WELDING SHALL BE PERFORMED IN ACCORDANCE TO WELDING PROCEDURE SPECIFICATIONS (WPS) AS REQUIRED IN AWS D1.1. THE WPS VARIABLES SHALL BE WITHIN THE PARAMETERS ESTABLISHED BY THE FILLER-METAL MANUFACTURER.
- WELDS SHALL USE E70XX ELECTRODES AND A MINIMUM OF 3/16" SIZE UNLESS NOTED OTHERWISE.
- ALL WELDS SPECIFIED AS FIELD WELDS MAY BE SHOP WELDED AT THE CONTRACTOR'S OPTION IF ERECTION CAN STILL BE EXECUTED.

E. GLAZING

- GLAZING IN HAZARDOUS LOCATIONS AS IDENTIFIED IN IRC R308.4 SHALL BE OF APPROVED SAFETY GLAZING MATERIALS.
 - GLASS IN STORM DOORS: INDIVIDUAL FIXED OR OPERABLE PANELS ADJACENT TO A DOOR WHERE THE NEAREST VERTICAL EDGE OF THE GLAZING IS WITHIN A 24" ARC OF EITHER VERTICAL EDGE OF THE DOOR IN A CLOSED POSITION AND WHERE THE BOTTOM EDGE OF THE GLAZING IS LESS THAN 60" ABOVE THE FLOOR.
 - GLAZING ADJACENT TO THE LANDING AT THE BOTTOM OF THE STAIRWAY WHERE THE GLAZING IS LESS THAN 36 INCHES ABOVE THE LANDING AND WITHIN A 60 IN HORIZONTAL ARC LESS THAN 180 DEGREES FROM THE BOTTOM TREAD NOSING SHALL BE CONSIDERED A HAZARDOUS LOCATION.
- GLAZING IN WALLS, ENCLOSURES OR FENCES CONTAINING OR FACING HOT TUBS, SPAS, WHIRLPOOLS, SAUNAS, STEAM ROOMS, BATHTUBS, SHOWERS, AND INDOOR OR OUTDOOR SWIMMING POOLS WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60" MEASURED VERTICALLY ABOVE ANY STANDING OR WALKING SURFACE.
- WINDOW FALL PROTECTION SHALL BE PROVIDED IN ACCORDANCE WITH IRC R312.2.

F. STAIRWAYS

- STAIRWAYS SHALL PROVIDE A MAXIMUM 7-3/4" RISE AND A MINIMUM 10" RUN.
- REQUIRED GUARD RAILS AT OPEN-SIDED WALKING SURFACES, INCLUDING STAIRS, PORCHES, BALCONIES, OR LANDINGS, SHALL NOT BE LESS THAN 36" HIGH MEASURED VERTICALLY ABOVE THE ADJACENT WALKING SURFACE.
 - EXCEPTION (1): GUARD RAILS ON THE OPEN SIDES OF STAIRS SHALL HAVE A HEIGHT NOT LESS THAN 36" MEASURED VERTICALLY FROM A LINE CONNECTING THE LEADING EDGES OF THE TREADS.
 - EXCEPTION (2): WHERE THE TOP OF THE GUARD ALSO SERVES AS A HANDRAIL ON THE OPEN SIDES OF STAIRS, THE TOP OF THE GUARD SHALL NOT BE LESS THAN 34" AND NOT MORE THAN 38" MEASURED VERTICALLY FROM A LINE CONNECTING THE LEADING EDGES OF THE TREADS.
- GUARD RAIL ENCLOSURES SHALL HAVE INTERMEDIATE RAILS OF ORNAMENTAL PATTERNS THAT DO NOT ALLOW PASSAGE OF A SPHERE 4" IN DIAMETER.
- EACH STAIRWAY OF FOUR OR MORE RISERS SHALL PROVIDE A CONTINUOUS HANDRAIL ON AT LEAST ONE SIDE BETWEEN 34" AND 38" ABOVE THE NOSING OF THE TREADS.
- HANDRAILS SHALL HAVE A CIRCULAR CROSS SECTION OF 1-1/4" TO 2" OR OTHER APPROVED GRASPABLE SHAPE PER IRC R311.7.8.5.
- MINIMUM 6'-8" OF HEADROOM CLEARANCE IS REQUIRED IN STAIRWAYS.
- ENCLOSED ACCESSIBLE SPACE UNDER STAIRWAYS SHALL HAVE WALLS AND THE UNDERSIDE OF THE STAIR AND LANDING PROTECTED WITH 1/2" GYPSUM BOARD ON ENCLOSURE PER IRC R302.7.

G. GARAGES

- THE GARAGE FLOOR SHALL SLOPE 1/8" PER 12" TO DRAIN OR VEHICLE ENTRY DOORWAYS.
- DOORS BETWEEN THE GARAGE AND THE DWELLING TO BE: SELF CLOSING, MINIMUM 1-3/8" SOLID CORE OR HONEYCOMBED STEEL DOOR, AND AT LEAST 20 MINUTE FIRE RATED.
- THE GARAGE SHALL BE SEPARATED FROM THE DWELLING AND ITS ATTIC AREAS BY A MINIMUM 1/2" GYPSUM BOARD APPLIED TO THE GARAGE SIDE WHERE A FLOOR/CEILING SPACE IS PROVIDED ABOVE.
- THE GARAGE COLUMNS AND BEAMS SUPPORTING THE SEPARATION SHALL ALSO BE PROTECTED WITH 1/2" GYPSUM BOARD OR EQUIVALENT.
- WHERE HABITABLE SPACE OCCURS ABOVE THE GARAGE FLOOR/CEILING ASSEMBLY SHALL BE PROTECTED WITH A MINIMUM 5/8" TYPE "X" GYPSUM BOARD ON THE GARAGE CEILING.
- GARAGE DOOR AND FRAME - THE "H" FRAME FOR THE ATTACHMENT OF THE TRACK AND COUNTER BALANCE SHALL CONSIST OF THE FOLLOWING: 2X6 VERTICAL JAMBS RUNNING FROM THE FLOOR TO CEILINGS, ATTACHED WITH 1-3/4" X 0.120" NAILS AT 7" O.C. STAGGERED WITH (7) 3-1/4" X 0.120" NAILS THROUGH THE JAMB INTO THE HEADER, 2X8 HEADER (MINIMUM) FOR ATTACHMENT OF COUNTER BALANCE SYSTEM.
- GARAGE VEHICLE DOORS AND FRAMES SHALL BE DESIGNED AND INSTALLED TO MEET THE 115 MPH WIND LOAD REQUIREMENT OF DASMA 108 AND ASTM E330-96 (IRC R301.2.1).

H. ROOF

- THE ROOF IS DESIGNED FOR 20 PSF GROUND SNOW LOAD (MINIMUM).
- PROVIDE 2X SOLID BLOCKING SUPPORT BELOW ALL POINT LOADS CONTINUOUS TO BEARING STRUCTURE AND/OR FOUNDATION BELOW.
- ROOF IS ENGINEERED TO COMPLY WITH IRC R802.
- ROOF TO BE ASPHALT SHINGLES UNO AND SHALL COMPLY WITH IRC 2018 SECT. R905.2
- MINIMUM ROOF SLOPE FOR ASPHALT SHINGLES SHALL BE 2:12.
- ROOF SLOPES IN BETWEEN 2:12 AND 4:12 SHALL REQUIRE DOUBLE UNDERLAYMENT IN ACCORDANCE WITH IRC 2018 SECTION R905.2.2.
 - "APPLY A 19-INCH (483MM) STRIP OF UNDERLAYMENT FELT PARALLEL TO AND STARTING AT THE EAVES, FASTENED SUFFICIENTLY TO HOLD IN PLACE. STARTING AT THE EAVE, APPLY 36-INCH-WIDE (914 MM) SHEETS OF UNDERLAYMENT, OVERLAPPING SUCCESSIVE SHEETS 19 INCHES (483MM), AND FASTENED SUFFICIENTLY TO HOLD IN PLACE. END LAPS SHALL BE 4-INCH (102MM) AND SHALL BE OFFSET BY 6 FEET (1829 MM). DISTORTIONS IN THE UNDERLAYMENT SHALL NOT INTERFERE WITH THE ABILITY OF THE SHINGLES TO SEAL."

I. SAFETY REQUIREMENTS

I.1 EMERGENCY EGRESS AND RESCUE


- PROVIDE ONE WINDOW FROM EACH BEDROOM THAT HAS A MINIMUM OPENABLE AREA OF 5.7 SQ. FT. WITH A MINIMUM OPENABLE HEIGHT OF 24" AND WIDTH OF 20".
- BASEMENT EGRESS TO MEET THE REQUIREMENTS OF IRC R310.
- SMOKE AND CARBON MONOXIDE SAFETY (PER IRC R314)
 - PROVIDE SMOKE ALARMS IN EACH SLEEPING ROOM, OUTSIDE OF EACH SLEEPING AREA AND ON EACH FLOOR INCLUDING BASEMENTS.
 - SMOKE ALARMS SHALL BE INTERCONNECTED IN SUCH A MANNER THAT THE ACTUATION OF ONE ALARM WILL ACTIVATE ALL OF THE ALARMS IN THE DWELLING.
 - CARBON MONOXIDE DETECTORS SHALL BE INSTALLED AS REQUIRED PER IRC R315.

J. ENERGY REQUIREMENTS


- THE FOLLOWING SHALL APPLY UNLESS "ECA" SHEETS HAVE BEEN INCLUDED IN THE PLAN SET!
 - LIGHTING FIXTURES PENETRATING THE THERMAL ENVELOPE SHALL BE IC-RATED, LEAKAGE RATED AND SEALED TO THE GYPSUM WALLBOARD AS REQUIRED PER IRC N1102.4.5.
 - PROGRAMMABLE THERMOSTATS SHALL BE INSTALLED AS REQUIRED PER IRC N1103.1.1.
 - AIR HANDLERS SHALL BE RATED FOR MAXIMUM 2% AIR LEAKAGE RATE PER IRC N1103.3.2.1.
 - BUILDING FRAMING CAVITIES SHALL NOT BE USED AS DUCTS OR PLENUMS.
 - HOT WATER PIPES SHALL BE INSULATED AS REQUIRED PER IRC N1103.4.
 - ALL EXHAUST FANS SHALL TERMINATE TO THE BUILDING EXTERIOR AS REQUIRED PER IRC M1504.3.
 - MAKEUP AIR SYSTEMS SHALL BE INSTALLED FOR KITCHEN EXHAUST HOODS THAT EXCEED 400 CFM AS REQUIRED PER IRC M1503.6.
 - AN AIR HANDLING SYSTEM SHALL NOT SERVE BOTH THE LIVING SPACE AND THE GARAGE PER IRC M1601.6 ENERGY CONSERVATION.

K. ABBREVIATIONS


Table with 3 columns: Abbreviation (e.g., AFF, AB, ANCHOR BOLT), Description (e.g., ABOVE FINISHED FLOOR), and Existing/Typical (e.g., EX, FV).

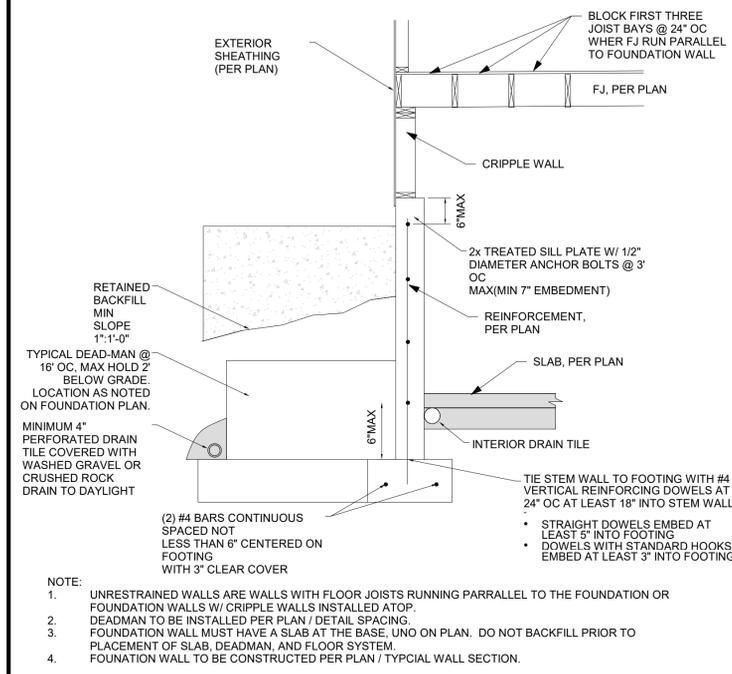


1 TYPICAL "UNRESTRAINED" FOUNDATION WALL DETAIL NTS

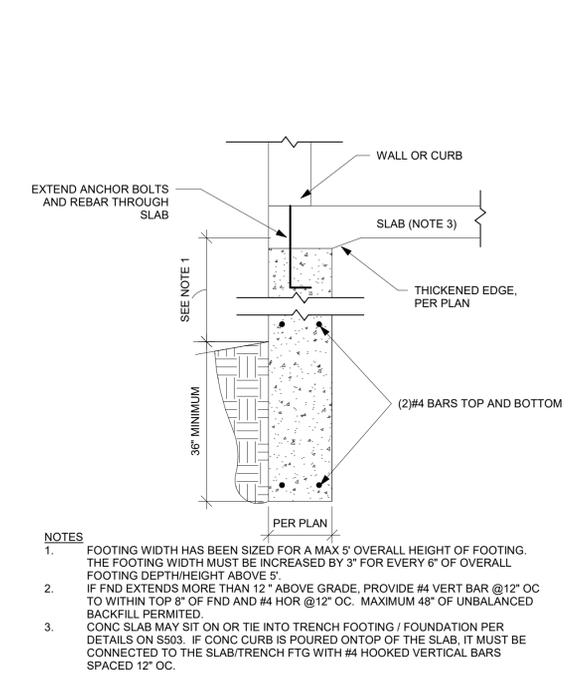


2 TRENCH FOOTING WITH SLAB DETAIL NTS

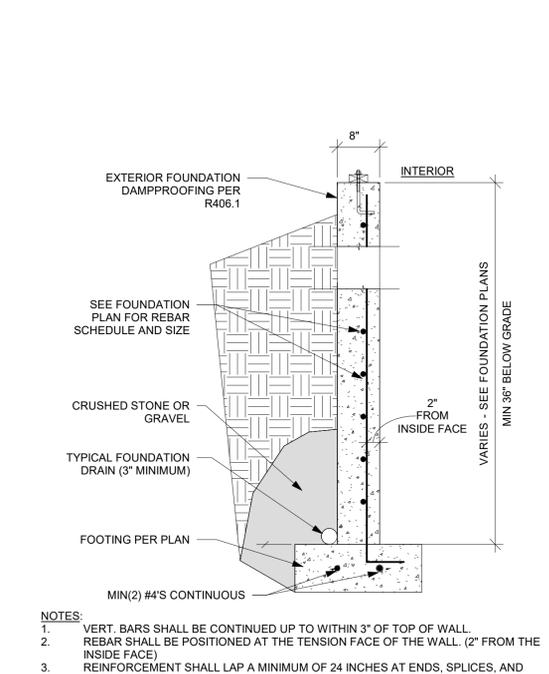


3 TYPICAL WALL SECTION DETAIL NTS

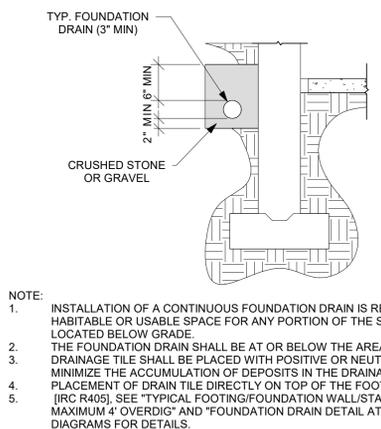


4 FOUNDATION DRAIN AND RAISED SLAB DETAIL NTS

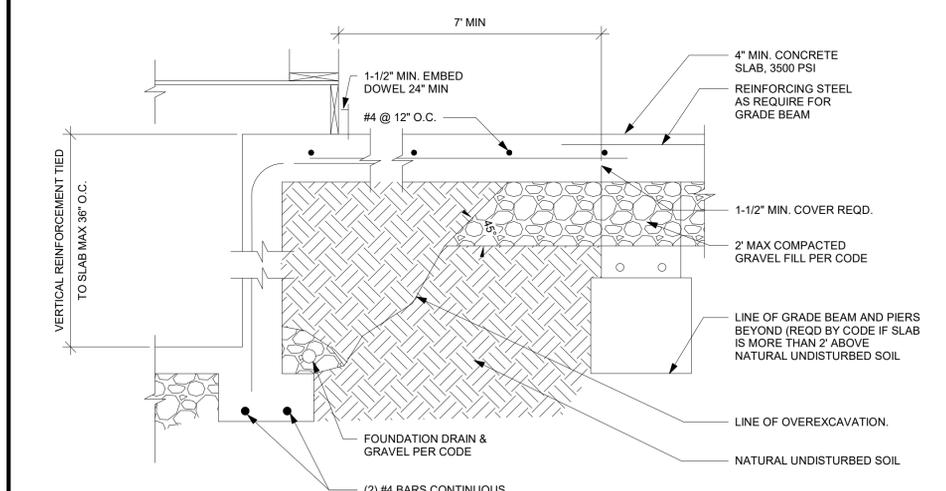


5 TYPICAL FOOTING/FOUNDATION WALL/STANDARD SLAB AT MAX 4' OVERDIG NTS

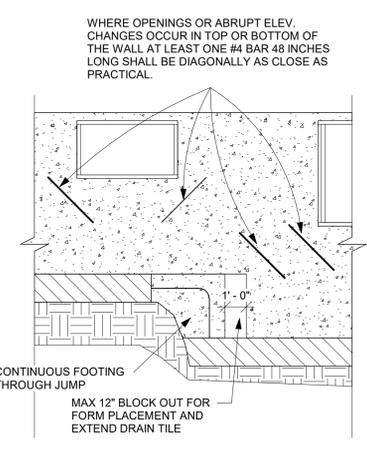


6 FOUNDATION WALL JUMP DETAIL NTS

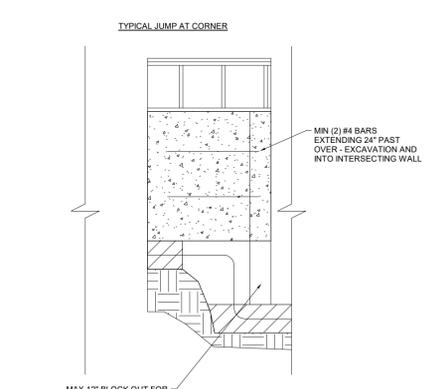

7 FOUNDATION WALL JUMP DETAIL 2 NTS

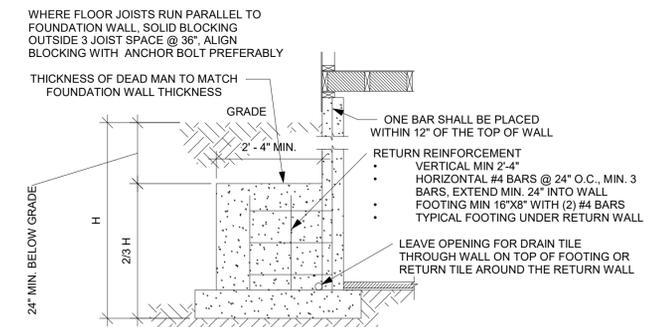


8 TYPICAL DEAD MAN DETAIL NTS

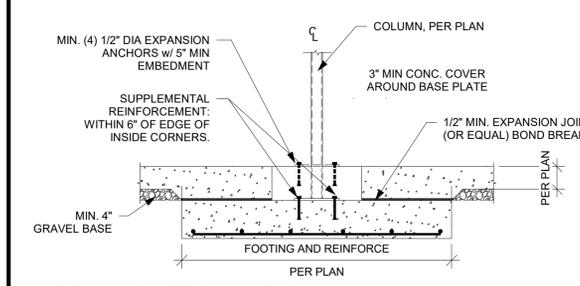


9 TYPICAL ISOLATED COLUMN PAD DETAIL NTS

APPLIES TO BASEMENT SLABS WITH FLOOR SURFACE LESS THAN 12\"/>

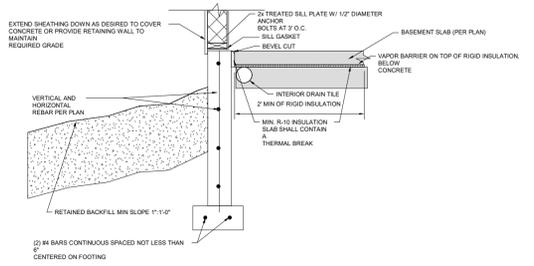


11 SLAB INSULATION DETAIL FOR STEM WALL AND FOOTING NTS


APPLIES TO BASEMENT SLABS WITH FLOOR SURFACE LESS THAN 12\"/>

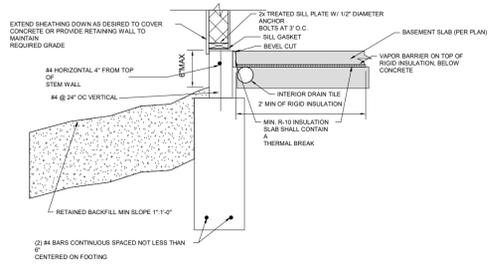

12 SLAB INSULATION DETAIL FOR TRENCH FOOTING WITH STEM WALL NTS

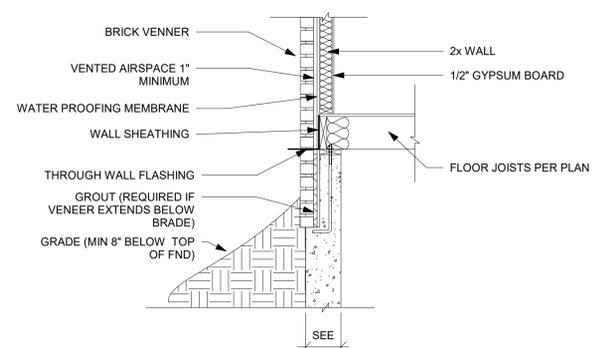

13 BRICK VENEER DETAIL NTS

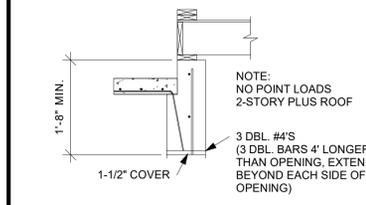

10 6\"/>

| NO. | REVISIONS |
|-----|-----------|
| | |
| | |
| | |

FOUNDATION DETAILS

S501


SUMMIT HOMES

BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082


| NO. | REVISIONS |
|-----|-----------|
| | |
| | |
| | |

GARAGE/SLAB DETAILS


S503

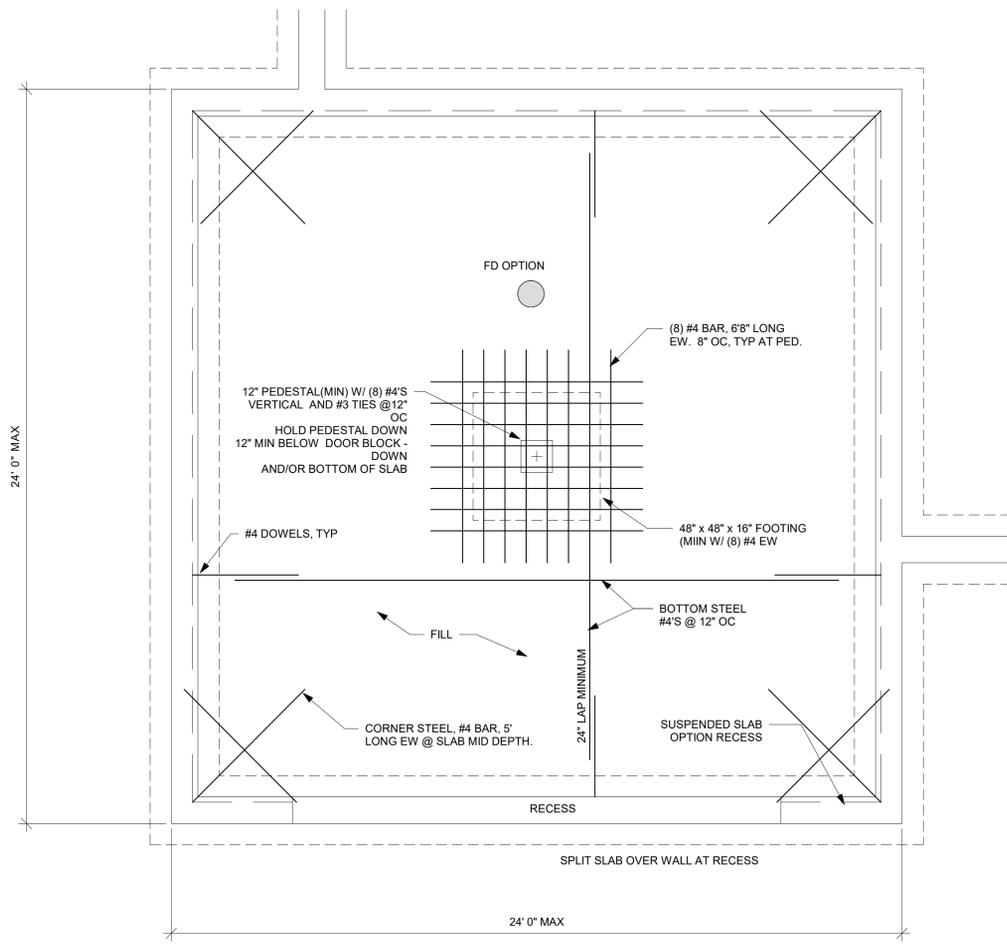


1 2 CAR GARAGE SLAB ON FILL DETAIL
NTS

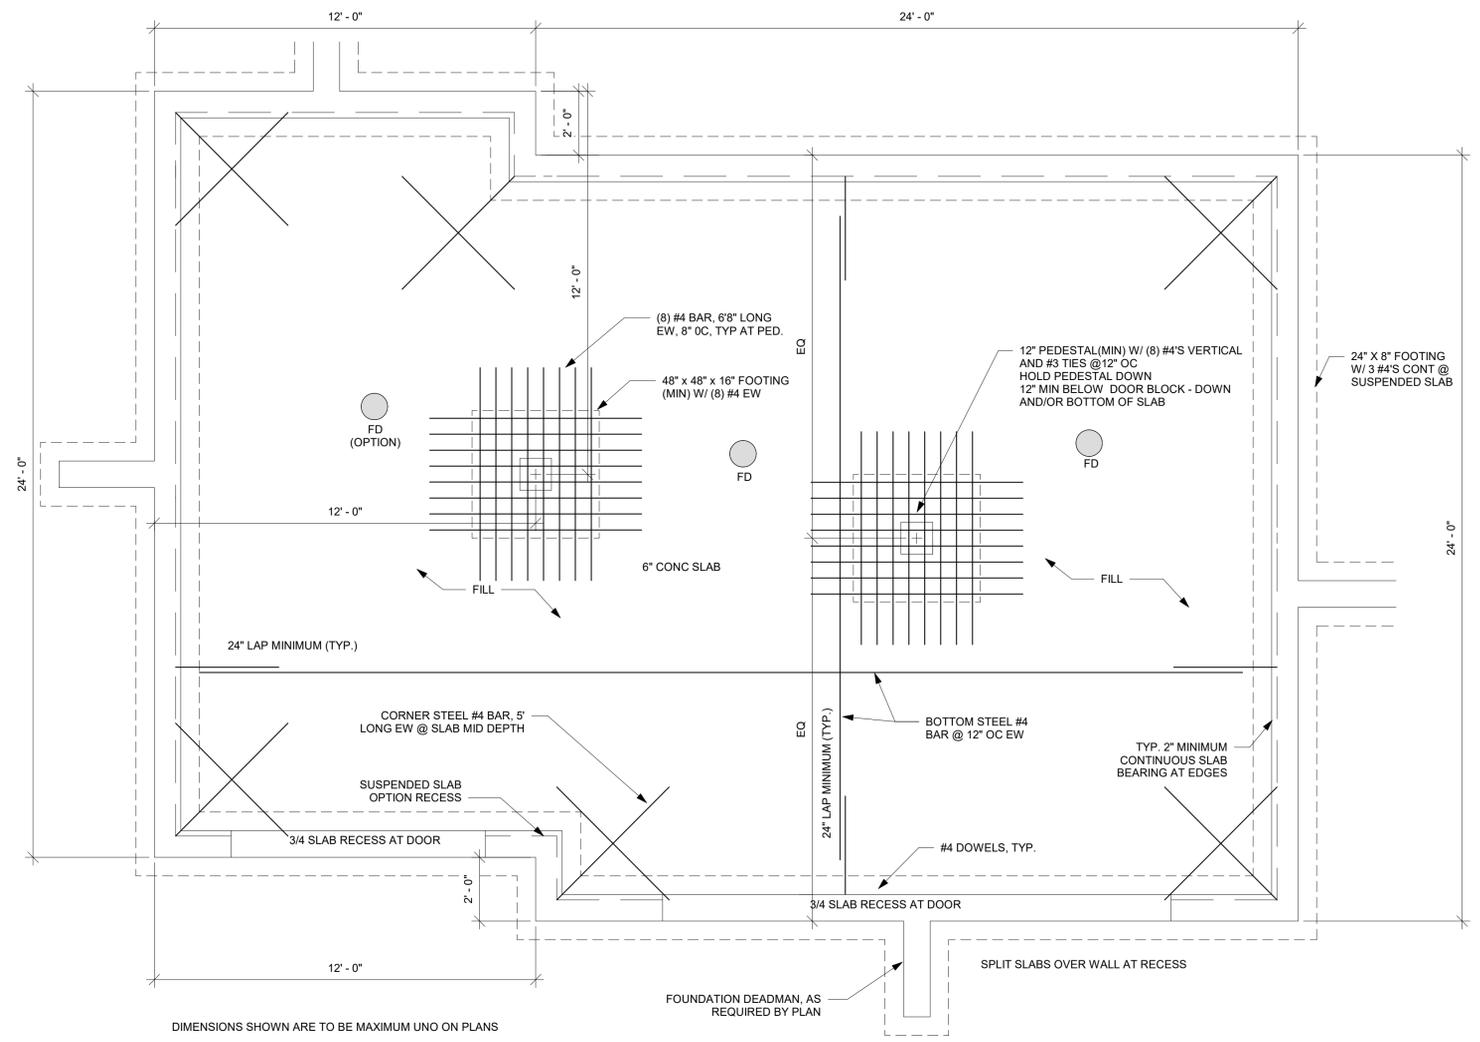


2 3 CAR GARAGE SLAB ON FILL DETAIL 2
NTS

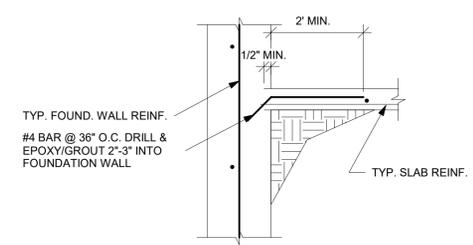


3 SLAB CONNECTION DETAIL
NTS

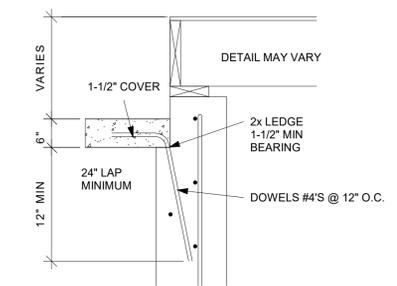

4 SUSPENDED SLAB AT WALL DETAIL
NTS

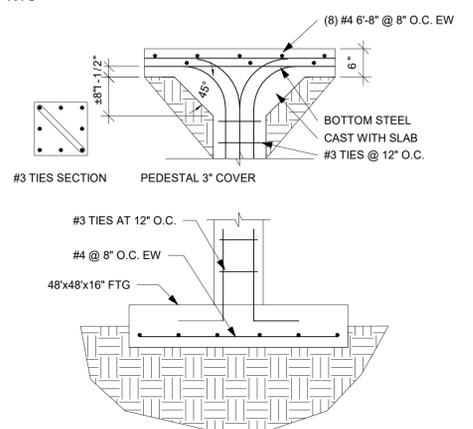

5 PEDESTAL AT SLAB AND FOOTING
DETAIL
NTS

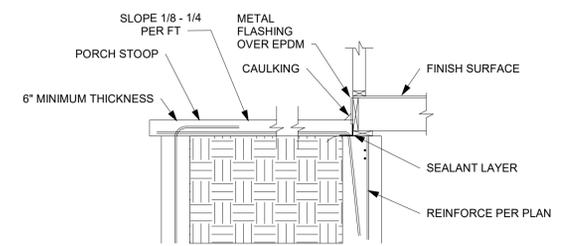


6 STANDARD PORCH SLAB DETAIL
NTS

ELEVATED PORCH SLABS SPANNING 6' OR LESS IN ANY ONE DIRECTION CAN BE CONSTRUCTED AS FOLLOWS:


- MAX SPAN OF 6'
- MINIMUM THICKNESS OF 6"
- #4 BARS AT 12" O.C. EACH WAY
- MINIMUM 1-1/2" OF CONTINUOUS BEARING AT THE EDGES FO THE SLAB.

ELEVATED PORCH SLAB SPANNING GREATER THAN 6' SHALL BE TREATED AS AN ELEVATED GARAGE SLAB.


THE FOLLOWING DETAILS MEET OR EXCEED KCMO CPD-DS AND JOHNSON COUNTY STANDARDS

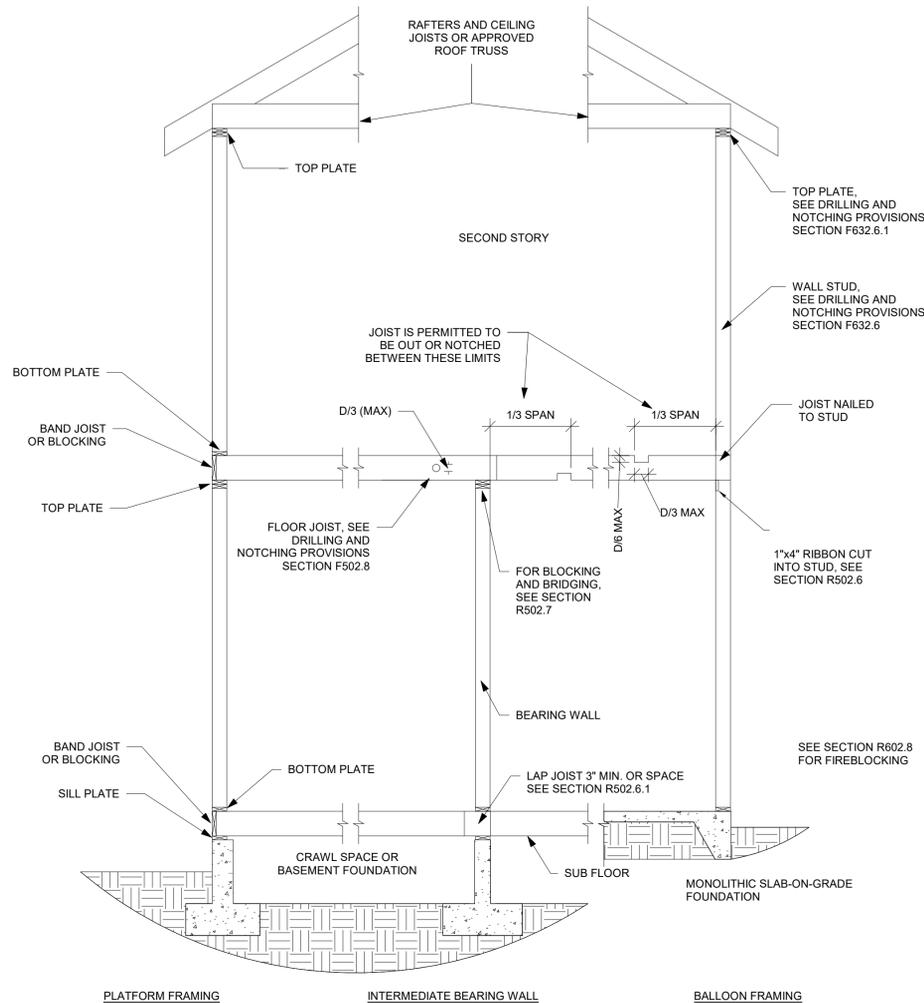


1 TYPICAL WALL, FLOOR, AND ROOF FRAMING DETAIL NTS

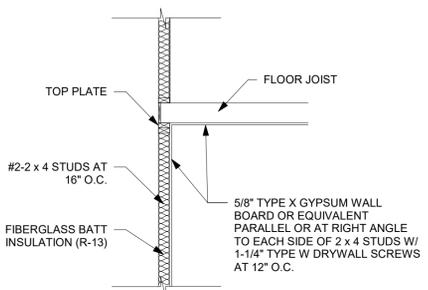


8 GARAGE FIRE SEPERATION DETAIL NTS

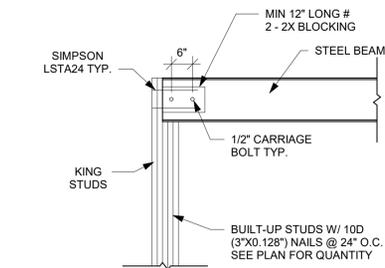



12 STEEL BEAM TO STUD PACK DETAIL NTS

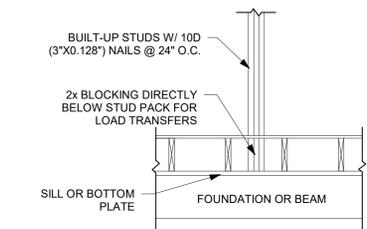


9 BLOCKING DETAIL NTS

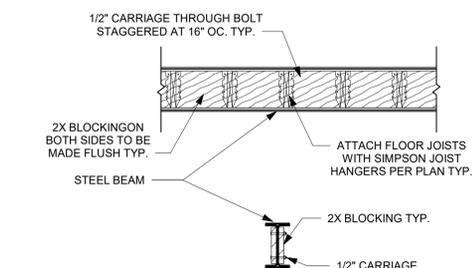


13 FLOOR JOIST TO STEEL BEAM DETAIL NTS

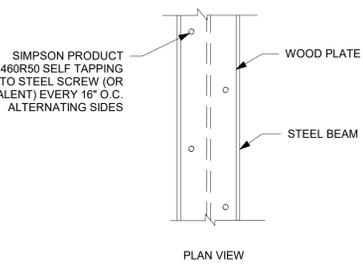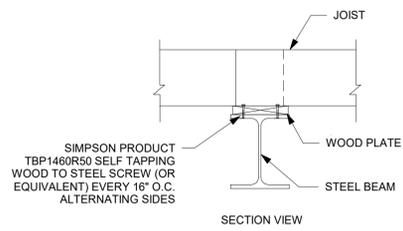


2 WOOD PLATE TO STEEL BEAM CONNECTION DETAIL NTS

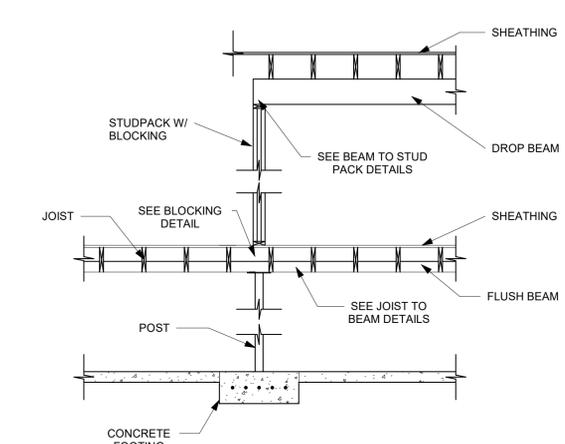


4 POST TO BEAM DETAIL NTS

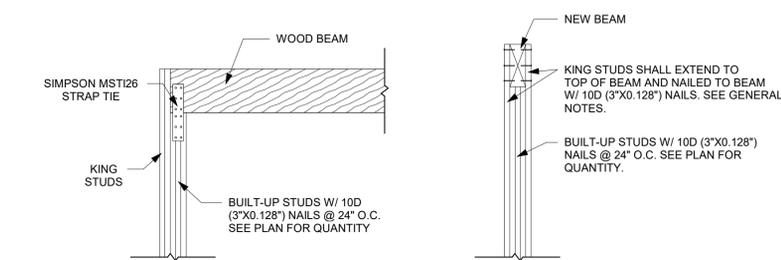

10 BEAM TO STUD PACK PARALLEL TO WALL DETAIL NTS

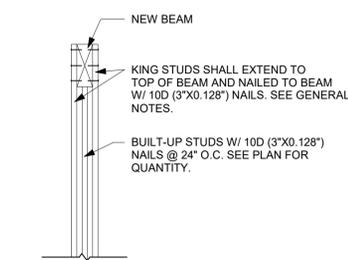


11 BEAM TO STUD PACK PERPENDICULAR TO WALL DETAIL NTS

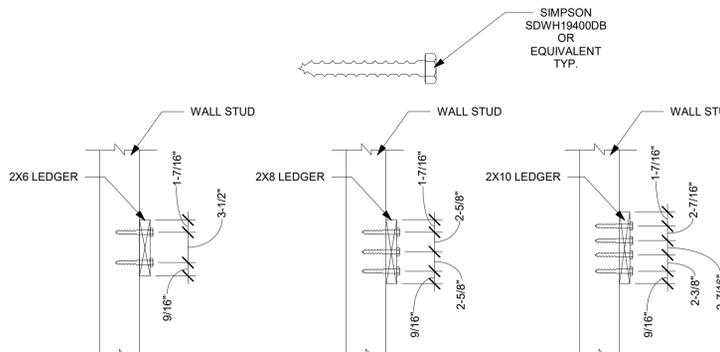


14 WALL LEDGER DETAIL NTS

3 TYPICAL WALL NOTCHING DETAIL NTS

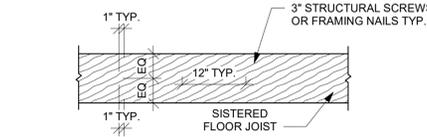


5 SISTERED FLOOR JOISTS DETAIL NTS

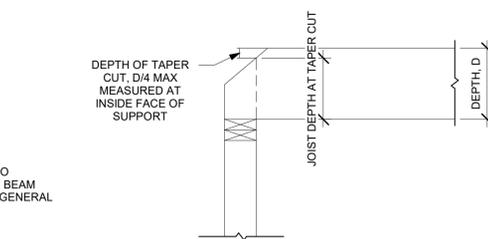


6 UPSET BEAM DETAIL NTS


16 CEILING JOIST TAPER CUT NTS

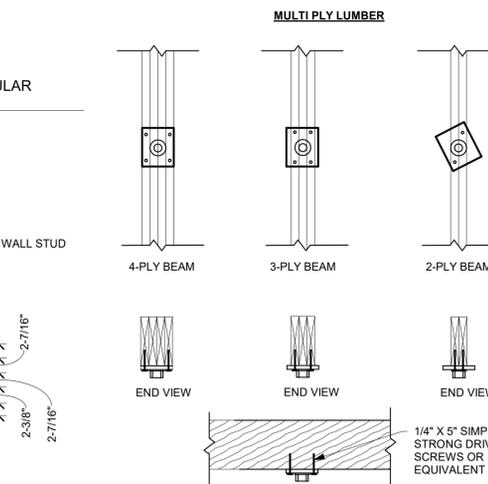

16 POST/BEAM CONNECTION DETAIL NTS

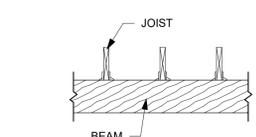

7 DROPPED BEAM DETAIL NTS

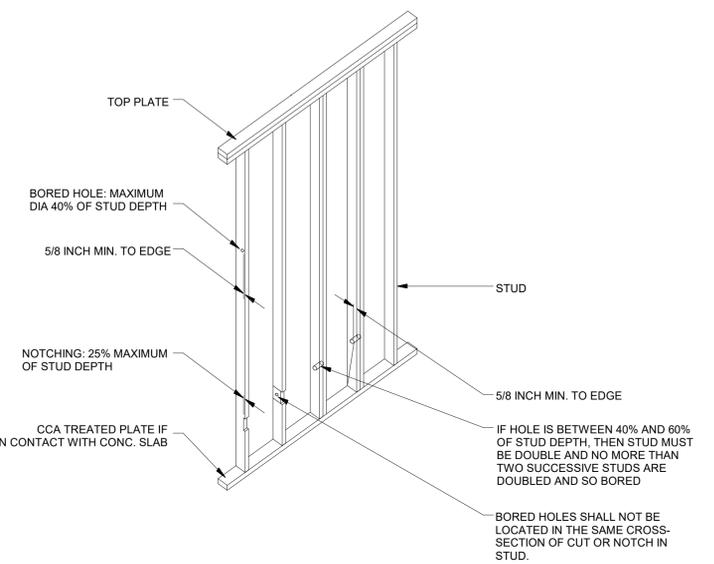

EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES


BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082

| REVISIONS |
|-----------|
| |
| |
| |
| |


FRAMING STANDARDS

S510

DATE 12/22/2025 FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DELETED 03/17/2026 4:26:15

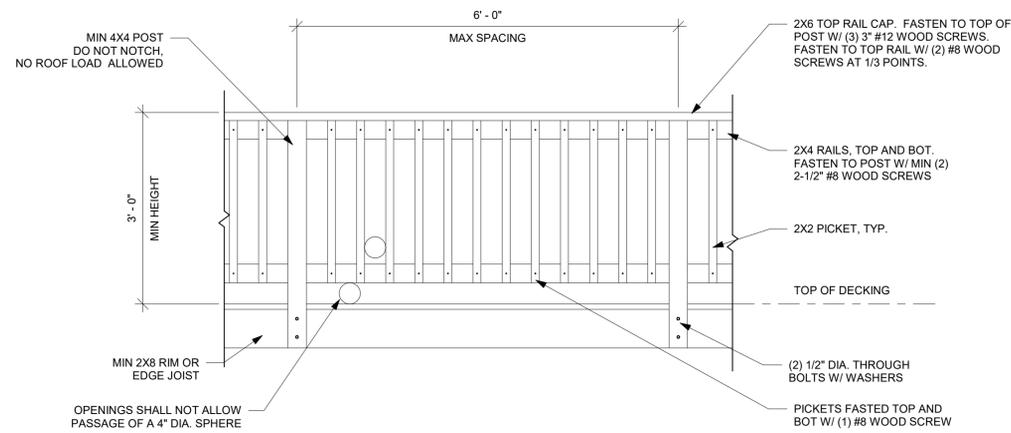


DECK RAILING DETAIL DRAWN TO MEET THE INTENT OF R312 OF THE 2018 IRC AND A CONCENTRATED LOAD OF 200 LBS PER 1607.8.1 OF THE 2018 IBC.

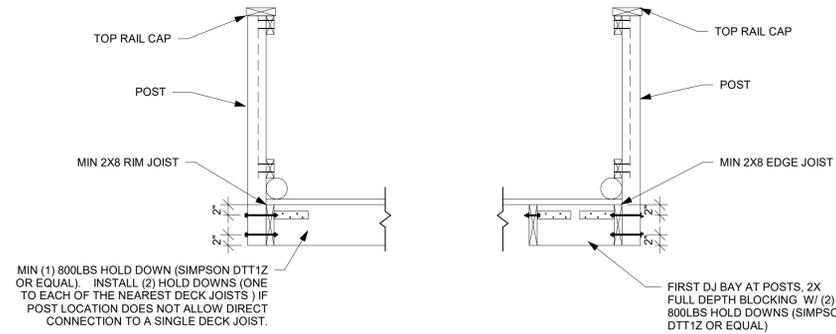


RAILING ATTACHED TO RIM JOIST

RAILING ATTACHED TO EDGE JOIST


1 DECK RAILING
NTS

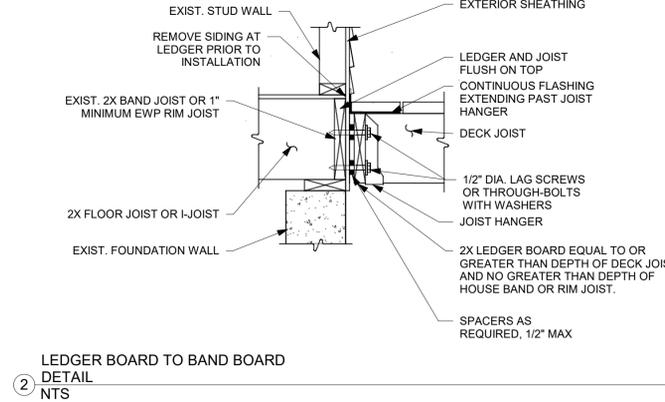


2 LEDGER BOARD TO BAND BOARD
DETAIL
NTS

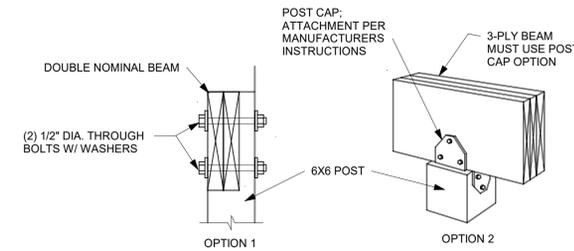


3 TYPICAL POST TO BEAM ATTACHMENT
DETAIL
NTS

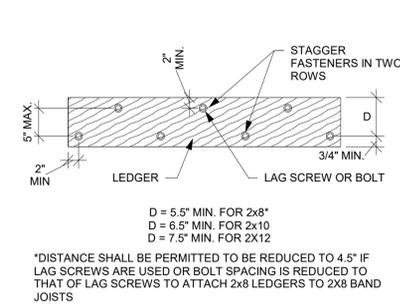

4 DECK LEDGER DIMENSION DETAIL
NTS

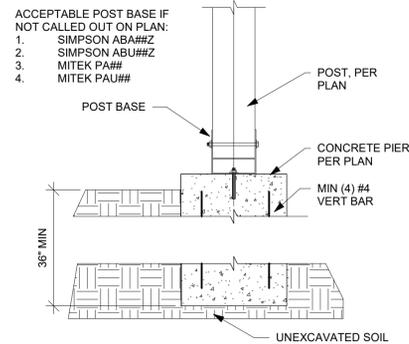

5 POST BASE DETAIL
NTS

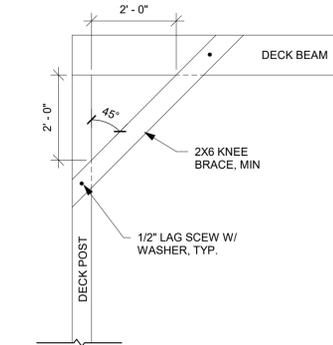

6 KNEE BRACING DETAIL
NTS

| TABLE R507.9.1.3(1) DECK LEDGER CONNECTION TO BAND JOIST (DECK LIVE LOAD = 40 PSF, DECK DEAD LOAD = 10 PSF, SNOW LOAD ≤ 40 PSF) | | | | | | | |
|--|---|------------|-------------|--------------|--------------|--------------|--------------|
| CONNECTION DETAILS | JOIST SPAN | | | | | | |
| | 6' AND LESS | 6'1" TO 8' | 8'1" TO 10' | 10'1" TO 12' | 12'1" TO 14' | 14'1" TO 16' | 16'1" TO 18' |
| | ON-CENTER SPACING OF FASTENERS (INCHES) | | | | | | |
| 1/2" DIAMETER LAG SCREW WITH 1/2" MAXIMUM SHEATHING | 30 | 23 | 18 | 15 | 13 | 11 | 10 |
| 1/2" DIAMETER BOLT WITH 1/2" MAXIMUM SHEATHING | 36 | 36 | 34 | 29 | 24 | 21 | 19 |
| 1/2" DIAMETER BOLT WITH 1" MAXIMUM SHEATHING | 36 | 36 | 29 | 24 | 21 | 18 | 16 |

7 DECK LEDGER CONNECTION TO BAND JOIST (R507.9.1.3(1))
NTS



EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES

BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082



| REVISIONS |
|-----------|
| |
| |
| |

DECK DETAILS


S520

DATE 12/22/2023
SCALE


NOTED ON PLANS REVIEW
03/17/2026 4:26:15

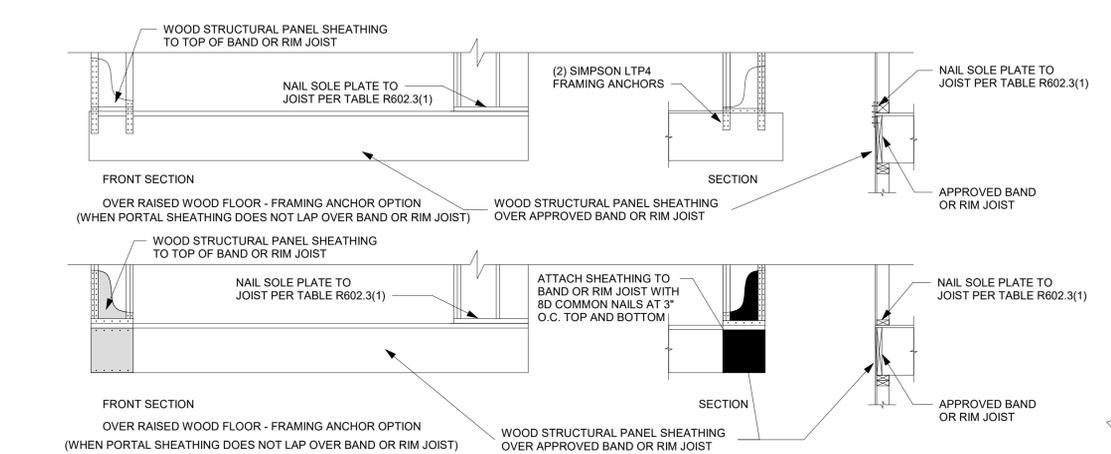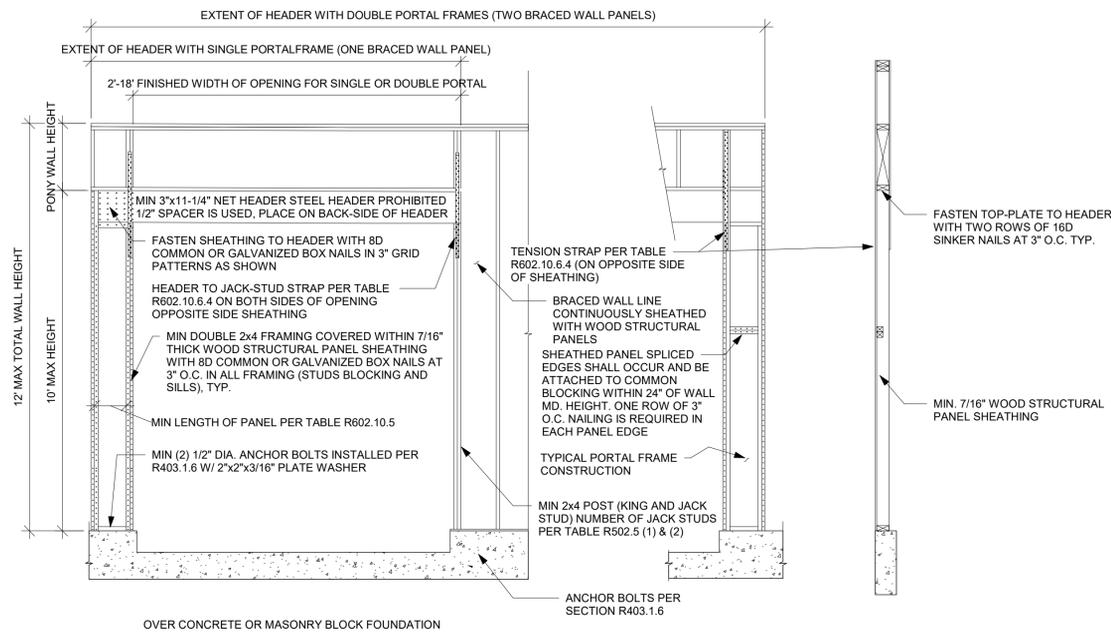


1 BRACING METHOD CS-PF - CONTINUOUSLY SHEATHED PORTAL FRAME PANEL DETAIL NTS

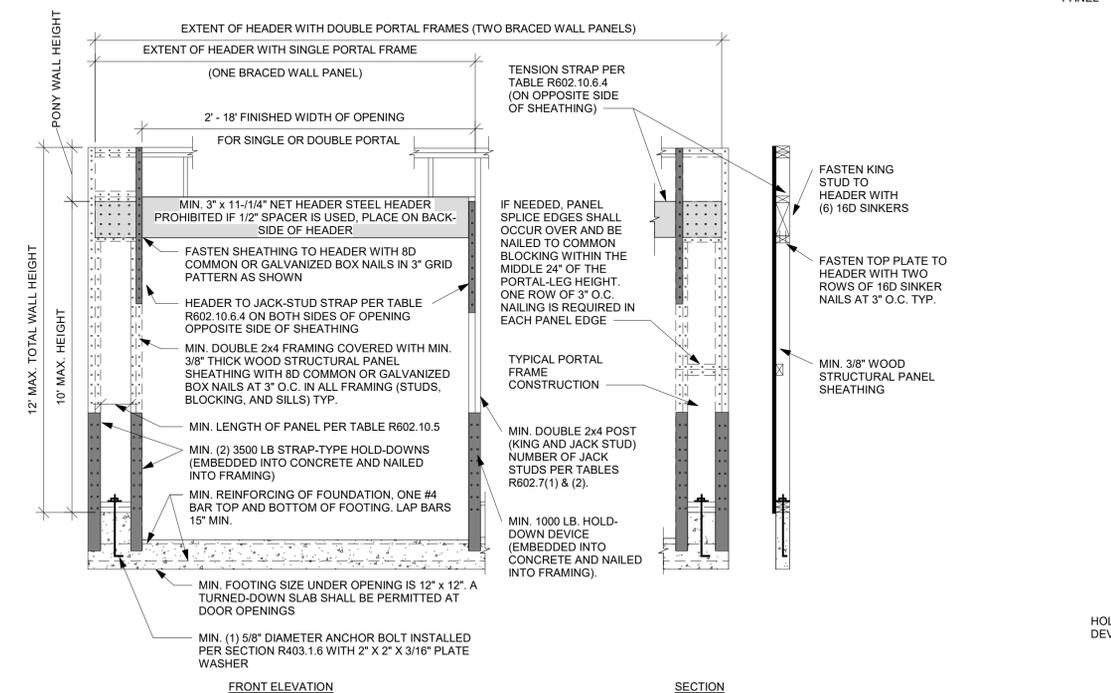


3 BRACING METHOD PFH - PORTAL FRAME WITH HOLD DOWNS DETAIL NTS

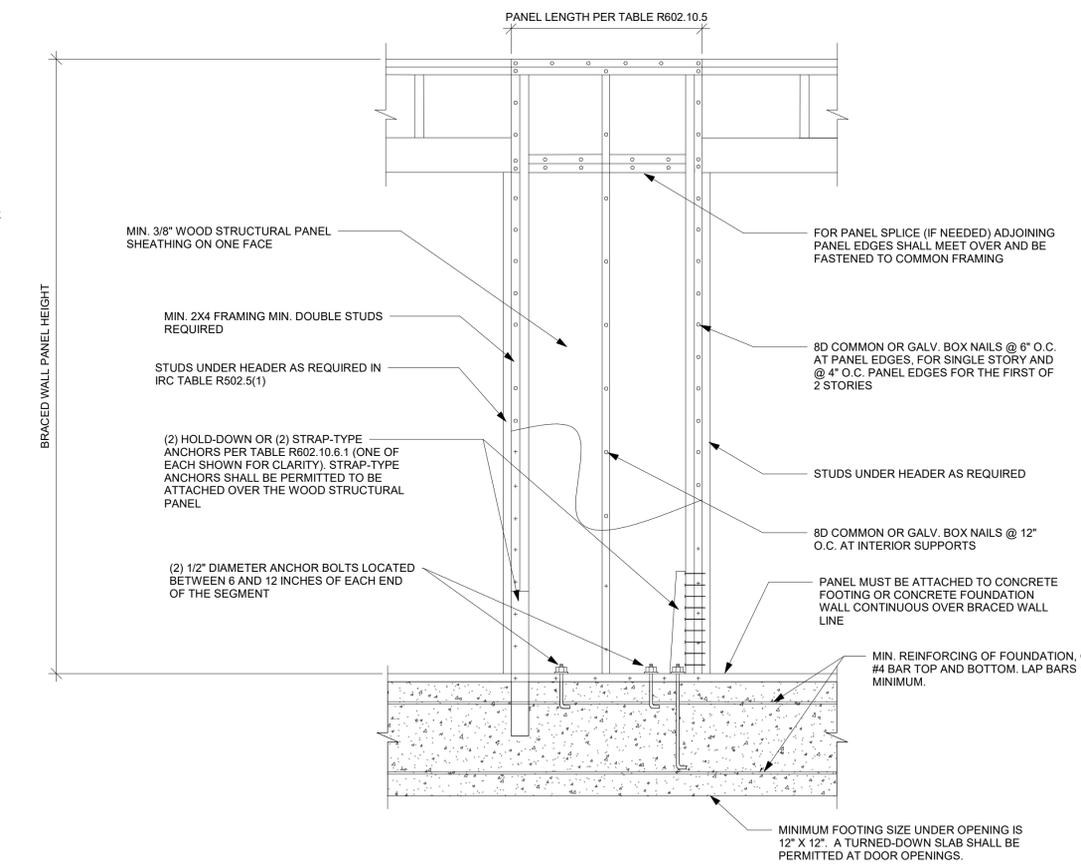


2 BRACING METHOD ABW - ALTERNATE BRACED WALL PANEL DETAIL NTS

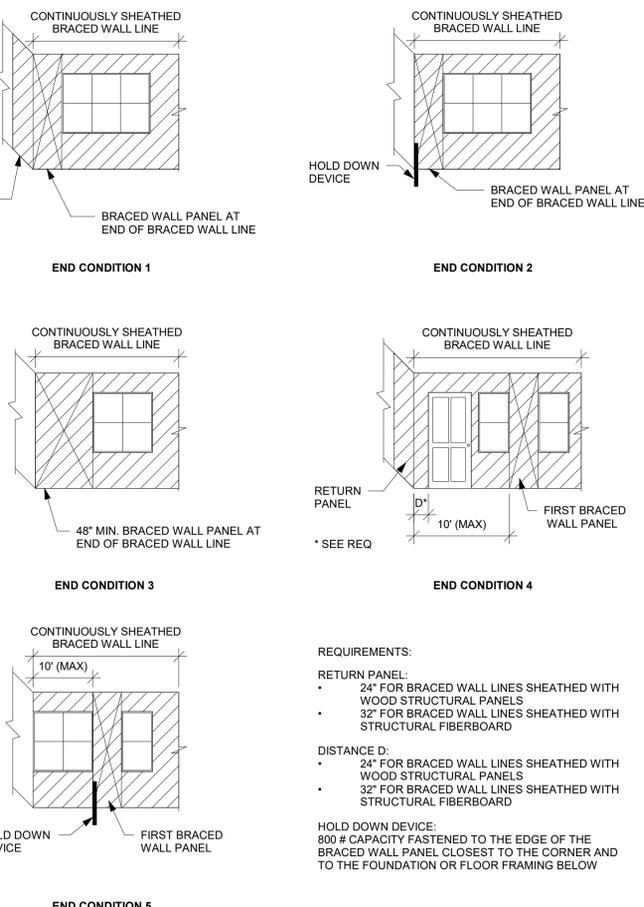


5 CONTINUOUSLY SHEATHED END CONDITIONS NTS

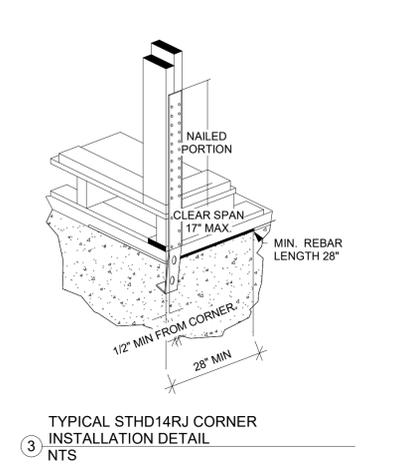

3 TYPICAL STDH14RJ CORNER INSTALLATION DETAIL NTS

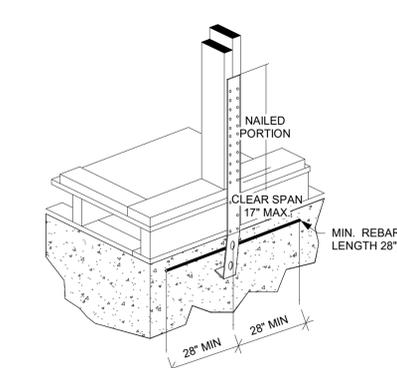

4 TYPICAL STDH14RJ MID-WALL INSTALLATION DETAIL NTS

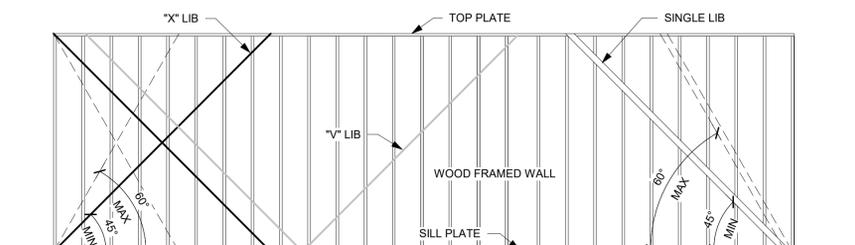


- *X* AND *Y* LIB
- LISTED METAL STRAP IS ACCEPTABLE FOR BOTH THE *X* AND *Y* INSTALLATION METHOD ONLY.
 - SIMPSON WB AND WBC
 - 16 GAUGE X 1-1/4" STRAP
 - MIN LENGTHS
 - *X* - LENGTH SHOWN ON PLANS
 - *Y* - DOUBLE LENGTH SHOWN ON PLANS
 - MIN AND MAX ANGLE SHOWN FOR *X* LIB SHALL APPLY TO *Y* LIB.
 - EXTERIOR / LOAD BEARING (MIN 2X6 STUD)
 - INTERIOR / NON LOAD (MIN 2X4 STUD)

7 LET IN BRACING (LIB) DETAIL NTS

REQUIREMENTS FOR WOOD STRUCTURAL PANEL WALL SHEATHING USED TO RESIST WIND PRESSURES IRC TABLE 602.3(3) (PARTIAL)

| MINIMUM NAIL SIZE | MINIMUM WOOD STRUCTURAL PANEL SPAN RATING | MINIMUM NOMINAL PANEL THICKNESS (IN) | MAX WALL STUD SPACING | PANEL NAIL SPACING | | ULTIMATE DESIGN WIND SPEED, V _{ULT} (MPH) |
|-------------------|---|--------------------------------------|-----------------------|--------------------|-----------------|--|
| | | | | EDGES (IN O.C.) | FIELD (IN O.C.) | |
| 6d COMMON | 24/0 | 3/8 | 16 | 6 | 12 | 140 |
| | | | | 6 | 12 | 170 |
| 8d COMMON | 24/16 | 7/16 | 24 | 6 | 12 | 140 |

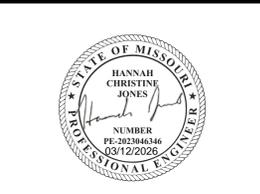

EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES
BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082

REVISIONS

| NO. | DATE | DESCRIPTION |
|-----|------|-------------|
| | | |
| | | |
| | | |

BRACING DETAILS
S530


DATE 12/22/2024
SCALE

2025 11 19 09:00 AM
AS NOTED ON PLANS REVIEW
DEVELOPER
LEE'S SUMMIT, MISSOURI
03/17/2026 4:26:15

| BRACING METHODS TABLE R602.10.4 (PARTIAL) | | | |
|--|--|--|--|
| METHODS, MATERIAL | MINIMUM THICKNESS | CONNECTION CRITERIA | |
| | | FASTENERS | SPACING |
| WSP - WOOD STRUCTURAL PANEL AND CS-WSP CONTINUOUSLY SHEATHED WOOD STRUCTURAL PANEL | 3/8" PANEL W/ MINIMUM 24/0 STRUCTURAL PANEL SPAN RATING | 6d COMMON NAILS (2.0" x .113") W/ MINIMUM 1.5" PENETRATION | 6" EDGES, 12" FIELD |
| | 7/16" PANEL W/ MINIMUM 24/16 STRUCTURAL PANEL SPAN RATING | 8d COMMON NAILS (2.5" x .131") W/ MINIMUM 1.75" PENETRATION | 6" EDGES, 12" FIELD |
| PFH - PORTAL FRAME WITH HOLD-DOWNS | 3/8" | SEE DETAIL ON THIS PAGE | SEE DETAIL ON THIS PAGE |
| PFG - PORTAL FRAME AT GARAGE | 3/8" | SEE IRC SECTION R602.10.6.3 | SEE IRC SECTION R602.10.6.3 |
| LIB LET-IN-BRACING | 1x4 WOOD OR APPROVED METAL STRAPS AT 45 TO 60 DEGREE ANGLES FOR MAX 16" STUD SPACING | WOOD: 2-8d COMMON NAILS OR 3-8d (2-1/2" LONG x .113" DIA.) NAILS | WOOD: PER STUD AND TOP AND BOTTOM PLATES |
| | | SIMPSON WB/WBC INSTALLED IN "X" PAIRS OR IN OPPOSING "V" FASHION AND FASTENED W/ (2) 16d COMMON NAILS FOR PLATE AND (1) 8d COMMON NAIL FOR STUDS | METAL: PER STUD AND TOP AND BOTTOM PLATES |
| GB-GYPSUM BOARD | 1/2" | 1/2" INTERIOR SHEATHING W/ STUDS AT 16" O.C.: 13 GAGE, 1-3/8" LONG, 19/64" HEAD, .098" DIA., 1-1/4" LONG, ANNULAR-RINGED; 5d COOLER NAIL, .098" DIA., 1-5/8" LONG, 15/64" HEAD; OR GYPSUM BOARD NAIL, .098" DIA., 1-5/8" LONG, 9/32" HEAD PER TABLE R702.3.5 (SEE TABLE FOR OTHER PANEL THICKNESS OPTIONS) | FOR ALL BRACED WALL PANEL LOCATIONS: 7" EDGES (INCLUDING TOP AND BOTTOM PLATES) 7" FIELD |
| | | EXTERIOR 1/2" SHEATHING: 1-1/2" GALVANIZED ROOFING NAIL; STAPLE GALVANIZED, 1-1/2" LONG; 1-1/4" SCREWS, TYPE W OR S PER TABLE R602.3(1) | |
| | | EXTERIOR 5/8" SHEATHING: 1-3/4" GALVANIZED ROOFING NAIL; STAPLE GALVANIZED, 1-5/8" LONG; 1-5/8" SCREWS, TYPE W OR S PER TABLE R602.3(1) | |

| DESCRIPTION OF BUILDING MATERIALS | NUMBER AND TYPE OF FASTENER | SPACING AND LOCATION OF FASTENERS |
|--|---|--|
| ROOF | | |
| BLOCKING BETWEEN JOISTS OR RAFTERS TO TOP PLATE | 4-8d BOX (2-1/2"x0.113") OR 3-8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 3-3"x0.131" NAILS | TOE NAIL |
| CEILING JOISTS TO PLATE | 4-8d BOX (2-1/2"x0.131") OR 3-8d COMMON (2-1/2"x0.131") OR 3-10 BOX (3"x0.128") OR 3-3"x0.131" NAILS | TOE NAIL |
| CEILING JOISTS NOT ATTACHED TO PARALLEL RAFTER LAPS OVER PARTITIONS | 4-10d BOX (3"x0.128") OR 3-16d COMMON (3-1/2"x0.162") OR 4-3"x0.131" NAILS | FACE NAIL |
| COLLAR TIE TO RAFTER, FACE NAIL OR 1-1/4"x20 GAGE RIDGE STRAP | 4-10d BOX (3"x0.128") OR 3-10d COMMON (3"x0.148") OR 4-3"x0.131" NAILS | FACE NAIL EACH RAFTER |
| RAFTER OR ROOF TRUSS TO TOP PLATE, TOE NAIL | 4-16d BOX (3-1/2"x0.135") OR 3-10d COMMON (3"x0.148") OR 4-10d BOX (3"x0.128") OR 4-3"x0.131" NAILS | 2 TOE NAILS ON ONE SIDE AND 1 TOE NAIL ON OPPOSITE SIDE OF EACH RAFTER OR TRUSS |
| ROOF RAFTERS TO RIDGE, VALLEY OR HIP RAFTERS | 4-16d BOX (3-1/2"x0.135") OR 3-10d COMMON (3"x0.148") OR 4-10d BOX (3"x0.128") OR 4-3"x0.131" NAILS | TOE NAIL |
| | 3-16d BOX (3-1/2"x0.135") OR 2-16d COMMON (3-1/2"x0.162") OR 3-10d BOX (3"x0.128") OR 3-3"x0.131" NAILS | END NAIL |
| WALL | | |
| STUD TO STUD (NOT AT BRACED WALL PANELS) | 16d COMMON (3-1/2"x0.162") | 24" O.C. FACE NAIL |
| | 10d BOX (3"x0.128") OR 3"x0.131" NAIL | 16" O.C. FACE NAIL |
| STUD TO STUD AND ABUTTING STUDS AT INTERSECTION WALL CORNERS (AT BRACED WALL PANELS) | 16d BOX (3-1/2"x0.135") OR 3"x0.131" NAIL | 12" O.C. FACE NAIL |
| | 16d COMMON (3-1/2"x0.162") | 16" O.C. FACE NAIL |
| BUILT-UP HEADER, TWO PIECES WITH 1/2" SPACER | 16d COMMON (3-1/2"x0.162") | 16" O.C. EACH EDGE FACE NAIL |
| | 16d BOX (3-1/2"x0.135") | 12" O.C. EACH EDGE FACE NAIL |
| CONTINUOUS HEADER TO STUD | 5-8d BOX (2-1/2"x0.113") OR 4-8d COMMON (2-1/2"x0.131") OR 4-10d BOX (3"x0.128") | TOE NAIL |
| TOP PLATE TO TOP PLATE | 16d COMMON (3-1/2"x0.162") | 16" O.C. FACE NAIL |
| | 10d BOX (3"x0.128") OR 3"x0.131" NAIL | 12" O.C. FACE NAIL |
| DOUBLE TOP PLATE SPLICE | 8-16d COMMON (3-1/2"x0.162") OR 12-16d BOX (3-1/2"x0.135") OR 12-10d BOX (3"x0.128") OR 12-3"x0.131" NAILS | FACE NAIL ON EACH SIDE OF END JOINT (MINIMUM 24" LAP SPLICE LENGTH EACH SIDE OF END JOINT) |
| BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST, OR BLOCKING (NOT BRACED WALL PANELS) | 16d COMMON (3-1/2"x0.162") | 16" O.C. FACE NAIL |
| | -16d BOX (3-1/2"x0.135") OR 3"x0.131" NAIL | 12" O.C. FACE NAIL |
| BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST, OR BLOCKING (AT BRACED WALL PANELS) | 3-16d BOX (3-1/2"x0.135") OR 2-16d COMMON (3-1/2"x0.162") OR 4-3"x0.131" NAILS | 3 EACH 16" O.C. FACE NAIL 2 EACH 16" O.C. FACE NAIL 4 EACH 16" O.C. FACE NAIL |
| | 4-8d BOX (2-1/2"x0.113") OR 3-16d BOX (3-1/2"x0.135") OR 4-8d COMMON (2-1/2"x0.131") OR 4-10d BOX (3"x0.128") OR 4-3"x0.131" NAILS | TOE NAIL |
| TOP OR BOTTOM PLATE TO STUD | 3-16d BOX (3-1/2"x0.135") OR 2-16d COMMON (3-1/2"x0.162") OR 3-10d BOX (3"x0.128") OR 3-3"x0.131" NAILS | END NAIL |
| | 3-10d BOX (3"x0.128") OR 2-16d COMMON (3-1/2"x0.162") OR 3-3"x0.131" NAILS | FACE NAIL |
| TOP PLATES, LAPS AT CORNERS AND INTERSECTIONS | 3-8d BOX (2-1/2"x0.113") OR 2-8d COMMON (2-1/2"x0.131") OR 2-10d BOX (3"x0.128") OR 2 STAPLES 1-3/4" | FACE NAIL |
| 1" BRACE TO EACH STUD AND PLATE | 3-8d BOX (2-1/2"x0.113") OR 2-8d COMMON (2-1/2"x0.131") OR 2-10d BOX (3"x0.128") OR 2 STAPLES 1-3/4" | FACE NAIL |
| 1"x6" SHEATHING TO EACH BEARING | 3-8d BOX (2-1/2"x0.113") OR 2-8d COMMON (2-1/2"x0.131") OR 2-10d BOX (3"x0.128") OR 2 STAPLES, 1" CROWN, 16 GA., 1-3/4" LONG | FACE NAIL |
| 1"x8" AND WIDER SHEATHING TO EACH BEARING | 3-8d BOX (2-1/2"x0.113") OR 3-8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 3 STAPLES, 1" CROWN, 16 GA., 1-3/4" LONG | FACE NAIL |
| | WIDER THAN 1"x8": 4-8d BOX (2-1/2"x0.113") OR 3-8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 4 STAPLES, 1" CROWN, 16 GA., 1-3/4" LONG | |

| DESCRIPTION OF BUILDING MATERIALS | NUMBER AND TYPE OF FASTENER | SPACING AND LOCATION OF FASTENERS | |
|---|--|---|----------------------------|
| FLOOR | | | |
| JOIST TO SILL, TOP PLATE, OR GIRDER | 4-8d BOX (2-1/2"x0.113") OR 3-8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 3-3"x0.131" NAILS | TOE NAIL | |
| | 8d BOX (2-1/2"x0.113") | 4" O.C. TOE NAIL | |
| RIM JOIST, BAND JOIST OR BLOCKING TO SILL OR TOP PLATE (ROOF APPLICATIONS ALSO) | 8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 3"x0.131" NAIL | 6" O.C. TOE NAIL | |
| 1"x6" SUBFLOOR OR LESS TO EACH JOIST | 3-8d BOX (2-1/2"x0.113") OR 2-8d COMMON (2-1/2"x0.131") OR 3-10d BOX (3"x0.128") OR 2 STAPLES, 1" CROWN, 16 GA., 1-3/4" LONG | FACE NAIL | |
| 2" SUBFLOOR TO JOIST OR GIRDER | 3-16d BOX (3-1/2"x0.135") OR 2-16d COMMON (3-1/2"x0.162") | BLIND AND FACE NAIL | |
| 2" PLANKS (PLANK & BEAM-FLOOR & ROOF) | 3-16d BOX (3-1/2"x0.135") OR 2-16d COMMON (3-1/2"x0.162") | AT EACH BEARING FACE NAIL | |
| BAND OR RIM JOIST TO JOIST | 3-16d COMMON (3-1/2"x0.162") OR 4-10d BOX (3"x0.128") OR 4-3"x0.131" NAILS OR 4 3"x14 GA. STAPLES, 7/16" CROWN | END NAIL | |
| | 20d COMMON (3"x0.128") | NAIL EACH LAYER AS FOLLOWS: 32" O.C. AT TOP END AND BOTTOM AND STAGGERED. | |
| BUILT-UP GIRDERS AND BEAMS, 2" LUMBER LAYERS | 10d BOX (3"x0.128") OR 3"x0.131" NAIL | 24" O.C. FACE NAIL AT TOP AND BOTTOM STAGGERED ON OPPOSITE SIDES | |
| | AND: 2-20d COMMON (4"x0.192") OR 3-10d BOX (3"x0.128") OR 3-3"x0.131" NAILS | FACE NAIL AT ENDS AND AT EACH SPLICE | |
| LEDGER STRIP SUPPORTING JOISTS OR RAFTERS | 4-16d BOX (3-1/2"x0.135") OR 3-16d COMMON (3-1/2"x0.162") OR 4-10d BOX (3"x0.128") OR 4-3"x0.131" NAILS | AT EACH JOIST OR RAFTER, FACE NAIL | |
| BRIDGING OR BLOCKING TO JOIST | 2-10d BOX (3"x0.128") OR 2-8d COMMON (2-1/2"x0.131") OR 2-3"x0.131" NAILS | EACH END, TOE NAIL | |
| DESCRIPTION OF BUILDING MATERIALS | NUMBER AND TYPE OF FASTENER | EDGES (IN) | INTERMEDIATE SUPPORTS (IN) |
| WOOD STRUCTURAL PANELS, SUBFLOOR, ROOF AND INTERIOR WALL SHEATHING TO FRAMING AND PARTICLEBOARD WALL SHEATHING TO FRAMING [SEE TABLE R602.3(3) FOR WOOD STRUCTURAL PANEL EXTERIOR WALL SHEATHING TO WALL FRAMING] | | | |
| 3/8" - 1/2" | 6d COMMON (2"x0.113") NAIL (SUBFLOOR, WALL) OR 8d COMMON (2-1/2"x0.131") NAILS (ROOF) OR RRSR-01 (2-3/8"x0.113") NAIL (ROOF) | 6 | 12 |
| 19/32" - 1" | 8d COMMON NAIL (2-1/2"x0.131") OR RRSR-01 (2-3/8"x0.113") NAIL (ROOF) | 6 | 12 |
| 1-1/8" - 1-1/4" | 10d COMMON (3"x0.148") NAIL OR 8d (2-1/2"x0.131") DEFORMED NAIL | 6 | 12 |
| OTHER WALL SHEATHING | | | |
| 1/2" STRUCTURAL CELLULOSIC FIBERBOARD SHEATHING | 1-1/2" GALVANIZED ROOFING NAIL, 7/16" HEAD DIAMETER OR 1-1/4" LONG 16 GA. STAPLE WITH 7/16" OR 1" CROWN | 3 | 6 |
| 25/32" STRUCTURAL CELLULOSIC FIBERBOARD SHEATHING | 1-3/4" GALVANIZED ROOFING NAIL, 7/16" HEAD DIAMETER OR 1-1/2" LONG 16 GA. STAPLE WITH 7/16" OR 1" CROWN | 3 | 6 |
| 1/2" GYPSUM INTERIOR COVERING (R702.3.5) | 1-1/2" GALVANIZED ROOFING NAIL; STAPLE GALVANIZED, 1-1/2" LONG; 1-1/4" SCREWS, TYPE "W" OR "S" | 7 | 7 |
| 5/8" GYPSUM INTERIOR COVERING (R702.3.5) | 1-3/4" GALVANIZED ROOFING NAIL; STAPLE GALVANIZED, 1-5/8" LONG; 1-5/8" SCREWS, TYPE "W" OR "S" | 7 | 7 |
| WOOD STRUCTURAL PANELS, COMBINATION SUBFLOOR UNDERLAYMENT TO FRAMING | | | |
| 3/4" AND LESS | 6d DEFORMED (2"x0.120") NAIL OR 8d COMMON (2-1/2"x0.131") NAIL | 6 | 12 |
| 7/8" - 1" | 8d COMMON (2-1/2"x0.131") NAIL OR 8d DEFORMED (2-1/2"x0.120") NAIL | 6 | 12 |
| 1-1/8" - 1-1/4" | 10d COMMON (3"x0.148") NAIL OR 8d DEFORMED (2-1/2"x0.120") NAIL | 6 | 12 |

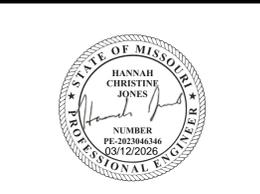

EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES

BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082

| REVISIONS |
|-----------|
| |
| |
| |

FASTENING SCHEDULE

S550


DATE 12/22/2025 FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPER'S REVIEWS
SCALE

03/17/2026 4:26:15

GENERAL NOTES


- ALL CONSTRUCTION SHALL CONFORM TO 2018 INTERNATIONAL RESIDENTIAL CODE OR ATTACHED ENGINEER SPECIFICATIONS WHERE APPLICABLE.
- THE INFORMATION PROVIDED ON THIS PLAN SHEET IS DESIGNED AND REVIEWED IN ACCORDANCE WITH THE IRC.
- CONCRETE WINDOW WELLS SHALL BE MINIMUM 3000 PSI COMPRESSIVE STRENGTH.
- ASSUMED SOIL MINIMUM BEARING CAPACITY 1500 PSF.
- CONTRACTOR IS RESPONSIBLE FOR VERIFICATION OF EXISTING CONDITIONS AND DIMENSIONS CRITICAL FOR CONSTRUCTION OF NEW WORK.
- MEANS AND METHODS OF CONSTRUCTION ARE OUT OF SCOPE OF THE DESIGN PROVIDED.
- TEMPORARY SUPPORTS SHALL BE INSTALLED BEFORE REMOVAL OF LOAD BEARING STRUCTURES.
- DIMENSIONAL LUMBER SHALL BE MINIMUM DOUGLAS FIR LARCH NO. 2 OR SOUTHERN YELLOW PINE #1.
- LVL BEAMS SHALL HAVE MINIMUM 2.0E AND 3100F_v.
- STEEL POST COLUMNS SHALL BE MINIMUM SCHEDULE 40, F_y=35KSI.
- MINIMUM HEADERS
 - ASSUMES LOADING FOR BUILDING WITH MAXIMUM WIDTH OF 36 FT (ROOF WITH 30PSF SNOW LOADS, CEILING, AND TWO FLOORS W/ CENTER BEARING) PER TABLE R602.7(1)

| HEADER | MAX CLEAR SPAN | MIN JACK STUDS |
|--------------------|----------------|----------------|
| (2) 2X10 | 4'-0" | 2 |
| (3) 2X10 | 5'-1" | 2 |
| (2) 2X12 | 4'-9" | 3 |
| (3) 2X12 | 5'-11" | 2 |
| (2) 1.75X9.25 LVL | 7'-6" | 3 |
| (2) 1.75X11.25 LVL | 9'-3" | 3 |

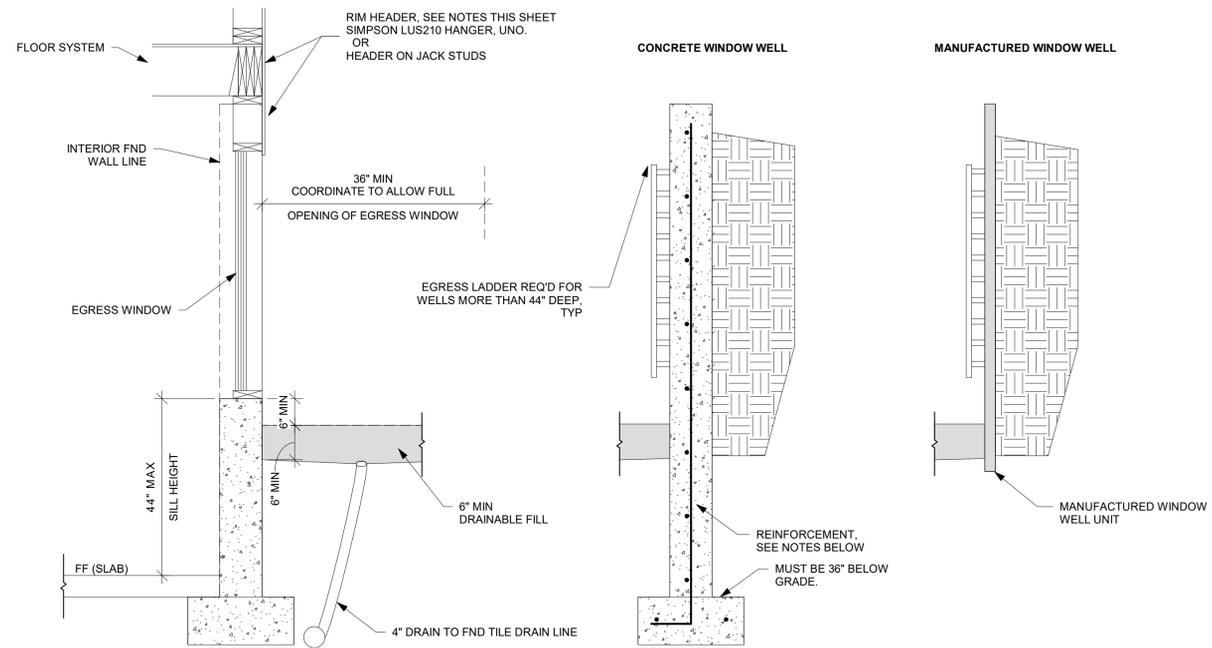


- NOTES:**
- WINDOW WELL MUST MEET REQUIREMENT IN R310.2.6 OF THE IRC AND LOCALLY ADOPTED CODE
 - CONCRETE WINDOW WELL
 - INTALLED WITH NEW FOUNDATION
 - FOUR WINDOW WELL MONOLITHICALLY WITH ADJACENT FND WALL.
 - REINFORCEMENT
 - MATCH ADJACENT WALL REINFORCEMENT, SEE PLANS
 - INSTALLED TO EXISTING FOUNDATION
 - REINFORCEMENT
 - #4 BAR @ 12" OC EW IN WALLS
 - DRILL AND EXPOY HOR BAR INTO EX FND, MIN 6" EMBEDMENT INTO EX FND WALL.
 - (2) #4 BAR CONT IN WALL FTG.
 - SEAL WHERE NEW CONCRETE IS POURED AGAINST EX FND WITH MASTIC STRIPS OR OTHER WATER STOP MATERIAL.
 - MANUFACTURED WINDOW WELL
 - INSTALL PER MANUFACTURER'S WRITTEN INSTRUCTIONS
 - COORDINATE DEPTH OF WELL WITH WINDOW AND MANUFACTURER REQUIREMENTS.

SECTION

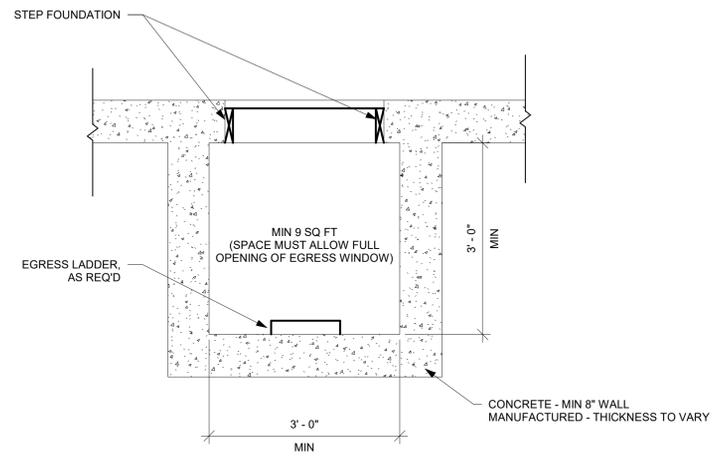

PLAN

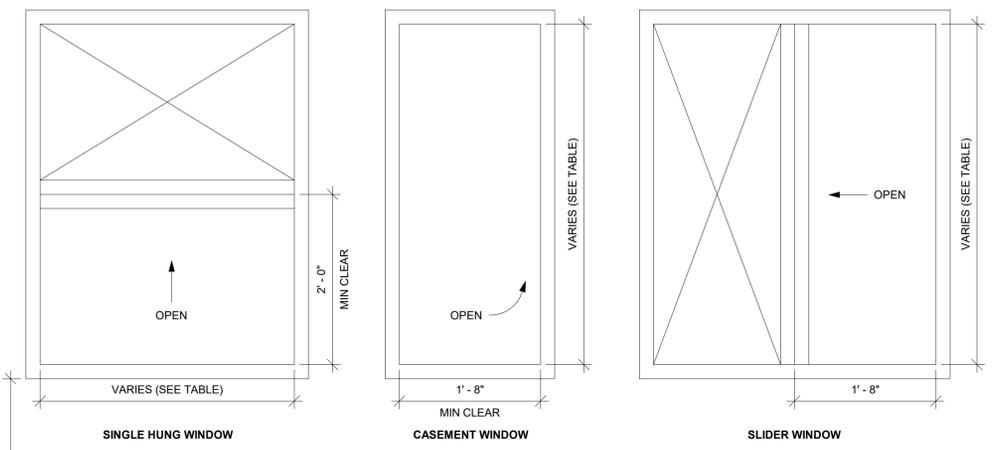

- NOTES**
- EGRESS WINDOWS MUST CONFORM TO R310 OF THE 2018 IRC
 - MIN CLEAR OPENING
 - ABOVE GRADE FLOOR NOT LESS THAN 5.7 SQ FT PER R310.2.1
 - AT OR BELOW GRADE NOT LESS THAN 5.0 SF FT PER 310.2.1
 - MIN NET CLEAR HEIGHT SHALL BE NOT LESS THAN 2 FT
 - MIN NET CLEAR WIDTH SHALL BE NOT LESS THAN 20 INCH
 - MINIMUM WINDOW SIZES SHOWN BELOW ARE SPECIFIC TO THE MANUFACTURER AND VINYL WINDOW MODEL NUMBER LISTED. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF WINDOW SIZES WITH THE SELECTED MANUFACTURER, WINDOW FRAMING MATERIAL, AND STYLE.

| MANUFACTURER | MODEL | SINGLE HUNG | CASEMENT | SLIDER |
|--------------|------------|-------------|----------|--------|
| ANDERSON | 200 SERIES | 36X60 | -- | -- |
| ANDERSON | 400 SERIES | -- | 36X40 | 48X40 |
| JELD-WEN | V-2500 | 36X60 | -- | 48X48 |
| JELD-WEN | V-4500 | -- | 36X48 | -- |
| PELLA | 250 SERIES | 36X60 | 36X42 | -- |
| PELLA | 150 SERIES | -- | -- | 48X48 |

WINDOW EGRESS (NTS)

WINDOW WELL FOR EGRESS (NTS)



EVERSTEAD
3741 NE TROON DRIVE, SUITE 200
LEE'S SUMMIT, MO 64064
EVERSTEAD.COM (816)399-4901

SUMMIT HOMES

BAILEY FARMS #1250 - HONEYDEW FARMHOUSE 2
1340 SE WINDBREAK DR LEE'S SUMMIT, MO 64082

| REVISIONS |
|-----------|
| |
| |
| |

EGRESS WINDOWS

S560

DATE 12/22/2023
SCALE

AS NOTED ON PLANS REVIEW
03/17/2026 4:26:15