


1. REFER TO SPECIFICATIONS SHEET I AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.
2. THE SITE IMPROVEMENTS CONTAINED WITHIN THESE PLANS SHALL BE BUILT ACCORDING TO THE CITY OF LEE'S SUMMIT STANDARD SPECIFICATIONS AND DETAILS AND THE KANSAS CITY METROPOLITAN CHAPTER OF APWA CONSTRUCTION AND MATERIAL SPECIFICATIONS AND STANDARD DETAILS, CURRENT EDITION. WHERE CONFLICTING STATEMENTS EXIST BETWEEN THESE DOCUMENTS THE CITY OF LEE'S SUMMIT SHALL GOVERN.
3. CONTRACTOR SHALL COORDINATE ALL FRANCHISE UTILITY SERVICES, RELOCATIONS AND DEMOLITION/ABANDONMENT WITH APPLICABLE UTILITY OWNERS/PROVIDERS.
4. ANY CONNECTIONS TO THE PUBLIC AND PRIVATE SANITARY SEWER MAIN SHALL BE CUT-IN WYE CONNECTIONS.


EXISTING UTILITIES AND UNDERGROUND FACILITIES INDICATED ON THESE PLANS HAVE BEEN LOCATED FROM REFERENCE INFORMATION. IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY BOTH HORIZONTALLY AND VERTICALLY THE LOCATION OF ALL EXISTING UTILITIES AND UNDERGROUND FACILITIES PRIOR TO CONSTRUCTION. TO TAKE NECESSARY PRECAUTIONS IN ORDER TO PROTECT ALL FACILITIES ENCOUNTERED, THE CONTRACTOR SHALL PRESERVE AND PROTECT ALL EXISTING UTILITIES FROM DAMAGE DURING CONSTRUCTION.

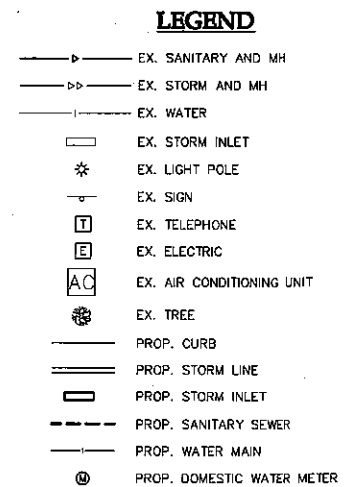


Westwood Professional Services, Inc.
Missouri State Certificate of
Authority #2014009632
2740 North Dallas Parkway, Suite 280
Plano, TX 75093
Phone (214) 473-4640
Toll Free (888) 937-6150
FIRM NO. F-11766
westwoodps.com

Revisions:

Rev	Description	By	Date
1	Lakeside San. Sewer Line		



John Knox Village

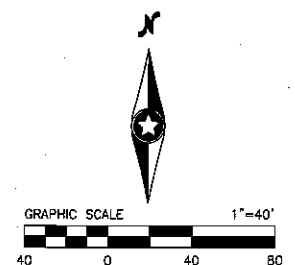

BY _____
DATE 9-9-14

Lee's Summit,
Jackson County, MO 64081

DATE: 08/31/2016
Date: 07/07/2016
Sheet: OF 10

THE PROJECT SITE CONTAINS NO GAS OR OIL WELLS
WITHIN ITS LIMITS. THIS IS BASED ON THE ALTA
SURVEY PERFORMED BY ANDERSON SURVEY COMPANY
AND DATED APRIL 6, 2015.