


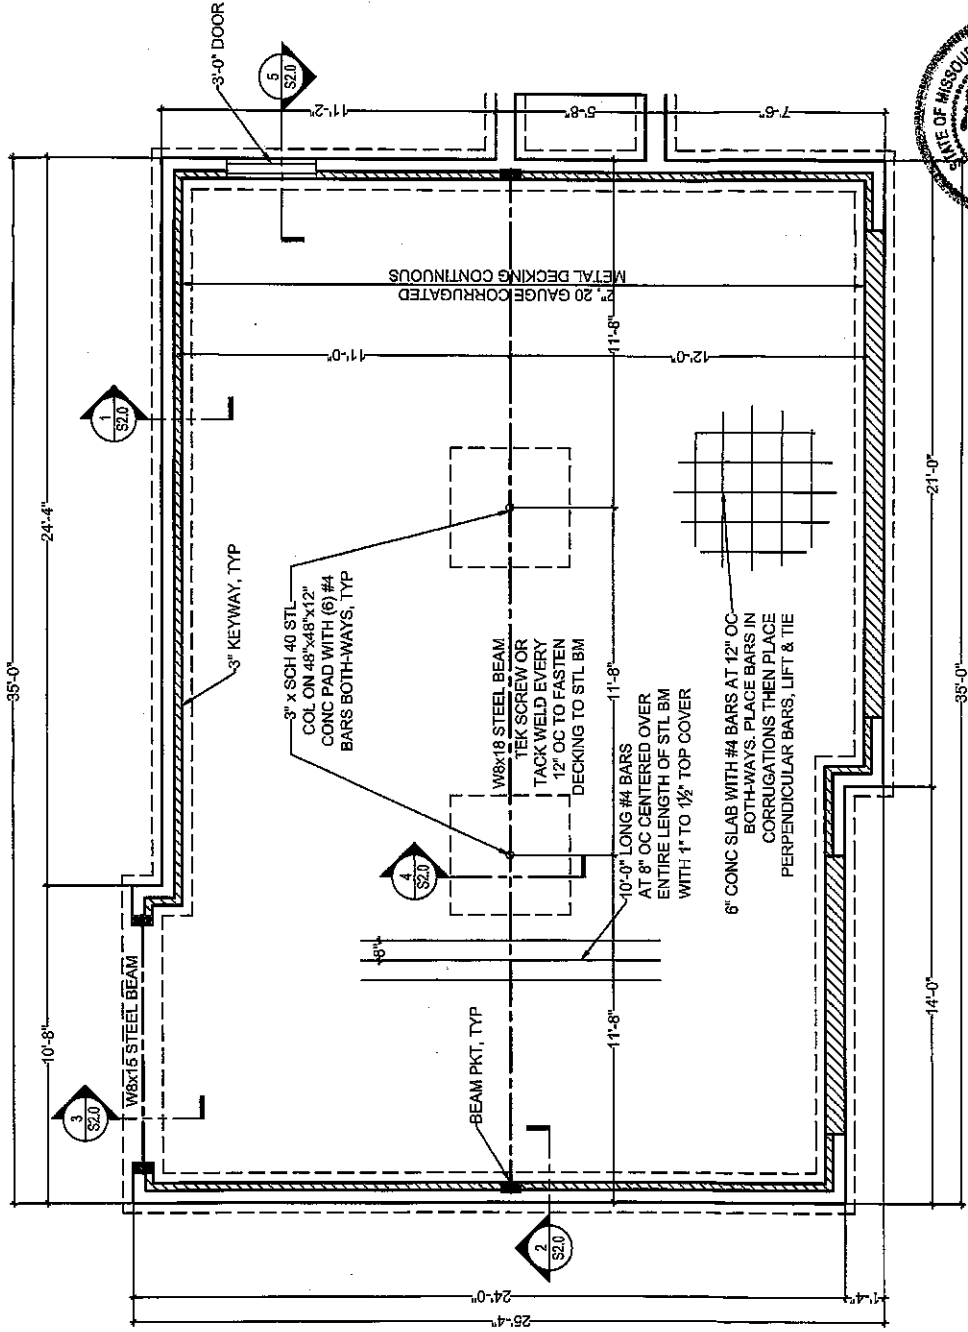



- NOTES:
- 3500 PSI CONCRETE
 - LAP SPLICES 24" MIN
 - GRADE 40 REBAR
 - GARAGE BEAM ABOVE SHALL CLEARSPAN, NO POINT LOADS ON SUSPENDED SLAB.
 - EMBED BARS 24" OR DRILL & EPOXY MIN 5" AT FDTN WALLS
 - SHORE DECKING AT MAX 6'-0" DURING CONSTRUCTION
 - FDTN WALL DESIGN BY OTHERS

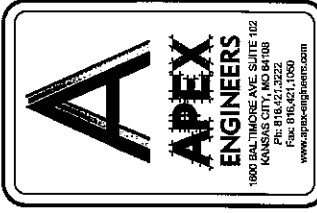

1 SUSPENDED SLAB LAYOUT

S1.0 SCALE 1/4" = 1'-0"








PROJECT: 4713 NE POCONO CIRCLE
CLIENT: LEE'S SUMMIT, MO 64064
D&B BUILDING


PROJECT #
DRAWING NAME
SUSPENDED
SLAB LAYOUT
DATE: COMMENTS:

DRAWN BY: APEX
CHECKED BY: ---


SHEET #
S1.0

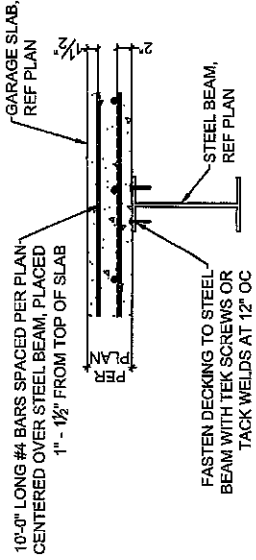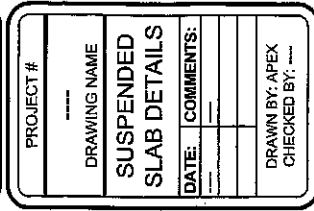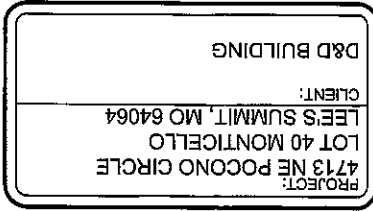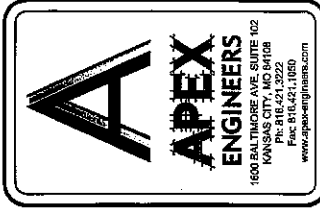


4 GARAGE SLAB BEAM BEARING
SCALE: $\frac{3}{4}" = 1'-0"$

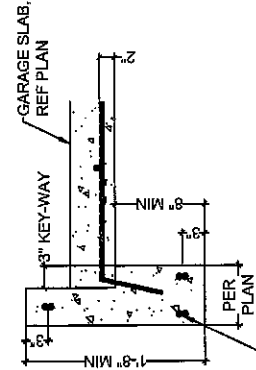

5 CONCRETE HEADER DETAIL
SCALE: $\frac{3}{4}" = 1'-0"$

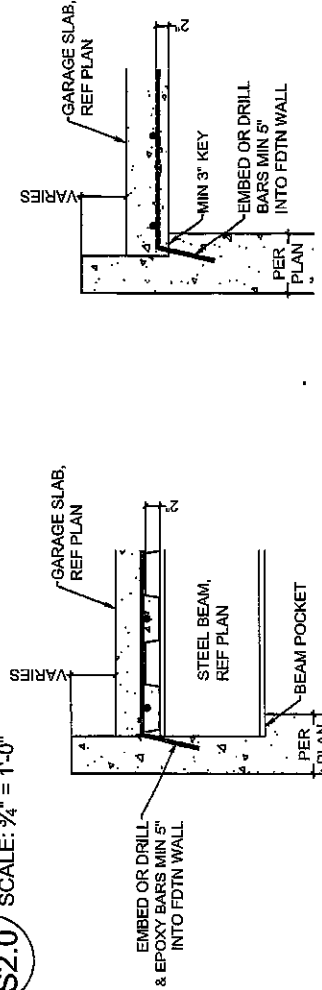

2 GARAGE SLAB BEAM BEARING
SCALE: $\frac{3}{4}" = 1'-0"$

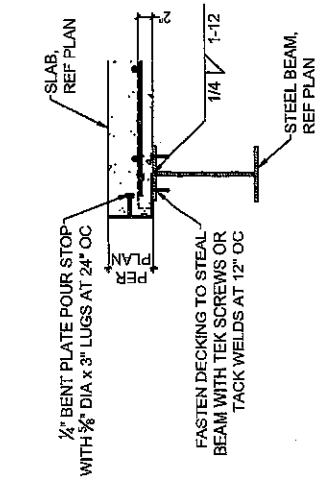

3 POUR STOP DETAIL
SCALE: $\frac{3}{4}" = 1'-0"$

1 GARAGE SLAB BEARING
SCALE: $\frac{3}{4}" = 1'-0"$

STEEL DECKING NOTES:
- MINIMUM $\frac{1}{2}"$ BEARING
- FASTEN TO SUPPORT STEEL WITH $\frac{1}{4}"$ VISIBLE PUDDLE WELDS AT EDGE RIBS & 12" CTRS. ALONG END BEAMS
- FASTEN SIDE LAPS & PERIMETER EDGES AT 36" CTRS. WITH #10 TEK SCREWS OR $\frac{3}{8}"$ PUDDLE WELDS
- MAX UNSUPPORTED CONSTRUCTION SPAN 6'-0"