



LEE'S SUMMIT  
MEDICAL CENTER

LEE'S SUMMIT MEDICAL CENTER  
HYBRID OR ADDITION

2100 SE Blue Parkway  
Lee's Summit, MO 64063

STATE OF MISSOURI  
Victor L. Mosby  
Number  
A-6471  
REGISTERED ARCHITECT

3-23-2020

Victor L. Mosby, Architect  
License - Missouri EA-6471

ACI

BOLAND

ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

P R O J E C T   T E A M

ARCHITECT  
ACI BOLAND, INC.

1710 Wyandotte Street  
Kansas City, MO 64108

PHONE 816.763.9600  
FAX 816.763.9757

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING CONSULTANT  
Professional Engineering Consultants, P.A.


623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

PHONE 785.842.6464


ABBREVIATIONS

AC.	ACOUSTIC/ACOUSTICAL	FLOR.	FLUORESCENT	PTD.	PAINTED
ADD.	ADDENDUM	FTG.	FOOTING	PG.	PAGE
ADDN.	ADDITION	FND.	FOUNDATION	PLAM.	PLASTIC LAMINATE
ABC.	AGGREGATE BASE COURSE	FR.	FRAME	PR.	PAIR
AFF.	ABOVE FINISH FLOOR	F.H.C.	FIRE HOSE CAB.	PNL.	PANEL
AGG.	AGGREGATE	FV.	FIELD VERIFY	PTN.	PARTITION
ANC.	AIR CONDITIONING	GA.	GAUGE	P.	PENNY
AL.	ALUMINUM	GL.	GLASS / GLAZING	PL.	PLATE
ALT.	ALTERNATE	GR.	GRADE	PLBG.	PLUMBING
A.B.	ANCHOR BOLT	GD.	GRADE	PLYWD.	PLYWOOD
&	AND	G.	GRAM	PT.	POINT
ARCH.	ARCHITECT	GRL.	GRILLE	P.S.I.	POUNDS PER SQ. IN.
ASP.	ASPHALT	GRD.	GRID	P.S.F.	POUNDS PER SQ. FT.
@	AT	GND.	GROUND	P.C.	PRECAST
ACT.	ACOUSTIC CEILING TILE/PANEL	G.S.	GALVANIZED STEEL	P.L.	PROPERTY LINE
∠.	ANGLE	GYP.	GYPSSUM BOARD		
		GWB/G.B.	GYPSSUM BOARD		
BLKG.	BLOCKING	H.R.	HAND RAIL	R.	RISER, RISERS
BSMT.	BASEMENT	HDN.	HARDENER	RAD.	RADIUS
BM.	BEAM	HDW.	HARDWARE	R.D.	ROOF DRAIN
B.M.	BENCHMARK	HDWD.	HARDWOOD	RS.	RESILIENT BASE
BD.	BOARD	HTR.	HEATER	RE.	REFER TO
B.O.	BOTTOM OF	HT.	HEIGHT	REG.	REGISTER
BLDG.	BUILDING	H.P.	HIGH POINT	REQD.	REQUIRED
		H.M.	HOLLOW METAL	REV.	REVISION
CABT.	CABINET	HORIZ.	HORIZONTAL	RFG.	ROOFING
C.I.P.	CAST IN PLACE	H.B.	HOSE BIB	RGL.	ROUGH
C.B.	CATCH BASIN	H.W.	HOT WATER	RM.	ROOM
CLG.	CEILING			RND.	ROUND
CEM.	CEMENT/CEMENTITIOUS			R.O.	ROUGH OPENING
CG.	CENTIGRAM	IN.	INCH / INCHES	SCHED.	SCHEDULE
CM.	CENTIMETER	ID.	INSIDE DIAMETER	S.C.	SEALED CONCRETE
CL.	CENTER LINE	INSUL.	INSULATION	SCR.	SCREW
CER.	CERAMIC	INT.	INTERIOR	SECT.	SECTION
C.T.	CERAMIC TILE	INV.	INVERT	SEL.	SELECT
CHAN.	CHANNEL	JAN.	JANITOR	SHG.	SHEATHING
CLR.	CLEAR	JT.	JOINT	SHT.	SHEET
C.O.	CLEAN OUT	JST.	JOIST	SDG.	SIDING
CLOS.	CLOSET	K.P.	KICK PLATE	SIM.	SIMILAR
COL.	COLUMN	LAM.	LAMINATED	SLDG.	SLIDING
CONC.	CONCRETE	LDG.	LANDING	SM.	SMOOTH
CONN.	CONNECTION	LB.	POUND	SPEC.	SPECIFICATION
CONST.	CONSTRUCTION	LDG.	LANDING	SQ.	SQUARE
C.J.	CONTROL JOINT	LTH.	LATH	ST.	STAINED
CONT.	CONTINUOUS	LAV.	LAVATORY	STD.	STANDARD
CONTR.	CONTRACTOR	LG.	LENGTH	S.S. /	S.S. /
CORR.	CORRUGATED	LOC.	LOCATION	ST.STL.	STAINLESS STEEL
CTR.	COUNTER	L.O.	LOCATION	STRUC.	STRUCTURE
CTSK.	COUNTERSUNK	LT.	LIGHT	SUSP.	SUSPENDED
C.M.U.	CONCRETE MASONRY UNIT	L.W.C.	LIGHT WEIGHT CONCRETE	SW BD.	SWITCHBOARD
		LVR.	LOUVER	SYS.	SYSTEM
		LOC.	LOCATION	T.	TREAD
D.P.	DAMP PROOFING	M.O.	MASONRY OPENING	T.C.	TOP OF CURB
DB.	DECIBEL	MATL.	MATERIAL	T.G.	TEMPERED GLASS
DIAG.	DIAGONAL	MFR.	MANUFACTURER	T.O.	TOP OF
DIAM.	DIAMETER	MB.	MARKER BOARD	T.O.	TOP OF
DM.	DIMENSION	MECH.	MECHANICAL	T.W.	TEACHERS WARDROBE
DISP.	DISPENSER	MTL.	METAL	TYP.	TYPICAL
DWL.	DOWEL	M.L.	METAL LATH		
DN.	DOWN	M.	METER	U.O.N.	UNLESS OTHERWISE NOTED
D.S.	DOWNSPOUT	MIN.	MINIMUM		
DWG.	DRAWING	MLDG.	MOLDING	V.	VENT
		MULL.	MULLION	VERT.	VERTICAL
EA.	EACH	N.G.	NATURAL GRADE	V.G.	VERTICAL GRAIN
ELEC.	ELECTRIC	NOM.	NOMINAL	VEST.	VESTIBULE
E.W.C.	ELECTRIC WATER COOLER	N.T.S.	NOT TO SCALE	V.C.T.	VINYL COMPOSITION TILE
EL.	ELEVATION	N.O. / #	NUMBER	VCP.	VITREOUS CLAY PIPE
ELEV.	ELEVATOR				
EQ.	EQUAL				
EQUIP.	EQUIPMENT				
EXH.	EXHAUST				
EXPAN.	EXPANSION				
E.J.	EXPANSION JOINT				
EXST.	EXISTING				
EXT.	EXTERIOR				
FT.	FEET / FOOT				
FIN.	FINISH				
FKT.	FIXTURE				
FL.	FLOOR				
FUR.	FLOOR				
F.D.	FLOOR DRAIN				

LOCATION PLAN

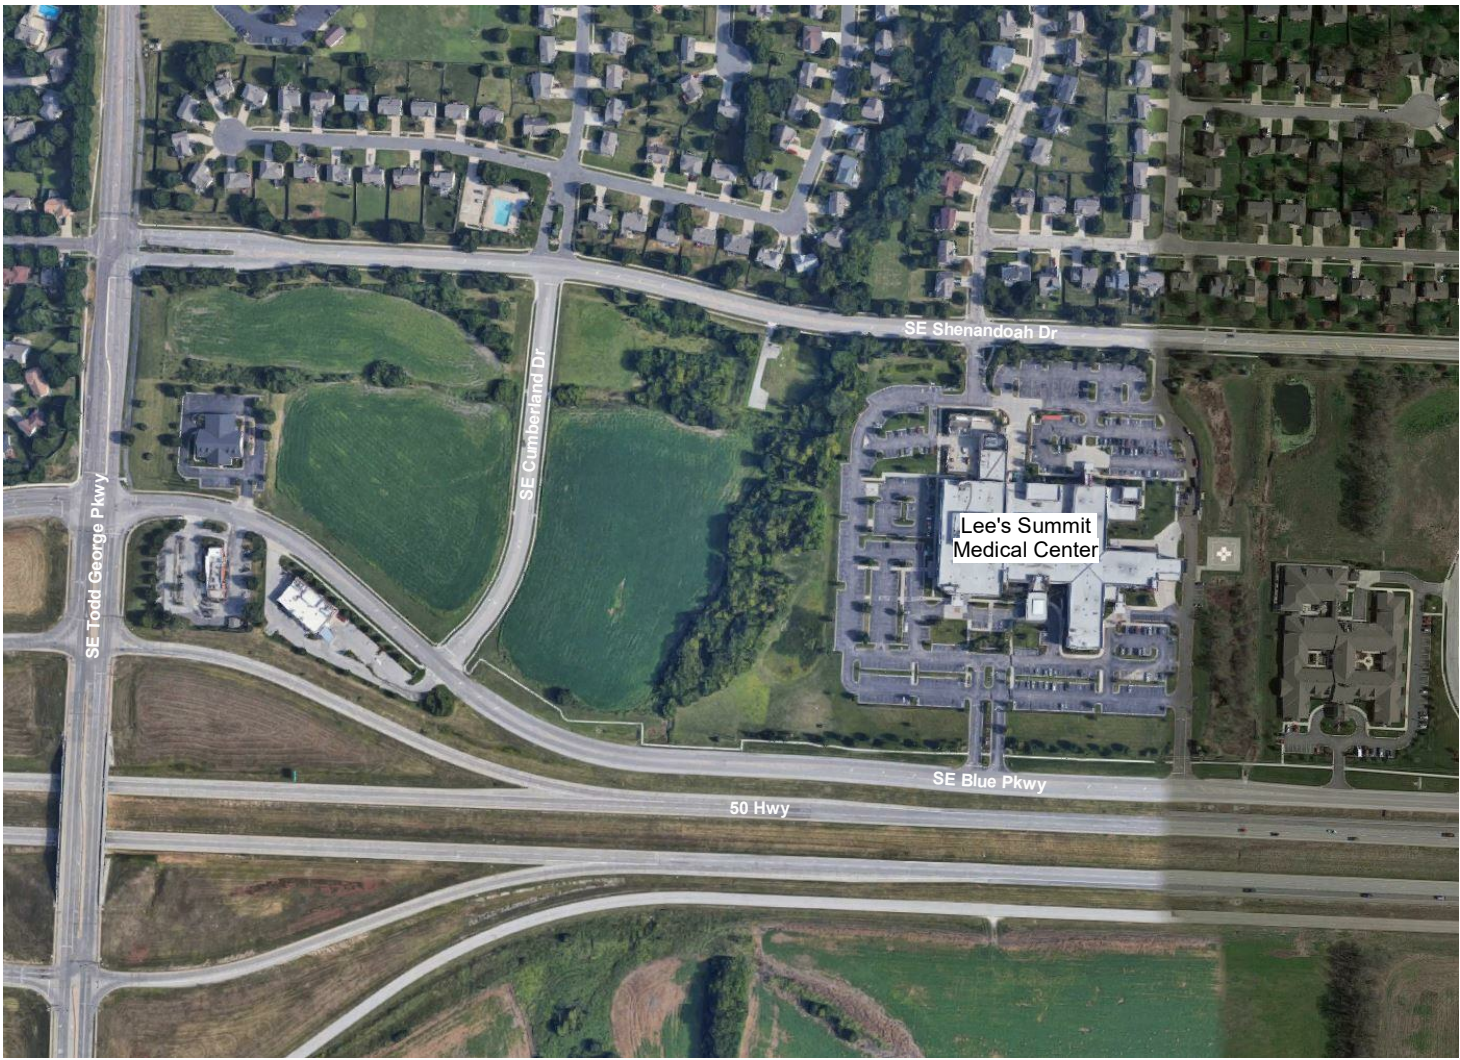

2 SITE LOCATION  
1" = 400'-0"

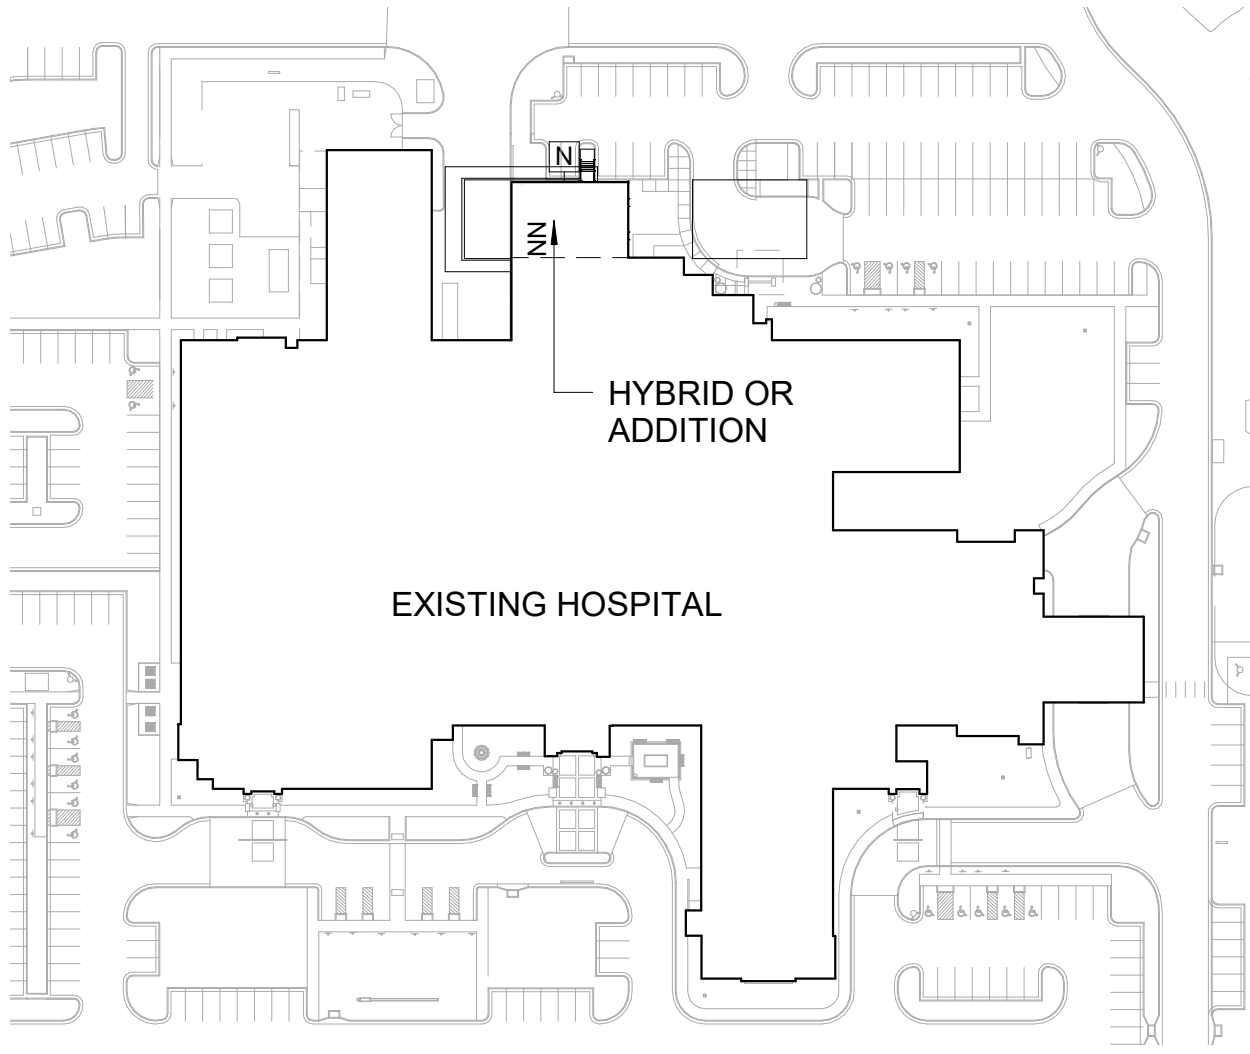

1 SITE PLAN  
1" = 100'-0"



GENERAL NOTES

- ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH A.D.A. REQUIREMENTS AND ALL APPLICABLE LOCAL, STATE, AND FEDERAL BUILDING CODES AND REGULATIONS.
- THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING ALL NECESSARY BUILDING PERMITS.
- THE GENERAL CONTRACTOR AND SUBCONTRACTORS SHALL FIELD VERIFY EXISTING CONDITIONS AND NOTIFY THE ARCHITECT OF ANY INCONSISTENCIES OR DISCREPANCIES WITH THE PROJECT DOCUMENTS. ACCESS TO THE SITE AND/OR SPACE UNDER CONSTRUCTION DURING BIDDING AND CONSTRUCTION SHALL BE COORDINATED WITH THE OWNER.
- DO NOT SCALE DRAWINGS.
- THE WORD "ALIGN" AS USED IN THESE DOCUMENTS SHALL SUPERSEDE ANY DIMENSIONAL INFORMATION GIVEN.
- TYPICAL DIMENSIONS ARE TO FACE OF CONCRETE, DRYWALL, CURTAIN WALL, ETC., OR TO COLUMN CENTERLINE. DIMENSIONS AT WINDOWS ARE TYPICALLY TO FACE OF FRAME. REFER TO PLAN DETAILS FOR ADDITIONAL INFORMATION.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR EXAMINING AND CONFIRMING ALL SUBSTRATE CONDITIONS WHERE NEW MATERIALS ARE APPLIED. THE SUBSTRATE SHALL BE SMOOTH AND FREE OF DEFECTS AND SHALL CONFORM TO THE REQUIREMENTS OF THE FINISHED MATERIAL MANUFACTURERS RECOMMENDATIONS.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR CLEAN-UP.
- THE GENERAL CONTRACTOR SHALL INSPECT AND CHECK THE ADEQUACY AND INSTALLATION OF THROUGH-WALL FLASHING PRIOR TO COVERING WITH FINISH MATERIALS. THIS SHALL INCLUDE, BUT IS NOT LIMITED TO INSPECTION AGAINST HOLES OR PENETRATIONS, APPROPRIATE LAPPING AND SEALING, AND OVERALL WORKMANSHIP IN CONFORMANCE WITH THE SPECIFICATIONS.

SHEET INDEX

SHEET NUMBER	SHEET NAME
GENERAL	
A0.1	COVER SHEET
A0.2	LIFE SAFETY PLAN
A0.3	PARTITION TYPES AND DETAILS
A0.4	U.L. DESIGN ASSEMBLIES
A0.5	U.L. DESIGN ASSEMBLIES
CIVIL	
C100	SITE PLAN
DEMOLITION	
AD1.1	DEMOLITION PLAN
ARCHITECTURE	
A2.0	SITE PLAN
A2.1	FIRST FLOOR DIMENSION PLAN
A2.2	ROOF PLAN
A3.1	FIRST FLOOR REFLECTED CEILING PLAN
A4.1	DOOR AND FRAME SCHEDULE & DETAILS
A4.2	ROOM FINISH SCHEDULE & FINISH LEGEND
A5.1	EXTERIOR ELEVATIONS
A5.2	WALL SECTIONS
A7.1	INTERIOR ELEVATIONS
A7.2	INTERIOR DETAILS
F1.1	EQUIPMENT PLAN
STRUCTURAL	
S0.1	STRUCTURAL GENERAL NOTES
S0.2	INSPECTION TABLES
S1.1	FOUNDATION PLAN
S2.1	ROOF FRAMING PLAN
S3.1	COLUMN SCHEDULE
S3.2	BRADE FRAME SCHEDULE & DETAILS
S4.1	FOUNDATION DETAILS
S5.1	TYPICAL FRAMING DETAILS
MECHANICAL	
M1.0	MECHANICAL COVER SHEET
M1.0	HVAC FLOOR PLANS
M2.0	MECHANICAL HYDRONICS AND ROOF PLAN
M3.0	MECHANICAL DETAILS
M3.1	MECHANICAL DETAILS
M4.0	CONTROL DIAGRAMS
M4.1	CONTROL DIAGRAMS
M5.0	MECHANICAL SCHEDULES
M5.1	MECHANICAL SCHEDULES
M5.1	HVAC DEMOLITION FLOOR PLAN
M5.1	AIRFLOW DIAGRAM
PLUMBING	
P-1.0	PLUMBING FLOOR PLAN
P-1.1	MEDICAL GAS FLOOR PLAN
P-1.0	PLUMBING DEMOLITION FLOOR PLAN
ELECTRICAL	
E0.1	ELECTRICAL LEAD SHEET
E0.2	ELECTRICAL ONE LINE DIAGRAM
E0.3	ELECTRICAL SCHEDULES
E0.4	ELECTRICAL DETAILS
E1.1	ELECTRICAL ONE LINE DIAGRAM
E4.2	POWER PLAN 1ST FLOOR OVERALL
E4.3	ENLARGED EQUIPMENT PLAN
E5.1	ENLARGED LIGHTING PLAN
E5.1	SYSTEMS PLAN
E6.2	ENLARGED SYSTEMS PLAN
FIRE PROTECTION	
FP1.10	FIRE PROTECTION FLOOR PLAN

Lee's Summit Medical Center

Hybrid OR Addition

2100 SE Blue Parkway

Lee's Summit, MO 64063

Date 3-23-2020

Job Number 3-19058

Drawn By CL


Checked By KC

Revision

Number Date Description

1 4/6/2020 Permit Comments



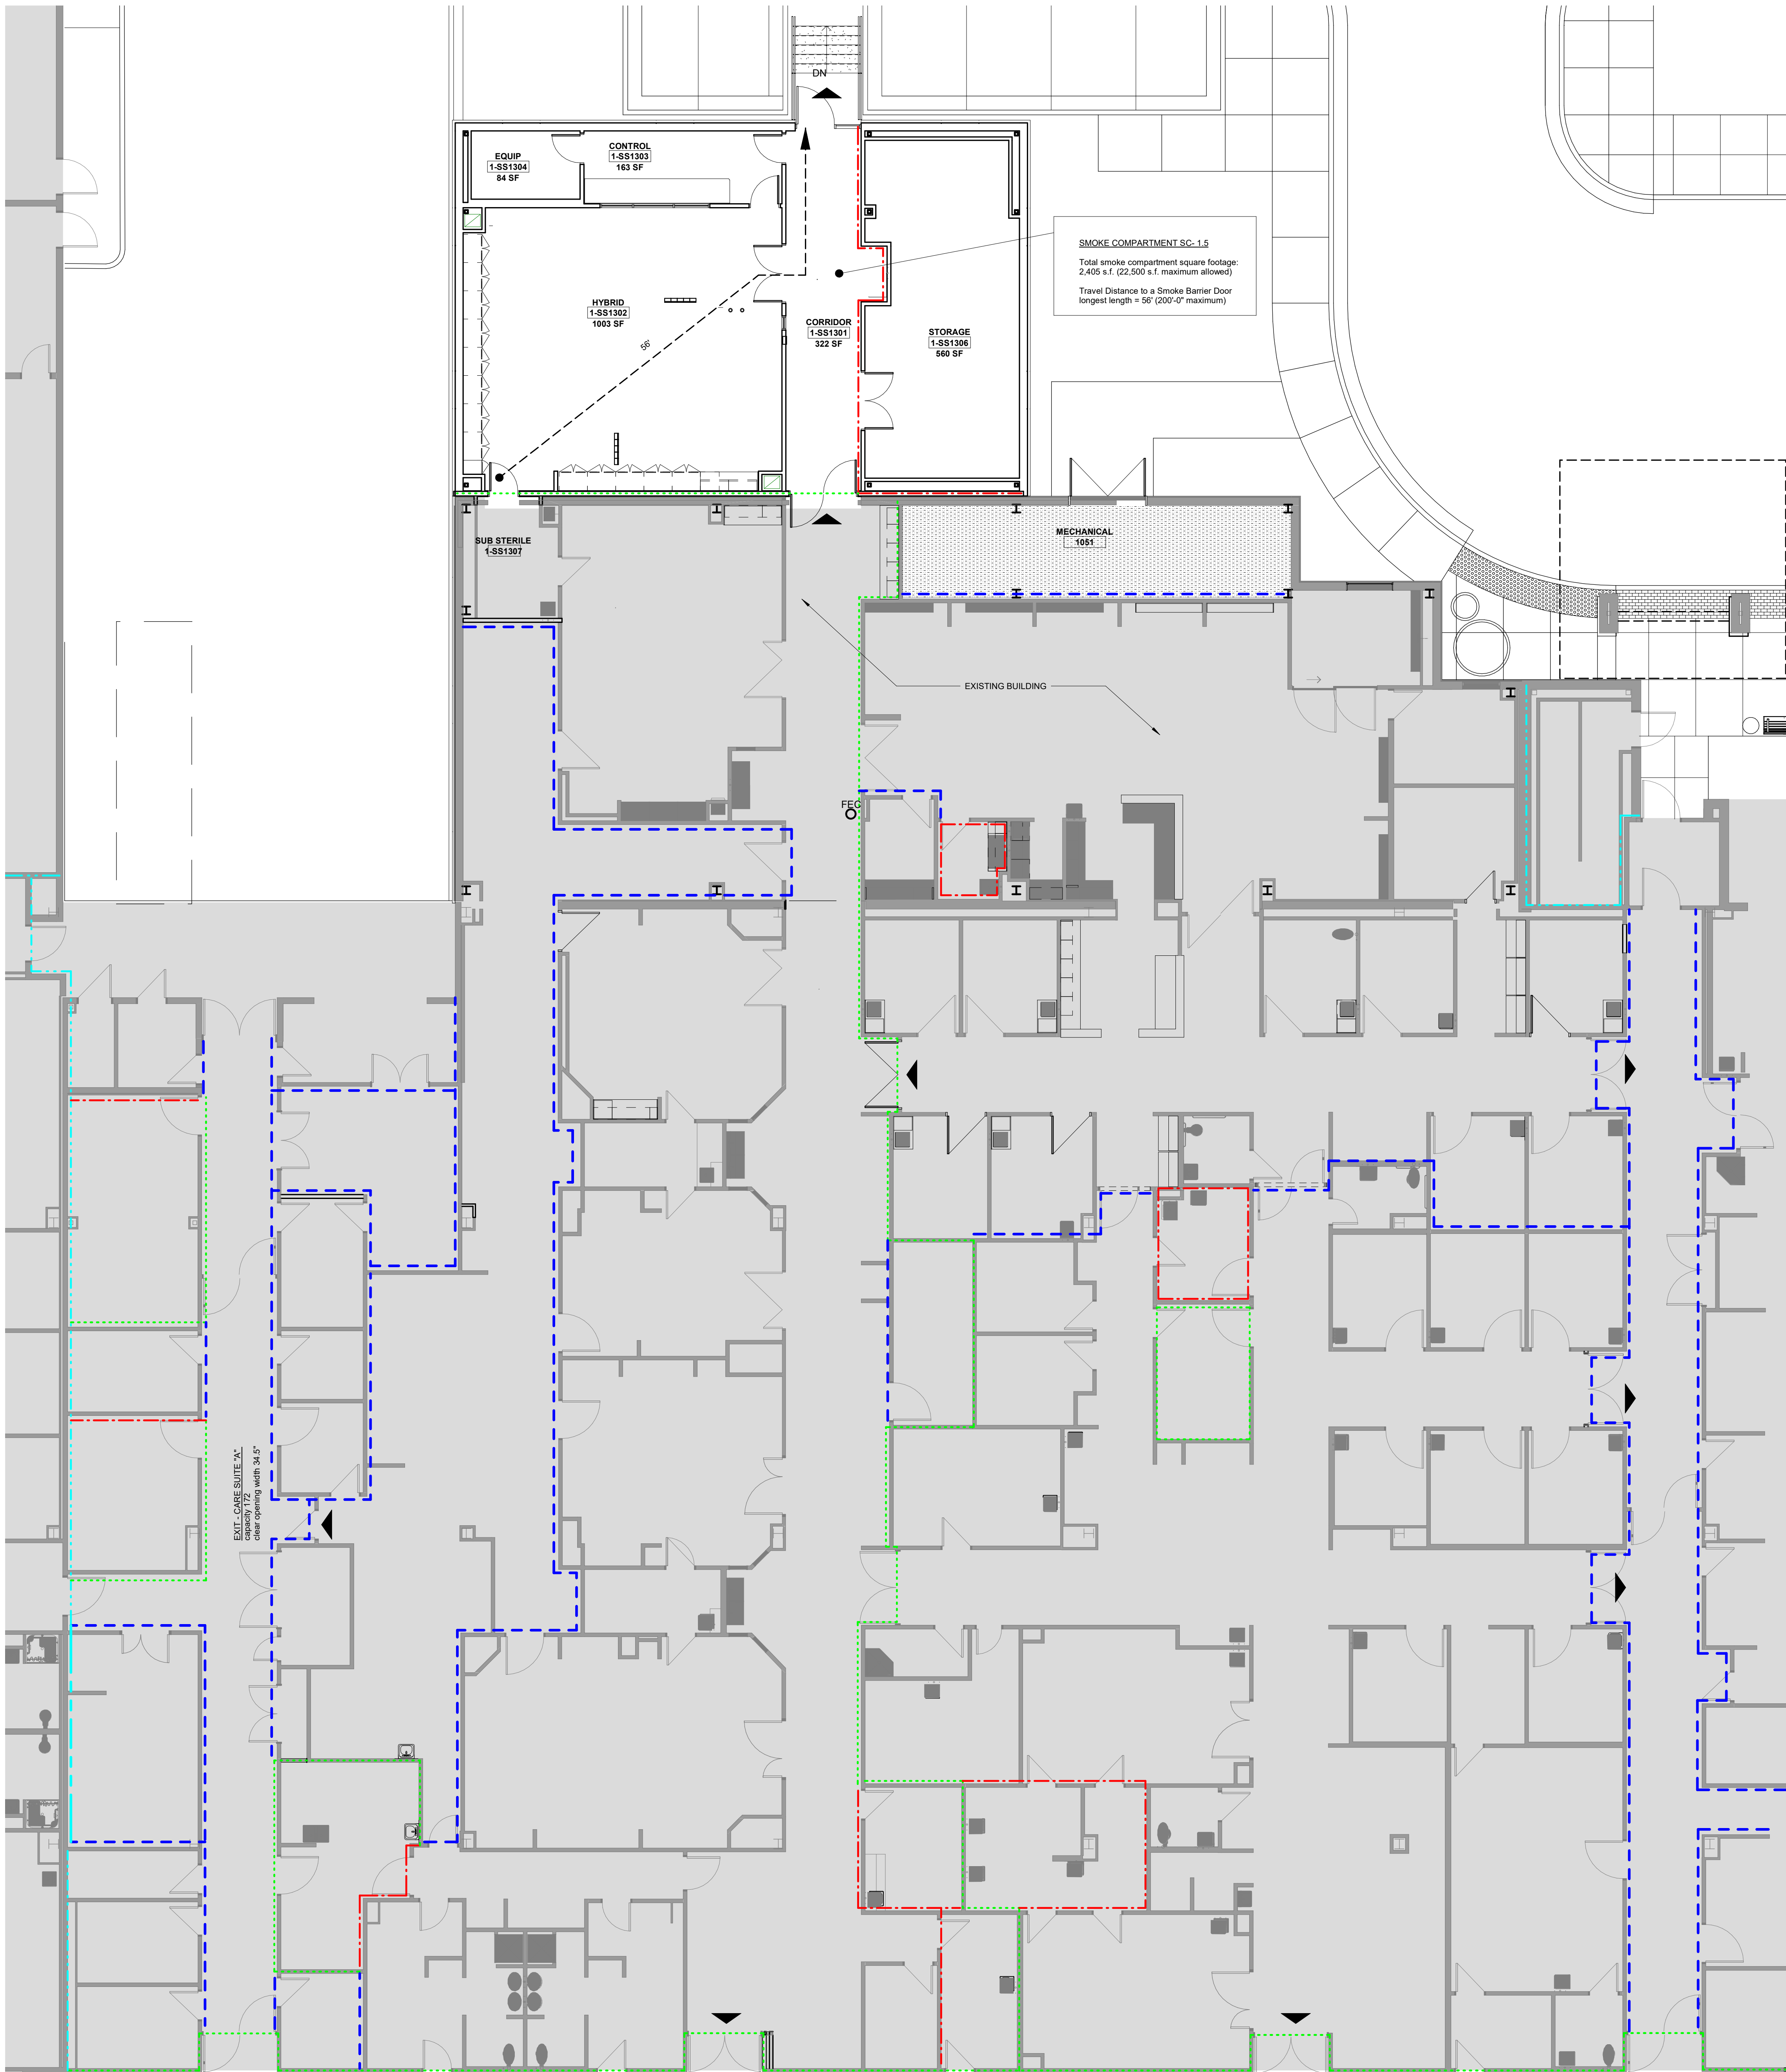

LIFE SAFETY LEGEND

EXIT

FEC

FEC

NOT IN SCOPE

0 HR SMOKE PARTITION (SMOKE RESISTIVE)

1 HR SMOKE BARRIER

1 HR FIRE BARRIER

2 HR FIRE BARRIER

2 HR FIRE SMOKE BARRIER

3 HR FIRE BARRIER

CODE SUMMARY

Project Construction Purpose: OR ADDITION

Code Information

2018 International Building Code

2018 International Plumbing Code

2018 International Mechanical Code

2018 International Fuel Gas Code

2018 International Fire Code

2017 National Electrical Code (NFPA 70)

2012 Life Safety Code (NFPA 101)

2010 ADA Standards for Accessible Design / 1990 Americans with Disabilities Act

2014 Facilities Guidelines Institute- Guidelines Design and Construction of Hospitals

ICCANSI A117.1-2009 Accessible and Usable Buildings and Facilities

Note: If code requirements overlap, the most stringent shall apply.

Owner Information

Lee's Summit Medical Center

2100 SE Blue Parkway

Lee's Summit, MO 64083

Phone: (816) 282-5000

Designer Information

ACI Boland Architects

1710 Wyandotte St.

Kansas City, MO 64108

Phone: (816) 753-9600

Local Authority

Responding Fire Service: Lee's Summit Fire Department

Local Building Inspection: City of Lee's Summit

Occupancy Group: I-2 - Institutional (Hospital)

Area of Addition - 2,405 S.F.

Occupant Load:

Total Number of Occupants = 17 (Addition)

Type of Construction: Type 1B (NFPA 222)

Required Fire Resistance Ratings (in hours)

Per NFPA 101.2.2.1.2:

Exterior Bearing Walls

Interior Bearing Walls

(Supporting Roof Only)

Primary Structural Frame

(Supporting Roof Only)

Floor Construction

Roof Construction

Interior non-bearing walls

2 HR

2 HR

1 HR

2 HR

1 HR

2 HR

1 HR

0 HR

Active Fire Safety Features:

- Fire Alarm System - The fire alarm system is specified as an addressable type system. The device type and locations are per the applicable codes as well as ADA requirements.

- Smoke Control System - All ductwork penetrating smoke rated walls will have a smoke or combination fire/smoke damper as indicated on construction documents. These dampers will close upon detection of smoke by the area smoke detectors or duct smoke detectors in the air handling units.

- Fire Sprinkler System - Specified to be per NFPA 13. The sprinkler heads are specified to be quick response type.

- Emergency Lighting and Power - Emergency lighting, life safety and critical loads will receive power from a backup generator located outside the main electrical room.

- Illuminated Exit Signs

Passive Fire Safety Features:

- Smoke Compartments no greater than 22,500 SF

OCCUPANT LOAD			
ROOM NAME	AREA	OCC LOAD	OCCUPANTS
STORAGE	560 SF	300	2
EQUIP	84 SF	300	1
SUB STERILE	104 SF	300	1
HYBRID	1000 SF	100	11
CONTROL	163 SF	100	2
CORRIDOR	322 SF	0	1
Grand total			17

A1 LIFE SAFETY PLAN  
1/8" = 1'-0"



STATE OF MISSOURI

VICTOR L. MOSBY

REGISTERED ARCHITECT

3-23-2020

Victor L. Mosby, Architect  
License - Missouri EA-6471

ACI BOLAND ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
Licensee's Certificate of Authority Number:  
Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition

2100 SE Blue Parkway

Lee's Summit, MO 64063

Date

3-23-2020

Job Number

3-19058

Drawn By

CL

Checked By

KC

Revision

Number

Date


Description

A0.2

© 2020 ACI/BOLAND, Inc.


LIFE SAFETY PLAN



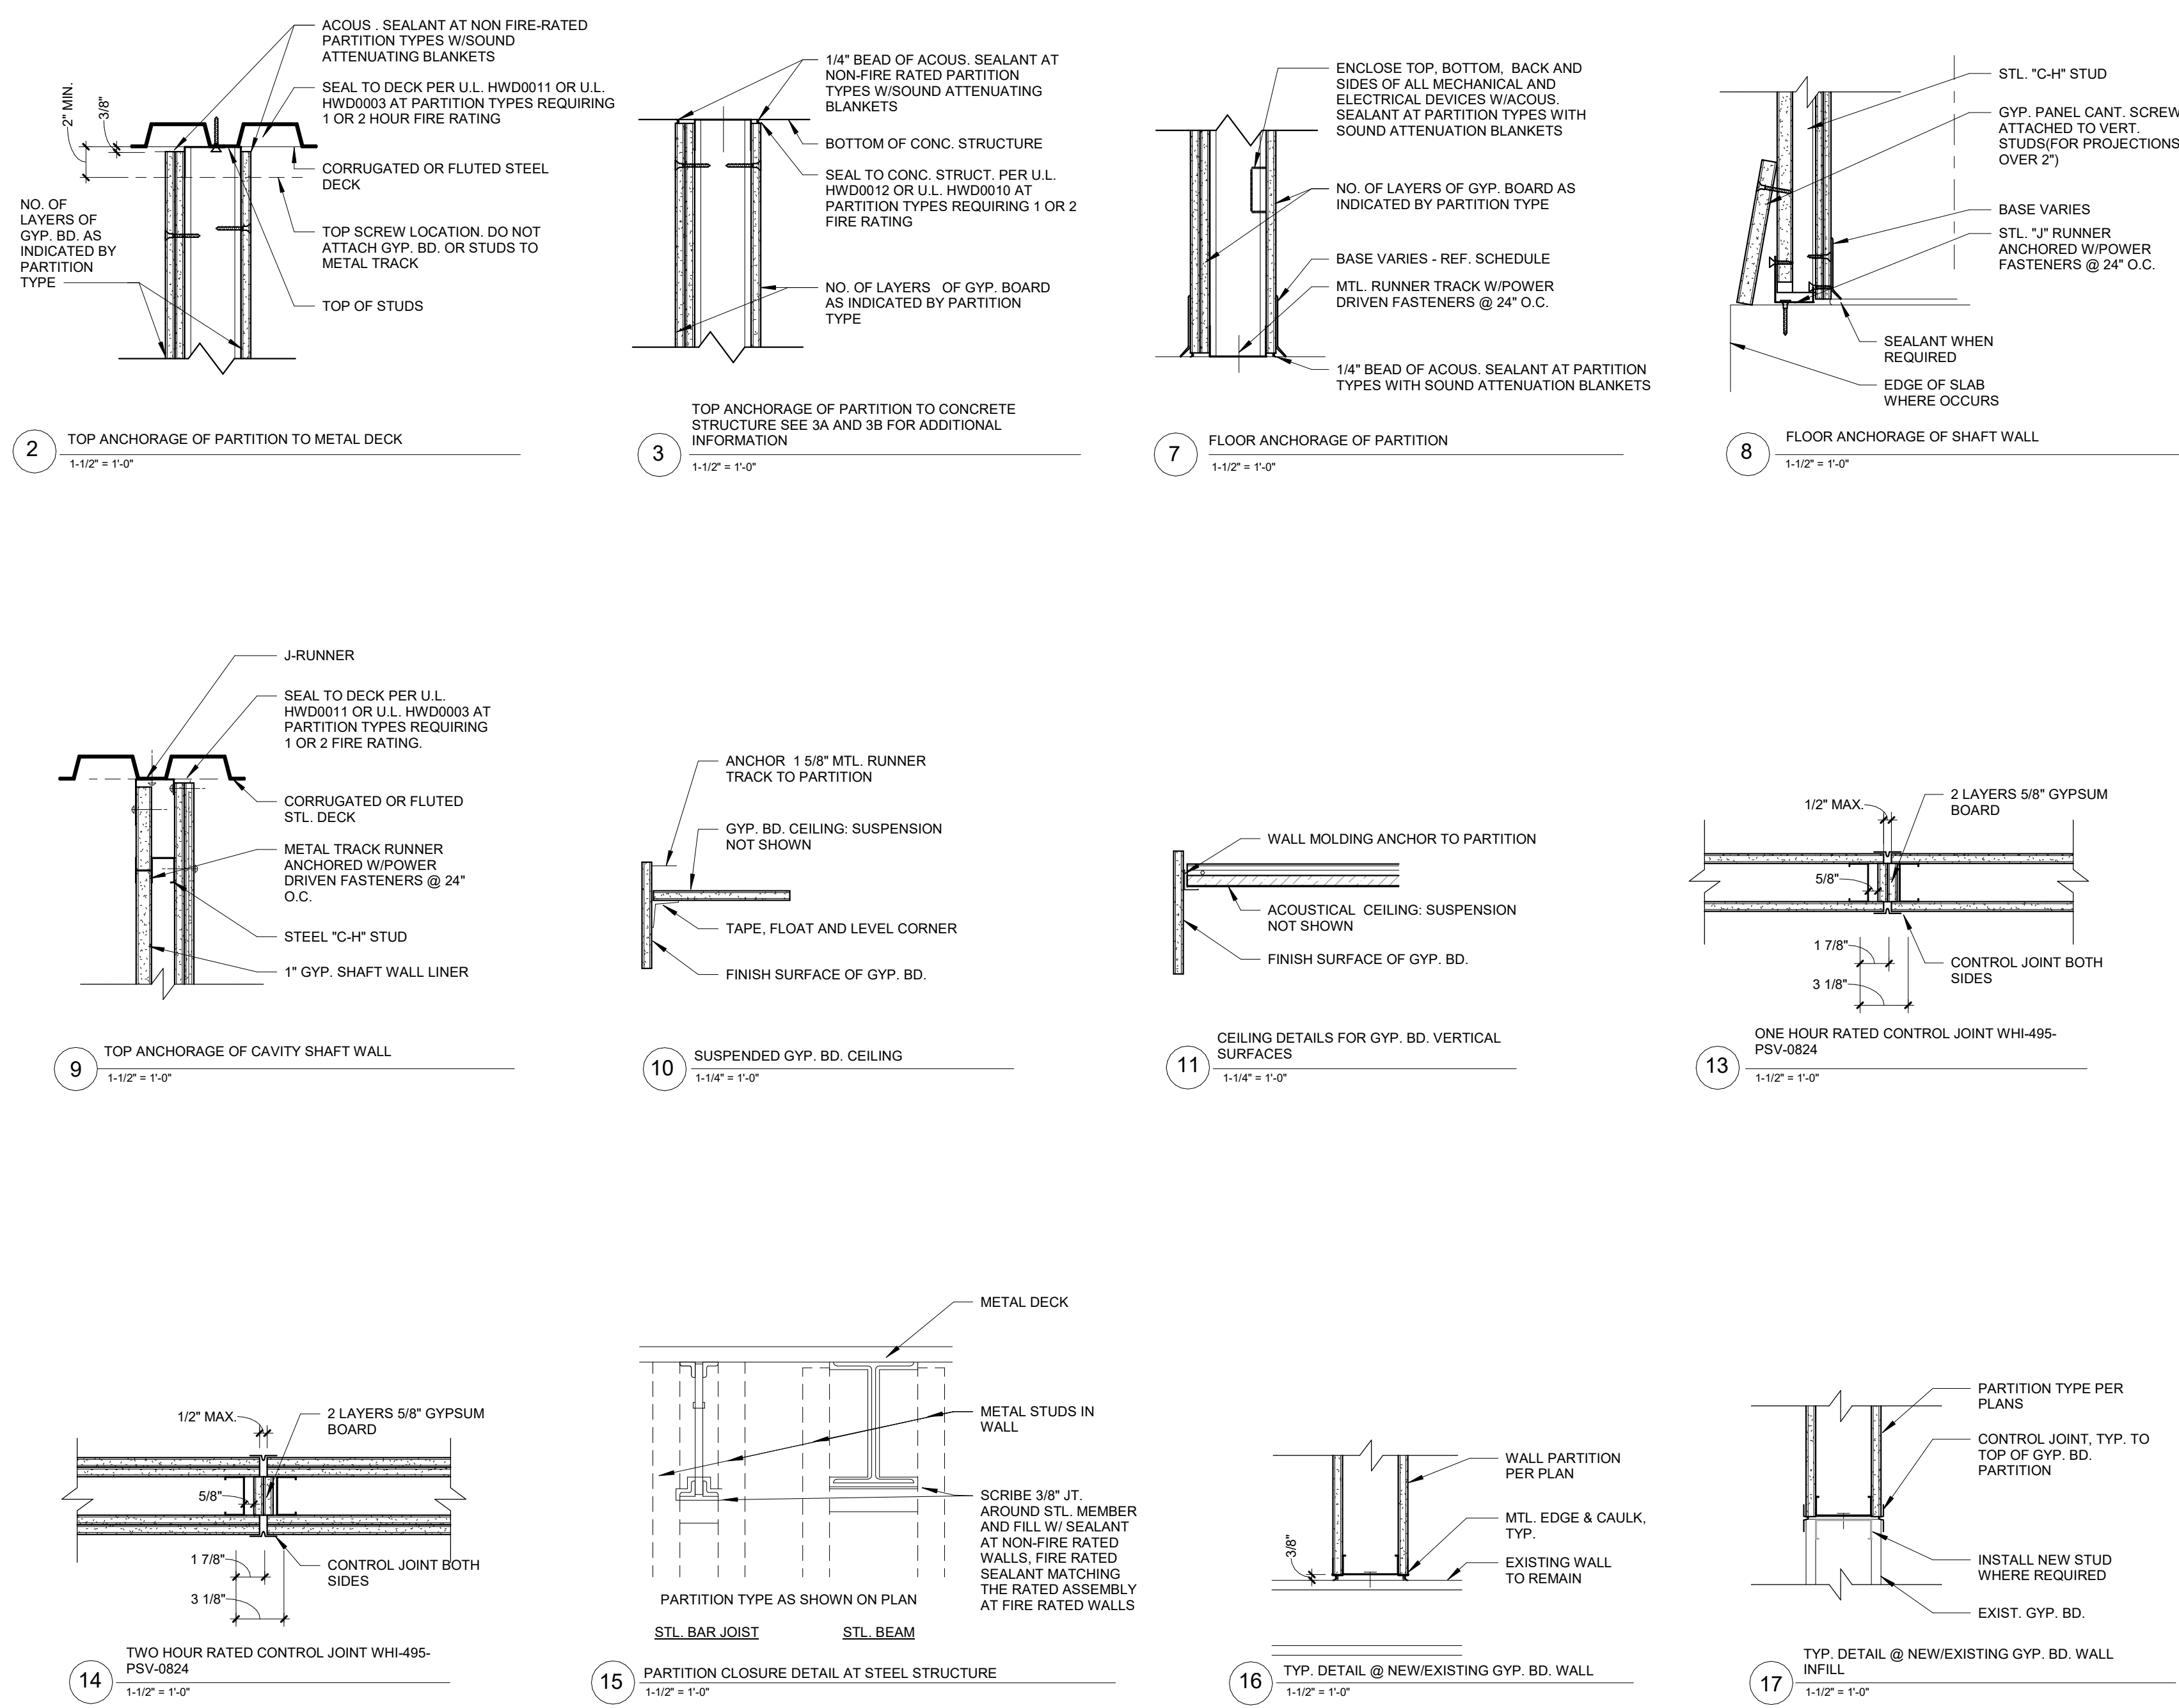


## SPECIALTY EQUIPMENT SCHEDULE


TYPE MARK	DESCRIPTION	RESPONSIBILITY	COMMENTS
E8945	WORKSTATION, MOBILE	OFOI	POWER AS REQUIRED.
K1910	STAINLESS STEEL, TABLE	OFOI	
M0013	INFECTIOUS WASTE BASKET	OFOI	
M0630	ANESTHESIA APPARATUS, 3 GAS	OFOI	
M1801	COMPUTER	OFOI	POWER AS REQUIRED.
M3110	BLANKET WARMER	OFOI	POWER AS REQUIRED.
M4250	IV STAND	OFOI	
M5880	ANESTHESIA CART	OFOI	
M8910	SURGICAL CASE CART	OFOI	
M9110	SURGICAL TABLE	OFOI	POWER AS REQUIRED.
U1000	IMAGE 40E CABINET	VPVI	RE VENDOR DRAWINGS
U1001	PERIPHERAL 40E CABINET	VPVI	RE VENDOR DRAWINGS
U1002	CERTIFYER IX GENERATOR CABINET	VPVI	RE VENDOR DRAWINGS
U1003	MAINS 40E CABINET	VPVI	RE VENDOR DRAWINGS
U1004	REMOTE ALARM SYSTEM PANEL	VPVI	RE VENDOR DRAWINGS
U1005	INTRAVENOUS WORKSTATION	VPVI	RE VENDOR DRAWINGS
U1006	CONTROL ROOM CONNECTION BOX	VPVI	RE VENDOR DRAWINGS
U1007	REMOTE INJECTOR PANEL	VPVI	RE VENDOR DRAWINGS
U1008	INJECTOR CONSOLE	VPVI	RE VENDOR DRAWINGS
U1009	C-ARC STAND	VPVI	RE VENDOR DRAWINGS
U1010	ANGIO DIAGNOST 7 W/ TILT, PIVOT, AND GRADLE	VPVI	RE VENDOR DRAWINGS
U1011	SWITCH BOX	VPVI	RE VENDOR DRAWINGS
U1012	AUXILIARY BOX	VPVI	RE VENDOR DRAWINGS
U1013	LONGITUDINAL STATIONARY RAIL	VPVI	RE RCP & VENDOR DRAWINGS
U1014	LONGITUDINAL DRIVE BELT	VPVI	RE RCP & VENDOR DRAWINGS
U1015	CEILING MOUNTED OR LIGHTS/MONITOR BOOM	VPVI	RE RCP & VENDOR DRAWINGS
U1016	CEILING MOUNTED OR LIGHTS/MONITOR BOOM	VPVI	RE RCP & VENDOR DRAWINGS
U1017	CEILING MOUNTED OR LIGHTS/MONITOR BOOM	VPVI	RE RCP & VENDOR DRAWINGS

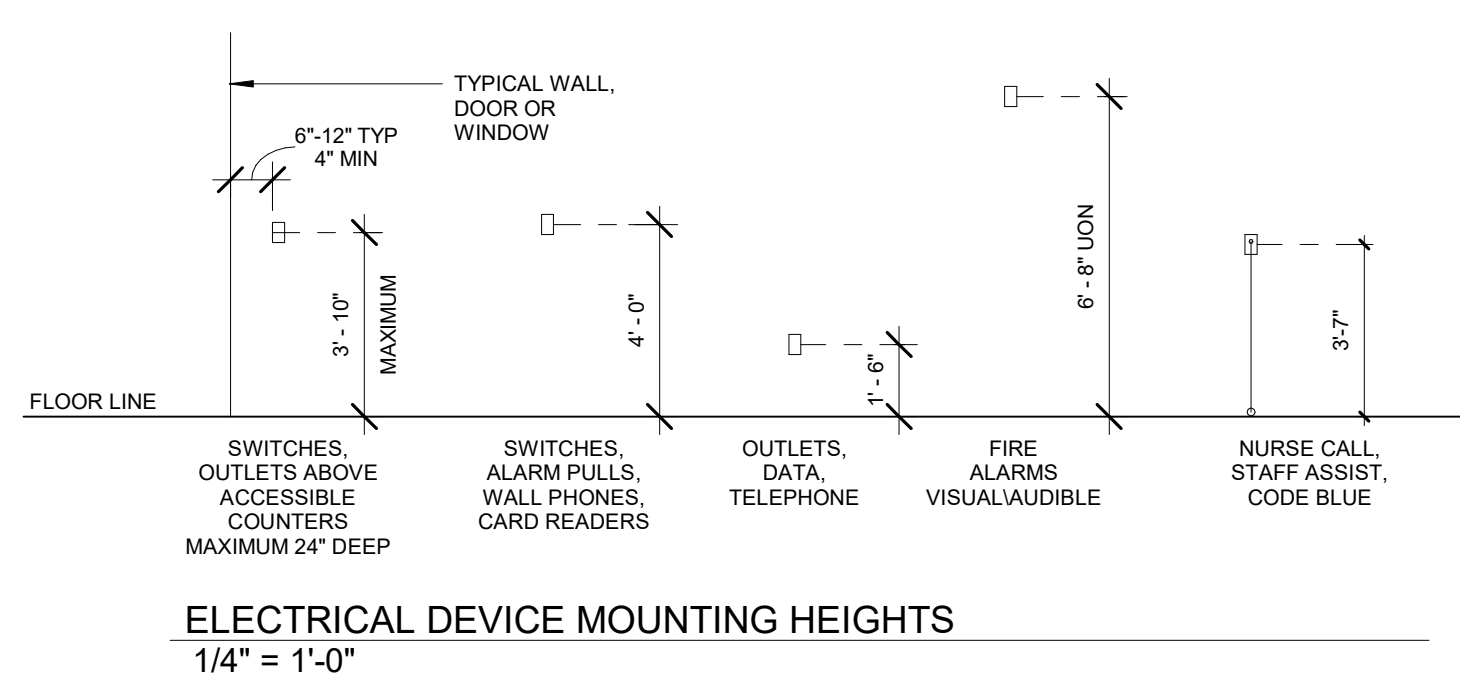



SYMBOLS  
1/4" = 1'-0"

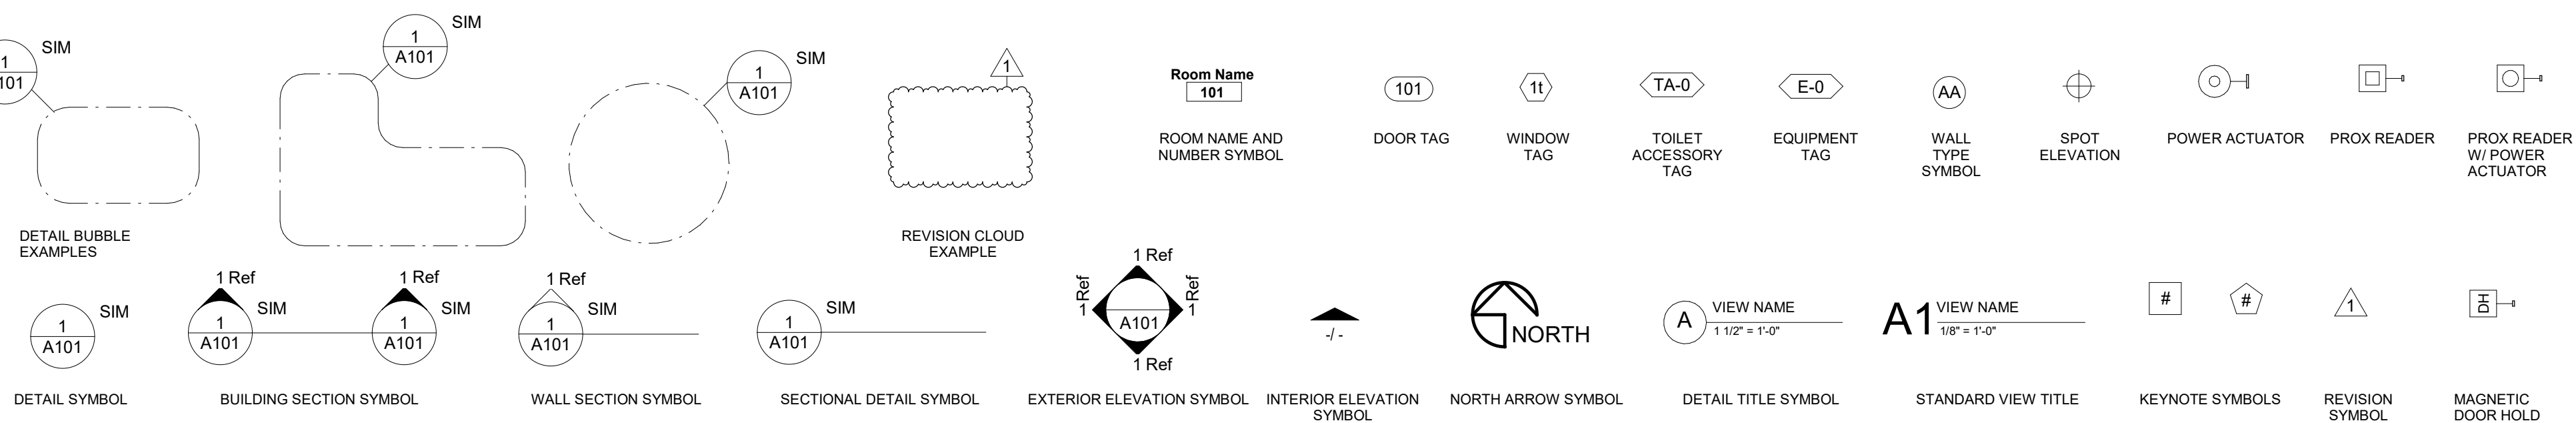

## PARTITION GENERAL NOTES

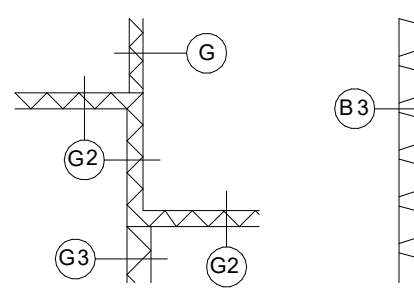- UNLESS NOTED OTHERWISE, ALL INTERIOR METAL STUDS ARE 3/8" THICK. REFER TO SUFFIX SCHEDULE BELOW FOR LOCATIONS OF METAL STUDS OTHER THAN 3/8" THICK. NOTE: STUD THICKNESS (GAUGE) MUST CONFORM TO MANUFACTURERS' RECOMMENDATIONS FOR SPAN (HEIGHT OF STUD)
2. WHERE THE PARTITION TYPE INDICATION IS SHOWN WITH A NUMERICAL SUFFIX, THE METAL STUD THICKNESS SHALL BE AS SCHEDULED BELOW:
- | SUFFIX | MTL. STUD THICKNESS |
|--------|---------------------|
| 1      | 1-5/8" MTL. STUDS   |
| 2      | 2-1/2" MTL. STUDS   |
| 3      | 6" MTL. STUDS       |
3. UNLESS NOTED OTHERWISE, ALL INTERIOR DRYWALL PARTITIONS INDICATED ON THE FLOOR PLAN DRAWING ARE TYPE 'A' PARTITIONS. WHERE OCCURS, RATINGS ARE AS INDICATED ON THE LIFE SAFETY PLAN.
4. UNLESS NOTED OTHERWISE, ALL CMU PARTITIONS ARE 7-5/8", 8" NOMINAL. REFER TO SUFFIX SCHEDULE BELOW FOR LOCATIONS OF CMU PARTITIONS OTHER THAN 8" NOMINAL
5. WHERE THE PARTITION TYPE INDICATION IS SHOWN WITH A NUMERICAL SUFFIX, THE CMU THICKNESS SHALL BE AS SCHEDULED BELOW:
- | SUFFIX | CMU THICKNESS               |
|--------|-----------------------------|
| 1      | ACTUAL 3-5/8", 4" NOMINAL   |
| 2      | ACTUAL 5-5/8", 6" NOMINAL   |
| 3      | ACTUAL 11-5/8", 12" NOMINAL |
- UNLESS NOTED OTHERWISE, ALL INTERIOR MASONRY PARTITIONS INDICATED ON THE FLOOR PLAN DRAWING ARE TYPE 'B' PARTITIONS. WHERE OCCURS, RATINGS ARE AS INDICATED ON THE LIFE SAFETY PLAN.
7. ALL STUDS ARE CONTINUOUS FROM FLOOR STRUCTURE TO CEILING STRUCTURE UNLESS NOTED OTHERWISE.
8. METAL STUDS ARE SPACED @ 16" O.C. MAX., UNLESS NOTED OTHERWISE.
9. UNLESS NOTED OTHERWISE, ALL GYPSUM BOARD IS TO BE 5/8" THICK "FIRECODE".
10. THE LOCATION OF A CHANGE IN THE PARTITION TYPE IS INDICATED BY A WALL TAG.
- 
11. THE CORRESPONDING RATED ASSEMBLIES ARE INDICATED BELOW THE PARTITION TYPE.
12. PARTITION TYPE DESIGNATIONS ARE INDICATED ON THE FLOOR PLAN DRAWINGS.
13. PARTITION TYPES DO NOT INCLUDE APPLIED FINISHES CALLED FOR IN THE ROOM FINISH SCHEDULE.
14. AT PARTITION CORNERS BOTH METAL STUDS ARE EXPOSED ON ONE OR BOTH SIDES, CUT STUD 1/4" SHORT AND SCREW BOTH SIDES TO MTL. RUNNER TRACK

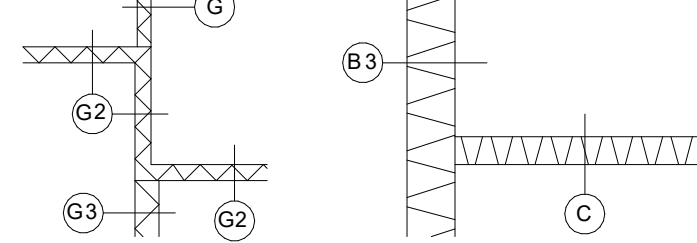

		
Victor L. Mosby, Architect License - Missouri (A-6471)		
<div>ACI</div> <div>BOLAND</div> <div>ARCHITECTS</div>		
1710 Wyandotte Kansas City, MO 64108 T: 816.763.9600		
ACI/Boland, Inc. Kansas City   St. Louis Licensee's Certificate of Authority Number		
<b>STRUCTURAL, MECHANICAL, ELECTRICAL, &amp; PLUMBING CONSULTANT</b>		
Professional Engineering Consultants, P.A.		
623 Massachusetts Street, Suite 200 Lawrence, KS 66044		
Licensee's Certificate of Authority Number:		
Phone Number: 785.842.6464		
<div>Lee's Summit Medical Center</div> <div>Hybrid OR Addition</div> <div>2100 SE Blue Parkway</div> <div>Lee's Summit, MO 64063</div>		
Date	3-23-2020	
Job Number	3-19058	
Drawn By	CL, BR	
Checked By	KC	
Revision		
Number	Date	Description
A0.3		
© 2020 ACI/BOLAND, Inc.		
PARTITION TYPES AND DETAILS		







BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

Design No. U469

BUXUV469

Fire Resistance Ratings - ANSI/UL 26

"Reprinted from the Online Certifications Directory with permission from UL"

Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Certified products, equipment, systems, devices, and materials.

Authorities Having Jurisdiction should be consulted before construction.

Fire resistance assemblies and products are developed by the product submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot address every construction nuance encountered in the field.

When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.

Only products which bear UL's Mark are considered Certified.

BUXUV - Fire Resistance Ratings - ANSI/UL 263  
BXUV7 - Fire Resistance Ratings - CAN/ULC-S101 Certified for Canada

Design No. U469

September 03, 2015

Assembly Rating = 1 HR

Nonbearing Wall

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

Ceiling

FLOOR

HORZ. SECTION

BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

CGC INC — Type SLX.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Type LGFCSL.

GEORGIA-PACIFIC GYPSUM L.L.C — Types TP-6, DGUSL, and TRSL.

UNITED STATES GYPSUM CO — Type SLX.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Type SLX.

USG MEXICO S A DE CV — Type SLX.

4A. Gypsum Board\* — 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

ACADIA DRYWALL SUPPLIES LTD — 5/8" Type X, Type Blueguss Exterior Sheathing

AMERICAN GYPSUM CO — Types AGK-1, M-Glass, AG-C.

CERTAINTED GYPSUM INC — Type C.

CGC INC — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Types LGFC-C, LGFC-C/A, LGFC6A

GEORGIA-PACIFIC GYPSUM L.L.C — Types 5, DAPC, Type X, Veneer Plaster Base-Type LMX, Water Rated-Type LX, Sheathing-Type LX, Soffit-Type LX, Type TC-C, Type LMX, Veneer Plaster Base-Type LMX, Water Rated-Type LXV, Sheathing-Type LXV, Soffit-Type LXV, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Soffit-Type DGLW, Type WZX, Veneer Plaster Base-Type LMX, Water Rated-Type LMX, Sheathing-Type LMX, Soffit-Type LMX, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Type DGP, Type DAP, Type DS.

PASCO BUILDING PRODUCTS L.L.C, DBA PASCO GYPSUM — Types C, PG-11, PG-C, PGS-RWS.

THAI GYPSUM PRODUCTS PCL — Type C.

UNITED STATES GYPSUM CO — Types C, FRX-G, IP-X1, IP-X2, IPC-AR, SCK, ULX or WRC.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Types C, SCK

USG MEXICO S A DE CV — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

4A. Gypsum Board\* — Not Shown - As an Alternate to Item 4. Nom 5/8 in. thick lead backed gypsum panels with beveled, square or tapered edges, applied vertically. Vertical joints centered over studs and staggered min 1 stud cavity on opposite sides of studs. Wallboard secured to studs with 1-1/4 in. long Type 5-12 steel screws spaced 8 in. OC at perimeter and 12 in. OC in the field. Lead batten strips (Item 6) required behind vertical joints

RAY-BAR ENGINEERING CORP — Type RB-LBG

4B. Gypsum Board\* — Not Shown - As an Alternate to Item 4. Nom 5/8 in. thick lead backed gypsum panels with beveled, square or tapered edges, applied vertically. Vertical joints centered over studs and staggered min 1 stud cavity on opposite sides of studs. Wallboard secured to studs with 1-1/4 in. long Type 5-12 steel screws spaced 8 in. OC at perimeter and 12 in. OC in the field. Lead batten strips required behind vertical joints. To be used with Lead Batten

BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

RAYCO INDUSTRIES INC — Type X-Ray Shielded Gypsum

4C. Gypsum Board\* — As an Alternate to Item 4.1. Nom 5/8 in. thick lead backed gypsum panels with beveled, square or tapered edges, applied vertically. Vertical joints centered over studs and staggered min 1 stud cavity on opposite sides of studs. Wallboard secured to studs with 1-1/4 in. long Type 5-12 steel screws spaced 8 in. OC at perimeter and 12 in. OC in the field. Lead batten strips required behind vertical joints of lead backed gypsum wallboard and optional at remaining stud locations. Lead batten strips, min 2 in. wide, max 4 ft long with a max thickness of 0.14 in. placed on the face of studs and attached to the stud with construction adhesive and two 1 in. long Type 5-12 pan head steel screws, one at the top of the strip and one at the bottom of the strip. Lead discs, nominal 3/8 in. diam by max 0.085 in. thick. Compression fitted or adhered over the screw heads. Lead batten strips and discs to have a purity of 99.9% meeting the Federal specification QQ-L-2011, Grade "C".

RADIATION PROTECTION PRODUCTS INC — Type RPP - Lead Lined Drywall

4D. Gypsum Board\* — For use with Item 5D. Batts and Blankets\*and minimum stud depth increased to 4 in. - 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

UNITED STATES GYPSUM CO — Type ULX

5. Batts and Blankets\* — (Optional) — Mineral wool batts partially or completely filling stud cavity.

ROXUL INC — Type AFB

THEIRMAFIBER INC — Type S4FB

5A. Fiber, Sprayed\* — As an alternate to Batts and Blankets (Item 5) — (100% Borate Formulation) — Spray applied cellulose material. The fiber is applied with water to completely fill the enclosed cavity in accordance with the application instructions supplied with the product with a nominal dry density of 2.7 lb/ft<sup>3</sup>. Alternate Application Method: The fiber is applied without water or adhesive at a nominal dry density of 3.5 lb/ft<sup>3</sup>, in accordance with the application instructions supplied with the product.

U S GREENFIBER L.L.C — INS735 & INS745 for use with wet or dry application. INS765D and INS767D are to be used for dry application only.

5B. Fiber, Sprayed\* — As an alternate to Batts and Blankets (Item 5) and Item 5A - Spray applied cellulose insulation material. The fiber is applied with water to interior surfaces in accordance with the application instructions supplied with the product. Applied to completely fill the enclosed cavity. Minimum dry density of 4.3 pounds per cubic ft.

NU-WOOL CO INC — Cellulose Insulation

5C. Fiber, Sprayed\* — As an alternate to Batts and Blankets (Item 5) - Spray applied cellulose fiber. The fiber is applied with water to completely fill the enclosed cavity in accordance with the application instructions supplied with the product. The minimum dry density shall be 4.30 lb/ft<sup>3</sup>.

INTERNATIONAL CELLULOSE CORP — Cellul-Rite

5D. Batts and Blankets\* — For use with Item 4D. Placed in stud cavities, any min. 3-1/2 in. thick glass fiber insulation bearing the UL Classification Marking as to Surface Burning Characteristics and/or Fire Resistance. See Batts and Blankets (BKNV or BZZZ) Categories for names of Classified companies.

6. Lead Batten Strips — For Use with Item 4A - (Not Shown) — Lead batten strips required behind vertical joints of lead backed gypsum wallboard (Item 4A) and optional at remaining stud locations. Strips, min 1-1/2 in. wide, max 10 ft long with a max thickness of 0.125 in. Strips placed on the interior face of studs and attached from the exterior face of the stud with two 1 in. long Type 5-12 pan head steel screws, one at the top of the strip and one at the bottom of the strip.

6A. Lead Discs or Tabs — (Not Shown) — Used in lieu of or in addition to the lead batten strips (Item 6) or optional at other locations - Max 3/4 in. diam by max 0.125 in. thick lead discs compression fitted or adhered over steel screw heads or max 1/2 in. by 1-1/4 in. by max 0.125 in. thick lead tabs placed on gypsum boards (Item 5) underneath screw locations prior to the installation of the screws. Lead discs or tabs to have a purity of 99.9% meeting the Federal specification QQ-L-2011, Grade "C".

6B. Lead Batten Strips — (Not Shown, for use with Item 6B) Lead batten strips, 2 in. wide, max 10 ft long with a max thickness of 0.140 in. Strips placed on the face of studs and attached to the stud with two min. 1 in. long min. Type 5 pan head steel screws, one at the top of the strip and one at the bottom of the strip or with one min. 1 in. long min. Type 5-8 pan head steel screw at the top of the strip. Lead batten strips to have a purity of 99.9% meeting the Federal specification QQ-L-2011, Grade "C".

BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

CGC INC — Type SLX.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Type LGFCSL.

GEORGIA-PACIFIC GYPSUM L.L.C — Types TP-6, DGUSL, and TRSL.

UNITED STATES GYPSUM CO — Type SLX.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Type SLX.

USG MEXICO S A DE CV — Type SLX.

4A. Gypsum Board\* — 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

ACADIA DRYWALL SUPPLIES LTD — 5/8" Type X, Type Blueguss Exterior Sheathing

AMERICAN GYPSUM CO — Types AGK-1, M-Glass, AG-C.

CERTAINTED GYPSUM INC — Type C.

CGC INC — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Types LGFC-C, LGFC-C/A, LGFC6A

GEORGIA-PACIFIC GYPSUM L.L.C — Types 5, DAPC, Type X, Veneer Plaster Base-Type LMX, Water Rated-Type LX, Sheathing-Type LX, Soffit-Type LX, Type TC-C, Type LMX, Veneer Plaster Base-Type LMX, Water Rated-Type LXV, Sheathing-Type LXV, Soffit-Type LXV, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Soffit-Type DGLW, Type WZX, Veneer Plaster Base-Type LMX, Water Rated-Type LMX, Sheathing-Type LMX, Soffit-Type LMX, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Type DGP, Type DAP, Type DS.

PASCO BUILDING PRODUCTS L.L.C, DBA PASCO GYPSUM — Types C, PG-11, PG-C, PGS-RWS.

THAI GYPSUM PRODUCTS PCL — Type C.

UNITED STATES GYPSUM CO — Types C, FRX-G, IP-X1, IP-X2, IPC-AR, SCK, ULX or WRC.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Types C, SCK

USG MEXICO S A DE CV — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

UL

ONLINE CERTIFICATIONS DIRECTORY

CGC INC — Type SLX.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Type LGFCSL.

GEORGIA-PACIFIC GYPSUM L.L.C — Types TP-6, DGUSL, and TRSL.

UNITED STATES GYPSUM CO — Type SLX.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Type SLX.

USG MEXICO S A DE CV — Type SLX.

4A. Gypsum Board\* — 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

ACADIA DRYWALL SUPPLIES LTD — 5/8" Type X, Type Blueguss Exterior Sheathing

AMERICAN GYPSUM CO — Types AGK-1, M-Glass, AG-C.

CERTAINTED GYPSUM INC — Type C.

CGC INC — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Types LGFC-C, LGFC-C/A, LGFC6A

GEORGIA-PACIFIC GYPSUM L.L.C — Types 5, DAPC, Type X, Veneer Plaster Base-Type LMX, Water Rated-Type LX, Sheathing-Type LX, Soffit-Type LX, Type TC-C, Type LMX, Veneer Plaster Base-Type LMX, Water Rated-Type LXV, Sheathing-Type LXV, Soffit-Type LXV, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Soffit-Type DGLW, Type WZX, Veneer Plaster Base-Type LMX, Water Rated-Type LMX, Sheathing-Type LMX, Soffit-Type LMX, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Type DGP, Type DAP, Type DS.

PASCO BUILDING PRODUCTS L.L.C, DBA PASCO GYPSUM — Types C, PG-11, PG-C, PGS-RWS.

THAI GYPSUM PRODUCTS PCL — Type C.

UNITED STATES GYPSUM CO — Types C, FRX-G, IP-X1, IP-X2, IPC-AR, SCK, ULX or WRC.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Types C, SCK

USG MEXICO S A DE CV — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

CGC INC — Type SLX.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Type LGFCSL.

GEORGIA-PACIFIC GYPSUM L.L.C — Types TP-6, DGUSL, and TRSL.

UNITED STATES GYPSUM CO — Type SLX.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Type SLX.

USG MEXICO S A DE CV — Type SLX.

4A. Gypsum Board\* — 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

ACADIA DRYWALL SUPPLIES LTD — 5/8" Type X, Type Blueguss Exterior Sheathing

AMERICAN GYPSUM CO — Types AGK-1, M-Glass, AG-C.

CERTAINTED GYPSUM INC — Type C.

CGC INC — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Types LGFC-C, LGFC-C/A, LGFC6A

GEORGIA-PACIFIC GYPSUM L.L.C — Types 5, DAPC, Type X, Veneer Plaster Base-Type LMX, Water Rated-Type LX, Sheathing-Type LX, Soffit-Type LX, Type TC-C, Type LMX, Veneer Plaster Base-Type LMX, Water Rated-Type LXV, Sheathing-Type LXV, Soffit-Type LXV, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Soffit-Type DGLW, Type WZX, Veneer Plaster Base-Type LMX, Water Rated-Type LMX, Sheathing-Type LMX, Soffit-Type LMX, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Type DGP, Type DAP, Type DS.

PASCO BUILDING PRODUCTS L.L.C, DBA PASCO GYPSUM — Types C, PG-11, PG-C, PGS-RWS.

THAI GYPSUM PRODUCTS PCL — Type C.

UNITED STATES GYPSUM CO — Types C, FRX-G, IP-X1, IP-X2, IPC-AR, SCK, ULX or WRC.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Types C, SCK

USG MEXICO S A DE CV — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

BUXUV469 - Fire Resistance Ratings - ANSI/UL 263

UL

ONLINE CERTIFICATIONS DIRECTORY

CGC INC — Type SLX.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Type LGFCSL.

GEORGIA-PACIFIC GYPSUM L.L.C — Types TP-6, DGUSL, and TRSL.

UNITED STATES GYPSUM CO — Type SLX.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Type SLX.

USG MEXICO S A DE CV — Type SLX.

4A. Gypsum Board\* — 5/8 in. thick, 4 ft or 1200 mm wide, applied vertically and attached to studs with 1 in. long Type 5 steel screws spaced 12 in. OC along the edges and in the field of the boards.

ACADIA DRYWALL SUPPLIES LTD — 5/8" Type X, Type Blueguss Exterior Sheathing

AMERICAN GYPSUM CO — Types AGK-1, M-Glass, AG-C.

CERTAINTED GYPSUM INC — Type C.

CGC INC — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

CONTINENTAL BUILDING PRODUCTS OPERATING CO, L.L.C — Types LGFC-C, LGFC-C/A, LGFC6A

GEORGIA-PACIFIC GYPSUM L.L.C — Types 5, DAPC, Type X, Veneer Plaster Base-Type LMX, Water Rated-Type LX, Sheathing-Type LX, Soffit-Type LX, Type TC-C, Type LMX, Veneer Plaster Base-Type LMX, Water Rated-Type LXV, Sheathing-Type LXV, Soffit-Type LXV, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Soffit-Type DGLW, Type WZX, Veneer Plaster Base-Type LMX, Water Rated-Type LMX, Sheathing-Type LMX, Soffit-Type LMX, Type DGLW, Water Rated-Type DGLW, Sheathing-Type DGLW, Type DGP, Type DAP, Type DS.

PASCO BUILDING PRODUCTS L.L.C, DBA PASCO GYPSUM — Types C, PG-11, PG-C, PGS-RWS.

THAI GYPSUM PRODUCTS PCL — Type C.

UNITED STATES GYPSUM CO — Types C, FRX-G, IP-X1, IP-X2, IPC-AR, SCK, ULX or WRC.

USG BORAL ZAWAWI DRYWALL L.L.C SFZ — Types C, SCK

USG MEXICO S A DE CV — Types C, IP-X1, IP-X2, IPC-AR, SCK, ULX, or WRC.

4B. Gypsum Board\* — Not Shown - As an Alternate to Item 4. Nom 5/8 in. thick lead backed gypsum panels with beveled, square or tapered edges, applied vertically. Vertical joints centered over studs and staggered min 1 stud cavity on opposite sides of studs. Wallboard secured to studs with 1-1/4 in. long Type 5-12 steel screws spaced 8 in. OC at perimeter and 12 in. OC in the field. Lead batten strips required behind vertical joints. To be used with Lead Batten

44

Design No. X790

November 17, 2014

Ratings — 1, 1-1/2, 2, 3 and 4 Hr.

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

h = R

18B (A/P) + 45

Design No. X790

November 17, 2014

Ratings — 1, 1-1/2, 2, 3 and 4 Hr.

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

h = R

18B (A/P) + 45

Design No. X790

November 17, 2014

Ratings — 1, 1-1/2, 2, 3 and 4 Hr.

\* Indicates such products shall bear the UL or cUL Certification Mark for jurisdictions employing the UL or cUL Certification (such as Canada), respectively.

h = R

18B (A/P) + 45

Column Size	W/D	Min Thkns In.					
		1 Hr	1-1/2 Hr	2 Hr	3 Hr	4 Hr	
W6x9	0.33	15/16	1-1/4	1-9/16	2-1/8	2-11/16	
W6x12	0.43	13/16	1-1/8	1-7/16	2	2-9/16	
W6x16	0.57	11/16	1	1-5/16	1-7/8	2-3/8	
W8x28	0.68	5/8	15/16	1-1/4	1-13/16	2-5/16	
W10x49	0.83	9/16	13/16	1-1/8	1-5/8	2-1/8	
W12x106	1.46	3/8	9/16	13/16	1-1/4	1-11/16	

Column Size	W/D	Min Thkns In.					
		1 Hr	1-1/2 Hr	2 Hr	3 Hr	4 Hr	
W6x9	0.33	15/16	1-1/4	1-9/16	2-1/8	2-11/16	
W6x12	0.43	13/16	1-1/8	1-7/16	2	2-9/16	
W6x16	0.57	11/16	1	1-5/16	1-7/8	2-3/8	
W8x28	0.68	5/8	15/16	1-1/4	1-13/16	2-5/16	
W10x49	0.83	9/16	13/16	1-1/8	1-5/8	2-1/8	
W12x106	1.46	3/8	9/16	13/16	1-1/4	1-11/16	

Column Size In.	A/P	Min Thkns In.					
		1 Hr	1-1/2 Hr	2 Hr	3 Hr	4 Hr	
SP 4x0.237	0.22	11/16	1	1-3/8	2-1/16	2-3/4	
ST 4x4x0.1875	0.18	3/4	1-1/16	1-7/16	2-1/16	2-11/16	
ST 4x4x0.3125	0.29	1/2	13/16	1-1/8	1-3/4	2-5/16	
ST 4x4x0.375	0.34	7/16	3/4	1	1-9/16	2-1/8	
ST 4x4x0.5	0.44	3/8	9/16	7/8	1-3/8	1-7/8	
ST20x20x0.75 in	0.72	5/16	1/2	11/16	1-1/16	1-7/16	
ST20x20x1 in	0.95	1/4	3/8	1/2	13/16	1-1/8	
ST20x20x1.5 in	1.39	1/4	1/4	3/8	5/8	13/16	
ST20x20x1.75 in	1.60	1/4	1/4	3/8	1/2	3/4	
ST20x32x1.25 in	1.20	1/4	9/16	7/16	11/16	15/16	
ST 36x24x0.5	0.49	5/16	7/16	11/16	1-1/8	1-9/16	

Min Column Size In.	A/P	Min Thkns In.					
		1 Hr	1-1/2 Hr	2 Hr	3 Hr	4 Hr	
SP 4x0.237	0.22	11/16	1	1-3/8	2-1/16	2-3/4	
ST 4x4x0.1875	0.18	3/4	1-1/16	1-7/16	2-1/16	2-11/16	
ST 4x4x0.3125	0.29	1/2	13/16	1-1/8	1-3/4	2-5/16	
ST 4x4x0.375	0.34	7/16	3/4	1	1-9/16	2-1/8	
ST 4x4x0.5	0.44	3/8	9/16	7/8	1-3/8	1-7/8	
ST20x20x0.75 in	0.72	5/16	1/2	11/16	1-1/16	1-7/16	
ST20x20x1 in	0.95	1/4	3/8	1/2	13/16	1-1/8	
ST20x20x1.5 in	1.39	1/4	1/4	3/8	5/8	13/16	
ST20x20x1.75 in	1.60	1/4	1/4	3/8	1/2	3/4	
ST20x32x1.25 in	1.20	1/4	9/16	7/16	11/16	15/16	
ST 36x24x0.5	0.49	5/16	7/16	11/16	1-1/8	1-9/16	

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:

Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.

W = Weight of the steel column in lbs per foot.

The thicknesses contained in the table below are applicable when the Spray-Applied Fire Resistive Materials applied to the column's flange tips are reduced to one-half that shown in the table below (for contour application).

As an alternate to the table above, the required thickness of Spray-Applied Fire Resistive Materials to be applied to all surfaces of the steel pipes or tubes for all rating periods may be determined from the following equation:


Where:

h = Spray-Applied Fire Resistive Materials thickness in the range of 1/4 to 4-1/2 in. (rounded up to the nearest 1/16 in.)

R = Fire resistance rating period in minutes (60-240 mins.)

D = Heated perimeter of the steel column in inches.</



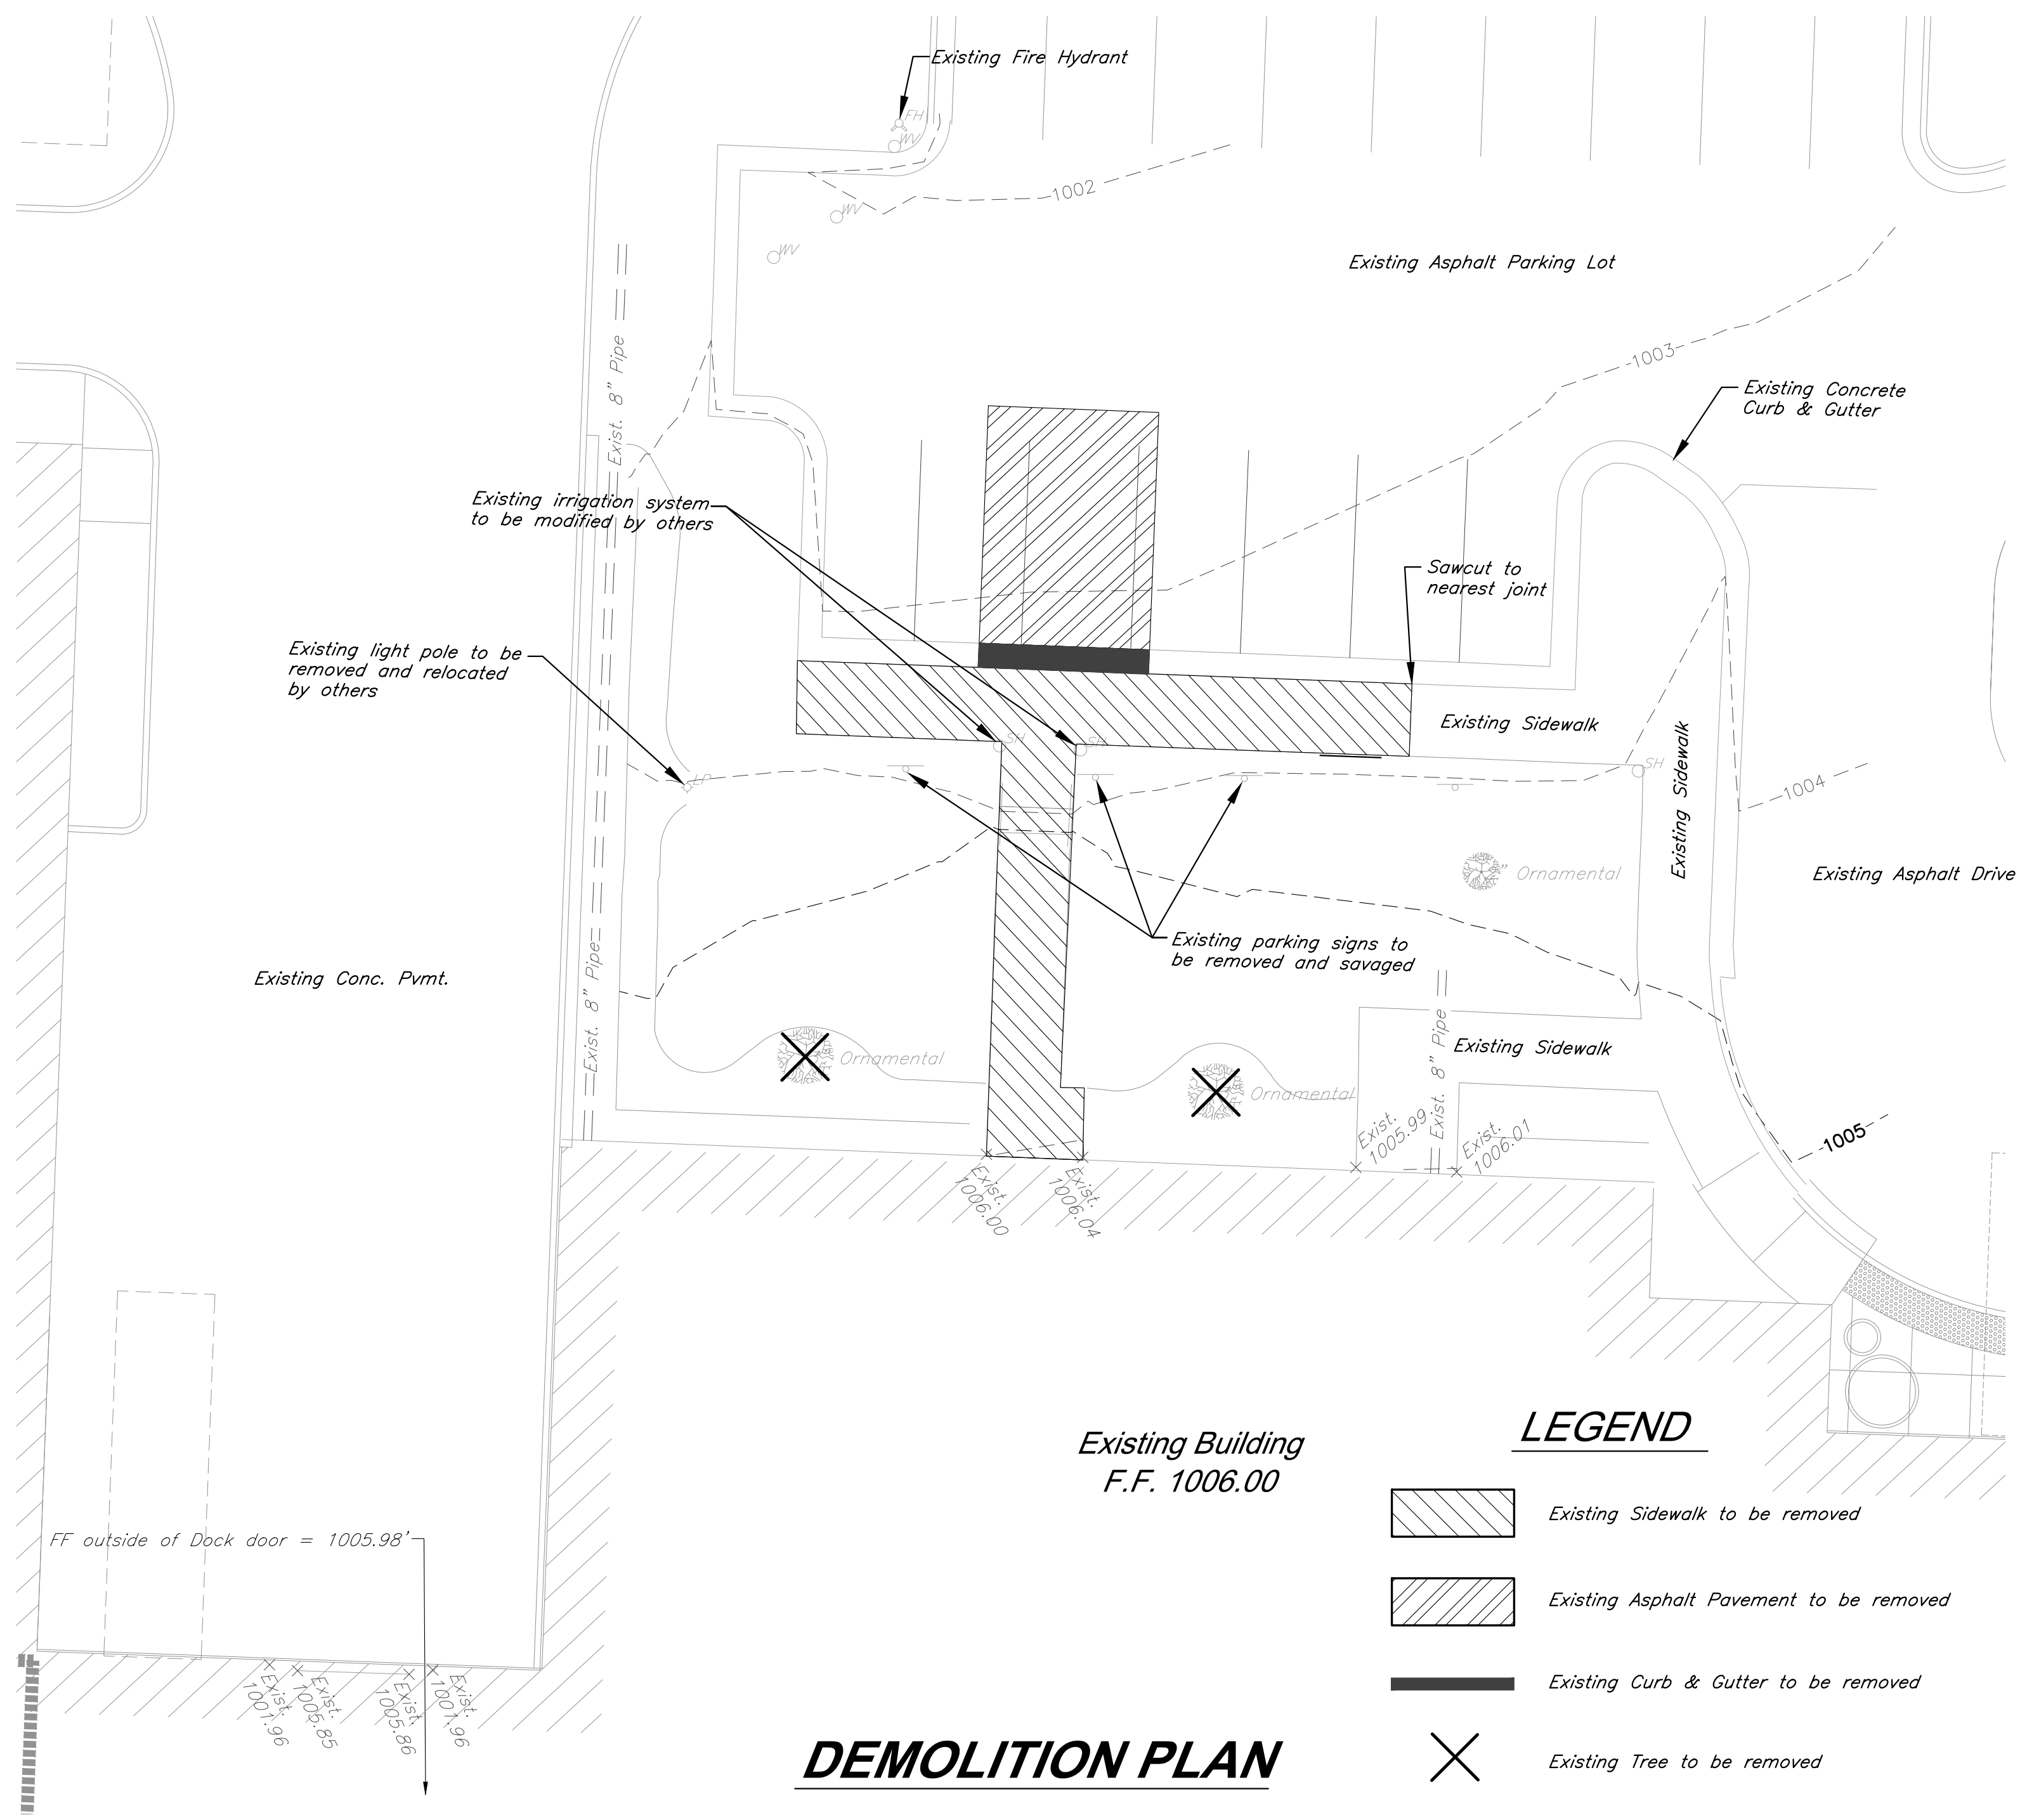

**DEMOLITION NOTES:**

- All material to be removed shall be disposed of off site by contractor. All disposal shall meet all applicable local, state, and federal guidelines.
- Trees marked for removal shall be completely removed, including root balls.
- Refer to Structural Drawings for demolition and modification of exist. building structures.
- All pavement and concrete shall be cleanly sawcut prior to removal.
- All demolition shall be as per these plans and shall adhere to all local, state, and federal laws, ordinances, codes, and statutes governing such demolition.
- Contractor shall remove any existing facilities as required to complete the construction of all site improvements detailed on these plans.
- Any Utility relocation shall be performed by respective Utility companies.

**GENERAL NOTES:**

- The construction covered by these plans shall conform to all applicable standards and specifications of the Public Works Department of the City of Lee's Summit, Missouri, current usage. Contractor to contact public works inspections at (816) 969-7450 (48) hours prior to commencement of any construction activity.
- Existing Utilities - The locations of existing underground utilities are approximate and have not been field verified by the Owner or it's representative. The Contractor shall determine the exact location of all existing utilities before commencing work. The Contractor is fully responsible for any and all damages occurring from his failure to do so. The Contractor shall coordinate the relocation of any utilities that may be encountered prior to the start of construction.
- Slopes - Slopes shall be graded at a maximum slope of 3:1 (Horz.:Vert.). It is critical that grading shown in and around building pad be accomplished accurately so drainage away from building pad is maintained at all times.
- Existing Site Conditions - The Contractor shall, prior to commencing work, investigate surface and subsurface conditions to be encountered across the project site and notify the Engineer if any discrepancies or changed conditions are noted.
- The contractor is responsible for the protection of all property corners and section corners. Any property corners and/or section corners disturbed or damaged by construction activities shall be reset by a Registered Land Surveyor licensed in the State of Missouri, at the contractor's expense.
- Cut/Fill - All fills are to be made with suitable structural fill material in accordance with the project geo-technical engineer recommendations. Special inspections are required. Contractor shall coordinate inspections with the Owner.
- The Contractor shall be responsible for the restoration of the right-of-way and for damaged improvements such as curbs, sidewalks, street light and traffic signal junction boxes, traffic signal loop lead ins, signal poles, etc. Damaged improvements shall be repaired in conformance with the latest City standards and to the City's satisfaction.
- The Contractor shall coordinate and conduct a pre-construction walk-thru with the City of Lee's Summit Public Works Department to review and document the condition of all existing public improvements (i.e. pavements, walks landscaping, etc.) surrounding the site.
- All disturbed areas within the Public right-of-way shall be sodded. All other disturbed areas shall be seeded in accordance with the project specifications.

**LEGEND OF SYMBOLS**

Signs	Guy Anchor	Existing Tree To Be Removed
Gas Test Station	Flood Light	Existing Tree To Remain
Water Meter	Fire Hydrant	Existing Trees
Sprinkler Valve/Boxes	Existing Storm Sewer Line	Existing Contours
Water Vault	S Existing Sanitary Sewer Line	Proposed Contours
Sanitary Sewer Manhole	W Existing Water Line	Boring Location
Electric Manhole	GAS Existing Gas Line	Concrete Pavement
Street Light	U.D. Underdrain	Existing Top of Curb Elevation
Power Pole	Existing Fence Line	Existing Spot Grade Elevation
Traffic Signal	Telephone Vault	Existing Building
Elec. Box	Backflow Preventer	Proposed Spot Grade Elevation
Guy Pole	Existing Easement	
Right of Way Marker	Property Line	

**FLOOD PLAIN:**




The subject property lies within Zone C "Areas of minimal flooding" as shown on and according to FIRM Community-Panel Number 290174 0007 C, Dated August 3, 1989.

**PROJECT BENCHMARK:**

" " Cut on the North side of Concrete Base of North Post of Todd George Road Exit Sign for Westbound U.S. Highway 50. Approximately 30' South of the Centerline of the Outer Road.

Elevation = 1012.79

**CAUTION!**  
Numerous Utilities on site. Contractor to verify location and elevation of all utilities prior to commencing construction.

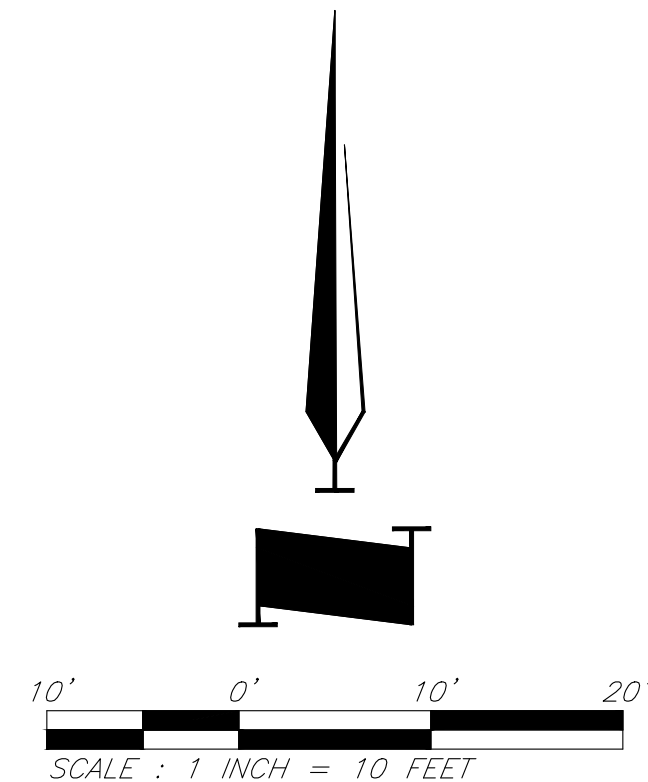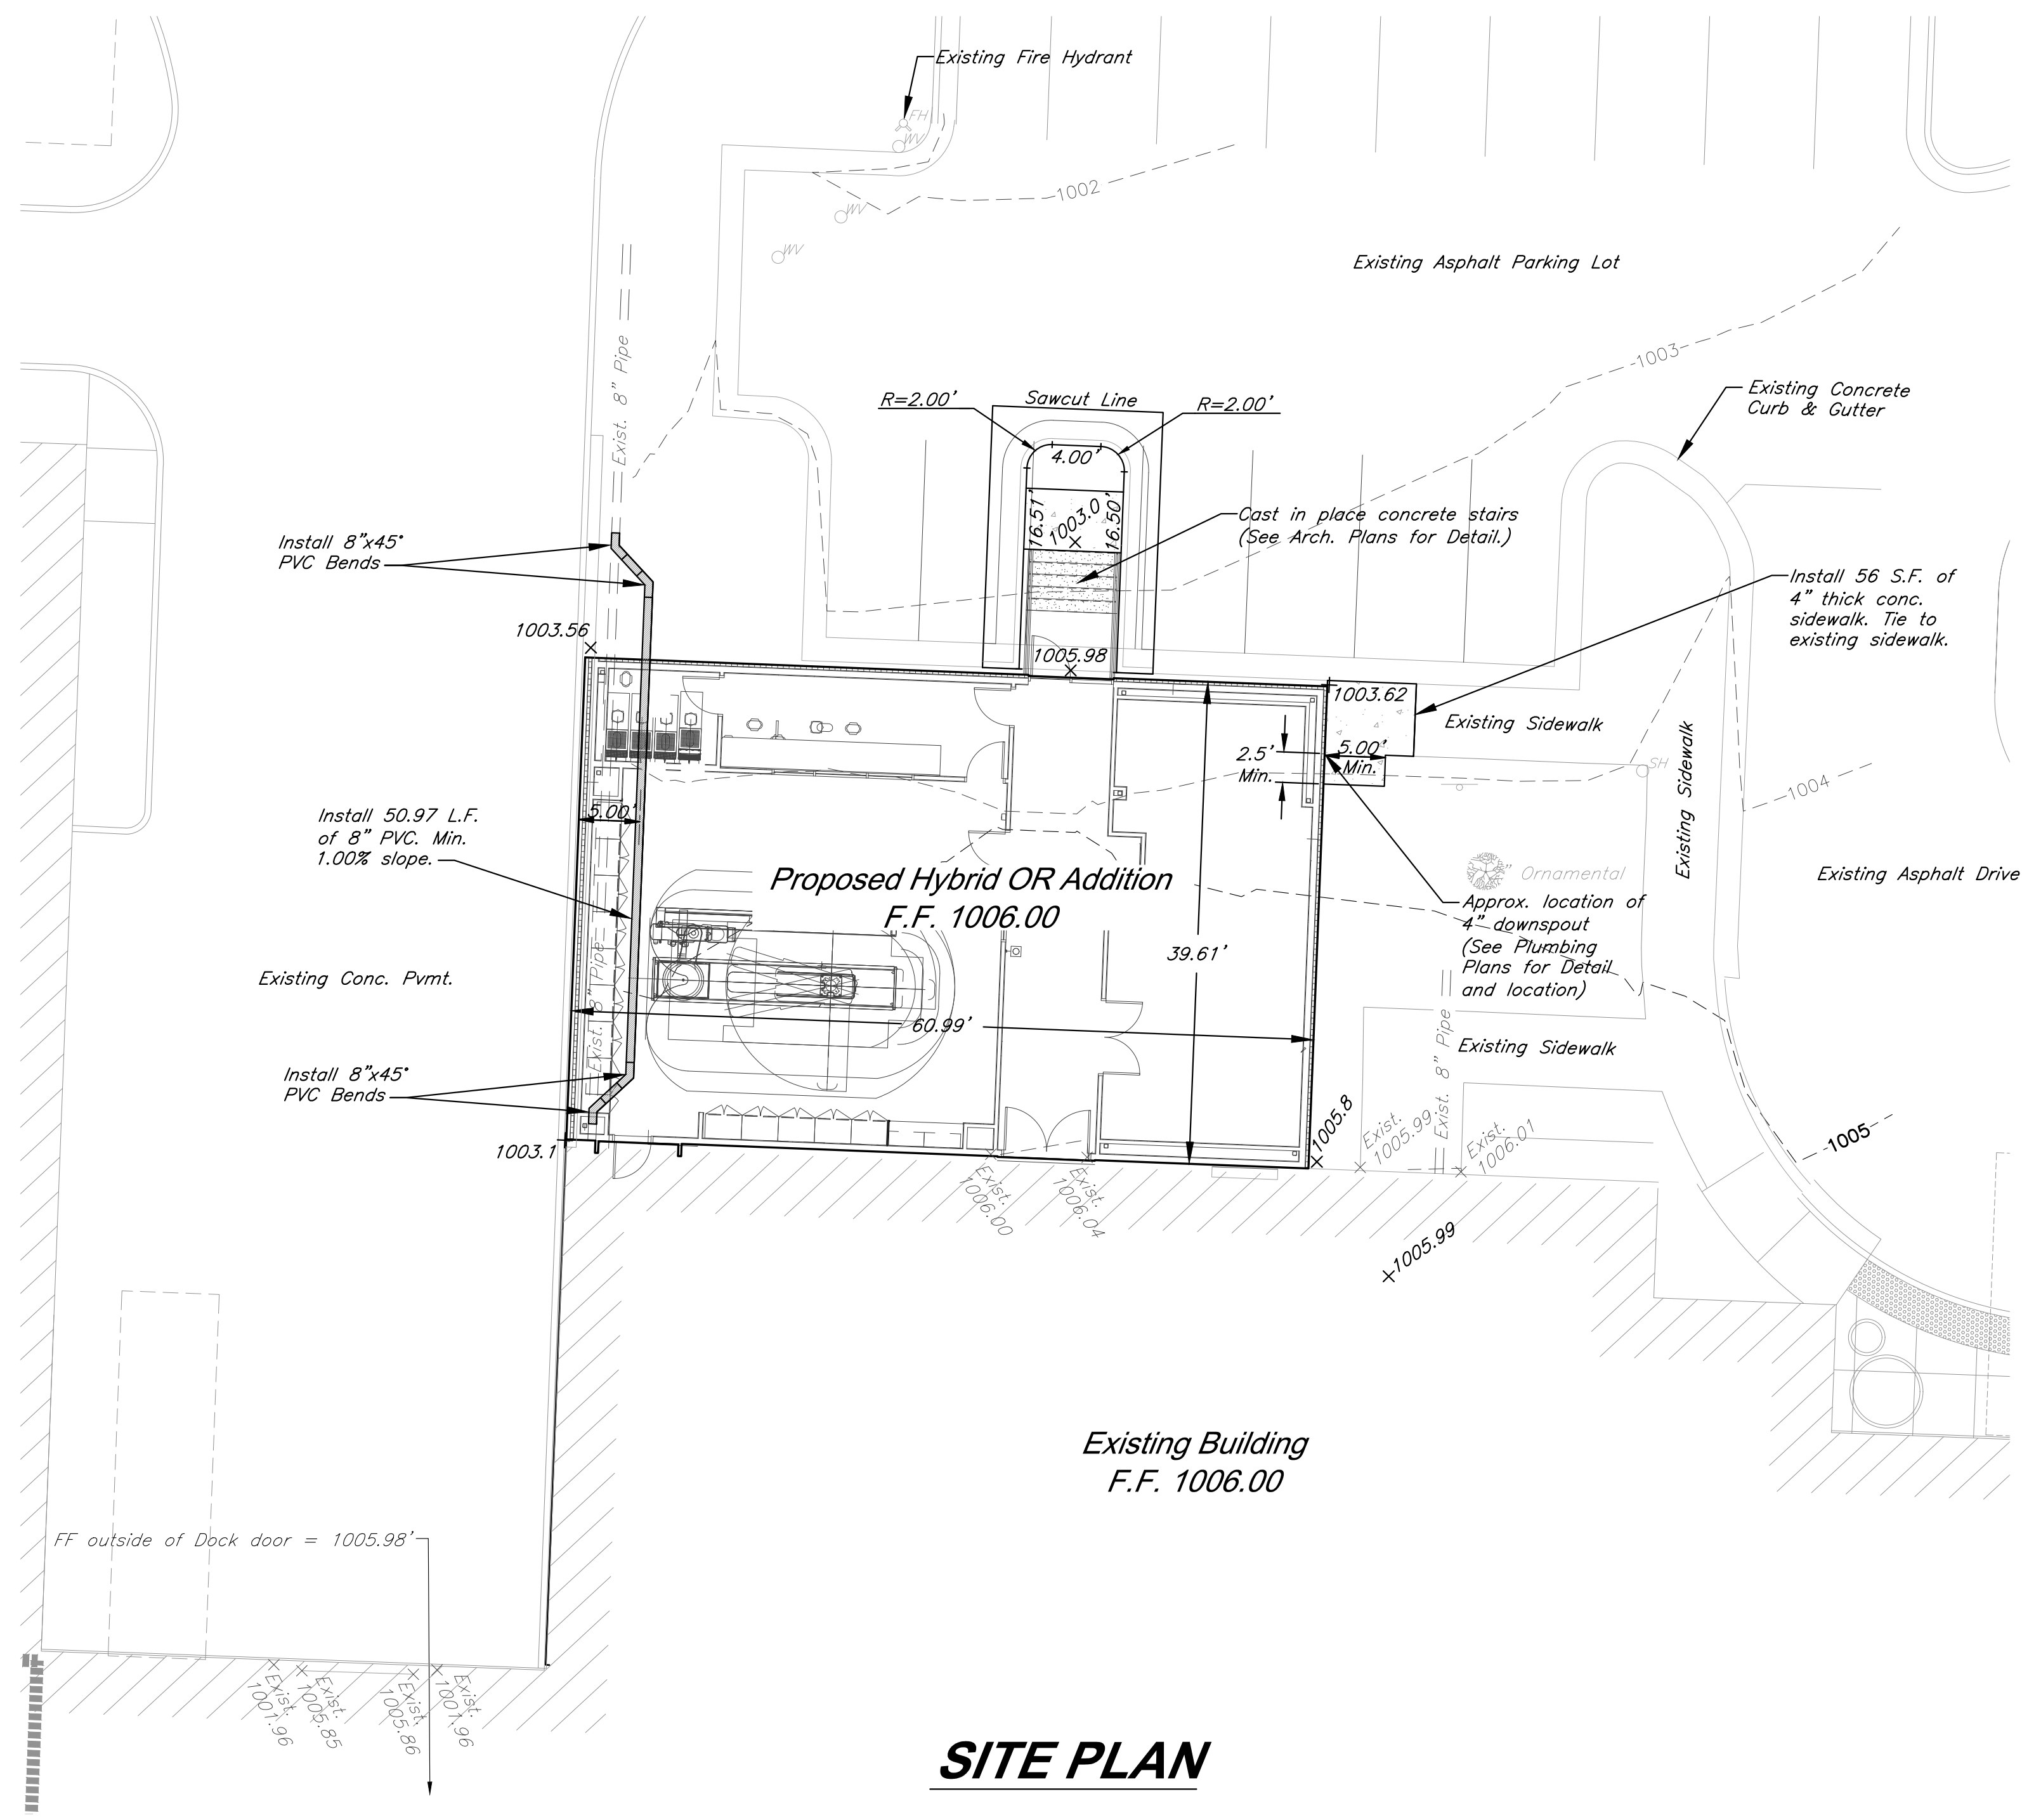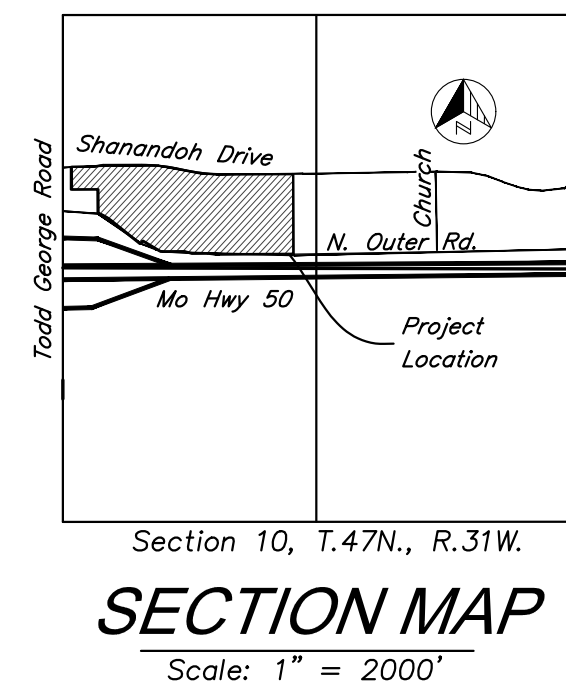

CIVIL ENGINEERING BY:

**GBA**  
9801 Renner Boulevard  
Lenexa, Kansas 66219  
913.492.0400  
www.gbateam.com

PRELIMINARY,  
NOT FOR  
CONSTRUCTION,  
RECORDING  
PURPOSES, OR  
IMPLEMENTATION  
2/17/2020 1:55:59 PM

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition

2100 SE Blue Parkway

Lee's Summit, MO 64063

Date 2-6-2020  
Job Number 3-19058  
Drawn By Author  
Checked By Checker


Revision  
Number Date Description

**C100**


© 2020 ACI/BOLAND, Inc

SITE PLAN



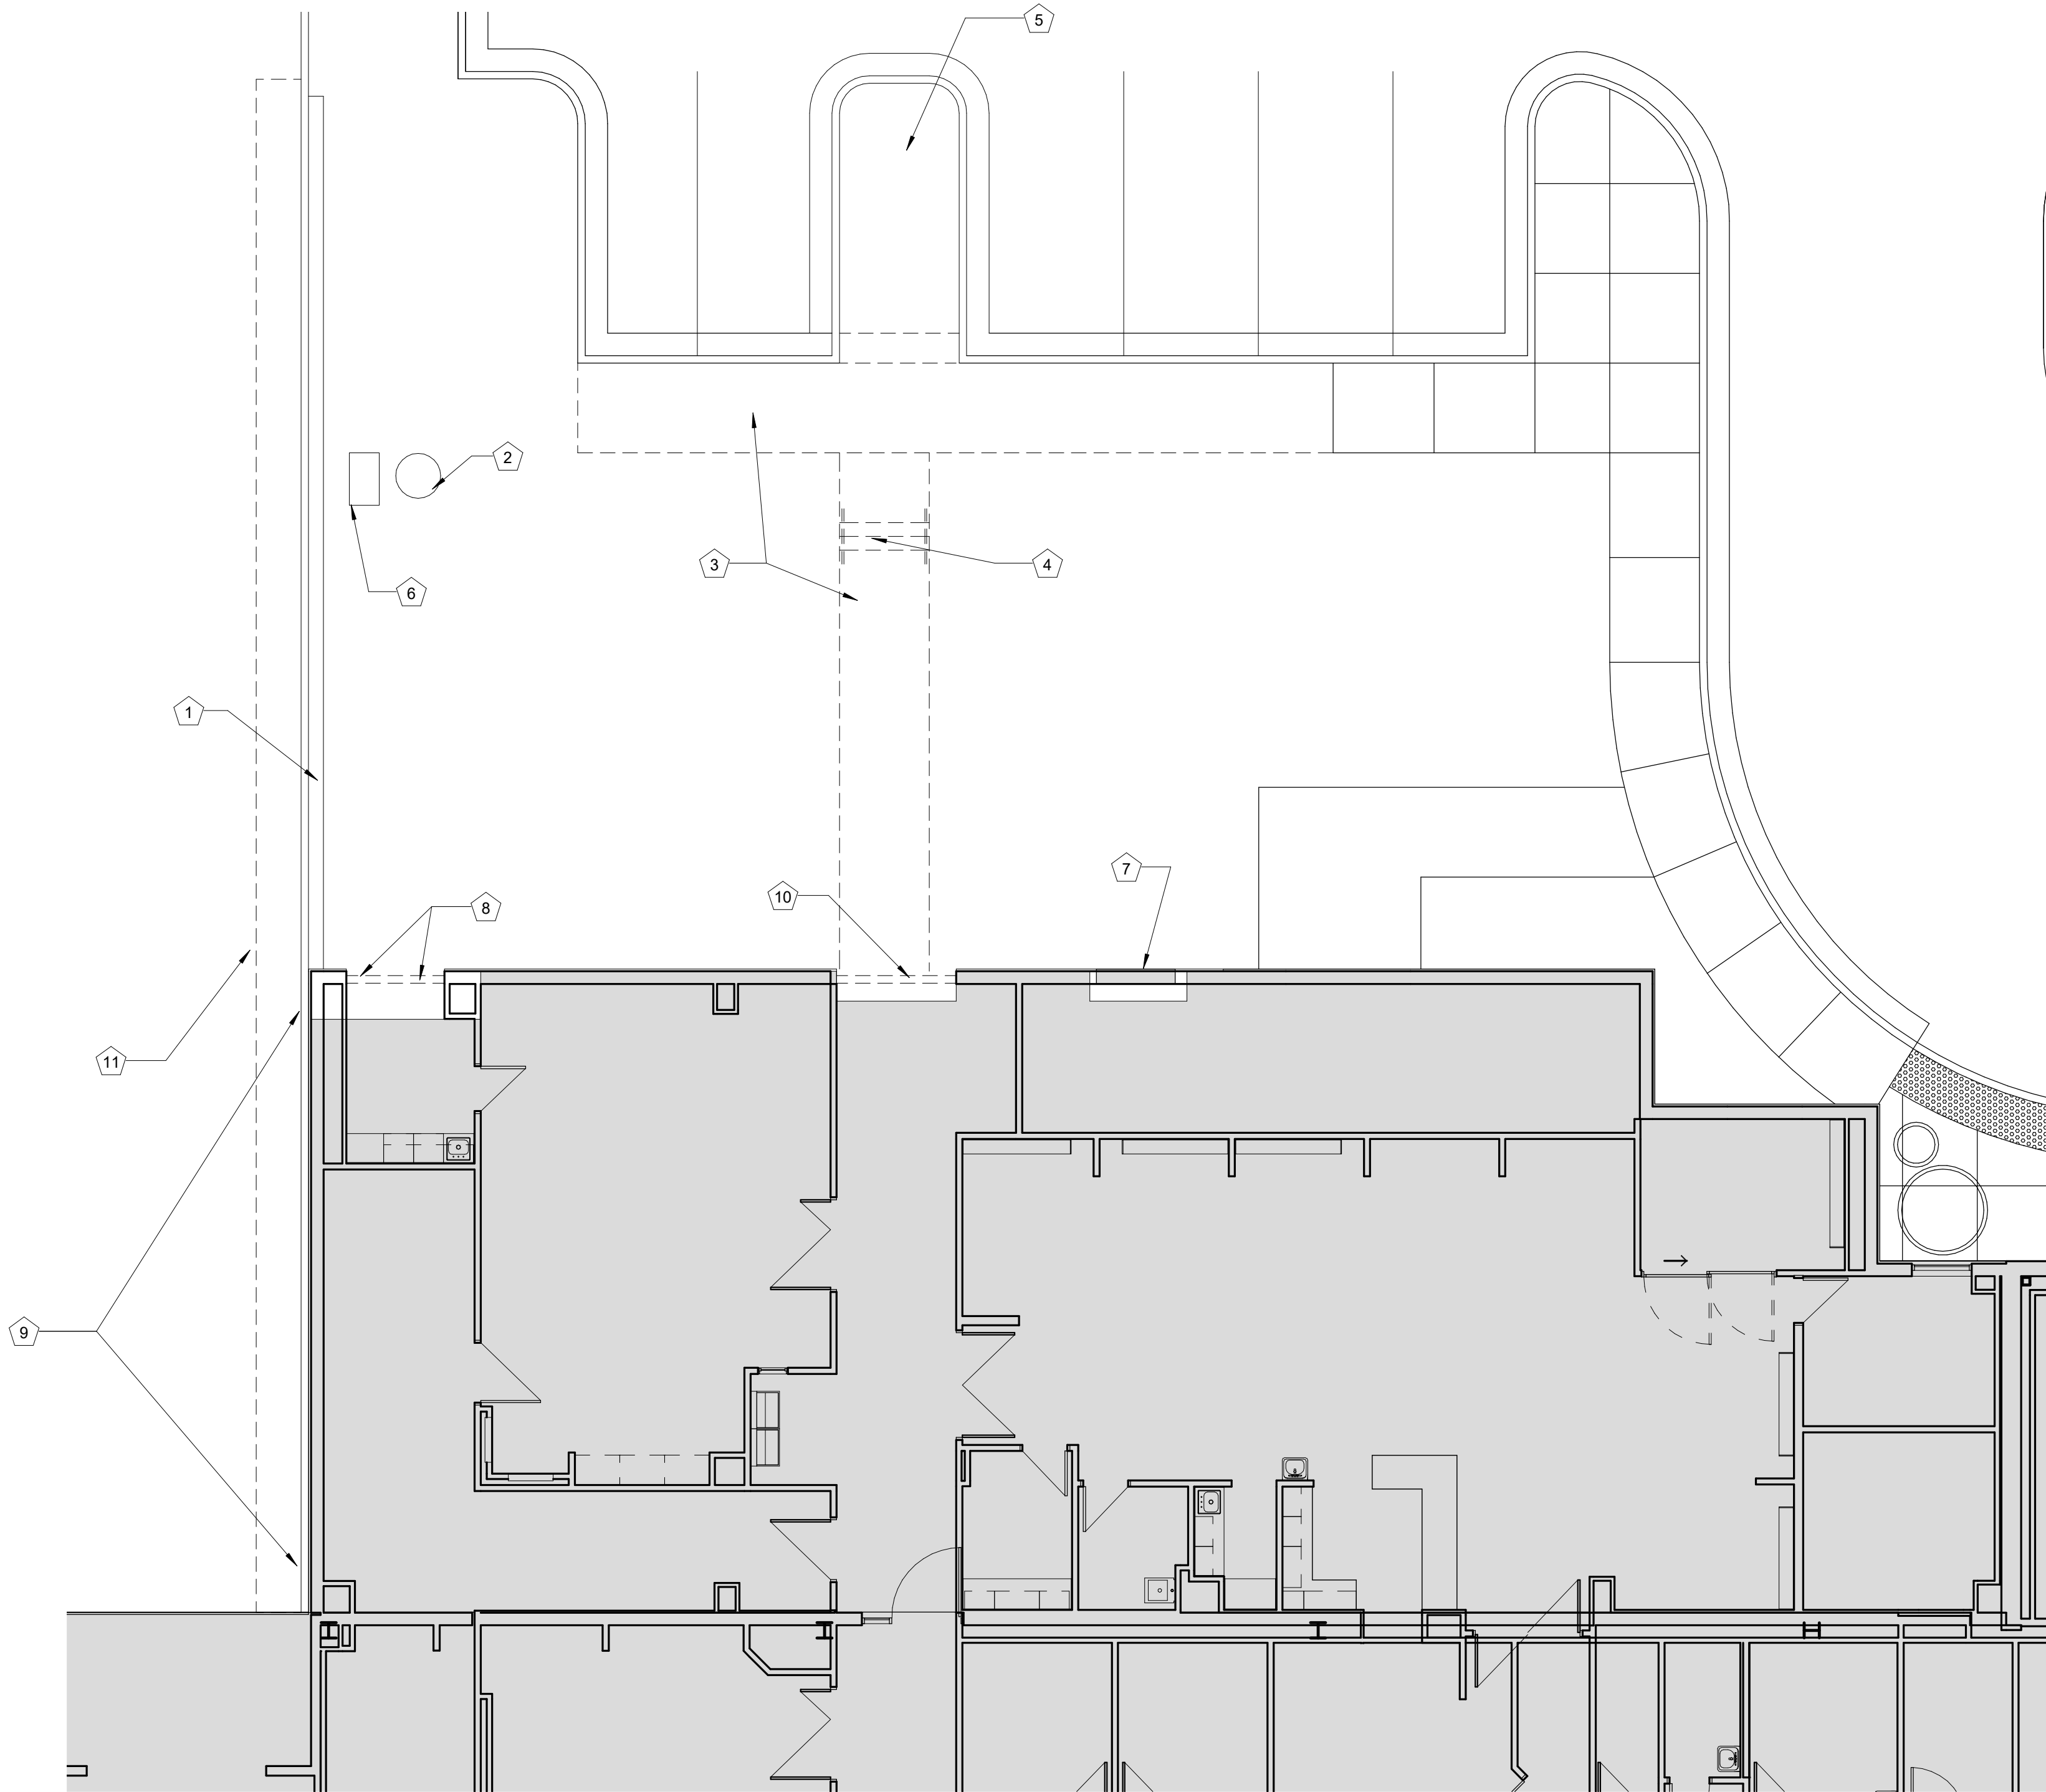

B5 DEMOLITION PLAN  
1/8" = 1'-0"

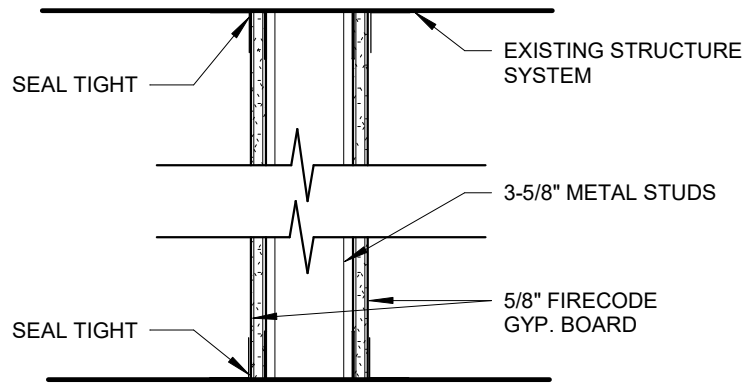

WHERE DUST PARTITIONS ARE TO REMAIN THROUGH CONSTRUCTION, THEY SHALL BE CONSTRUCTED OF 3/8" METAL STUDS WITH CONTINUOUS TOP AND BOTTOM RUNNERS. PARTITIONS SHALL EXTEND TIGHT FROM FLOOR TO THE EXISTING CEILING OR STRUCTURE ABOVE, AND COPED AROUND DUCTS, PIPES, ETC., THAT PENETRATE THE PARTITION. THE ENTIRE PARTITION SHALL BE COVERED WITH 5/8" FIRE RATED GYP. BOARD SCREWED TO STUDS. ALL JOINTS BETWEEN SHEATHING, AT WALLS, AT FLOORS, CEILINGS, AROUND PIPES, ETC., TAPED AND SEALED TIGHT TO ENSURE DUST-PROOFING.

THE CONTRACTOR SHALL COVER AND SEAL IN A DUST-TIGHT MANNER ALL EXISTING OPENINGS, GRILLES, JOINTS AROUND DOORS AND FRAMES, ETC., WITH FIRE RETARDANT SHEET AND/OR TAPE AS APPROPRIATE WHERE SUCH OPENINGS, ETC., OCCUR IN EXISTING PARTITIONS SEPARATING EXISTING AREAS FROM CONSTRUCTION AREAS. THE CONTRACTOR SHALL MAINTAIN AND REPAIR ANY DUST BARRIERS AS DETERMINED BY, AND TO THE SATISFACTION OF, THE OWNER.

SMOKE TIGHT NON-COMBUSTIBLE CONSTRUCTION  
PARTITION  
DP 1 1/2" = 1'-0"

### DEMOLITION LEGEND

NOT IN SCOPE

EXISTING TO REMAIN

WALLS, DOORS, EQUIPMENT, FIXTURES, ETC. INDICATED BY DASHED LINES WITHIN THE AREA OF CONSTRUCTION SHALL BE REMOVED. REFER TO THIS SHEET FOR ARCHITECTURAL DEMOLITION NOTES.

EXISTING DOOR, FRAME AND HARDWARE TO REMAIN

REMOVE EXISTING DOOR AND HARDWARE, EXISTING FRAME TO REMAIN. PREPARE FRAME FOR NEW DOOR AND HARDWARE.

REMOVE EXISTING DOOR, FRAME AND HARDWARE COMPLETELY. PREPARE EXISTING CONSTRUCTION TO REMAIN AS REQUIRED FOR NEW CONSTRUCTION.

REMOVE EXISTING DOOR, FRAME, HARDWARE AND WALL CONSTRUCTION COMPLETELY.

DUST PARTITIONS - THE CONTRACTOR SHALL MAKE EVERY EFFORT TO ENSURE THE EXISTING BUILDING TO BE COMPLETELY PROTECTED AGAINST INFILTRATION OF DUST AND MOISTURE DURING THE COURSE OF DEMOLITION CONSTRUCTION WITH DUST PARTITIONS ACROSS CORRIDORS AND OPENINGS THRU EXISTING WALLS. ALL CONSTRUCTION WORK CREATING ANY TYPE OF DUST THROUGHOUT THE BUILDING SHALL BE SHIELDED BY DUST PROTECTION. PROVIDE DOOR OPENING AS REQUIRED FOR EMERGENCY EGRESS.

(2) LAYERS 8 MIL PVC W/ STUDS @ 4'-0" O.C. DUST BARRIER. THE CONTRACTOR SHALL MAKE EVERY EFFORT TO ENSURE THE EXISTING BUILDING TO BE COMPLETELY PROTECTED AGAINST THE INFILTRATION OF DUST & MOISTURE DURING THE COURSE OF DEMOLITION CONSTRUCTION. PROVIDE DOOR OPENING AS REQUIRED FOR EMERGENCY EGRESS.

- ### GENERAL DEMOLITION NOTES
1. THE OWNER SHALL VACATE THE EXISTING ROOMS AS INDICATED ON THE PLAN AND BE RESPONSIBLE FOR THE REMOVAL OF ANY EQUIPMENT WHICH IS TO REMAIN THE PROPERTY OF THE OWNER PRIOR TO ANY WORK DONE BY THE CONTRACTOR FOR THIS PORTION OF THE SEQUENCE.
  2. INSTALL TEMPORARY DUST PROTECTION PARTITION AS INDICATED ON THE PLAN TO CONTAIN DEMOLITION CONSTRUCTION DUST AND DEBRIS WITHIN THE AREA OF CONSTRUCTION. REFER TO DUST PARTITION "DP" ON THIS SHEET.
  3. IT IS THE INTENT OF THIS DEMOLITION TO REMOVE ALL EXISTING CONSTRUCTION WHICH CONFLICTS WITH THE INTENT OF THE NEW CONSTRUCTION. EVERY DEMOLITION DETAIL MAY NOT NECESSARILY BE COVERED ON THESE DRAWINGS. FIELD VERIFY THE EXTENT OF ALL DEMOLITION.
  4. THE CONTRACTOR SHALL USE EXTREME CARE IN THE PROTECTION OF ALL ADJACENT AREAS FOR IT IS IMPERATIVE TO PROVIDE CONTINUOUS OPERATION OF ALL OCCUPIED AREAS DURING THE DEMOLITION, CONSTRUCTION AND RENOVATION WITHIN THIS AND ALL SEQUENCES OF CONSTRUCTION.
  5. ALL PARTITIONS, DOORS, EQUIPMENT, ETC. INDICATED BY DASHED LINES ON THIS PLAN SHALL BE REMOVED.
  6. ALL DEMOLITION DESCRIBED IN THESE DOCUMENTS SHALL BE COORDINATED WITH PHASING WORK REQUIRED TO COMPLETE THE WORK.
  7. THE CONTRACTOR SHALL COORDINATE ALL DEMOLITION WORK W/ OCCUPIED SPACES BELOW AND SHALL NOTIFY OWNER TWO WEEKS PRIOR TO COMMENCING WORK. SUCH SPACES ARE TO REMAIN OCCUPIED DURING DEMOLITION AND ALL WORK SHALL BE PERFORMED IN SUCH A MANNER TO MINIMIZE DISRUPTION TO OCCUPIED SPACES. EXISTING FLOOR, WALL AND CEILING FINISHES TO REMAIN SHALL BE PROTECTED AND ANY DAMAGE DONE AS A RESULT OF DEMOLITION WORK SHALL BE REPAIRED.
  8. IN AREAS SCHEDULED FOR DEMOLITION, THE CONTRACTOR SHALL REMOVE ALL ACCESSORIES, GRAB BARS, MIRRORS, SOAP AND PAPER TOWEL DISPENSERS, SHELVES, BULLETIN BOARDS, ETC., SHALL BE TURNED OVER TO THE OWNER, EXCEPT FOR RELOCATED ITEMS.
  9. WHERE NEW FINISHES ARE CALLED FOR, REMOVE AND DISCARD EXISTING FLOORING, CEILINGS AND WALL COVERING THROUGHOUT AREA DESIGNATED FOR NEW CONSTRUCTION AND PREP EXISTING FLOOR AND WALL SUBSTRATE TO RECEIVE THE INSTALLATION OF NEW FINISH AS SCHEDULED.
  10. AT DISSIMILAR FLOOR ELEVATIONS, AFTER THE EXISTING CONSTRUCTION HAS BEEN REMOVED, FEATHER EPOXY GROUT TOPPINGS TO EACH FLOOR ELEVATION AND GRIND SMOOTH. AT DISSIMILAR FLOOR MATERIALS, AND/OR AT JUNCTIONS BETWEEN EXISTING FLOOR, PROVIDE THE APPROPRIATE TRANSITION STRIP AT THE EDGE.
  11. AT VARIATIONS IN WALL SURFACES AFTER THE EXISTING CONSTRUCTION HAS BEEN REMOVED, FEATHER JOINT COMPOUND AND SAND SMOOTH.
  12. WHERE CEILING IS TO REMAIN, REMOVE ALL DAMAGED CEILING PANELS/ TILES AND REPLACE WITH NEW TO MATCH EXISTING.
  13. REMOVE AND RETURN TO THE OWNER ALL EXISTING PLUMBING FIXTURES. CAP ALL SUPPLY AND WASTE LINES AS REQUIRED. REFER TO PLUMBING DRAWINGS FOR ADDITIONAL INFORMATION.
  14. THE CONTRACTOR SHALL PATCH TO MATCH ADJACENT SURFACES OF EXISTING WALLS AND FLOORS IN ALL AREAS THAT REQUIRE THE REMOVAL OF GENERAL MECHANICAL, ELECTRICAL, AND PLUMBING WORK AND OF EQUIPMENT AND FIXTURES.
  15. THE CONTRACTOR SHALL PROVIDE FOR ALL NECESSARY TEMPORARY RELOCATION AND MAINTENANCE OF ALL EXISTING UTILITIES WHICH ARE CURRENTLY IN USE AND WHICH MUST BE TEMPORARILY RELOCATED DURING CONSTRUCTION OF NEW AREAS AND RENOVATION OF EXISTING AREAS THROUGH EACH SEQUENCE OF CONSTRUCTION.
  16. REFER TO MECHANICAL, ELECTRICAL, AND PLUMBING DRAWINGS FOR WORK REQUIRED IN THIS STEP OF THE SEQUENCE OF CONSTRUCTION.
  17. WHERE REMOVAL OF EXISTING PARTITIONS, EQUIPMENT, ETC. DISTURBS EXISTING MECHANICAL, PLUMBING OR ELECTRICAL SERVICES, THE CONTRACTOR SHALL MAKE PERMANENT REVISIONS AS REQUIRED AND IF NECESSARY, PROVIDE TEMPORARY SERVICES TO AREAS NOT SCHEDULED FOR DEMOLITION AND RENOVATION.
  18. WHERE EXISTING WALLS, CEILINGS, OR FLOORS ARE DAMAGED BY THE CONTRACTOR FOR ACCESS TO SERVICES AND NEW CONSTRUCTION WHICH MAY NOT BE SCHEDULED OR SHOWN ON THE DRAWINGS, THE CONTRACTOR SHALL BE RESPONSIBLE TO PATCH TO MATCH MATERIAL AND FINISHES TO ORIGINAL CONDITIONS. IF EXISTING FINISHES CANNOT BE MATCHED, THE ENTIRE WALL, CEILING, OR FLOOR SHALL BE REFINISHED TO THE NEAREST CORNER OR POSITIVE BREAKING POINT.
  19. WHEN DEMOLITION CAUSES OR EXPOSES DAMAGE TO FLOOR SLAB, WALL, OR CEILING SURFACES WHICH WILL REMAIN EXPOSED IN THE FINISHED WORK, SUCH CONDITIONS SHALL BE REPAIRED AND LEVELED AS REQUIRED TO RECEIVE NEW FINISHES.
  20. CLEAN AIR GRILLES AND LIGHT FIXTURES THROUGHOUT PROJECT AREA UPON COMPLETION OF WORK.
  21. WHERE EXISTING PHONE, DATA, OR PHONE DATA OUTLETS ARE REMOVED, THE CONTRACTOR SHALL USE EXTREME CARE IN PULLING WIRE THROUGH THE EXISTING CONDUITS, COIL AND WRAP ABOVE EXISTING CEILING FOR REUSE.
  22. WHERE EXTERIOR WALLS, WINDOWS, AND/OR DOORS ARE BEING REMOVED, THE CONTRACTOR WILL BE RESPONSIBLE TO CONSTRUCT TEMPORARY PARTITIONS AS REQUIRED TO ENSURE THAT THE EXISTING BUILDINGS REMAIN WATERTIGHT AND WITHOUT DRAFTS DURING DEMOLITION WORK. THESE PARTITIONS SHALL REMAIN IN PLACE DURING THE NEW CONSTRUCTION WORK, OR AS REQUIRED TO MAINTAIN THIS SEPARATION.
  23. THE CONTRACTOR SHALL FILL ALL OPENINGS IN EXTERIOR WALLS RESULTING FROM THE REMOVAL OF LOUVERS, EXHAUST FANS, ETC. THE OPENINGS SHALL BE FILLED FLUSH WITH AND OF THE SAME MATERIALS AS THE SURROUNDING WALLS.
  24. PROVIDE SHORING AND BRACING AS REQUIRED DURING DEMOLITION AND NEW CONSTRUCTION.

KEYNOTES - DEMO PLAN		#
NUMBER	COMMENTS	
1	REMOVE EXISTING STEEL GUARDRAIL AND CONCRETE WALL	
2	RELOCATE EXISTING LIGHT POLE AND CONCRETE BASE PER ELECT	
3	REMOVE EXISTING CONCRETE SIDEWALK AND STEPS	
4	REMOVE EXISTING HANDRAIL	
5	REMOVE EXISTING ASPHALT PAVEMENT	
6	U/G BIOHAZARD HOLDING TANK NOTED ON EXISTING PLAN, BUT IS NOT BELIEVED TO BE INSTALLED. BE CAUTIOUS WHEN EXCAVATING THIS AREA	
7	REMOVE EXISTING LOUVER IN WALL AND RELOCATE PER MEP DRAWINGS. INFILL WALL TO MATCH ADJACENT MATERIALS. CUT NEW OPENING IN WALL (ABOVE CLO) FOR NEW DUCTWORK	
8	REMOVE EXISTING EXTERIOR WALL CONSTRUCTION FOR CONNECTION WITH NEW ADDITION. PATCH EXISTING FLOOR, WALLS AND CEILING AS REQUIRED	
9	REPLACE EXISTING EPS BASE WITH NEW SPLIT FACE CMU	
10	REMOVE EXISTING DOOR, FRAME AND GLASS	
11	REMOVE EXISTING PAVEMENT FOR NEW WORK AT EXISTING BUILDING AND NEW ADDITION. PATCH TO MATCH EXISTING PAVEMENT	

Victor L. Mosby  
Architect  
License - Missouri EA-6471

# ACI

## BOLAND

### ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

### STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
Licensee's Certificate of Authority Number:  
Phone Number: 785.842.6464

## Lee's Summit Medical Center

### Hybrid OR Addition

# 2100 SE Blue Parkway

## Lee's Summit, MO 64063

Date	3-23-2020
Job Number	3-19058
Drawn By	CL
Checked By	KC


Revision		
Number	Date	Description

# AD1.1

© 2020 ACI/BOLAND, Inc.  
DEMOLITION PLAN



A  
B  
C  
D  
E

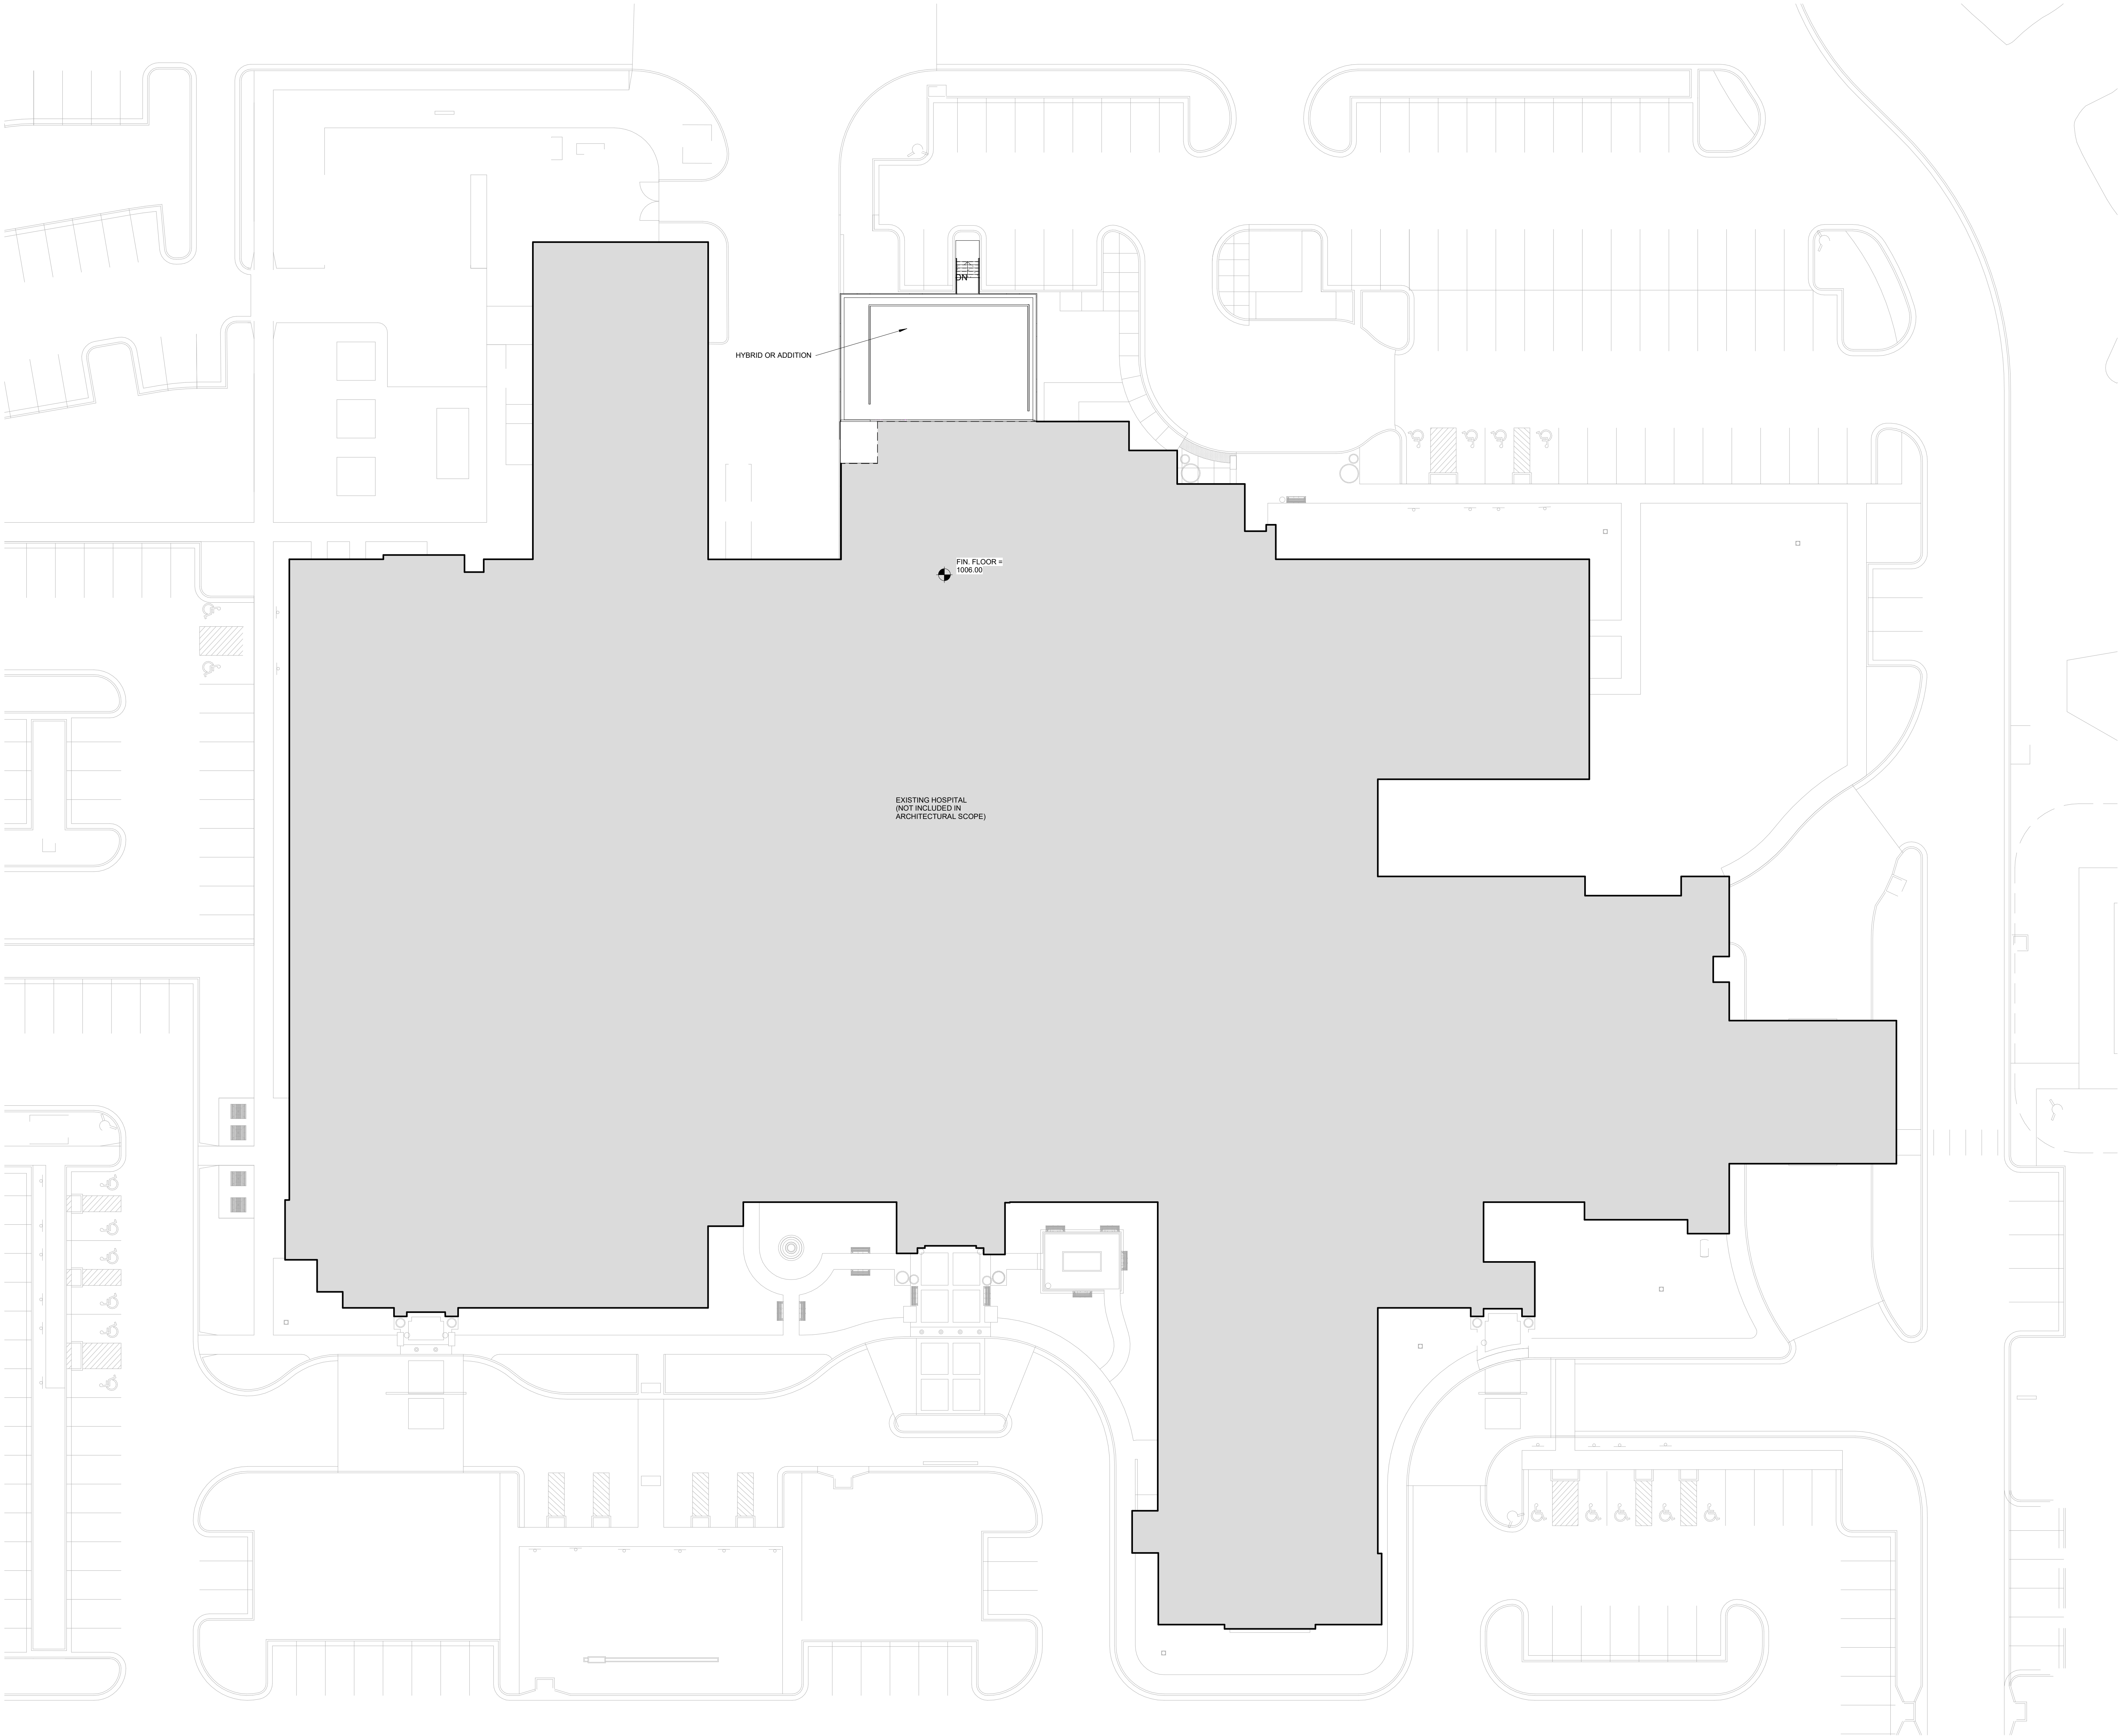

A1 SITE PLAN  
1" = 20'-0"



Victor L. Mosby, Architect  
License - Missouri EA-6471

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date 3-23-2020  
Job Number 3-19058  
Drawn By RN  
Checked By KC


Revision  
Number Date Description

**A2.0**

© 2020 ACI/BOLAND, Inc.

SITE PLAN



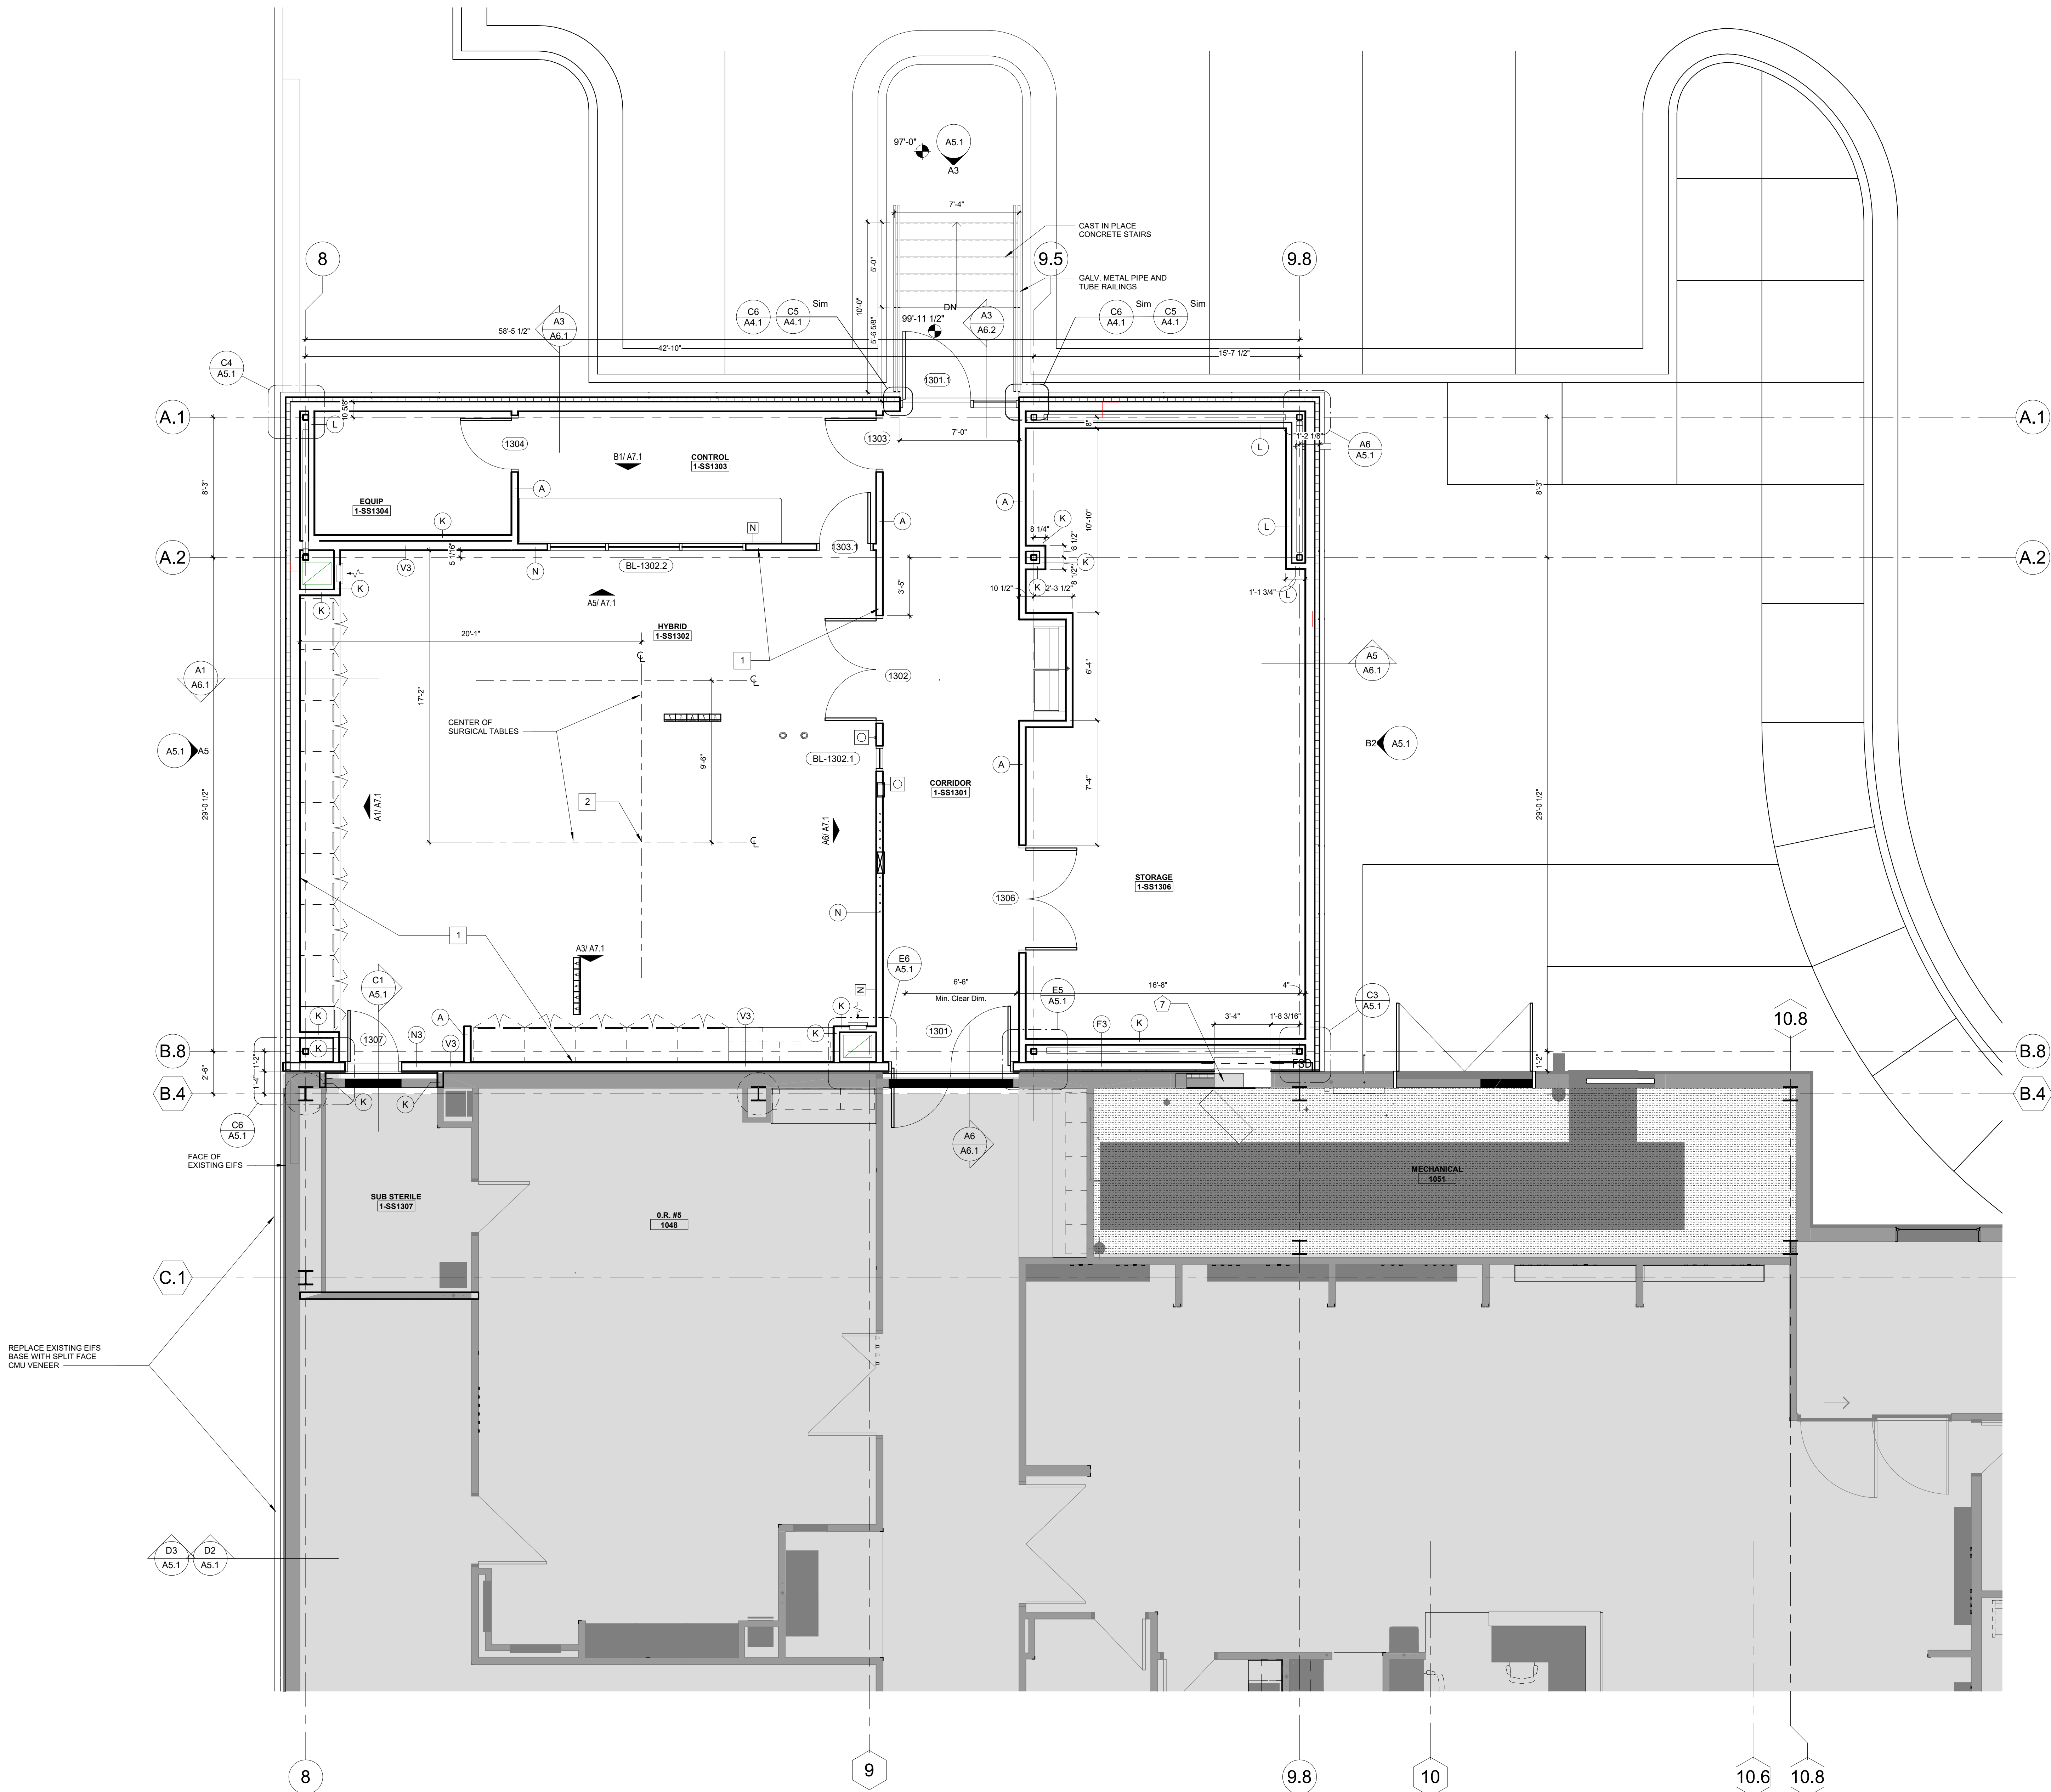

KEYNOTES - FLOOR..	
NUMBER	COMMENTS
1	ALL WALLS, DOORS & BORROWED LITE VIEW WINDOWS TO RECEIVE LEAD LINING IN THIS ROOM. RE: PHYSICIST'S REPORT FOR THICKNESS
2	ISOCENTER WORKPOINT RE: VENDOR DRAWINGS FOR NEW HYBRID OR EQUIPMENT

FLOOR PLAN LEGEND

CONCRETE SLAB INFILL  
RE: STRUCT

NOT IN ARCHITECTURAL SCOPE

NOT IN SCOPE

NEW WALL

EXISTING WALL

EXISTING EXPANSION JOINT

DOOR NO. 101A

NEW DOOR

EXISTING DOOR



Victor L. Mosby  
Architect  
License - Missouri EA-6471

ACI  
BOLAND  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date3-23-2020  
Job Number3-19058  
Drawn ByCL  
Checked ByKC

Revision  
NumberDateDescription


A2.1

© 2020 ACI/BOLAND, Inc.  
FIRST FLOOR DIMENSION PLAN




© 2020 ACI/BOLAND, Inc



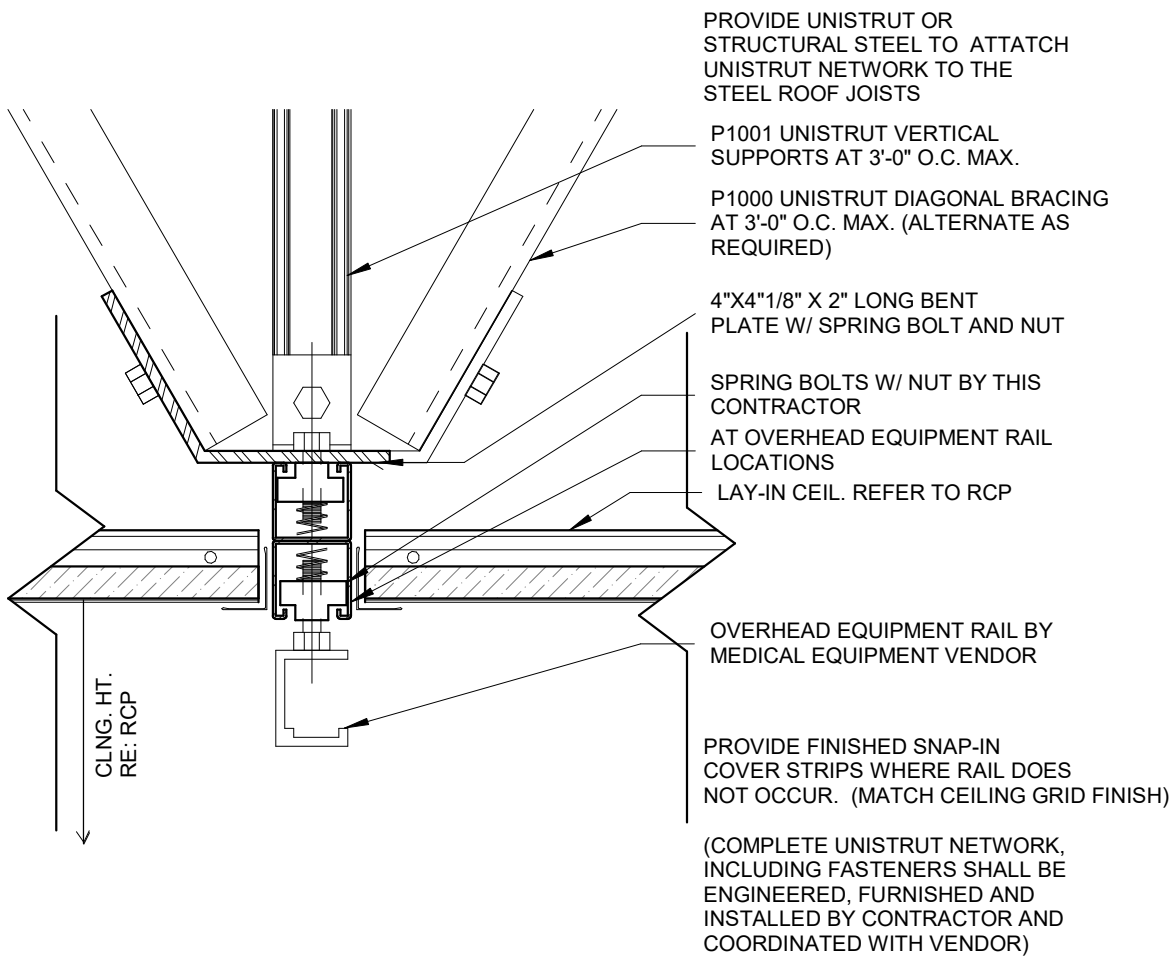

NOTE: SEE MEDICAL EQUIPMENT VENDOR DRAWINGS FOR ADDITIONAL INFORMATION

E4 CEILING DETAIL  
3" = 1'-0"

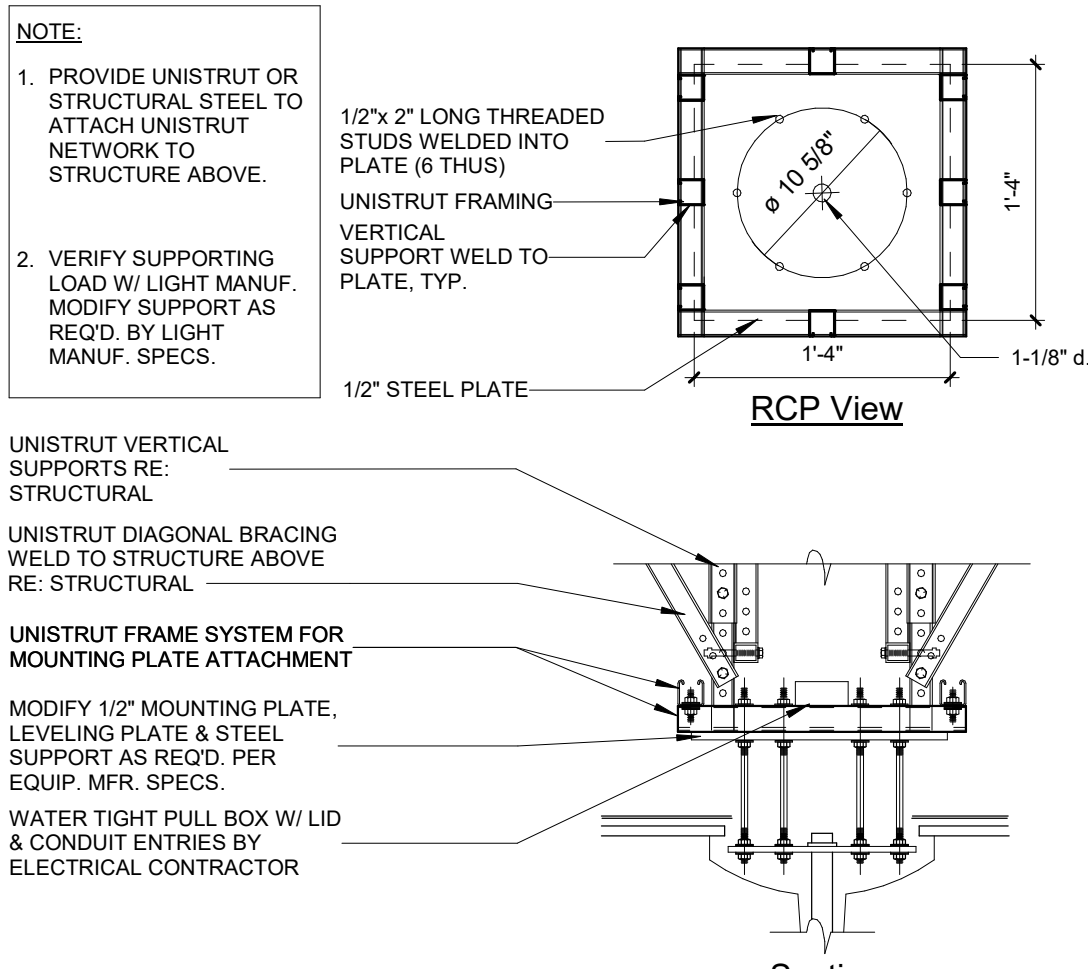

NOTE: SEE MEDICAL EQUIPMENT VENDOR DRAWINGS FOR ADDITIONAL INFORMATION

E3 LIGHT SUPPORT  
1" = 1'-0"

GENERAL NOTES


1. THIS PLAN SHALL BE USED TO COORDINATE THE CEILING LAYOUT WITH MECHANICAL AND ELECTRICAL WORK. VERIFY THE EXACT QUANTITY REQUIRED.
2. CONTRACTOR TO REFER TO THE ELECTRICAL PLANS FOR ACTUAL LIGHTING SIZES AND FIXTURE TYPES.
3. SEE SPECIFICATIONS FOR CEILING TYPES.
4. REFER TO ARCHITECTURAL FLOOR PLANS FOR MATERIAL LEGEND OF ALL TYPES.
5. ALL CEILINGS SHALL BE 9'-0" AFF UNLESS OTHERWISE NOTED.

KEYNOTES - RCP

Number	Comments
1	PROVIDE NEW CEILING PATCH TO MATCH EXISTING

CEILING LEGEND

- RECESSED CAN LIGHT FIXTURE RE: ELECT
- ◻ 2X4 RECESSED/SURFACE LED LIGHT FIXTURE RE: ELECT
- ◻ 2X2 RECESSED/SURFACE LEDLIGHT FIXTURE RE: ELECT
- ◻ SURFACE-MOUNTED LIGHT FIXTURE RE: ELECT
- ✦ PENDANT LIGHT FIXTURE RE: ELECT
- WALL SCONCE LIGHT FIXTURE RE: ELECT
- ◻ 2X4 RECESSED/SURFACE FLUORESCENT LIGHT FIXTURE W/ PARA-CUBE LENS RE: ELECT
- ◻ 2X4 RECESSED/SURFACE FLUORESCENT PSYCHIATRIC LIGHT FIXTURE RE: ELECT
- ◻ GYP BOARD CEILING - PAINTED W/ CONTROL JOINTS PER SPECS
- ◻ 2X2/24 LAY-IN ACOUSTICAL CEILING
- ⊗ EXIT LIGHT WITH FIXTURE MARK CEILING MOUNTED RE: ELECT
- ⊗ EXIT LIGHT WITH FIXTURE MARK WALL BRACKET RE: ELECT
- ⊠ SUPPLY AIR GRILLE RE: MECH
- ⊠ RETURN AIR OR EXHAUST GRILLE RE: MECH
- 9'-0" SOFFIT HEIGHT
- 9'-0" CEILING HEIGHT

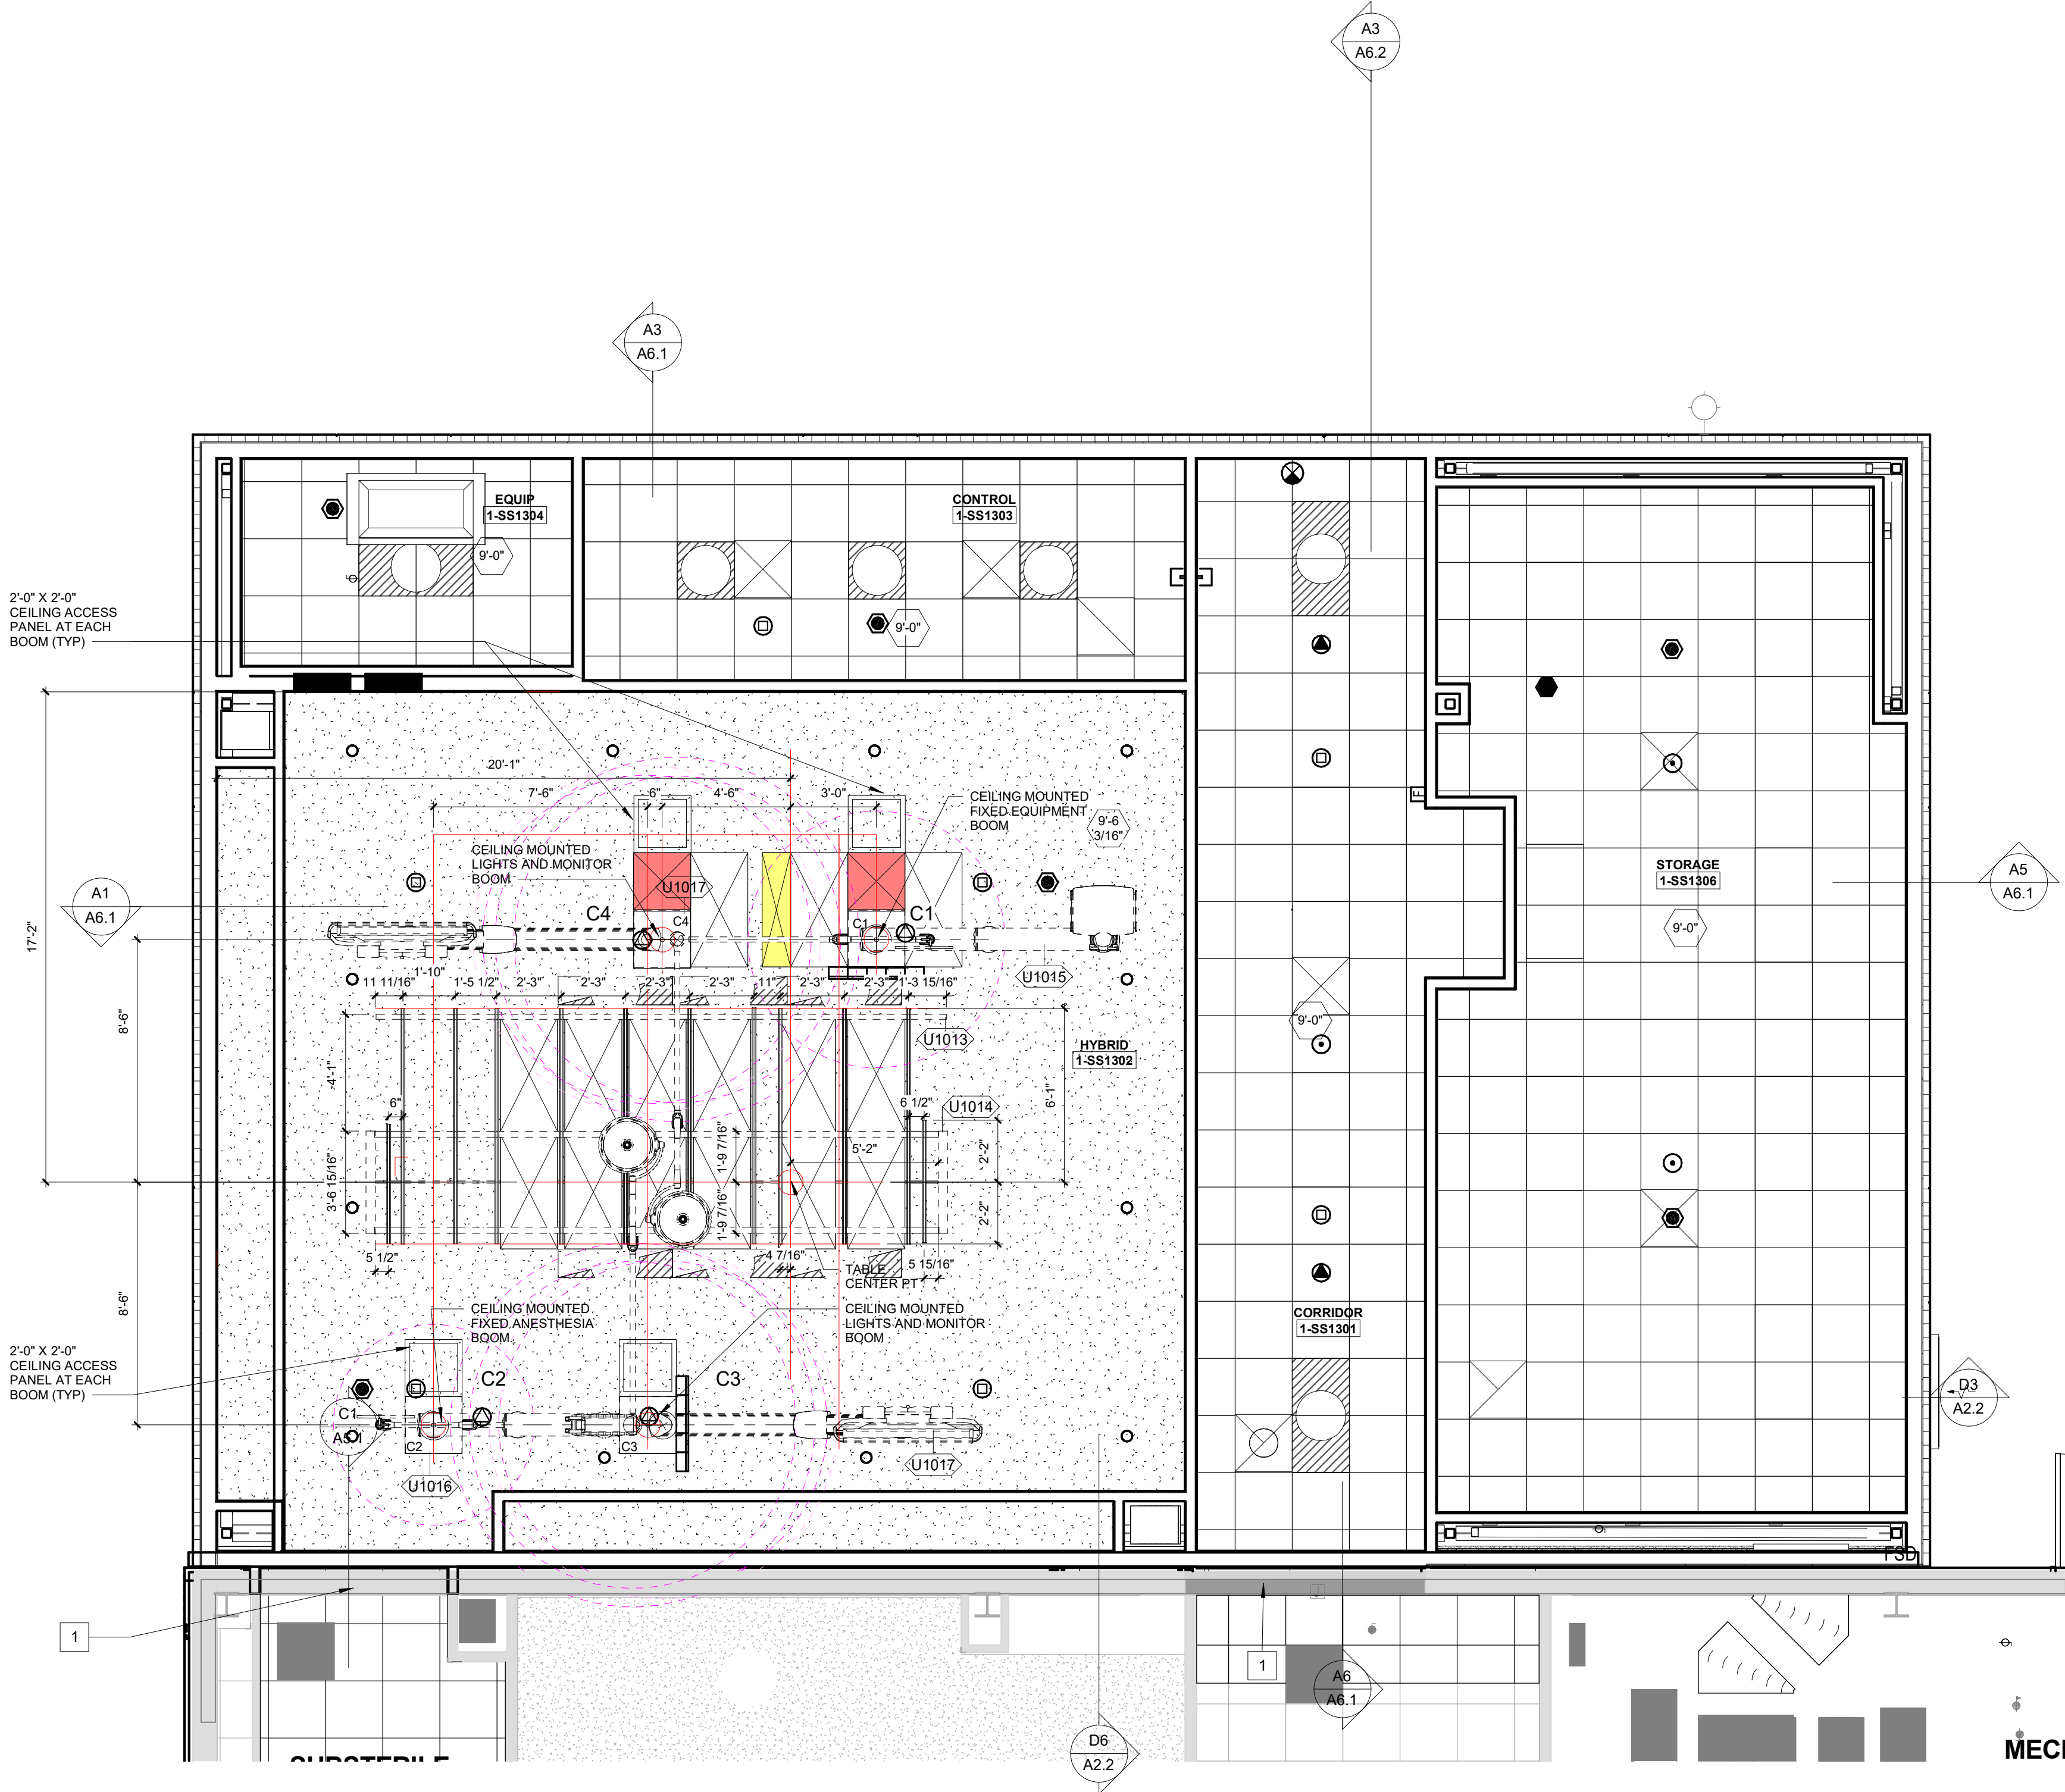

A1 REFLECTED CEILING PLAN  
1/4" = 1'-0"



Victor L. Mosby, Architect  
License - Missouri EA-6471

ACI  
BOLAND  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By CL  
Checked By KC

Revision  
Number Date Description

A3.1

© 2020 ACI/BOLAND, Inc.  
FIRST FLOOR REFLECTED CEILING  
PLAN







C:\Users\clauw\Documents\S-19058\_LSMC Hybrid OR\_Arch\_clauw\VTDN7.rvt

3/25/2020 4:19:23 PM

INTERIOR FINISH LEGEND						
MARK	ITEM	MANUFACTURER	MODEL/ PATTERN	COLOR	SIZE	REMARKS
FLOOR						
RSF-1	RESILIENT SHEET FLOOR	SHANNON SPECIALTY FLOORS	ALTRO, SUPREMA	SUGAR SU2042	.8MM THICK	-
BASE						
IB-1	INTEGRAL BASE	SHANNON SPECIALTY FLOORS	ALTRO, SUPREMA	SUGAR SU2042	6TH BASE	-
WALL						
CG-1	CORNER GUARD	INPRO	130 CORNER GUARD	CHINO 0258	3" FULL HT	-
CG-2	CORNER GUARD	INPRO	150 CORNER GUARD	CHINO 0258	2" FULL HT	-
CG-3	CORNER GUARD	INPRO	STAINLESS STEEL	-	3 1/2" FULL HT	-
CG-4	CORNER GUARD	INPRO	STAINLESS STEEL	-	2" FULL HT	-
PT-1	PAINT	PITTSBURGH PAINTS	414-3	TOASTED ALMOND	-	OVERALL PAINT, EGGSHELL FINISH
PT-1A	PAINT	PITTSBURGH PAINTS	414-3	TOASTED ALMOND	-	OVERALL PAINT, EPOXY FINISH
PT-2	PAINT	BENJAMIN MOORE CLASSIC	1495	OCTOBER MIST	-	ACCENT PAINT, EGGSHELL FINISH
PT-3	PAINT	PITTSBURGH PAINTS	521-5	EFFEL TOWER	-	DOOR FRAME PAINT, SEMI GLOSS FINISH
PT-4	PAINT	BENJAMIN MOORE	-	SUPER WHITE	-	CEILING PAINT, EPOXY FINISH
WG-1	WALL GUARD	INPRO	700	CHINO 0258	7 3/4" HT	TOP WALL GUARD
WG-2	WALL GUARD	INPRO	1400	CHINO 0258	4" HT	BOTTOM WALL GUARD
WP-1	WALL PROTECTION	INPRO	RIGID VINYL SHEET WALL PROTECTION	CHINO 0258	4" HT	.340" THICK
CASEWORK						
PLAM-1	PLASTIC LAMINATE	WILSONART	7936-07	WILLIAMSBURG CHERRY	-	TO BE USED WITH WOODTAPE, 3798 MAHAGANY EDGEBANDING
PLAM-2	PLASTIC LAMINATE	WILSONART	4869-60	WESTERN WHITE	-	TO BE USED WITH EDGEBANDING
SSF-1	SOLID SURFACE	WILSONART	9137RS (4)	BLANCO RIVERSTONE	-	MATTE FINISH
CEILING						
ACT-1	ACOUSTIC CEILING TILE	ARMSTRONG	DUNE 1773	WHITE	24" X 24" X 5/8"	TO BE USED WITH WHITE 1516" PRELUDE GRID
ACT-2	ACOUSTIC CEILING TILE	ARMSTRONG	CLEAN ROOM VL 868	WHITE	24" X 24" X 5/8"	TO BE USED WITH WHITE 1516" PRELUDE GRID


ROOM FINISH SCHEDULE											
ROOM NUMBER	ROOM NAME	FLOOR FINISH	BASE FINISH	WALLS				CASEWORK			NOTES
				NORTH	EAST	SOUTH	WEST	BASE CABINETS	UPPER CABINETS	COUNTER TOPS	
1.SS1301	CORRIDOR	RSF-1	IB-1	PT-1 / WP-1 / WG-1,2	PT-1 / WP-1 / WG-1,2	PT-1 / WP-1 / WG-1,2	PT-1 / WP-1 / WG-1,2	-	-	-	ACT-2
1.SS1302	HYBRID	RSF-1	IB-1	PT-1A / WP-1	PT-1A / WP-1	PT-1A / WP-1	PT-1A / WP-1	PLAM-1	PLAM-1	SSF-1	PT-4
1.SS1303	CONTROL	RSF-1	IB-1	PT-1	PT-1	PT-1	PT-1	-	-	PLAM-2	ACT-1
1.SS1304	EQUIP	RSF-1	IB-1	PT-1	PT-1	PT-1	PT-1	-	-	-	ACT-1
1.SS1305	STORAGE	RSF-1	IB-1	PT-1 / WP-1	PT-1 / WP-1	PT-1 / WP-1	PT-1 / WP-1	-	-	-	ACT-1
1.SS1307	SUB STERILE	RSF-1	IB-1	PT-1A / WP-1	PT-1A/WP-1	PT-1A/WP-1	PT-1A/WP-1	-	-	-	ACT-2

## GENERAL ROOM FINISH SCHEDULE NOTES

B	ALL SOLID WOOD, WOOD VENEER, AND PLASTIC LAMINATE GRAIN SHALL BE VERTICALLY ORIENTED UNLESS OTHERWISE NOTED
C	DOOR FRAMES, HOLLOW METAL WINDOW FRAMES TO BE PT-3 UNLESS OTHERWISE NOTED
D	ALL FACES AND UNDERSIDES OF SOFFITS AND HENDERS TO BE PT-1 UNLESS OTHERWISE NOTED
E	WALL EXPANSION JOINTS TO BE PT-1 UNLESS OTHERWISE NOTED
F	ALL ELECTRICAL PANELS AND METAL GRILLES SHALL BE PTD TO MATCH ADJACENT WALL SURFACE UNLESS OTHERWISE NOTED
G	ALL COLUMN SURROUND FINISHES TO MATCH ADJACENT WALL SURFACE UNLESS OTHERWISE NOTED
H	WHERE A WALL IS INDICATED TO HAVE PARTIAL OR FULL HT WALL PROTECTION, THE ENTIRE WALL IS TO BE PTD PRIOR TO WALL PROTECTION INSTALLATION
I	EXTEND ALL FINISHES BENEATH, BEHND, AROUND ALL CASEWORK, EQUIPMENT, SIGNAGE, ETC



Victor L. Mosby  
License - Missouri EA-6471

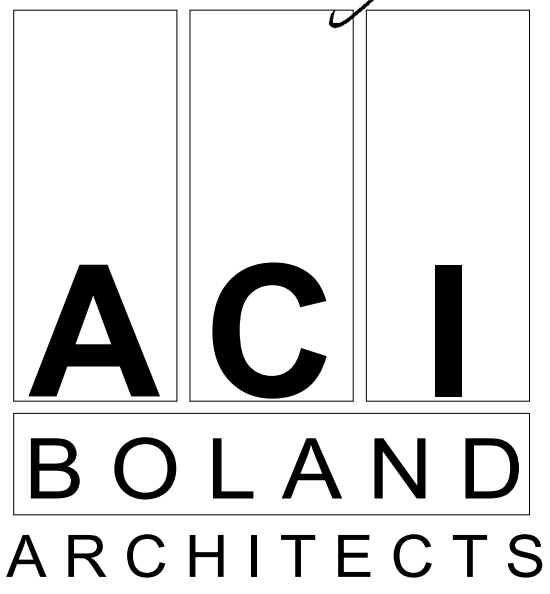

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:


Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063


Date	3-23-2020
Job Number	3-19058
Drawn By	BR
Checked By	KC

Revision		
Number	Date	Description




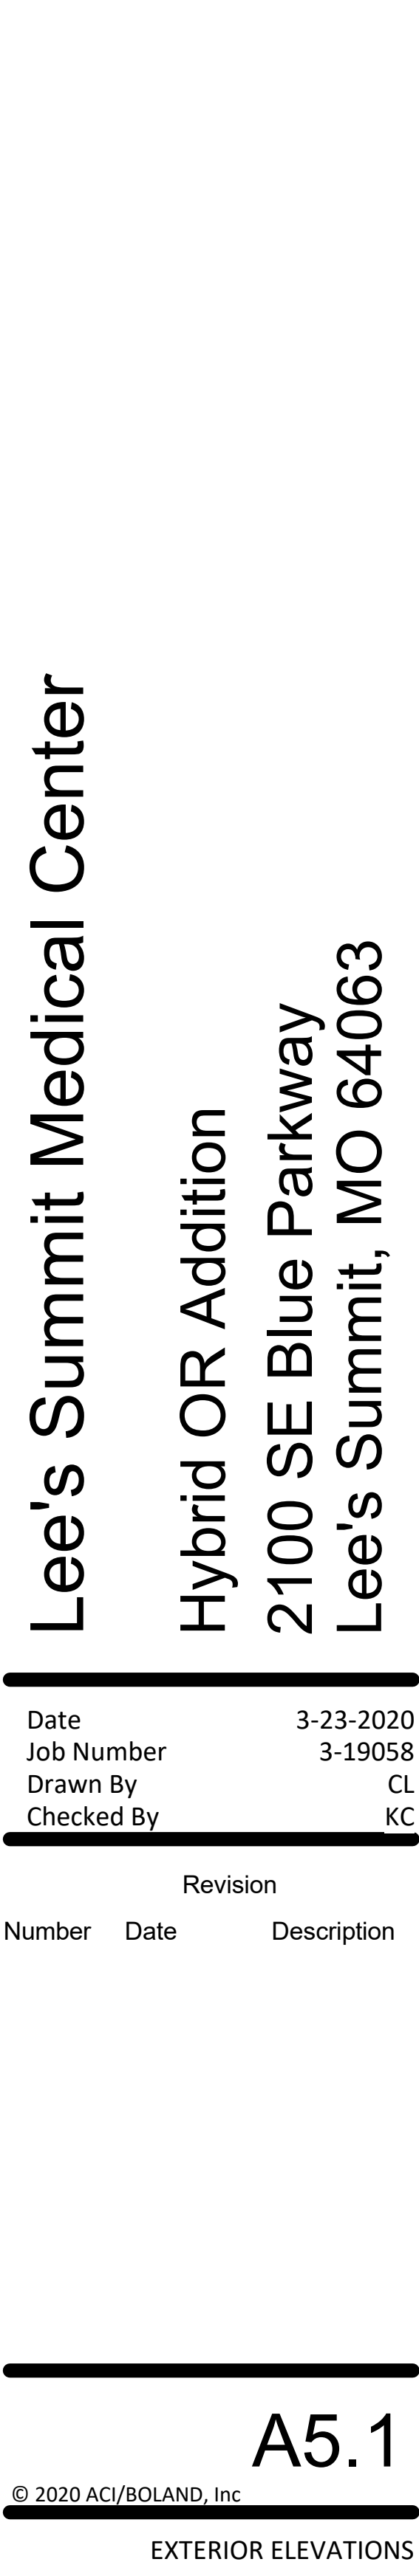




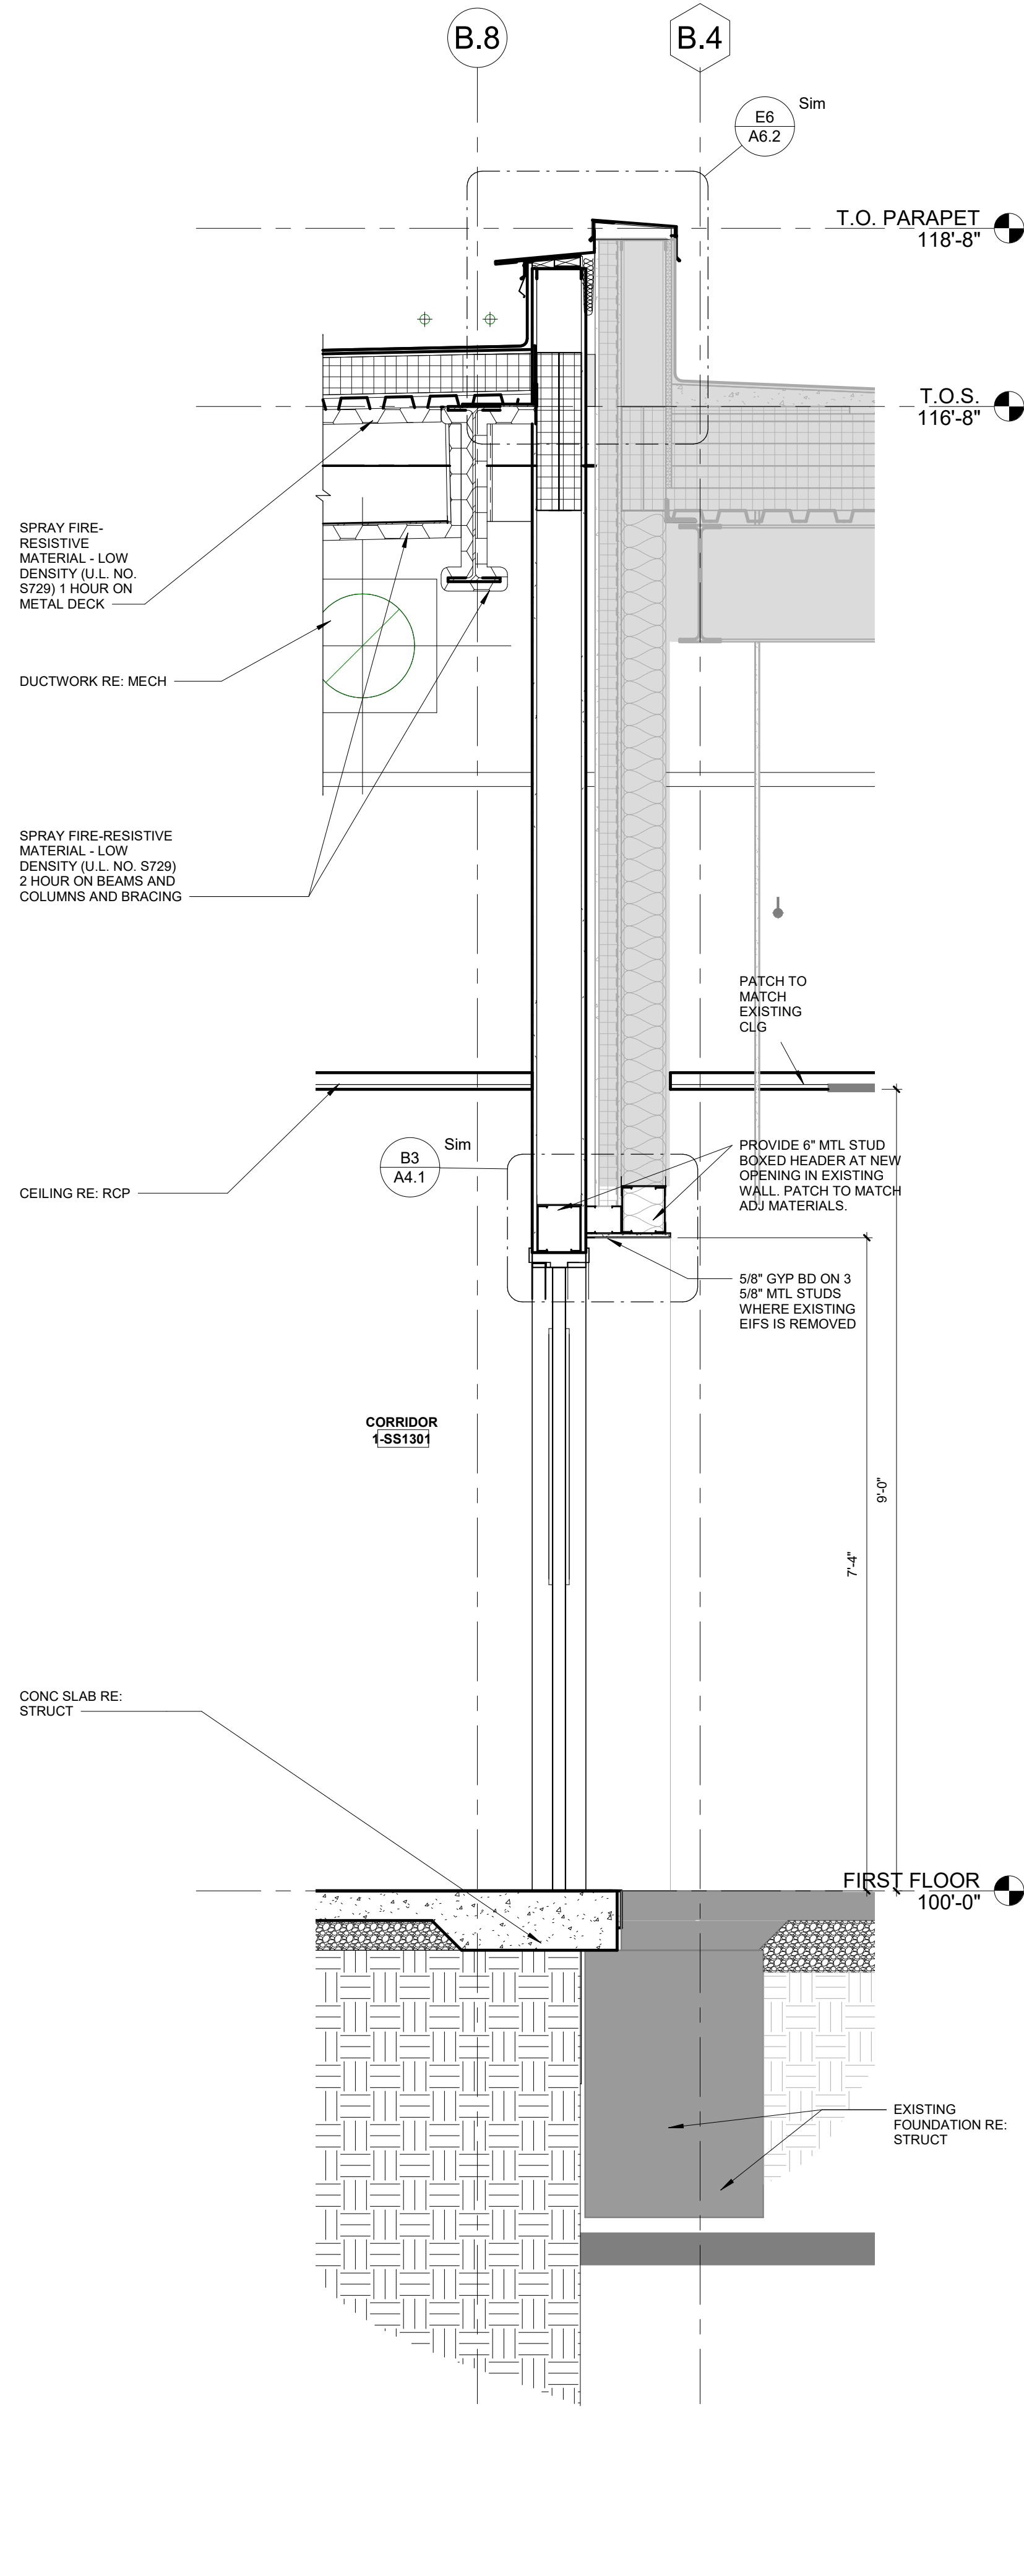


A6 WALL SECTION AT EXISTING  
3/4" = 1'-0"

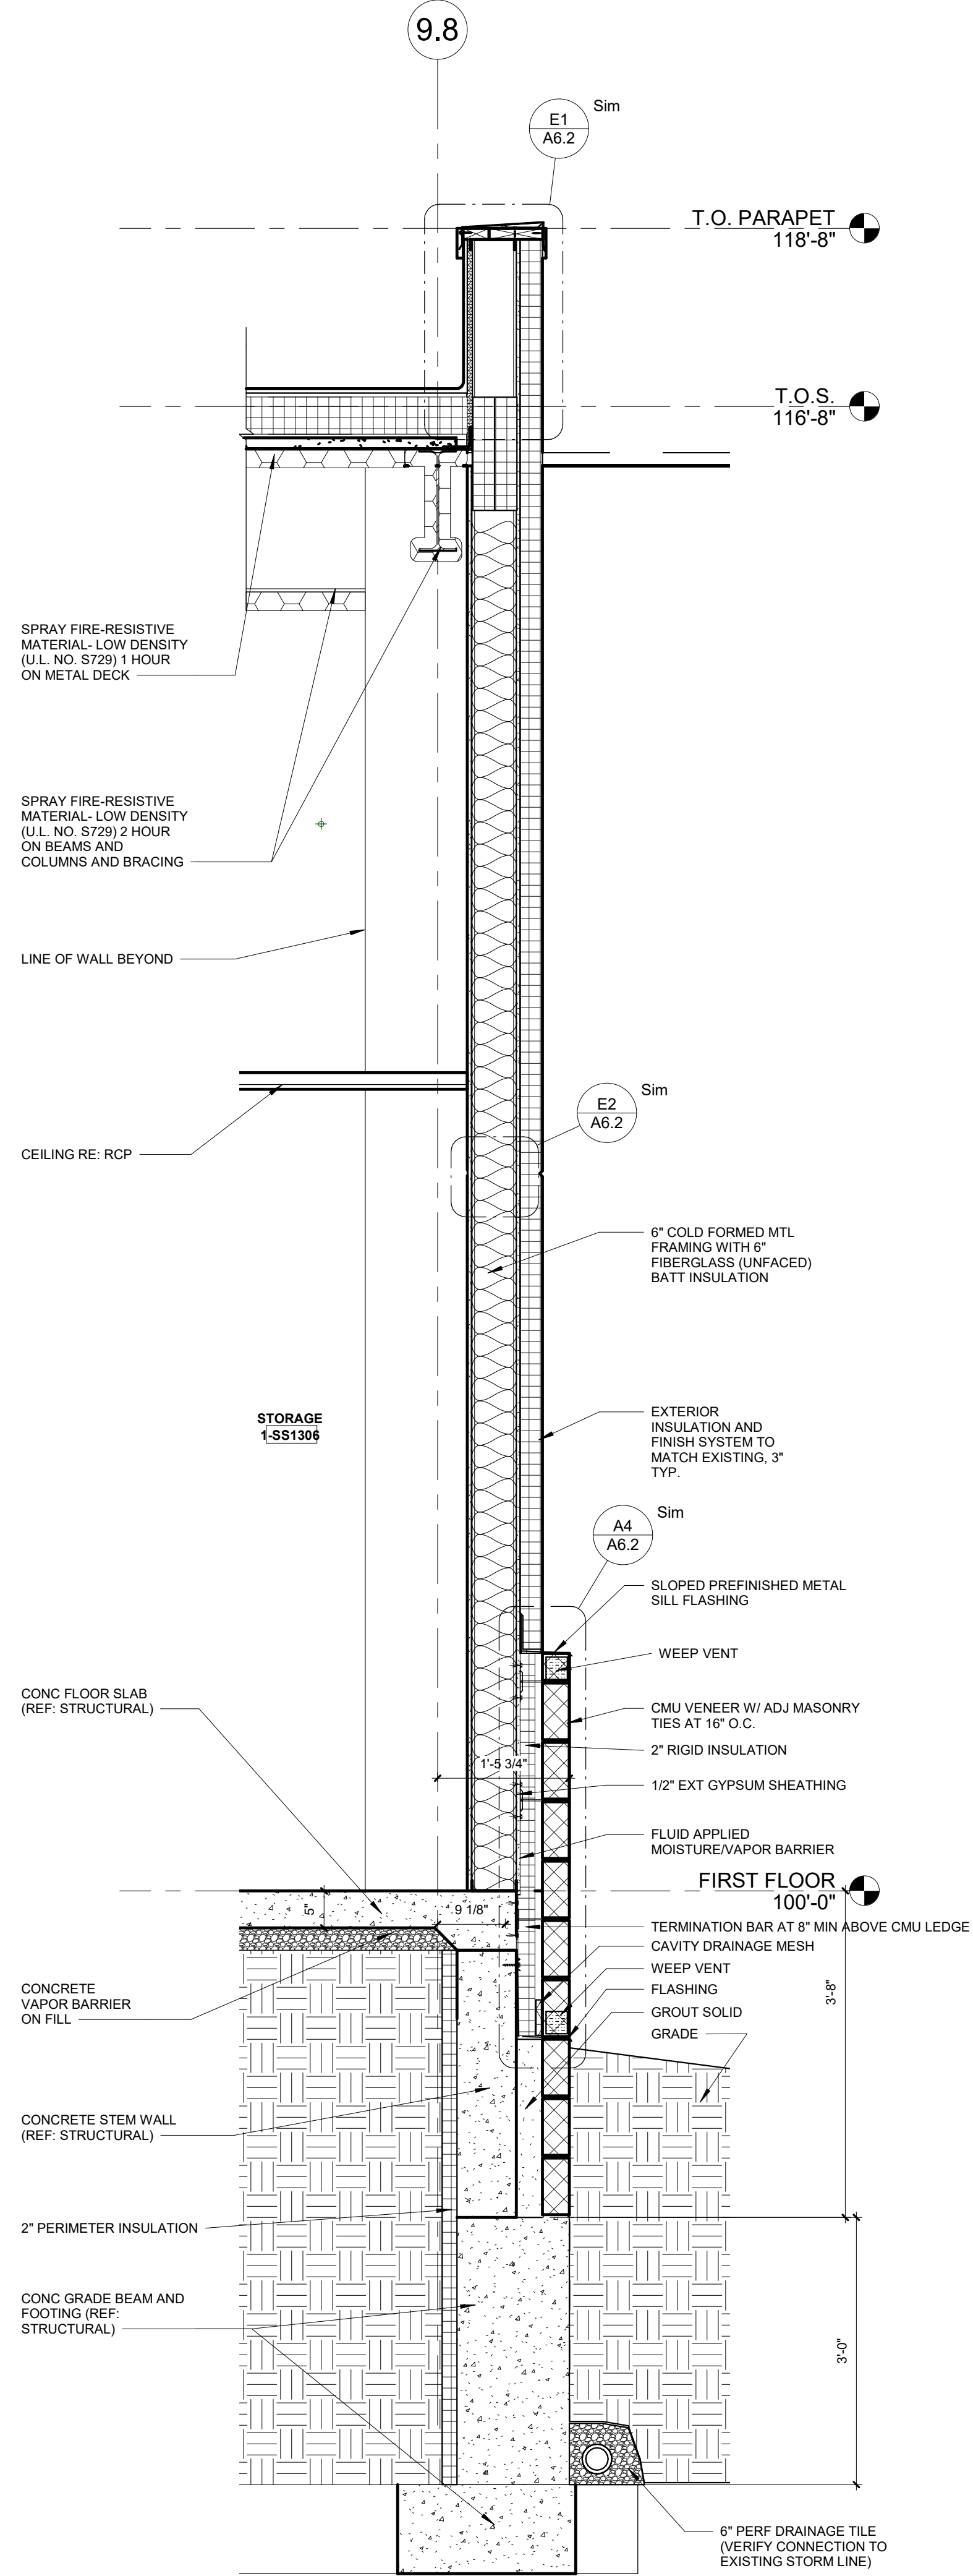


A5 WALL SECTION AT - EAST  
3/4" = 1'-0"

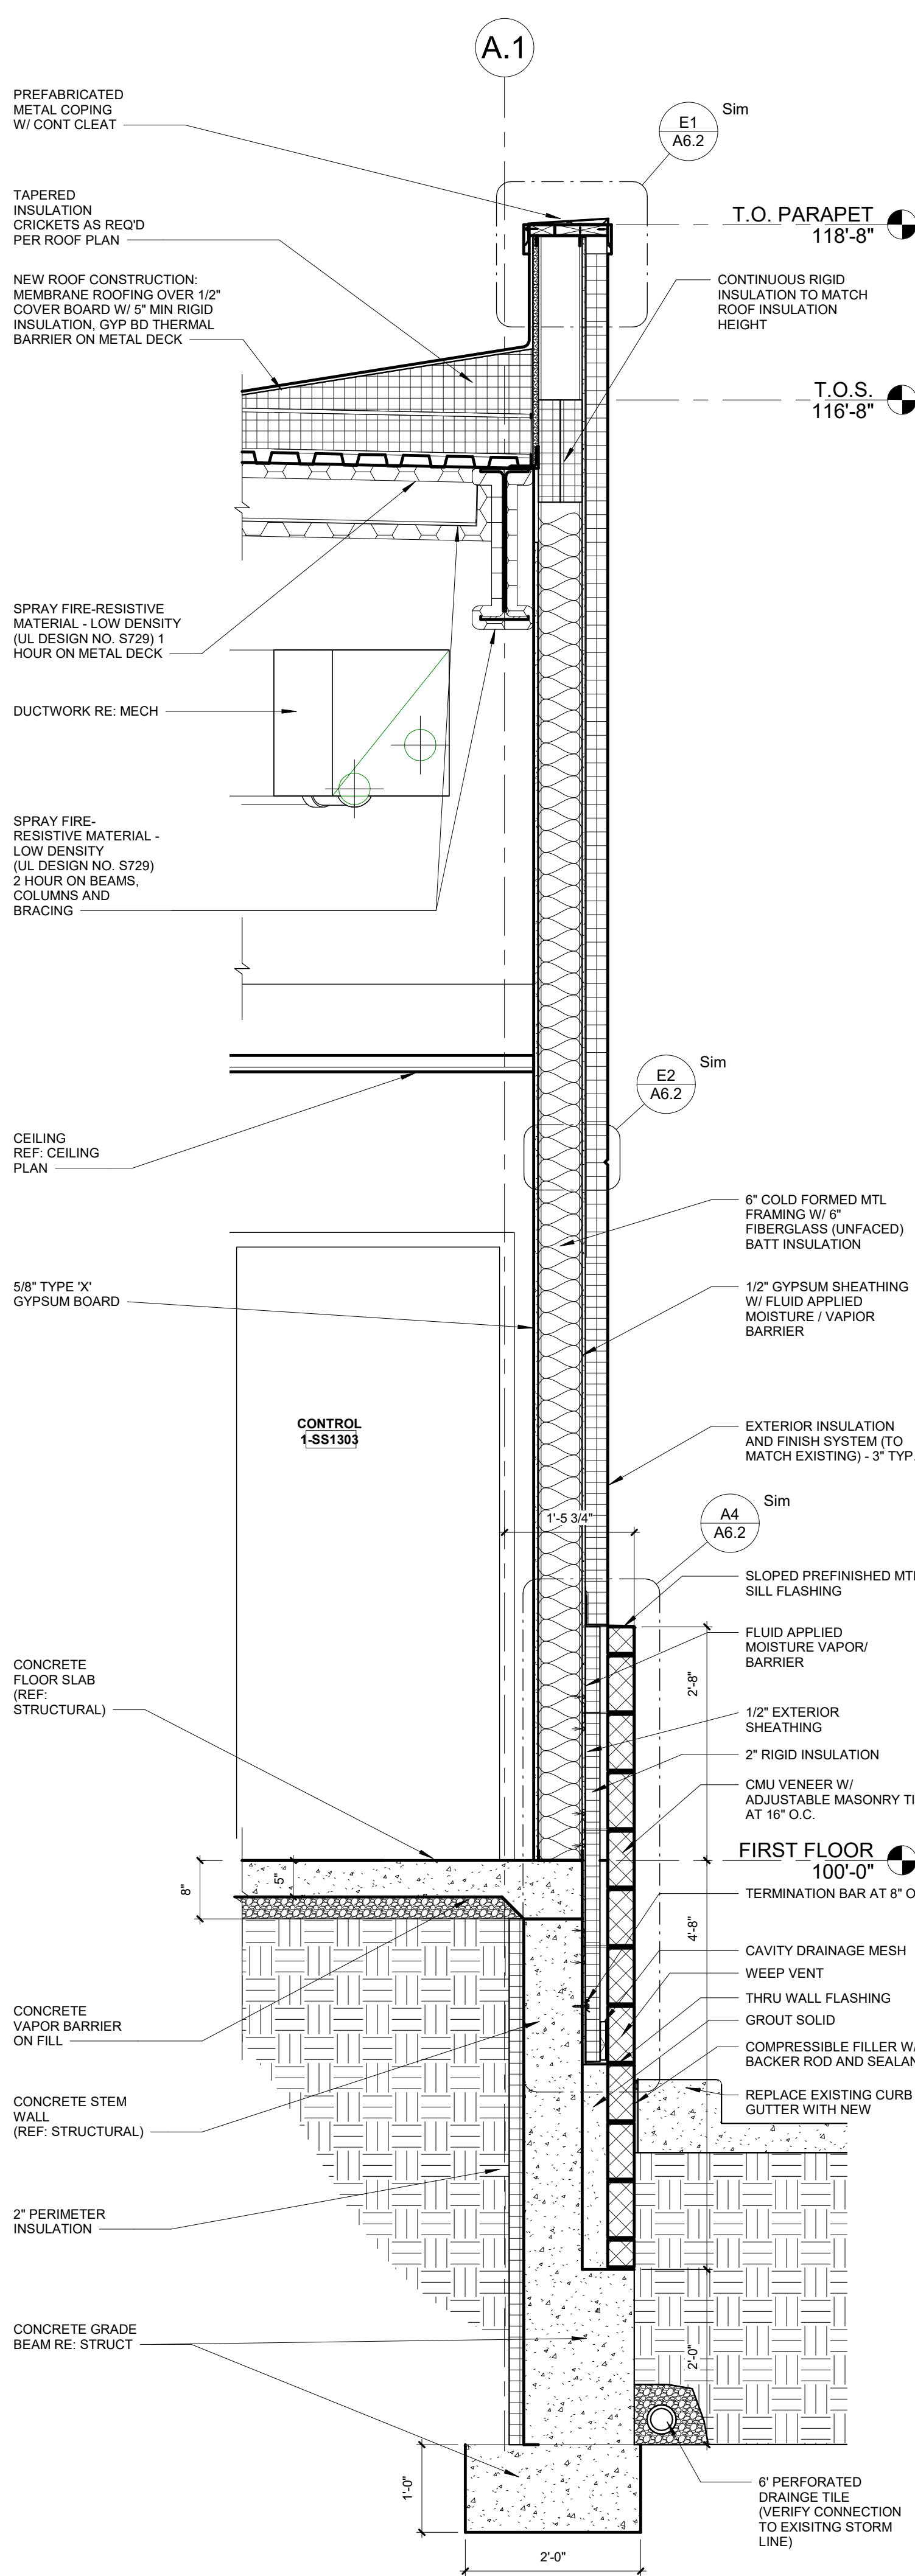

A3 WALL SECTION - NORTH  
3/4" = 1'-0"

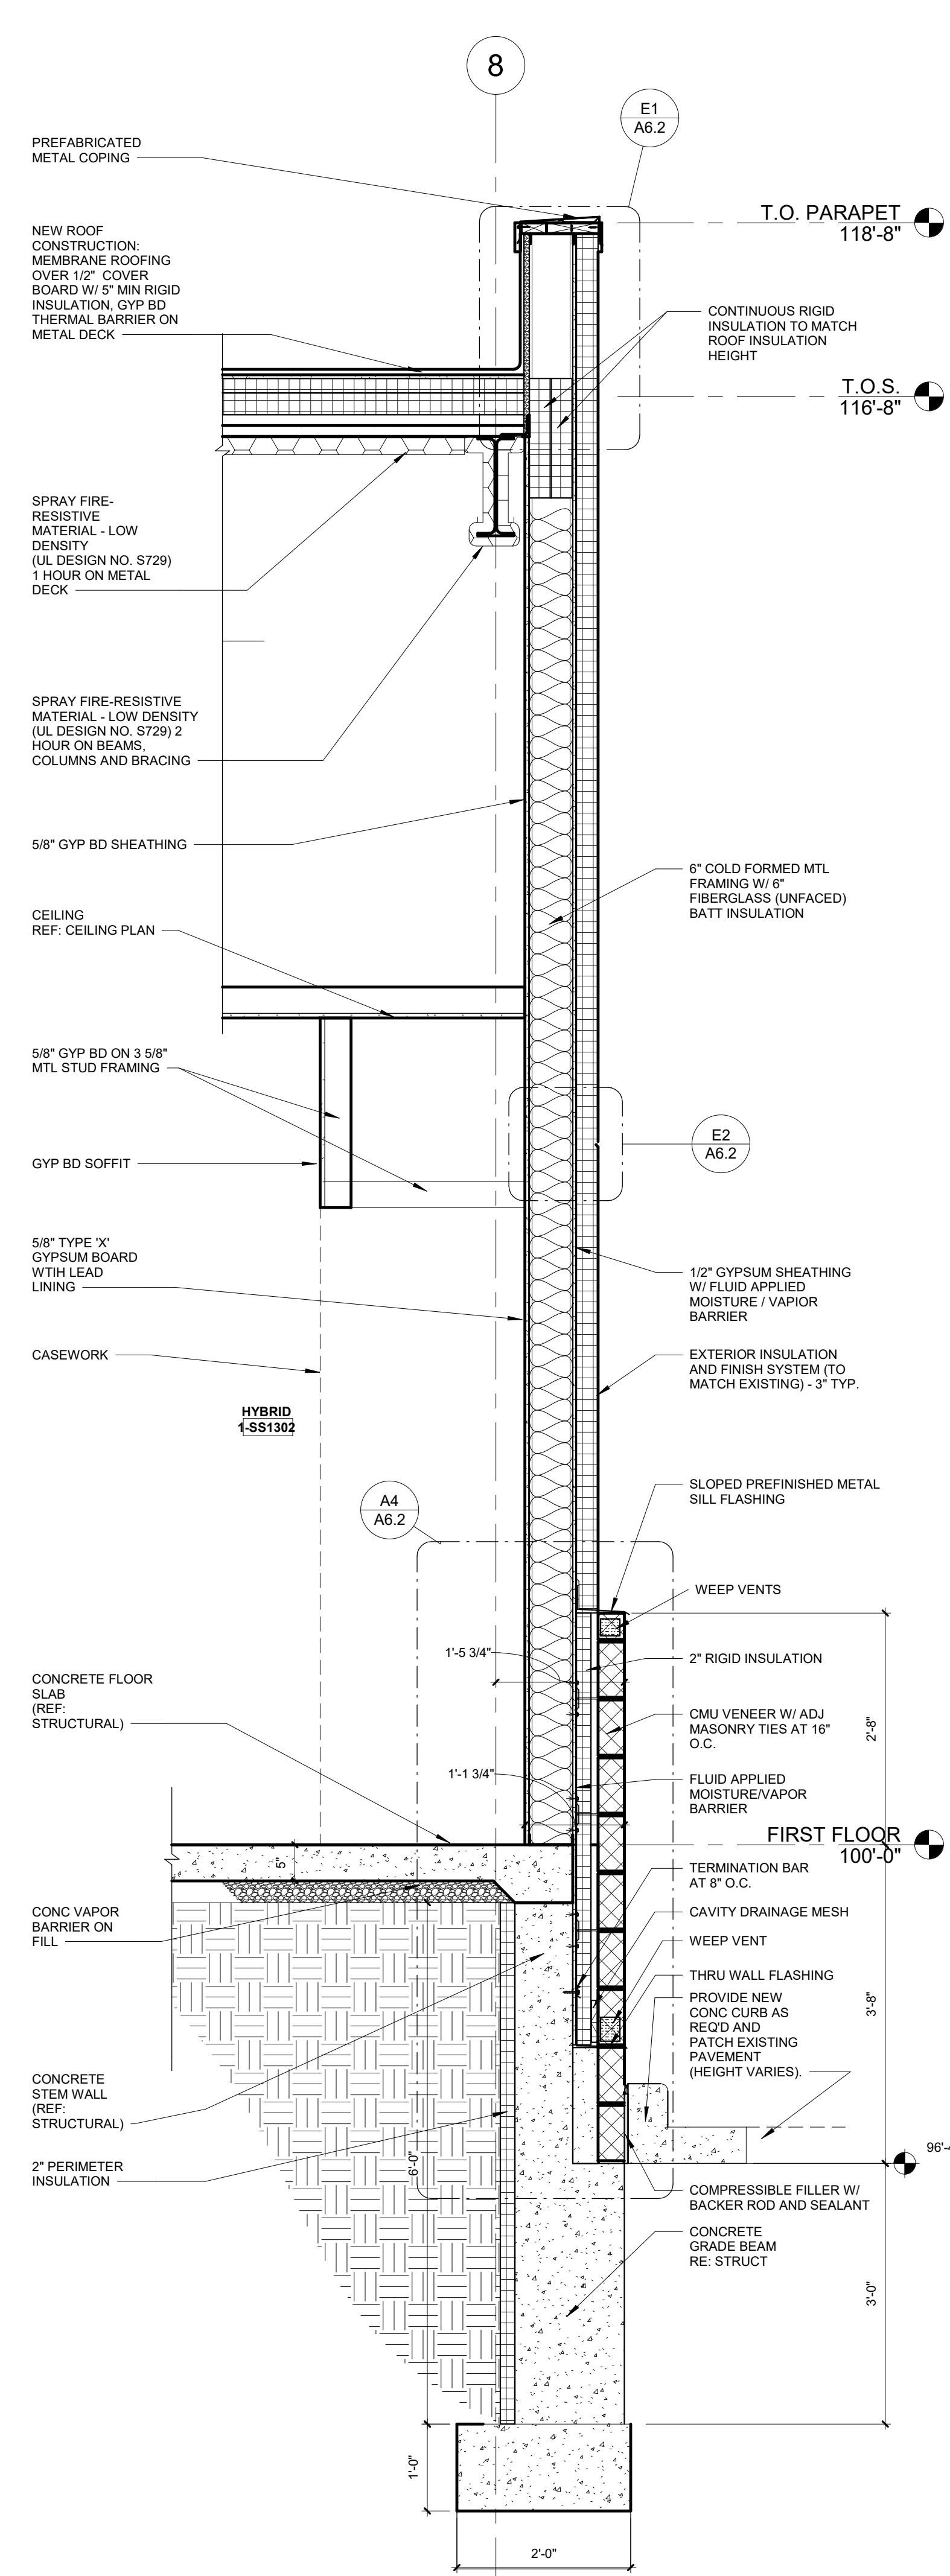

A1 WALL SECTION - WEST AT DOCK  
3/4" = 1'-0"

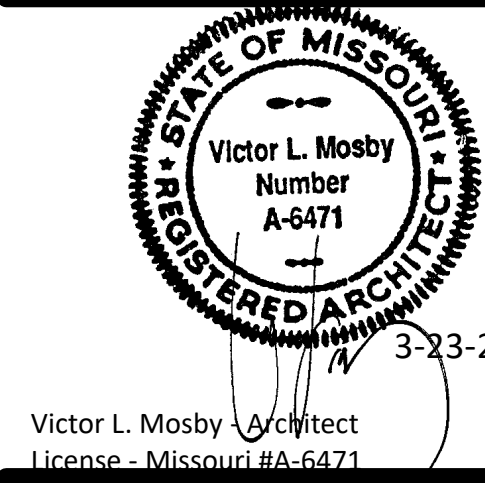

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**


Date 3-23-2020  
Job Number 3-19058  
Drawn By Author  
Checked By Checker

Revision  
Number Date Description

**A6.1**

© 2020 ACI/BOLAND, Inc.  
WALL SECTIONS



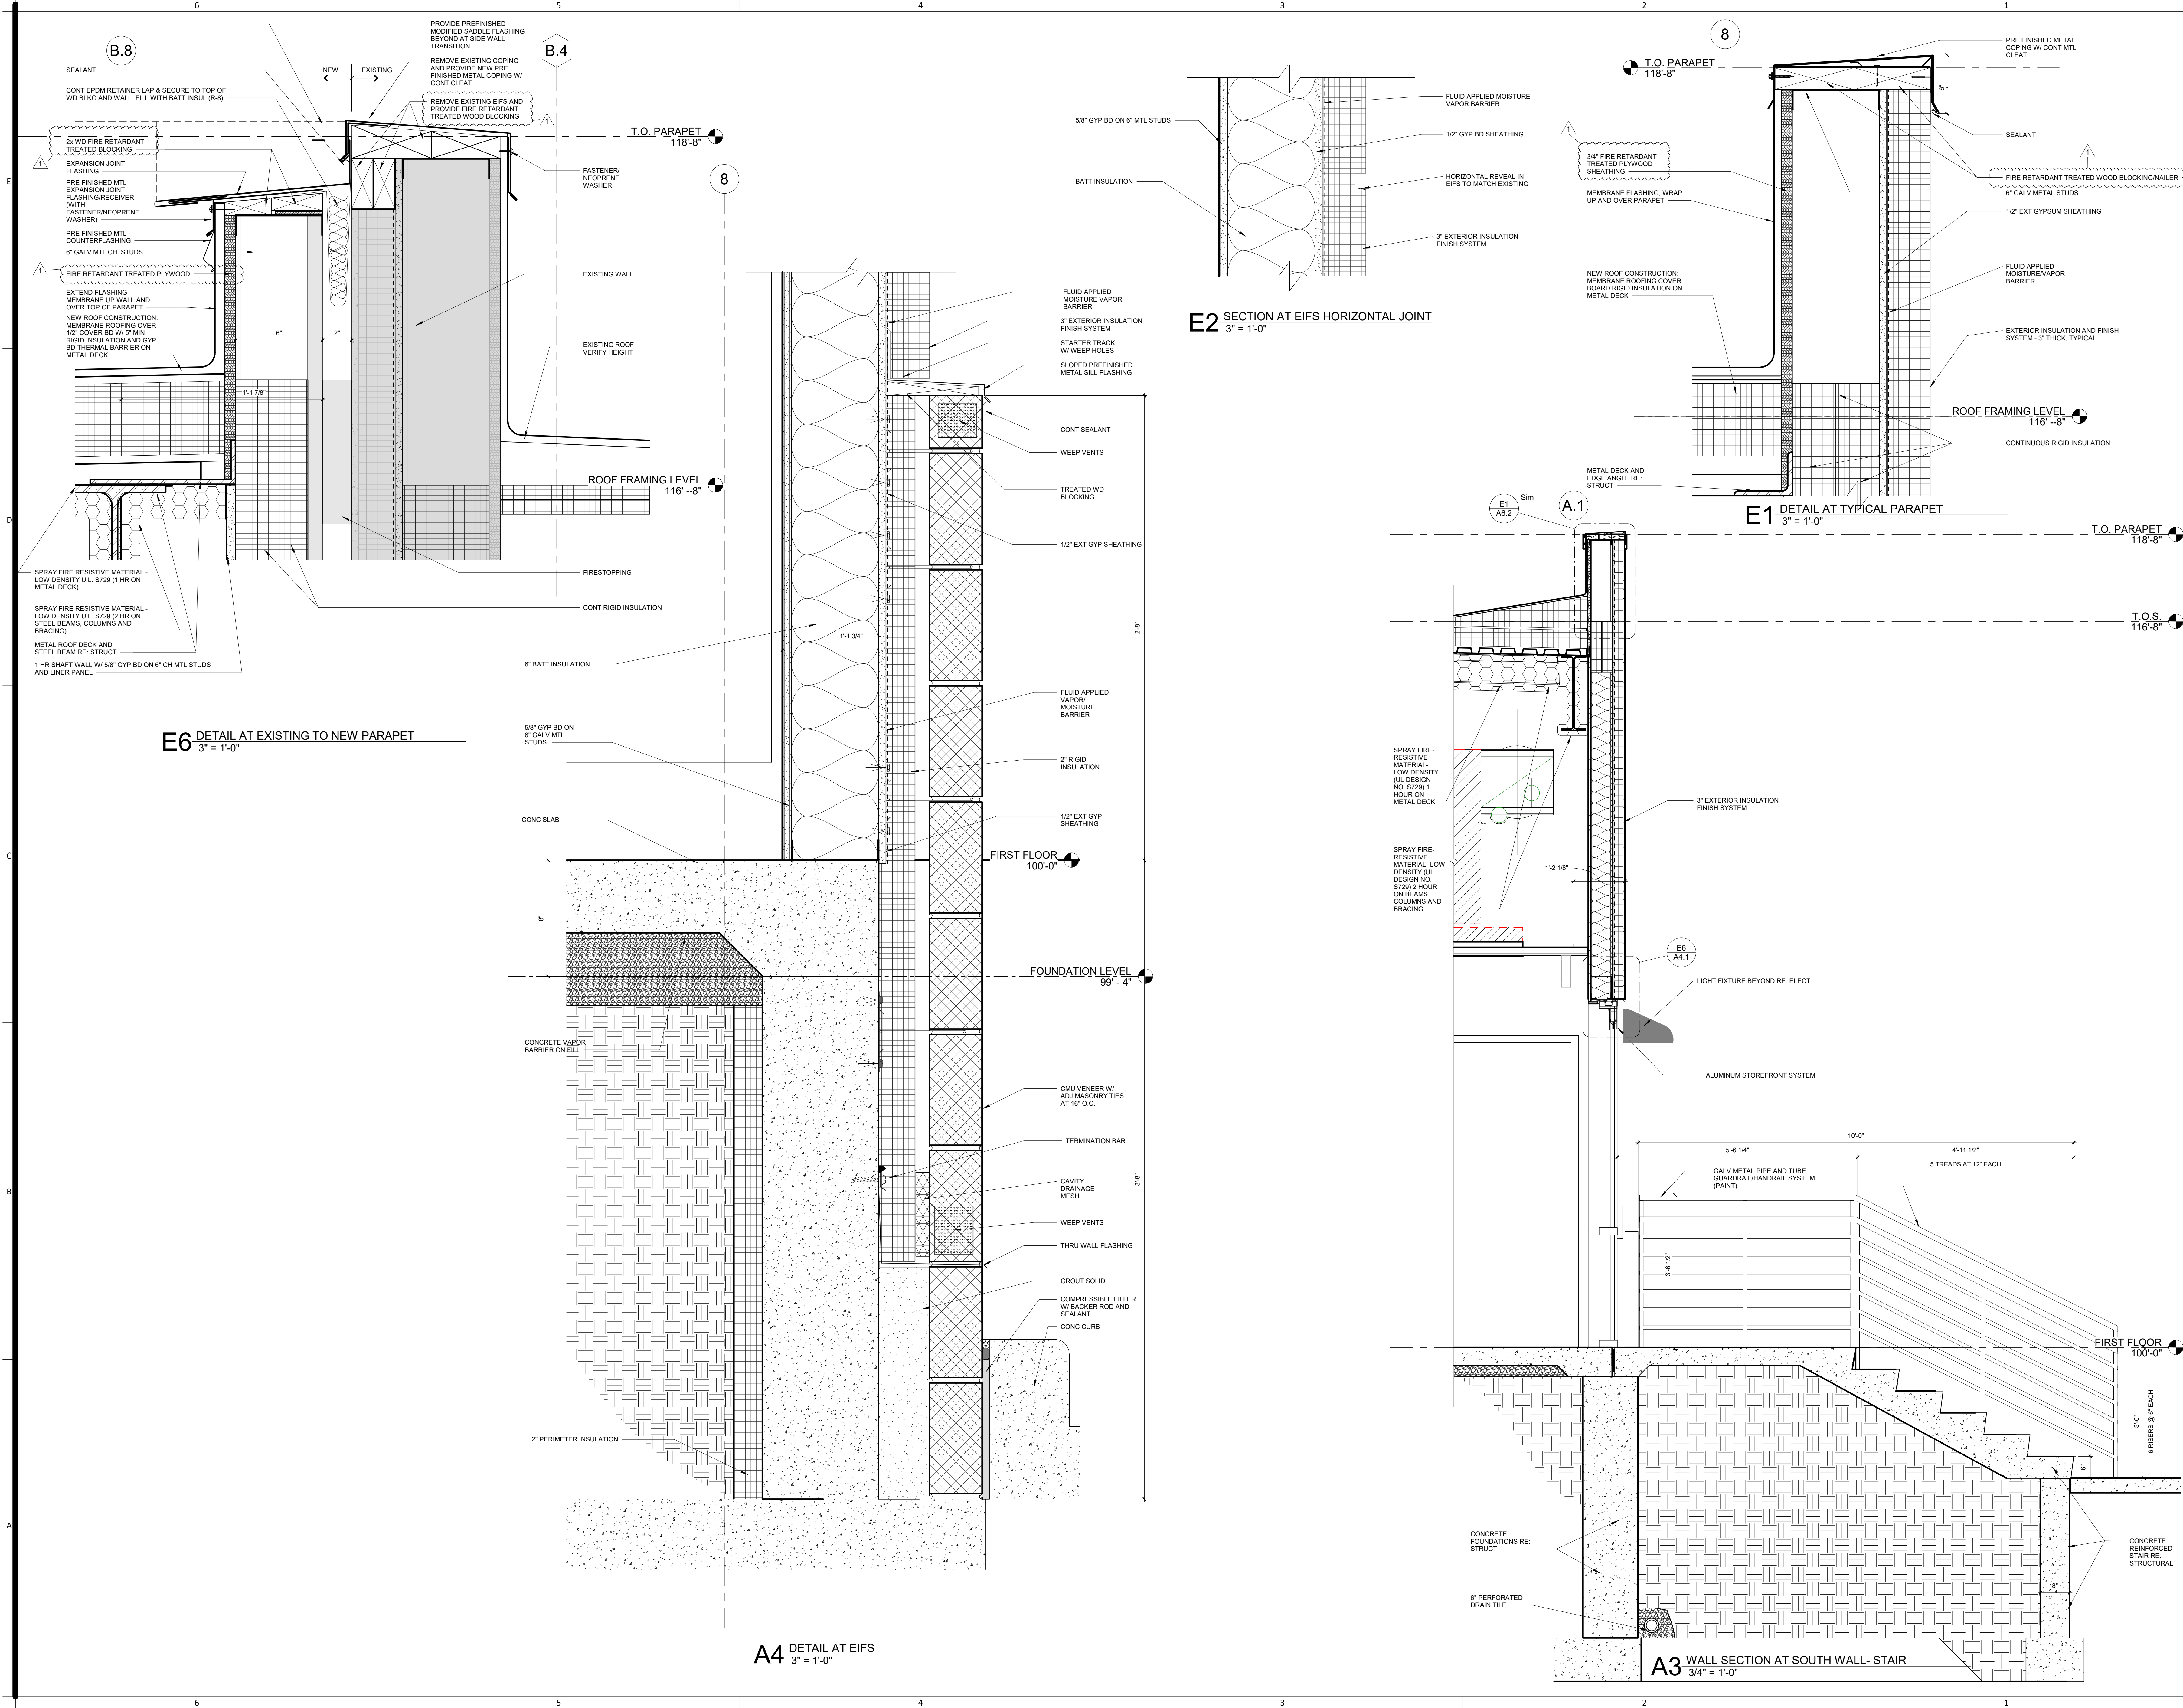

Victor L. Mosby  
Number A-6471  
3-23-2020

Victor L. Mosby, Architect  
License - Missouri EA-6471

# ACI

## BOLAND

### ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
Licensee's Certificate of Authority Number:  
Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date	3-23-2020
Job Number	3-19058
Drawn By	CL
Checked By	KC

Revision	
Number	Description
1	4/6/2020 Permit Comments


## A6.2

© 2020 ACI/BOLAND, Inc.  
WALL SECTIONS




3/25/2020 4:19:36 PM


C:\Users\clauw\Documents\3-19058\_LSMC Hybrid OR Arch.clauw\VDN7.rvt

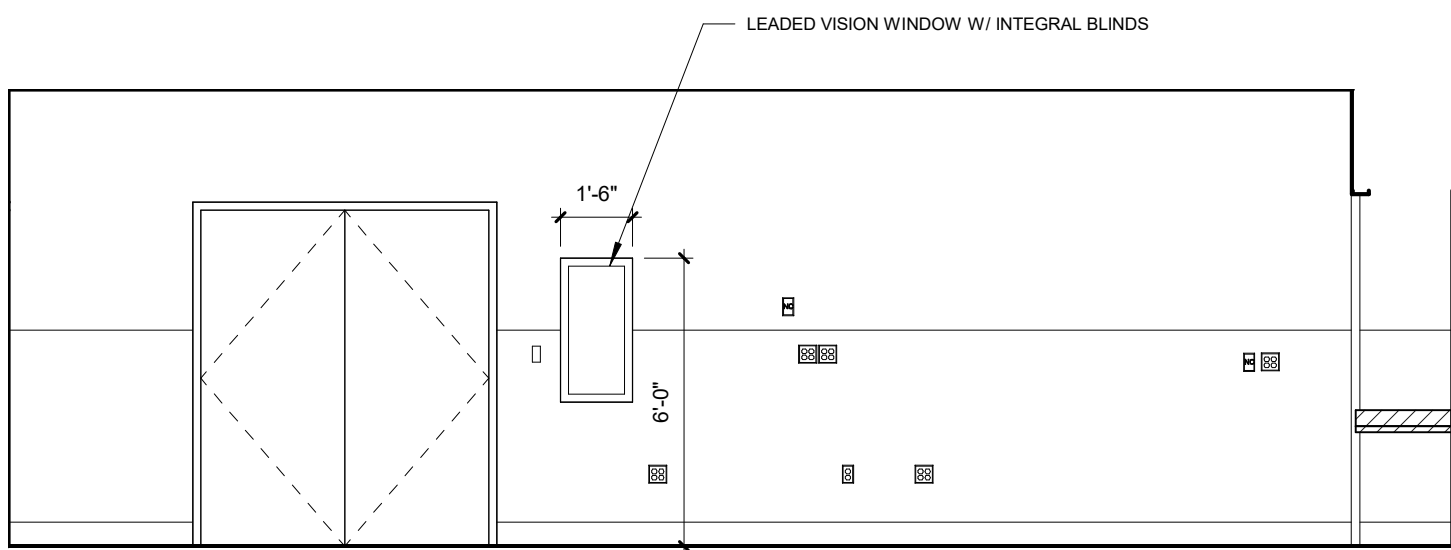


A6 HYBRID OR - EAST  
1/4" = 1'-0"

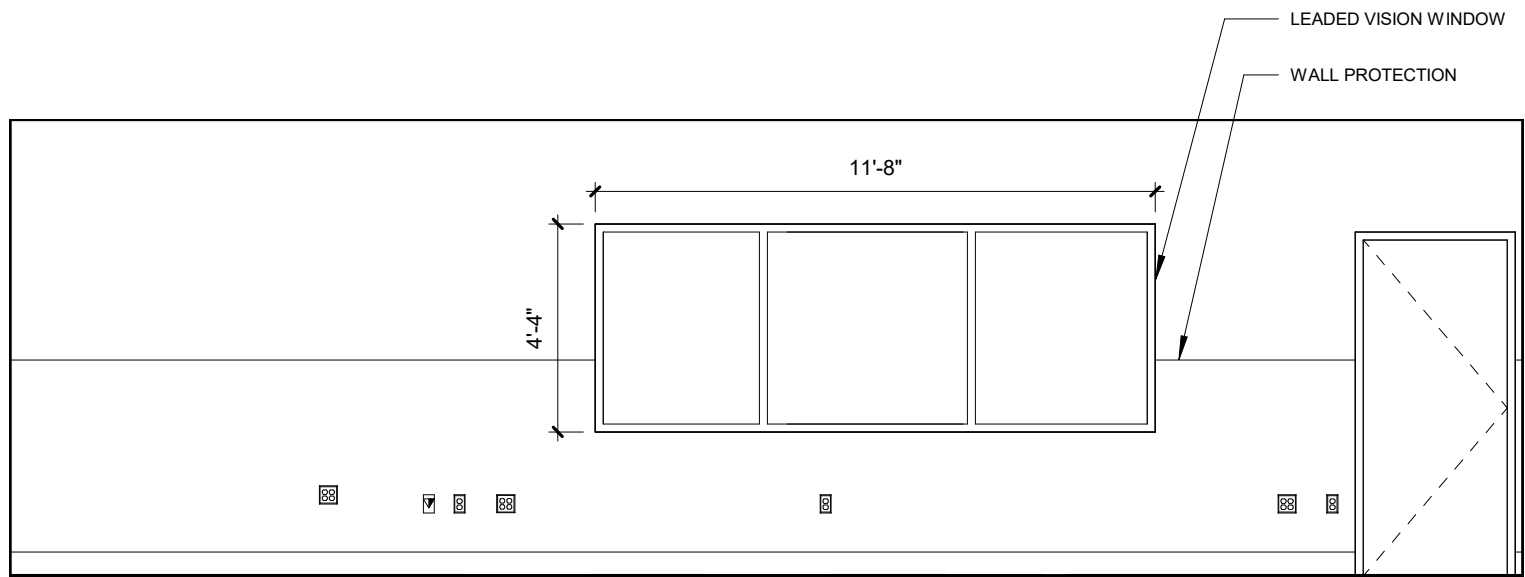


A5 HYBRID OR - NORTH  
1/4" = 1'-0"

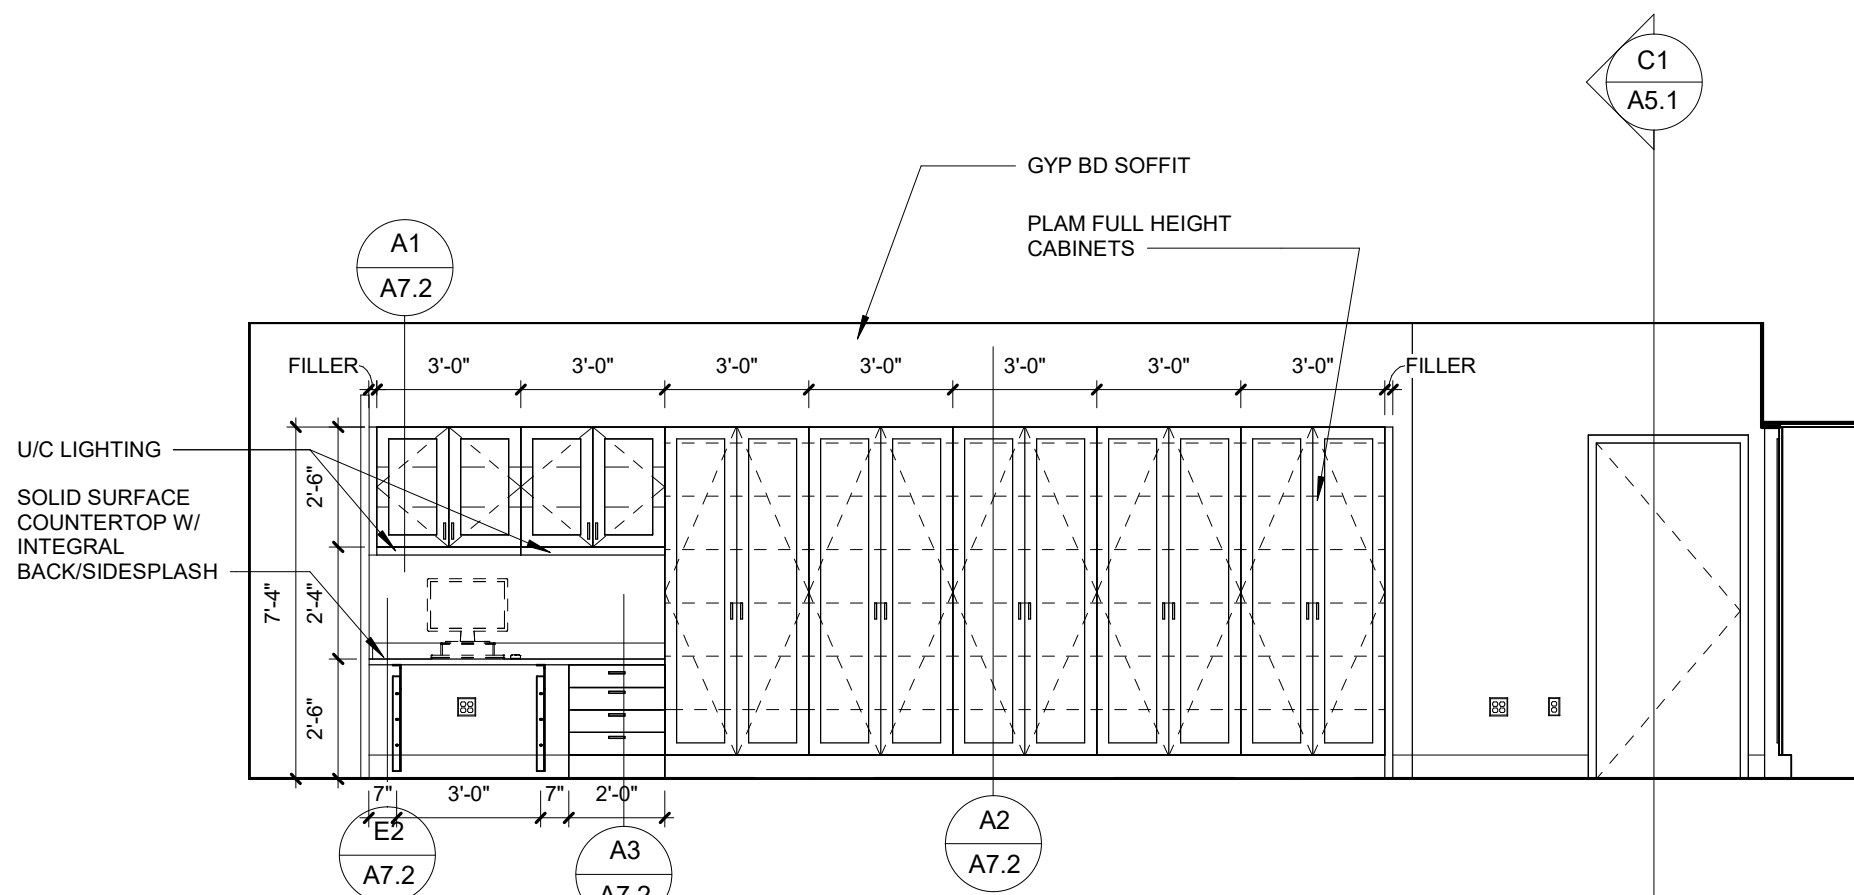

A3 HYBRID OR - SOUTH  
1/4" = 1'-0"

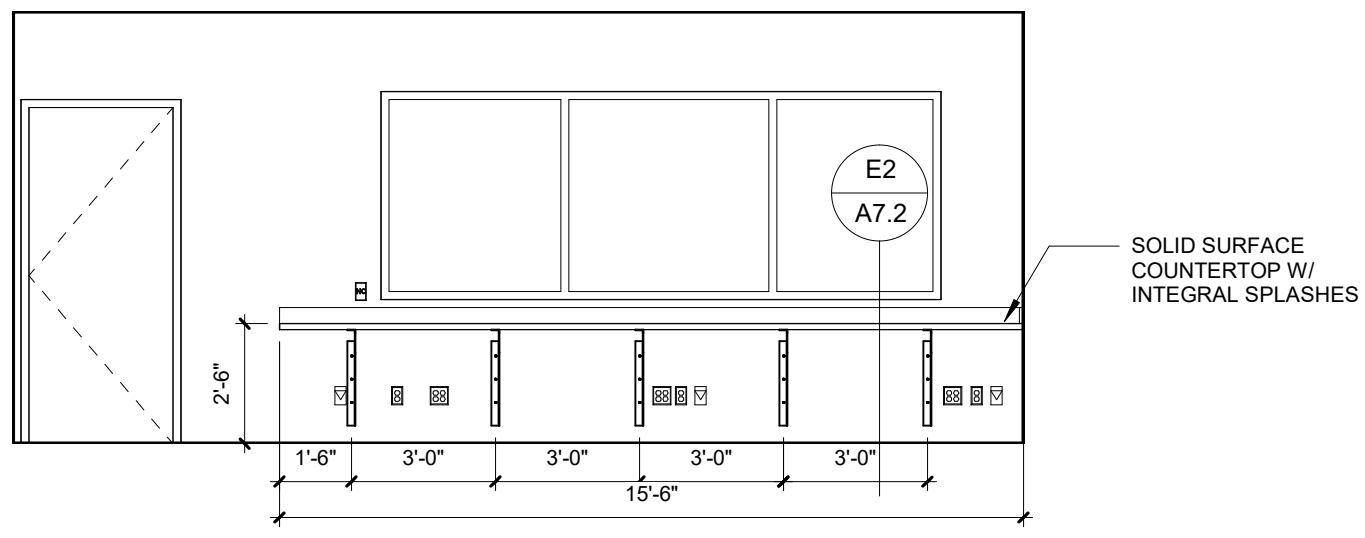

B1 CONTROL ROOM - SOUTH  
1/4" = 1'-0"

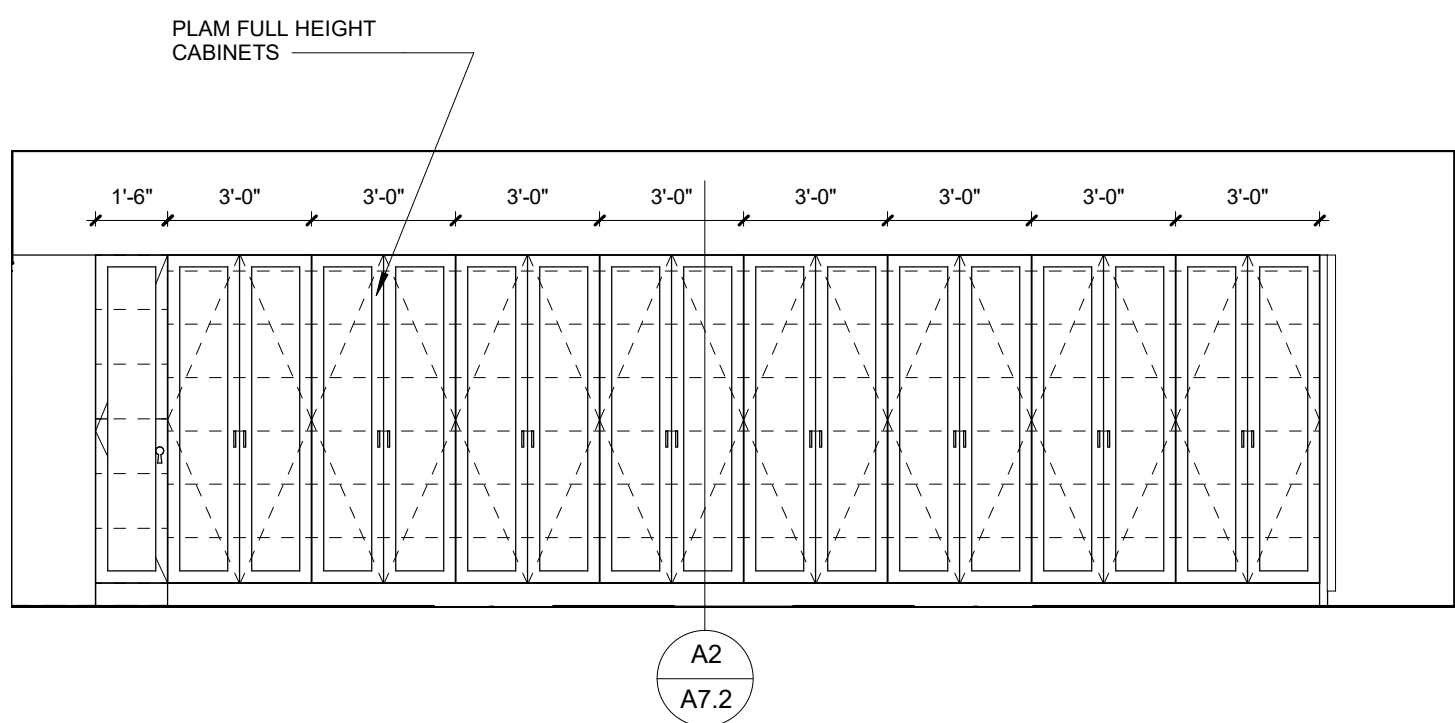

A1 HYBRID OR - WEST  
1/4" = 1'-0"



Victor L. Mosby, Architect  
License - Missouri EA-6471

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By Author  
Checked By Checker


Revision  
Number Date Description

A7.1

© 2020 ACI/BOLAND, Inc.

INTERIOR ELEVATIONS





1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600


ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number

Professional Engineering Consultants, P.A.






623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

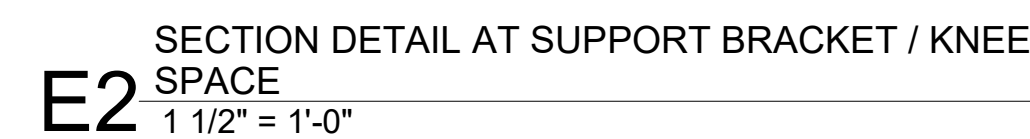

1. PROVIDE PLAM FILLER WHERE CABINETS BUTT UP TO WALLS.
2. ALL COUNTERTOPS HAVE A 4" BACKSPLASH (MATERIAL TO MATCH COUNTERTOP) AND OUTSIDE CORNERS HAVE 1 1/2" RADIUS EXCEPT WHERE NOTED OTHERWISE.
3. CASEWORK MFR. TO SUPPLY (2) - 2" x 1/2" GROMMETS PER KNEESPACE. GROMMETS TO BE INSTALLED IN FIELD AS DIRECTED BY OWNER. COLOR TO BE SELECTED BY ARCHITECT.
4. PLASTIC LAMINATE COUNTERTOP EDGES SHALL BE 3 MM PLASTIC. COLOR AS SELECTED BY ARCHITECT)

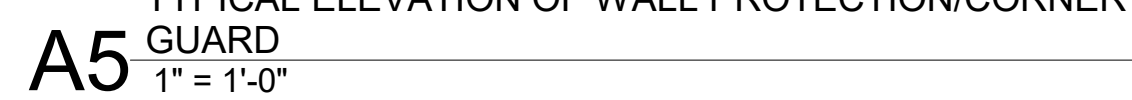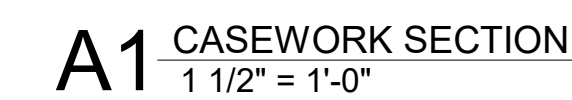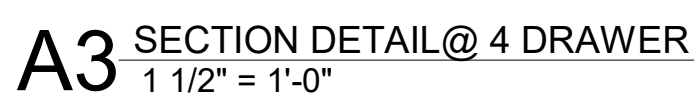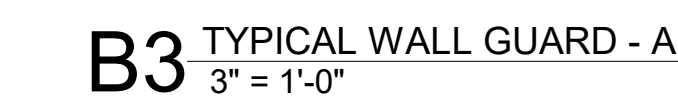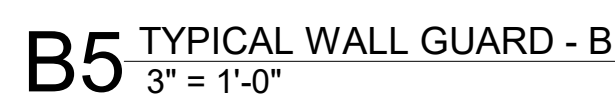

Date	3-23-2020
Job Number	3-19058
Drawn By	Author
Checked By	Checker

Revision		
Number	Date	Description

A7.2

© 2020 ACI/BOLAND, Inc

INTERIOR DETAILS



DESIGN CRITERIA

1. BUILDING CODE:  
INTERNATIONAL BUILDING CODE (IBC), 2018 EDITION, INCLUDING LOCAL SUPPLEMENTS. THE STRUCTURE IS CLASSIFIED AS A CATEGORY III FACILITY.
2. DEAD AND LIVE LOADS:
- | LOCATION              | UNIFORM<br>LIVE LOAD | CONCENTRATED<br>LIVE LOAD | TOTAL<br>DEAD LOAD* |
|-----------------------|----------------------|---------------------------|---------------------|
| ROOF<br>SLAB ON GRADE | 20 PSF<br>100 PSF    | -----<br>2000 LB          | 20 PSF<br>-----     |
- ROOF LIVE LOADS ON SUPPORTING ELEMENTS SHALL NOT BE REDUCED.  
\* TOTAL DEAD LOAD INCLUDES WEIGHT OF STRUCTURAL ELEMENTS.

3. SNOW LOADS:
- GROUND SNOW LOAD:  
FLAT ROOF SNOW LOAD:  
SNOW EXPOSURE FACTOR:  
SNOW IMPORTANCE FACTOR:  
THERMAL FACTOR:  
UNIFORM DESIGN SNOW LOAD:  
DRIFTING OF SNOW AND UNBALANCED SNOW SHALL BE IN ACCORDANCE WITH CODE.

20 PSF  
15 PSF  
1.0  
1.1  
1.0  
2.2 PSF
4. WIND:
- |                                       |                         |
|---------------------------------------|-------------------------|
| ULTIMATE DESIGN WIND SPEED, $V_{ult}$ | 120 MPH (3 SECOND GUST) |
| NOMINAL DESIGN WIND SPEED, $V_{nom}$  | 90 MPH (3 SECOND GUST)  |
| WIND EXPOSURE:                        | C                       |
| INTERNAL PRESSURE COEF:               | ±0.18                   |
- COMPONENTS AND CLADDING PRESSURE SHALL BE USED FOR DESIGN OF EXTERIOR WALLS, WINDOWS, DOORS, AND MISCELLANEOUS MATERIALS NOT SPECIFICALLY SHOWN ON THE PLANS.

5. SEISMIC:
- | SITE CLASS:   | D  |
|---|--|
| SEISMIC DESIGN CATEGORY: <td>B</td>   | B  |
| SEISMIC IMPORTANCE FACTOR: <td>1.5</td>   | 1.5  |
| Ss: <td>0.101</td>  | 0.101  |
| S1: <td>0.069</td>  | 0.069  |
| Sds: <td>0.108</td>   | 0.108  |
| Sd1: <td>0.110</td>   | 0.110  |
| LATERAL SYSTEM: <td>STEEL SYSTEMS NOT SPECIFICALLY DESIGNED FOR SEISMIC RESISTANCE (R=3)</td> | STEEL SYSTEMS NOT SPECIFICALLY DESIGNED FOR SEISMIC RESISTANCE (R=3) |
| METHOD OF ANALYSIS: <td>EQUIVALENT LATERAL FORCE</td>   | EQUIVALENT LATERAL FORCE   |
| Cs: <td>0.0538</td>   | 0.0538   |
| BASE SHEAR: <td>10.18 KIPS (ULTIMATE)</td>  | 10.18 KIPS (ULTIMATE)  |
6. SAFE ROOM/STORM SHELTER LOADING:
- NO AREA WITHIN THIS BUILDING HAS BEEN DESIGNED TO MEET THE REQUIREMENTS OF FEMA P-361 OR ICC/NSA-500. THE ARCHITECT MAY DESIGNATE AN AREA THAT, IN HIS/HER OPINION, HAS ENHANCED PROTECTION OVER THE REMAINDER OF THE BUILDING AS A PLACE OF REFUGE FROM HIGH WINDS. HOWEVER, IT SHOULD NOT BE CONSIDERED A SAFE ROOM/STORM SHELTER.

CONSTRUCTION DETAILS FOR STRUCTURAL MOVEMENT

1. IT IS THE CONTRACTOR'S RESPONSIBILITY TO PROVIDE ACCOMMODATIONS IN GLAZING, ARCHITECTURAL FINISHES, PLUMBING, HVAC AND ELECTRICAL ELEMENTS TO PREVENT DAMAGE DUE TO DEFLECTION OF ROOF, WALL AND FLOOR MEMBERS.
2. VERTICAL DEFLECTIONS DUE TO GRAVITY LOADS:
- | WIDE FLANGE ROOF BEAMS & GIRDERS | LENGTH IN INCHES/240 (TOTAL LOAD)<br>LENGTH IN INCHES/360 (LIVE ONLY) |
|----------------------------------|---|
|                                  |   |
3. HORIZONTAL DEFLECTIONS DUE TO WIND (W) OR SEISMIC (E):
- | CONVENTIONAL BUILDING (FLOOR TO ROOF) | HEIGHT IN INCHES/360(W), 200 (E) |
|---------------------------------------|----------------------------------|
|                                       |                                  |

DELEGATED ENGINEERING OF STRUCTURAL COMPONENTS AND SYSTEMS

1. ALL STRUCTURAL COMPONENTS AND SYSTEMS SPECIFIED TO BE DELEGATED SHALL BE DESIGNED AND SEALED BY A SPECIALTY STRUCTURAL ENGINEER (SSE) AND SHALL MEET THE GUIDELINES PUBLISHED BY THE COUNCIL OF AMERICAN STRUCTURAL ENGINEERS (CASE) FOR DELEGATED SPECIALTY STRUCTURAL ENGINEERING.
2. REFERENCE THE GENERAL NOTES & DRAWINGS FOR BUILDING CODE, SERVICE CRITERIA, AND DESIGN LOADS.
3. SUBMITTALS FOR DELEGATED COMPONENTS AND SYSTEMS SHALL INCLUDE THE FOLLOWING:
- A. A FULL DESIGN ANALYSIS, INCLUDING CALCULATIONS FOR GRAVITY AND LATERAL LOADS, WITH A SEALED COVER SHEET IDENTIFYING THE PROJECT NAME AND ADDRESS.
- B. THE SSE THAT SEALED THE CALCULATIONS SHALL ALSO SEAL THE FABRICATION, PLACING, AND ERECTION PLANS. EACH PLAN SHALL IDENTIFY THE PROJECT NAME AND ADDRESS.
- C. IF THE SSE THAT SEALED THE CALCULATIONS AND PLANS IS AN EMPLOYEE OF A COMPANY, THE COMPANY'S CERTIFICATE OF AUTHORIZATION NUMBER SHALL BE INCLUDED ON THE SUBMITTALS. BOTH THE SSE SEAL AND THE CERTIFICATE OF AUTHORIZATION NUMBER SHALL BE INCLUDED ON THE SUBMITTALS. BOTH THE SSE SEAL AND THE CERTIFICATE OF AUTHORIZATION SHALL BE ISSUED BY THE STATE IN WHICH THE PROJECT IS LOCATED, INCLUDING PROJECTS ON FEDERAL LAND.
- D. THE COMPANY THAT EMPLOYS THE SSE SHALL PROVIDE AN INSURANCE CERTIFICATE FOR PROFESSIONAL LIABILITY INSURANCE WITH AN AGGREGATE AMOUNT OF NO LESS THAN TWO MILLION DOLLARS (\$2,000,000). CONTRACTS OR SUB-CONTRACTS FOR THIS PROJECT SHALL NOT INCLUDE A LIMIT OF LIABILITY CLAUSE.
- E. THE SSE THAT SEALED THE PLANS SHALL INCORPORATE A WRITTEN STATEMENT THAT THE CONTRACT DOCUMENT'S CRITERIA HAVE BEEN INCORPORATED INTO THE DESIGN.
4. THE CONTRACTOR SHALL REVIEW THE SUBMITTAL FOR QUANTITIES AND DIMENSIONS AND VERIFY THAT THE ABOVE INFORMATION HAS BEEN INCLUDED IN THE SUBMITTAL.
5. NO SUBMITTAL WILL BE REVIEWED UNLESS ALL OF THE ABOVE INFORMATION IS INCLUDED. THE ENGINEER OF RECORD SHALL NOT BE RESPONSIBLE FOR DELAYS CAUSED BY INCOMPLETE SUBMITTALS.

SOIL PREPARATION AND FOUNDATIONS

1. THE FOUNDATION SYSTEM IS DESIGNED AS RECOMMENDED IN THE GEOTECHNICAL INVESTIGATION PREPARED BY KLEINFELDER, JOB NO. 62433, DATED 11/09/2005. A COPY IS IN THE SPECIFICATIONS OR IS AVAILABLE FOR INSPECTION AT THE ENGINEER'S PLACE OF BUSINESS.
2. REMOVE TOP SOIL CONTAINING ORGANIC MATERIAL AND PREPARE THE BUILDING PAD IN ACCORDANCE WITH THE CIVIL ENGINEERING PLANS, SPECIFICATIONS, AND GEOTECHNICAL INVESTIGATION.
3. REMOVE SOIL AS REQUIRED TO ALLOW FOR A LOW VOLUME CHANGE ZONE 24" THICK UNDER THE FLOOR SLAB AND DRAINAGE MATERIAL. FILL TO SUBGRADE ELEVATION SHOWN ON THE DRAWINGS WITH NON-EXPANSIVE FILL OR STABILIZED SOIL PER SPECIFICATION.
4. SOIL SUPPORTED FOUNDATIONS:
- A. DESIGN BEARING PRESSURE (NET) IS 3,500 psf FOR FOUNDATIONS BEARING ON UNDISTURBED SOIL OR APPROVED ENGINEERED FILL MATERIAL. BEARING MATERIALS SHALL BE VERIFIED BY A LICENSED GEOTECHNICAL ENGINEER.
- B. ALL FOUNDATIONS ARE DESIGNED WITH EARTH FORMED SIDES; THE TOP 7 1/2" OF THE FOUNDATION SHALL BE FORMED TO THE DESIGN DIMENSION WHEN VISIBLE AFTER CONSTRUCTION IS COMPLETE. THE CONSTRUCTED FOUNDATION DIMENSION SHALL BE NO LESS THAN THE DESIGN DIMENSION, AND NO MORE THAN 6" GREATER THAN THE DESIGN DIMENSION.
5. DO NOT BACKFILL FOUNDATIONS/BASEMENT WALLS UNTIL THE RESTRAINING SLABS OR ADEQUATE BRACING ARE IN PLACE. ALL BACKFILL SHALL BE PLACED AND COMPACTED IN ACCORDANCE WITH THE SPECIFICATION.
6. EXTERIOR SLABS SHALL SLOPE AWAY FROM THE STRUCTURE A MINIMUM OF 1/4" PER FOOT UNLESS NOTED OTHERWISE.

CONCRETE

1. ALL CONCRETE HAS BEEN DESIGNED IN ACCORDANCE WITH ACI 318 AND THE BUILDING CODE, AND IN CONFORMANCE WITH THE CURRENT "ACI MANUAL OF CONCRETE PRACTICE".
2. THE CONCRETE REQUIREMENTS ARE:
- A. CEMENT SHALL BE TYPE I OR II CONFORMING TO ASTM C150. FLY ASH CONFORMING TO ASTM C618 TYPE C OR F MAY BE USED TO REPLACE A MAXIMUM OF 20% OF THE CEMENT BY WEIGHT.
- B. FINE AGGREGATE FOR NORMAL WEIGHT CONCRETE SHALL MEET ASTM C33.
- C. COARSE AGGREGATES FOR NORMAL WEIGHT CONCRETE SHALL CONFORM TO ASTM C33, GRADE 67 OR LARGER. COARSE AGGREGATES SHALL BE NO LESS THAN 50% OF THE TOTAL AGGREGATE BY WEIGHT, UNLESS APPROVED BY THE ENGINEER PRIOR TO MIX DESIGN SUBMITTAL.
- D. ALL COARSE AGGREGATE AGGREGATE FOR LIGHTWEIGHT CONCRETE SHALL CONFORM TO ASTM C330. COARSE AGGREGATE SHALL BE NO LESS THAN 50% OF THE TOTAL AGGREGATE BY VOLUME, UNLESS APPROVED BY THE ENGINEER PRIOR TO MIX DESIGN SUBMITTAL. AGGREGATE SHALL BE DELIVERED "VACUUM SATURATED" OR STORED SUBMERGED IN WATER.
- E. MIX REQUIREMENTS ARE:

LOCATION	MINIMUM F <sub>c</sub> (PSI)	MINIMUM CEM. (PCY)	MAX W/C RATIO	AIR CONTENT	SLUMP INCHES <sup>x</sup>
EXTERIOR/FNDN. WALL	4000	470	0.45	5% ± 1%	2-5
FOUNDATIONS	4000	470	0.45	5% ± 1%	2-5
PIERS	3000	423	0.50	N/A	3-6
GRADE BEAMS	4000	470	0.45	5% ± 1%	2-5
INTERIOR SLAB***	4000	470	0.45	5% ± 1%	2-5
COLUMNS AND WALLS	4000	470	0.45	3% MAX.	2-5.

\*\*\*SLAB ON GRADE SHALL HAVE A FLEXURAL STRENGTH OF 650 PSI WHERE SUBJECT TO VEHICLE TRAFFIC.

F<sub>c</sub> SPECIFIED IS BASED ON THE 28 DAY COMPRESSIVE STRENGTH IN ACCORDANCE WITH ACI 318 ACCEPTANCE CRITERIA.

ADMIXTURES, HARDENERS AND CURING COMPOUNDS

- A. ALL CONCRETE ADMIXTURES SHALL, WHEN MIXED INTO CONCRETE, BE NON-CHLORIDE AND NON-CHLORIDE FORMING.
- B. ALL ADMIXTURES MUST CONFORM TO ASTM C-494 AND C-260.
- C. CONCRETE CURING COMPOUND AND SEALERS SHALL MEET ASTM C-309 TYPE 1 OR 1D.
- D. USE OF "SELF CONSOLIDATING" CONCRETE MUST BE SUBMITTED FOR APPROVAL WITH THE CONCRETE MIX DESIGN.
- E. CONCRETE PENETRATING HARDENER SEALERS SHALL BE USED ON ALL EXPOSED CONCRETE FLOORS UNLESS OTHER COATINGS ARE REQUIRED BY THE ARCHITECT.

MISCELLANEOUS CONCRETE DETAILS

- A. ALL EXPOSED EDGES OF CONCRETE SHALL BE CHAMFERED 3/4" INSIDE THE FORMS OR TOOLED 3/4" RADIUS UNLESS NOTED OTHERWISE.
- B. SLABS ON GRADE SHALL HAVE CONSTRUCTION JOINTS AND/OR CONTROL JOINTS (SAWN JOINTS) TO DIVIDE THE SLAB INTO PANELS, NOT TO EXCEED 256 SQUARE FEET. THE LONG DIMENSION SHALL NOT EXCEED THE SHORT DIMENSION BY MORE THAN 20%. CONTRACTOR TO SUBMIT PROPOSED LOCATIONS FOR APPROVAL.
- C. VERTICAL CONSTRUCTION JOINTS IN ELEVATED SLABS AND BEAMS, IF REQUIRED SHALL BE LOCATED AT MIDSPAN. ALL JOINTS SHALL BE THOROUGHLY CLEANED AND PURPOSELY ROUGHENED TO 1/4" AMPLITUDE PRIOR TO PLACING ADJACENT CONCRETE.
- D. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE DESIGN OF ALL FORMING AND SHORING. SHORING FOR ELEVATED SLABS SHALL BE SET SO THAT ANY LOAD DUE TO THE CONCRETE OPERATIONS DOES NOT CAUSE THE FORMS TO SETTLE (SLACK, TAKE-UP, ETC.). ELEVATED SLABS THAT SPAN OVER TWENTY FIVE FEET SHALL HAVE AN ADDITIONAL SLIGHT CAMBER SET INTO THE FORMS FOR THE DEAD LOAD DEFLECTION OF THE SLAB (APPROXIMATELY 1/480). SCREEDS SHALL ALSO INCORPORATE THIS CAMBER TO CREATE A FINISHED SLAB OF UNIFORM THICKNESS. ELEVATED SLABS SHALL NOT HAVE THE FORMS REMOVED WITHOUT PLACING RESHORES. IF ADDITIONAL ELEVATED SLABS WILL BE SHORED ON TOP OF PREVIOUSLY CAST ELEVATED SLABS, THE SLABS SHALL BE RESHORED IN ACCORDANCE WITH ACI.
- E. NO ALUMINUM SHALL BE EMBEDDED IN CONCRETE. CONDUITS AND PIPING EMBEDDED IN CONCRETE WALLS, SLABS OR BEAMS SHALL BE SPACED A MINIMUM OF FOUR DIAMETERS AND THE OUTSIDE DIAMETER SHALL BE LESS THAN 30% OF THE MEMBER THICKNESS AND PLACED BETWEEN LAYERS OF REINFORCING.
- F. NO CONDUIT MAY BE EMBEDDED IN SLABS ON METAL DECK OR TOPPING SLABS ON PRECAST CONCRETE UNLESS SPECIFICALLY DETAILED OR NOTED OTHERWISE ON STRUCTURAL PLANS.

CONCRETE REINFORCING

1. MATERIALS
- | ASTM                       | GRADE |
|----------------------------|-------|
| PLATE & ANGLE              | A36   |
| REINFORCING STEEL          | A615  |
| WELDABLE REINFORCING STEEL | A706  |
| WELDED WIRE FABRIC (WWF)   | A185  |
| HEADED STUDS               | A108  |
| DEFORMED BAR ANCHORS       | A706  |
| ANCHOR RODS (BOLTS)        | F1554 |
2. DETAILS:
- A. WELDING OF REINFORCING STEEL IS PROHIBITED UNLESS NOTED OTHERWISE. WHEN WELDING IS APPROVED, WELDING SHALL BE IN ACCORDANCE WITH AWS D1.4 "WELDING REINFORCING STEEL, ETC."
- B. WELDED WIRE FABRIC SHALL BE FURNISHED IN FLAT SHEETS.
- C. SHOP DRAWINGS SHALL BE SUBMITTED WITH REINFORCING STEEL IN ACCORDANCE WITH ACI 315.
- D. WHEN MECHANICAL SPLICES ARE INDICATED ON THE PLANS, THE SPLICE SHALL DEVELOP 125% OF THE SPECIFIED YIELD STRENGTH OF THE REINFORCING STEEL. REQUESTS BY THE CONTRACTOR FOR MECHANICAL SPLICES MUST BE SUBMITTED IN WRITING.
3. PLACEMENT
- A. ALL REINFORCING AND EMBEDMENTS SHALL BE SUPPORTED ON CHAIRS/BOLSTERS TO THE DESIGN DIMENSIONS. SPACING SHALL BE SUFFICIENTLY CLOSE TO PREVENT DISPLACEMENT OR PERMANENT DEFORMATION DUE TO CONCRETE PLACEMENT, FOOT TRAFFIC OR VIBRATION. "PUDDLING IN" OR "PULLING UP" REINFORCING IS NOT AN ACCEPTABLE METHOD FOR PLACING REINFORCING. CHAIRS/BOLSTERS SHALL HAVE PLASTIC COATED FEET OR BE MADE OF STAINLESS STEEL. CHAIRS/BOLSTERS IN CONTACT WITH EARTH SHALL HAVE BOTTOM PLATES AND BE COATED TO PREVENT CORROSION. ANCHOR RODS SHALL BE HELD IN PLACE WITH TEMPLATES SUFFICIENTLY STRONG TO PREVENT DISPLACEMENT OR TILTING.
- B. MAINTAIN ACI CLEAR COVER ON REINFORCING AS LISTED BELOW UNLESS NOTED OTHERWISE.
- | CAST AGAINST EARTH (BOTTOM OR SIDES)         | 3"     |
|--|--------|
| FORMED - EXPOSED TO SOIL, WEATHER OR LIQUIDS | 2"     |
| FORMED SLABS - INTERIOR                      | 1 1/2" |
| FORMED MEMBERS - INTERIOR                    | 1 1/2" |
| SLABS ON GRADE (FROM TOP OF SLAB)            | 1 1/2" |
- C. PROVIDE CORNER BARS OF THE SAME SIZE AND SPACING AS ADJACENT REINFORCING.
- D. OPENINGS IN WALLS OR SLABS SHALL BE REINFORCED PER DETAIL.
- E. REINFORCING STEEL SHALL BE LAPPED PER TABLE "A".
- F. WELDED WIRE FABRIC SHALL BE LAPPED ONE FULL SQUARE PLUS 2"

STRUCTURAL STEEL

1. STRUCTURAL STEEL SHALL MEET THE LATEST "CODE OF STANDARD FOR STEEL BUILDINGS AND BRIDGE," AND HAS BEEN DESIGNED IN ACCORDANCE WITH THE BUILDING CODE AND THE LATEST EDITION OF AISC "MANUAL OF STEEL CONSTRUCTION".
2. STRUCTURAL STEEL SHALL BE NEW AND MEET THE FOLLOWING REQUIREMENTS UNLESS NOTED OTHERWISE ON THE DRAWINGS:
- | TYPE                     | ASTM | GRADE              |
|--------------------------|------|--------------------|
| W & WT SHAPES            | A992 | -----              |
| PIPE SECTIONS            | A53  | B (Fy=35 KSI)      |
| RECTANGULAR HSS SECTIONS | A500 | B (Fy=46 KSI)      |
| STRUCTURAL BOLTS         | A325 | ----- (ASTM F1852) |
| ERECTION BOLTS           | A307 | -----              |
| HEADED ANCHOR STUDS      | A108 | 1015/1025          |
3. ALL BOLTED CONNECTIONS SHALL BE STANDARD AISC BEARING TYPE FRAMING CONNECTIONS. BOLTS SHALL BE TENSION-INDICATING FOR INSPECTION PURPOSES.
4. ALL CONNECTIONS NOT DETAILED OR OTHERWISE NOTED SHALL BE PROVIDED BY THE FABRICATOR AND HIGHLIGHTED FOR THE ENGINEER OF RECORD'S REVIEW.
5. ALL WELDING SHALL BE IN ACCORDANCE WITH LATEST AWS CODE, SECTION D1.1. ALL WELD MATERIAL SHALL BE 70 KSI TENSILE STRENGTH.
6. STEEL FRAMING MEMBERS SHALL NOT BE FLACED.
7. OPENINGS SHALL NOT BE FIELD-CUT IN THE FLANGE OR WEBS OF STEEL MEMBERS.
8. GALVANIZED STRUCTURAL STEEL SHALL CONFORM TO ASTM A123 FOR MEMBERS AND ASTM A153 FOR CONNECTION ELEMENTS. REPAIR ANY DAMAGED GALVANIZING COATING IN ACCORDANCE WITH ASTM A780.

STEEL DECKING

1. DECK SHALL BE ATTACHED TO ALL SUPPORTING MEMBERS.
- A. ATTACH METAL DECK TO STEEL MEMBERS WITH 5/8" DIAMETER PUDDLE WELDS. USE WELDING WASHERS FOR DECKS THINNER THAN 22 GAUGE. WELDS SHALL BE IN ACCORDANCE WITH THE CURRENT STANDARDS OF THE AWS. REFERENCE DECK ATTACHMENT DETAIL.
2. STEEL ROOF DECK SHALL BE 1 1/2" DEEP, 22 GAUGE, WIDE RIB METAL DECKING WITH THE FOLLOWING PROPERTIES:
- |             |                       |
|-------------|-----------------------|
| MINIMUM Fy: | 33 KSI                |
| MINIMUM Ip: | 0.155 IN <sup>4</sup> |
| MINIMUM Sp: | 0.186 IN <sup>3</sup> |
| MINIMUM In: | 0.183 IN <sup>3</sup> |
| MINIMUM Sn: | 0.192 IN <sup>3</sup> |
- ROOF DECK SHALL RECEIVE FINISH PER SPECIFICATION. DECK SHALL BE CONTINUOUS OVER A MINIMUM OF THREE SPANS. EACH DECK UNIT SHALL BE ATTACHED TO SUPPORTING MEMBERS AND ADJACENT PANELS PER THE DIAPHRAGM ATTACHMENT DETAIL.
3. PROVIDE ANGLE FRAME SUPPORT METAL DECK AT ALL ROOF DRAINS AND OTHER OPENINGS GREATER THAN 8"x8". OPENINGS SMALL THAN 8" REQUIRE NO REINFORCEMENT.

COLD FORMED STEEL FRAMING

1. ALL COLD FORMED FRAMING DESIGN SHALL BE DELEGATED TO A SPECIALTY STRUCTURAL ENGINEER (SSE). THE DELEGATED DESIGN PACKAGE SHALL BE SUBMITTED IN ACCORDANCE TO THE "DELEGATED ENGINEERING OF STRUCTURAL COMPONENTS AND SYSTEMS" SECTION OF THE GENERAL STRUCTURAL NOTES.
2. ALL COLD-FORMED STEEL STUDS SHALL BE GALVANIZED PER AISI STANDARDS. APPLY ZINC-RICH PAINT TO ALL AREAS WHERE FINISH IS DUE TO WELDING.
3. PRODUCTS SHALL BE FORMED FROM STEEL MEETING THE REQUIREMENTS OF AISI, SPECIFICATIONS FOR THE DESIGN OF COLD-FORMED STEEL STRUCTURAL MEMBERS, UNLESS NOTED OTHERWISE.
4. STUD TRACK SECTIONS SHALL MEET OR EXCEED THICKNESS OF STUD MEMBERS, UNLESS NOTED OTHERWISE.
5. ALL FRAMING COMPONENTS SHALL BE CUT SQUARELY FOR ATTACHMENT TO PERPENDICULAR MEMBERS.
6. PROVIDE ALL ACCESSORIES INCLUDING, BUT NOT LIMITED TO, TRACKS, CLIPS, WEB STIFFENERS, FASTENERS, ANCHORAGE DEVICES, CONNECTION ANGLES, BRIDGING, AND MISCELLANEOUS HARDWARE REQUIRED TO COMPLETE ALL CONNECTIONS AND INSTALLATION.
7. FASTENING OF FRAMING COMPONENTS SHALL BE WITH SELF-TAPPING SCREWS OR WELDING OF SUFFICIENT SIZE TO INSURE THE STRENGTH OF THE CONNECTION. WELDS SHALL BE PERFORMED IN ACCORDANCE WITH THE LATEST AWS D1.3 CODE.
8. COLD-FORMED STEEL STUD PRODUCTS SHALL BE MANUFACTURED BY A CURRENT MEMBER OF THE STEEL STUD MANUFACTURER ASSOCIATION (SSMA) OR THE STEEL FRAMING INDUSTRY ASSOCIATION (SFIA).
- A. THE PHYSICAL AND STRUCTURAL PROPERTIES SHALL BE EQUIVALENT TO THOSE LISTED BY THE SSMA "PRODUCT TECHNICAL INFORMATION" AND ICC-ES ESR-3064P FOR "S" AND "T" SECTIONS.
- B. PROVIDE WALL STUD BRIDGING SPACES AT 4'-0" O.C. MAXIMUM IN ALL EXTERIOR WALLS AND INTERIOR LOAD BEARING WALLS.
- C. PROVIDE DEFLECTION TRACK AT THE TOP OF ALL NON-LOAD BEARING STUD WALLS WHERE THE TOP OF WALL ABUTS THE BOTTOM OF THE STRUCTURE. DEFLECTION TRACK SHALL ACCOMMODATE A DEFLECTION DESCRIBED UNDER CONSTRUCTION DETAILS FOR STRUCTURAL MOVEMENT.
- D. ATTACH STUDS TO TRACK WITH A MINIMUM OF ONE SCREW IN EACH STUD FLANGE, UNLESS NOTED OTHERWISE.

UNISTRUT FRAMING SYSTEMS

1. SHOULD A UNISTRUT (OR APPROVED EQUAL) SYSTEM BE DESIGNED FOR THE SUPPORT OF MEDICAL EQUIPMENT, IT SHALL BE DESIGNED BY A SPECIALTY STRUCTURAL ENGINEER (SSE) IN ACCORDANCE TO THE REQUIREMENTS IN THE "DELEGATED ENGINEERING OF STRUCTURAL COMPONENTS AND SYSTEM" SECTION OF THE GENERAL STRUCTURAL NOTES.

POST INSTALLED ANCHORING SYSTEMS

1. SUBSTITUTION OF POST INSTALLED ANCHORS FOR EMBEDDED ANCHORS SHOWN ON THE DRAWINGS WILL NOT BE PERMITTED UNLESS APPROVED BY THE ENGINEER IN ADVANCE.
2. ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH THE MANUFACTURER'S PRINTED INSTALLATION INSTRUCTIONS (MPI) AND THE EVALUATION REPORT (ER/ESR) SPECIFIED INCLUDING HOLE PREPARATION, TEMPERATURE AND MOISTURE CONDITIONS.
3. ADHESIVE ANCHORS:
- A. THE CONTRACTOR SHALL ARRANGE ANCHOR MANUFACTURER'S REPRESENTATIVE TO PROVIDE ONSITE INSTALLATION TRAINING FOR ALL ANCHOR PRODUCTS SPECIFIED. THE CONTRACTOR MUST MAINTAIN TRAINING RECORDS OF ALL CONTRACTOR PERSONNEL INSTALLING ANCHORS AND SUBMIT TO THE ENGINEER OF RECORD PRIOR TO INSTALLING ANCHORS UPON REQUEST.
- B. ADHESIVE ANCHORS SHALL BE USED IN CONJUNCTION WITH THE APPROPRIATE ADHESIVE SYSTEM. STANDARD REINFORCING STEEL ANCHORED IN CONCRETE SHALL BE IN ACCORDANCE WITH ASTM A615 GRADE 60 UNLESS NOTED OTHERWISE.
- C. APPROVED ADHESIVE ANCHORS FOR PREVIOUSLY CAST CONCRETE:
- | MANUFACTURER/PRODUCT                                     | REPORT NUMBER     |
|--|-------------------|
| HILTI HIT-HY200 SSS* WITH HIT-Z ROD                      | ICC-ES ESR-3187   |
| HILTI HIT-HY200 SSS* WITH HOLLOW BIT & HAS-E ROD         | ICC-ES ESR-3187   |
| HILTI HIT-HY200 SSS* WITH HOLLOW BIT & STEEL REINFORCING | ICC-ES ESR-3187   |
| *SAFE SET SYSTEM   |                   |
| SIMPSON STRONG-TIE SET-XP WITH SPEED CLEAN DXS SYSTEM    | ICC-ES ESR-2508   |
| SIMPSON STRONG-TIE AT-XP WITH SPEED CLEAN DXS SYSTEM     | IAPMO-JES ESR-263 |
4. EXPANSION ANCHORS:
- A. EXPANSION ANCHORS WILL NOT BE ALLOWED WITHOUT APPROVAL FROM THE ENGINEER OF RECORD (EOR).
5. POWDER ACTUATED FASTENERS
- A. WHEN CALLED FOR ON THE PLANS, THE APPROVED ANCHORS ARE:
- | MANUFACTURER AND PRODUCT         | USE                          | REPORT NUMBER   |
|----------------------------------|------------------------------|-----------------|
| HILTI X-GN (1" EMBED)            | METAL STUD TRACK TO CONCRETE | ICC-ES ESR-1752 |
| HILTI X-GN                       | METAL STUD TRACK TO STEEL    | ICC-ES ESR-1752 |
| HILTI X-EDNK22 THQ12 (1/8<1<1/4) | METAL DECK TO STEEL          | ICC-ES ESR-2197 |
| X-EDN-19 THQ12 (3/16<1<3/8)      |                              | ICC-ES ESR-2776 |
| X-ENP-19 L15 (1<1/4)             |                              |                 |
| HILTI ENP2-21 L15                |                              |                 |
| SIMPSON STRONG-TIE PDPA          | METAL STUD TRACK TO CONCRETE | ICC-ES ESR-2138 |
| SIMPSON STRONG-TIE PDPA          | METAL STUD TRACK TO STEEL    | ICC-ES ESR-2138 |
- \* ALL FASTENERS SHALL MEET THE MINIMUM FULLY SEATED DEPTH INDICATED BY THE HILTI DEPTH GAUGE. NO EXCEPTIONS WILL BE APPROVED.

CONTRACT/CONSTRUCTION DOCUMENTS

1. THE CONTRACTOR SHALL BE RESPONSIBLE TO OBTAIN A FULL SET OF THE MOST RECENT REVISIONS OF EACH DOCUMENT INCLUDING ALL PLANS, SPECIFICATIONS, ADDENDA, AND SUPPLEMENTAL INSTRUCTIONS.
2. THE CONTRACTOR SHALL REVIEW THE DOCUMENTS PRIOR TO FABRICATION AND/OR INSTALLATION OF ANY MATERIALS FOR CONFLICTS. IF CONFLICTS OCCUR THE CONTRACTOR SHALL USE THE MOST STRINGENT REQUIREMENT OR REQUEST A CLARIFICATION THROUGH A REQUEST FOR INFORMATION (RFI).
3. THE DOCUMENTS MAY NOT BE REPRODUCED IN WHOLE OR IN PART FOR USE ON PROJECTS OTHER THEN IDENTIFIED IN THE TITLE BLOCK. SHOULD THE CONTRACTOR USE THE DOCUMENTS AS A PORTION OF A SHOP DRAWING THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY CONSEQUENCES RESULTING FROM ERRORS IN THE REPRODUCED DOCUMENTS.
4. DETAILS LABELED TYPICAL ARE INTENDED TO REPRESENT A CONDITION THAT OCCURS AT SEVERAL LOCATIONS IN THE PLANS WHETHER OR NOT THE DETAIL IS REFERENCED.
5. DO NOT SCALE THE PLANS AND DETAILS FOR THE PURPOSE OF ESTABLISHING DIMENSIONS.

CONTRACTOR'S RESPONSIBILITY

1. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REVIEWING ALL SUB-CONTRACTOR SUBMITTALS AND NOTING ALL DEVIATIONS FROM THE CONSTRUCTION DOCUMENTS PRIOR TO SUBMITTING TO THE ENGINEER FOR REVIEW.
2. SUBSTITUTION REQUESTS SHALL BE SUBMITTED IN WRITING WITH THE COST REDUCTION AMOUNT AND THE SCHEDULE IMPACT FOR THE OWNER'S SUBMITTALS WITHIN THE COST AND SCHEDULE IMPACT WILL NOT BE REVIEWED). A COMPARISON OF THE DATA WITH THE MATERIAL SPECIFIED INCLUDING CODE APPROVALS SHALL BE PROVIDED.
3. REQUESTS FOR INFORMATION (RFI) SHALL BE SUBMITTED IN WRITING WITH COST, SCHEDULE IMPACT AND SUGGESTED SOLUTION INCLUDED. AN RFI THAT DOES NOT INCLUDE THE COST AND SCHEDULE IMPACT WILL NOT BE REVIEWED.
4. DEFECTIVE WORK REPORT (DWR) SHALL BE SUBMITTED TO THE ENGINEER WITHIN (2) WORKING DAYS OF THE OCCURRENCE. THE DWR SHALL REPORT THE DEFECT AND PROPOSE A REMEDIATION OF THE DEFECT. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL COSTS ASSOCIATED WITH THE REMEDIATION OF THE DEFECT INCLUDING ENGINEERING COSTS, IF ANY.
5. WHEN THE CONTRACTOR BECOMES AWARE OF WHAT MAY BE AN UNFORSEEN CONDITION THAT COULD AFFECT COST OR SCHEDULE, THE CONTRACTOR SHALL NOTIFY THE ENGINEER IN WRITING WITHIN (2) WORKING DAYS. AFTER REVIEW AND ENGINEER'S DETERMINATION THAT AN UNFORSEEN CONDITION EXISTS, THE CONTRACTOR SHALL SUBMIT A CHANGE ORDER REQUEST FOR APPROVAL WITH BOTH COST AND SCHEDULE IMPACT ATTACHED.
6. THE CONTRACTOR'S SCHEDULE MUST PROVIDE A REASONABLE TIME ALLOWANCE FOR THE ENGINEERING REVIEW AND APPROVAL.
7. THE CONTRACTOR WILL BE SOLELY RESPONSIBLE FOR SITE SAFETY. THE ENGINEER IS RESPONSIBLE FOR FOLLOWING THE CONTRACTOR'S CONSTRUCTION SITE SAFETY INSTRUCTIONS PROVIDED IN WRITING. ALTERNATELY, THE CONTRACTOR SHALL ASSIGN AN ESCORT TO ADVISE THE ENGINEER OF SITE SAFETY ISSUES DURING SITE VISITS. THE ENGINEER'S PURPOSE OF A SITE VISIT IS SOLELY TO BECOME FAMILIAR WITH THE GENERAL PROGRESS AND QUALITY OF THE PROJECT. THE ENGINEER'S SITE VISIT IS NOT A QUALITY CONTROL FUNCTION.

CONSTRUCTION MEANS AND METHODS ISSUES

1. SLAB ON GRADE AND ELEVATED SLABS ARE NOT DESIGNED TO SUPPORT CRANES, FORKLIFTS, TRUCKS, MANLIFTS OR OTHER CONSTRUCTION RELATED EQUIPMENT UNLESS NOTED AS SUCH. IT IS THE CONTRACTOR'S RESPONSIBILITY TO DETERMINE IF CONSTRUCTION EQUIPMENT CAN BE SAFELY OPERATED ON THESE SLABS AND TO REPAIR ANY DAMAGE THE EQUIPMENT MAY CAUSE.
2. THE CONSTRUCTION DOCUMENTS REPRESENT A STABLE STRUCTURE IN THE COMPLETED FORM. THE CONTRACTOR SHALL PROVIDE ANY TEMPORARY BRACING AND/OR SHORES TO SAFELY CONSTRUCT THE BUILDING AND PREVENT DAMAGE DURING CONSTRUCTION.
3. THE CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND ELEVATIONS OF EXISTING CONSTRUCTION THAT MAY AFFECT THE PROJECT AND REPORT DISCREPANCIES TO THE ENGINEER. ANY DIMENSIONS FOR ELEVATIONS THAT IMPACT NEW WORK SHALL BE VERIFIED PRIOR TO FABRICATION OF ANY MATERIAL. EXISTING BUILDING ELEMENTS THAT ARE TO BE ABANDONED THAT INTERFERE WITH NEW CONSTRUCTION SHALL BE REMOVED.
4. WHEN A PIECE OF EQUIPMENT (HVAC, ELECTRICAL, KITCHEN, ETC.) IS PROVIDED THAT IS DIFFERENT THAN THE EQUIPMENT THAT THE STRUCTURE WAS DESIGNED FOR EITHER BY SIZE, WEIGHT OR CONFIGURATION, THE CONTRACTOR SHALL BE RESPONSIBLE FOR ALL COSTS ASSOCIATED WITH THE REMEDY OF THE SITUATION. THOSE COSTS SHALL INCLUDE THE ENGINEERING COSTS TO REDESIGN PORTIONS OF THE STRUCTURE TO ACCOMMODATE THE SUBSTITUTED EQUIPMENT.
5. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE STRUCTURAL DESIGN AND MATERIALS FOR ATTACHING NON-STRUCTURAL ELEMENTS TO ANY PORTION OF THE STRUCTURE TO RESIST ALL LOADS, INCLUDING SEISMIC, IN A WAY THAT DOES NOT OVERSTRESS STRUCTURAL MEMBERS. NON-STRUCTURAL ELEMENTS CAN BE FOUND IN EACH OF THE OTHER DISCIPLINES (ARCHITECTURAL, MECHANICAL, ELECTRICAL, ETC.)


STRUCTURAL TESTS, INSPECTIONS, AND QUALITY ASSURANCE

ALL STRUCTURAL TESTS AND INSPECTIONS SHALL BE PERFORMED PER CHAPTER 17 OF THE BUILDING CODE WITH LOCAL SUPPLEMENTS, UNLESS MORE STRINGENT REQUIREMENTS ARE SPECIFIED.

TABLE A - REINFORCEMENT LAPS, EMBEDMENTS AND HOOK LENGTHS

fy = 60000 psi				fc = 4000 psi				
BAR SIZE (d)	CLEAR SPACING (S) (in.)	EMBEDMENT & CLASS A LAP (in.)				CLASS B LAP (in.)		HOOK EMBED (in.)
		TOP BAR		OTHER BARS		TOP BAR	OTHER BARS	
		$2d$ $3d$ $1\frac{1}{8}$ $1\frac{7}{8}$	$3d$ $5d$ $28$ $18$	$3d$ $5d$ $28$ $18$	$3d$ $5d$ $28$ $18$	$3d$ $5d$ $28$ $18$	$3d$ $5d$ $28$ $18$	
3	2d	3d	5d	28	18	3d	5d	8
4	1	1 1/2	1 7/8	37	25	18	28	12
5	1 1/4	1 7/8	3 1/8	46	31	18	36	24
6	1 1/2	2 1/4	3 3/4	55	37	22	43	28
7	1 3/4	2 5/8	4 3/8	81	54	32	62	40
8	2	3	5	92	62	37	71	47
9	2 1/4	3 3/8	5 5/8	104	70	42	80	54
10	2 1/2	3 3/4	6 3/8	117	78	47	90	60
11	2 7/8	4 1/4	7	130	87	52	100	67

- NOTES
- LENGTHS SHOWN CONFORM WITH NON-SEISMIC PROVISIONS OF ACI 318 FOR UNCOATED BARS.
  - BAR CLEAR SPACING IS THE CENTER TO CENTER BAR SPACING MINUS ONE BAR DIAMETER.
  - CLASS A LAP LENGTHS APPLY WHEN BAR LAPS ARE STAGGERED TO LAP HALF THE BARS AT THE SAME LOCATION. USE CLASS B LAP FOR ALL OTHER CASES.
  - TOP BARS ARE HORIZONTAL REINFORCEMENT PLACED SO THAT MORE THAN 12 INCHES OF CONCRETE IS CAST BELOW THE REINFORCEMENT.
  - MULTIPLY LAP AND EMBEDMENT LENGTHS GIVEN BY 2.0 FOR BARS WITH CLEAR SPACING OF TWO BAR DIAMETERS OR LESS, OR CONCRETE COVER OF ONE BAR DIAMETER OR LESS.

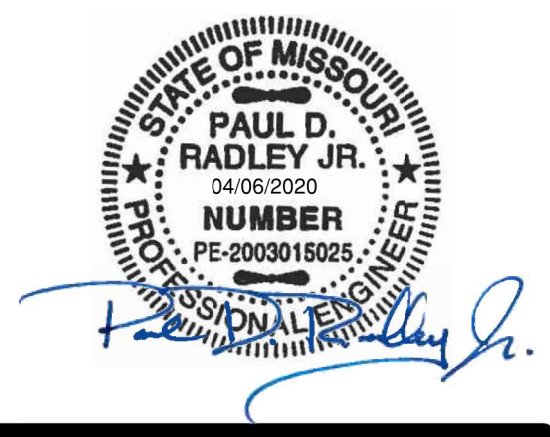

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition

2100 SE Blue Parkway

Lee's Summit, MO 64063

Date 04/03/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision  
Number Date Description  
1 4/6/2020 City Comments



REQUIRED SPECIAL INSPECTIONS AND TESTS OF STRUCTURAL STEEL FOR WELDING PROCESS		
Inspection Tasks Prior to Welding		
Inspection Tasks Prior to Welding	QUALITY CONTROL	QUALITY ASSURANCE
Welding procedure specifications (WPSs) available	P	P
Manufacturer certifications for welding consumables available	P	P
Material identification (type/grade)	O	O
Welder identification system <sup>1</sup>	O	O
Fit-up of groove welds (including joint geometry)		
• Joint preparation		
• Dimensions (alignment, root opening, root face, bevel)	O	O
• Cleanliness (condition of steel surfaces)		
• Tacking (tack weld quality and location)		
• Backing type and fit (if applicable)		
Configuration and finish of access holes	O	O
Fit-up of fillet welds		
• Dimensions (alignment, gaps at root)	O	O
• Cleanliness (condition of steel surfaces)		
• Tacking (tack weld quality and location)		
Check welding equipment	O	--
Inspection Tasks During Welding		
Inspection Tasks During Welding	QUALITY CONTROL	QUALITY ASSURANCE
Use of qualified welders	O	O
Control and handling of welding consumables		
• Packaging	O	O
• Exposure Control		
No welding over cracked tack welds	O	O
Environmental conditions		
• Wind speed within limits	O	O
• Precipitation and temperature		
WPS followed		
• Settings on welding equipment		
• Travel speed		
• Selected welding materials	O	O
• Shielding gas type/flow rate		
• Preheat applied		
• Interpass temperature maintained (min/max)		
• Proper position (F, V, H, OH)		
Welding Techniques		
• Interpass and final cleaning	O	O
• Each pass within profile limitations		
• Each pass meets quality requirements		
Inspection Tasks After Welding		
Inspection Tasks After Welding	QUALITY CONTROL	QUALITY ASSURANCE
Welds cleaned	O	O
Size, length and location of welds	P	P
Welds meet visual acceptance criteria		
• Crack prohibition		
• Weld/base-metal fusion		
• Crater cross section	P	P
• Weld profiles		
• Weld size		
• Undercut		
• Porosity		
Arc strikes	P	P
k-area <sup>2</sup>	P	P
Backing removed and weld tabs removed (if required)	P	P
Repair activities	P	P
Document acceptance or rejection of welded joint or member	P	P

Quality Control - Requirements on the part of the steel fabricator and erector.  
Quality Assurance - Requirements on the part of the project owner's representative.  
P - Perform these tasks for each weld joint or member.  
O - Observe these items on a random basis. Operations need not be delayed pending these inspections  
<sup>1</sup> - The fabricator or erector, as applicable, shall maintain a system by which a welder who has welded a joint or member can be identified. Stamps, if used, shall be the low-stress type.  
<sup>2</sup> - When welding of doubler plates, continuity plates or stiffeners has been performed in the k-area, visually inspect the web k-area for cracks within 3 inches (75 mm) of the weld.

REQUIRED SPECIAL INSPECTIONS AND TESTS OF CAST-IN-PLACE DEEP FOUNDATION ELEMENTS	
TYPE	FREQUENCY
1. Inspect drilling operations and maintain complete and accurate records for each element.	Continuous
2. Verify placement locations and plumbness, confirm element diameters, bell diameters (if applicable), lengths, embedment into bedrock (if applicable) and adequate end-bearing strata capacity. Record concrete or grout volumes	Continuous
3. For concrete elements, perform tests and additional special inspections in accordance with Section 1705.3.	

REQUIRED SPECIAL INSPECTIONS AND TESTS OF STRUCTURAL STEEL FOR BOLTING PROCESS		
Inspection Tasks Prior to Bolting		
Inspection Tasks Prior to Bolting	QUALITY CONTROL	QUALITY ASSURANCE
Manufacturer certifications available for fastener materials	O	P
Fasteners marked in accordance with ASTM requirements	O	O
Proper fasteners selected for the joint detail (grade, type, bolt length if threads are to be excluded from shear plane)	O	O
Proper bolting procedure selected for joint detail	O	O
Connecting elements, including the appropriate faying surface condition and hole preparation, if specified, meet applicable requirements	O	O
Pre-installation verification testing by installation personnel observed and documented for fastener assemblies and methods used	P	O
Proper storage provided for bolts, nuts, washers and other fastener components	O	O
Inspection Tasks During Bolting		
Inspection Tasks During Bolting	QUALITY CONTROL	QUALITY ASSURANCE
Fastener assemblies, of suitable condition, placed in all holes and washers (if required) are positioned as required	O	O
Joint brought to the snug-tight condition prior to the pretensioning operation	O	O
Fastener component not turned by the wrench prevented from rotating	O	O
Fasteners are pretensioned in accordance with the RCSC Specification, progressing systematically from the most rigid point toward the free edges	O	O
Inspection Tasks After Bolting		
Inspection Tasks After Bolting	QUALITY CONTROL	QUALITY ASSURANCE
Document acceptance or rejection of bolted connections	P	P

Quality Control - Requirements on the part of the steel fabricator and erector.  
Quality Assurance - Requirements on the part of the project owner's representative.  
P - Perform these tasks for each weld joint or member.  
O - Observe these items on a random basis. Operations need not be delayed pending these inspections

Inspection of Steel Elements of Composite Construction Prior to Concrete Placement		
Inspection of Steel Elements of Composite Construction Prior to Concrete Placement	QUALITY CONTROL	QUALITY ASSURANCE
Placement and installation of steel deck	P	P
Placement and installation of steel headed stud anchors	P	P
Document acceptance or rejection of steel elements	P	P

Quality Control - Requirements on the part of the steel fabricator and erector.  
Quality Assurance - Requirements on the part of the project owner's representative.  
P - Perform these tasks for each weld joint or member.  
O - Observe these items on a random basis. Operations need not be delayed pending these inspections

**Special Inspection Additional Requirements:**

- Additional items that need special inspection, in the opinion of the building official, shall be inspected.
- Coordination of Special Inspections with construction of the inspected items shall be the responsibility of the contractor.
- If Special Inspection is waived by the Authority having Jurisdiction, the general contractor shall provide the designer of record with a copy of the written exemption for each item that has been waived.
- The building official may perform inspections in addition to and/or concurrently with the Special Inspection's outlined in the tables.
- The general contractor is responsible for implementing a quality control program. The quality control program is in addition to the Special Inspection requirements and must meet or exceed those responsibilities required as part of the contract drawings and specifications.

REQUIRED SPECIAL INSPECTIONS AND TESTS OF SOILS	
TYPE	FREQUENCY
1. Verify materials below shallow foundations are adequate to achieve the design bearing capacity.	Periodic
2. Verify excavations are extended to proper depth and have reached proper material.	Periodic
3. Perform classification and testing of compacted fill materials.	Periodic
4. Verify use of proper materials, densities and lift thicknesses during placement and compaction of compacted fill.	Continuous
5. Prior to placement of compacted fill, inspect subgrade and verify that site has been prepared properly.	Periodic

REQUIRED SPECIAL INSPECTIONS AND TESTS OF CONCRETE CONSTRUCTION			
TYPE	FREQUENCY	REFERENCED STANDARD	IBC REFERENCE
1. Inspect reinforcement, including prestressing tendons, and verify placement.	Periodic	ACI 318 Ch. 20, 25.2, 25.3, 26.6.1-26.6.3	1908.4
2. Reinforcing bar welding:			
a. Verify weldability of reinforcing bars other than ASTM A706	Periodic	AWS D1.4 ACI 318: 26.6.4	---
b. Inspect single-pass fillet welds, maximum 5/16"; and	Periodic		
c. Inspect all other welds.	Continuous		
3. Inspect anchors cast in concrete.	Periodic	ACI 318: 17.8.2	
4. Inspection of anchors post installed in hardened concrete members. <sup>5</sup>			
a. Adhesive anchors installed in horizontally or upwardly inclined orientations to resist sustained tension loads.	Continuous	ACI 318: 17.8.2.4	---
b. Mechanical anchors and adhesive anchors not defined in 4.a.	Periodic	ACI 318: 17.8.2	
5. Verify use of required design mix.	Periodic	ACI 318: Ch. 19, 26.4.3, 26.4.4	1904.1, 1904.2 1908.2, 1908.3
6. Prior to concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	Continuous	ASTM C172, ASTM C31, ACI 318: 26.5, 26.12	1908.10
7. Inspection of concrete and shotcrete placement for proper application techniques.	Continuous	ACI 318: 26.5	1908.6, 1908.7, 1908.8
8. Verify maintenance of specified curing temperature and techniques.	Periodic	ACI 318: 26.5.3-26.5.5	1908.9
9. Inspection of prestressed concrete for:			
a. Application of prestressing forces; and	Continuous	ACI 318: 26.10	---
b. Grouting of bonded prestressing tendons.	Continuous	ACI 318: 26.10	
10. Inspect erection of precast concrete members.	Periodic	ACI 318: Ch. 26.9	
11. Verify in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete and prior to removal of shores and forms from beams and structural slabs.	Periodic	ACI 318: 26.11.2	---
12. Inspect formwork for shape, location and dimensions of the concrete member being formed.	Periodic	ACI 318: 26.11.1.2(b)	---

(a) Where applicable, see Section 1705.12, Special Inspections for seismic resistance.  
(b) Specific requirements for special inspection shall be included in the research report for the anchor issued by an approved source in accordance with 17.8.2 in ACI 318, or other qualification procedures. Where specific requirements are not provided, special inspection requirements shall be specified by the registered design professional and shall be approved by the building official prior to the commencement of the work.

REQUIRED SPECIAL INSPECTIONS OF STEEL CONSTRUCTION OTHER THAN STRUCTURAL STEEL		
TYPE	FREQUENCY	REFERENCED STANDARD
1. Material verification of cold-formed steel deck:		
a. Identification markings to conform to ASTM standards specified in the approved construction documents.	Periodic	Applicable ASTM material standards
b. Manufacturer's certified test reports.	Periodic	
2. Inspection of welding:		
a. Cold-formed steel deck:		
1) Floor and roof deck welds.	Periodic	AWS D1.3

REQUIRED SPECIAL INSPECTIONS OF OPEN-WEB STEEL JOISTS AND JOIST GIRDERS		
TYPE	FREQUENCY	REFERENCED STANDARD
1. Installation of open-web steel joists and joist girders.		
a. End connections - welding or bolted.	Periodic	SJI specificaitons listed in Section 2207.1.
b. Bridging - horizontal or diagonal.		
1. Standard bridging	Periodic	SJI specificaitons listed in Section 2207.1.
2. Bridging that differs from the SJI specifications listed in Section 2207.1.	Periodic	



1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600  
  
ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT**

Professional Engineering Consultants, P.A.  
  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
  
Licensee's Certificate of Authority Number:  
  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063


Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision		
Number	Date	Description



3/23/2020 3:14:19 PM

BM 360//190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-STRUCT-R19.rvt

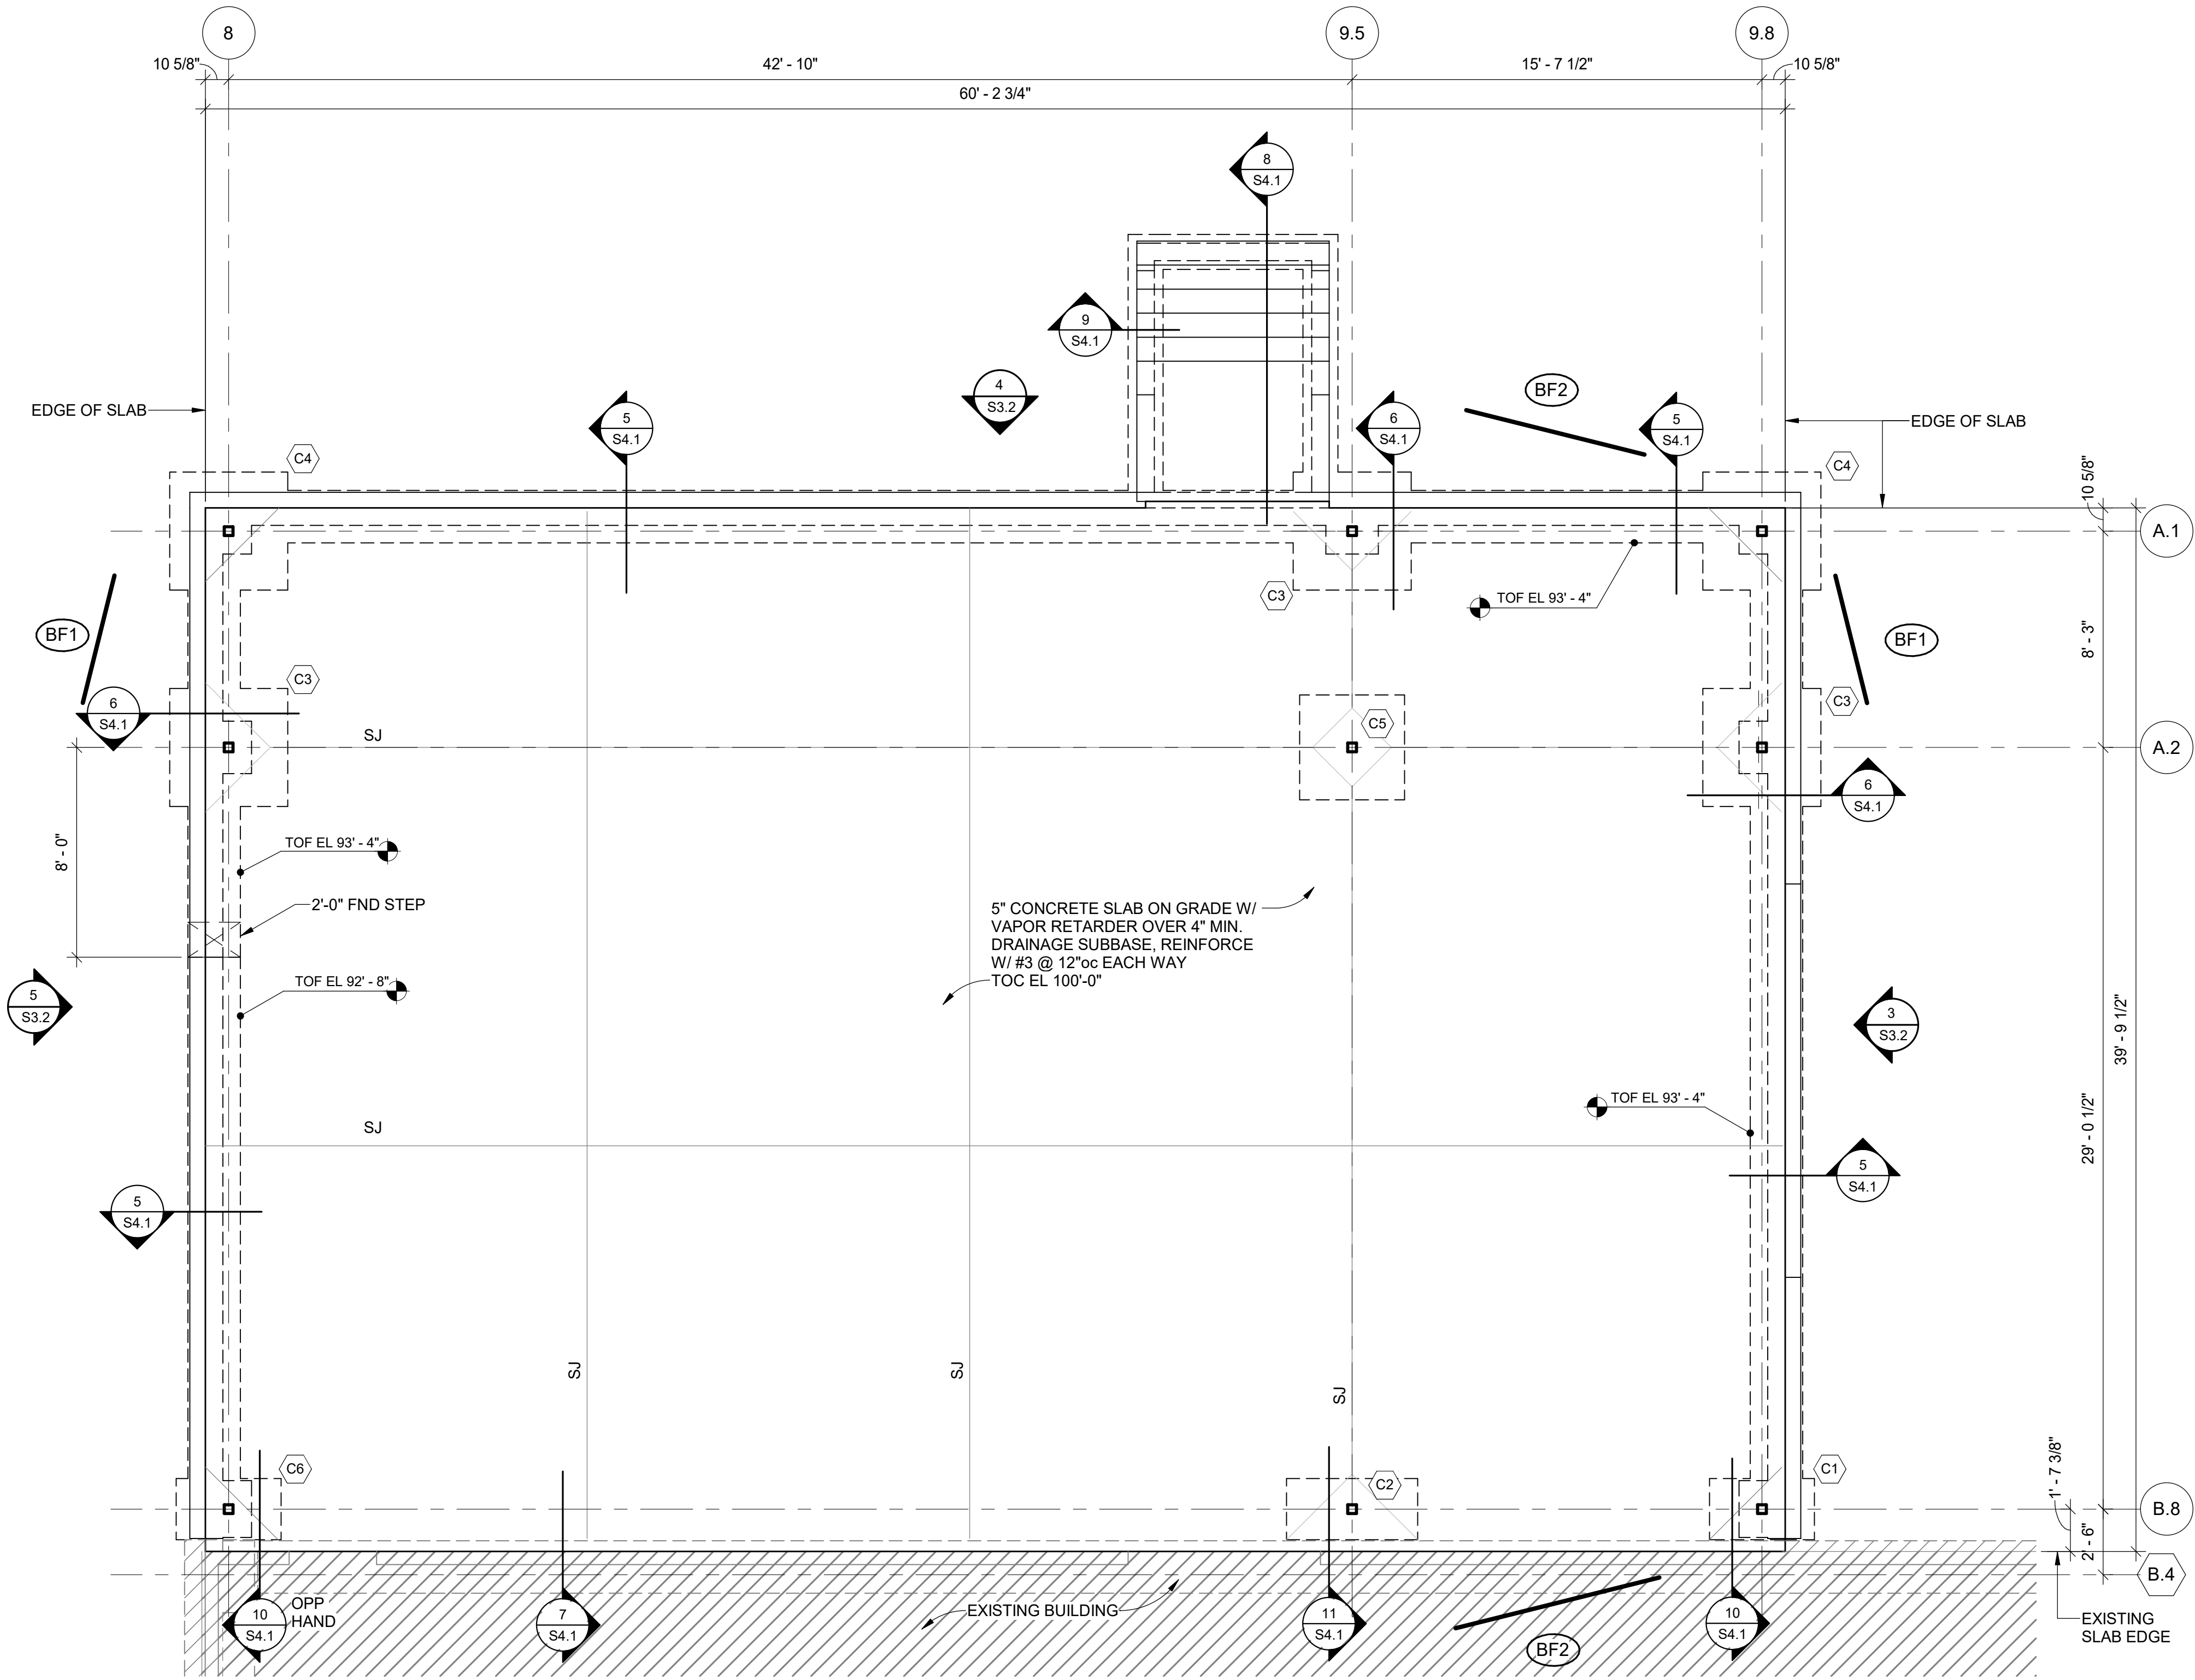

1 FOUNDATION PLAN  
1/4" = 1'-0"




FOUNDATON PLAN NOTES:

1. REFERENCE SCHEDULE FOR TOP OF GRADE BEAM ELEVATIONS.
2. SEE SHEET S0.1 FOR GENERAL STRUCTURAL NOTES AND SHEET S0.2 FOR SPECIAL INSPECTION REQUIREMENTS.
3. CENTER ALL FOOTINGS BELOW GRID LINE INTERSECTIONS UNLESS SHOWN OR NOTED OTHERWISE.
4. SEE SHEET S4.1 FOR TYPICAL FOUNDATION DETAILS.
5. PROVIDE 1/2" EXPANSION JOINT MATERIAL BETWEEN EXTERIOR CONCRETE AND THE BUILDING, TYPICAL.
6. REFERENCE MECHANICAL DRAWINGS FOR MISCELLANEOUS FLOOR DRAINS AND OTHER SLAB PENETRATIONS.
7. REFERENCE ARCHITECTURAL DRAWINGS FOR NON-LOAD BEARING WALLS.
8. COORDINATE MEDICAL EQUIPMENT ANCHORAGE WITH EQUIPMENT SUPPLIERS.

FOUNDATION PLAN MARKS:

- C# COLUMN MARK, REFERENCE COLUMN SCHEDULE, SHEET S3.1
- F# FOOTING MARK, REFERENCE FOOTING SCHEDULE, SHEET S3.1
- BRACE FRAME, REFERENCE BRACING SCHEDULE, SHEET S3.2
- S.J. SLAB CONSTRUCTION JOINT, REFERENCE 1/S4.1

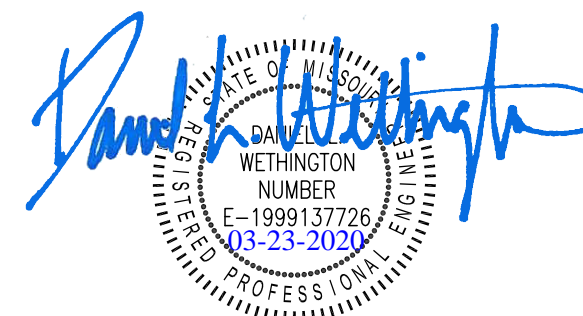

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision  
Number Date Description

**S1.1**





© 2019 ACI/BOLAND, Inc.

FOUNDATION PLAN



4/6/2020 8:34:22 AM

\\BIM\360\190711-000 - Lee's Summit Med Ctr Hybrid OR Addn\190711-000-STRUCT-R19.rvt

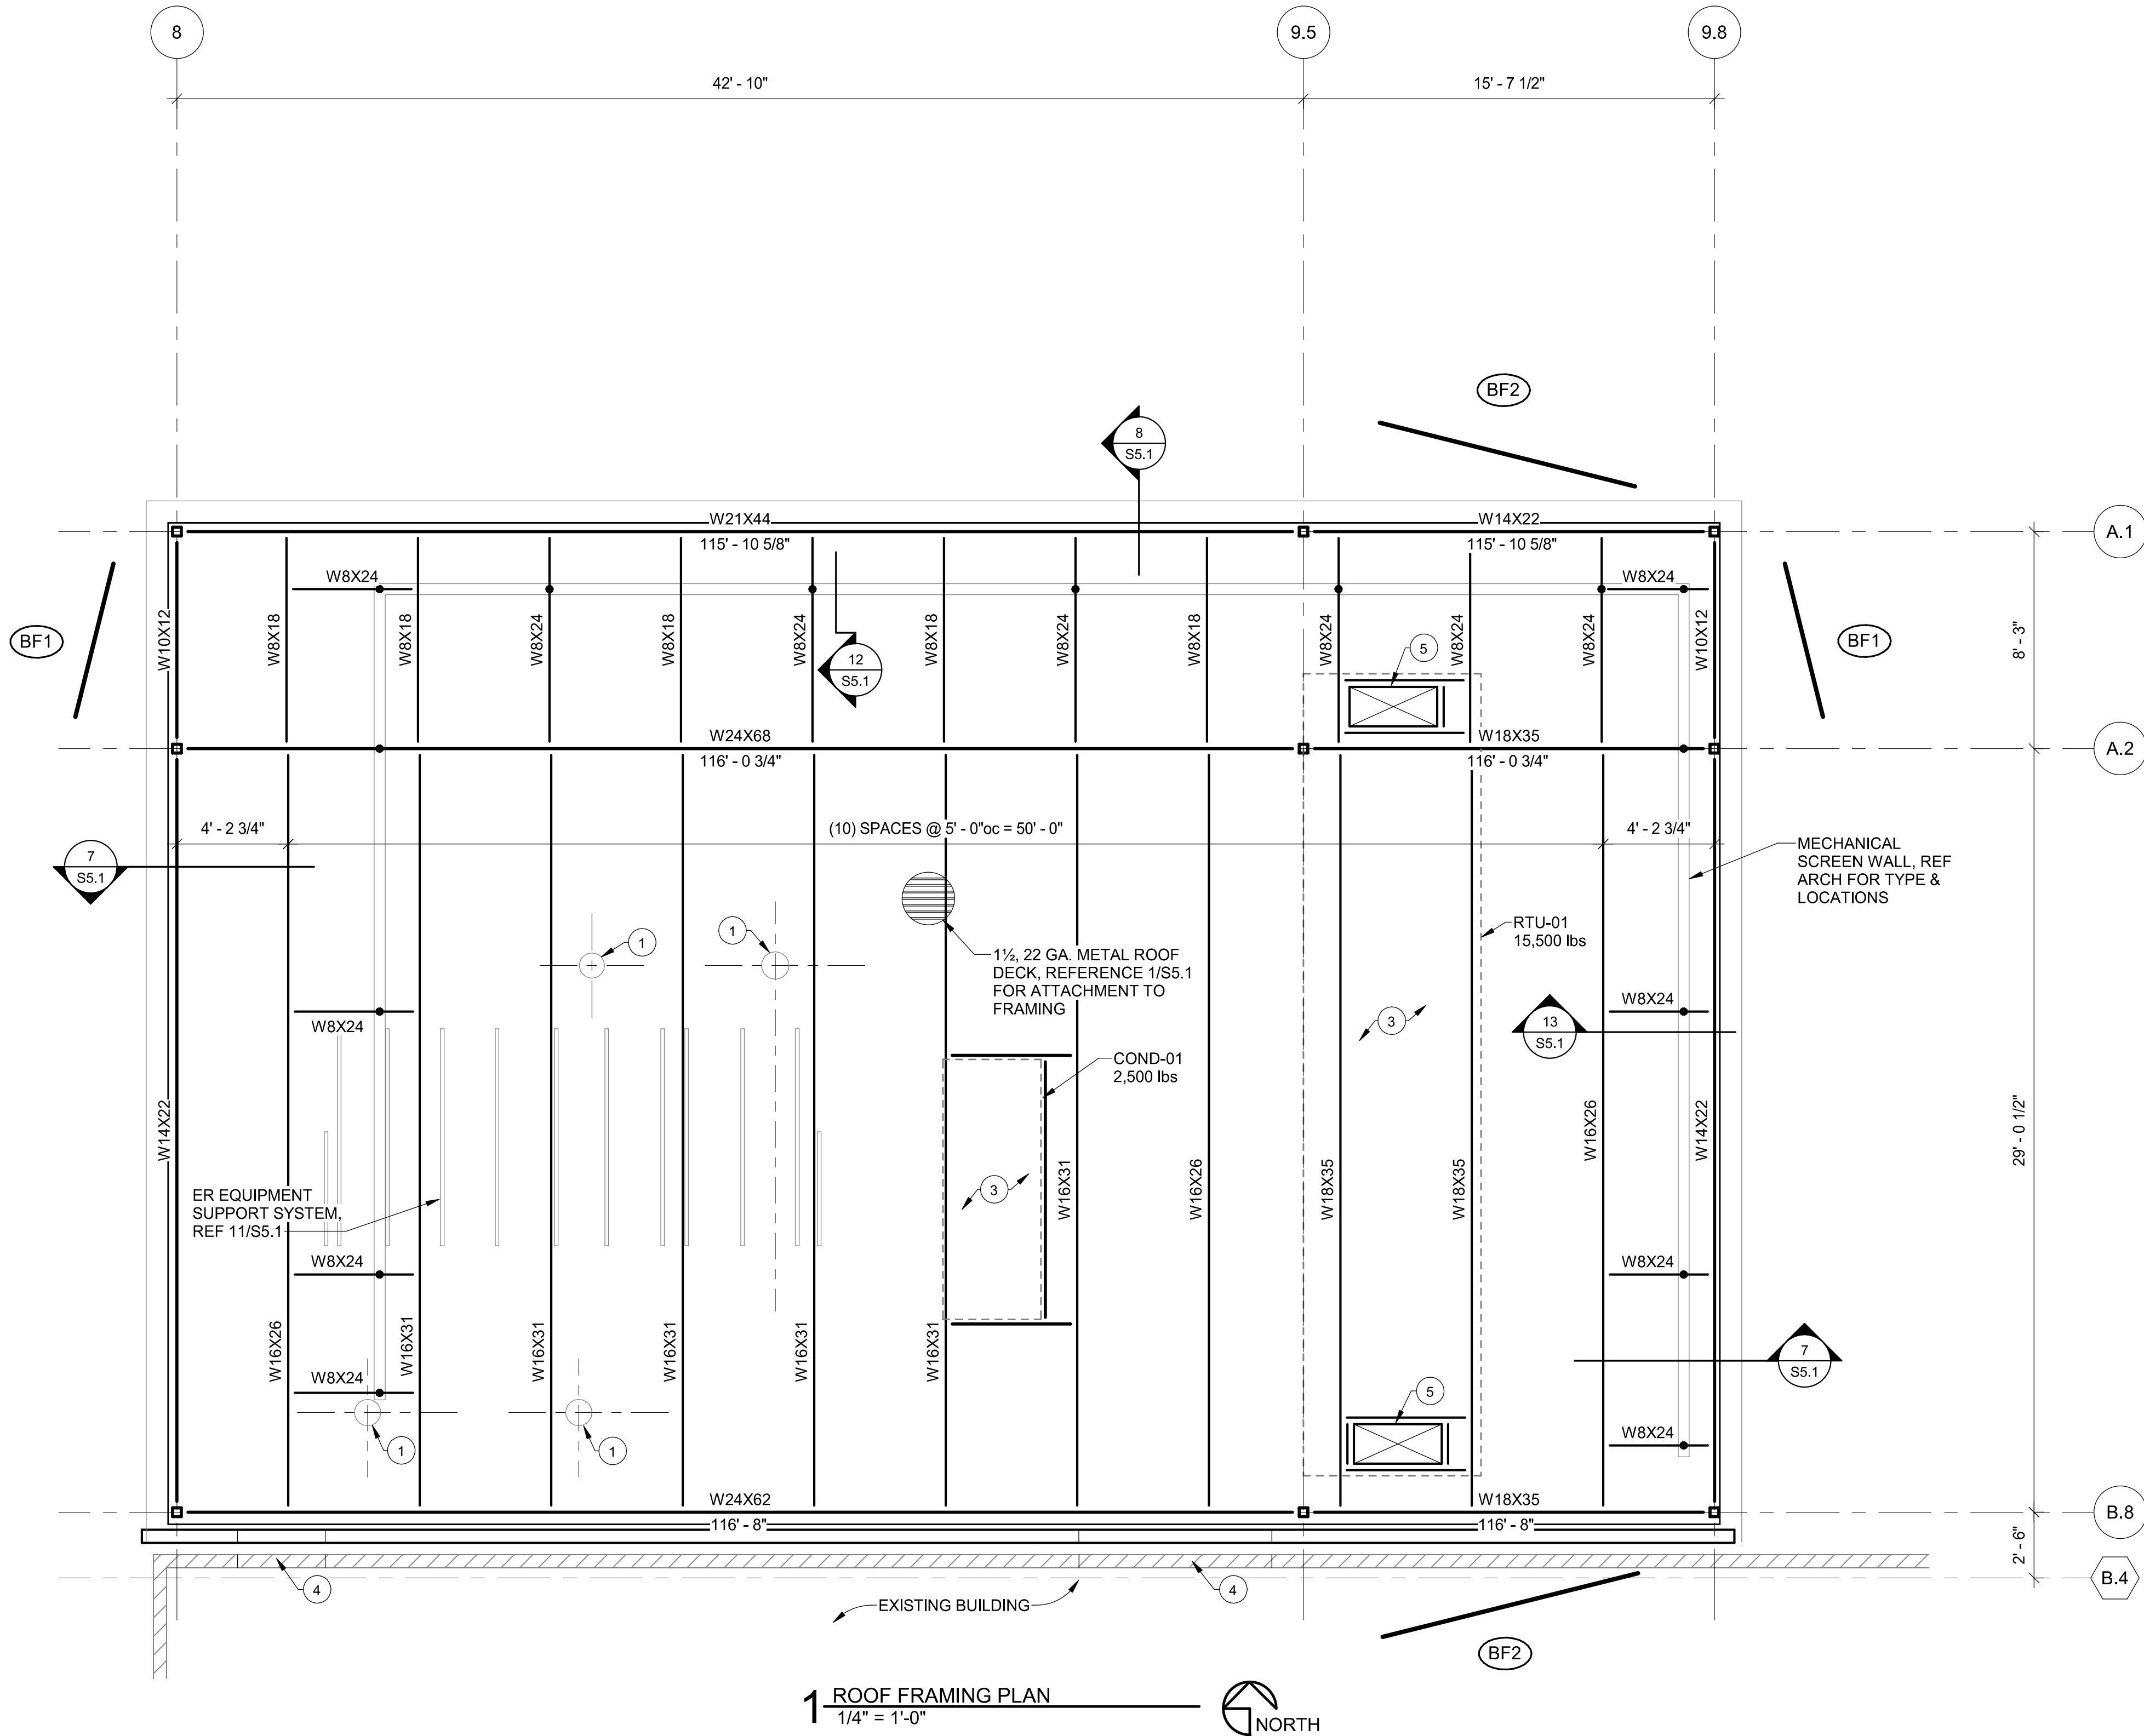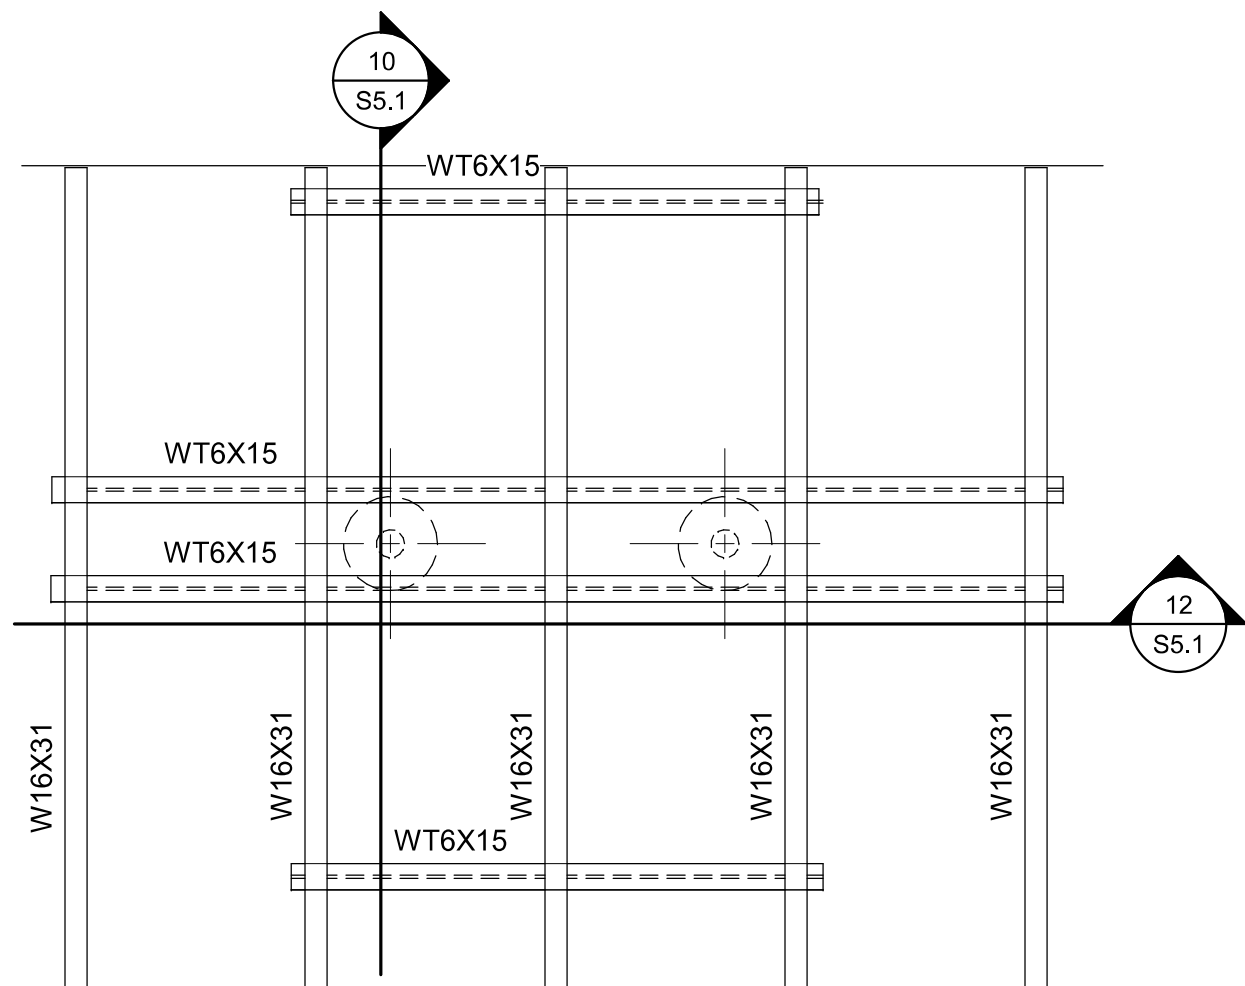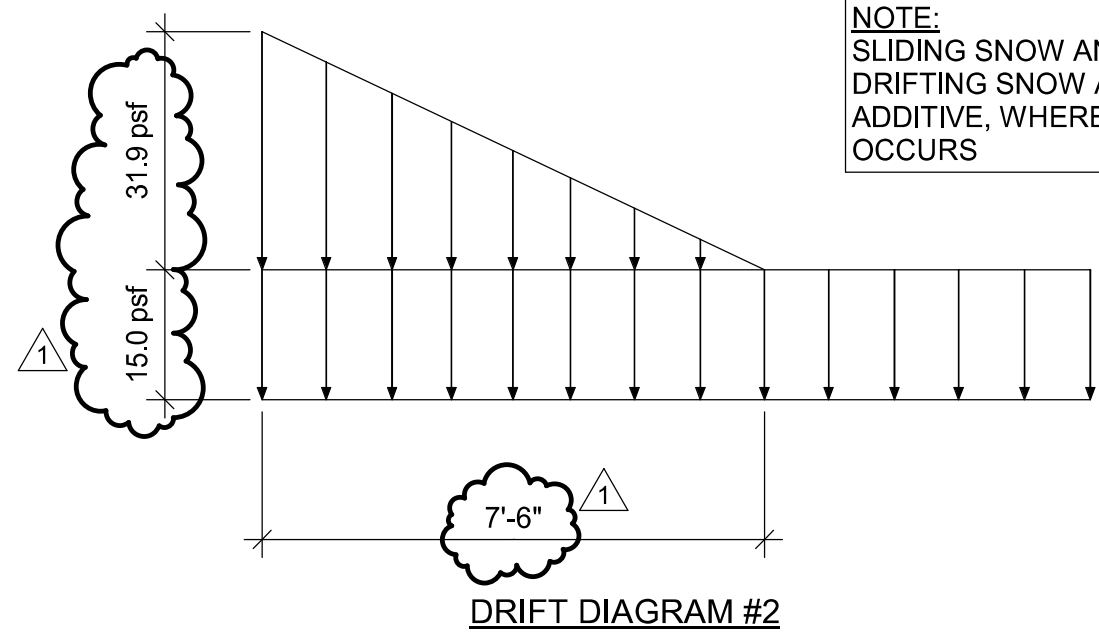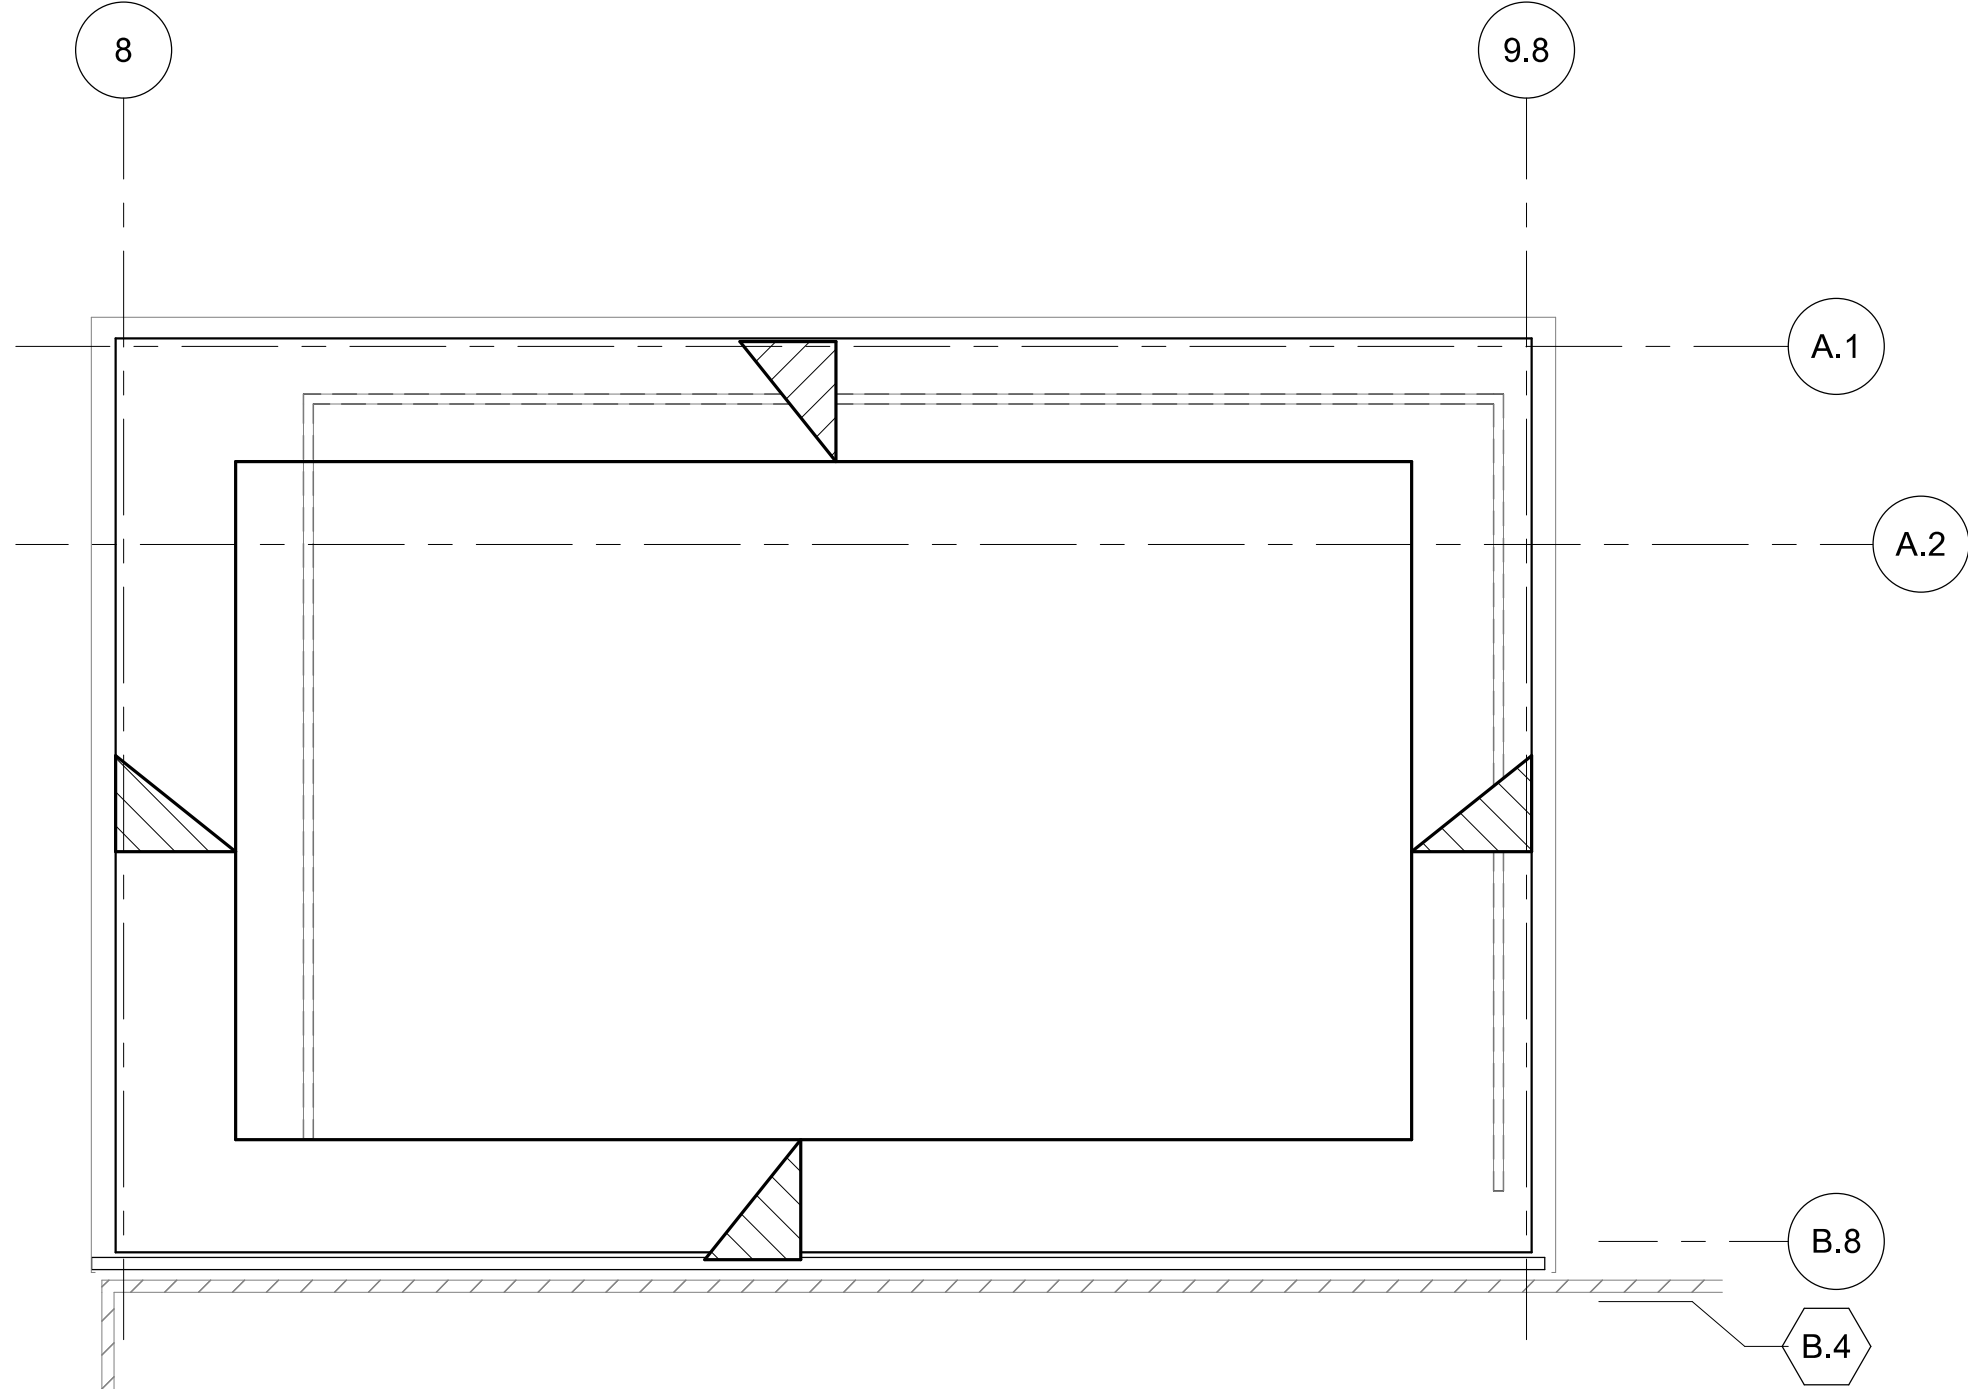

ROOF FRAMING PLAN NOTES:

- SEE SHEETS S0.1 FOR GENERAL STRUCTURAL NOTES AND SHEET S0.2 FOR SPECIAL INSPECTION REQUIREMENTS.
- SEE SHEET S5.1 FOR TYPICAL FRAMING DETAILS.
- SEE SHEET S5.1 FOR TYPICAL OPENINGS IN THE ROOF. REFERENCE MECHANICAL, ELECTRICAL AND ARCHITECTURAL DRAWINGS FOR SIZE AND LOCATION OF OPENINGS NOT NOTED ON FRAMING PLANS. ROOF DRAINS SHALL BE CONSIDERED A ROOF OPENING.
- VERIFY THE SIZE AND LOCATIONS OF ALL SUSPENDED MECHANICAL UNITS, ELECTRICAL UNITS, ROOF TOP UNITS AND ROOF OPENINGS WITH THE MECHANICAL AND ELECTRICAL DRAWINGS AND THE CONTRACTORS. DESIGN ROOF JOISTS FOR THE ADDITION LOADS FROM THE UNITS.
- SUPPORT FOR O.R. EQUIPMENT SHALL BE A DELEGATED DESIGN BY THE GENERAL CONTRACTOR SUBJECT TO THE SUBMITTAL REQUIREMENTS LISTED IN THE STRUCTURAL GENERAL NOTES.

ROOF FRAMING PLAN MARKS:

- BRACE FRAME, REFERENCE BRACING SCHEDULE, SHEET S3.2
- EQUIPMENT BOOM SUPPORT FRAME. REFERENCE PLAN DETAIL 2/S2.1, VERIFY LOCATIONS/TYPE WITH ARCHITECT.
- C8x11.5 FOR MECHANICAL EQUIPMENT SUPPORT
- PROVIDE 4" (TOTAL THICKNESS) CONCRETE SLAB WITHIN RTU CURB, REINFORCE WITH 6x6-W2.9xW2.9 WWF
- PROVIDE LIGHT GAGE LINTEL AND JAMB FOR NEW OPENING IN EXISTING WALL:  
LINTEL: (2) 600S162-54 METAL CHANNELS WITH 600T125-54 TRACKS TOP & BOTTOM  
JAMB: (1) KING STUD & (2) BEARING STUDS



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date 04/03/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision  
Number Date Description  
1 4/6/2020 City Comments


**S2.1**

© 2019 ACI/BOLAND, Inc.

ROOF FRAMING PLAN








COLUMN SCHEDULE						
MARK Ⓢ	C1	C2	C3	C4	C5	C6
ROOF EL. VARIES						
FINISH FLOOR EL. 100'-0"						
BASE PLATE	2/S3.1	2/S3.1	2/S3.1	2/S3.1	2/S3.1	2/S3.1
PLATE DIMENSIONS LxWxD	10"x10"x3/4"	10"x10"x3/4"	10"x10"x3/4"	10"x10"x3/4"	10"x10"x3/4"	10"x10"x3/4"
ANCHOR BOLTS DETAIL	(4) 3/4" DIA. 1/S3.1	(4) 3/4" DIA. 1/S3.1	(4) 3/4" DIA. 1/S3.1	(4) 3/4" DIA. 1/S3.1	(4) 3/4" DIA. 1/S3.1	(4) 3/4" DIA. 1/S3.1
PILASTER SIZE VERTICAL REINFORCING	2'-2"x1'-9" (8) #8	N/A	2'-0"x1'-9" (8) #8	1'-9"x1'-9" (8) #8	N/A	2'-2"x1'-9" (8) #8
TIES	#3 @ 12"		#3 @ 12"	#3 @ 12"		#3 @ 12"
TOP ELEVATION	99'-4"		99'-4"	99'-4"		99'-4"
DETAIL	3/S3.1		4/S3.1	5/S3.1		3/S3.1
FOOTING SIZE	2'-4"x4'-0"x1'-0"	2'-4"x5'-0"x1'-6"	4'-6" SQ x1'-0"	4'-6" SQ x1'-0"	4'-6" SQ x1'-6"	2'-4"x4'-0"x1'-0"
REINFORCING	#4 @ 6" O.C. EACH WAY	#4 @ 6" O.C. EACH WAY	#4 @ 6" O.C. EACH WAY	#4 @ 6" O.C. EACH WAY	#4 @ 6" O.C. EACH WAY	#4 @ 6" O.C. EACH WAY
TOP ELEVATION	93'-4"	99'-4"	93'-4"	93'-4"	99'-4"	92'-8"

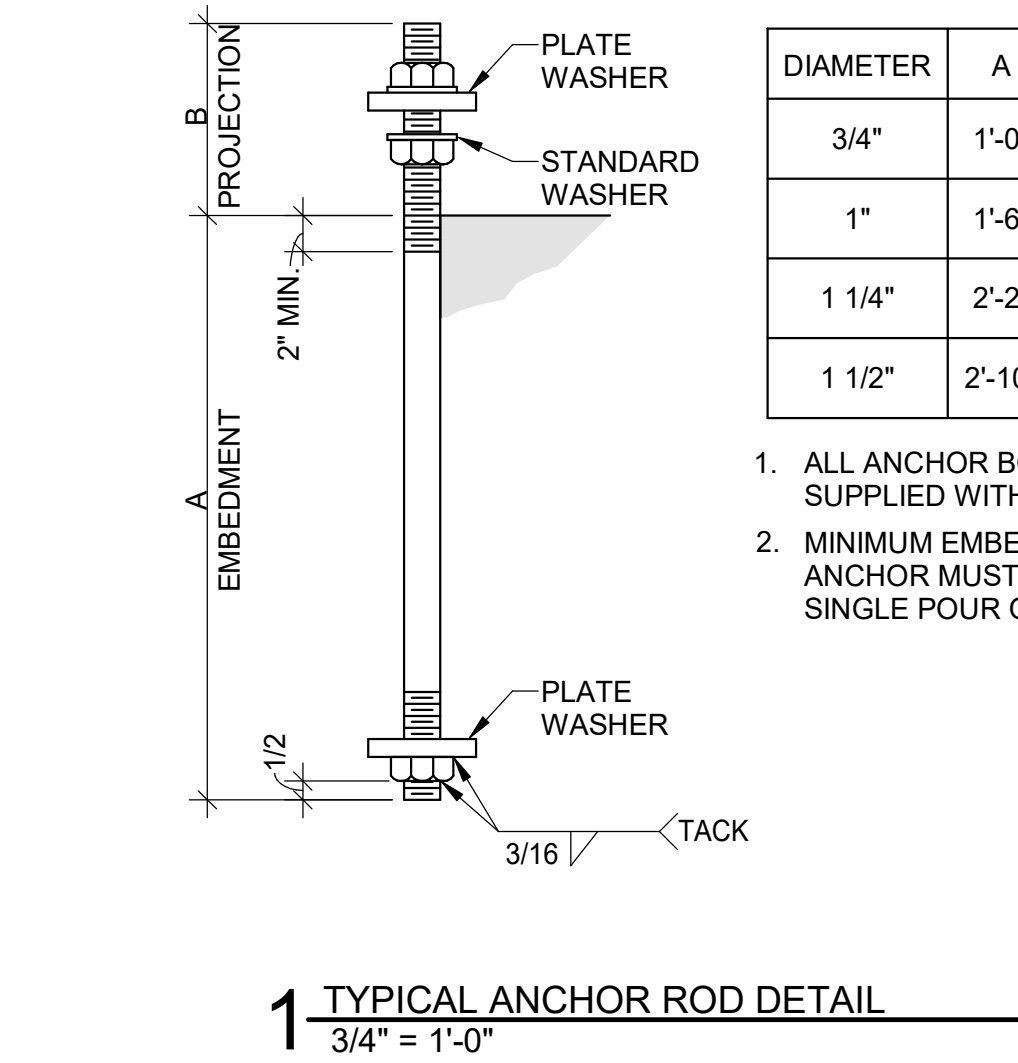

DIAMETER	A	B	PLATE SIZE
3/4"	1'-0"	6"	1/4"x2'0"
1"	1'-6"	6"	3/8"x2 1/2'0"
1 1/4"	2'-2"	8"	1/2"x3'0"
1 1/2"	2'-10"	8"	1/2"x3'0"

- ALL ANCHOR BOLTS ARE TO BE SUPPLIED WITH 3 NUTS.
- MINIMUM EMBEDMENT LENGTH OF ANCHOR MUST BE PLACED INTO A SINGLE POUR OF CONCRETE

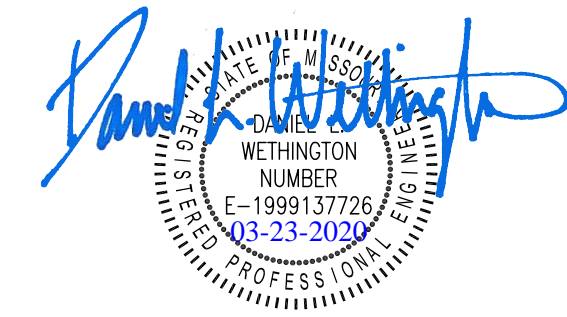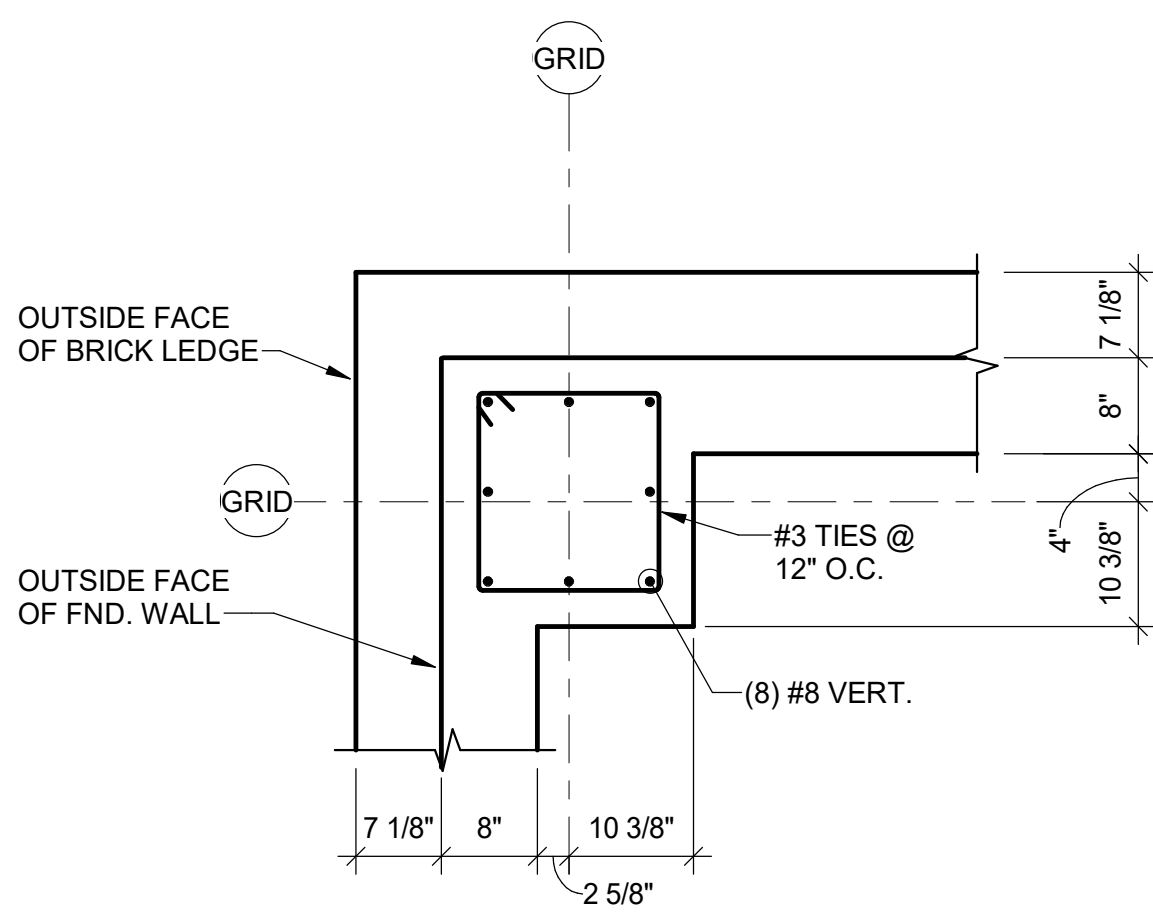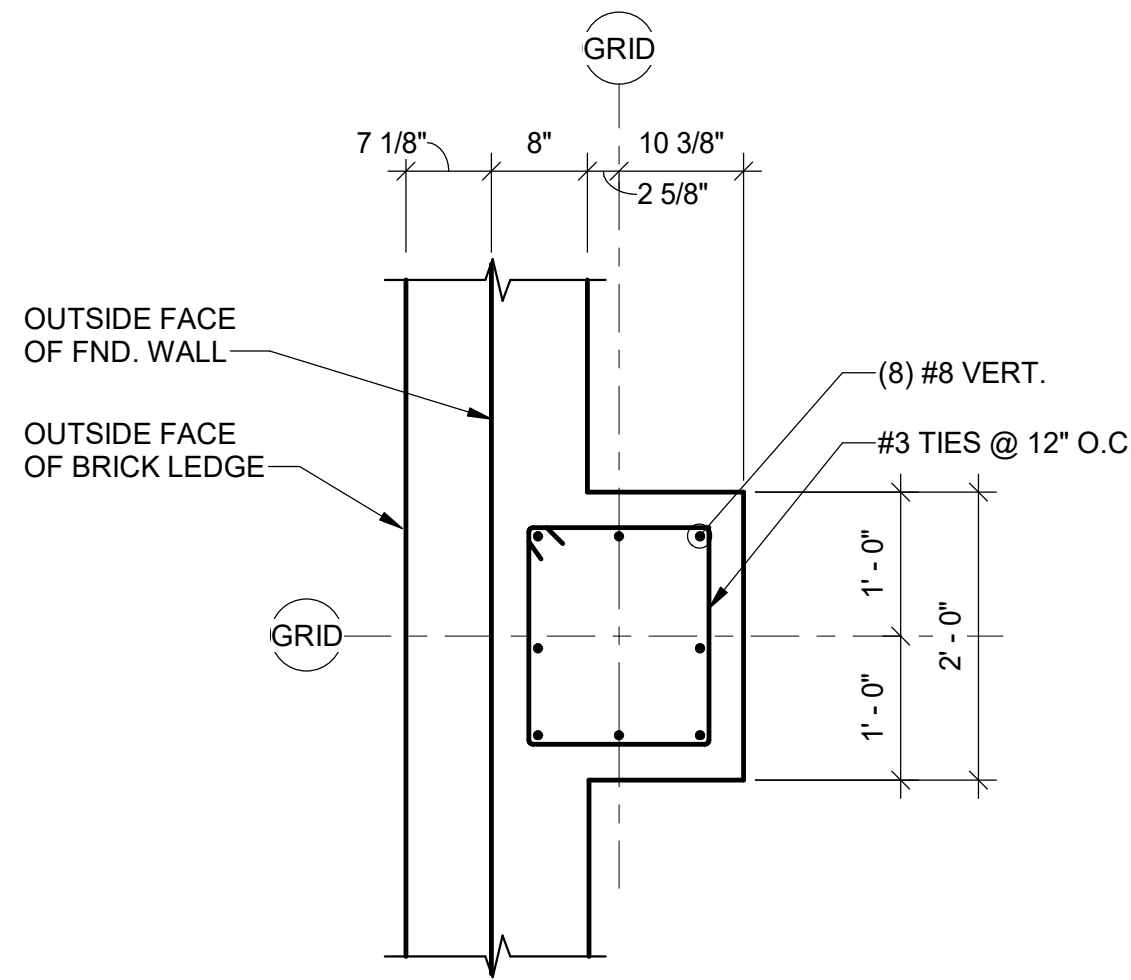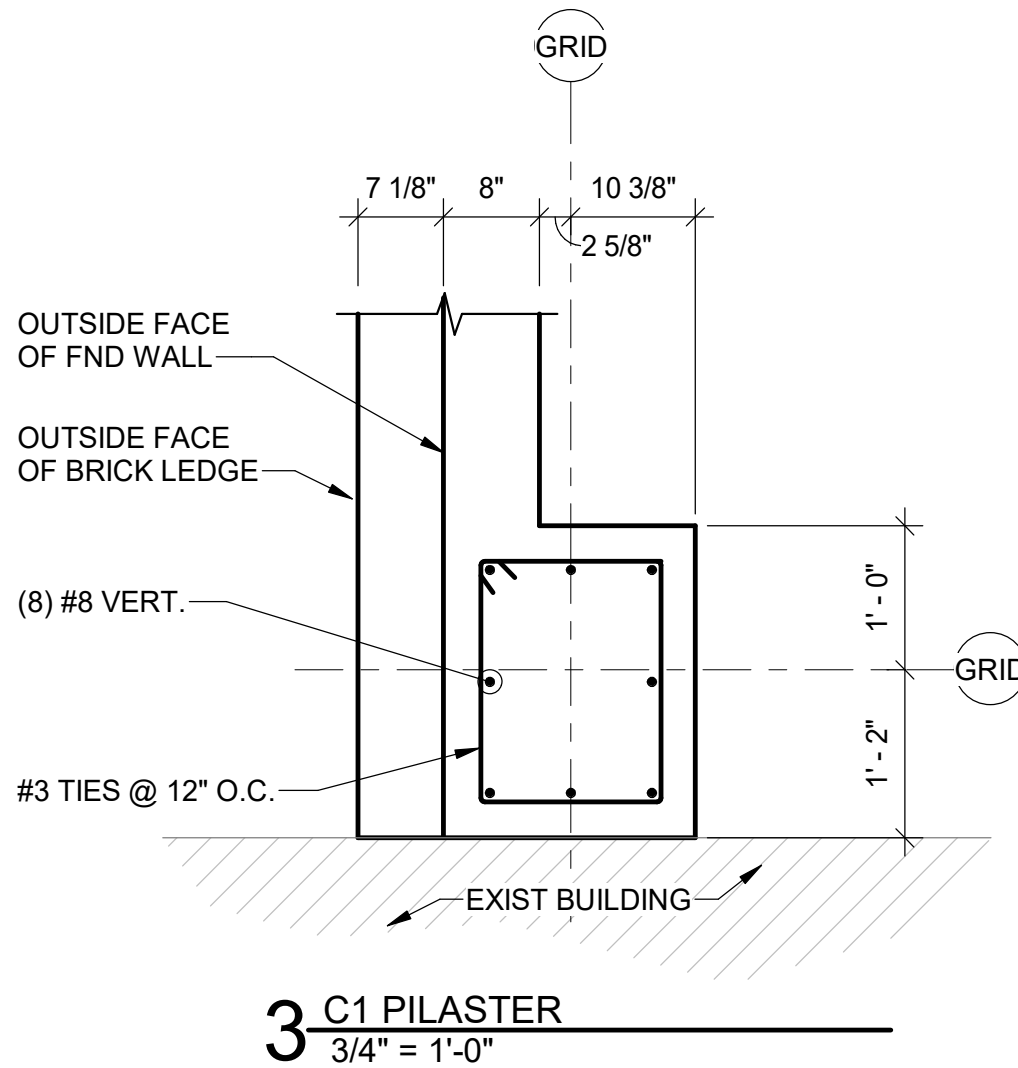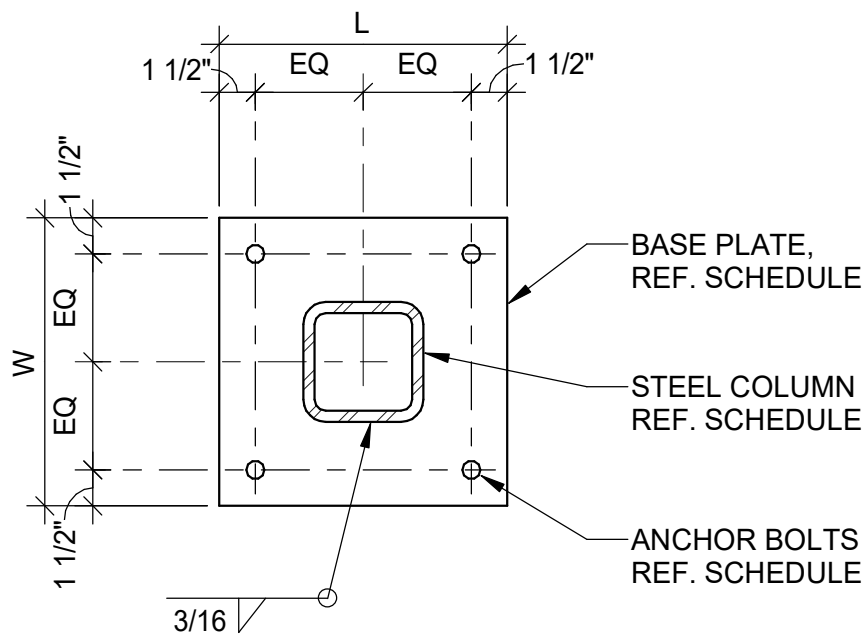

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision  
Number Date Description



6


5

4


3

2


1

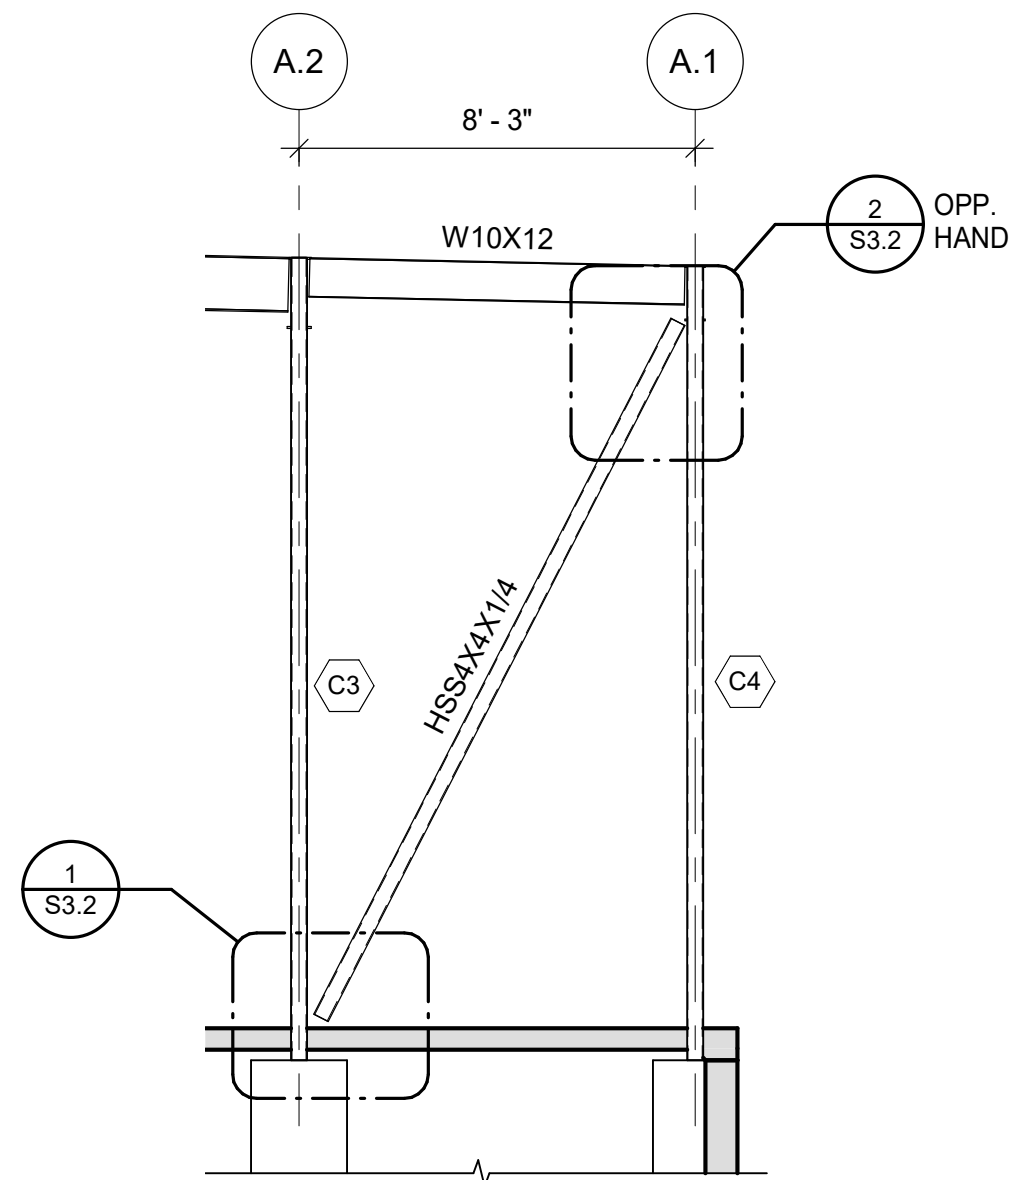


BF1

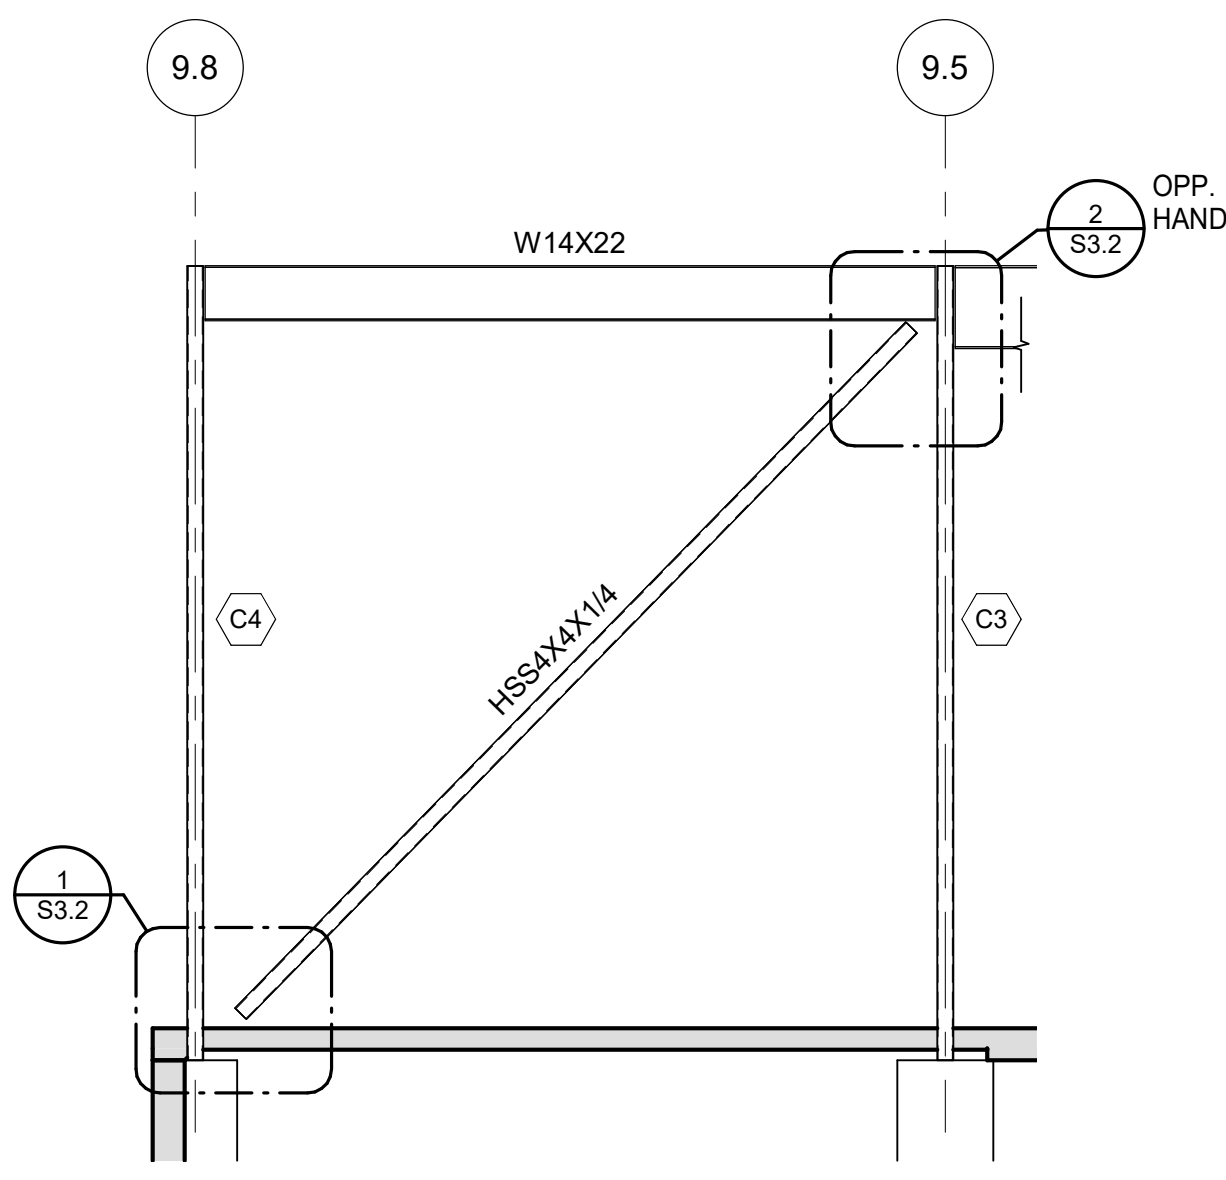

BF2

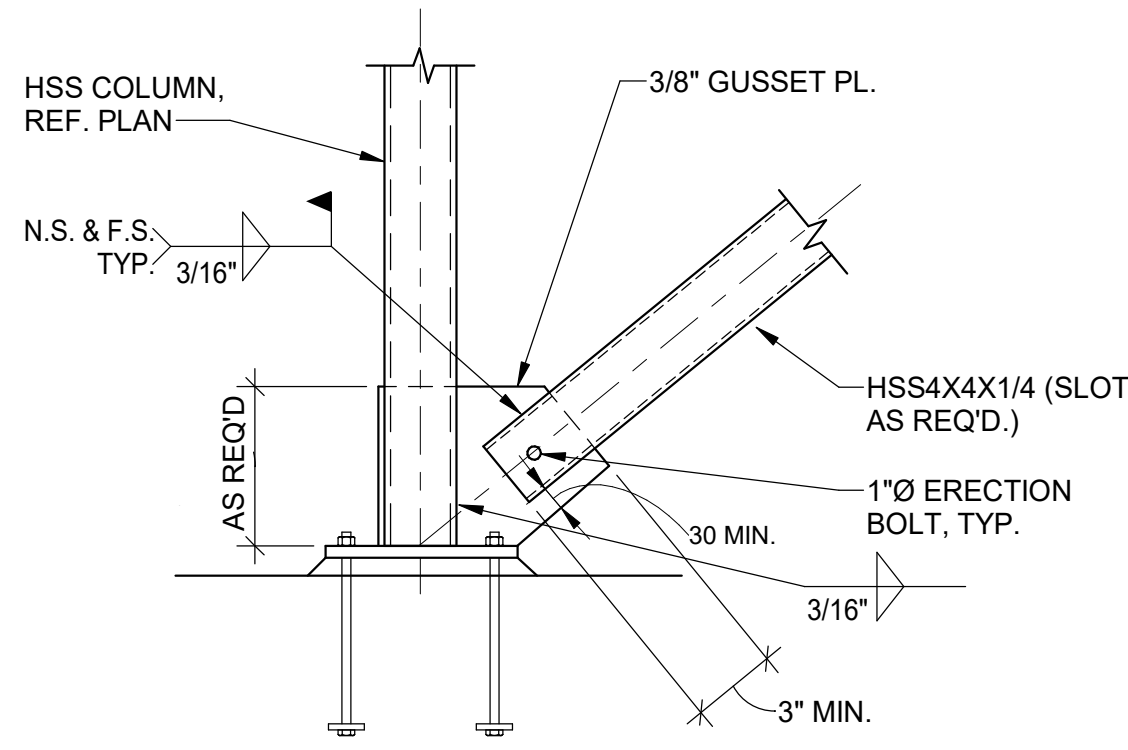


1 BRACE FRAME CONNECTION DETAIL  
NO SCALE

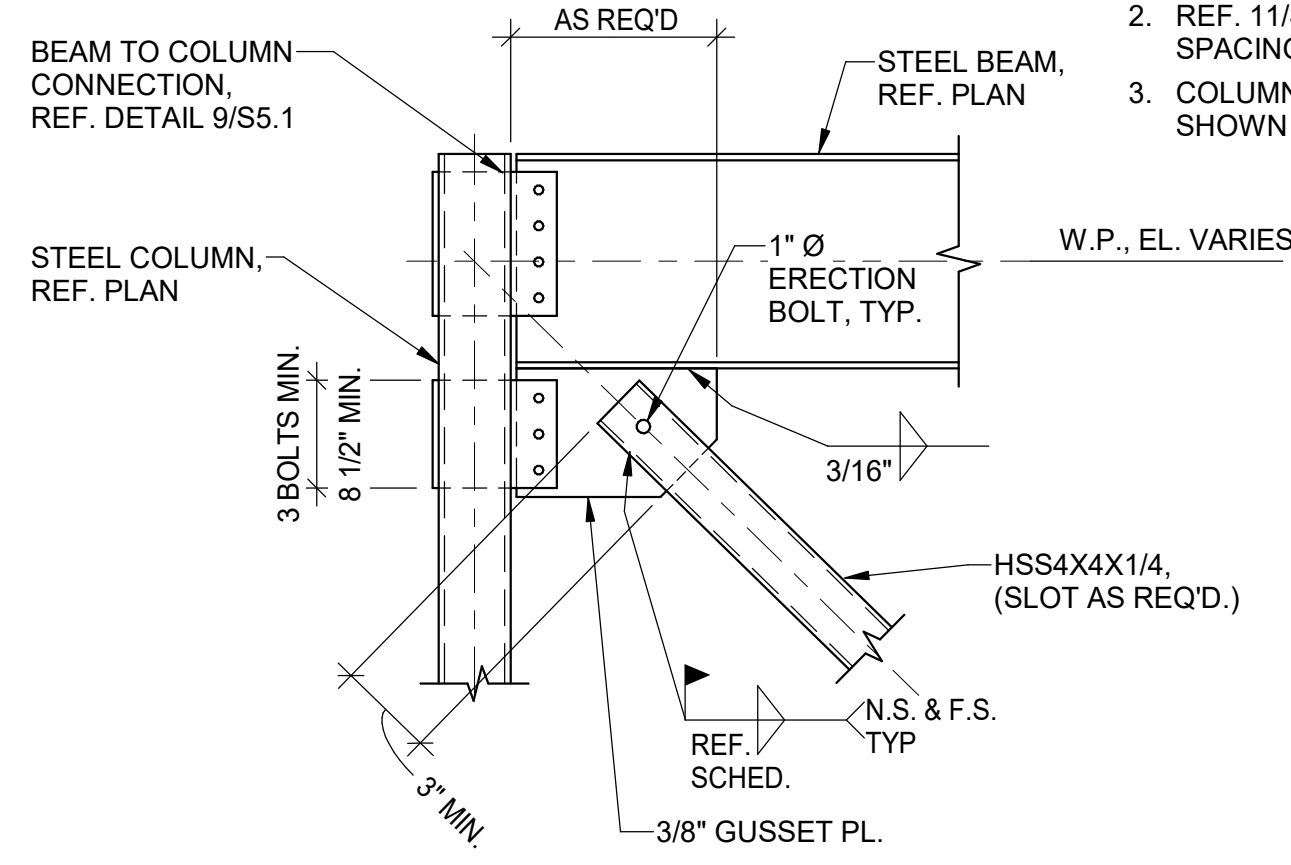


2 BRACE FRAME CONNECTION DETAIL  
NO SCALE


- NOTES:
1. PROVIDE CLASS A FAYING SURFACE AT BOLTED CONNECTIONS
  2. REF. 11/SS.1 FOR BOLT SPACING REQUIREMENTS
  3. COLUMN MAY VARY FROM SHOWN

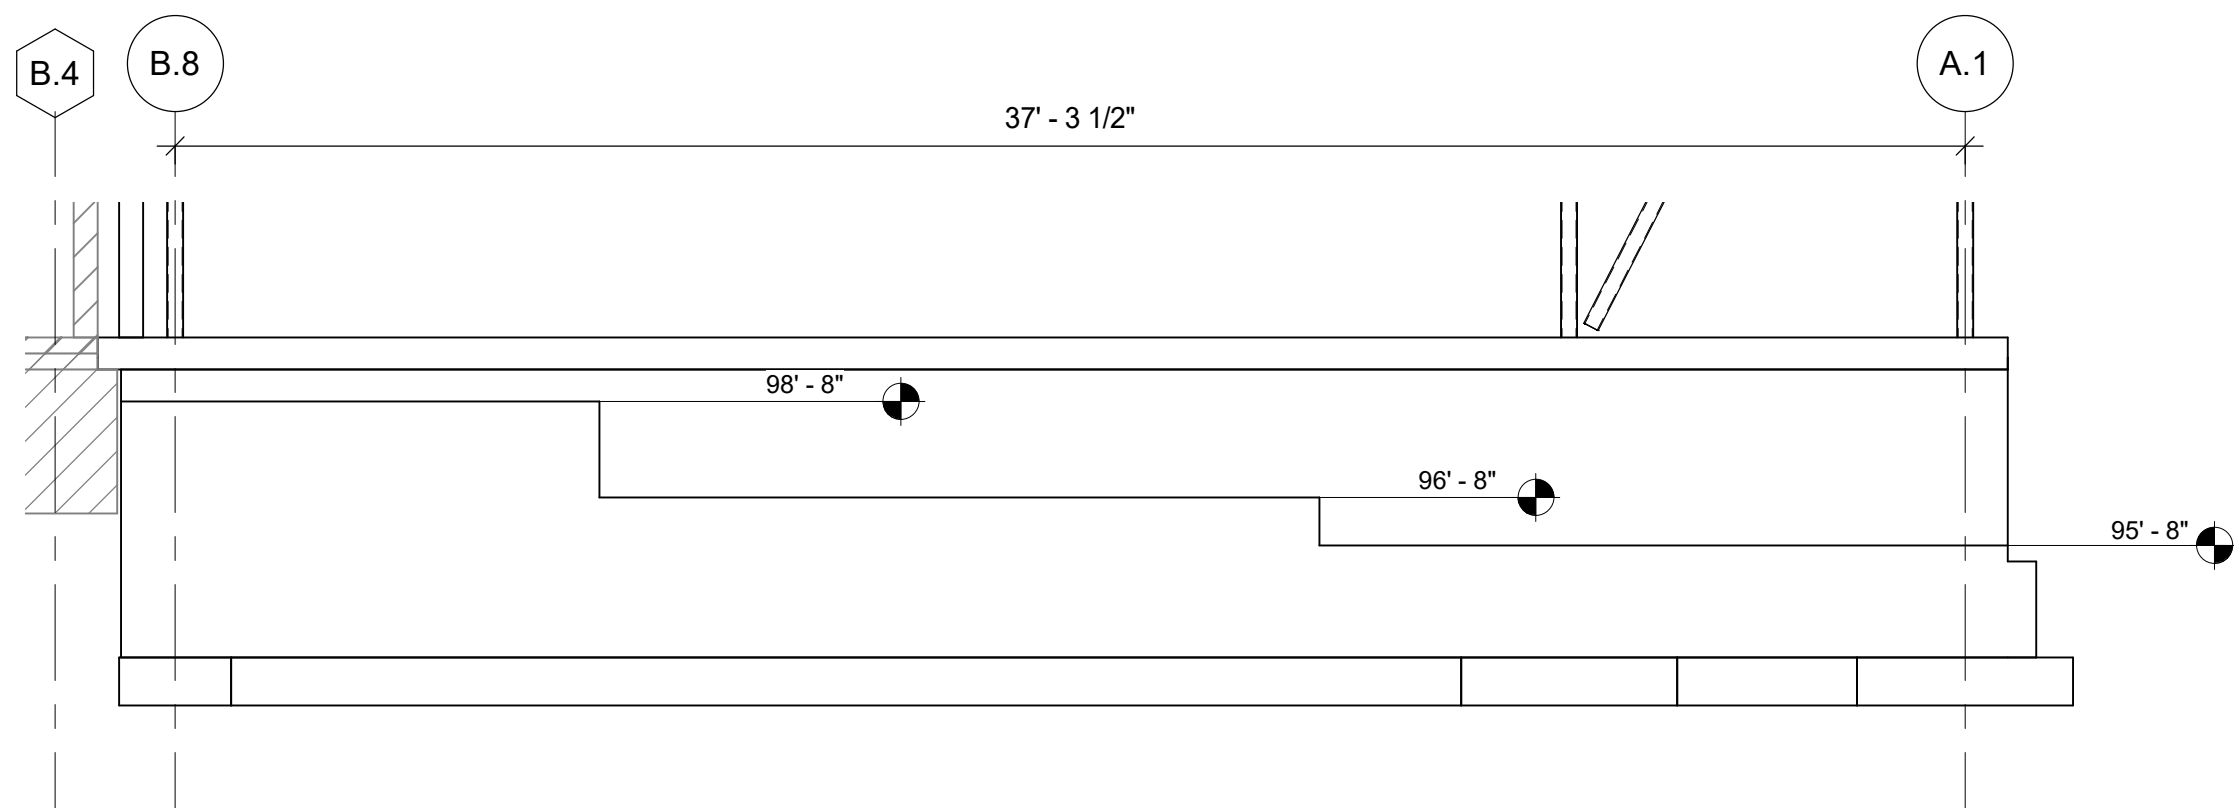


3 BRICK SHELF ELEVATION EAST  
1/4" = 1'-0"

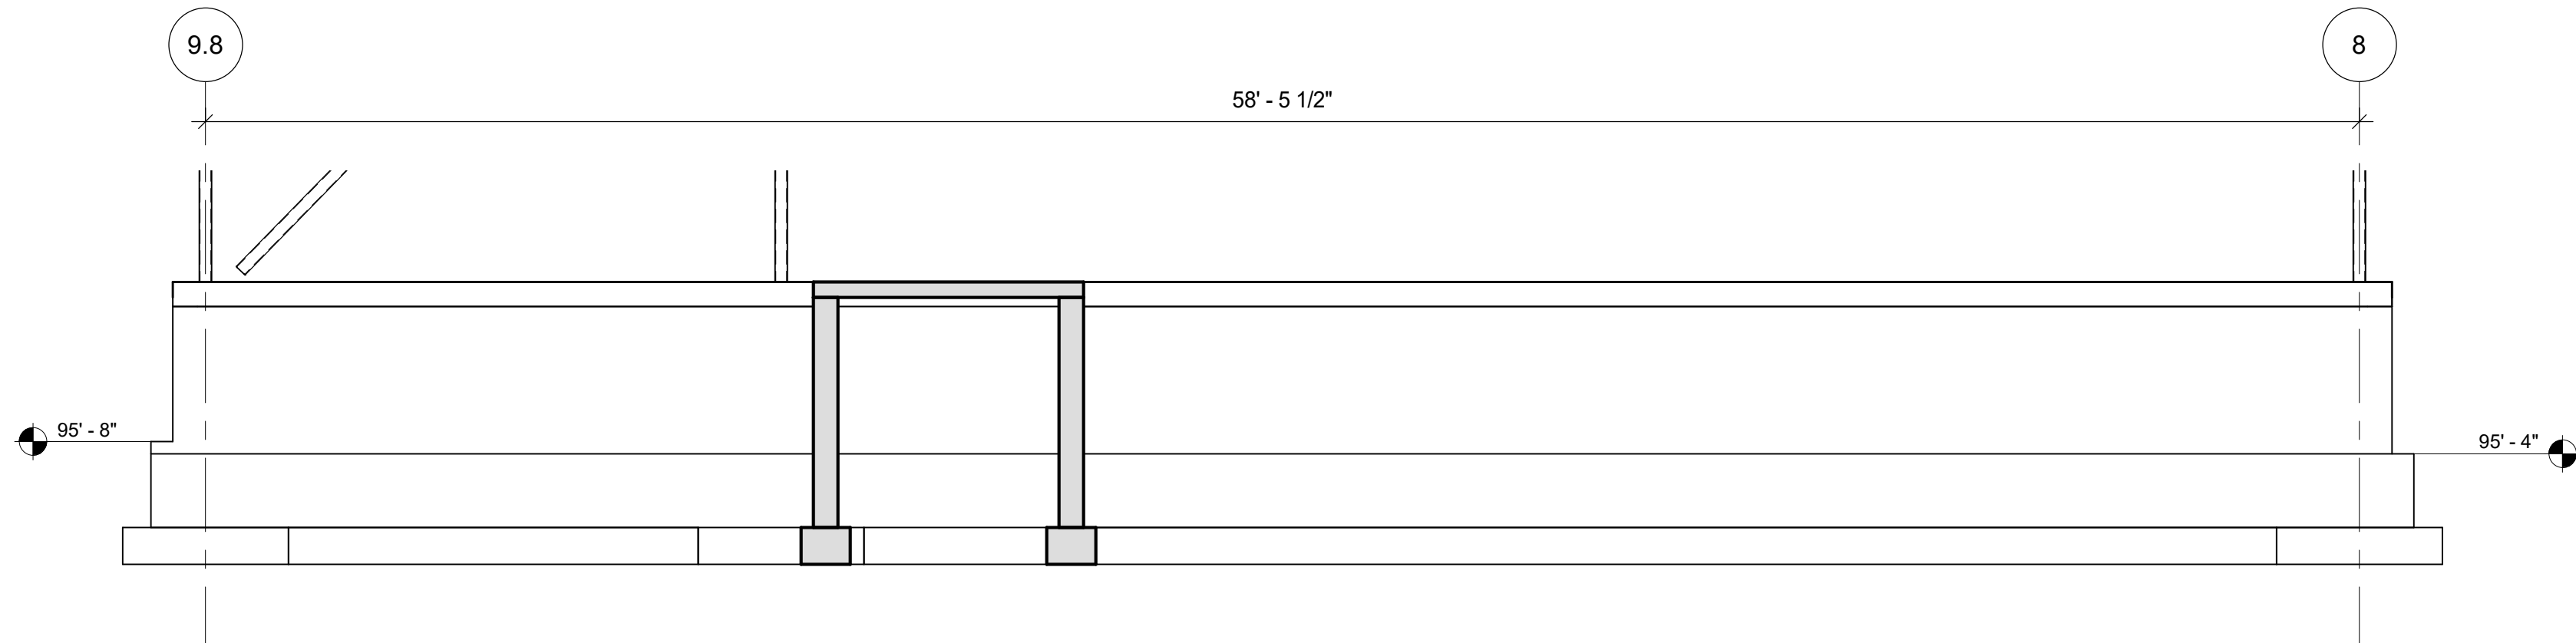

4 BRICK SHELF ELEVATION NORTH  
1/4" = 1'-0"

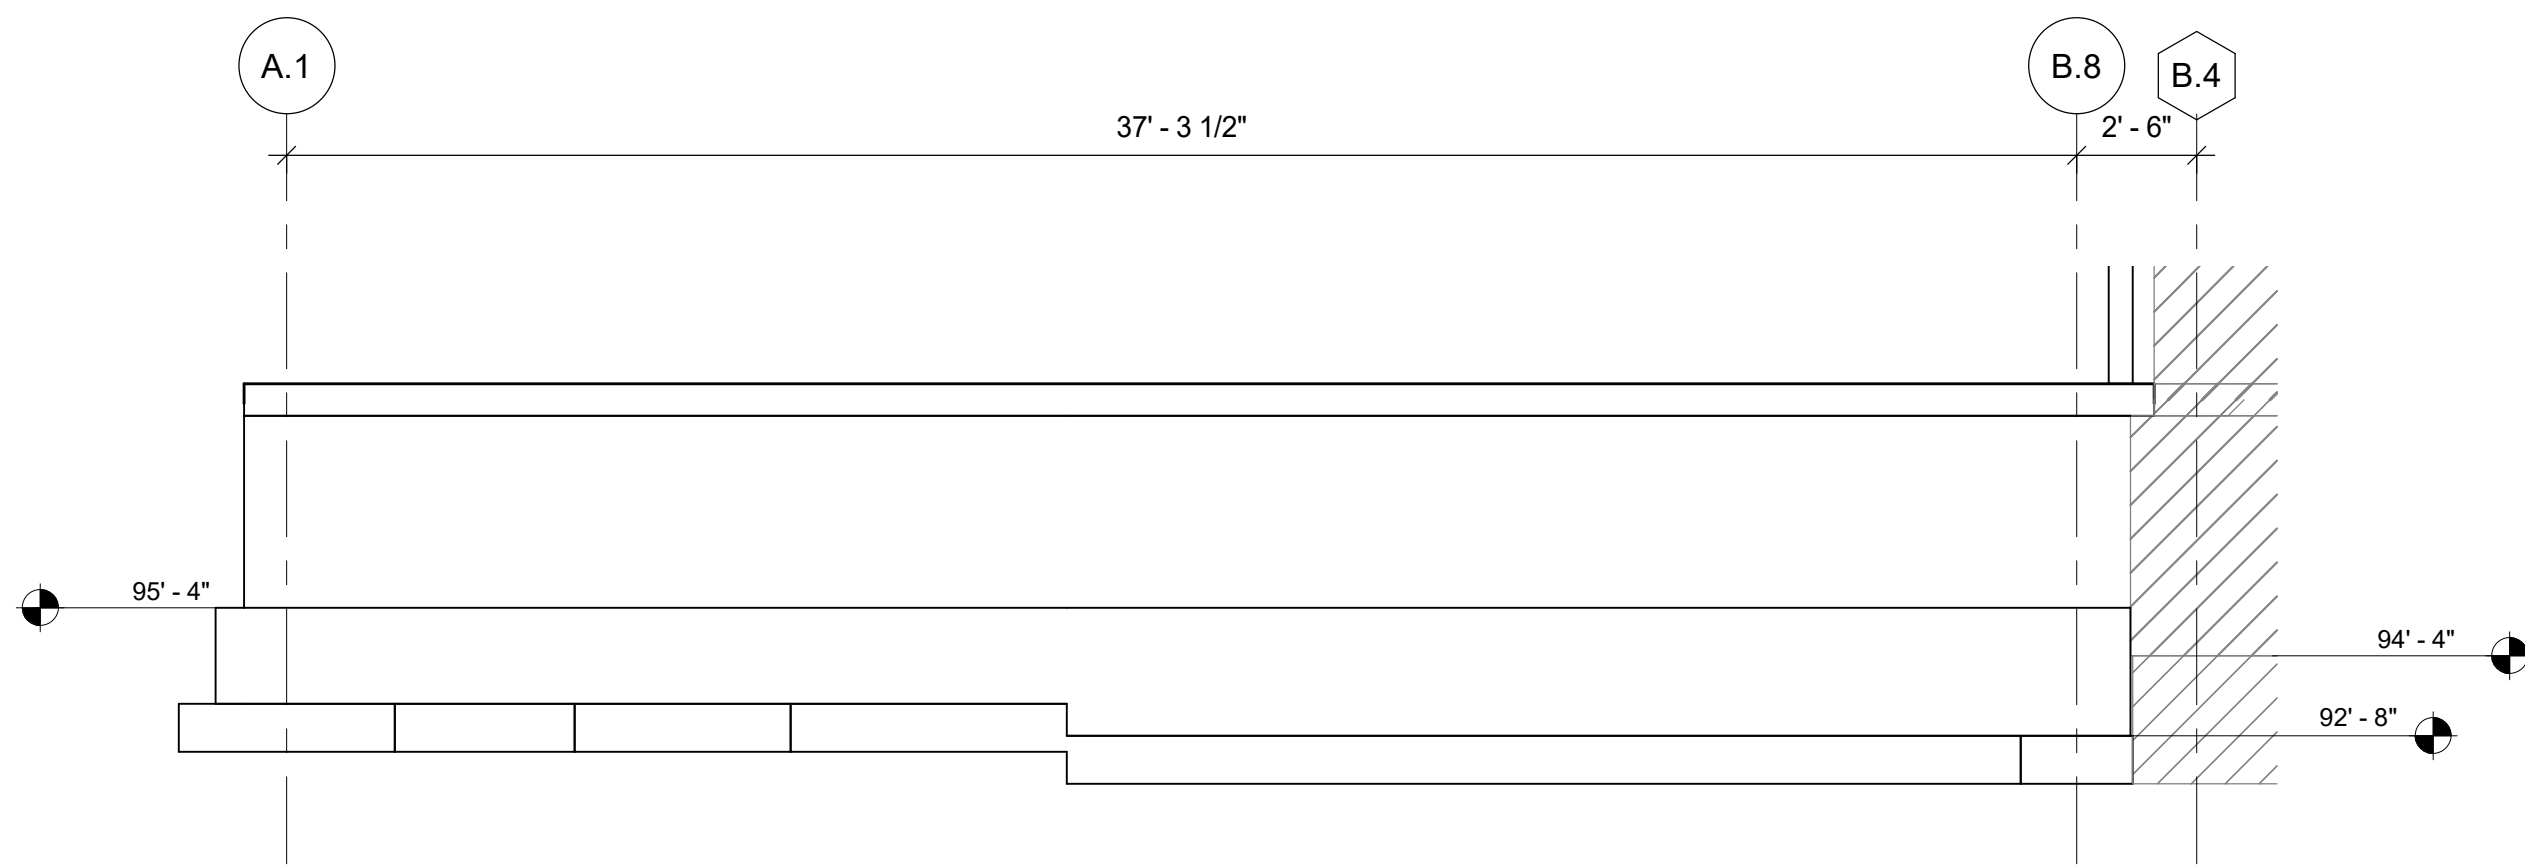

5 BRICK SHELF ELEVATION WEST  
1/4" = 1'-0"

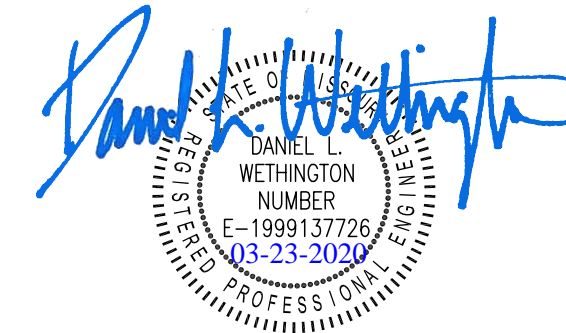

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW


Revision  
Number Date Description

S3.2


© 2019 ACI/BOLAND, Inc.  
BRACE FRAME SCHEDULE & DETAILS




3/23/2020 3:14:27 PM

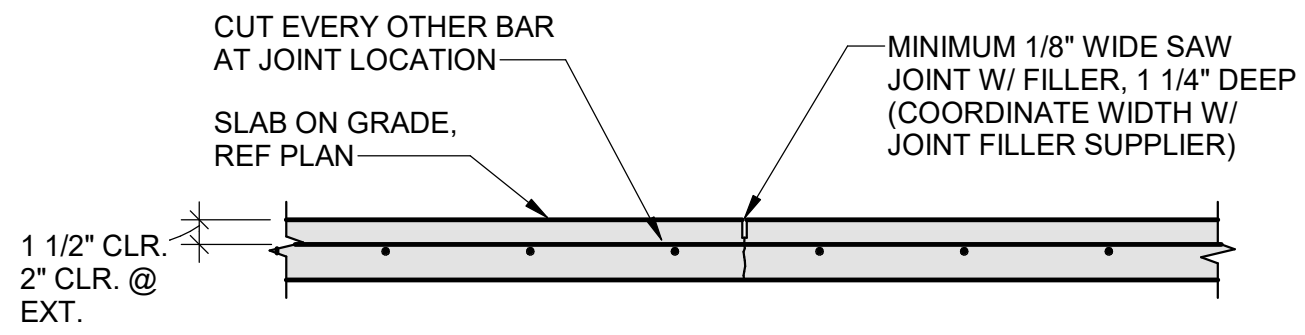


1 TYPICAL SLAB ON GRADE JOINT DETAIL  
3/4" = 1'-0"

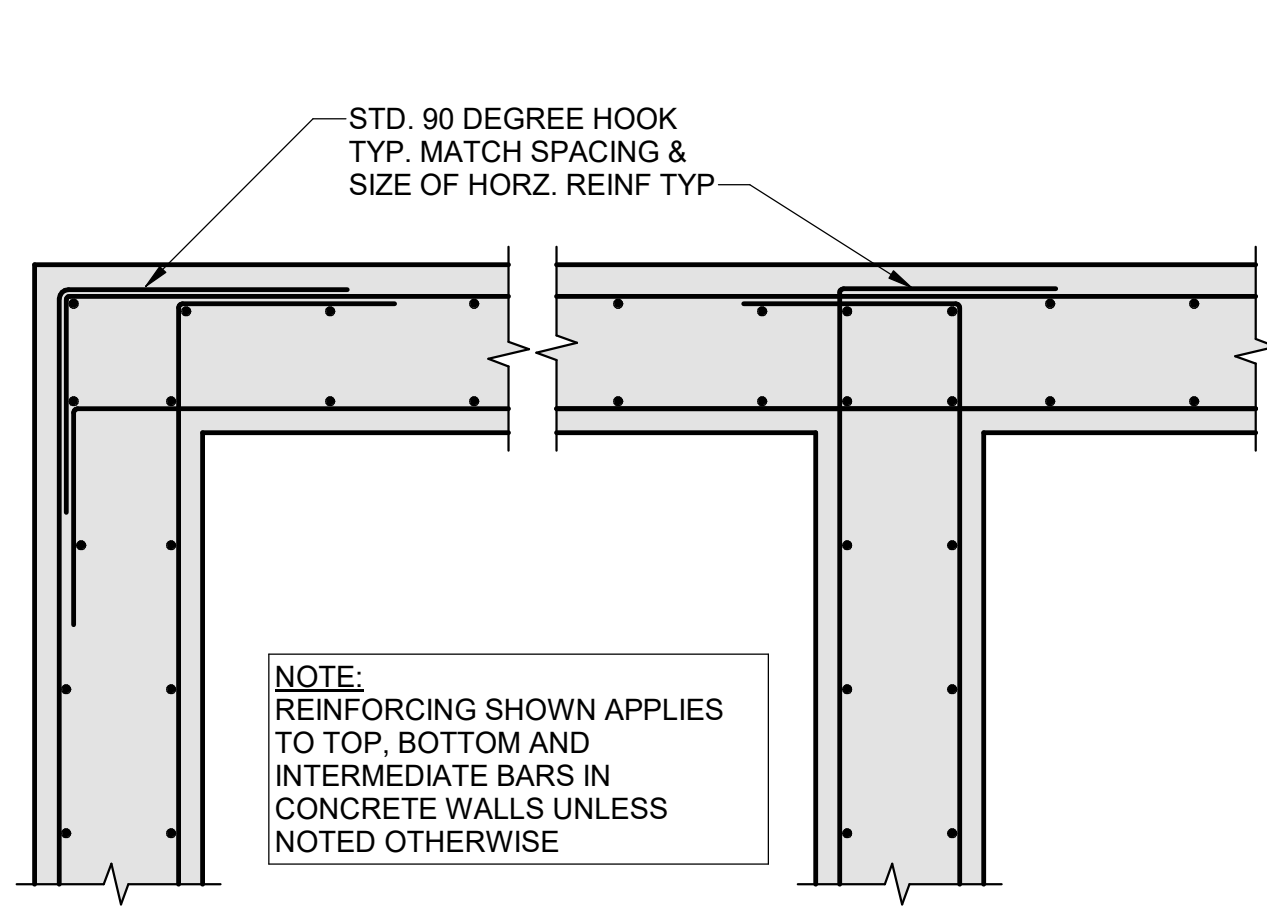

2 CORNER AND INTERSECTION REINFORCING  
NO SCALE

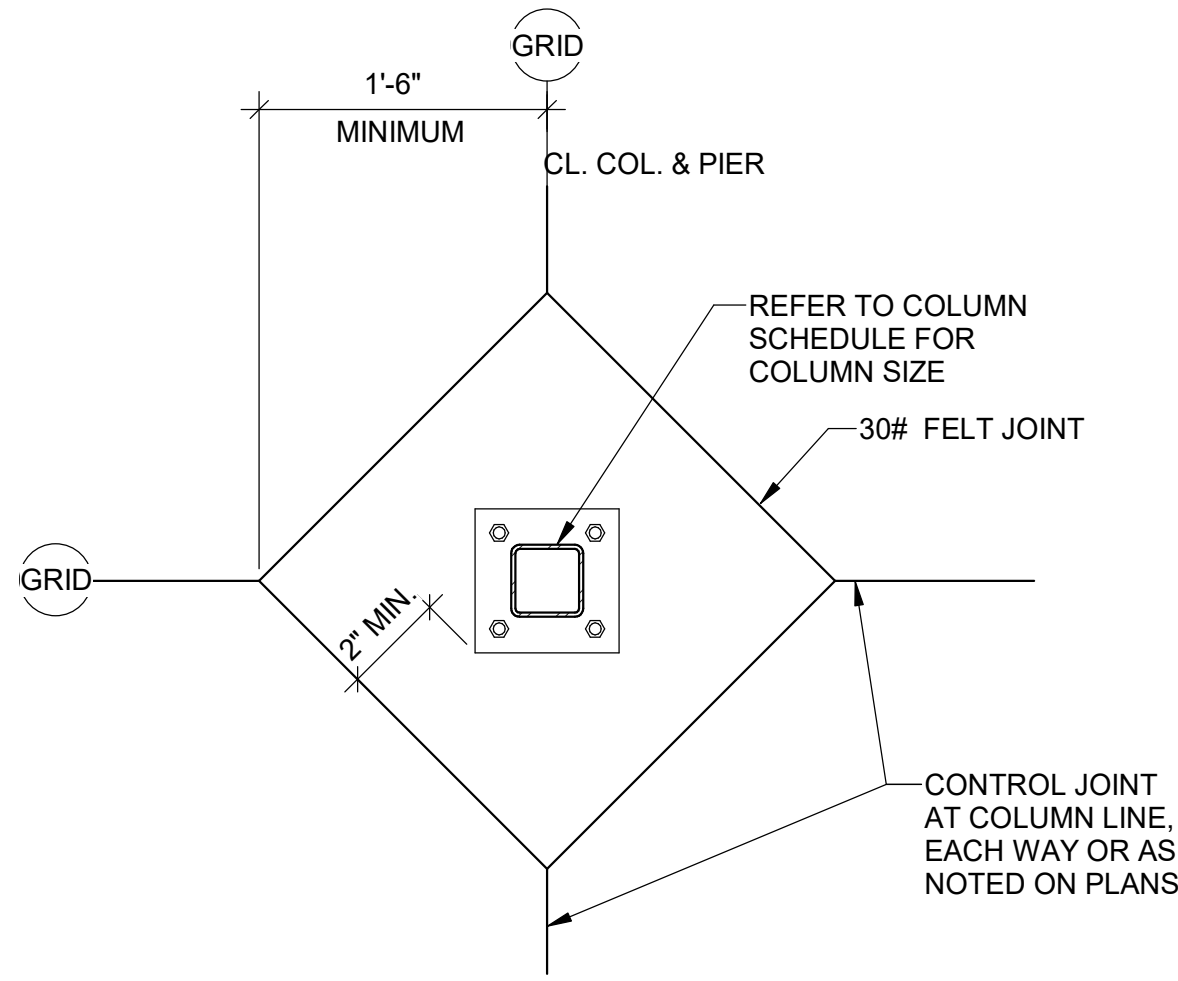


3 ISOLATION JOINTS AT COLUMN HSS  
NO SCALE

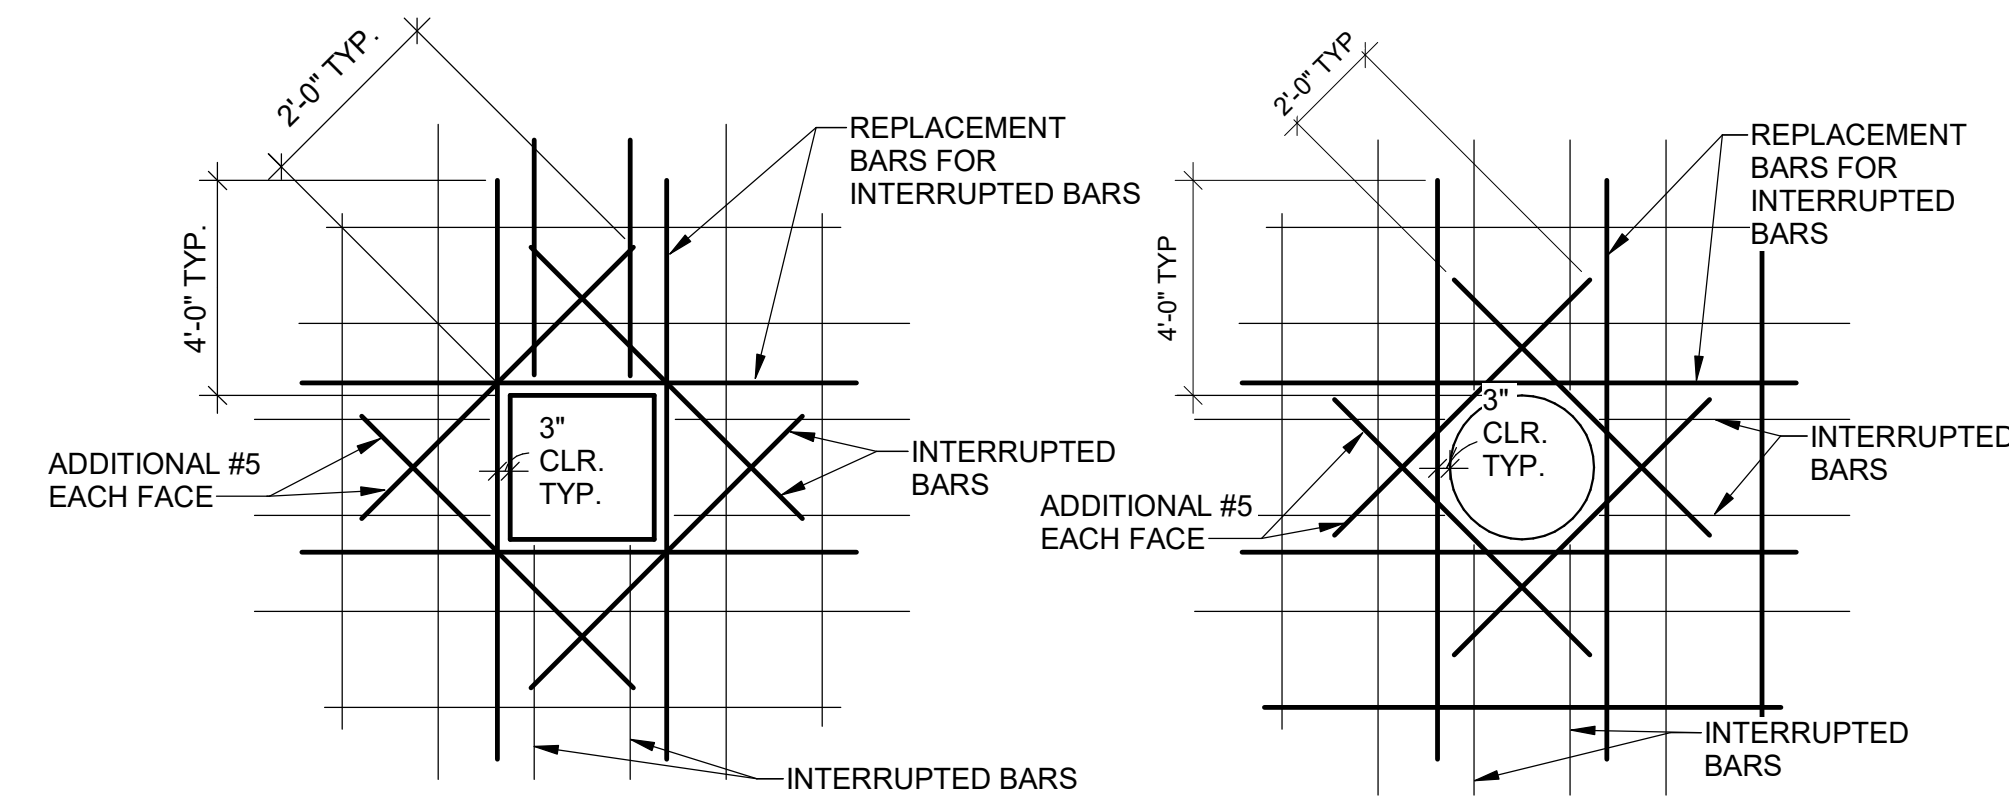


- NOTES:
1. USE THIS DETAIL FOR ALL OPENINGS GREATER THAN 8" IN CONCRETE WALLS AND SLABS. PROVIDE (2) #5 ON DIAGONAL AT EACH CORNER AS SHOWN. EXTEND BARS 2'-0" PAST OPENING. REPLACE ALL VERTICAL AND HORIZONTAL BARS INTERRUPTED BY THE OPENING WITH AN EQUAL NUMBER AND SIZE BARS EVENLY DIVIDED ON EACH SIDE OF THE OPENING UNLESS NOTED OTHERWISE.
  2. REFER TO PLAN FOR ALL OPENING LOCATIONS.


4 TYPICAL SLAB/WALL OPENINGS  
NO SCALE

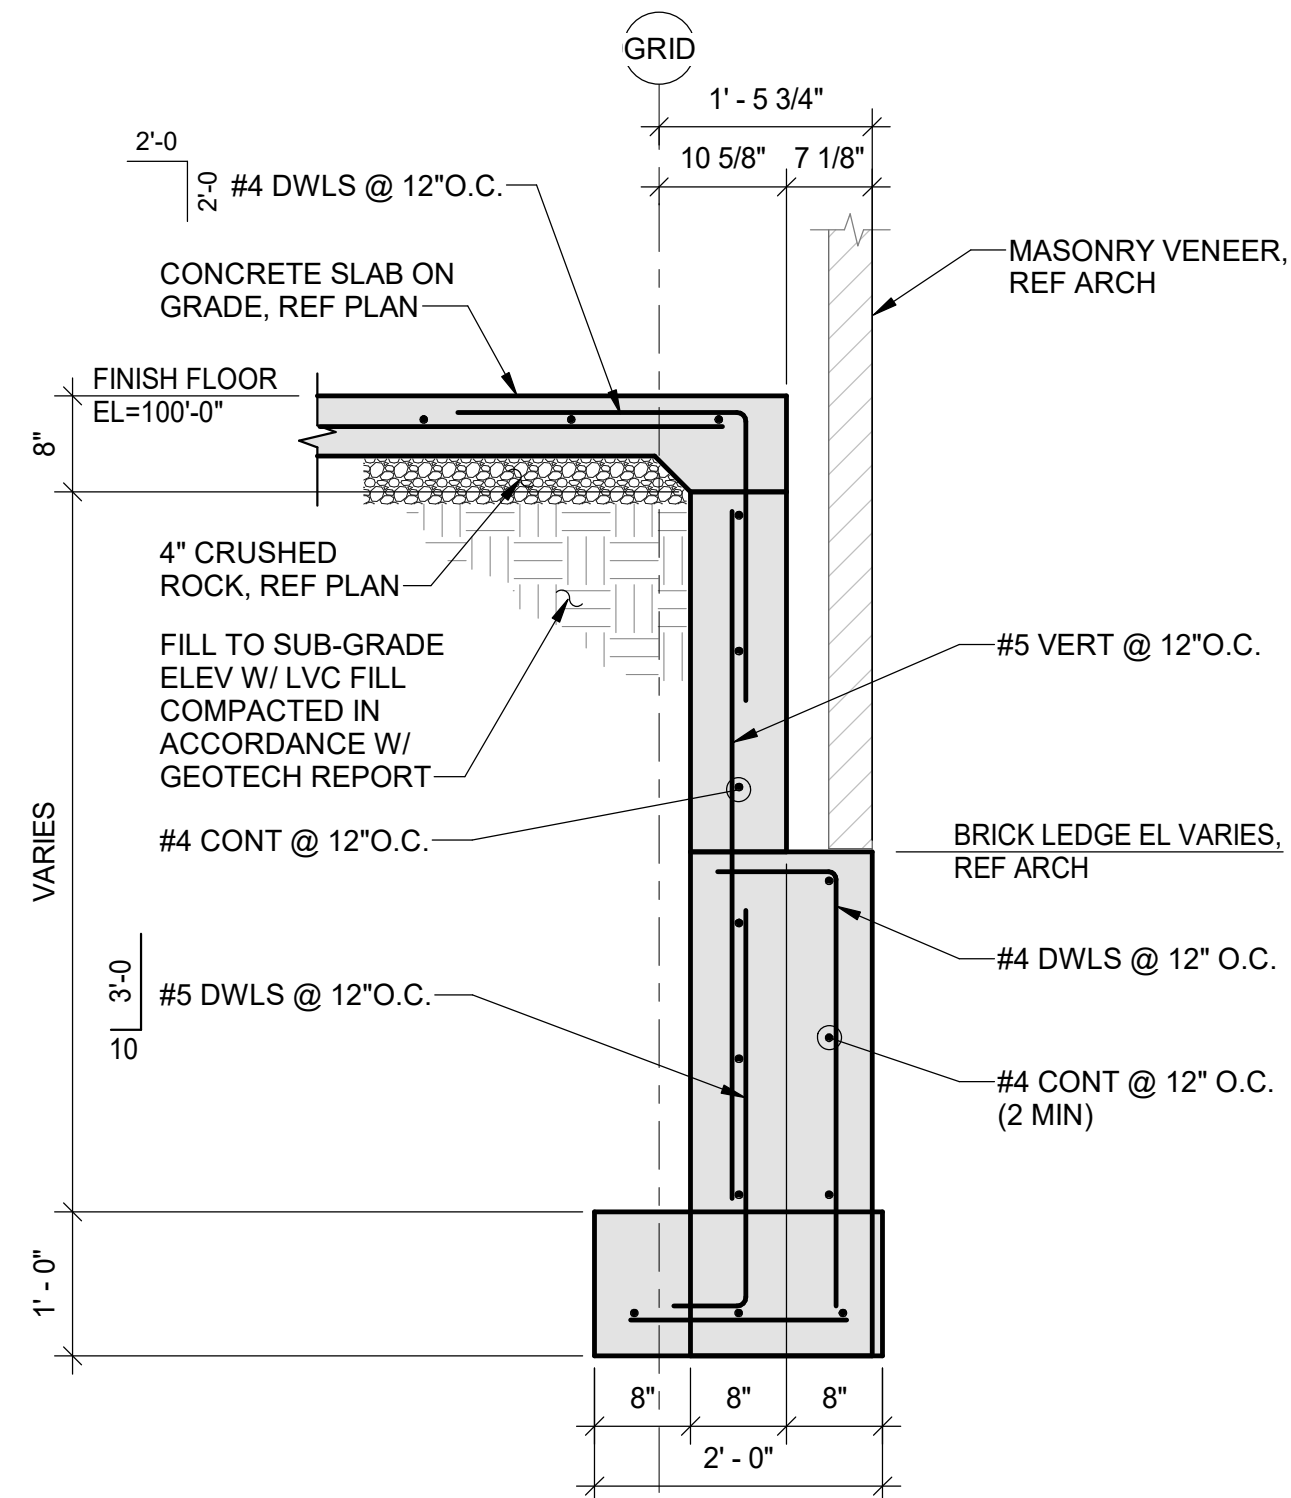


5 FOUNDATION SECTION  
3/4" = 1'-0"

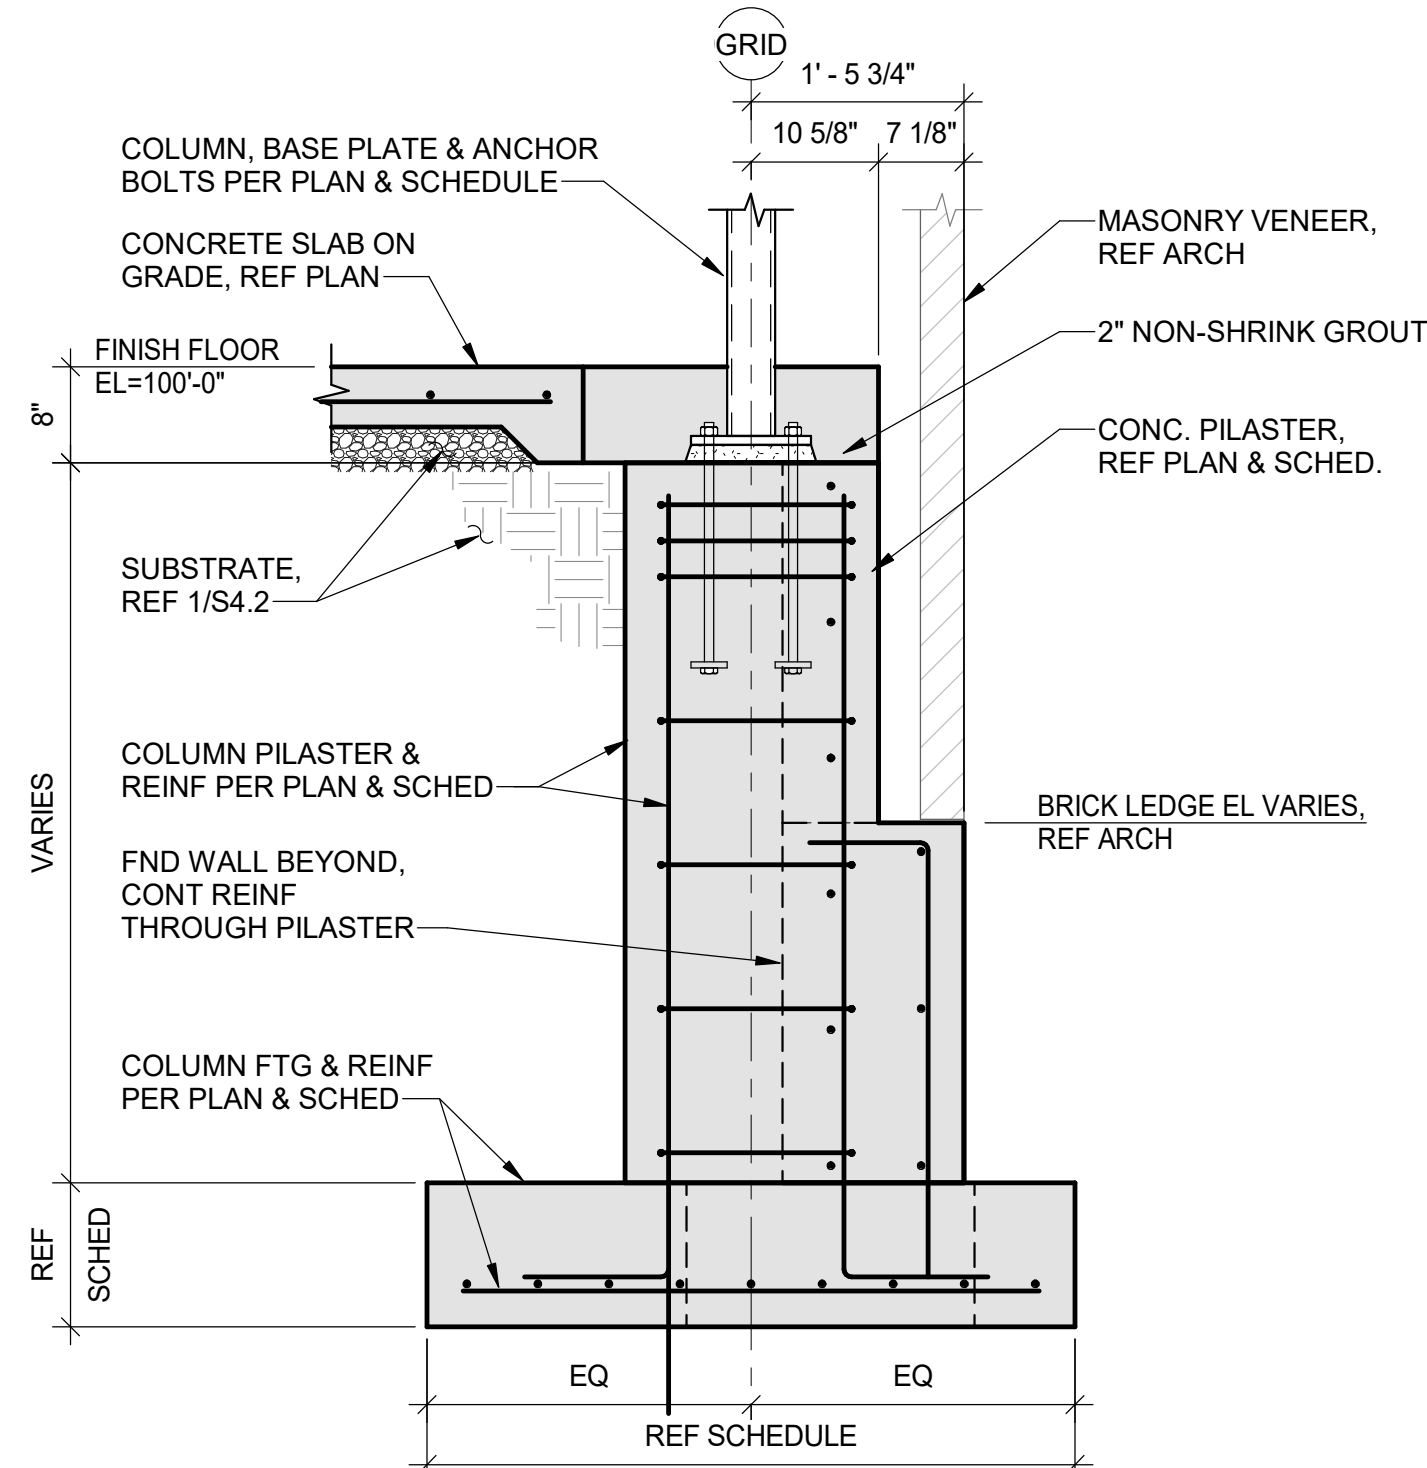


6 FOUNDATION SECTION  
3/4" = 1'-0"

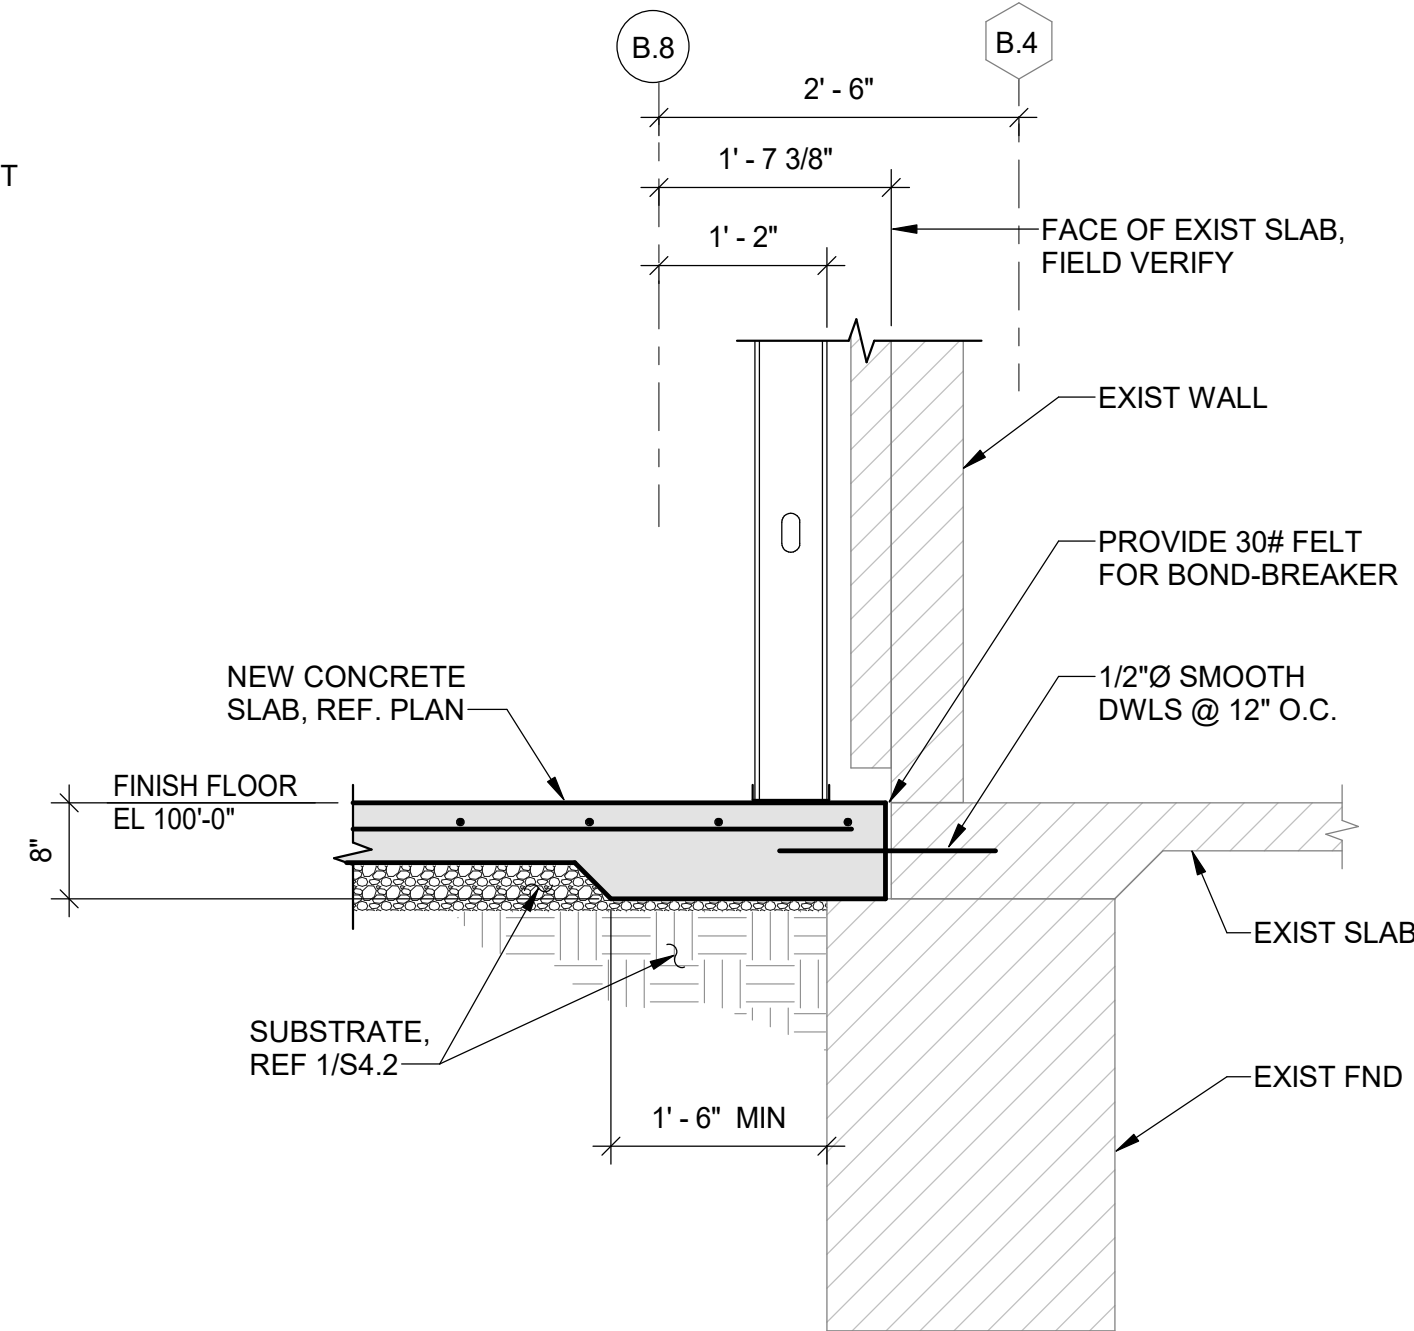


7 FOUNDATION SECTION  
3/4" = 1'-0"

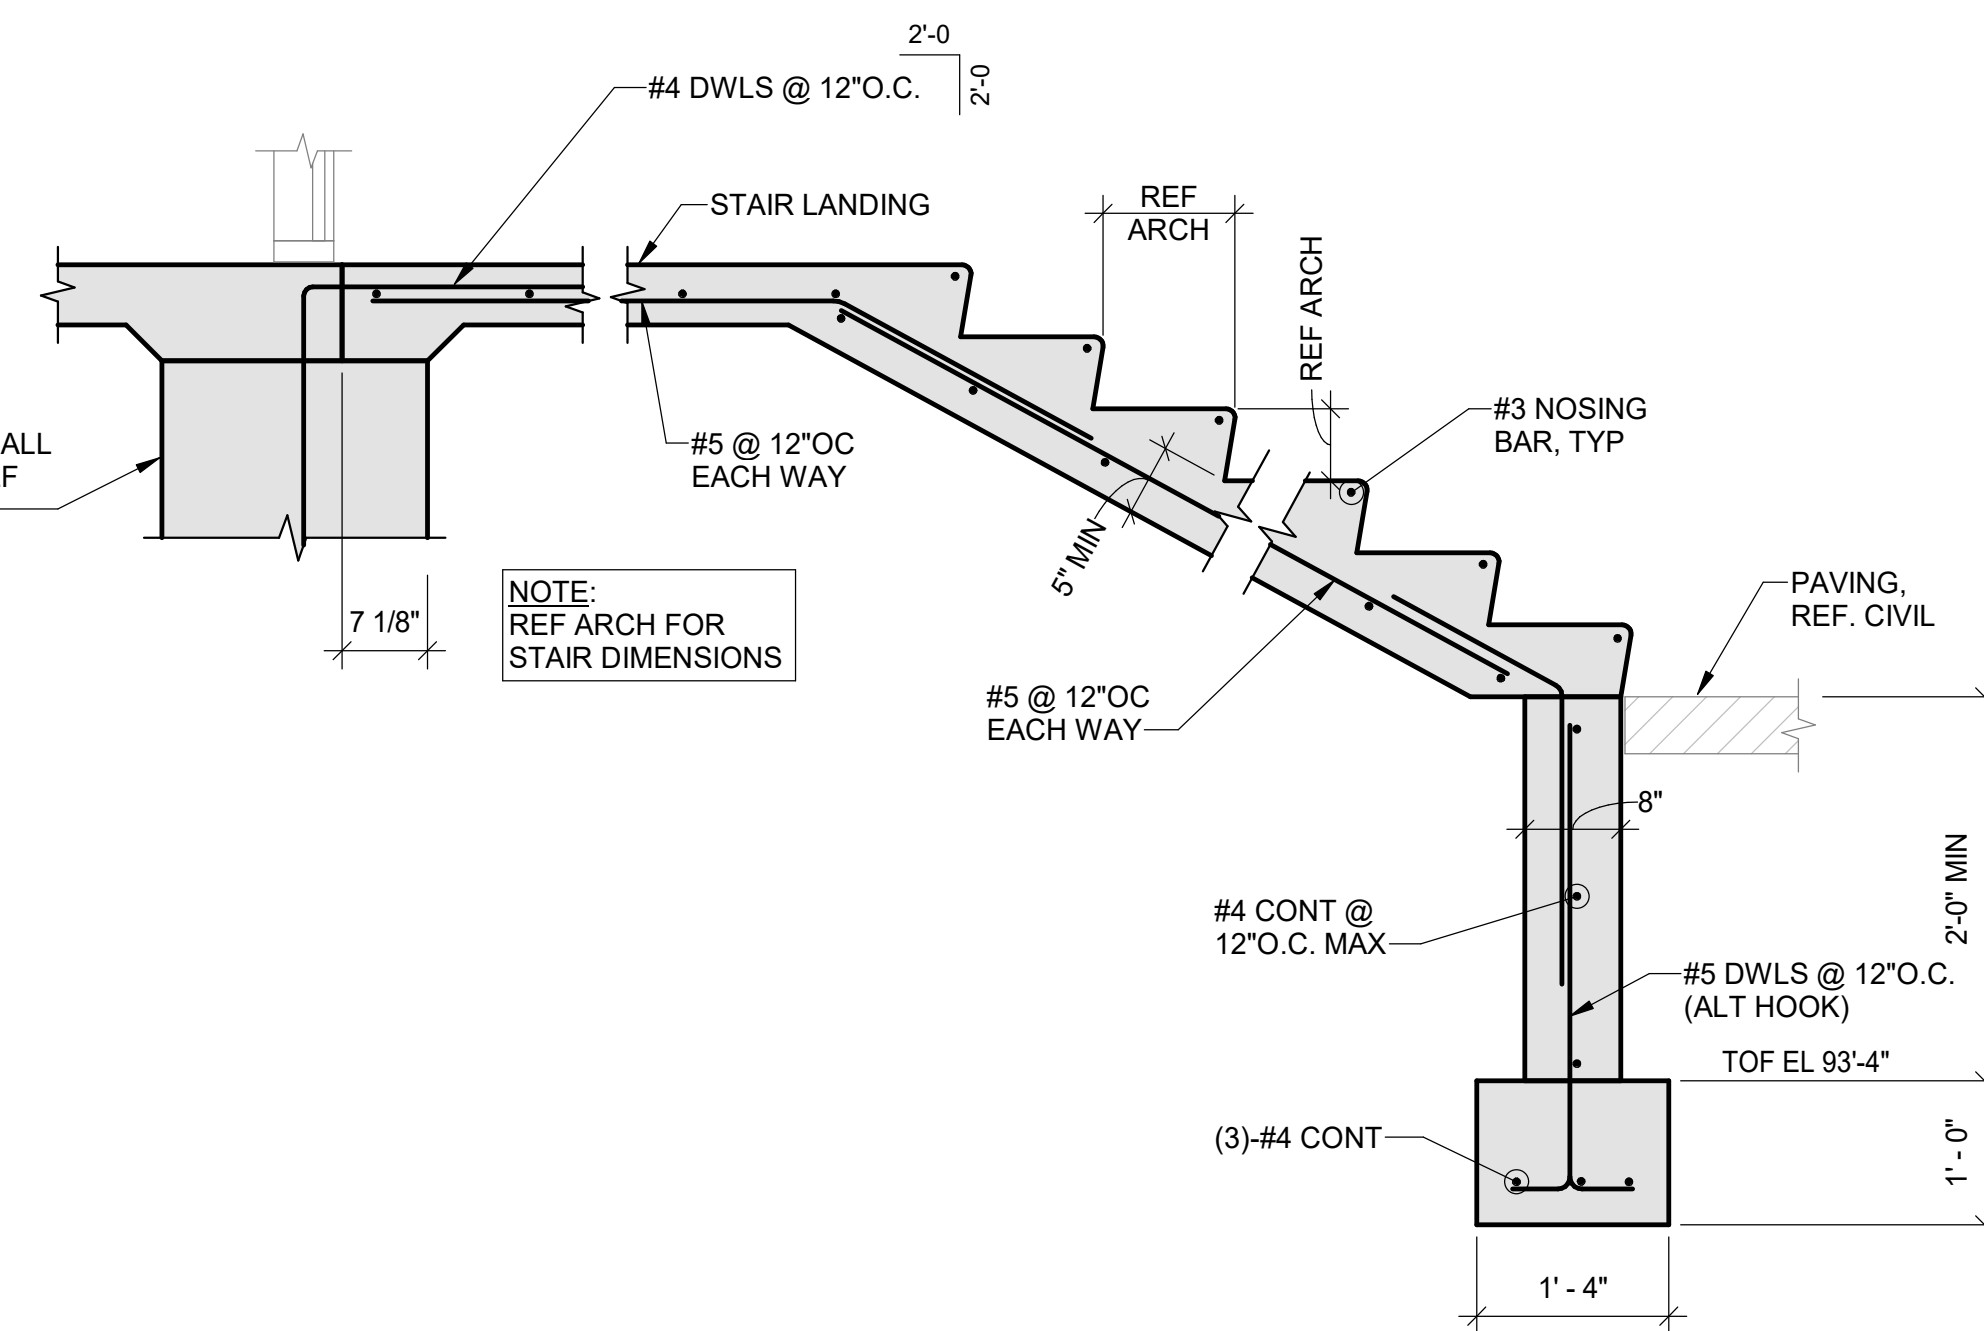


8 CONCRETE STAIR SECTION  
3/4" = 1'-0"

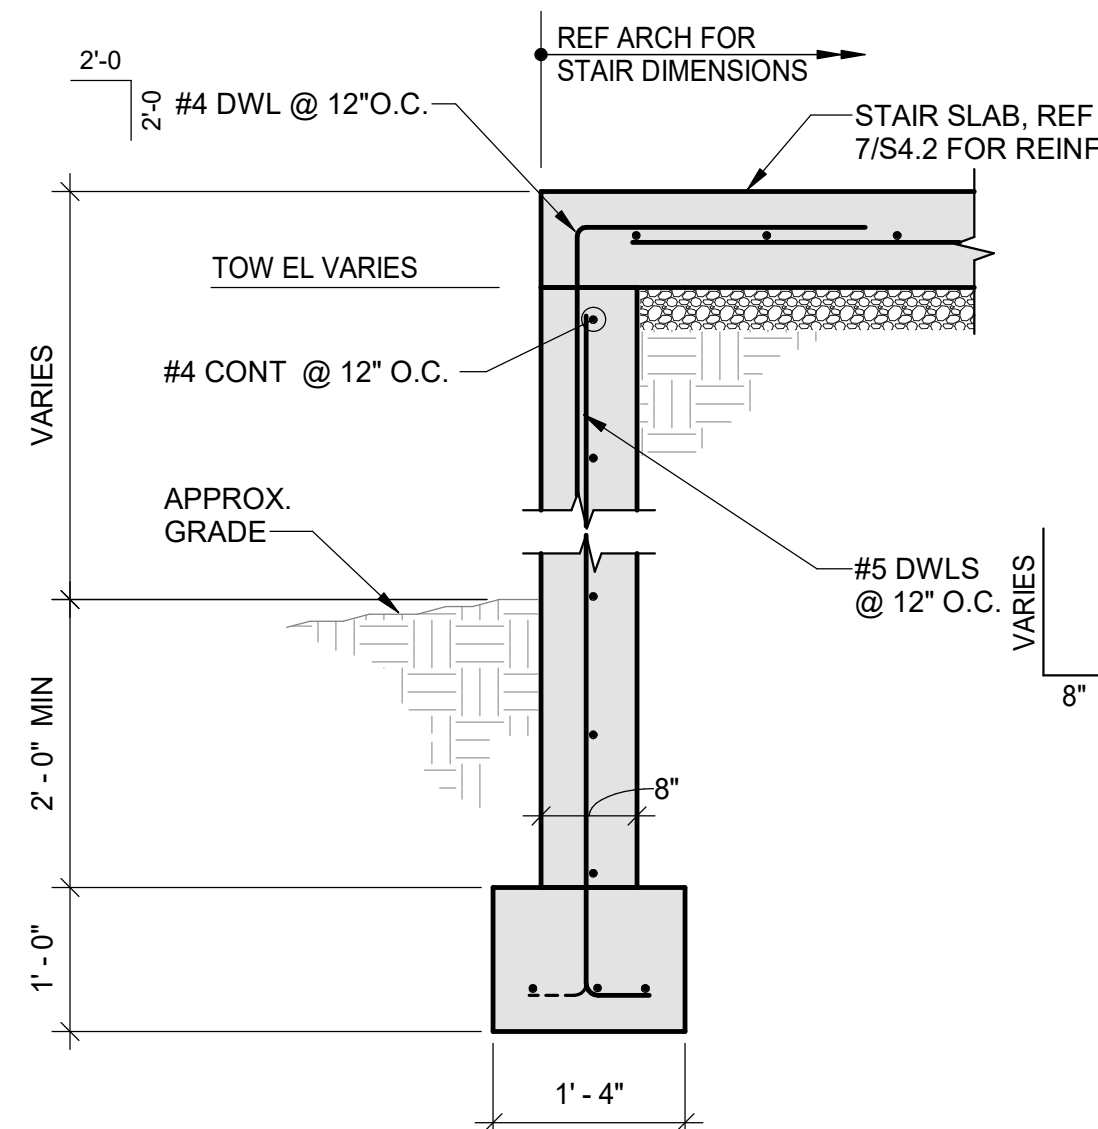


9 CONCRETE STAIR SECTION  
3/4" = 1'-0"

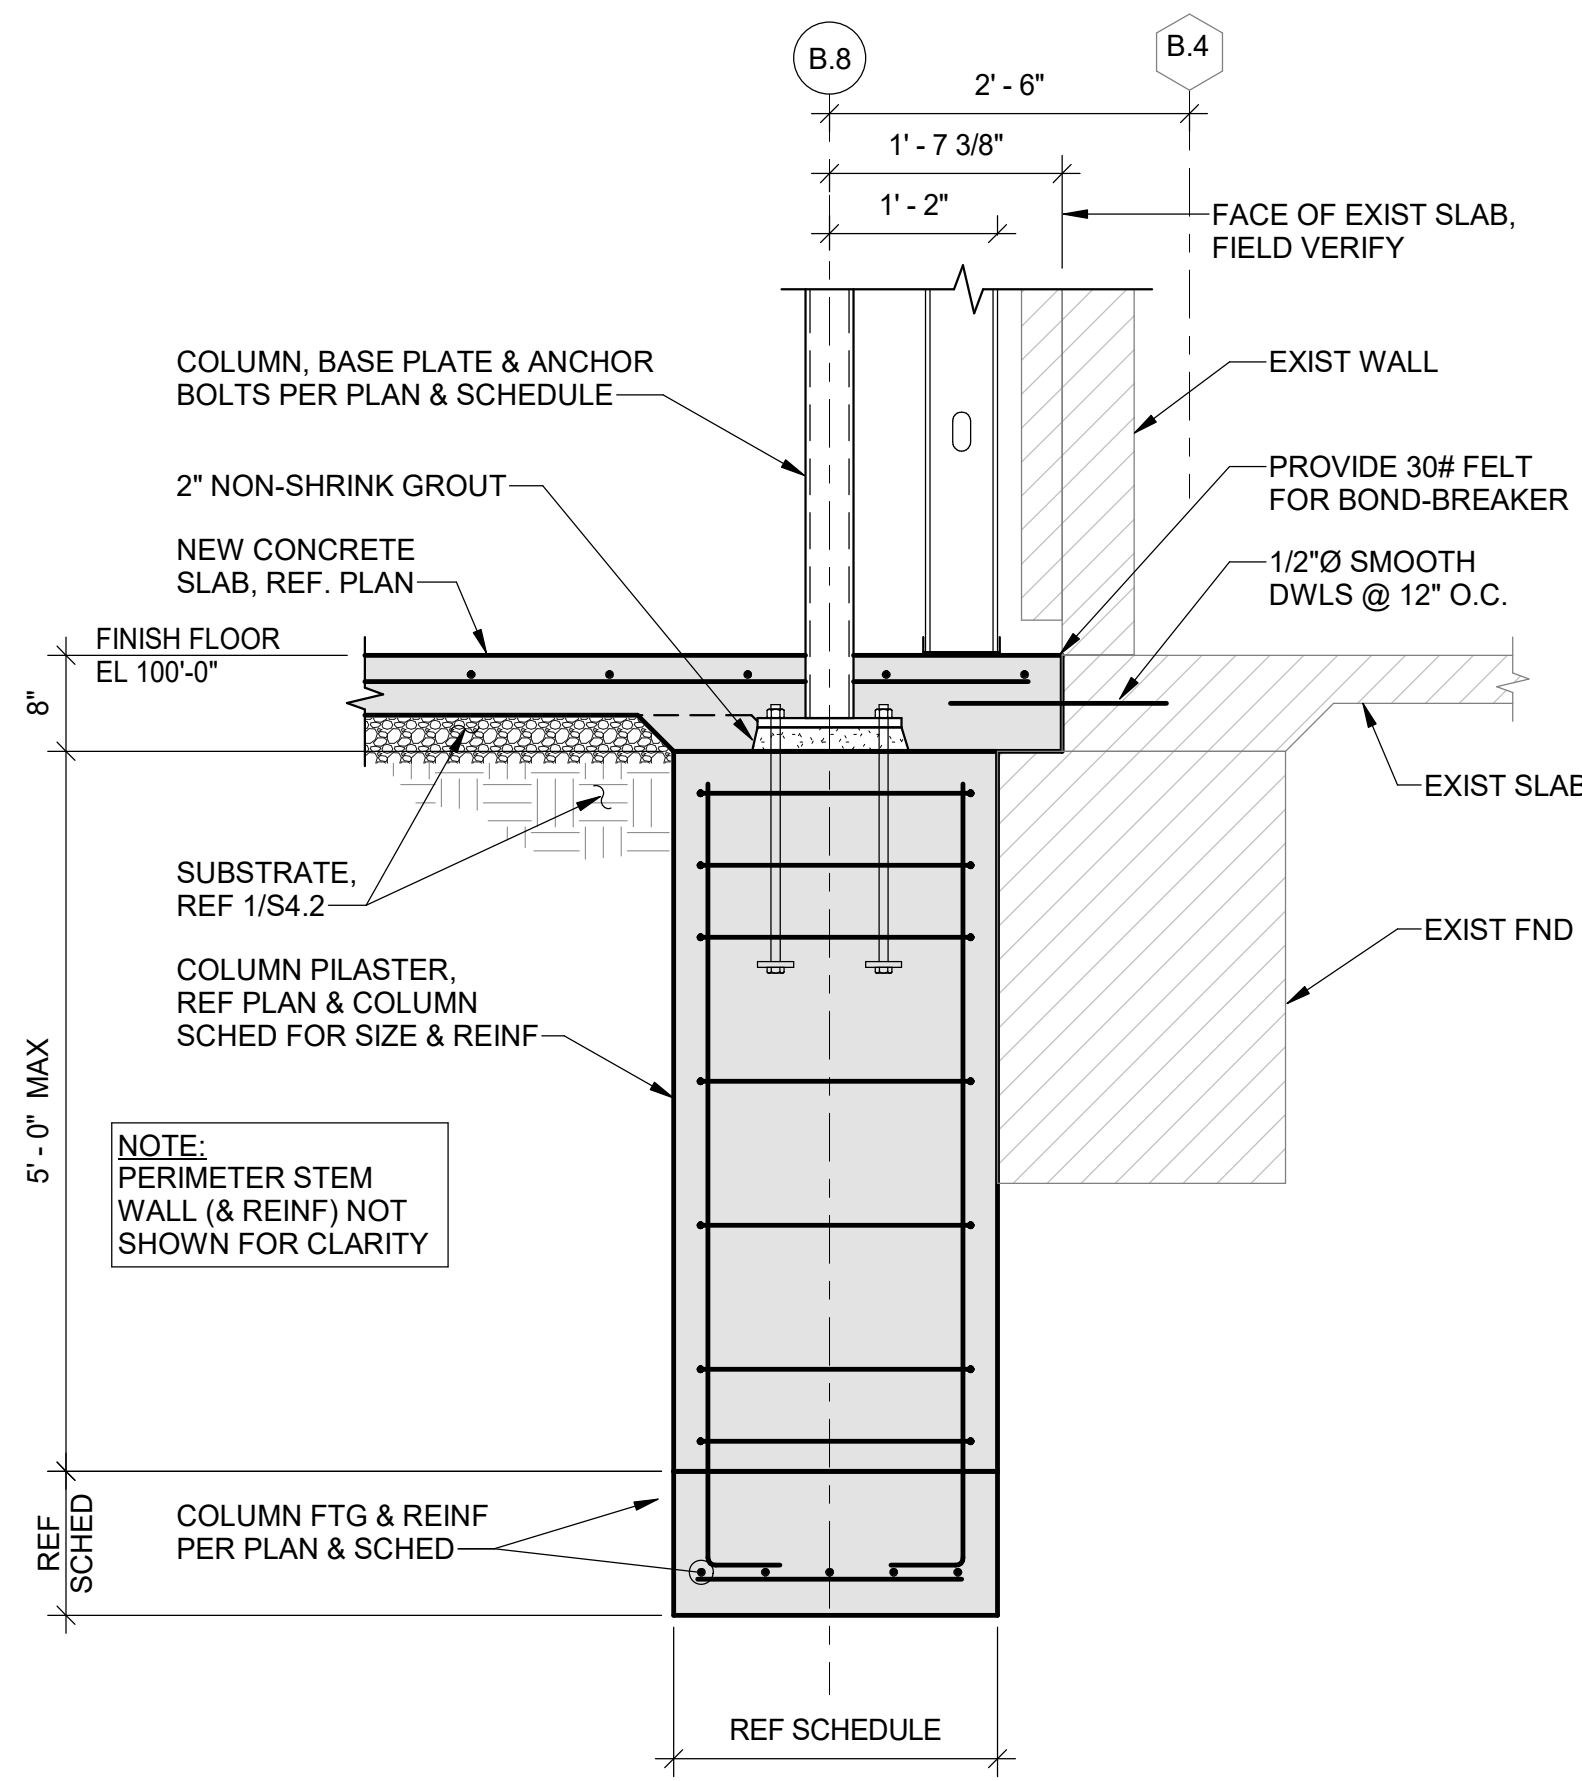

10 FOUNDATION SECTION  
3/4" = 1'-0"

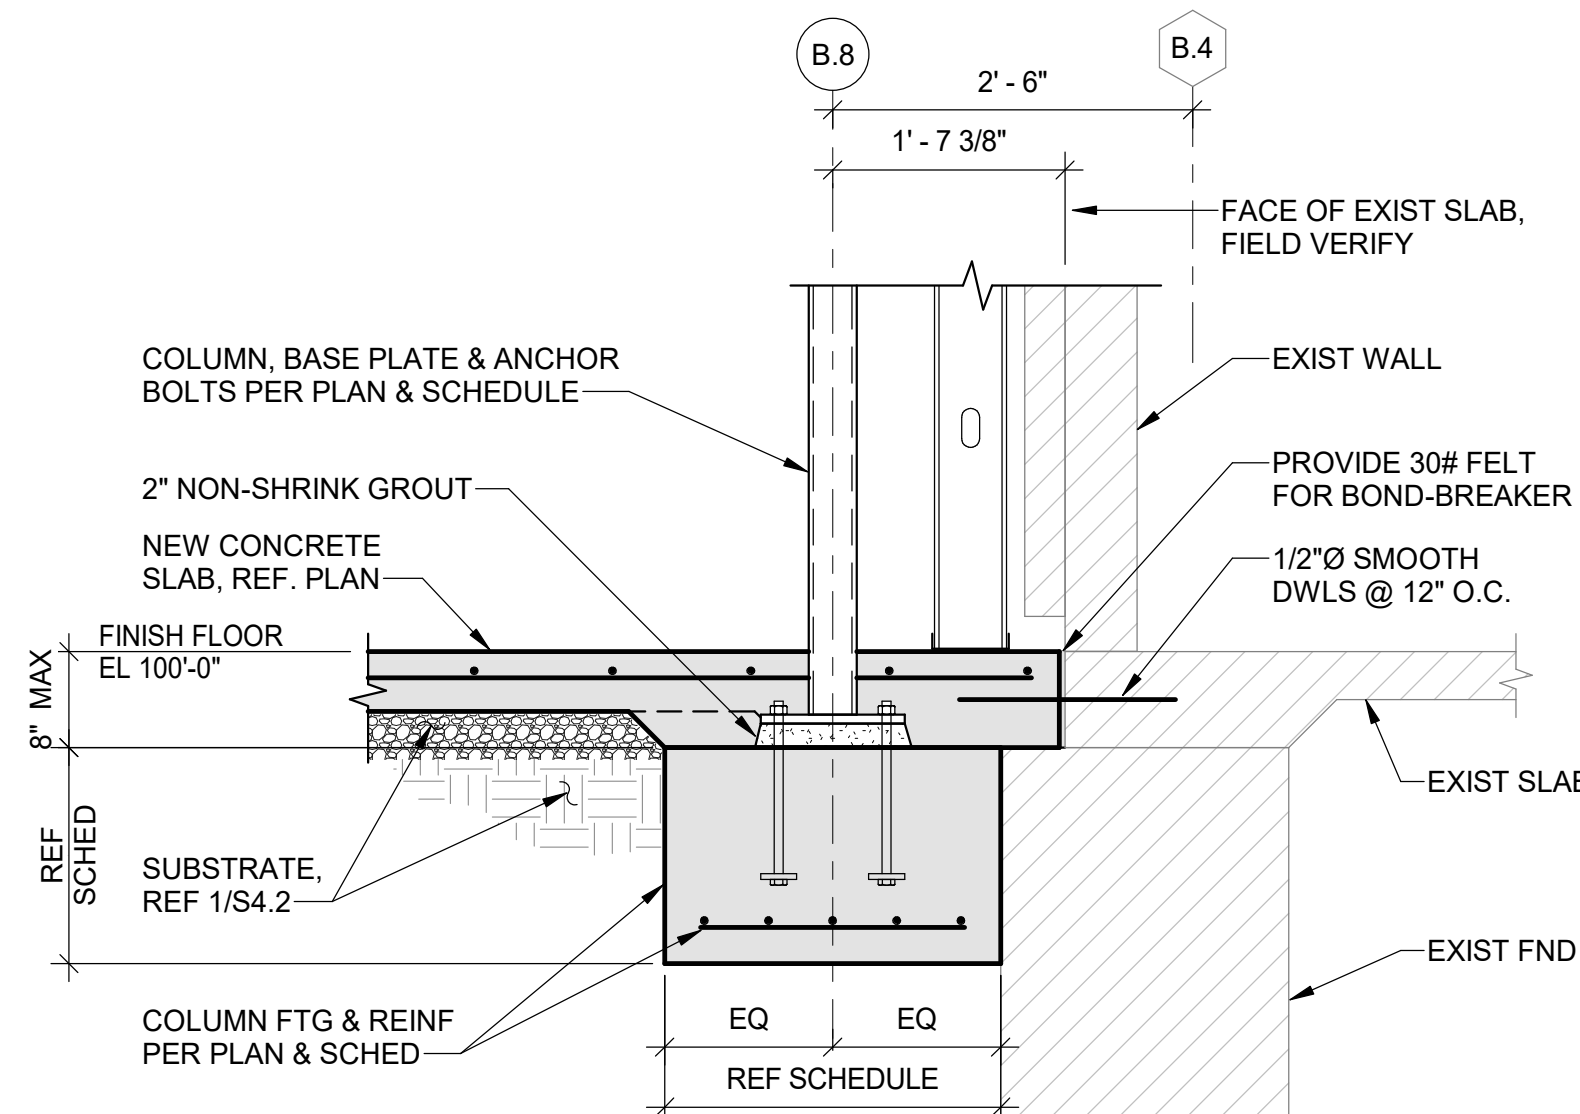

11 FOUNDATION SECTION  
3/4" = 1'-0"

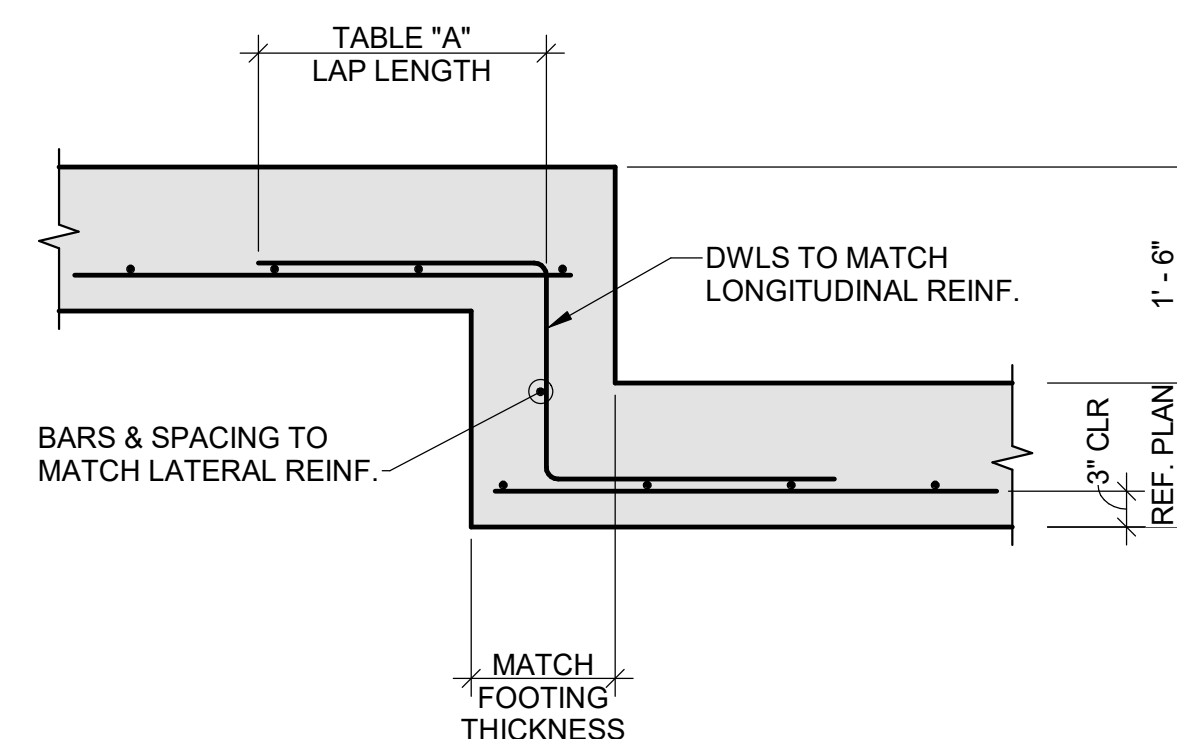

12 STEP FOOTING DETAIL  
3/4" = 1'-0"



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**


Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW

Revision	
Number	Date Description


**S4.1**

© 2019 ACI/BOLAND, INC.  
FOUNDATION DETAILS




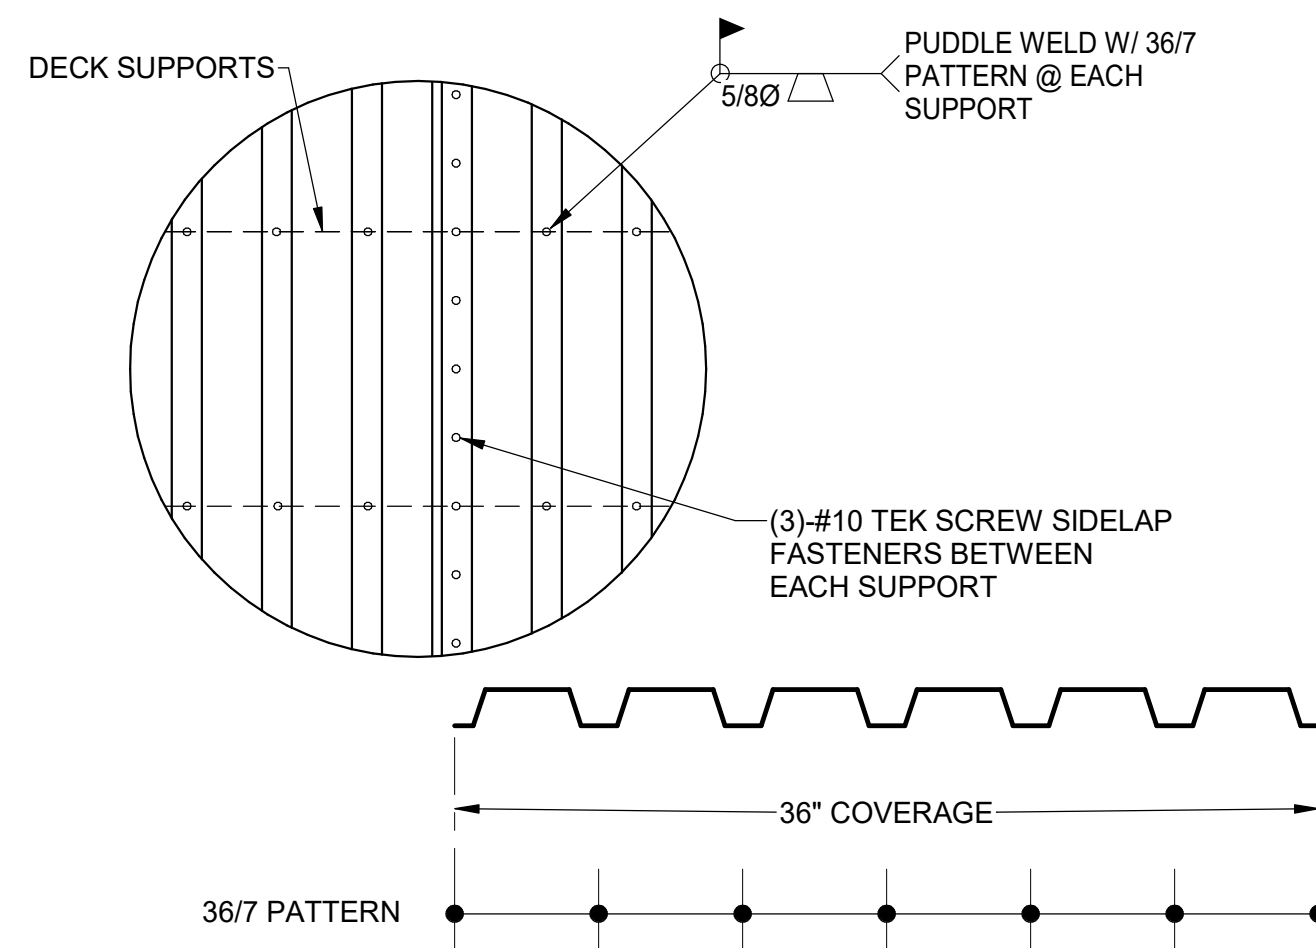


**1** 1 1/2" ROOF DECK ATTACHMENT  
NO SCALE

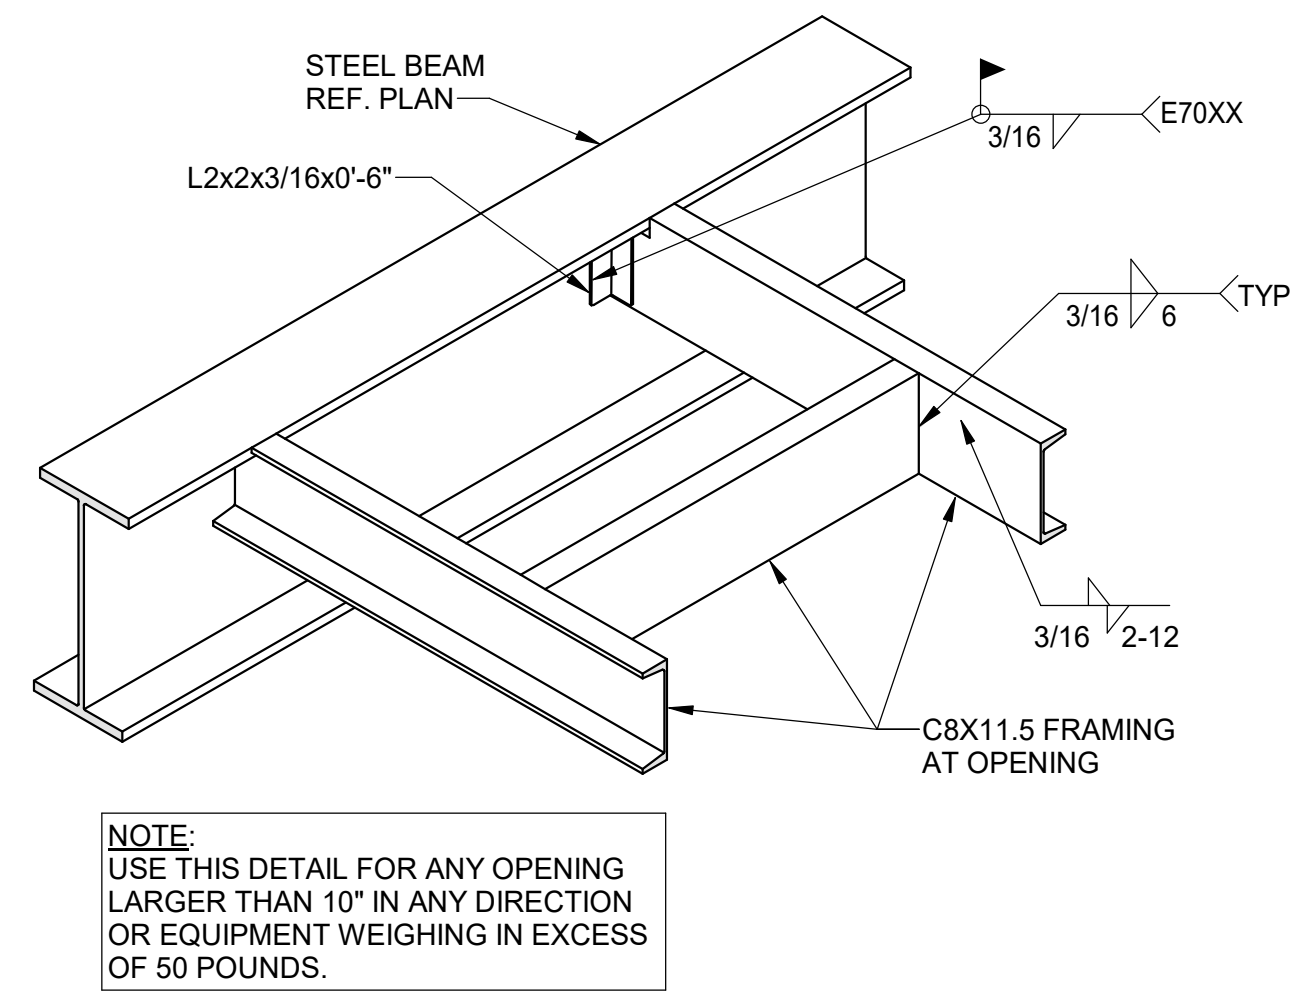

**2** TYPICAL FLOOR OPENING DETAIL  
3/4" = 1'-0"

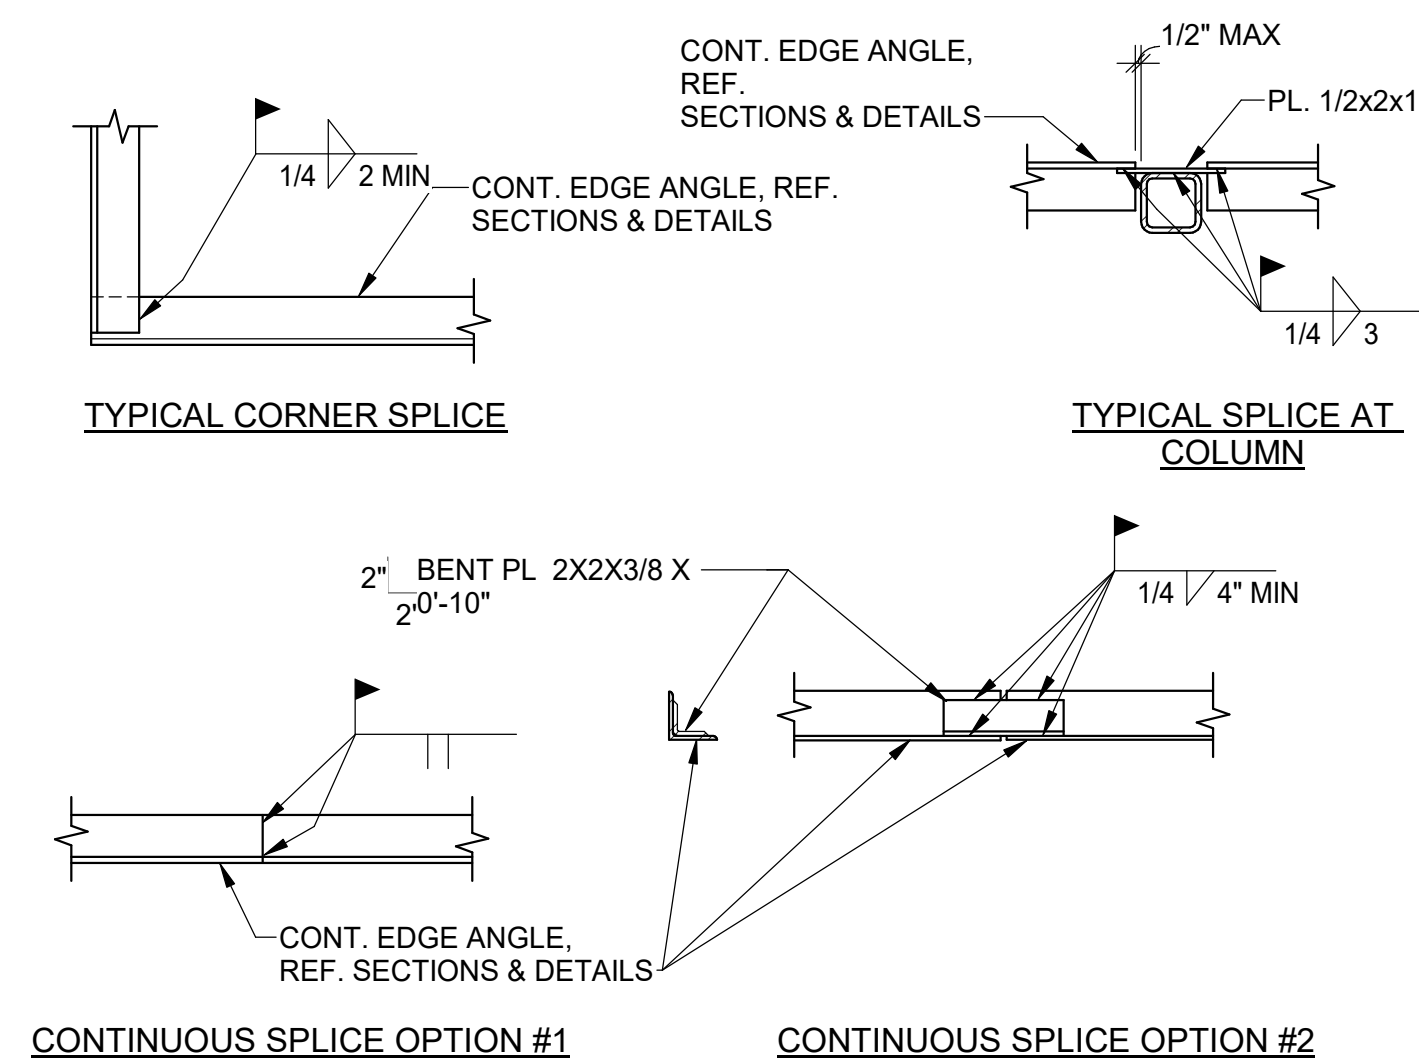


**3** TYPICAL EDGE ANGLE SPLICE  
NO SCALE

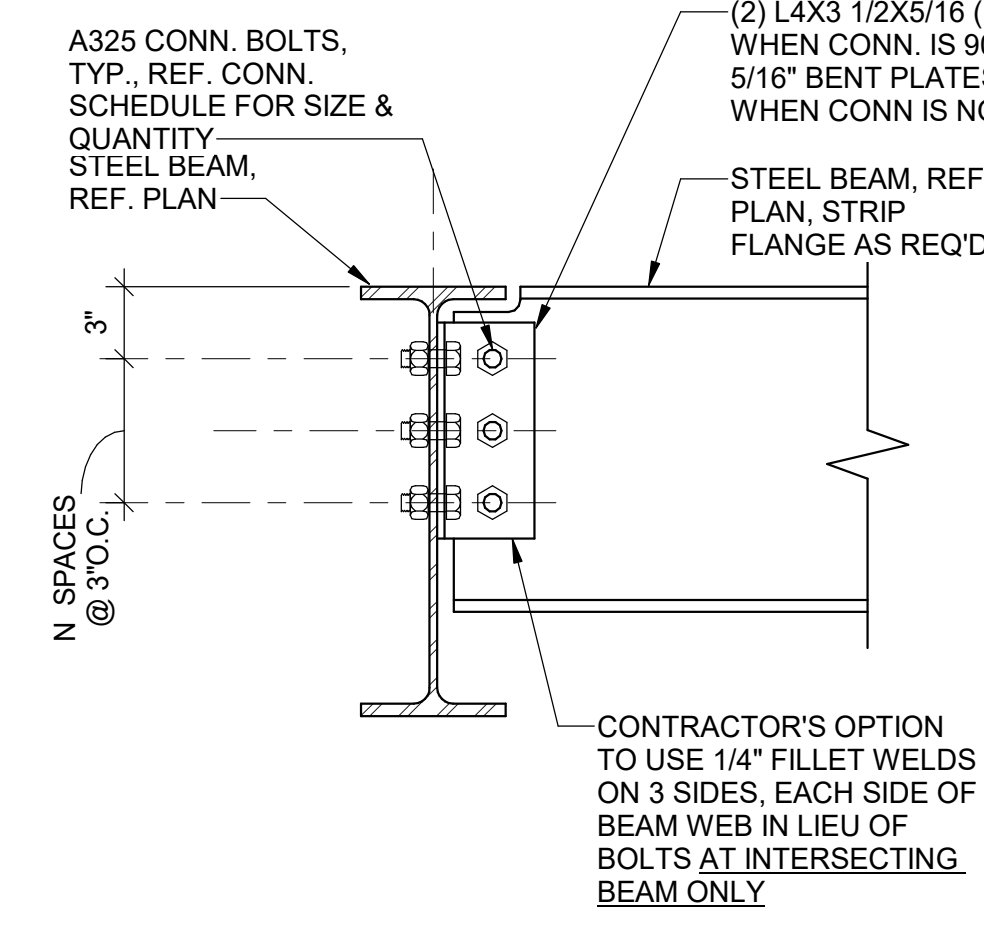


**4** DOUBLE ANGLE CONNECTION  
NO SCALE

BEAM DEPTH	NUMBER OF BOLT LINES	BOLT DIAMETER U.N.O.	CAPACITY ASD / LRFD
W8	2	3/4" DIA.	21k / 31k
W10			
W12			
W14	3	3/4" DIA.	31k / 47k
W16			
W18			
W21	4	3/4" DIA.	42k / 63k
W24	5	3/4" DIA.	53k / 79k
W27	6	3/4" DIA.	63k / 95k
W30	7	3/4" DIA.	74k / 111k
W33	8	3/4" DIA.	84k / 129k
	9	3/4" DIA.	95k / 145k


NOTE:  
AT CONTRACTOR'S OPTION, BOLTED CONNECTIONS TO BEAM WEBS MAY BE USED FOR CONSTRUCTABILITY.

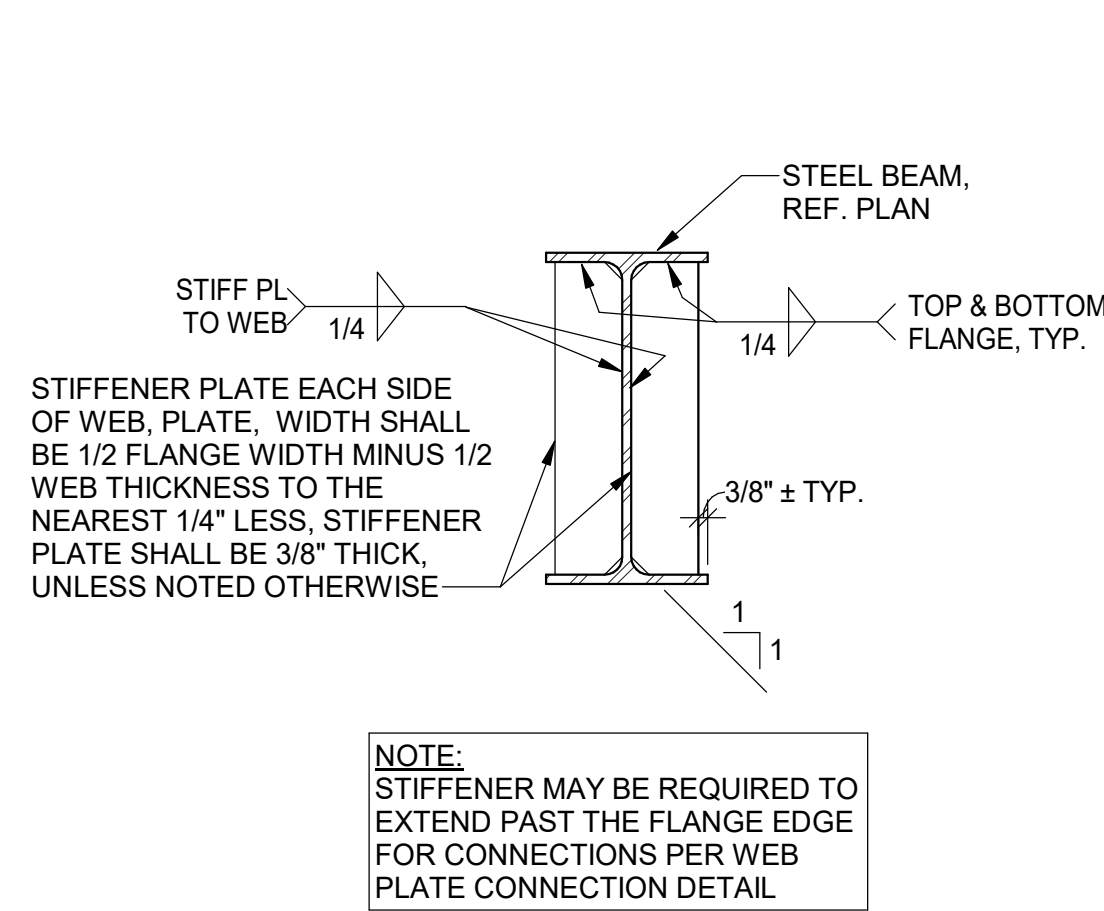


**5** WEB STIFFENER DETAIL  
NO SCALE

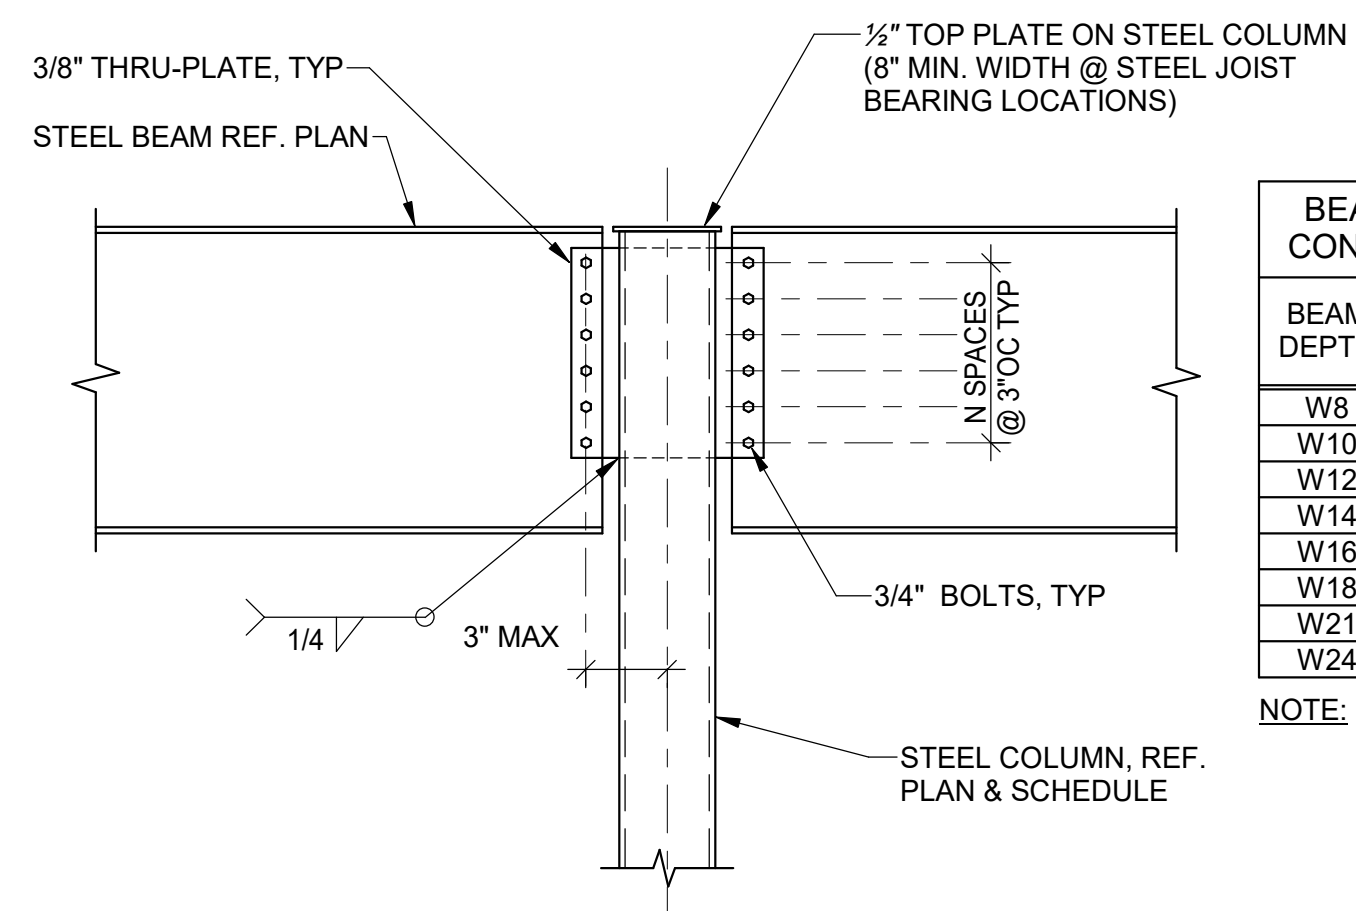


**6** BEAM TO HSS COLUMN CONNECTION  
3/4" = 1'-0"

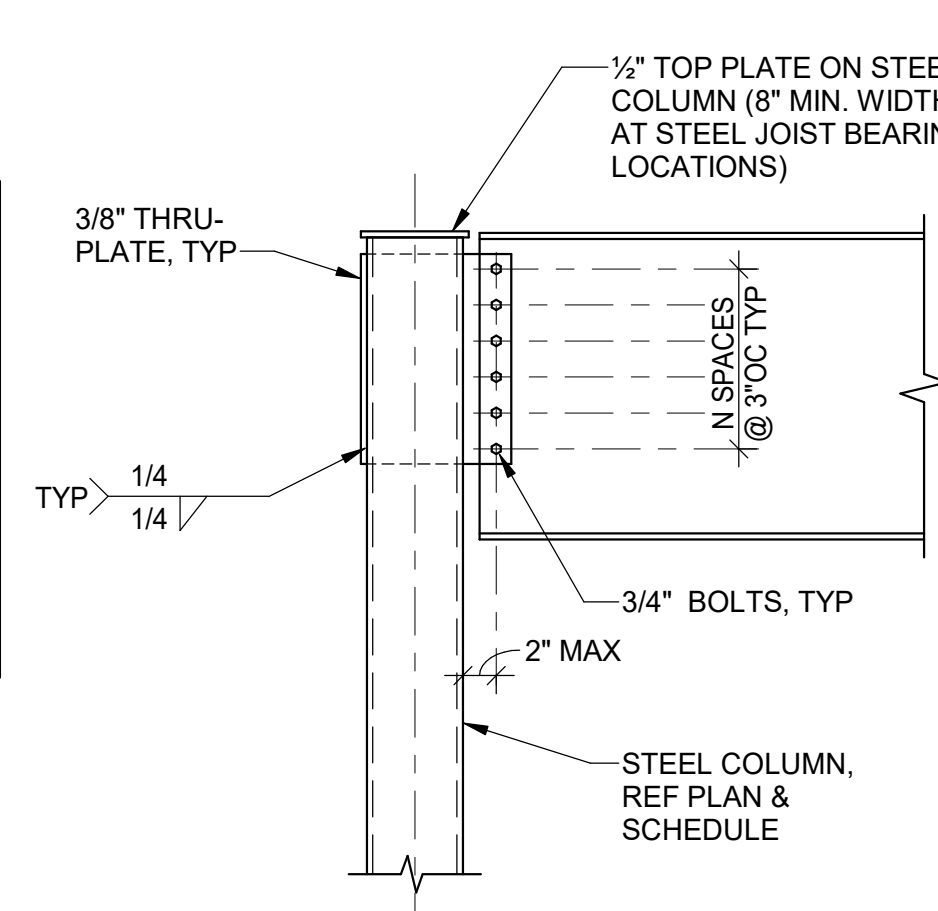


**7** FRAMING SECTION  
3/4" = 1'-0"

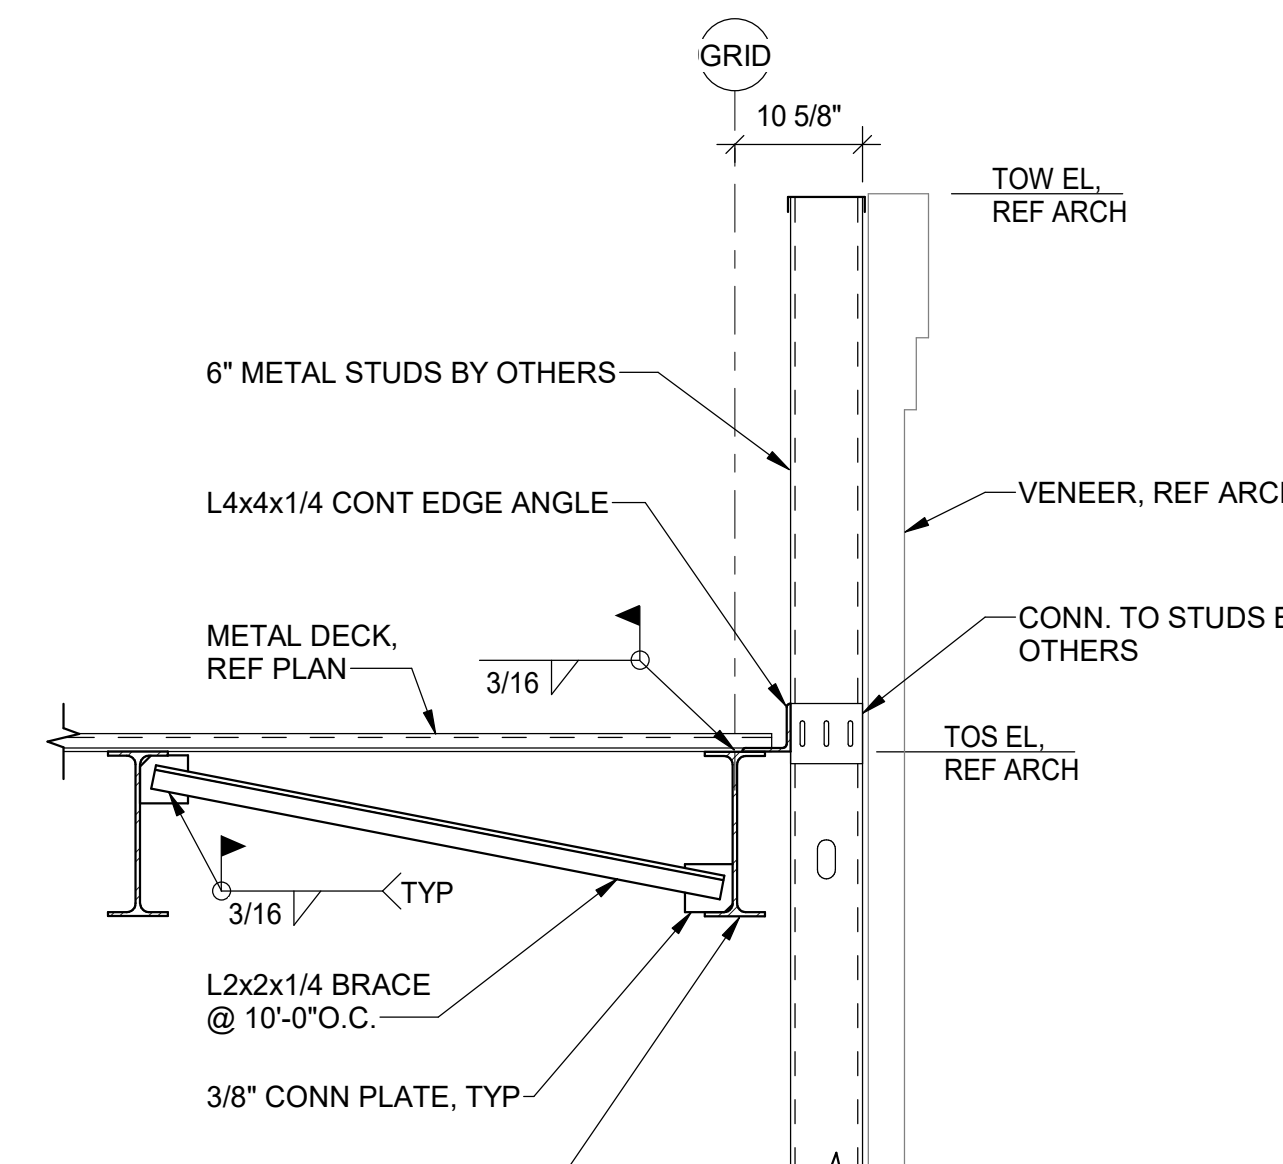


**8** FRAMING SECTION  
3/4" = 1'-0"

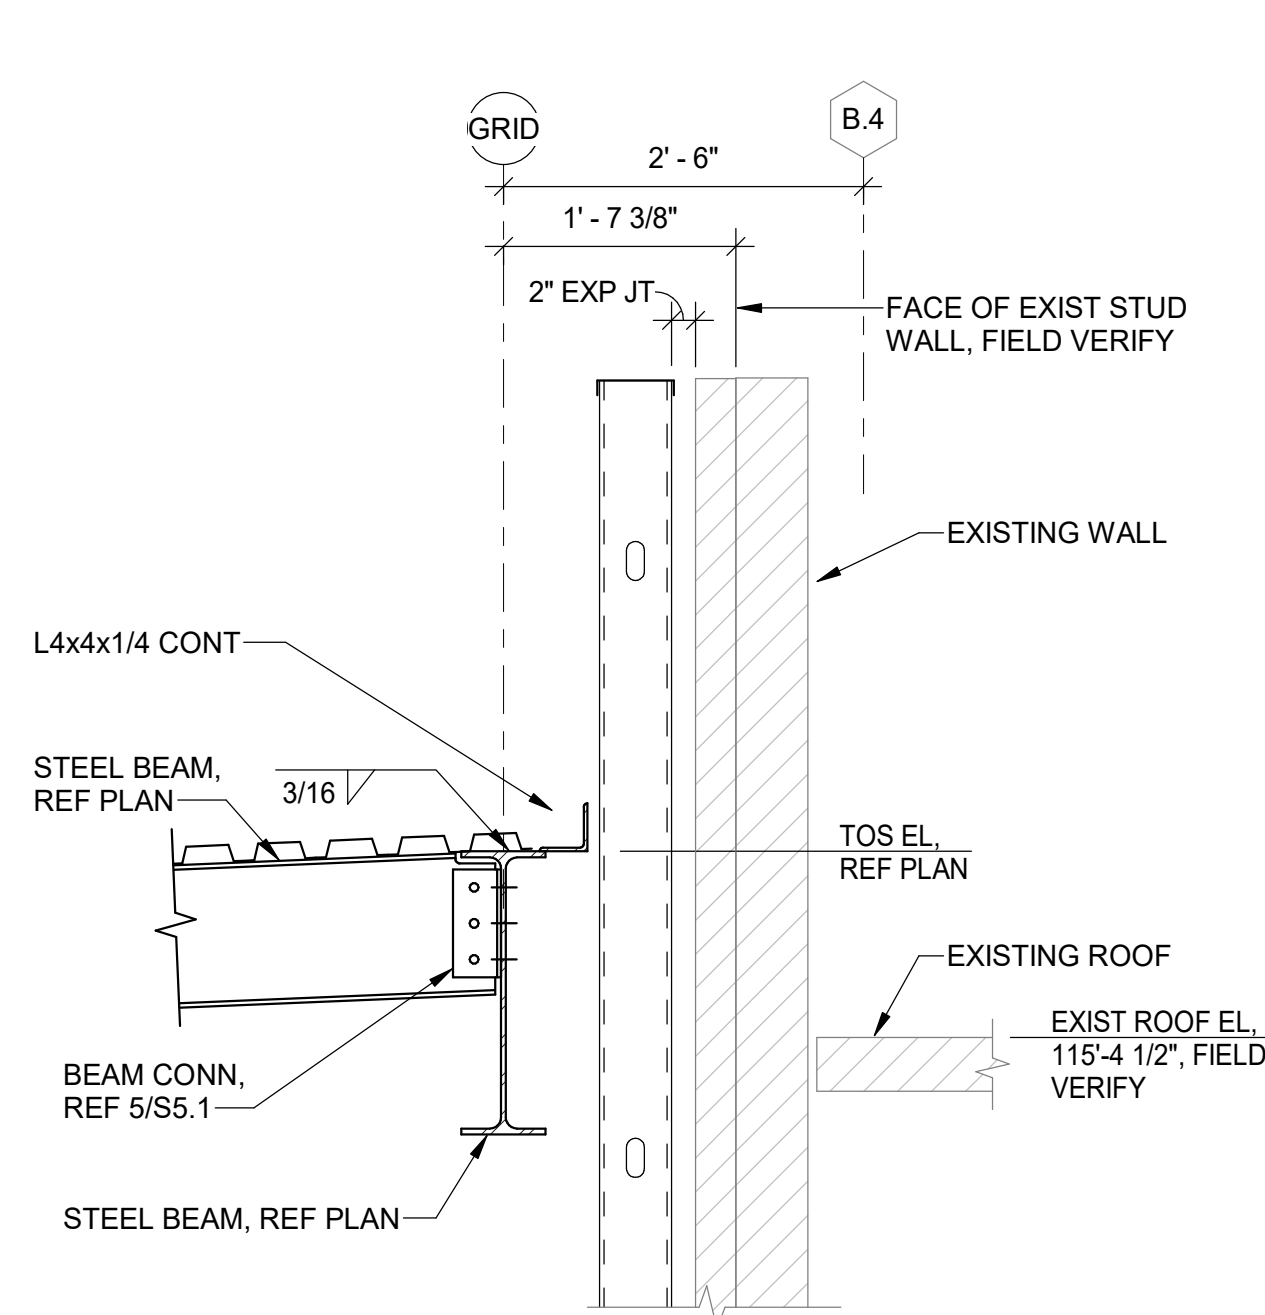


**9** FRAMING SECTION AT EXISTING  
3/4" = 1'-0"

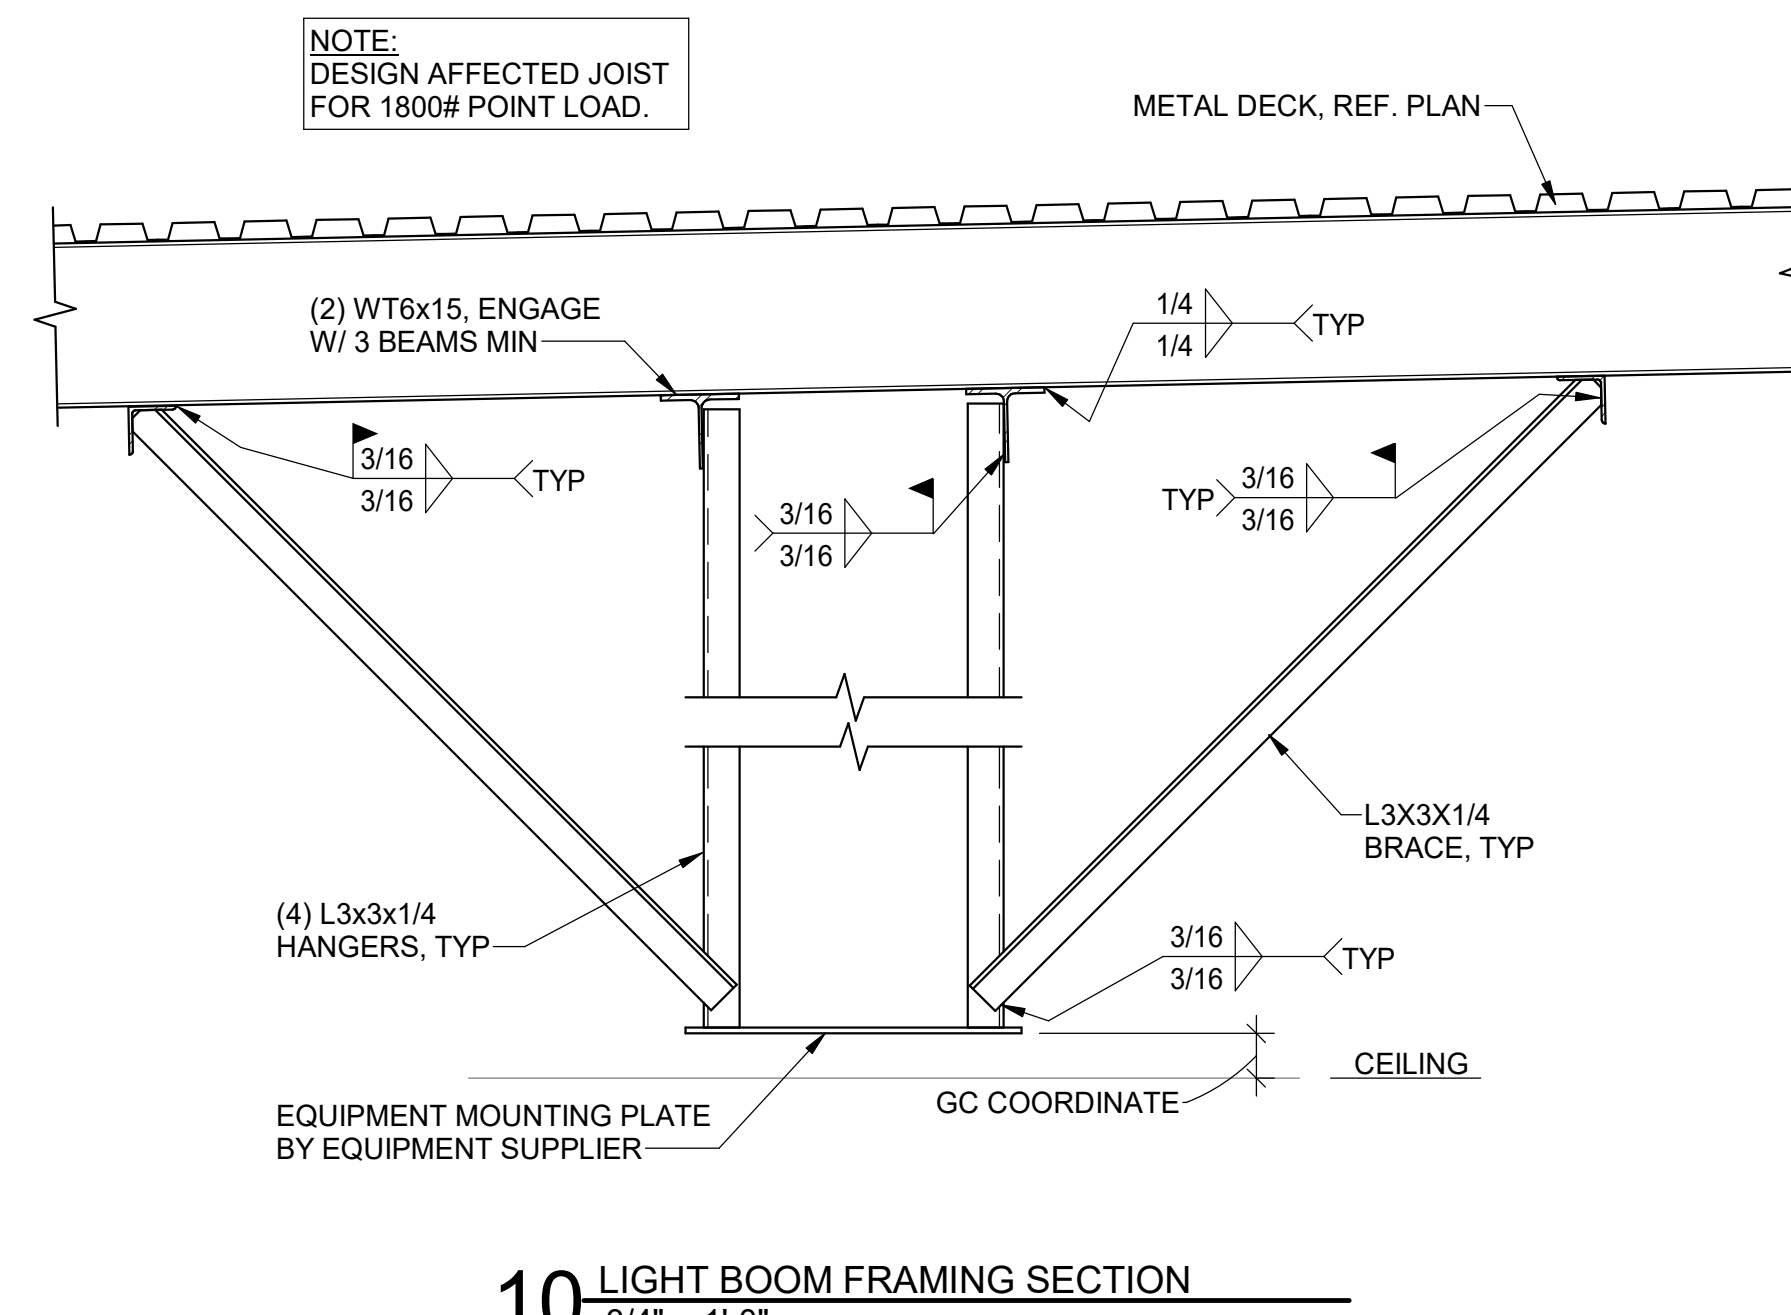


**10** LIGHT BOOM FRAMING SECTION  
3/4" = 1'-0"

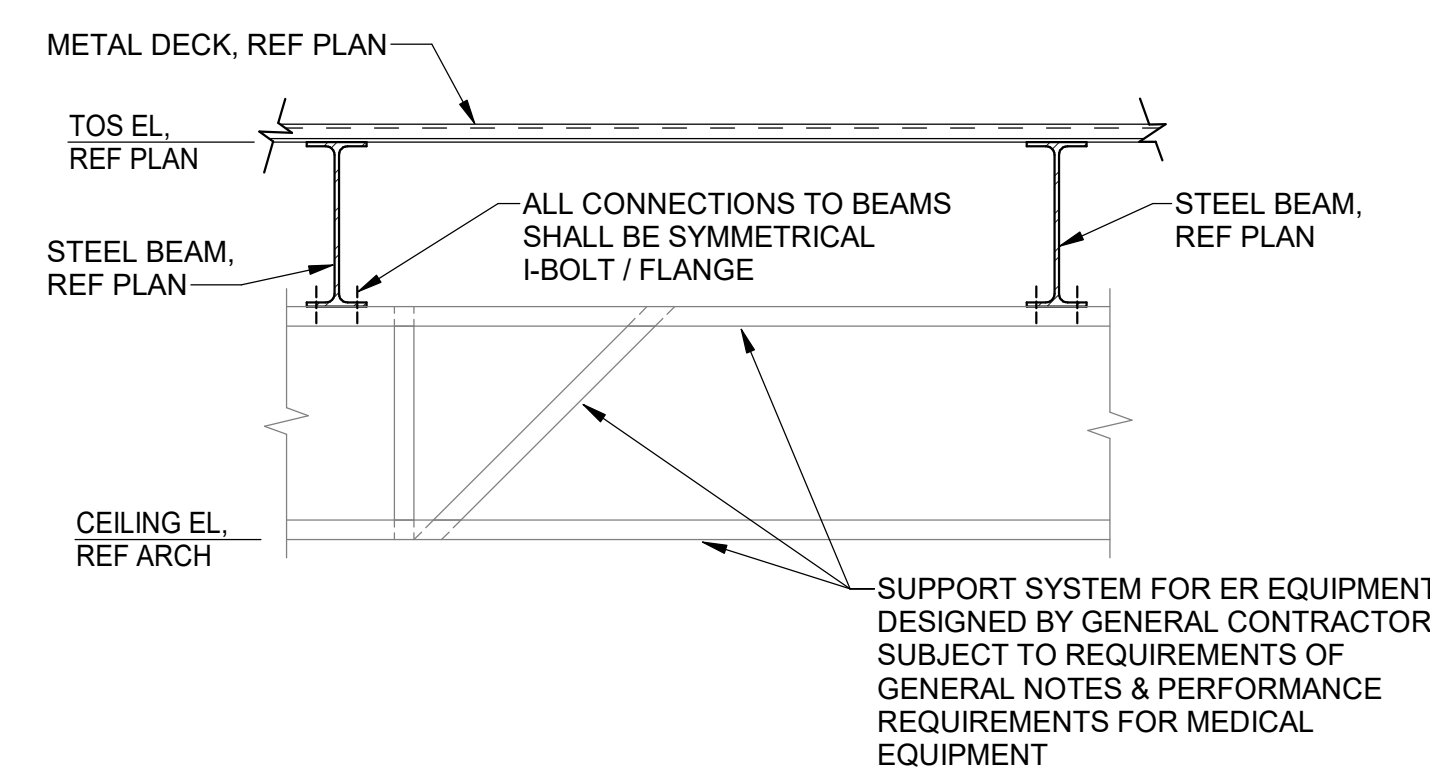


**11** EQUIPMENT HANGER DETAIL  
3/4" = 1'-0"

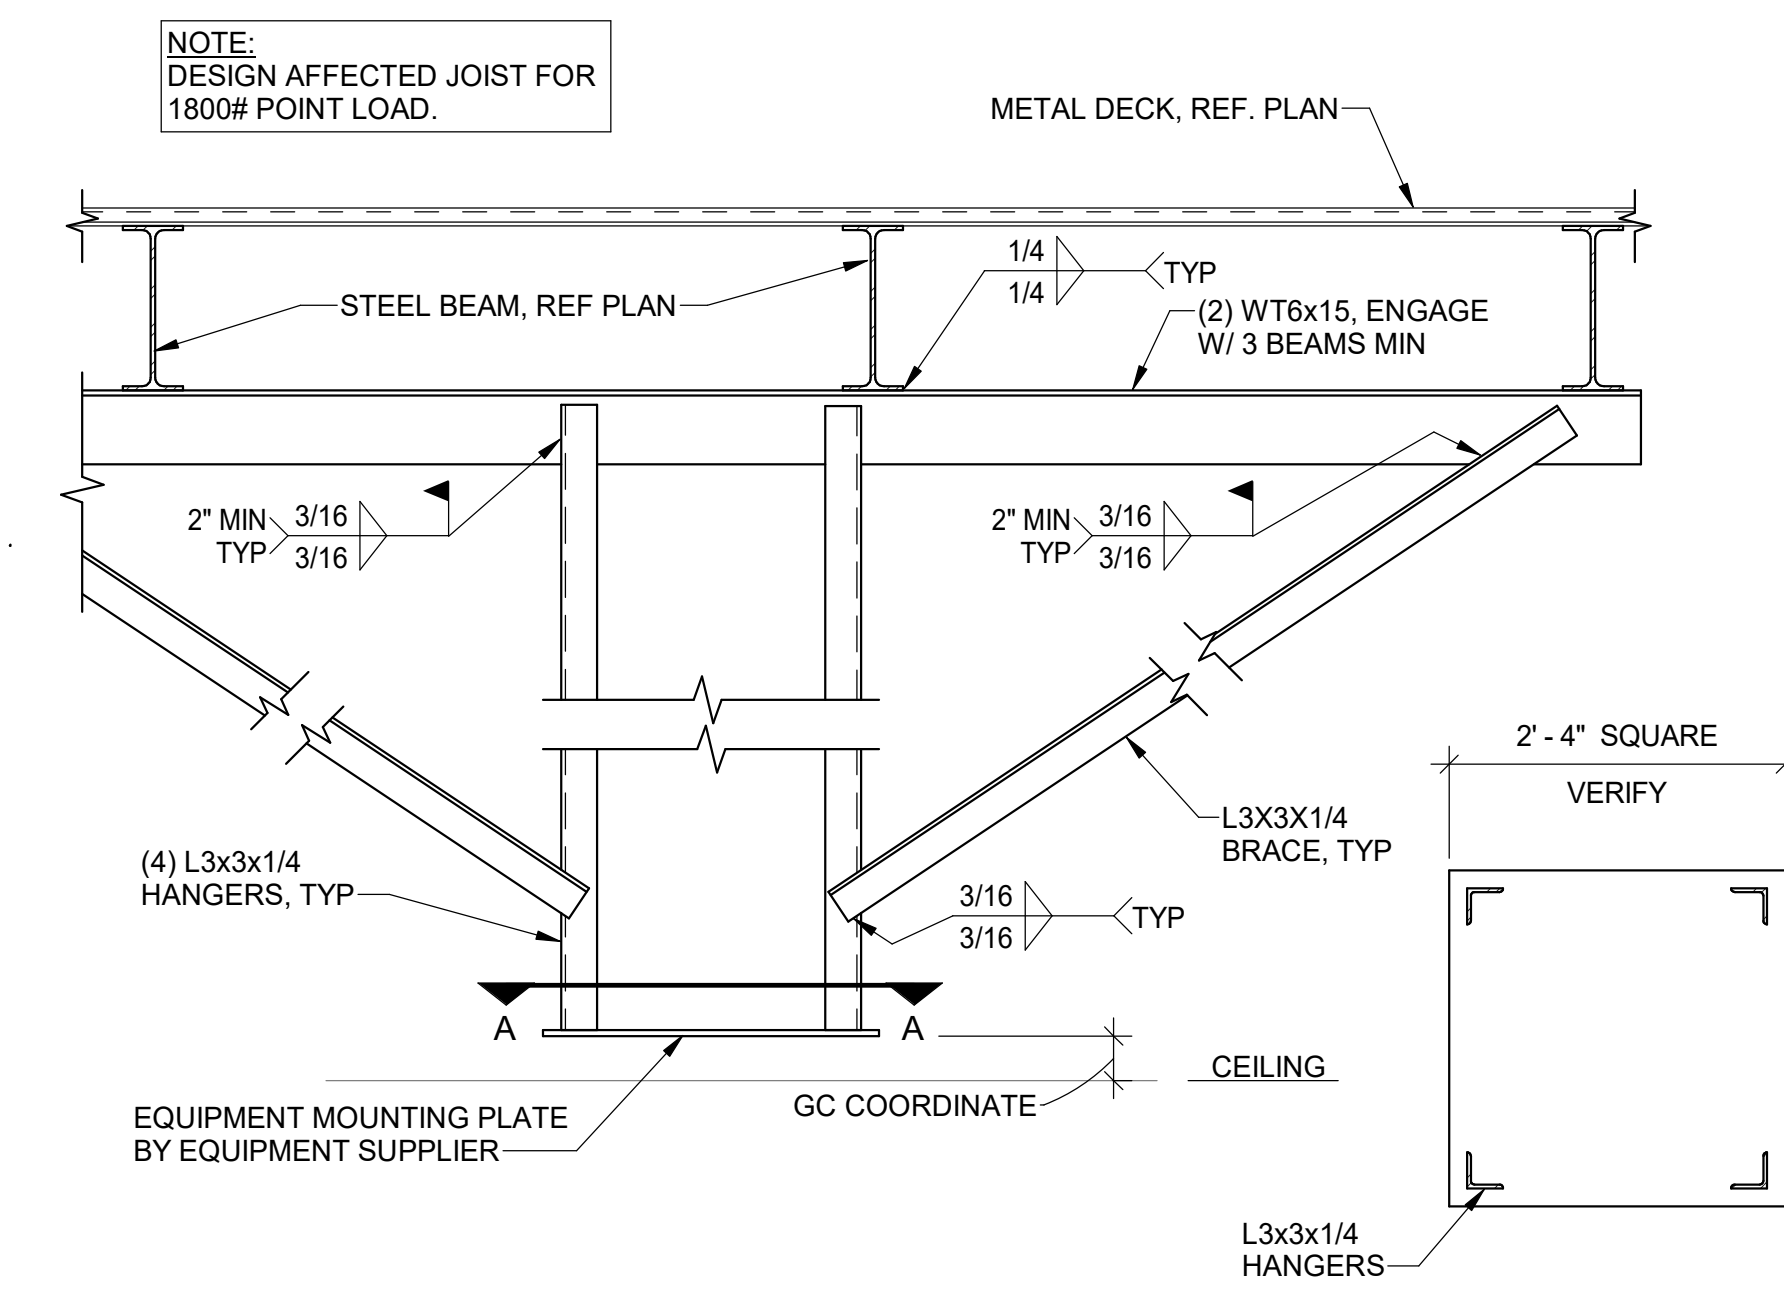


**12** EQUIPMENT HANGER DETAIL  
3/4" = 1'-0"

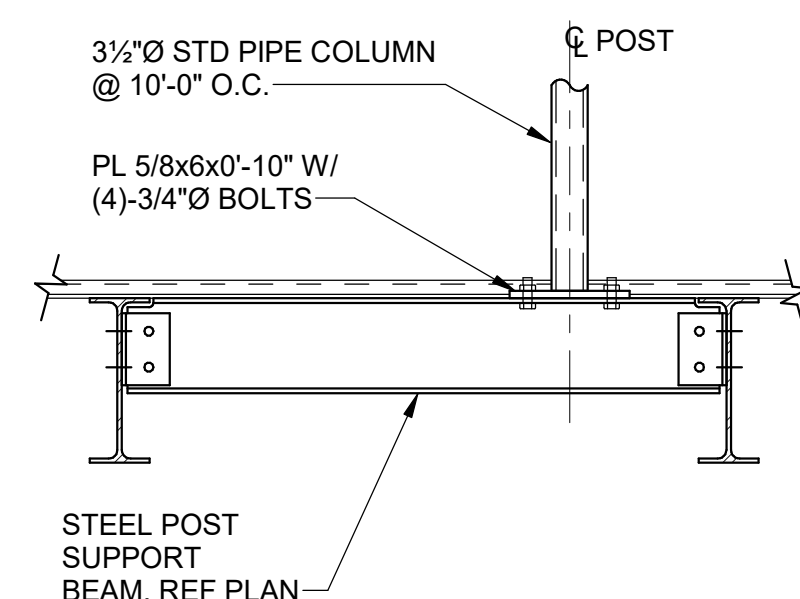

**13** SCREEN WALL POST SECTION  
3/4" = 1'-0"

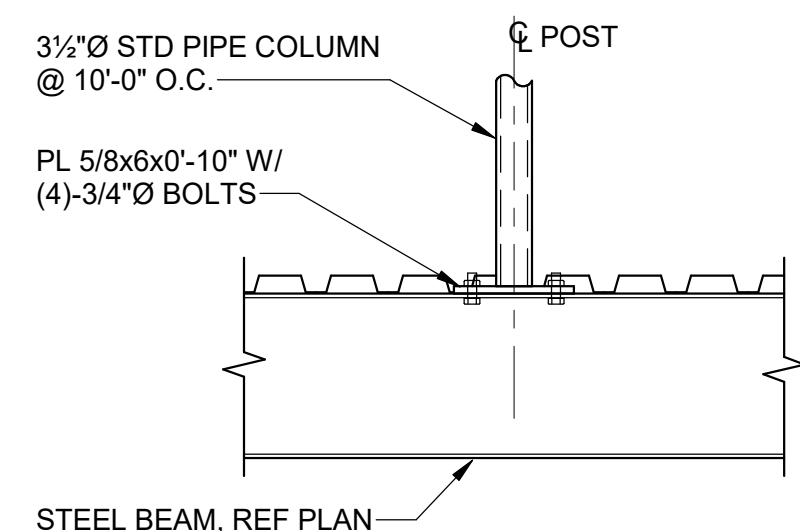

**14** SCREEN WALL POST SECTION  
3/4" = 1'-0"

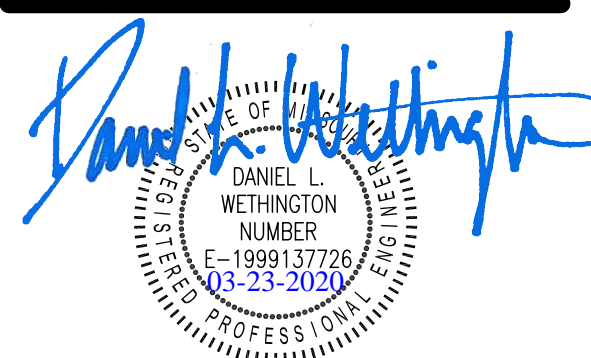

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 03/23/20  
Job Number 3-19058  
Drawn By JBR  
Checked By DLW



Revision  
Number Date Description

**S5.1**

© 2019 ACI/BOLAND, Inc.

FRAMING DETAILS



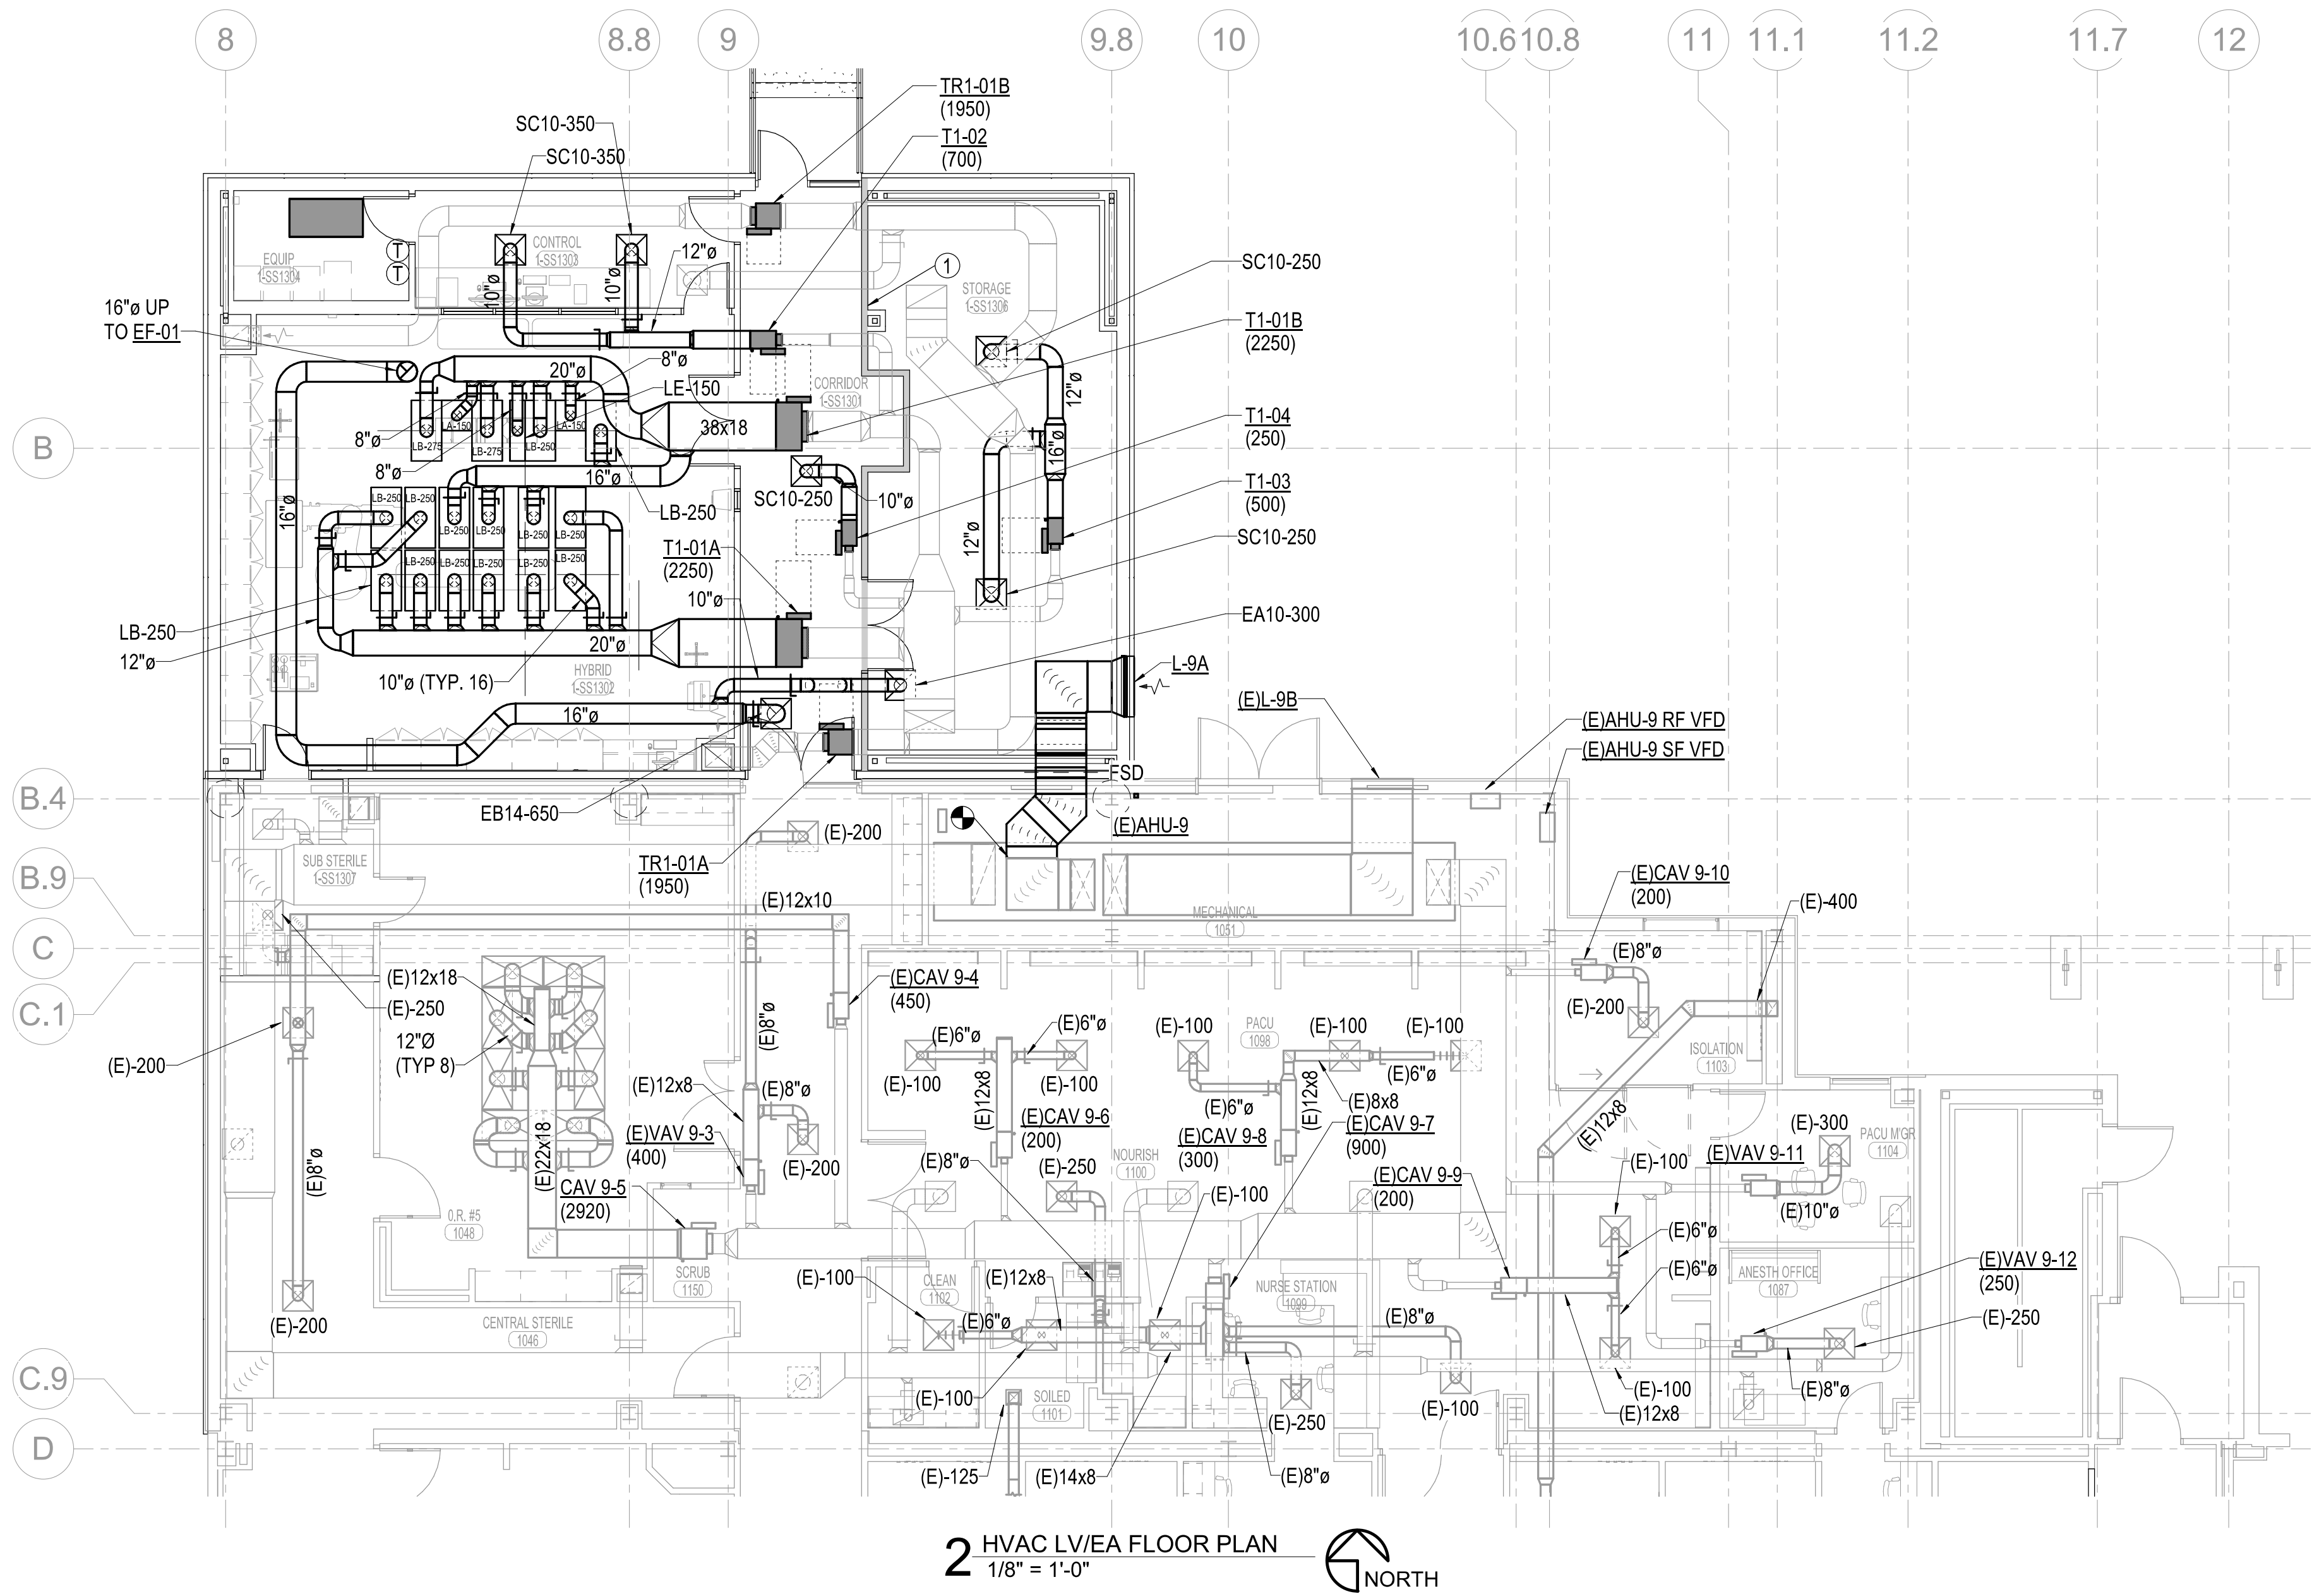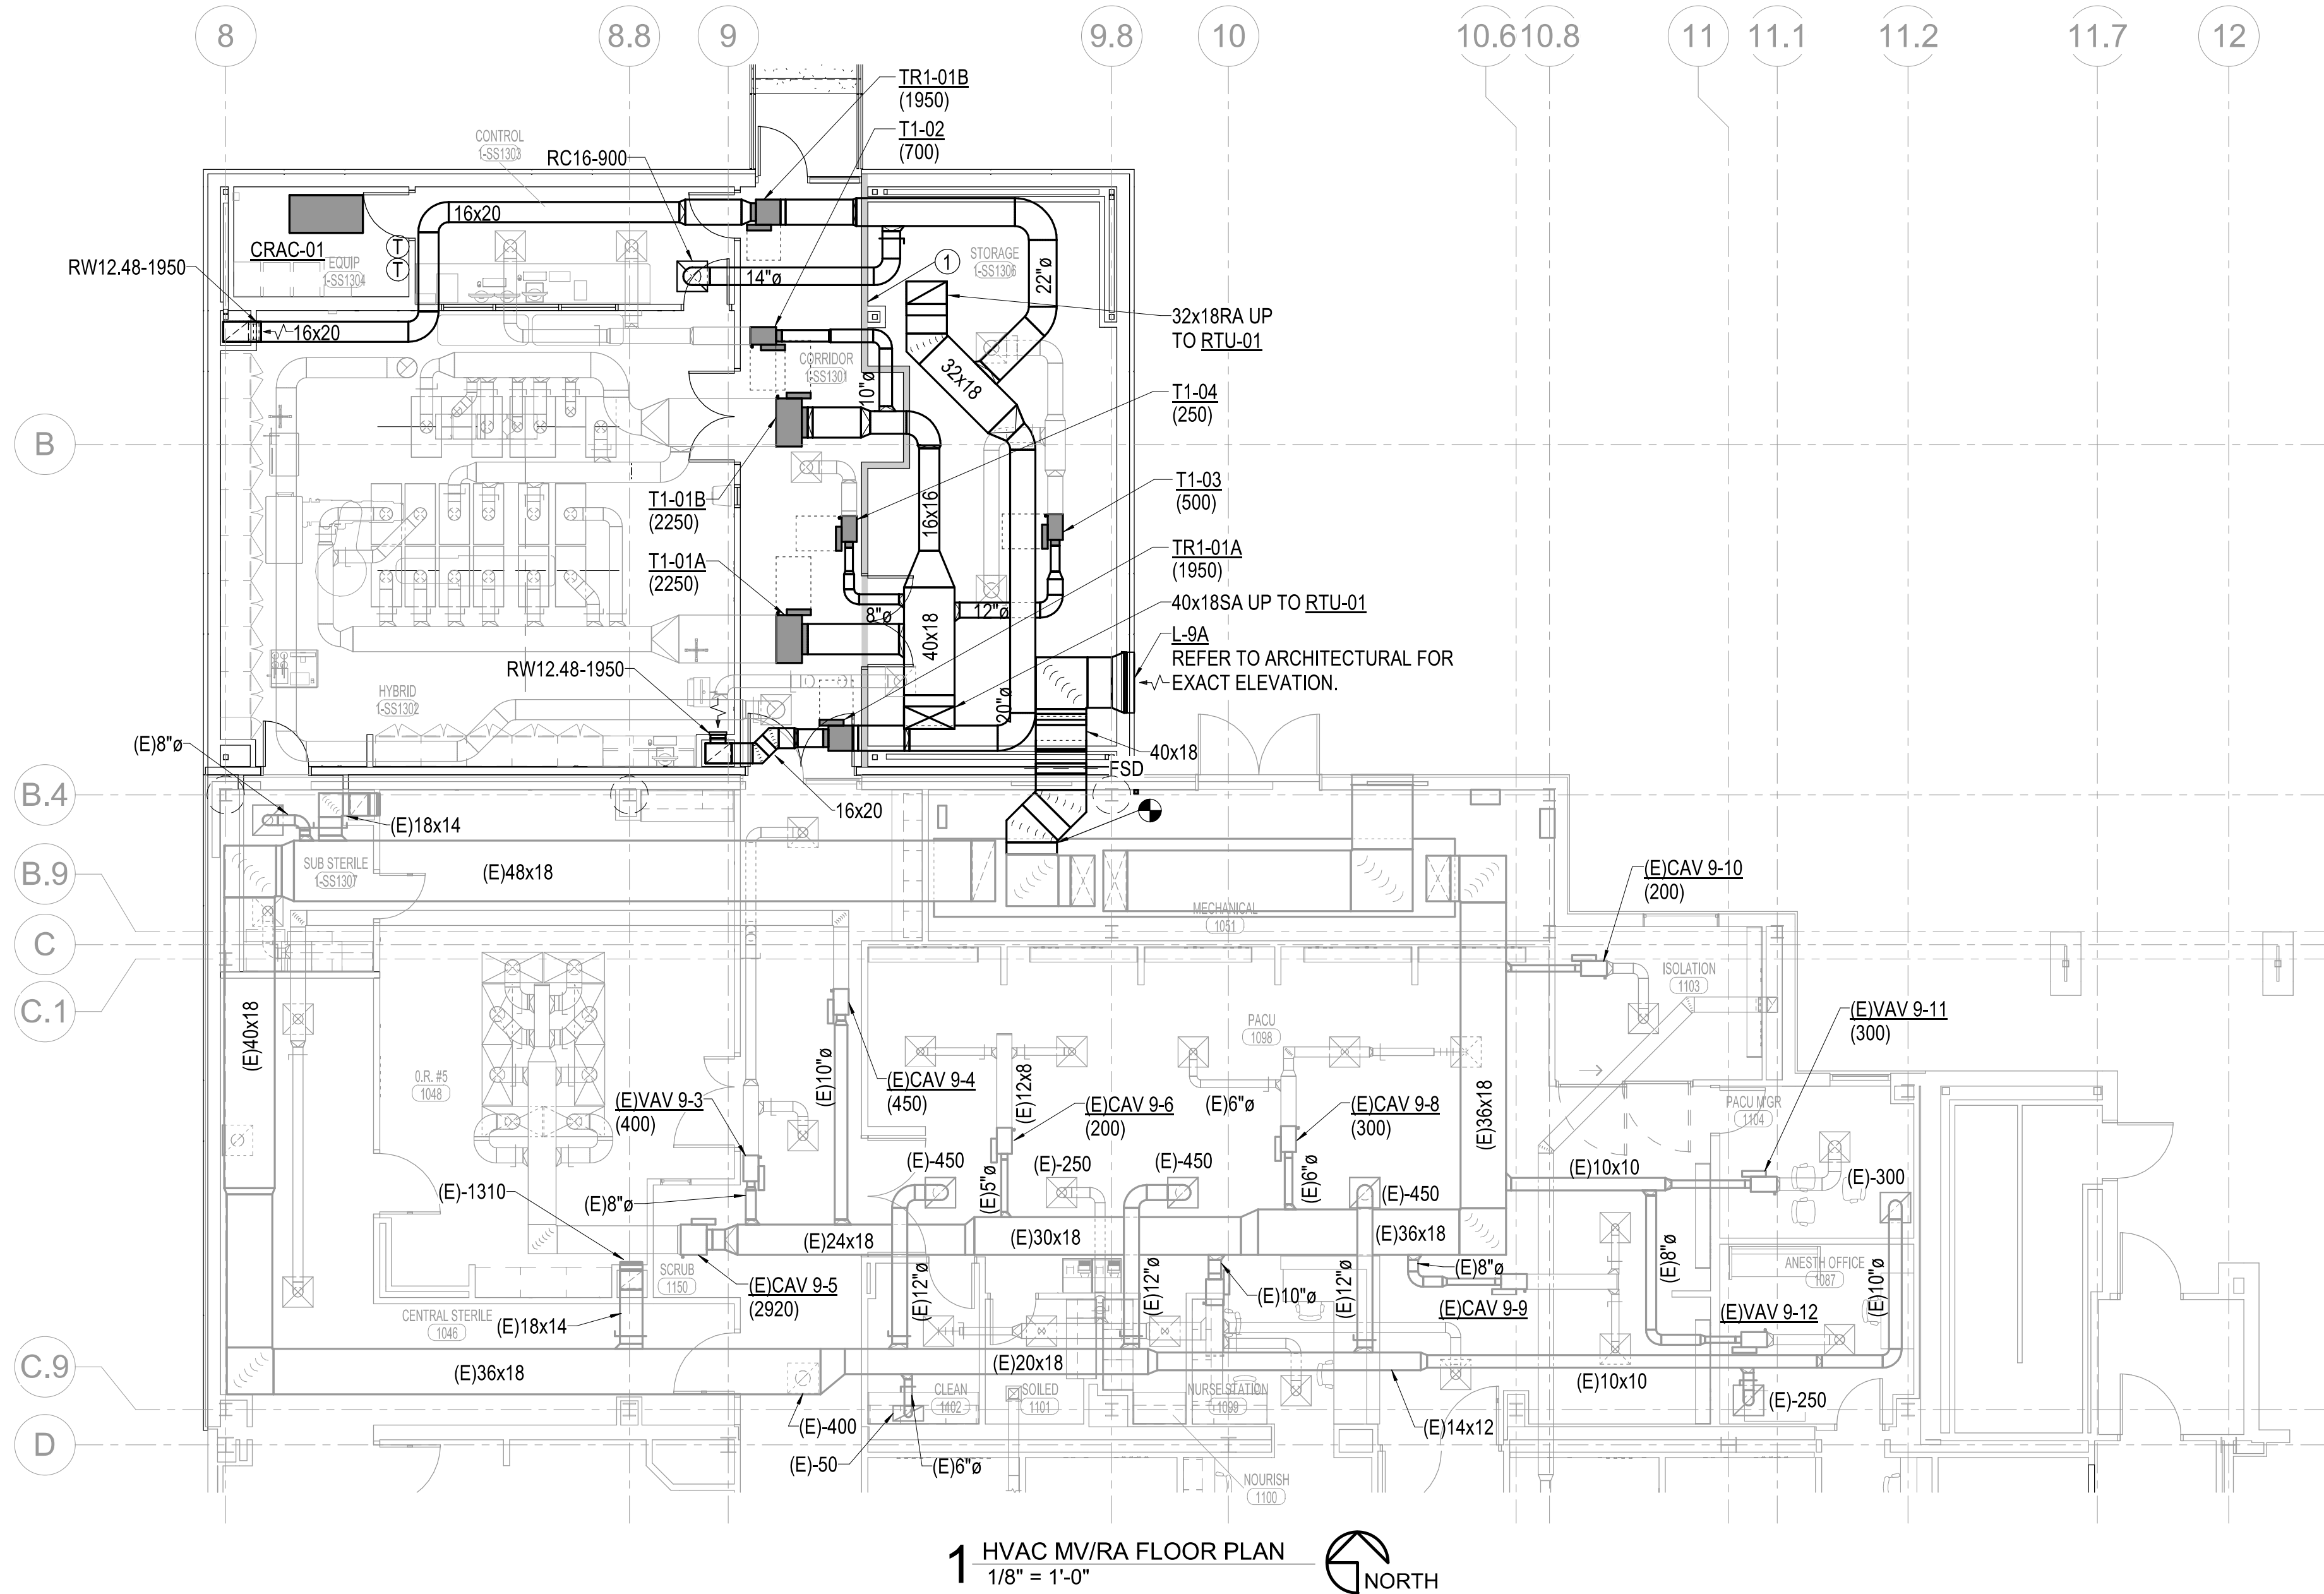

MECHANICAL GENERAL NOTES

- THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL IN THE CASE OF A SEISMIC EVENT. THEREFORE ALL STATIONARY EQUIPMENT ON THE FLOOR OR A MEZZANINE AND ALL CONCRETE PADS SHALL BE FIXED RIGIDLY TO THE STRUCTURE. ALL ROTATING OR RECIPROCATING OR VIBRATING EQUIPMENT SHALL BE INSTALLED WITH EARTHQUAKE SNUBBERS TO LIMIT MOVEMENT. ALL HANGING EQUIPMENT, PIPING, AND DUCTWORK SHALL BE BRACED TO THE STRUCTURE. REFER TO SPECIFICATION SECTION 21 0548 AND 23 0548.
- FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING WORK. BRING ANY DISCREPANCIES FROM THE DRAWINGS AND NOTES TO THE OWNER'S REPRESENTATIVE IMMEDIATELY. MINOR CHANGES IN THE SCOPE OF THE DEMOLITION WORK SHALL NOT JUSTIFY AN ADDITIONAL COST.
- CONTRACTOR SHALL PROVIDE PROTECTIVE PLASTIC DROP CLOTHS TO PROTECT THE EXISTING OCCUPIED AREAS AND EQUIPMENT FROM DUST AND DEBRIS DURING THE CONSTRUCTION WORK AND SHALL CLEAN THE AREAS OF ALL CONSTRUCTION DIRT DAILY, AND UPON COMPLETION OF THE WORK.
- ALL DRAINED PIPING RISERS AND MAINS SHALL BE REFILLED WITH FLUID AND PROPERLY VENTED BY THIS CONTRACTOR, ONCE NEW WORK HAS BEEN INSTALLED.
- COORDINATE WITH THE OWNER THE REMOVAL AND REPLACEMENT OF ALL EXISTING CEILINGS, WALL, ETC. AS REQUIRED FOR MECHANICAL DEMOLITION WORK.
- ALL CUTTING AND CHANNELING OF EXISTING NON-STRUCTURAL ELEMENTS SHALL BE ACCOMPLISHED IN A NEAT AND WORKMANLIKE MANNER WITHOUT REMOVAL OF EXCESS MATERIALS. THIS CONTRACTOR SHALL PATCH AND REPLACE WITH MATERIAL SIMILAR TO ADJACENT CONSTRUCTION.
- CUTTING OF STRUCTURAL MEMBERS IS NOT ALLOWED.
- THIS CONTRACTOR SHALL GIVE FULL COOPERATION TO THE OWNER IN THE SCHEDULING AND PROCEDURE OF WORK AND SHALL TAKE EVERY PRECAUTION TO PREVENT DAMAGE FROM FREEZING TO EXISTING SYSTEMS.
- RELOCATE EXISTING DUCTWORK, PIPING, ELECTRICAL CONDUITS, AND CABLING AS NECESSARY TO ACCOMPLISH FINAL INSTALLATION AS SHOWN.
- CAP ALL EXISTING DUCTWORK SHOWN TO BE DISCONNECTED AND NOT RE-USED AT MAINS. ALL ACCESSIBLE ABANDONED PIPING SHALL BE REMOVED.
- COORDINATE ROUTING OF PLUMBING AND HVAC PIPING WITH DUCTWORK, LIGHTS, ARCHITECTURAL CEILING AND STRUCTURAL ELEMENTS. PIPING SHALL RISE AND DROP, JOG OR OFFSET, AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL TAKE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE.
- ANY EXPENSES ARISING FROM LACK OF COORDINATION SHALL BE AT CONTRACTOR'S EXPENSE. ALL DUCT AND PIPE ELEVATIONS SHOWN IN PARENTHESIS ARE BOTTOM OF DUCT OR PIPE UNLESS INDICATED OTHERWISE ON PLANS.
- ALL SUPPLY, RETURN, AND EXHAUST BRANCHES TO GRILLES, REGISTERS, AND DIFFUSERS SHALL HAVE A MANUAL BALANCE DAMPER.
- COORDINATE EXACT LOCATION OF DIFFUSER/GRILLES AND ROUTING OF DUCTWORK WITH LIGHTS, PIPING, STRUCTURE AND ARCHITECTURAL CEILINGS. REFER TO ELECTRICAL DRAWINGS FOR EXACT CEILING GRID/LIGHTING LAYOUT.
- PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
- DO NOT ROUTE PIPING OR DUCTWORK OVER ELECTRICAL PANELS.
- ALL WORK SHALL COMPLY WITH THE LATEST ADOPTED LOCAL, STATE, AND FEDERAL CODES AND REGULATIONS.
- ALL DIFFUSERS ARE 4-WAY BLOW UNLESS OTHERWISE INDICATED ON PLANS.
- PROVIDE ACCESS DOORS TO DAMPERS, TERMINAL UNITS, HUMIDIFIERS AND OTHER EQUIPMENT INSTALLED ABOVE HARD CEILING.
- IT IS ASSUMED THAT MOST OF THE RETURN AIR AND EXHAUST AIR MAINS ARE MOUNTED HIGH ABOVE THE CEILING. BALANCE DAMPERS IN THE BRANCH DUCTS FROM THESE MAINS SHALL BE IN THE VERTICAL RISE OF BRANCH NO MORE THAN 48" (WHERE POSSIBLE) ABOVE THE GRILLES AND REGISTERS (SO BALANCE TECHNICIANS CAN EASILY ACCESS THEM THROUGH THE CEILING).
- ALL BRANCH SA, RA AND EA DUCTS SHALL HAVE A MANUAL BALANCED DAMPER WHETHER SHOWN OR NOT.
- MAINTAIN 25'-0" MINIMUM IN ANY DIRECTION FROM OUTDOOR AIR INTAKES ANY EXHAUST FAN, PLUMBING VENT, DRIVE, ALLEY OR LOADING DOCK.
- OUTDOOR AIR INTAKES SHALL BE MINIMUM 3'-0" ABOVE ROOF. ADJUST ROOF CURB SELECTIONS ACCORDINGLY.
- EQUIPMENT THAT REQUIRES MAINTENANCE SHALL NOT BE WITHIN 10' OF THE BUILDING EDGE.
- ALL DUCTWORK PENETRATING WALLS OF INCIDENTAL USE SPACES SHALL COMPLY WITH REQUIREMENTS OF (2018) IRC SECTION 717.5.2 EXCEPT 3.

PLAN NOTES

- FIRE BARRIER. REFER TO GENERAL NOTE 25. REFER TO ARCHITECTURAL LIFE SAFETY PLAN FOR ADDITIONAL INFORMATION.



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**




Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description

**M1.0**

© 2020 ACI/BOLAND, Inc.  
HVAC FLOOR PLANS



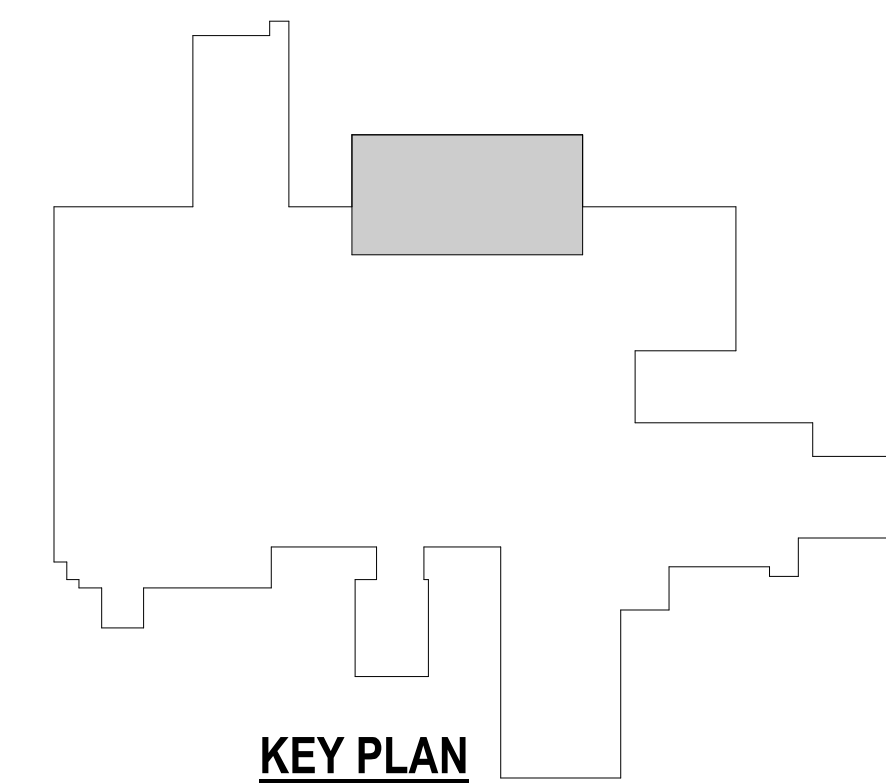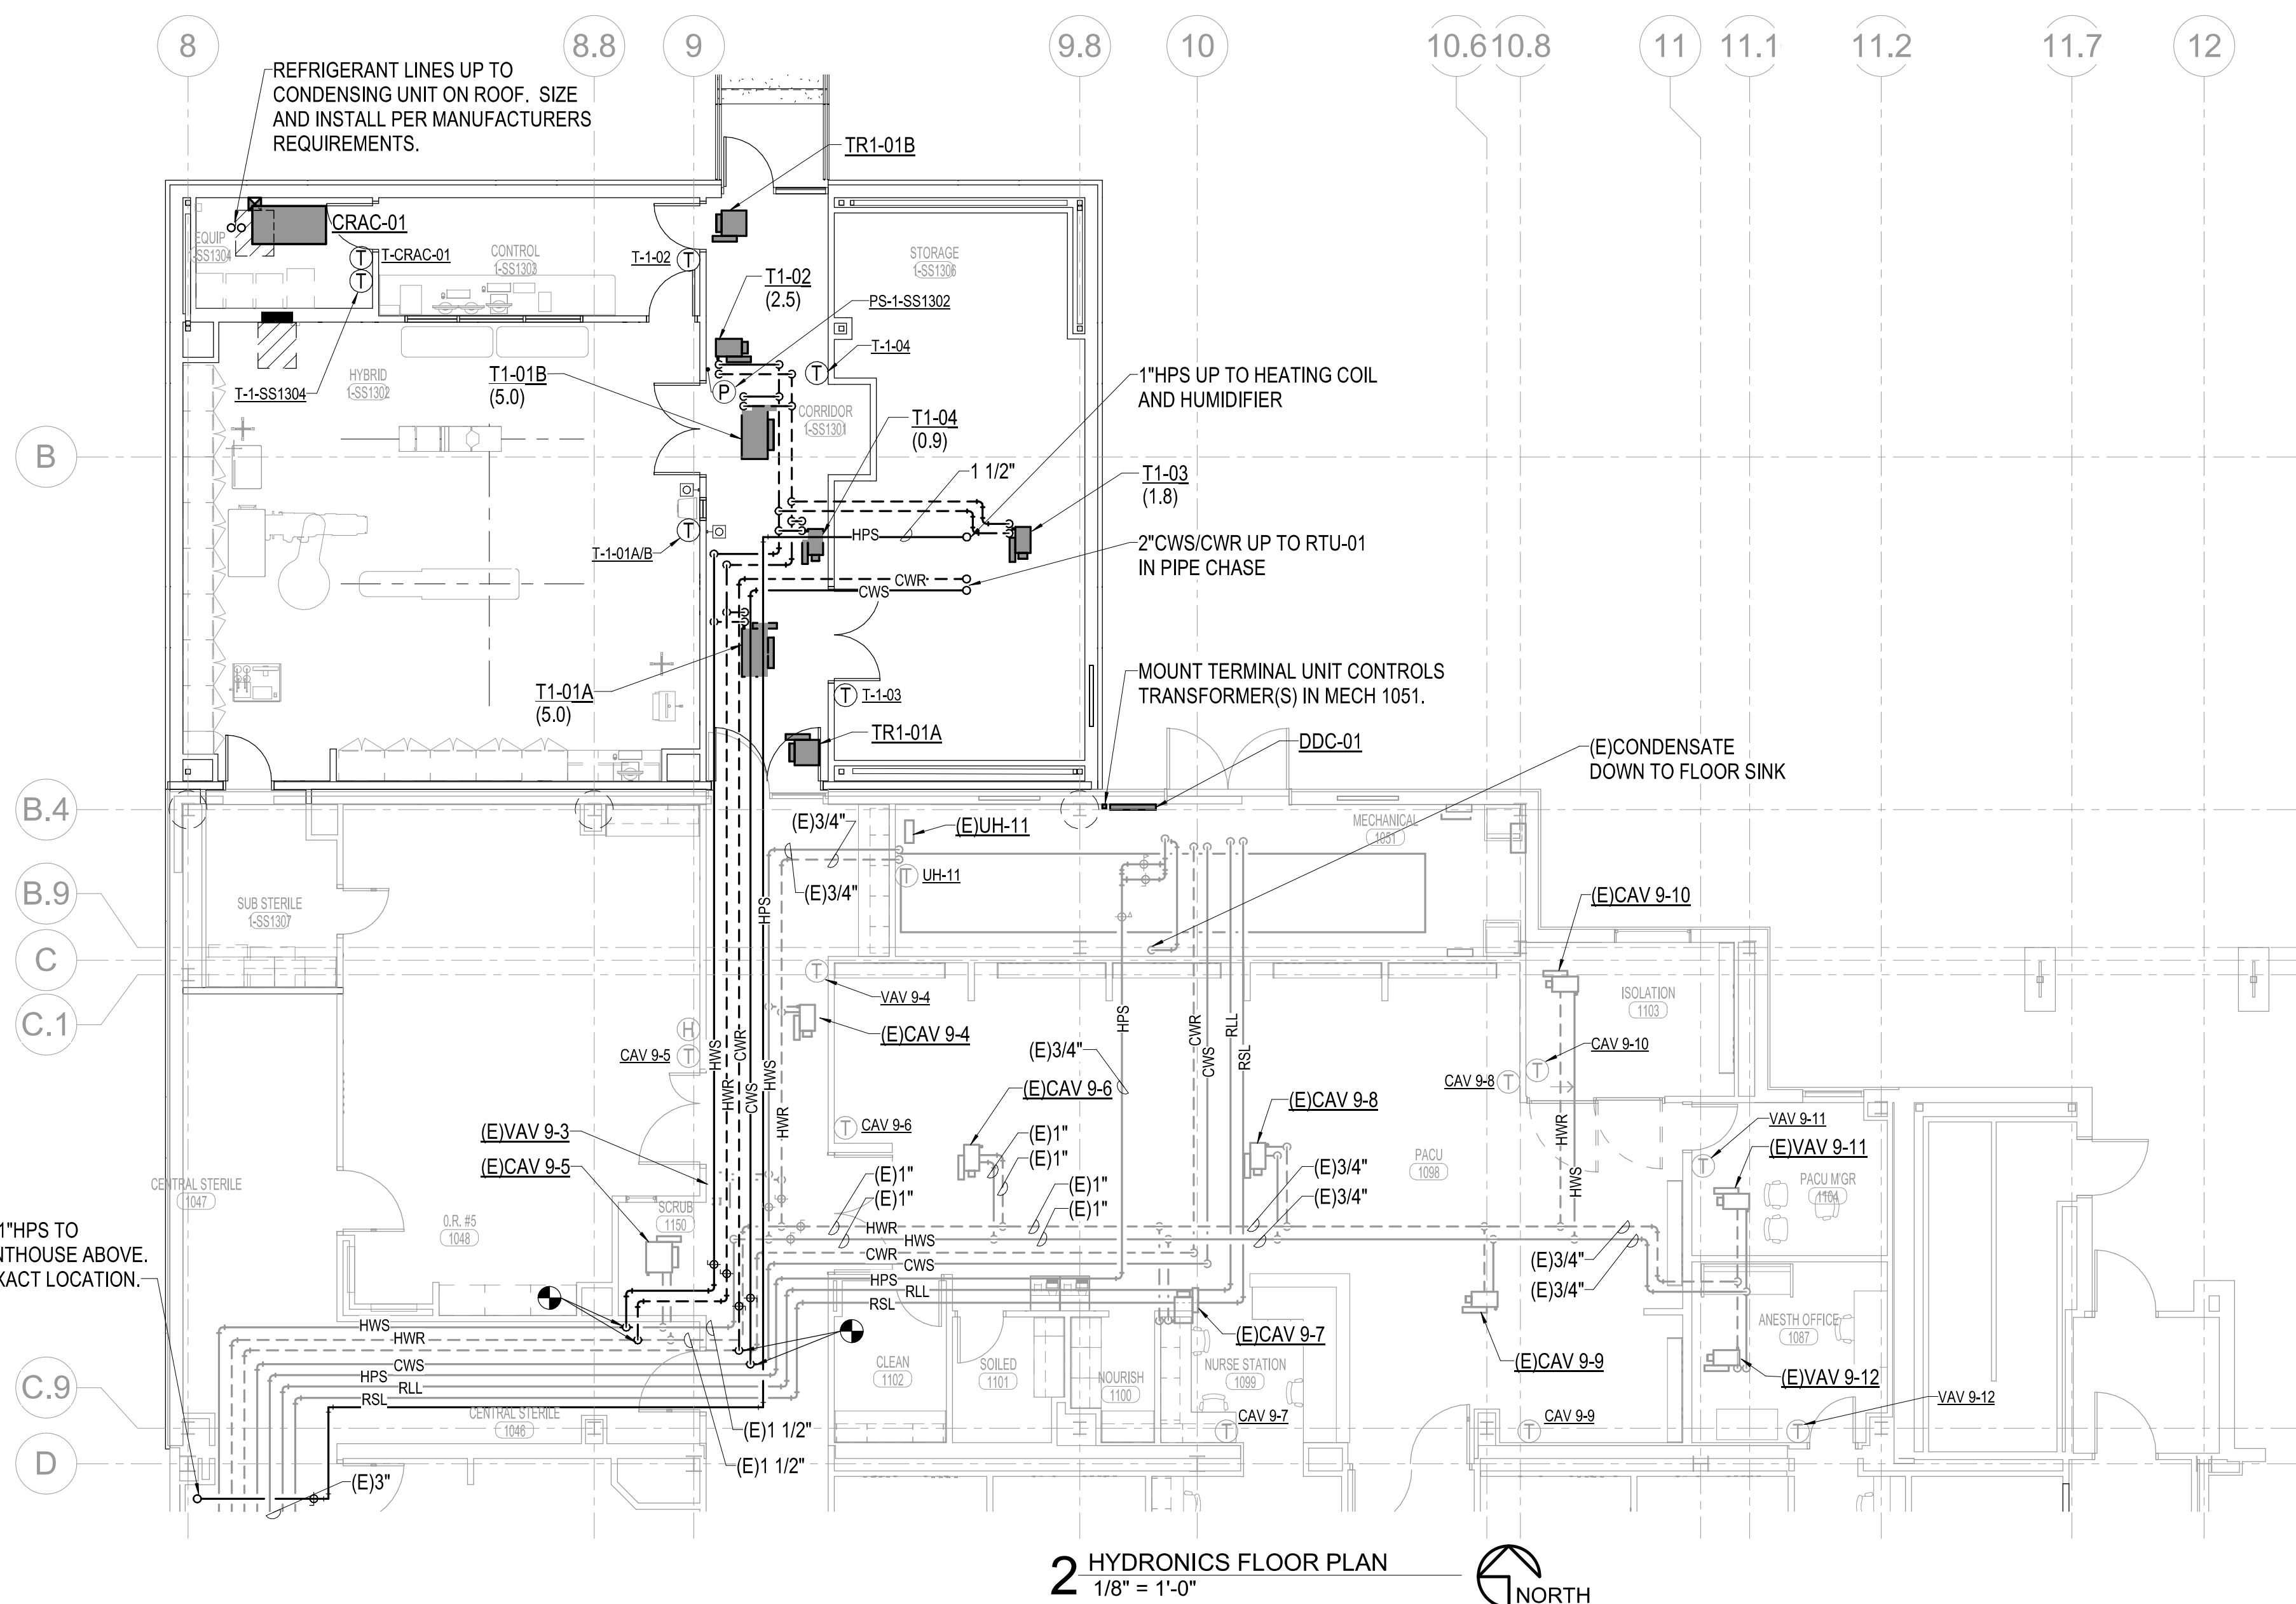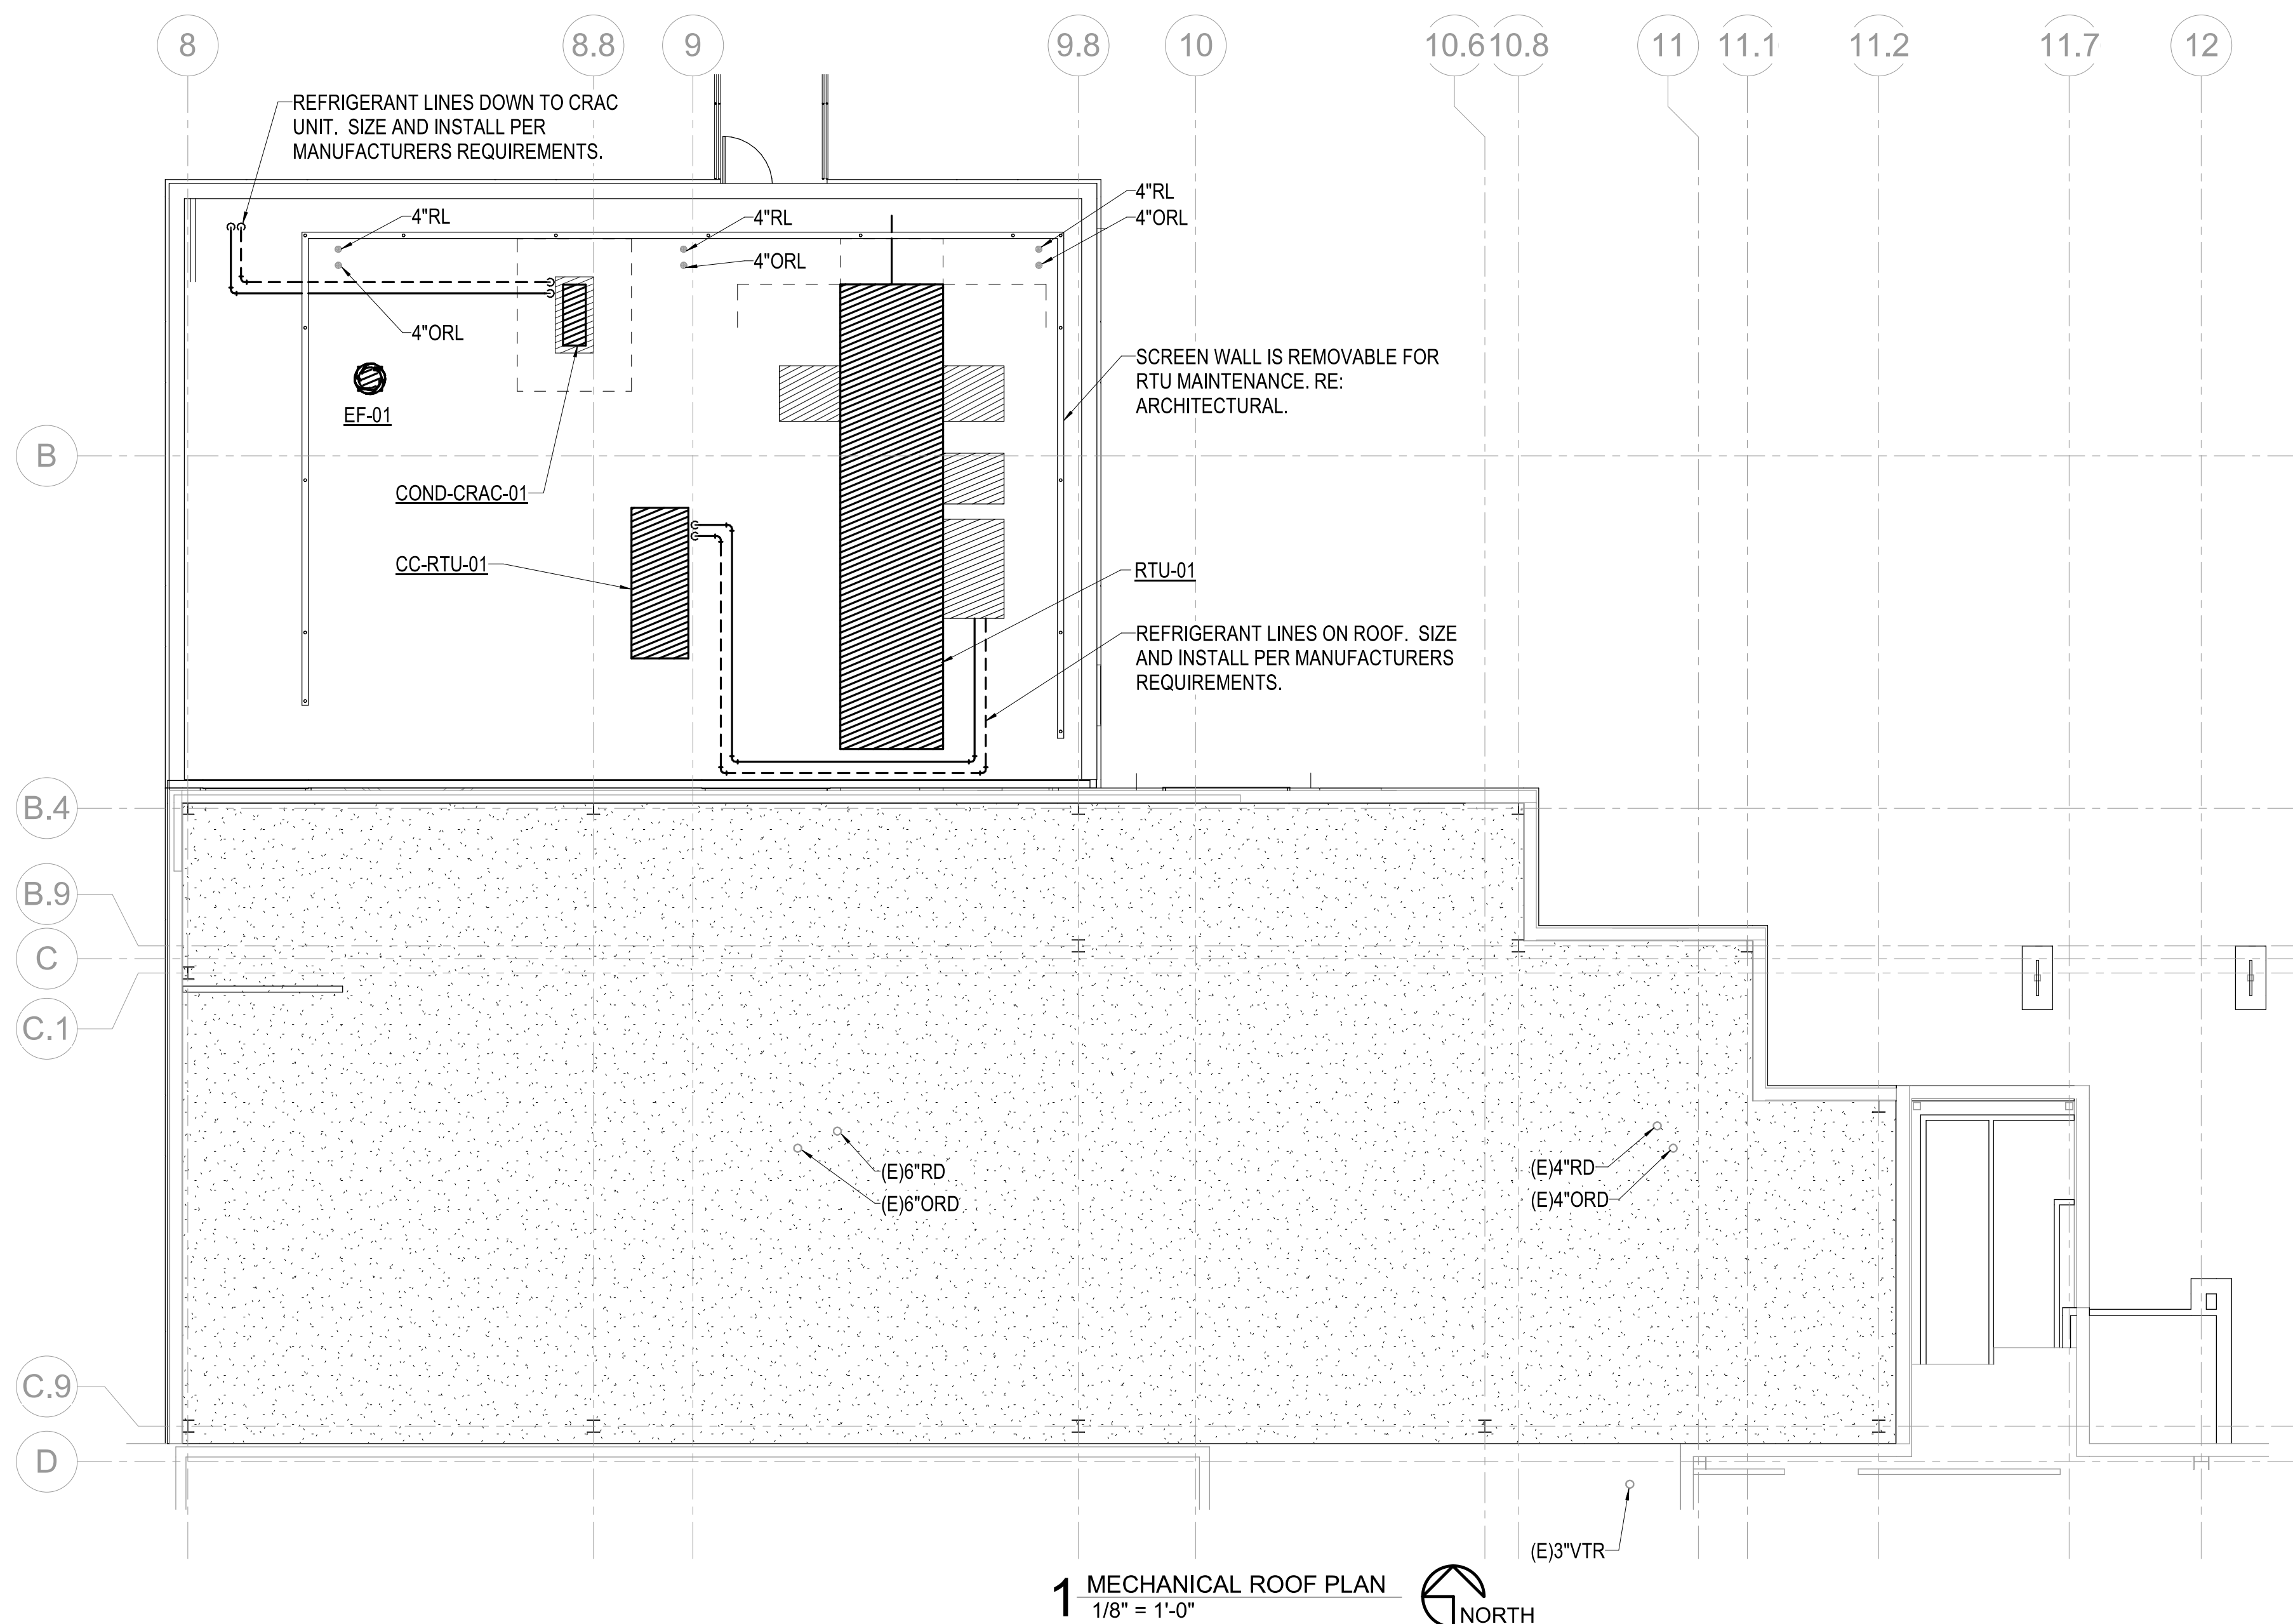

### MECHANICAL GENERAL NOTES

1. THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL. IN THE CASE OF A SEISMIC EVENT, THEREFORE ALL STATIONARY EQUIPMENT ON THE FLOOR OR A MEZZANINE AND ALL CONCRETE PADS SHALL BE FIXED RIGIDLY TO THE STRUCTURE. ALL ROTATING OR RECIPROCATING OR VIBRATING EQUIPMENT SHALL BE INSTALLED WITH EARTHQUAKE SNUBBERS TO LIMIT MOVEMENT. ALL HANGING EQUIPMENT, PIPING, AND DUCTWORK SHALL BE BRACED TO THE STRUCTURE. REFER TO SPECIFICATION SECTION 21 0548, AND 23 0548.
2. FIELD VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING WORK. BRING ANY DISCREPANCIES FROM THE DRAWINGS AND NOTES TO THE OWNER'S REPRESENTATIVE IMMEDIATELY. MINOR CHANGES IN THE SCOPE OF THE DEMOLITION WORK SHALL NOT JUSTIFY AN ADDITIONAL COST.
3. CONTRACTOR SHALL PROVIDE PROTECTIVE PLASTIC DROP CLOTHS TO PROTECT THE EXISTING OCCUPIED AREAS AND EQUIPMENT FROM DUST AND DEBRIS DURING THE CONSTRUCTION WORK AND SHALL CLEAN THE AREAS OF ALL CONSTRUCTION DIRT DAILY, AND UPON COMPLETION OF THE WORK.
4. ALL DRAINED PIPING RISERS AND MAINS SHALL BE REFILLED WITH FLUID AND PROPERLY VENTED BY THIS CONTRACTOR, ONCE NEW WORK HAS BEEN INSTALLED.
5. COORDINATE WITH THE OWNER THE REMOVAL AND REPLACEMENT OF ALL EXISTING CEILINGS, WALL, ETC. AS REQUIRED FOR MECHANICAL DEMOLITION WORK.
6. ALL CUTTING AND CHANNELING OF EXISTING NON-STRUCTURAL ELEMENTS SHALL BE ACCOMPLISHED IN A NEAT AND WORKMANLIKE MANNER WITHOUT REMOVAL OF EXCESS MATERIALS. THIS CONTRACTOR SHALL PATCH AND REPLACE WITH MATERIAL SIMILAR TO ADJACENT CONSTRUCTION.
7. CUTTING OF STRUCTURAL MEMBERS IS NOT ALLOWED.
8. THIS CONTRACTOR SHALL GIVE FULL COOPERATION TO THE OWNER IN THE SCHEDULING AND PROCEDURE OF WORK AND SHALL TAKE EVERY PRECAUTION TO PREVENT DAMAGE FROM FREEZING TO EXISTING SYSTEMS.
9. RELOCATE EXISTING DUCTWORK, PIPING, ELECTRICAL CONDUITS, AND CABLING AS NECESSARY TO ACCOMPLISH FINAL INSTALLATION AS SHOWN.
10. CAP ALL EXISTING DUCTWORK SHOWN TO BE DISCONNECTED AND NOT RE-USED AT MAINS. ALL ACCESSIBLE ABANDONED PIPING SHALL BE REMOVED.
11. COORDINATE ROUTING OF PLUMBING AND HVAC PIPING WITH DUCTWORK, LIGHTS, ARCHITECTURAL CEILING AND STRUCTURAL ELEMENTS. PIPING SHALL RISE AND DROP, JOG OR OFFSET, AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL TAKE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE.
12. ANY EXPENSES ARISING FROM LACK OF COORDINATION SHALL BE AT CONTRACTOR'S EXPENSE. ALL DUCT AND PIPE ELEVATIONS SHOWN IN PARENTHESIS ARE BOTTOM OF DUCT OR PIPE UNLESS INDICATED OTHERWISE ON PLANS.
13. ALL SUPPLY, RETURN, AND EXHAUST BRANCHES TO GRILLES, REGISTERS, AND DIFFUSERS SHALL HAVE A MANUAL BALANCE DAMPER.
14. COORDINATE EXACT LOCATION OF DIFFUSER/GRILLES AND ROUTING OF DUCTWORK WITH LIGHTS, PIPING, STRUCTURE AND ARCHITECTURAL CEILINGS. REFER TO ELECTRICAL DRAWINGS FOR EXACT CEILING GRID/LIGHTING LAYOUT. PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
15. DO NOT ROUTE PIPING OR DUCTWORK OVER ELECTRICAL PANELS.
17. ALL WORK SHALL COMPLY WITH THE LATEST ADAPTED LOCAL, STATE, AND FEDERAL CODES AND REGULATIONS.
18. ALL DIFFUSERS ARE 4-WAY BLOW UNLESS OTHERWISE INDICATED ON PLANS.
19. PROVIDE ACCESS DOORS TO DAMPERS, TERMINAL UNITS, HUMIDIFIERS AND OTHER EQUIPMENT INSTALLED ABOVE HARD CEILING.
20. IT IS ASSUMED THAT MOST OF THE RETURN AIR AND EXHAUST AIR MAINS ARE MOUNTED HIGH ABOVE THE CEILING. BALANCE DAMPERS IN THE BRANCH DUCTS FROM THESE MAINS SHALL BE IN THE VERTICAL RISE OF BRANCH NO MORE 48"(WHERE POSSIBLE) ABOVE THE GRILLES AND REGISTERS (SO BALANCE TECHNICIANS CAN EASILY ACCESS THEM THROUGH THE CEILING).
21. ALL BRANCH SA RA AND EA DUCTS SHALL HAVE A MANUAL BALANCE DAMPER WHETHER SHOWN OR NOT.
22. MAINTAIN 25'-0" MINIMUM IN ANY DIRECTION FROM OUTDOOR AIR INTAKES ANY EXHAUST FAN, PLUMBING VENT, DRIVE, ALLEY OR LOADING DOCK.
23. OUTDOOR AIR INTAKES SHALL BE MINIMUM 3'-0" ABOVE ROOF. ADJUST ROOF CURB SELECTIONS ACCORDINGLY.
24. EQUIPMENT THAT REQUIRES MAINTENANCE SHALL NOT BE WITHIN 1'-0" OF THE BUILDING EDGE.
25. ALL DUCTWORK PENETRATING WALLS OF INCIDENTAL USE SPACES SHALL COMPLY WITH REQUIREMENTS OF (2018) IBC SECTION 717.5.2 EXCEPTION 3.



**ACI**  
**BOLAND**  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



**Professional Engineering Consultants, P.A.**  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date	3-23-2020
Job Number	3-19058
Drawn By	DBB
Checked By	SPH

Revision		
Number	Date	Description

## M2.0

© 2020 ACI/BOLAND, Inc


---

MECHANICAL HYDRONICS & ROOF  
PLAN




3/23/2020 10:49:07 AM


\\BIN 360\\190711-000 - Lee's Summit Med Ctr Hybrid OR Addn\\190711-000-MASTER MECH-R19.rvt

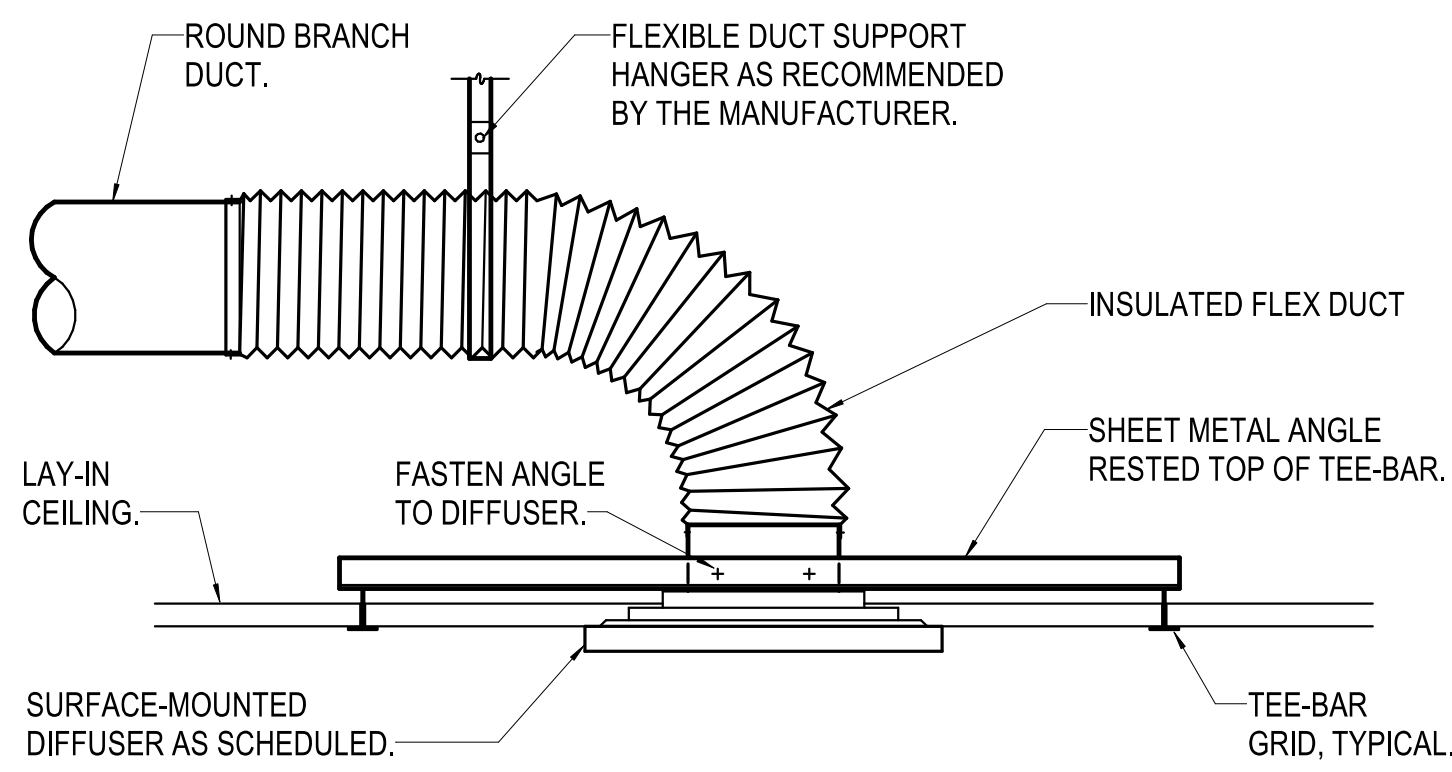


1 DIFFUSER - SURFACE-MOUNTED IN LAY-IN CEILING  
NO SCALE

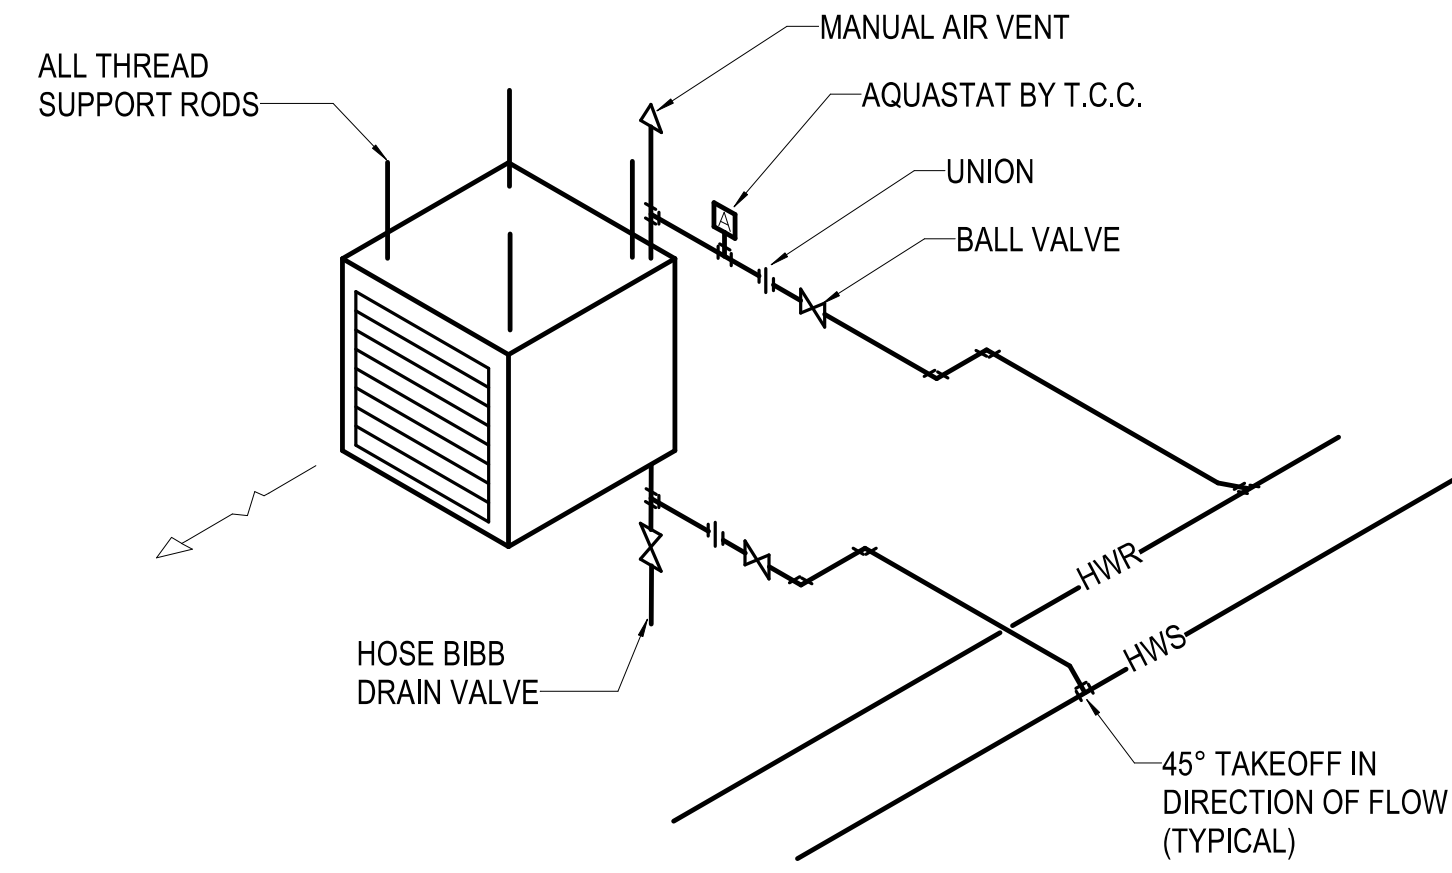


2 UNIT HEATER PIPING DETAIL - HOT WATER  
NO SCALE

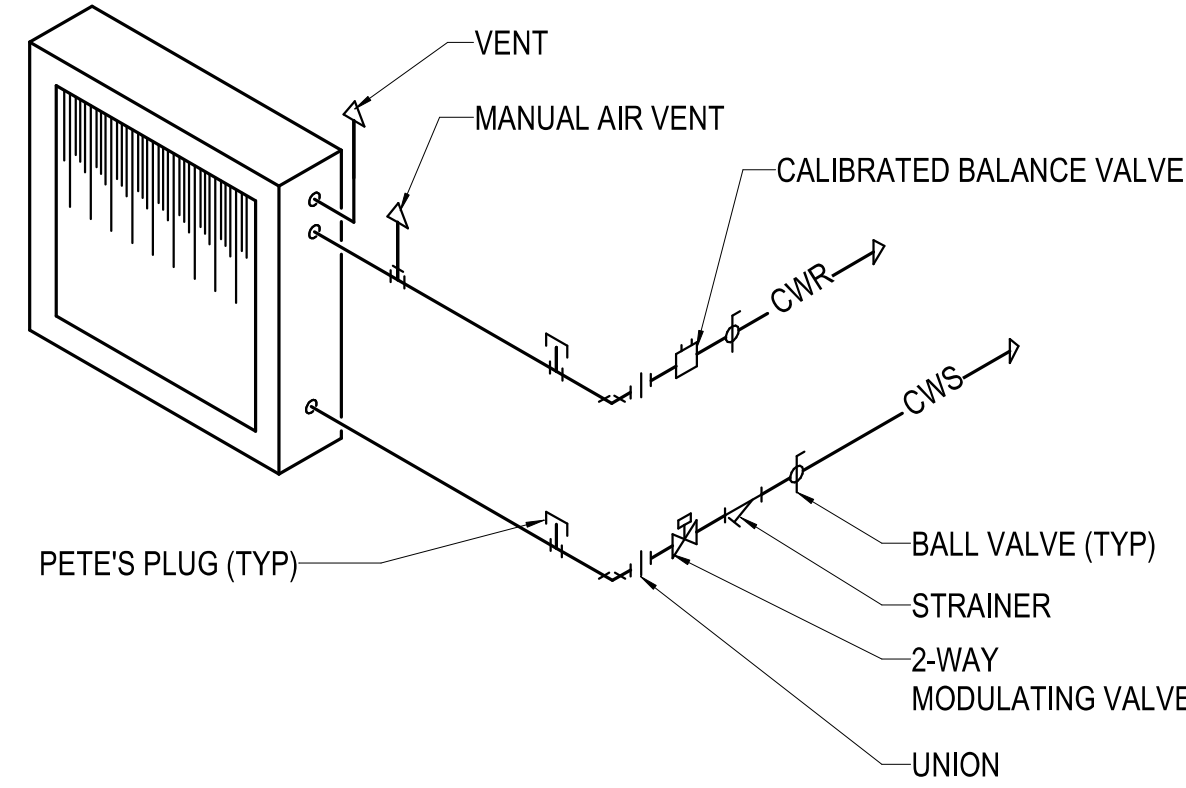


3 COIL PIPING DETAIL - CHILLED WATER  
NO SCALE

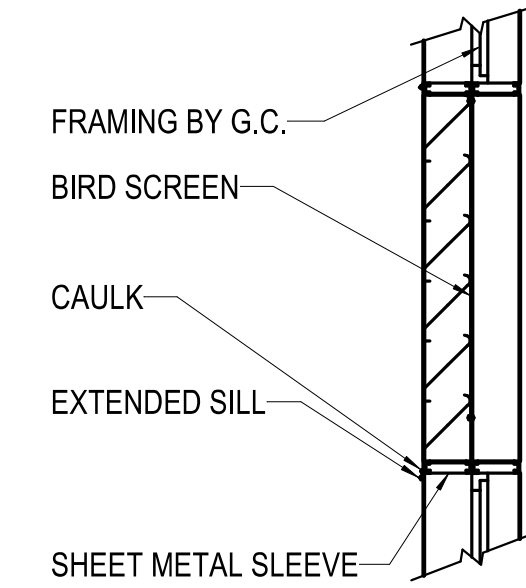


4 LOUVER DETAIL - STATIONARY  
NO SCALE

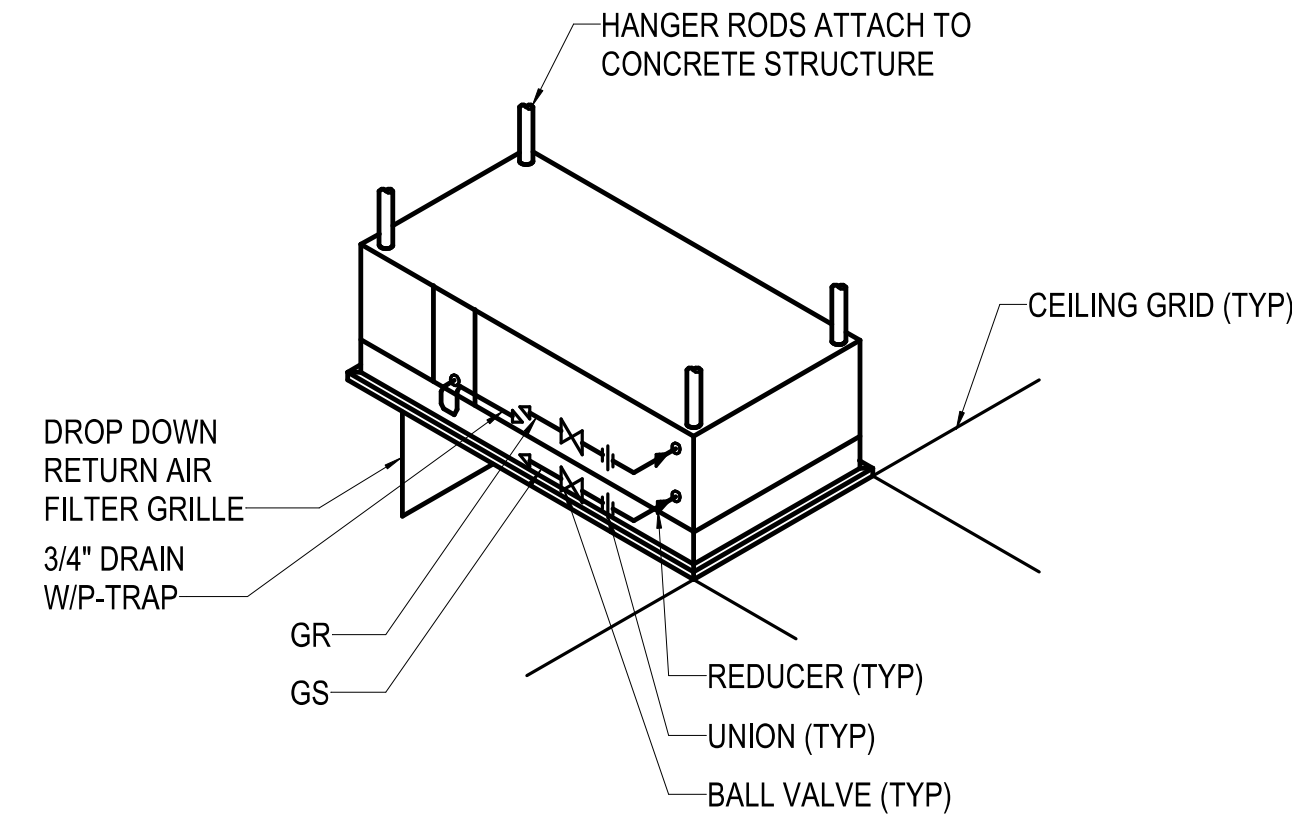


5 COMPUTER ROOM DETAIL  
NO SCALE

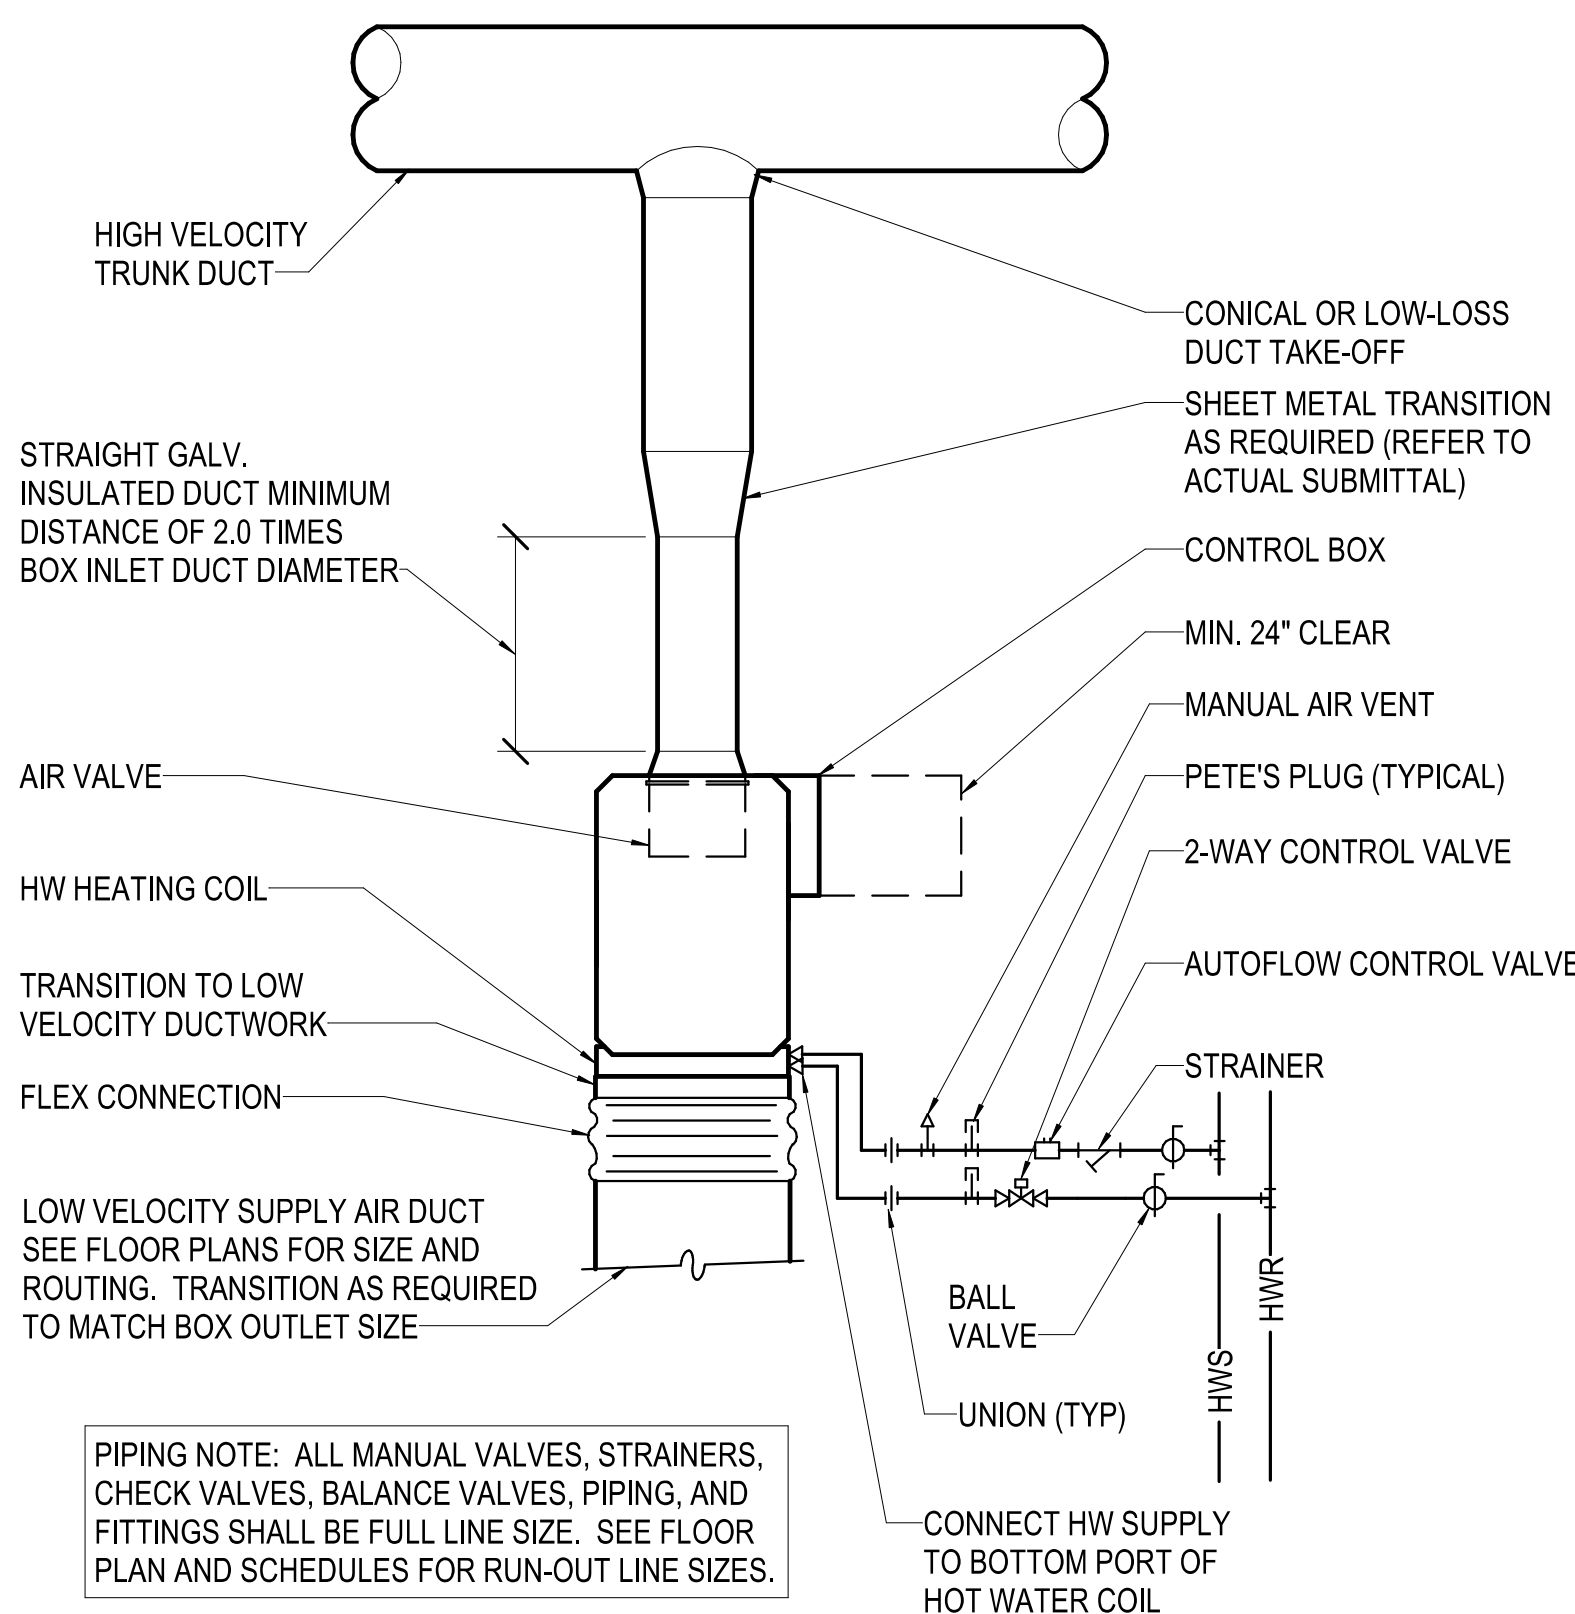

6 TERMINAL UNIT REHEAT  
NO SCALE

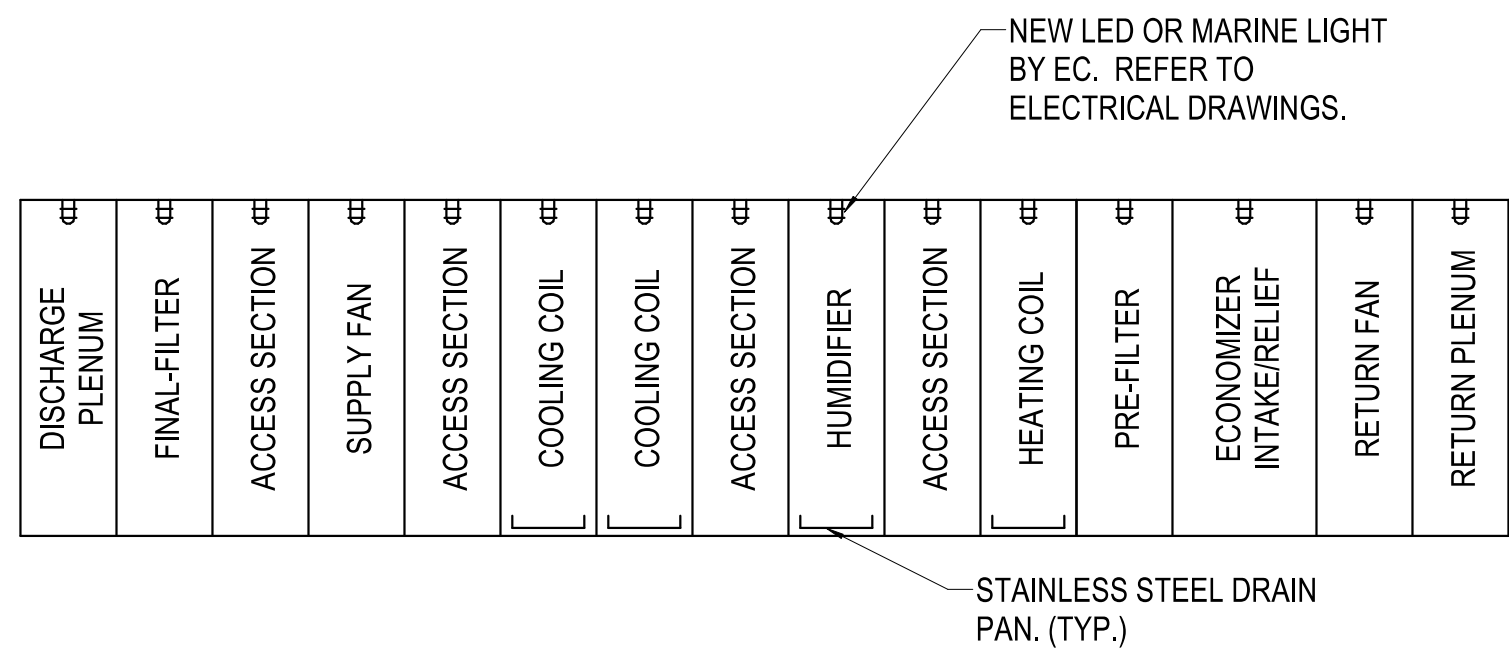


7 RTU UNIT CONFIGURATION  
NO SCALE

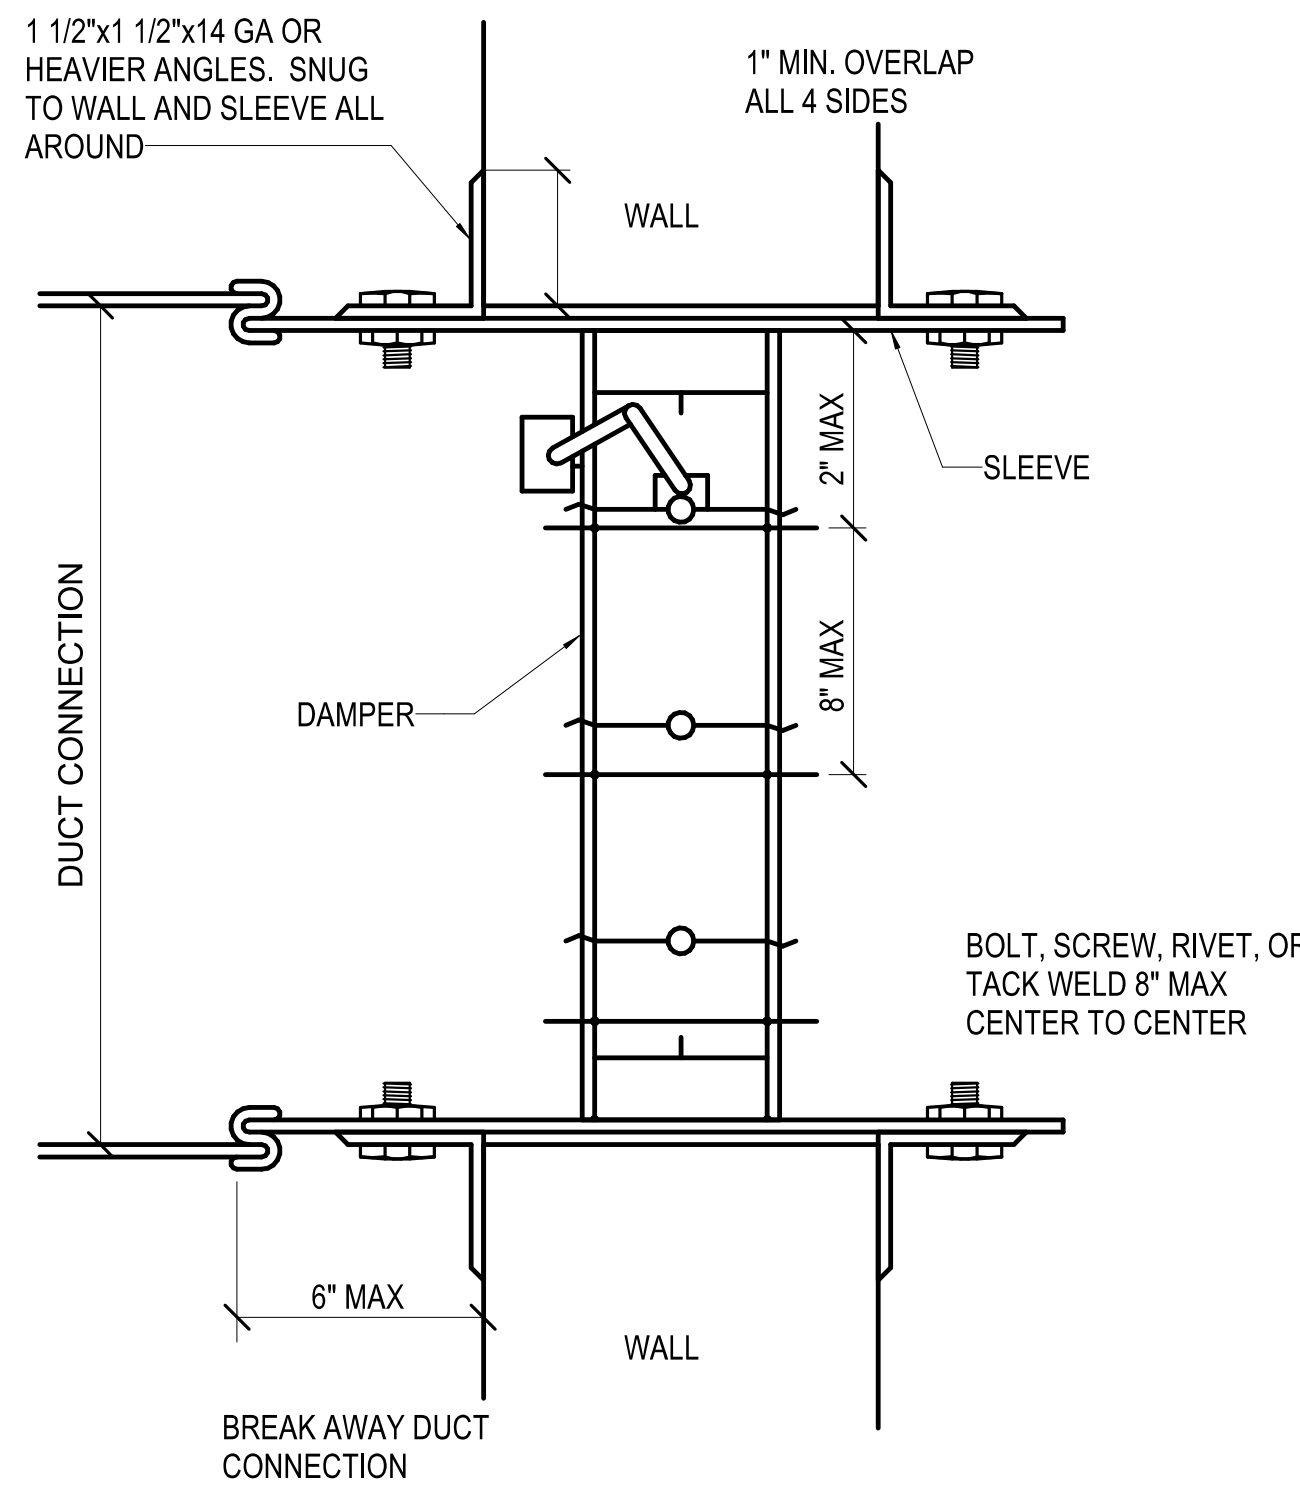


#### VERTICAL INSTALLATION

- NOTES:
1. OPENINGS IN FLOOR OR WALL SHALL BE 1/4" TO 1/2" LARGER THAN OVERALL SIZE OF FIRE DAMPER AND SLEEVE ASSEMBLY.
  2. ALL CONNECTIONS TO DUCTS SHALL CONFORM TO U.L. 555 AND NFPA 90-A.
  3. MOUNTING ANGLES SHALL BE MIN. OF 1 1/2" X 1 1/2" X 14 GA. AND BOLTED, TACK WELDED, RIVETED, OR SCREWED TO SLEEVE AT MAX. SPACING OF 12" AND MIN. OF 2 CONNECTIONS PER SIDE, TOP, AND BOTTOM. MOUNTING ANGLES SHALL OVERLAP WALL AND FLOOR OPENING MIN. OF 1" ON ALL SIDES. DAMPER SHALL BE ATTACHED TO SLEEVE IN SAME MANNER AND SPACING AS MOUNTING ANGLES.
  4. THE LENGTH OF THE SLEEVE EXTENDING BEYOND THE WALL OR FLOOR OPENING SHALL NOT EXCEED 6" ON EACH SIDE.
  5. DAMPER INSTALLATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS AND SHALL CONFORM TO NFPA 90-A AND UL 555.
  6. HARDCAST ALL FRAMES PRIOR TO INSTALLATION.

8 DAMPER INSTALLATION DETAIL - FIRE/SMOKE  
NO SCALE

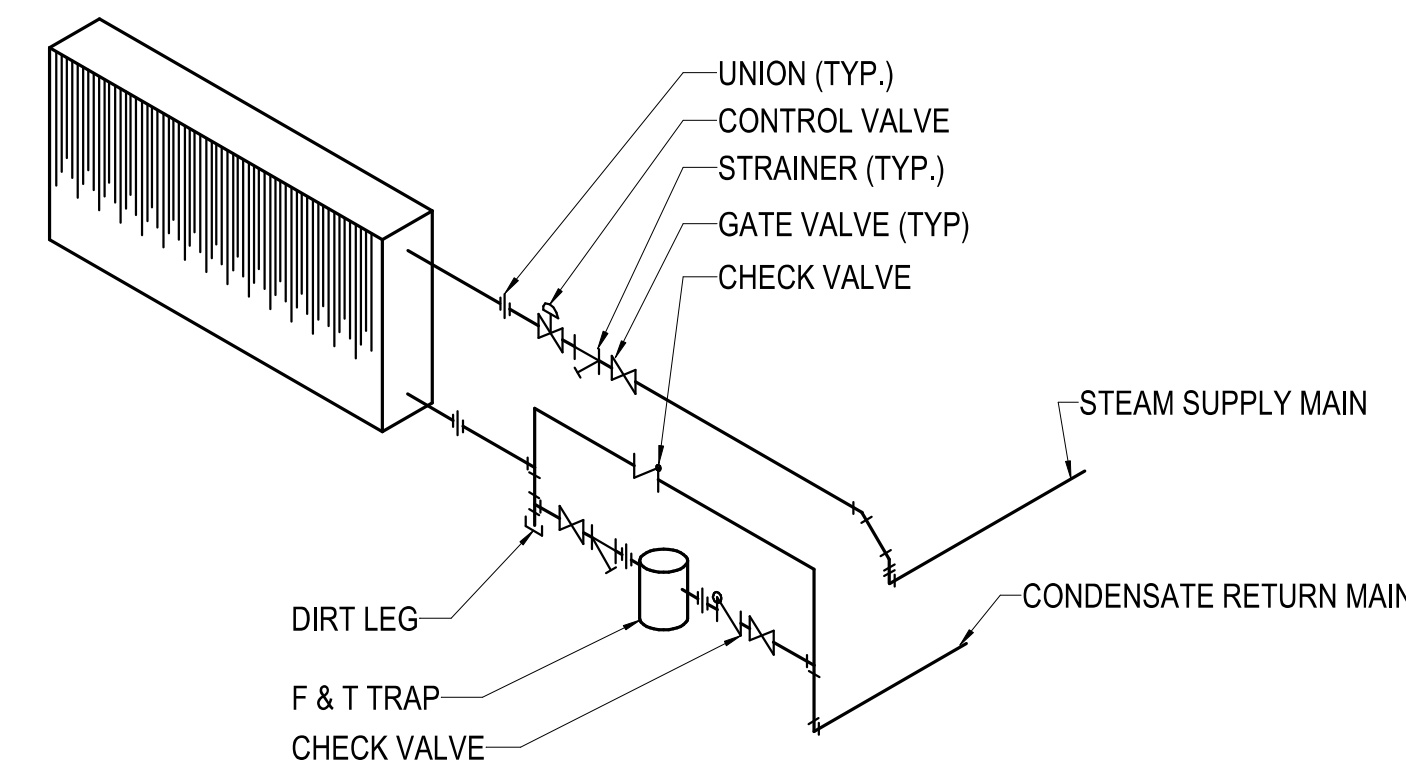

9 COIL PIPING DETAIL - STEAM HEATING  
NO SCALE

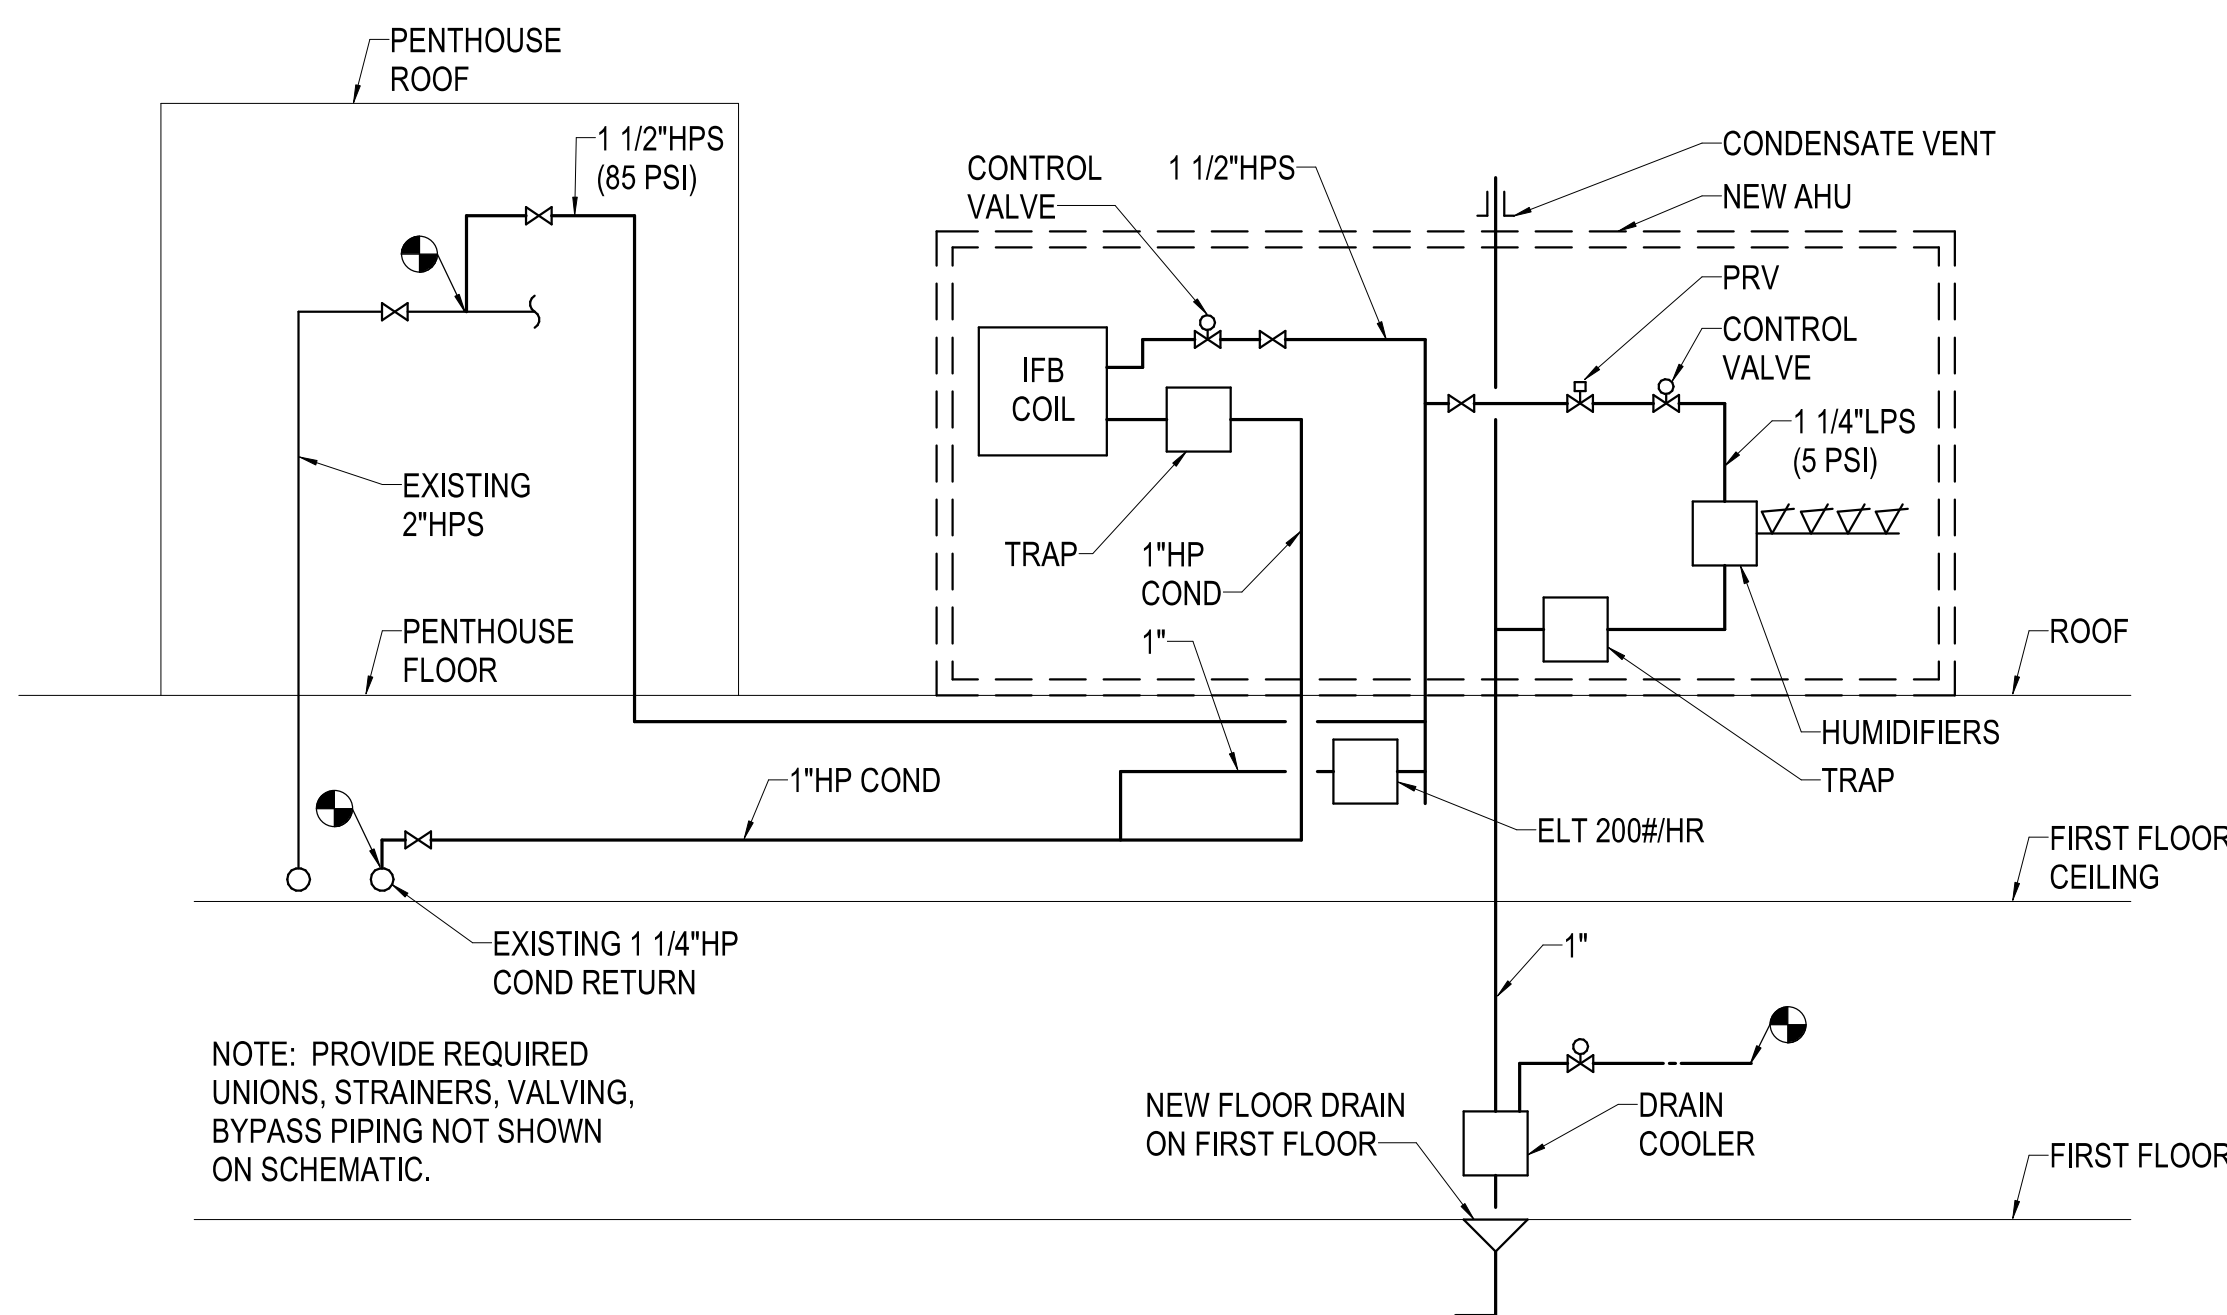

10 STEAM PIPING SCHEMATIC  
NO SCALE



**ACI**  
**BOLAND**  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**










Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description

**M3.0**

© 2020 ACI/BOLAND, Inc.  
MECHANICAL DETAILS



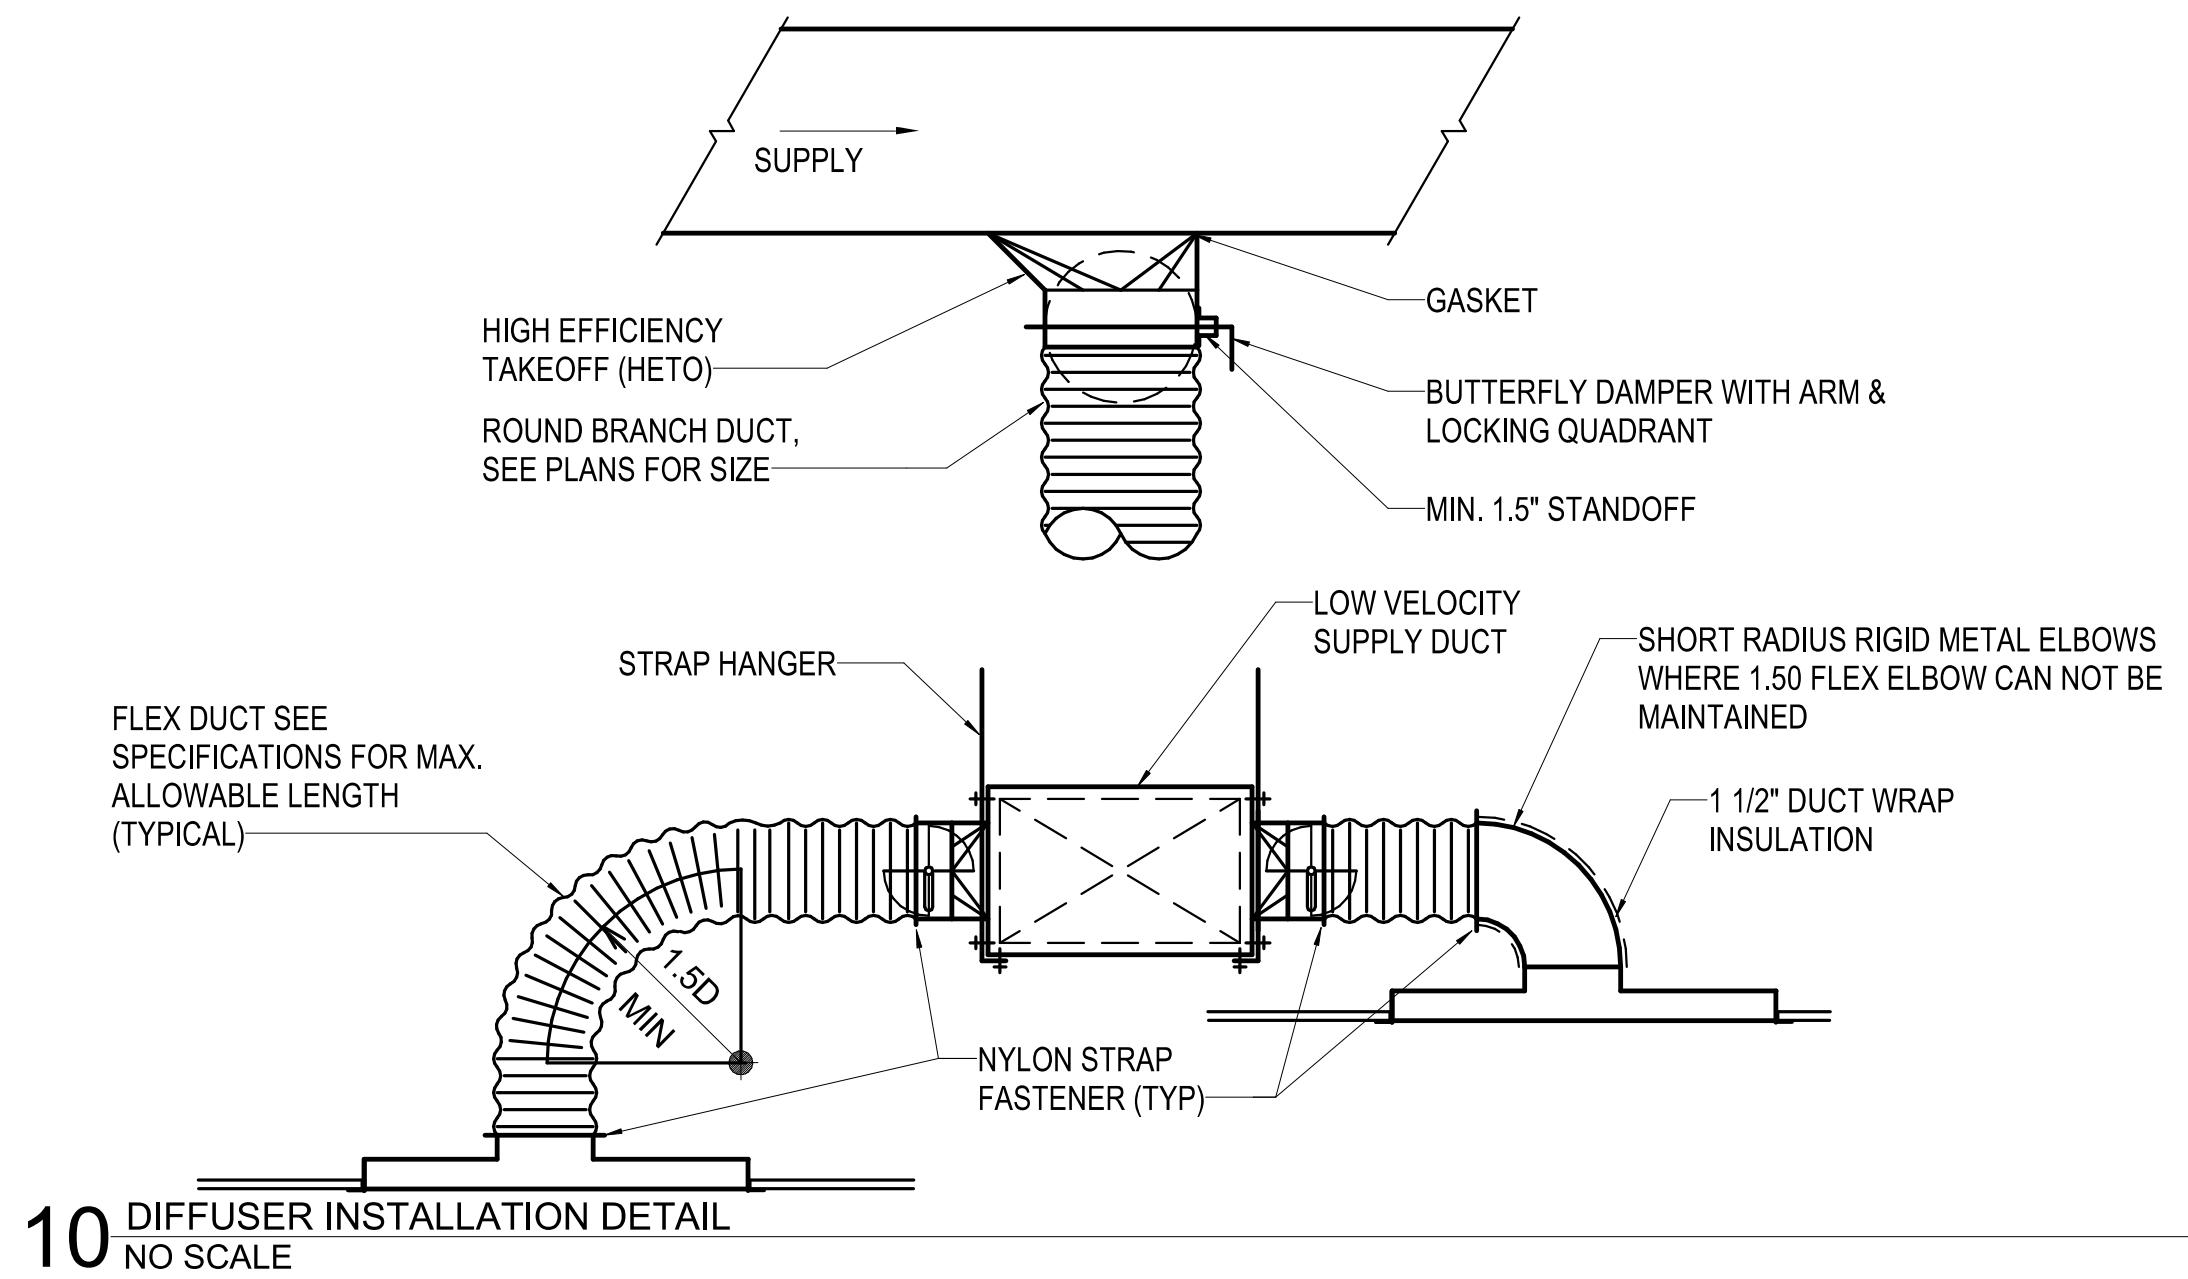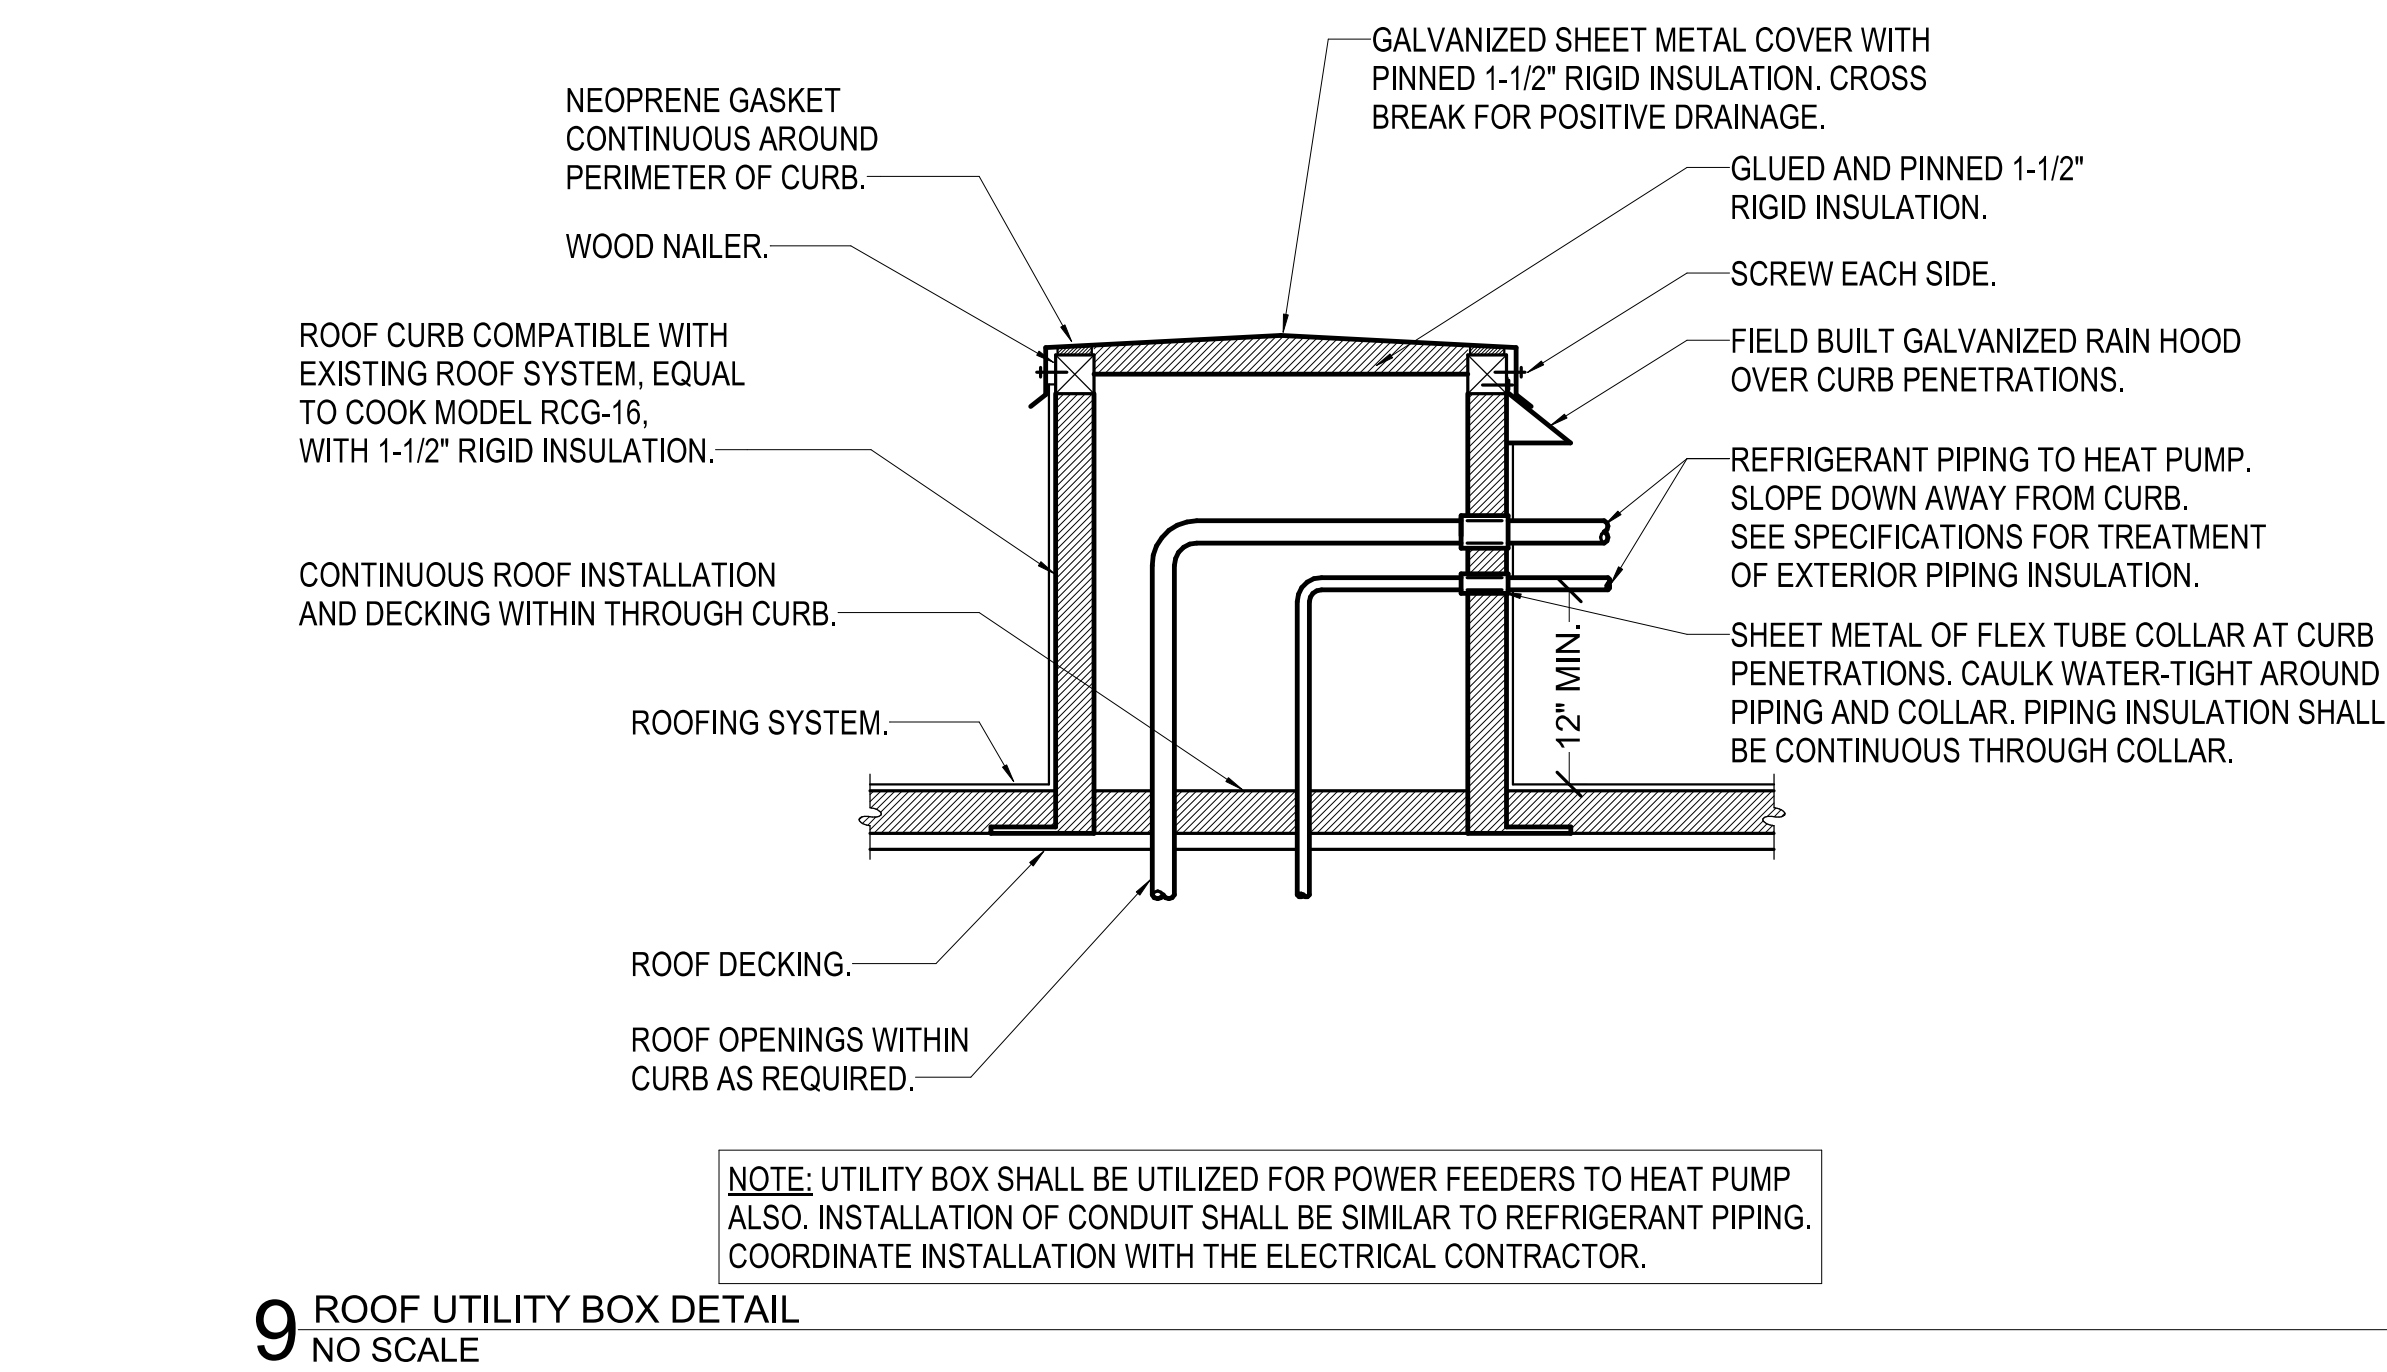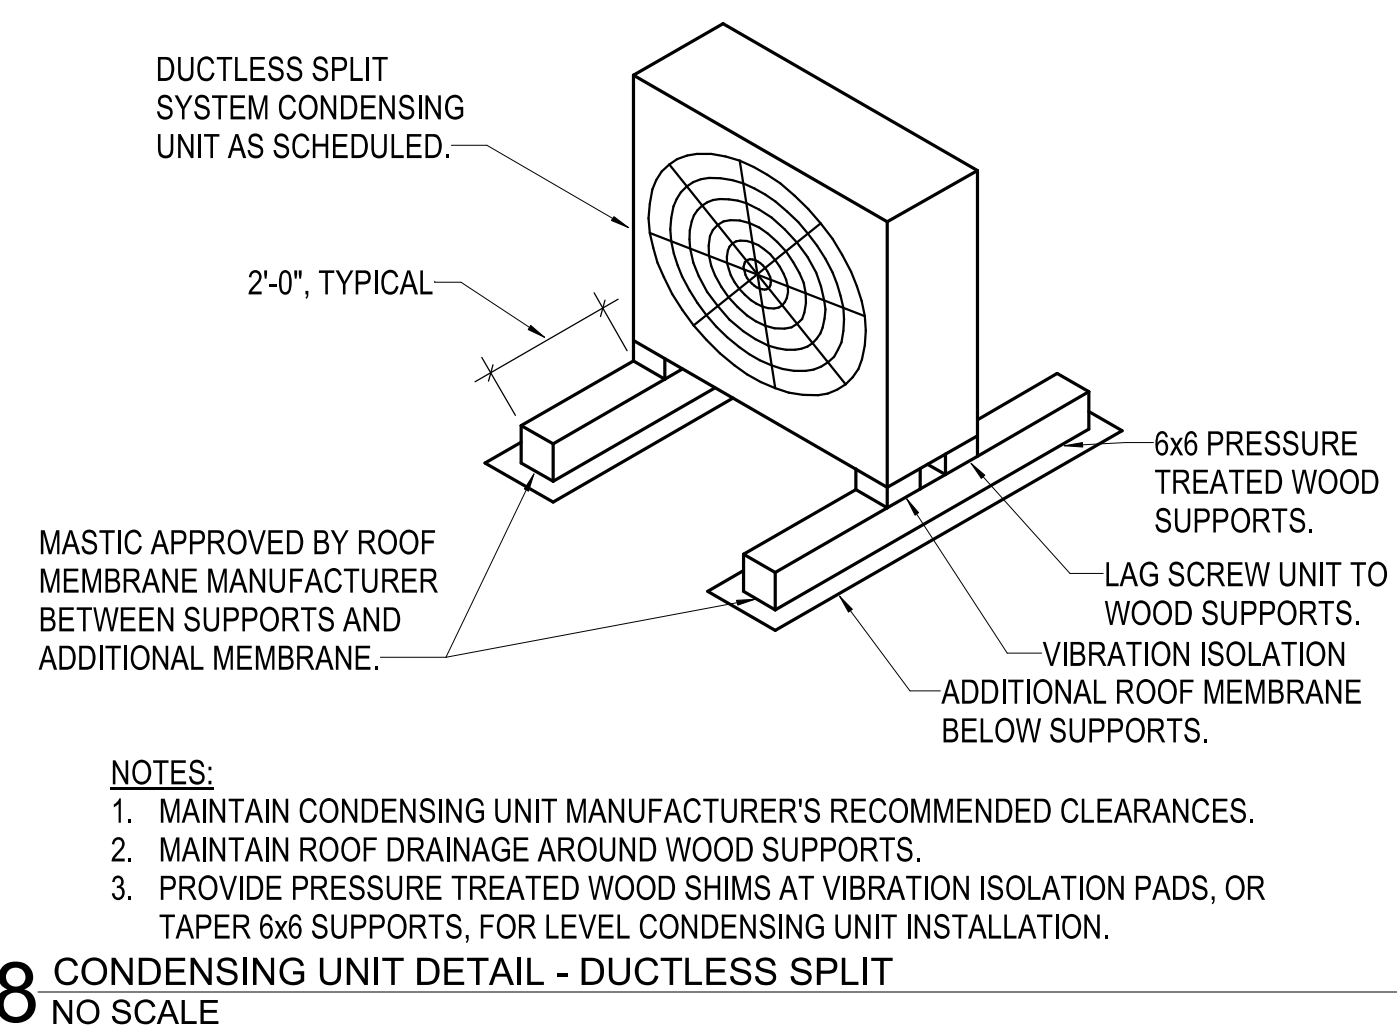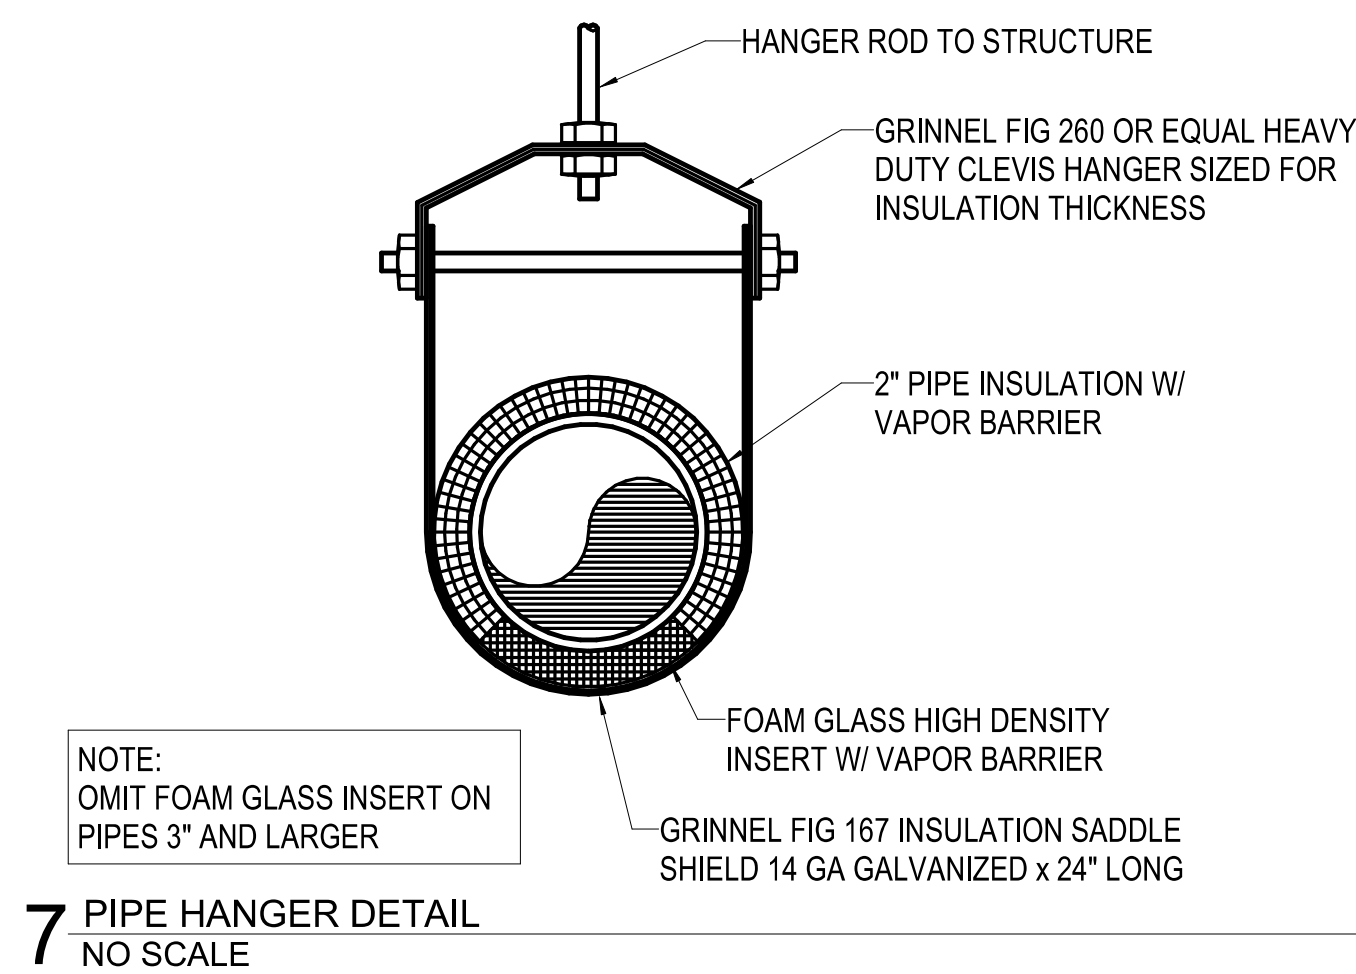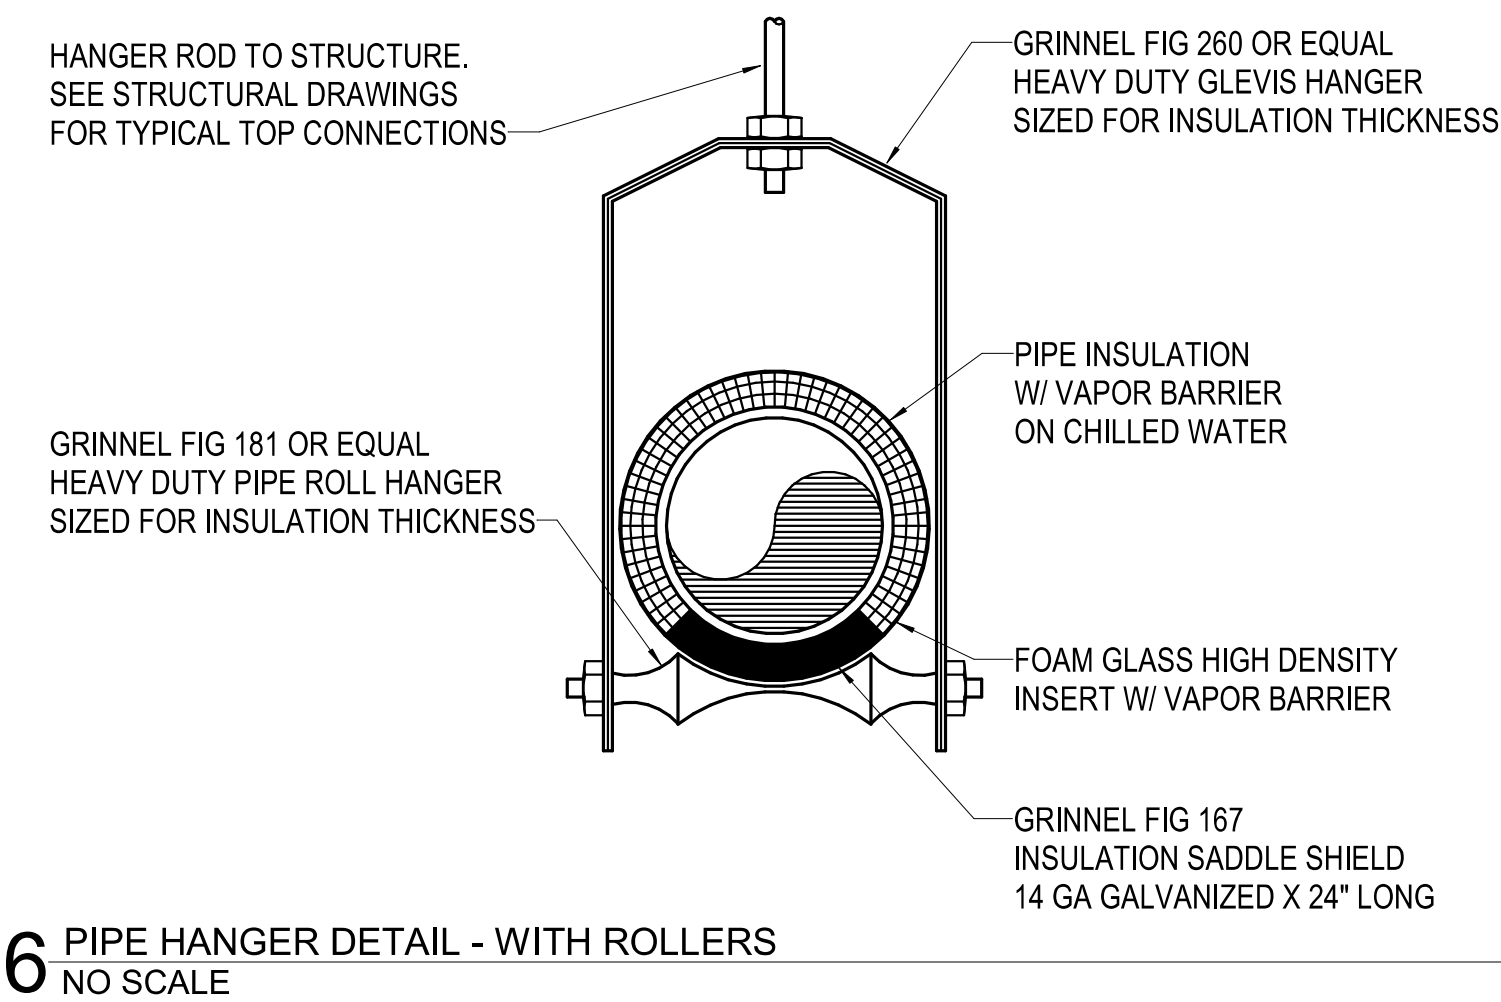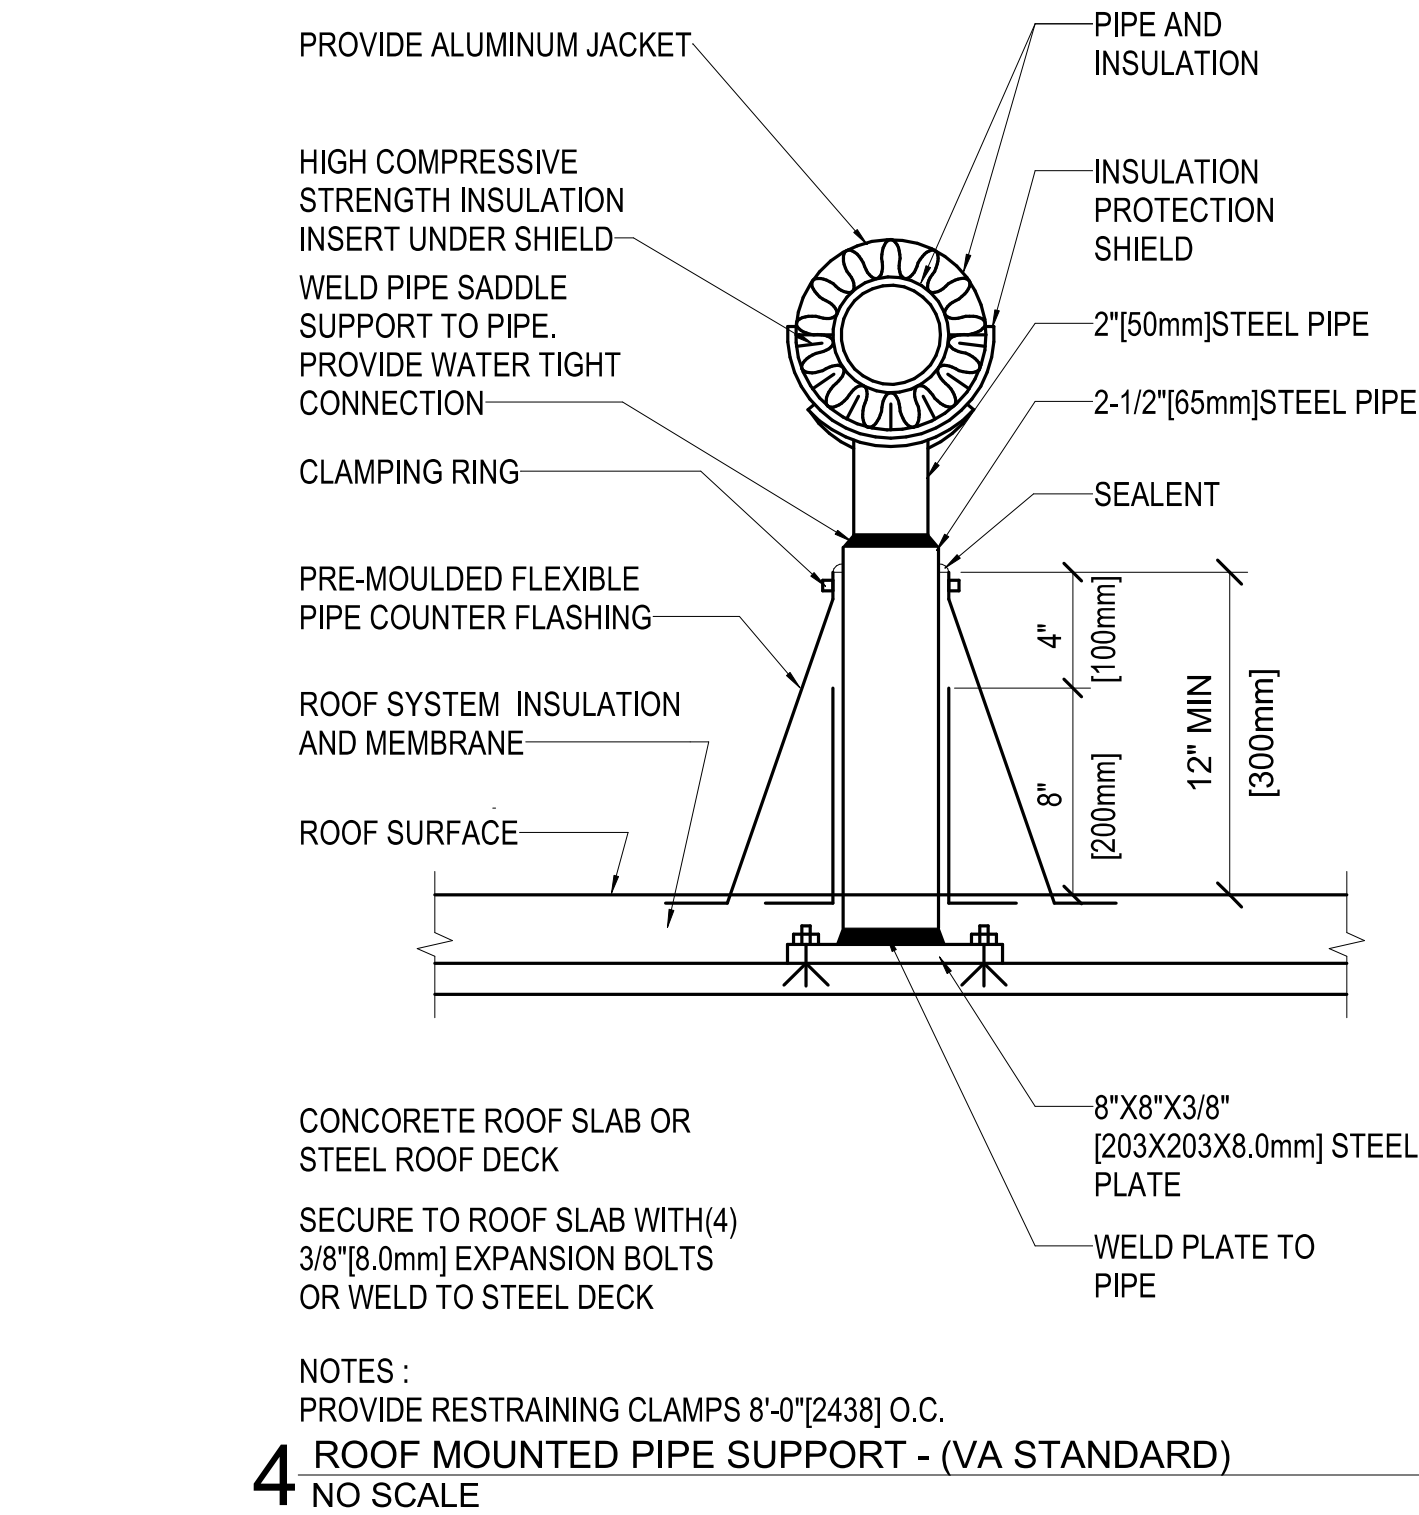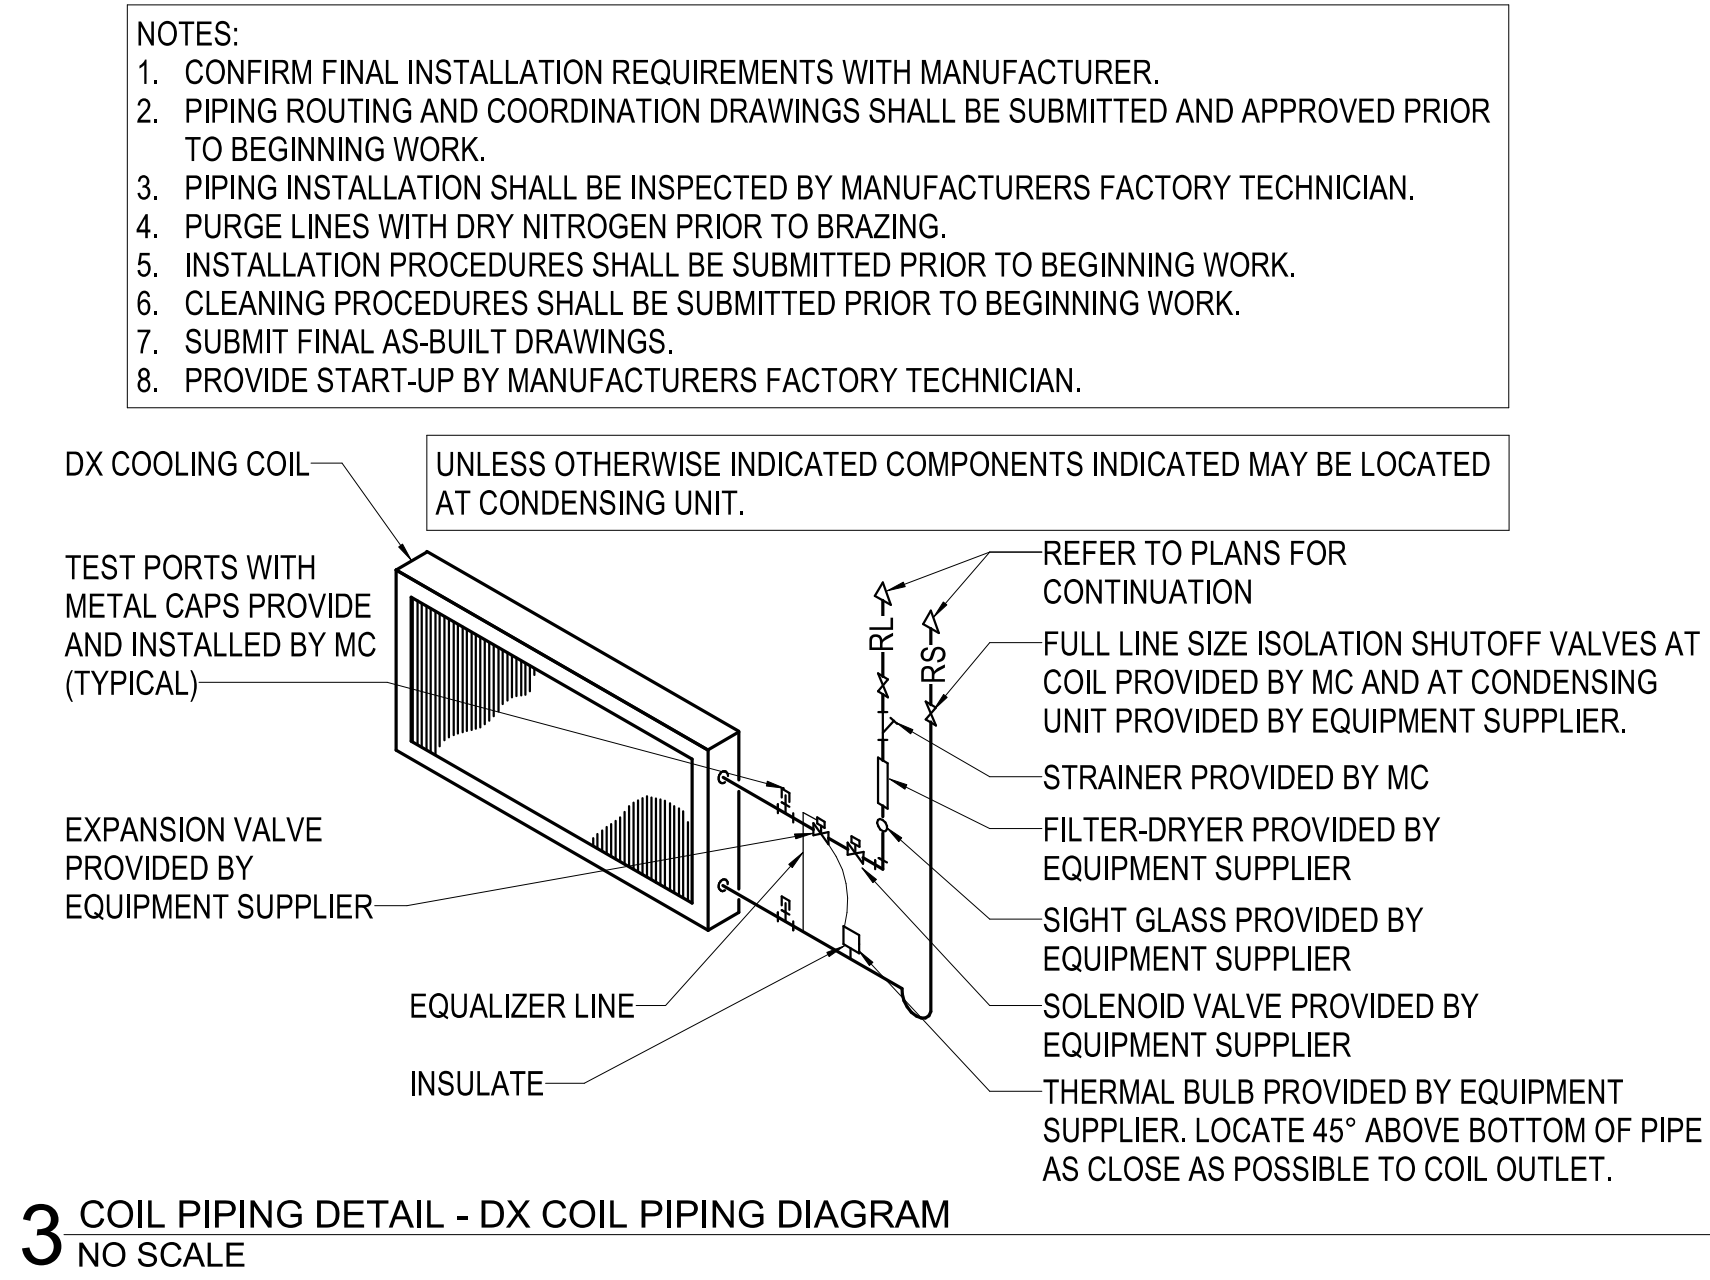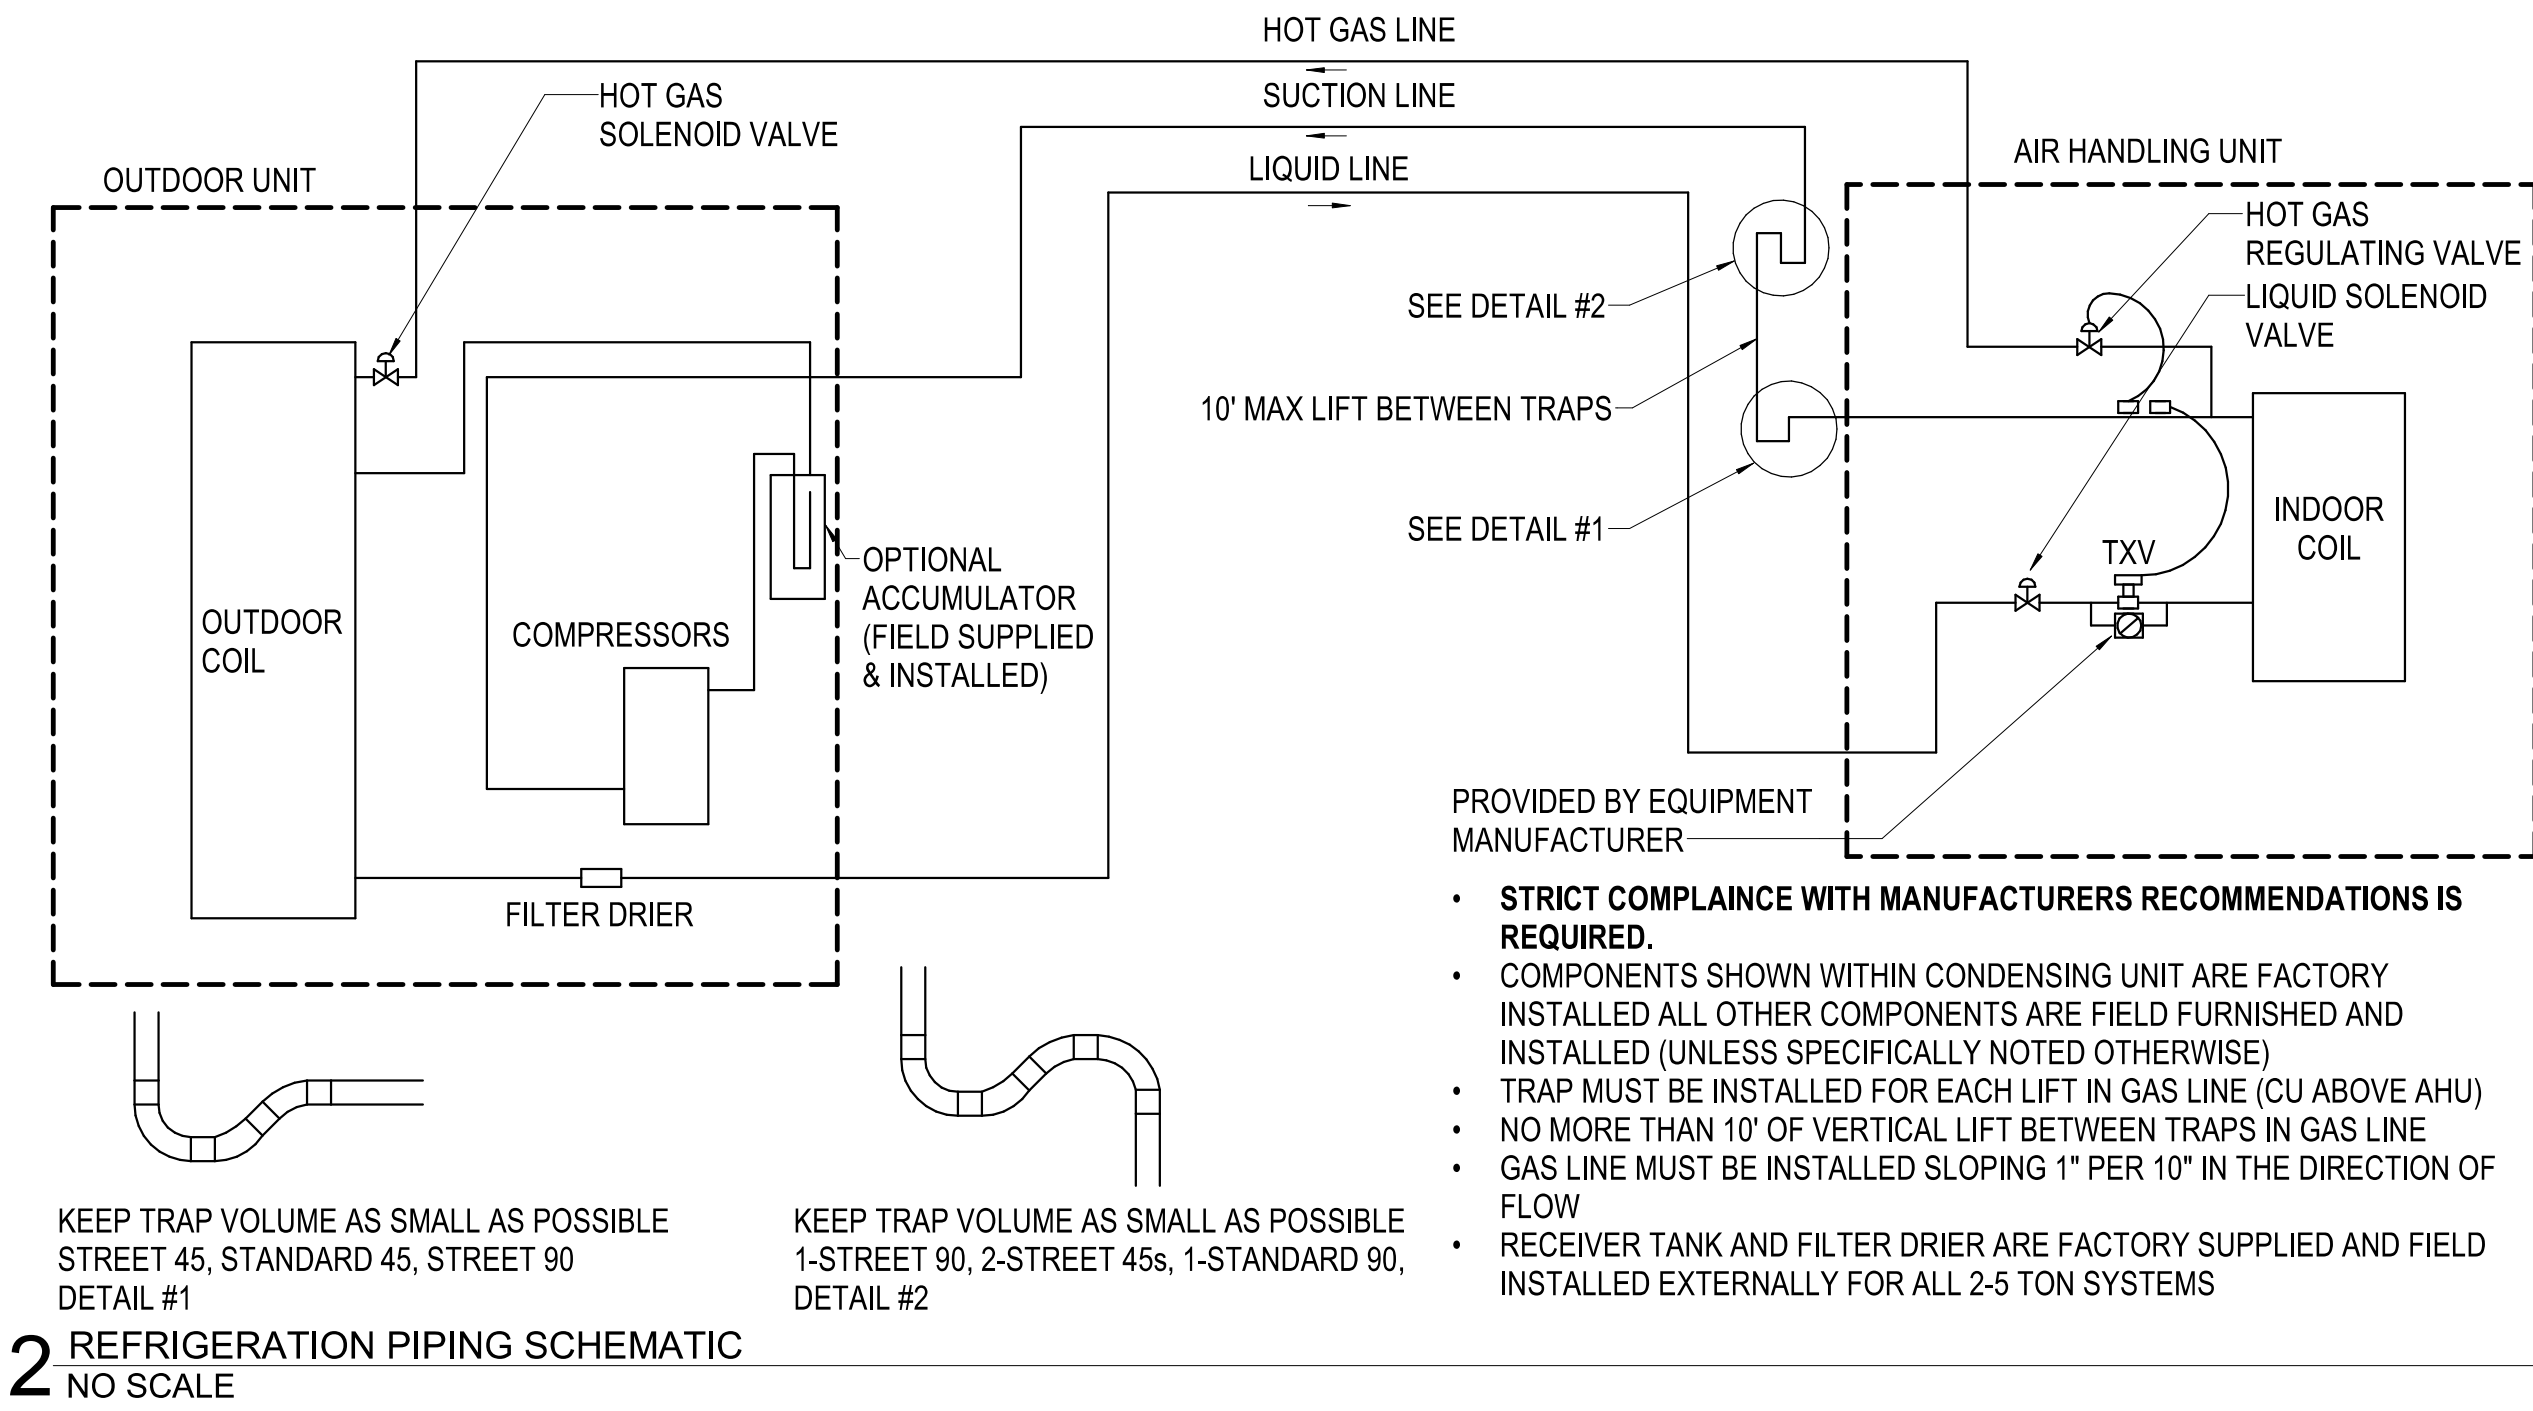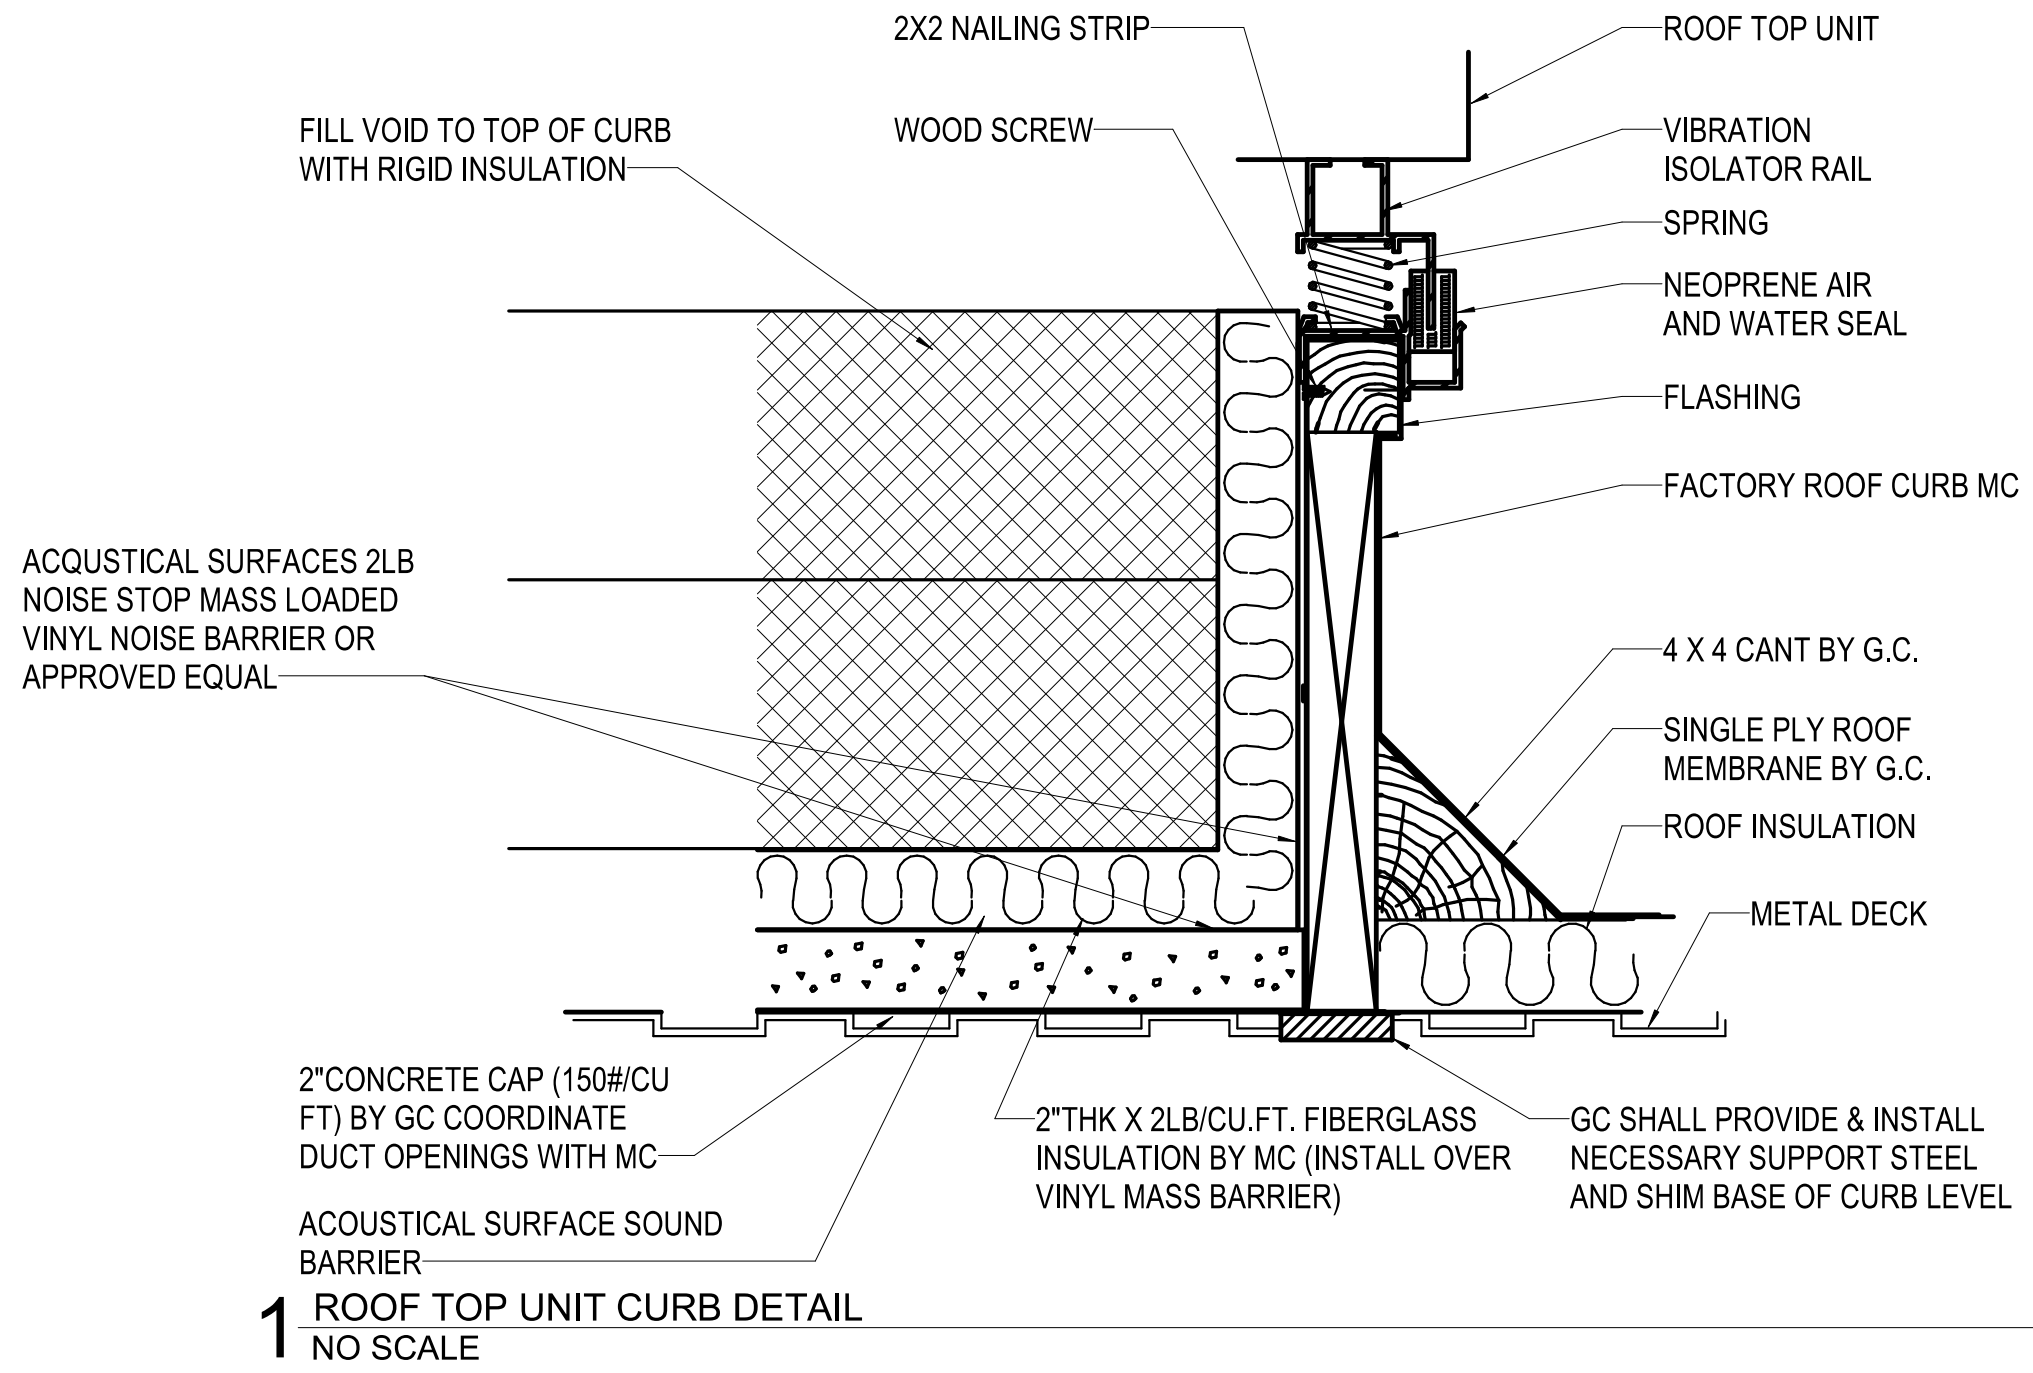

**ACI BOLAND ARCHITECTS**  
1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600  
ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT**  
**PEC**  
Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464



**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date	3-23-2020
Job Number	3-19058
Drawn By	Author
Checked By	Checker

Revision		
Number	Date	Description

**M3.1**  
© 2020 ACI/BOLAND, Inc.  
MECHANICAL DETAILS



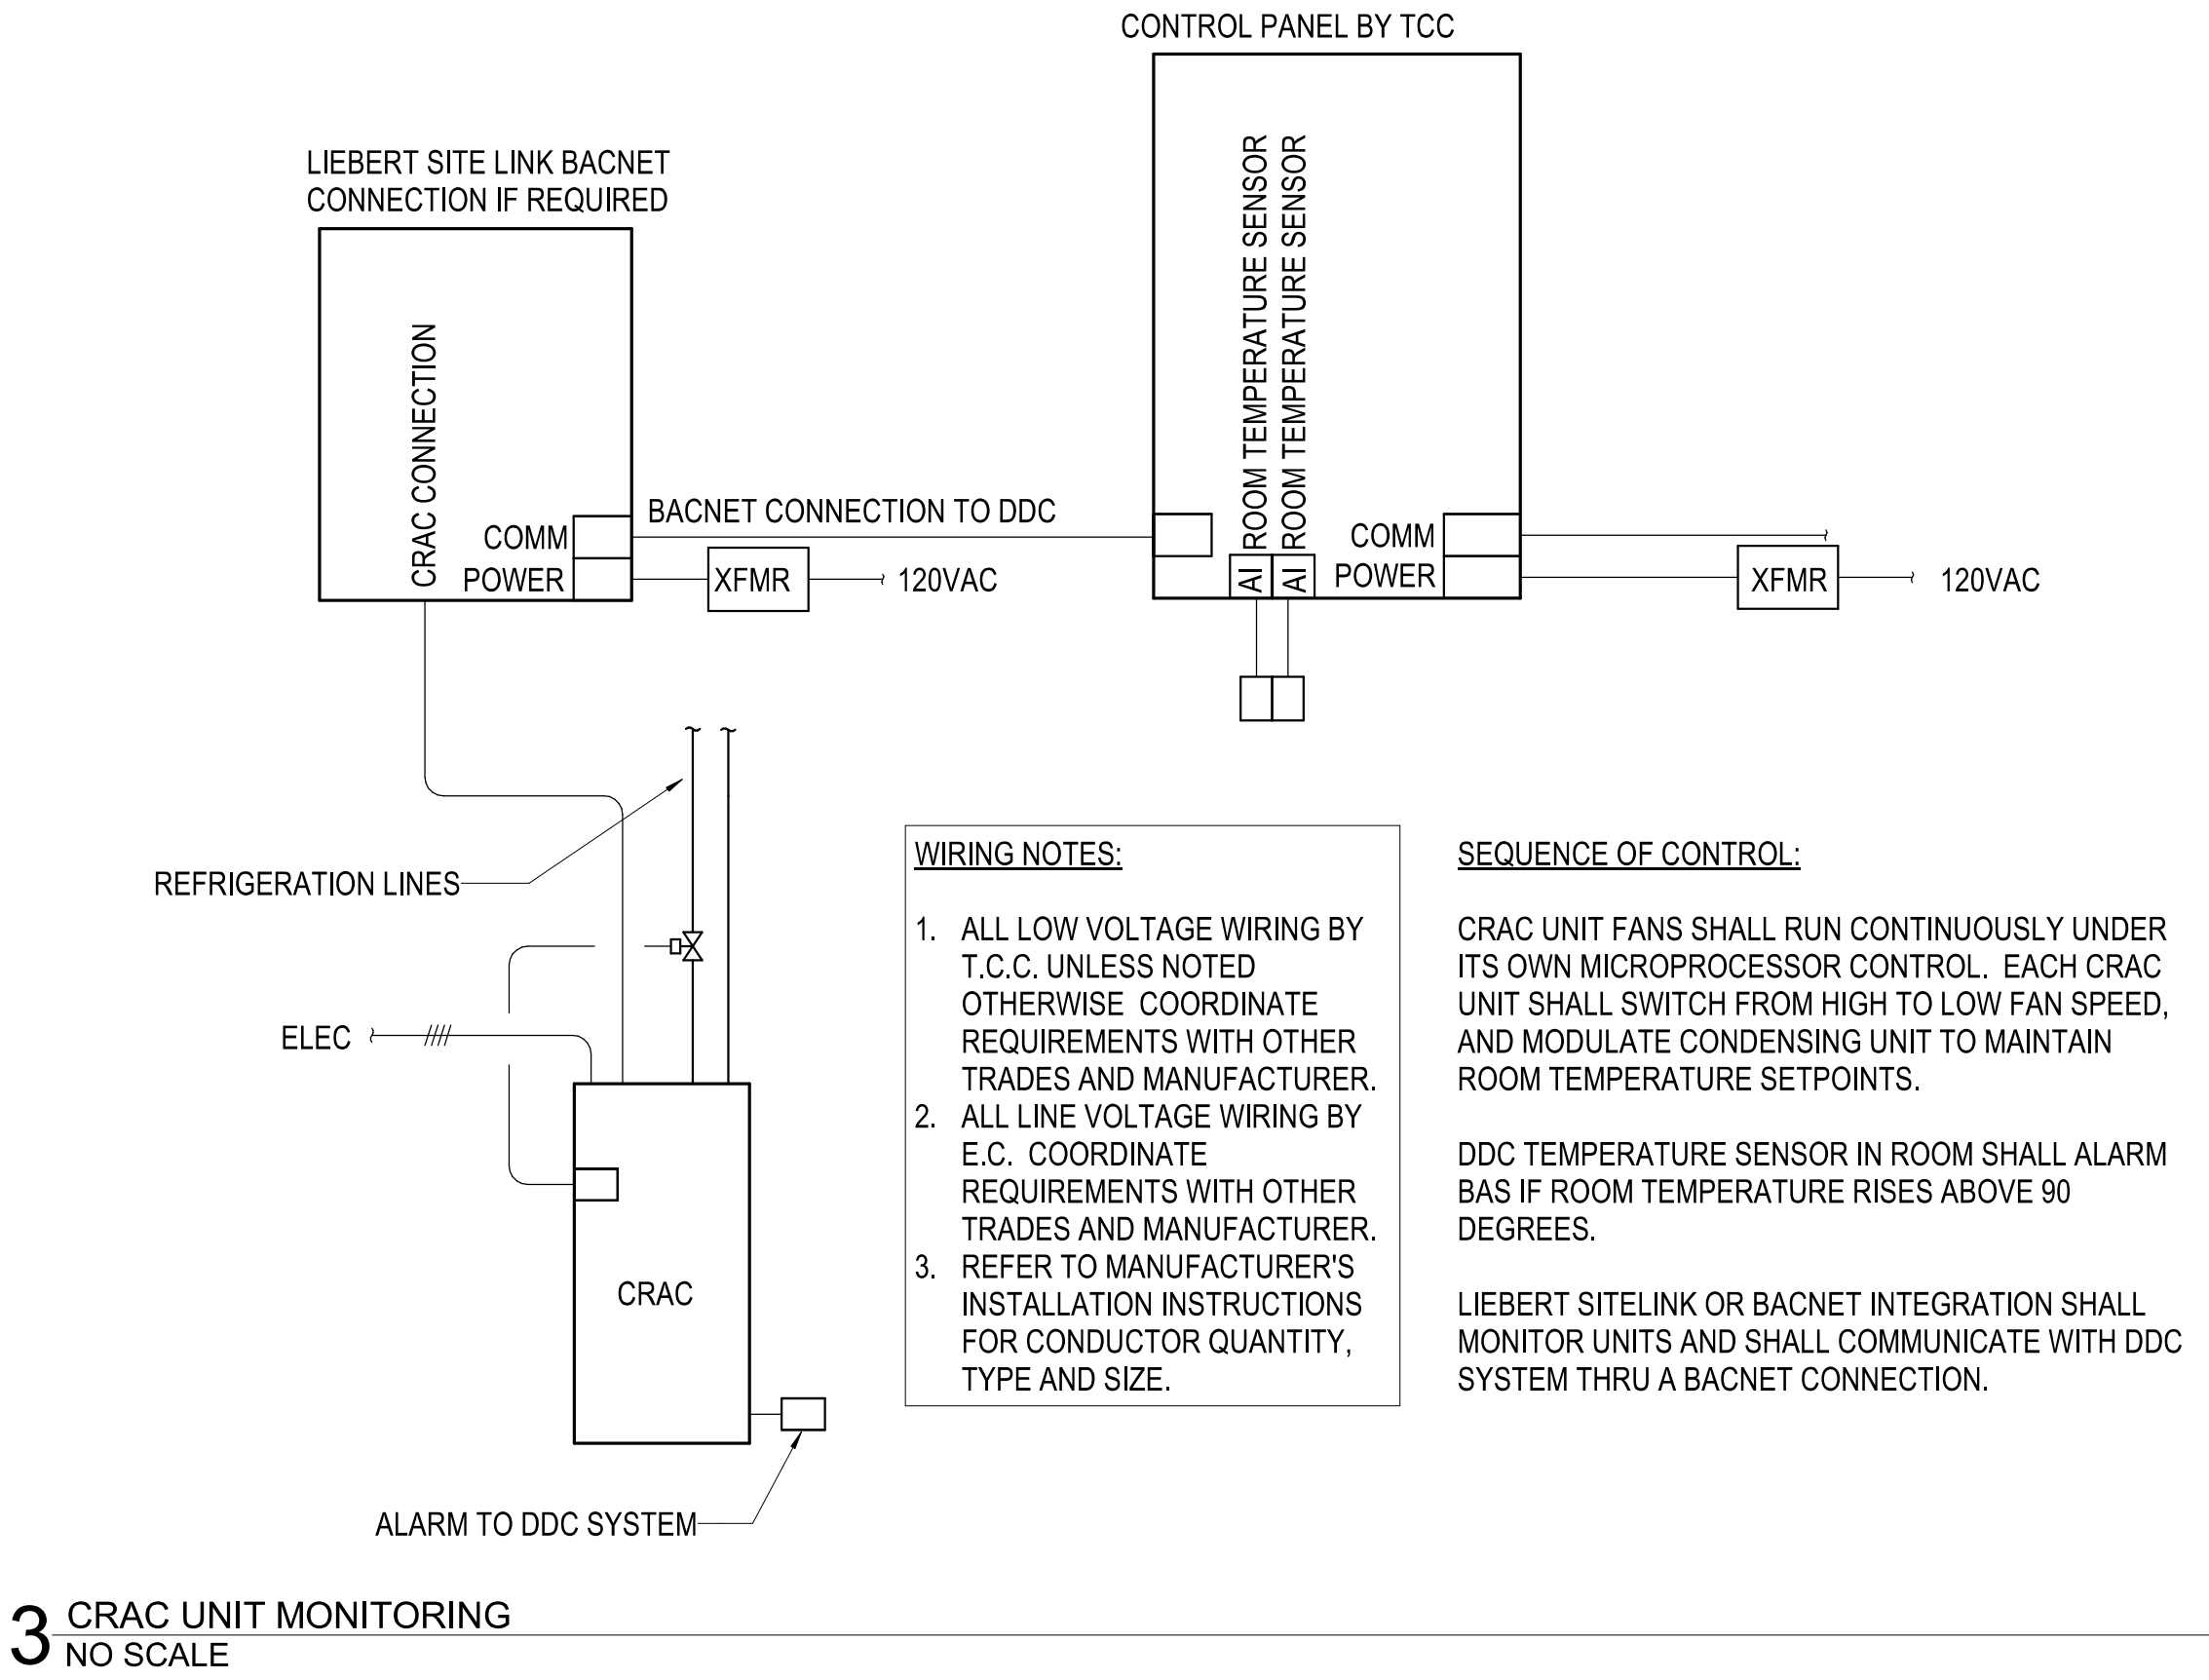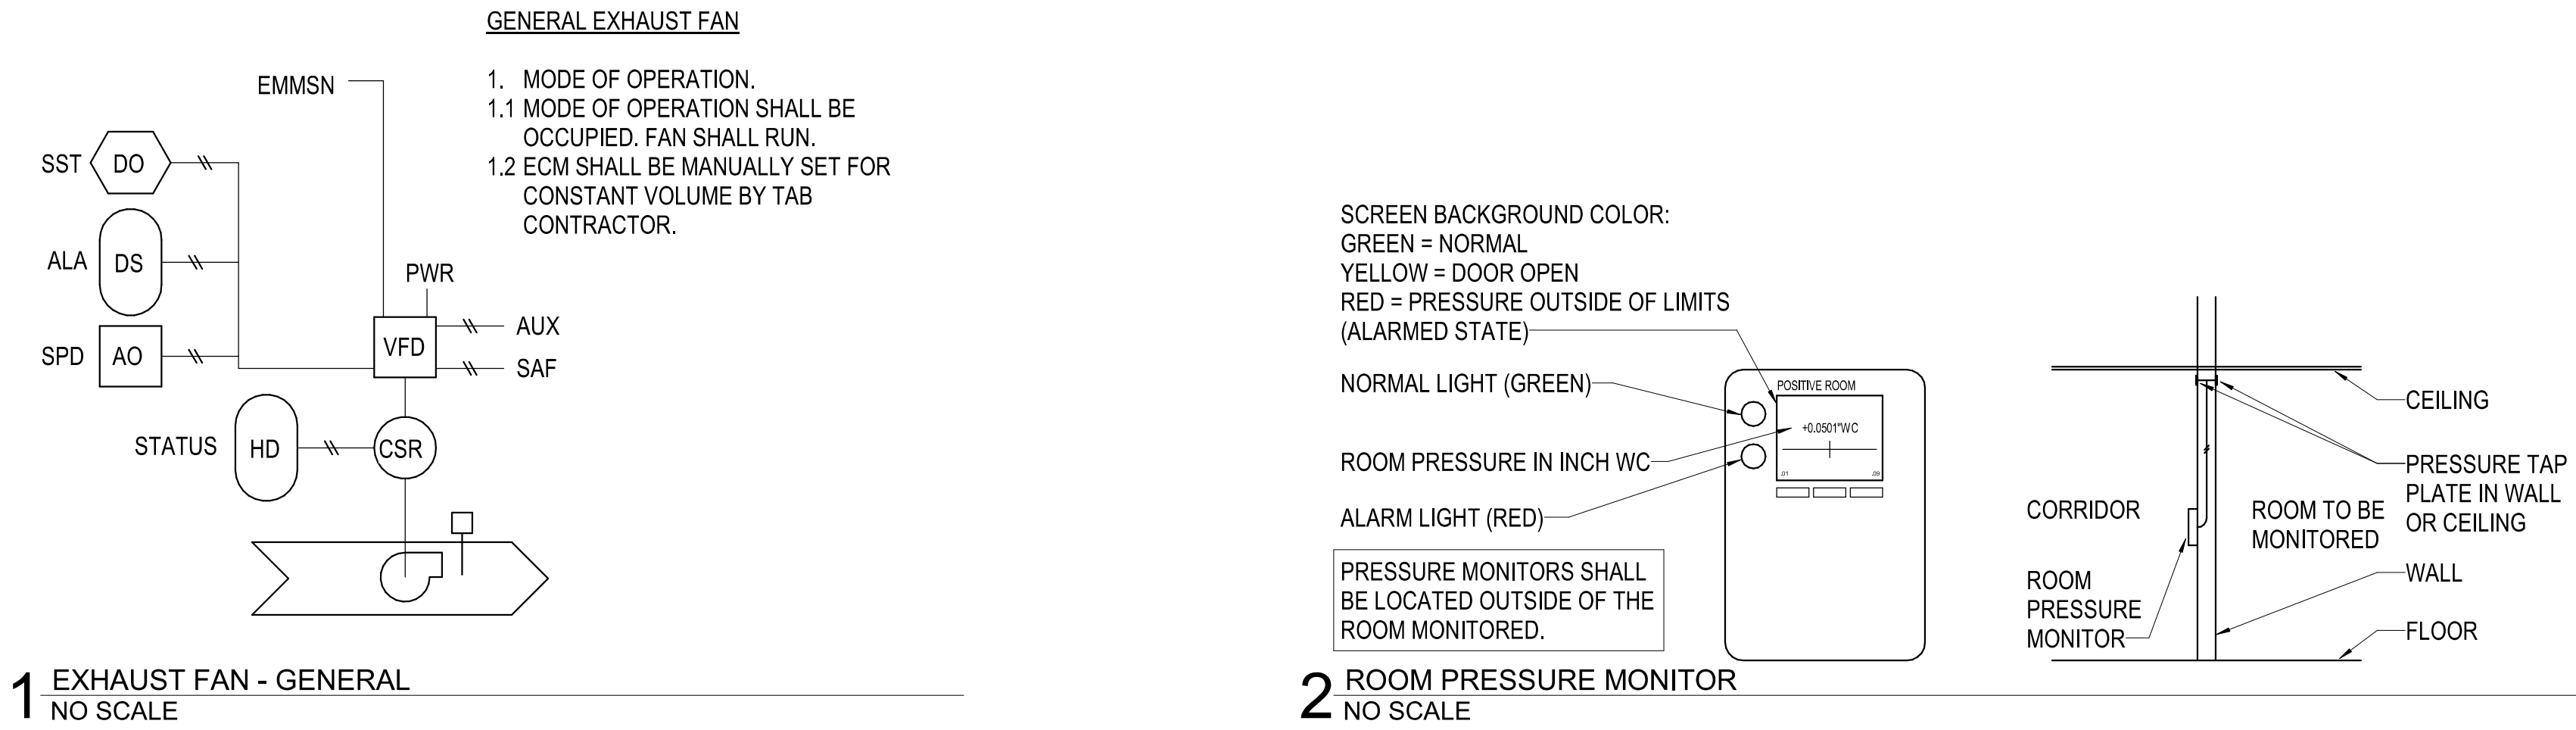


**VAV SHUTOFF BOX (HW HEAT)**

THE TERMINAL UNIT SHALL OPERATE IN A VAV COOLING/VAV HEATING MODE OF OPERATION.

OCCUPIED MODE:  
THE VAV BOX WILL BE PUT INTO THE OCCUPIED MODE BY A TIME SCHEDULE IN THE BUILDING DDC SYSTEM. IN THIS MODE THE VAV DAMPER AND HOT WATER VALVE WILL MODULATE IN SEQUENCE TO MAINTAIN THE SPACE CONDITIONS AT THE OCCUPIED TEMPERATURE SETPOINTS.

ON A CALL FOR COOLING, THE VARIABLE VOLUME DAMPER WILL BE MODULATE FROM MINIMUM CFM FLOW TO MAXIMUM COOLING CFM FLOW TO MAINTAIN SPACE CONDITIONS. ON A DROP IN SPACE TEMPERATURE THE VARIABLE VOLUME DAMPER WILL BE MODULATED TO ITS MINIMUM FLOW POSITION. ON A FURTHER CALL FOR HEAT, THE PRIMARY AIR DAMPER SHALL MODULATE TOWARDS THE MAXIMUM HEATING CFM AND THE REHEAT VALVE MODULATE TO MAINTAIN SETPOINT.

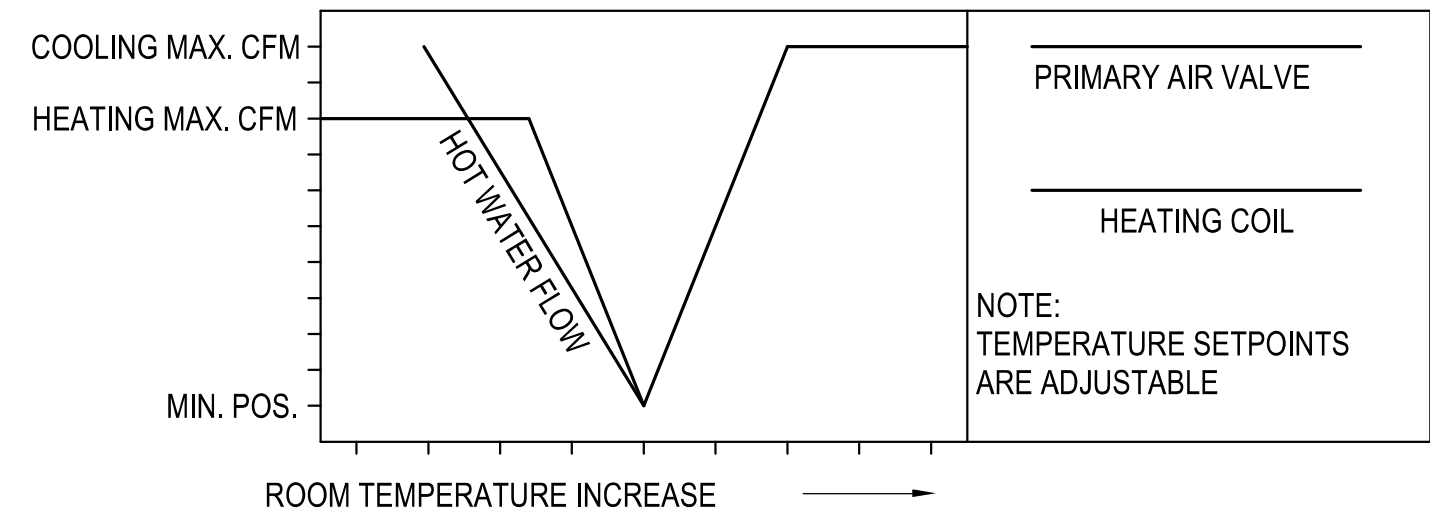



**VAV SHUTOFF BOX WITH HOT WATER HEAT**  
NO SCALE

**VAV SHUTOFF BOX (RETURN)**

THE TERMINAL UNIT SHALL OPERATE IN A VAV MODE OF OPERATION.

OCCUPIED MODE:  
THE VAV BOX WILL BE PUT INTO THE OCCUPIED MODE BY A TIME SCHEDULE IN THE BUILDING DDC SYSTEM. IN THIS MODE THE VAV DAMPER SHALL MODULATE TO MAINTAIN THE SPACE DIFFERENTIAL PRESSURE SETPOINT.

**VAV SHUTOFF BOX - RETURN**  
NO SCALE

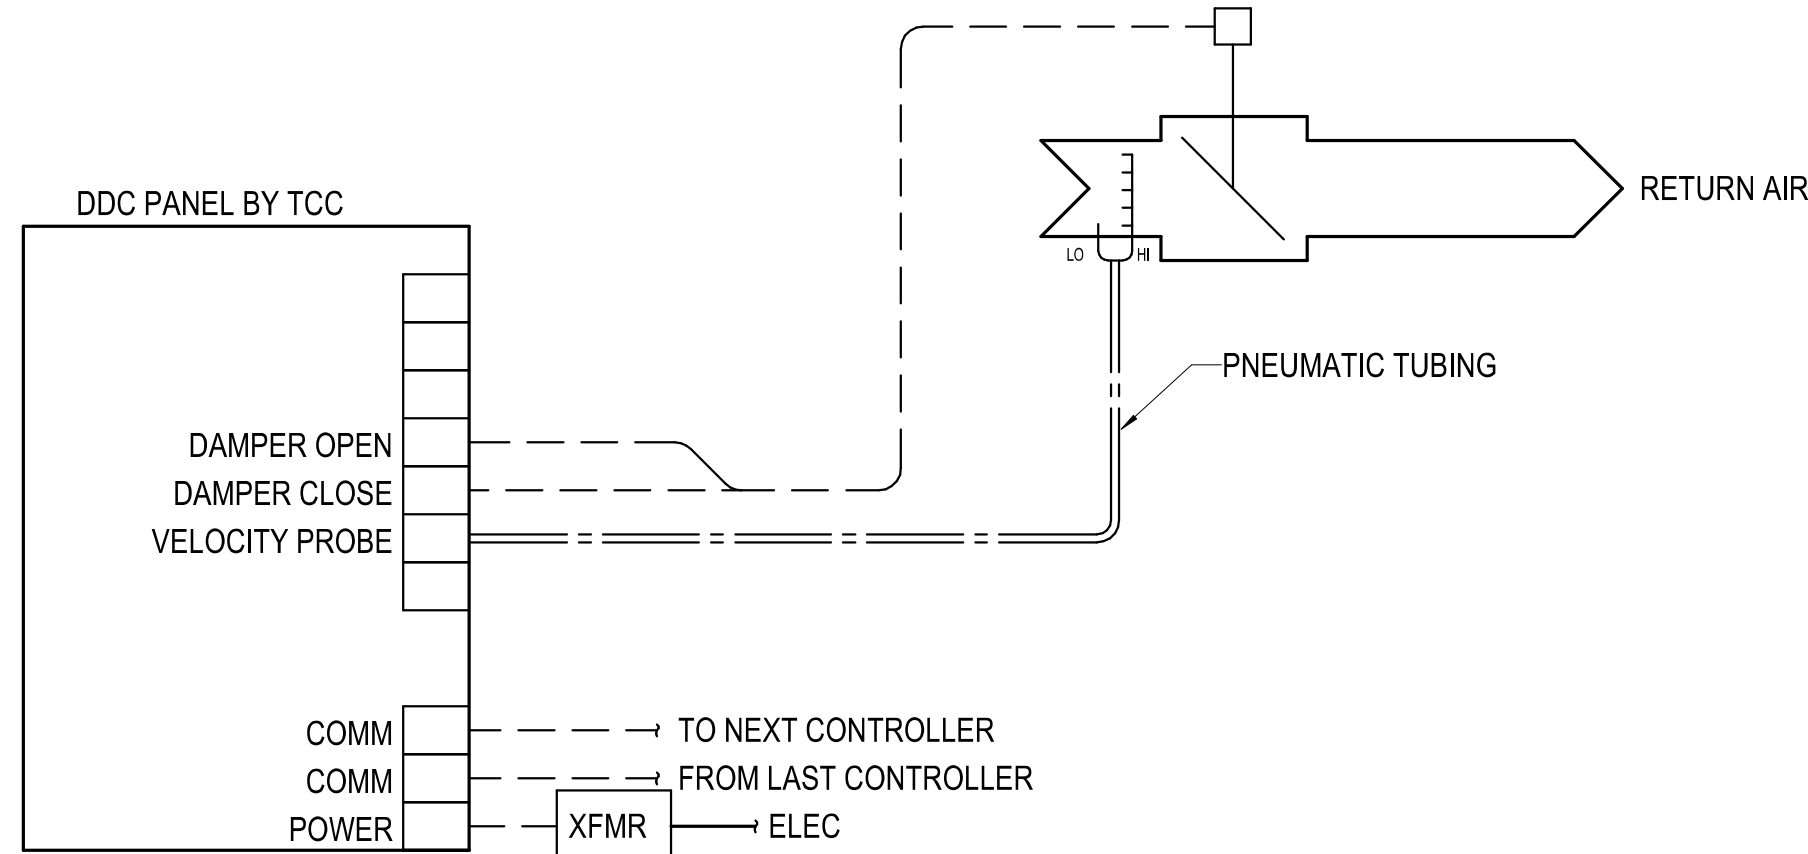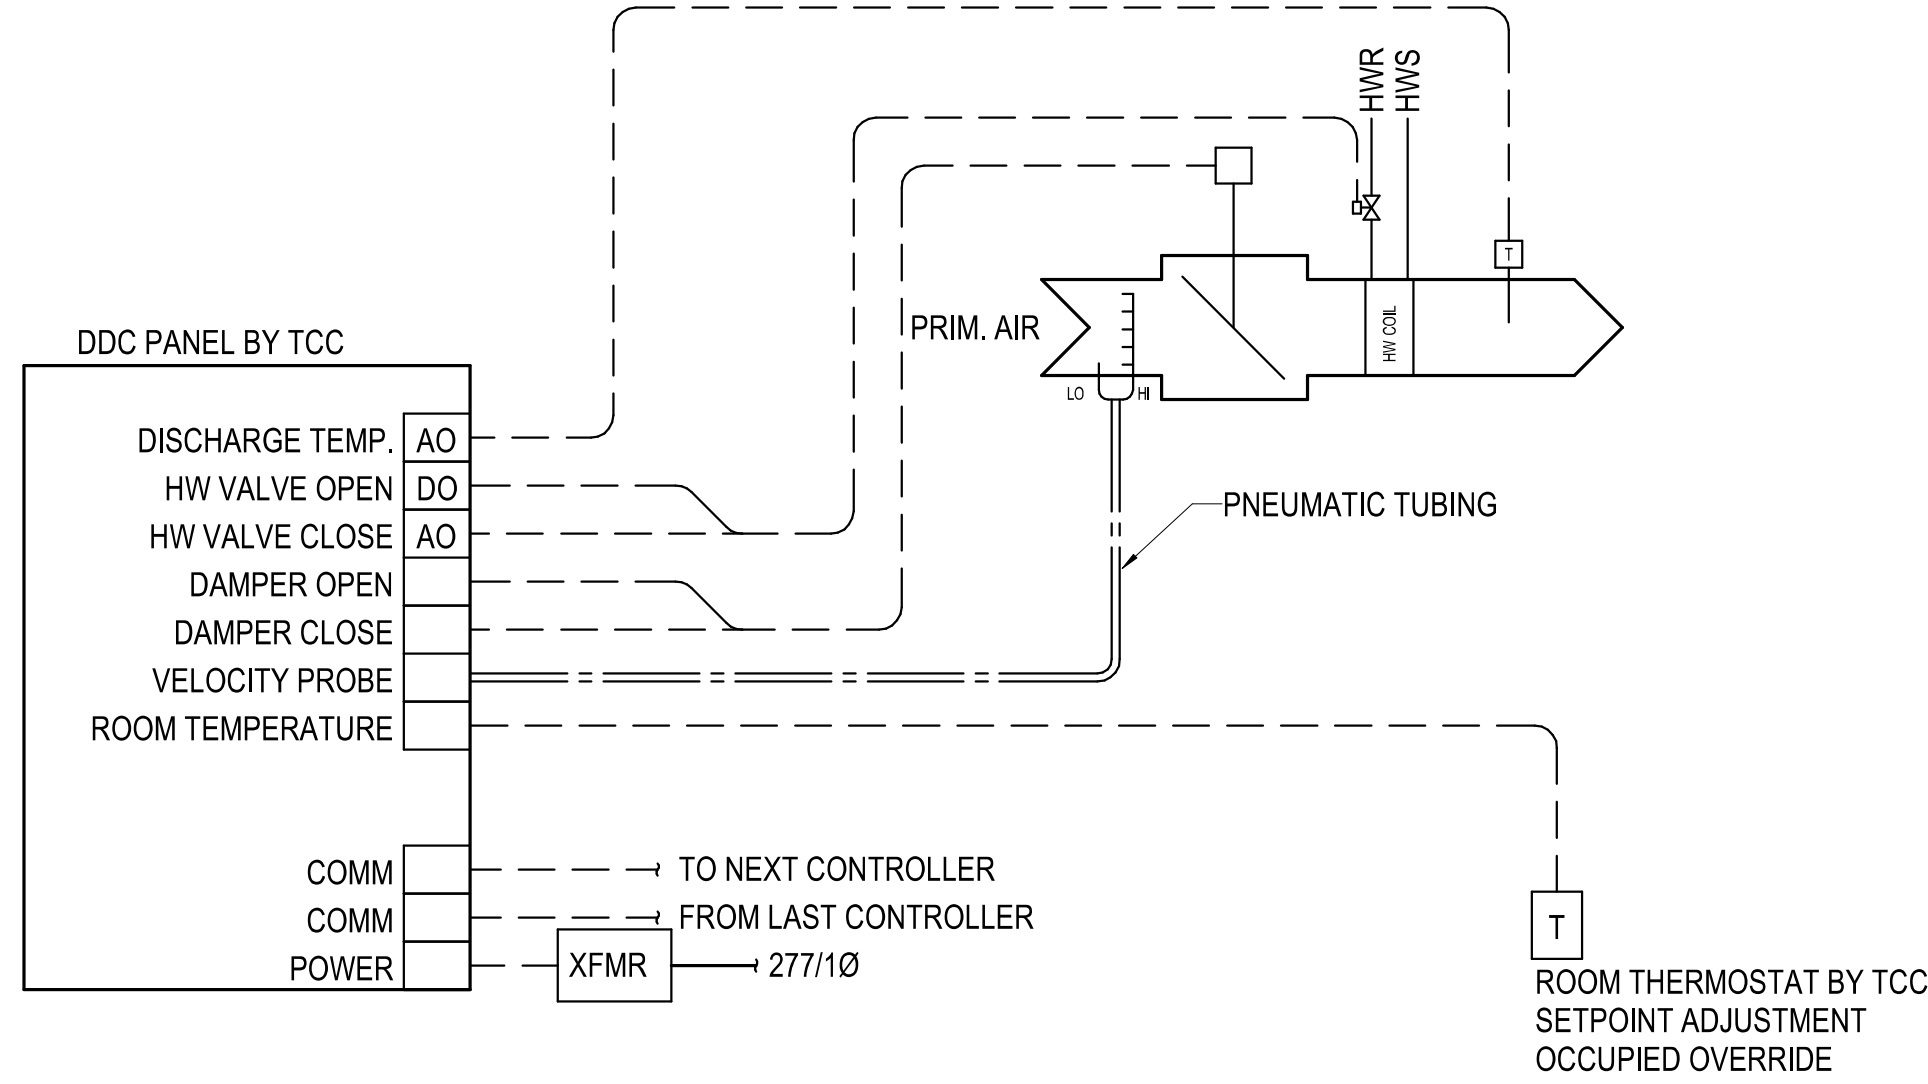

**GENERAL NOTES**

- TEMPERATURE CONTROLS CONTRACTOR (TCC) SHALL FURNISH AND INSTALL ALL LOW VOLTAGE WIRING REQUIRED FOR MECHANICAL CONTROL SYSTEM. WIRING SHALL BE IN CONDUIT INSIDE WALLS, IN ROOMS WITH EXPOSED CEILINGS, AND ABOVE HARD CEILINGS. E.C. SHALL PROVIDE AND INSTALL ALL CONDUIT REQUIRED FOR MECHANICAL CONTROLS SYSTEM. LINE VOLTAGE WIRING AND ASSOCIATED CONDUIT SHALL BE PROVIDED AND INSTALLED BY E.C. CONTROL SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH SPECIFICATIONS.
- LABEL ALL T-STATS.
- ALL POINTS INDICATED ON DRAWINGS SHALL BE INTEGRATED TO BUILDING AUTOMATION SYSTEM AND SHALL INCLUDE GRAPHIC.

**NOTICE OF RESPONSIBILITY**

ALL TEMPERATURE CONTROL AND WIRING DIAGRAMS (SCHEMATICS) SHOWN HEREIN ARE SCHEMATIC ONLY AND ARE INTENDED TO ONLY SHOW LOGIC AND GENERAL ARRANGEMENT. THE INSTALLING CONTRACTOR(S) ARE RESPONSIBLE TO COORDINATE AND VERIFY THE EXACT VOLTAGES, CURRENT DRAW AND LOADS, COMPATIBILITY, HOOK UP REQUIREMENTS, AND INTERFACES REQUIRED FOR WIRING OF ALL ITEMS AND EQUIPMENT. THE REQUIREMENTS OF DIFFERENT MANUFACTURERS MAY REQUIRE CHANGES TO WIRING. ANY SUCH CHANGES ARE THE RESPONSIBILITY OF THE INSTALLING CONTRACTOR(S) AND SHALL NOT RESULT IN ANY ADDITIONAL COST TO THE OWNER.



**ACI BOLAND ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT**

**PEC**

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**Lee's Summit Medical Center**


Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description

**M4.0**



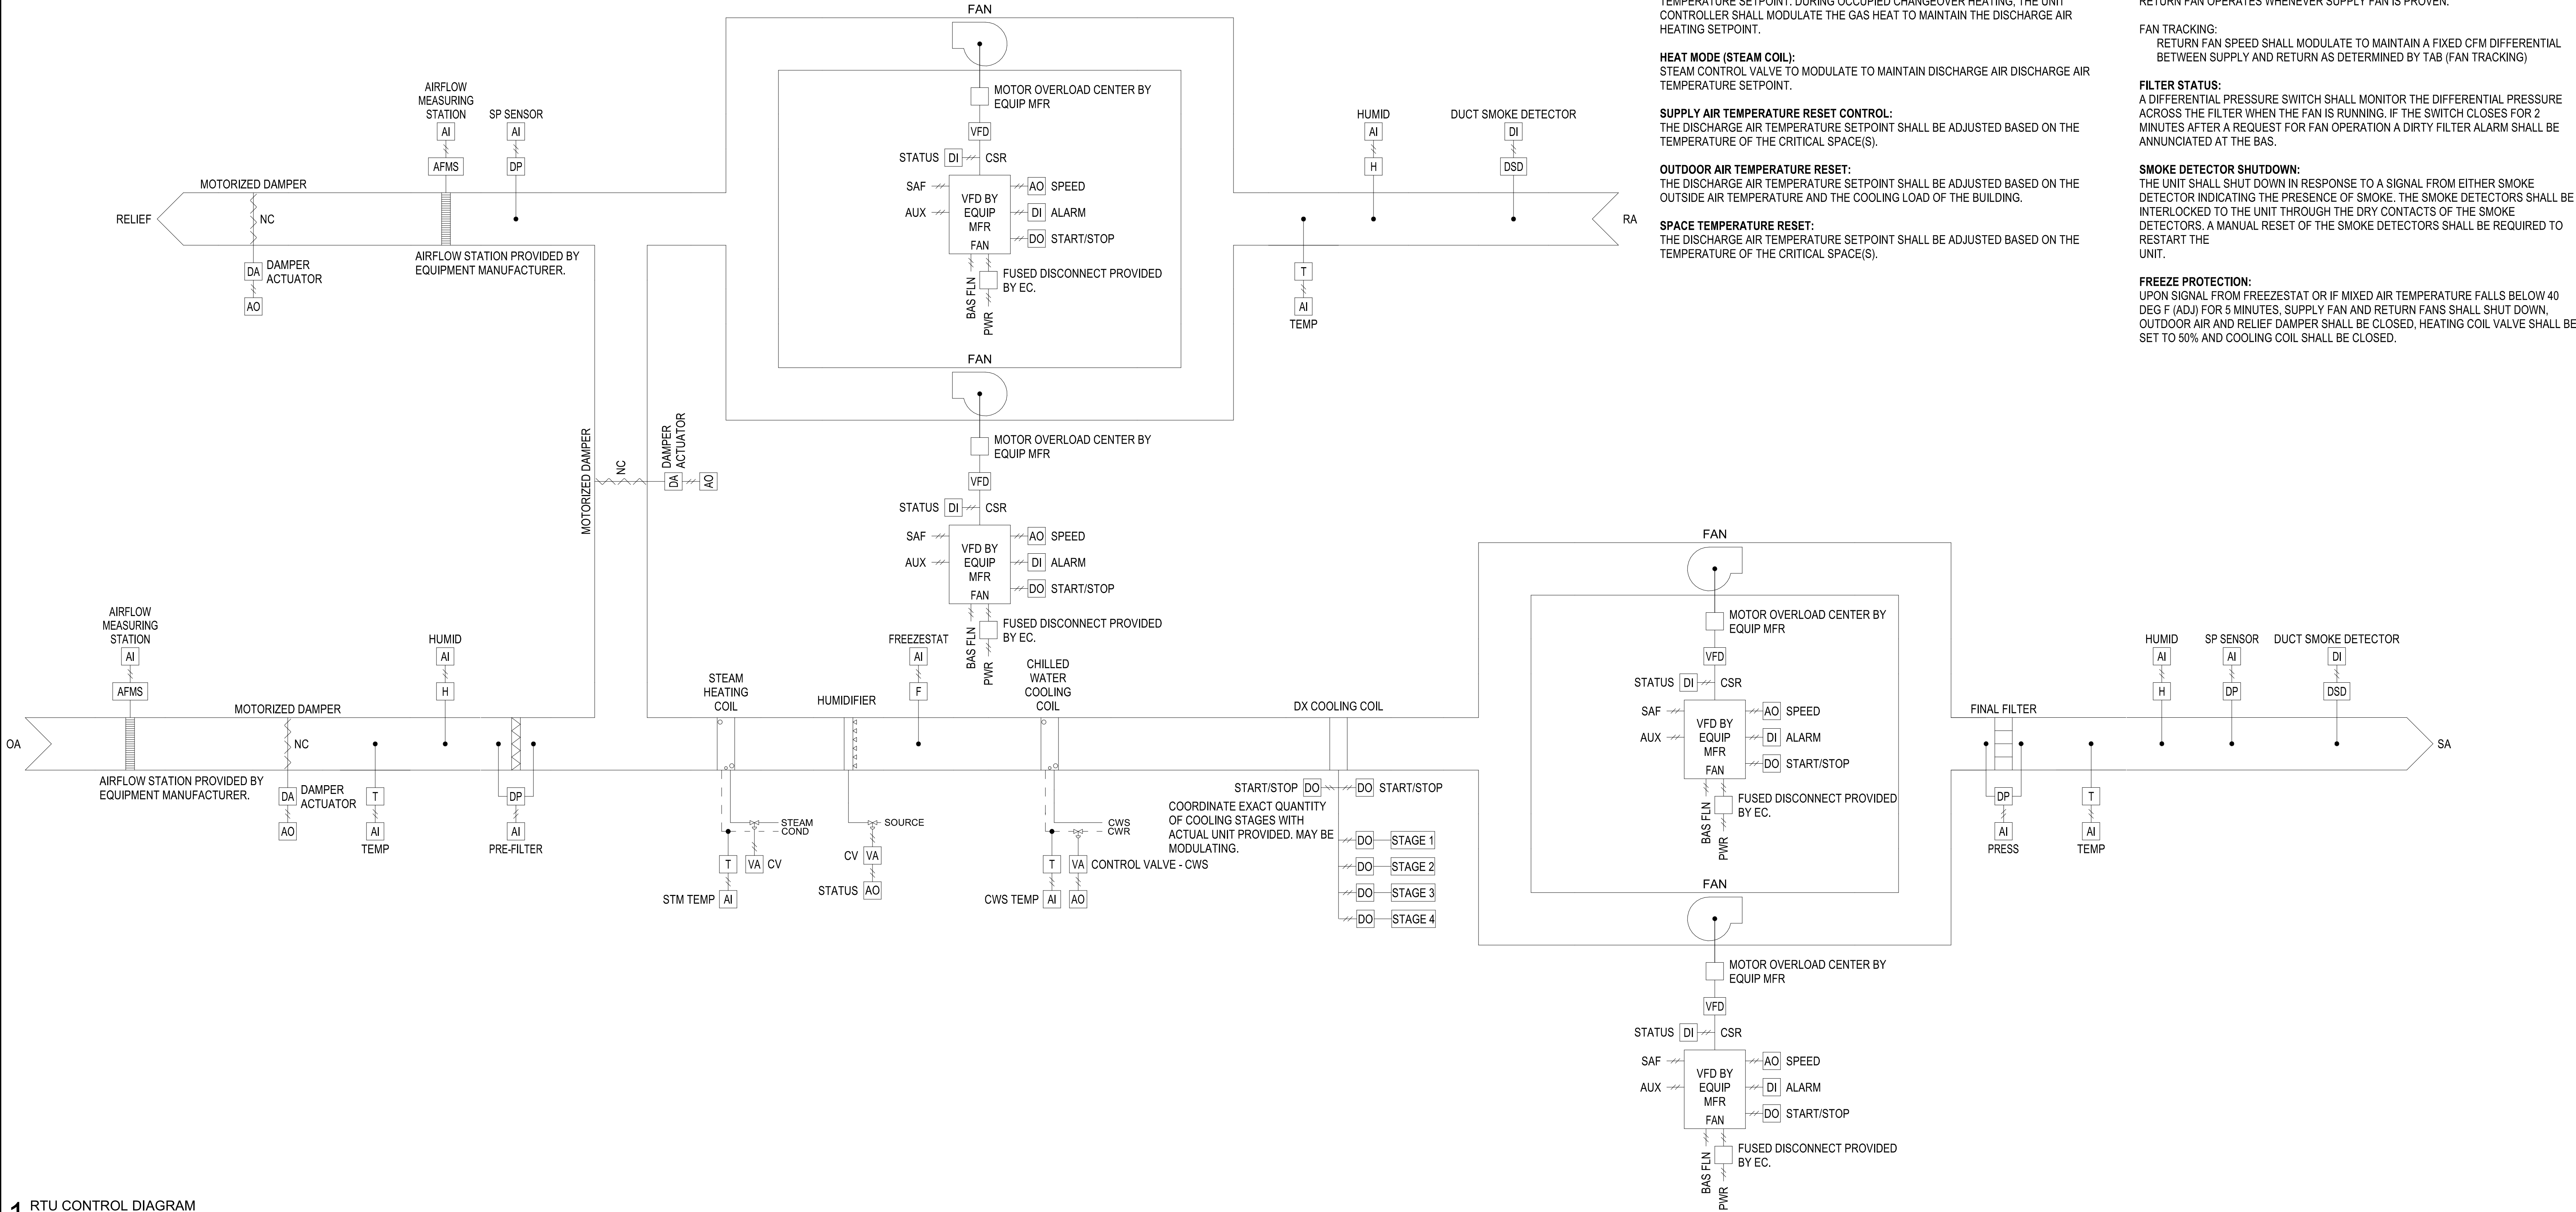

1 RTU CONTROL DIAGRAM  
NO SCALE

**CONTROL SEQUENCE GENERAL (RTU-01):**

**BUILDING AUTOMATION SYSTEM INTERFACE:**  
THE BUILDING AUTOMATION SYSTEM (BAS) SHALL SEND THE CONTROLLER OCCUPIED BYPASS, MORNING WARM-UP / PRE-COOL, OCCUPIED / UNOCCUPIED AND HEAT / COOL MODES. IF A BAS IS NOT PRESENT, OR COMMUNICATION IS LOST WITH THE BAS THE CONTROLLER SHALL OPERATE USING DEFAULT MODES AND SETPOINTS.

**OCCUPIED MODE:**  
UNITS SHALL OPERATE CONTINUOUSLY

**UNOCCUPIED MODE:**  
UNITS SHALL OPERATE CONTINUOUSLY

**EMERGENCY POWER MODE:**  
GENERATOR SHALL SIGNAL BAS THAT BUILDING IS UNDER EMERGENCY POWER. IN THIS MODE THE ROOFTOP UNIT AND THE TERMINAL UNIT DAMPERS ARE POWERED.

**SETPOINTS:**  
SUPPLY DISCHARGE AIR TEMPERATURE: 45 DEG F (ADJ)  
SUPPLY FAN STATIC PRESSURE: 1.5" WG (ADJ)  
SUPPLY FAN SPEED MAX: SEE SCHEDULE  
SUPPLY FAN SPEED MIN: SEE SCHEDULE  
SUPPLY DUCT HIGH STATIC: 2.5" WG (ADG)  
SUPPLY RH MAX: 85% RH (ADJ)  
ECONOMIZER: 25 DEG F TO 45 DEG F (ADJ)  
COOLING MAX TEMP: 45 DEG F (ADJ)  
COOLING MIN TEMP: 65 DEG F (ADJ)  
HEAT ENABLED: 40 DEG F (ADJ)  
SPACE HUMIDITY: 50% RH (ADJ)

**ALARMS:**  
PROVIDE ALARM FOR THE FOLLOWING:  
SUPPLY FAN: +/- 25% SETPOINT (ADJ)  
RETURN FAN: +/- 25% SETPOINT (ADJ)  
EXHAUST FAN: +/- 25% SETPOINT (ADJ)  
HIGH STATIC PRESSURE: + 10% SETPOINT (ADJ)  
LOW STATIC PRESSURE: - 10% SETPOINT (ADJ)  
TEMP LOW SAFETY: - 25% SETPOINT (ADJ)  
SUPPLY AIR TEMP HIGH: + 25% SETPOINT (ADJ)  
SUPPLY AIR TEMP LOW: - 25% SETPOINT (ADJ)  
FILTER DP: 2" WG (ADJ)  
SPACE HUMIDITY: +/- 10% SETPOINT

ALL SAFETIES PROVIDED BY UNIT MANUFACTURER.

**OPTIMAL START:**  
THE BAS SHALL MONITOR THE SCHEDULED OCCUPIED TIME. OCCUPIED SPACE SETPOINTS AND SPACE TEMPERATURE TO CALCULATE WHEN THE OPTIMAL START OCCURS.

**MORNING WARM-UP MODE:**  
DURING OPTIMAL START, IF THE SPACE TEMPERATURE IS BELOW THE OCCUPIED HEATING SETPOINT A MORNING WARM-UP MODE SHALL BE ACTIVATED. WHEN MORNING WARM-UP IS INITIATED THE UNIT SHALL ENABLE THE HEATING AND SUPPLY FAN. THE OUTSIDE AIR DAMPER SHALL REMAIN CLOSED. WHEN THE SPACE TEMPERATURE REACHES THE OCCUPIED HEATING SETPOINT (ADJ.), THE UNIT SHALL TRANSITION TO THE OCCUPIED MODE.

**PRE-COOL MODE:**  
DURING OPTIMAL START, IF THE SPACE TEMPERATURE IS ABOVE THE OCCUPIED COOLING SETPOINT, PRE-COOL MODE SHALL BE ACTIVATED. WHEN PRE-COOL IS INITIATED THE UNIT SHALL ENABLE THE FAN AND COOLING OR ECONOMIZER. THE OUTSIDE AIR DAMPER SHALL REMAIN CLOSED, UNLESS ECONOMIZING. WHEN THE SPACE TEMPERATURE REACHES OCCUPIED COOLING SETPOINT (ADJ.), THE UNIT SHALL TRANSITION TO THE OCCUPIED MODE.

**OPTIMAL STOP:**  
THE BAS SHALL MONITOR THE SCHEDULED UNOCCUPIED TIME. OCCUPIED SETPOINTS AND SPACE TEMPERATURE TO CALCULATE WHEN THE OPTIMAL STOP OCCURS. WHEN THE OPTIMAL STOP MODE IS ACTIVE THE UNIT CONTROLLER SHALL MAINTAIN THE SPACE TEMPERATURE TO THE SPACE TEMPERATURE OFFSET SETPOINT.

**OCCUPIED BYPASS:**  
THE BAS SHALL MONITOR THE STATUS OF THE "ON" AND "CANCEL" BUTTONS OF THE SPACE TEMPERATURE SENSOR. WHEN AN OCCUPIED BYPASS REQUEST IS RECEIVED FROM A SPACE SENSOR, THE UNIT SHALL TRANSITION FROM ITS CURRENT OCCUPANCY MODE TO OCCUPIED BYPASS MODE AND THE UNIT SHALL MAINTAIN THE SPACE TEMPERATURE TO THE OCCUPIED SETPOINTS (ADJ.).

**COOLING MODE:**  
DISCHARGE AIR TEMP:  
THE UNIT CONTROLLER SHALL USE THE DISCHARGE AIR TEMPERATURE SENSOR AND DISCHARGE AIR TEMPERATURE COOLING SETPOINT TO DETERMINE WHEN TO INITIATE REQUESTS FOR COOLING. DISCHARGE AIR SETPOINT SHALL BE MAINTAINED BY MODULATING THE COOLING COIL, STAGING DX OR MODULATING THE ECONOMIZER AS REQUIRED TO MAINTAIN THE DISCHARGE AIR SETPOINT.

**HEATING MODE:**  
DISCHARGE AIR TEMP:  
DURING UNOCCUPIED HEATING OR MORNING WARM-UP MODE, THE UNIT HEAT REQUEST WILL BE COMMUNICATED TO THE SYSTEM VAVS PRIOR TO COMMENCING HEATING OPERATION TO ALLOW VAV UNITS TO OPEN. THE VFD SHALL BE COMMANDED TO 100% AND THE HEAT WILL BE STAGED ON AND OFF TO SATISFY THE ZONE TEMPERATURE SETPOINT. DURING OCCUPIED CHANGEOVER HEATING, THE UNIT CONTROLLER SHALL MODULATE THE GAS HEAT TO MAINTAIN THE DISCHARGE AIR HEATING SETPOINT.

**HEAT MODE (STEAM COIL):**  
STEAM CONTROL VALVE TO MODULATE TO MAINTAIN DISCHARGE AIR DISCHARGE AIR TEMPERATURE SETPOINT.

**SUPPLY AIR TEMPERATURE RESET CONTROL:**  
THE DISCHARGE AIR TEMPERATURE SETPOINT SHALL BE ADJUSTED BASED ON THE TEMPERATURE OF THE CRITICAL SPACE(S).

**OUTDOOR AIR TEMPERATURE RESET:**  
THE DISCHARGE AIR TEMPERATURE SETPOINT SHALL BE ADJUSTED BASED ON THE OUTSIDE AIR TEMPERATURE AND THE COOLING LOAD OF THE BUILDING.

**SPACE TEMPERATURE RESET:**  
THE DISCHARGE AIR TEMPERATURE SETPOINT SHALL BE ADJUSTED BASED ON THE TEMPERATURE OF THE CRITICAL SPACE(S).

**ECONOMIZER CONTROL / REFERENCE DRY BULB:**  
THE SUPPLY AIR SENSOR SHALL MEASURE THE DRY BULB TEMPERATURE OF THE AIR LEAVING THE EVAPORATOR COIL WHILE ECONOMIZING. WHEN ECONOMIZING IS ENABLED AND THE UNIT IS OPERATING IN THE COOLING MODE, THE ECONOMIZER DAMPER SHALL MODULATE BETWEEN ITS MINIMUM POSITION AND 100% TO MAINTAIN THE SPACE TEMPERATURE SETPOINT. MINIMUM POSITION SHALL BE CALCULATED BASED ON SUPPLY FAN SPEED. IF THE MIXED AIR TEMPERATURE STARTS TO FALL BELOW 53.0 DEG. F, THE ECONOMIZER STARTS TO CLOSE. AT 50.0 DEG. F, THE DAMPER SHALL BE AT MINIMUM POSITION. COMPRESSORS SHALL BE DELAYED FROM OPERATING UNTIL THE ECONOMIZER HAS OPENED TO 100% FOR 5 MINUTES.

**REFERENCE DRY BULB:**  
OUTSIDE AIR (OA) TEMPERATURE IS COMPARED WITH A REFERENCE DRY BULB POINT. THE ECONOMIZER IS ENABLED WHEN OA TEMPERATURE IS LESS THAN REFERENCE DRY BULB POINT. THE ECONOMIZER IS DISABLED WHEN OA TEMPERATURE IS GREATER THAN REFERENCE DRY BULB POINT + 5.0 DEG. F.

**DEHUMIDIFICATION (DX-REHEAT):**  
THE UNIT SHALL BE IN DEHUMIDIFICATION MODE IF THE RETURN AIR HUMIDITY IS ABOVE THE DEHUMIDIFICATION SETPOINT. IN THE DEHUMIDIFICATION MODE, THE SUPPLY AIR FAN SHALL BE ENABLED. THE OUTSIDE AIR DAMPER SHALL BE COMMANDED TO MINIMUM POSITION, AND THE UNIT CONTROLLER SHALL ENERGIZE MECHANICAL COOLING AND THE REHEAT SOLENOID.

**HUMIDIFIER:**  
HUMIDISTAT IN THE SUPPLY DUCT DOWNSTREAM OF THE SUPPLY FAN SHALL MODULATE THE HUMIDIFIER TO MAINTAIN SETPOINT IN THE SPACE. PROVIDE A HIGH LIMIT HUMIDISTAT IN THE DUCT TO LIMIT THE HUMIDITY IN THE UNIT TO HIGH SETPOINT. HUMIDIFIER SHALL BE OFF WHEN UNIT IS OFF AND WHEN UNIT IS IN THE UNOCCUPIED MODE.

**MULTI CIRCUIT UNITS (DX):**  
DURING DEHUMIDIFICATION MODE THE OUTSIDE AIR TEMPERATURE SHALL BE MONITORED. IF THIS TEMPERATURE RISES ABOVE THE REHEAT CAPACITY LIMIT SETPOINT OR FALLS BELOW THE REHEAT CAPACITY LIMIT SETPOINT - 3.0 DEG. F, THE UNIT SHALL STAGE DOWN OR STAGE UP THE COMPRESSORS RESPECTIVELY TO MEET FULL OR PART LOAD CAPACITY REQUIREMENTS BASED ON AMBIENT TEMPERATURE.

**SUPPLY FAN:**  
THE SUPPLY FAN SHALL BE ENABLED WHILE IN THE OCCUPIED MODE AND CYCLED ON DURING THE UNOCCUPIED MODE. THE UNIT CONTROLLER SHALL VARY THE SUPPLY FAN SPEED TO OPTIMIZE MINIMUM FAN SPEED IN ALL COOLING AND HEATING MODES. A DIFFERENTIAL PRESSURE SWITCH SHALL MONITOR THE DIFFERENTIAL PRESSURE ACROSS THE FAN. IF THE SWITCH DOES NOT OPEN WITHIN 40 SECONDS AFTER A REQUEST FOR FAN OPERATION A FAN FAILURE ALARM SHALL BE ANNUNCIATED, THE UNIT SHALL STOP, REQUIRING A MANUAL RESET.

**RETURN FAN:**  
RETURN FAN OPERATES WHENEVER SUPPLY FAN IS PROVEN.

**FAN TRACKING:**  
RETURN FAN SPEED SHALL MODULATE TO MAINTAIN A FIXED CFM DIFFERENTIAL BETWEEN SUPPLY AND RETURN AS DETERMINED BY TAB (FAN TRACKING)

**FILTER STATUS:**  
A DIFFERENTIAL PRESSURE SWITCH SHALL MONITOR THE DIFFERENTIAL PRESSURE ACROSS THE FILTER WHEN THE FAN IS RUNNING. IF THE SWITCH CLOSURES FOR 2 MINUTES AFTER A REQUEST FOR FAN OPERATION A DIRTY FILTER ALARM SHALL BE ANNUNCIATED AT THE BAS.

**SMOKE DETECTOR SHUTDOWN:**  
THE UNIT SHALL SHUT DOWN IN RESPONSE TO A SIGNAL FROM EITHER SMOKE DETECTOR INDICATING THE PRESENCE OF SMOKE. THE SMOKE DETECTORS SHALL BE INTERLOCKED TO THE UNIT THROUGH THE DRY CONTACTS OF THE SMOKE DETECTORS. A MANUAL RESET OF THE SMOKE DETECTORS SHALL BE REQUIRED TO RESTART THE UNIT.

**FREEZE PROTECTION:**  
UPON SIGNAL FROM FREEZE/STAT OR IF MIXED AIR TEMPERATURE FALLS BELOW 40 DEG F (ADJ.) FOR 5 MINUTES, SUPPLY FAN AND RETURN FANS SHALL SHUT DOWN. OUTDOOR AIR AND RELIEF DAMPER SHALL BE CLOSED, HEATING COIL VALVE SHALL BE SET TO 50% AND COOLING COIL SHALL BE CLOSED.



1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**Lee's Summit Medical Center**  
**Hybrid OR Addition**  
**2100 SE Blue Parkway**  
**Lee's Summit, MO 64063**

Date 3-23-2020  
Job Number 3-19058  
Drawn By Author  
Checked By Checker

Revision  
Number Date Description

**M4.1**

© 2020 ACI/BOLAND, Inc.  
CONTROL DIAGRAMS



3/23/2020 10:49:14 AM

BM 360//190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER MECH-R19.rvt

## ROOFTOP UNIT SCHEDULE

### REMARKS:

1. MODULAR DOUBLE WALL FIBER FREE UNIT WITH ACCESS SECTIONS, DISCHARGE PLENUM, INLET PLENUM, PRE-FILTERS, FINAL FILTERS, CHILLED WATER COIL, DX COOLING COIL, STEAM IFB COIL, STEAM HUMIDIFIER, DUAL SUPPLY AND RETURN FANS, SS DRAIN PANS, AFMS, OUTDOOR AIR DAMPERS, LED LIGHTS, AND VFD'S BY EQUIPMENT MANUFACTURER. DEDICATED 120V LIGHTING CIRCUIT.  
2. NOTE: 30% GLYCOL.

MARK	AREA SERVED	MFR	MODEL	SUPPLY FAN							RETURN/EXHAUST FAN							COIL			FILTER		OA			RETURN AIR		ELECTRICAL							WEIGHT	REMARKS		
				CFM		ESP	TSP	QTY	HP	DRIVE	CFM		ESP	TSP	QTY	HP	DRIVE	01	02	03	PRE	FINAL	CFM	MIN	SUM	WIN	EAT DB	EAT WB	EAT DB	EAT WB	VOLTS	PHASE	MCA	MOP			FLA	EP
				MAX	MIN						MAX	MIN																										
RTU-01	HYBRID OR ADDITION	YORK	XTO-48x81	6000	1800	2.5	6.38	2	4.7	DIR	6000	1800	1	1.49	2	1	DIR	HC-01	CC-01	CC-02	MERV 11	MERV 14	1150	96.4	74.7	0	67	57	460	3	34.7	35	27.7	Yes	15000	ALL		

## CONDENSING UNIT SCHEDULE-AIR COOLED

### REMARKS:

1. SELECTION BASED ON SUMMER: 105 AND WINTER: -5. PROVIDE WITH TERMINAL STRIP READY FOR CONNECTION TO BAS SYSTEM. CONTROLLED BY BAS SYSTEM, VIBRATION ISOLATORS, SOUND BLANKETS, ALL VARIABLE CAPACITY COMPRESSORS AND PERMATRON PREVENT MODEL U CONDENSING COIL INTAKE FILTER WITH MAGNAMOUNT QUICK DISCONNECTS. MANUFACTURER SHALL CONFIRM SELECTIONS MEET PERFORMANCE REQUIREMENTS AND ADJUST AS REQUIRED.  
A. PIPING INSTALLATION SHALL BE INSPECTED BY MANUFACTURERS FACTORY TECHNICIAN.  
B. PURGE LINES WITH DRY NITROGEN PRIOR TO BRAZING.  
C. INSTALLATION PROCEDURES SHALL BE SUBMITTED PRIOR TO BEGINNING WORK.  
D. CLEANING PROCEDURES SHALL BE SUBMITTED PRIOR TO BEGINNING WORK.  
E. SUBMIT FINAL AS-BUILT DRAWINGS.  
F. PROVIDE START-UP BY MANUFACTURERS FACTORY TECHNICIAN.

MARK	MATCH WITH MARK	LOCATION	AREA SERVED	APPLICATION	BASED ON		EER	AMB	CLG MBH		COMPRESSOR						CONDENSER		UNIT ELECTRICAL						UNIT WEIGHT	REMARKS			
					MFR	MODEL			TOTAL	SENS	TYPE	CIRC QTY	QTY	DRIVE	ELECTRICAL					QTY	DRIVE	VOLTS	PHASE	FLA			MCA	MOP	EP
CC-RTU-01	RTU-01	ROOF	HYBRID OR ADDITION	DX COOLING	YORK	YCUL0031EE46	7.76	105	121	59	SCROLL	2	2	DIR	460	3	64.7	4	0	2	DIR	460	3	64.7	100	187	Yes	2000	

## GRILLE, REGISTER, AND DIFFUSER SCHEDULE

GRILLE CALLOUT IN GRILLE AND REGISTER SCHEDULE		CUBIC FEET OF AIR PER MINUTE		GRILLE CALLOUT IN GRILLE AND REGISTER SCHEDULE		CUBIC FEET OF AIR PER MINUTE		GRILLE CALLOUT IN GRILLE AND REGISTER SCHEDULE		CUBIC FEET OF AIR PER MINUTE	
CONNECTION SIZE (12x12) (RECTANGULAR)		RW12.12-500		CONNECTION AND RUNOUT SIZE (10"ø) (ROUND)		SB10-250		CONNECTION AND RUNOUT SIZE (10"ø) (ROUND)		SK10.4S-250	
GRILLE CALLOUT SYMBOL - RECTANGULAR		GRILLE CALLOUT SYMBOL - ROUND		GRILLE CALLOUT SYMBOL - SLOT		GRILLE CALLOUT SYMBOL - SLOT		GRILLE CALLOUT SYMBOL - SLOT		GRILLE CALLOUT SYMBOL - SLOT	
FIRST LETTER IN MARK:		NOTES:		REMARKS LEGEND:		REMARKS LEGEND:		REMARKS LEGEND:		REMARKS LEGEND:	
S = SUPPLY DIFFUSER		1. PROVIDE SQUARE TO ROUND ADAPTERS AS REQUIRED TO ACCOMODATE ROUND RUNOUTS.		EC = EGGRATE		SS = STAINLESS STEEL		SS = STAINLESS STEEL		SS = STAINLESS STEEL	
R = RETURN GRILLE		2. PROVIDE ALL LAY-IN GRDs WITH 24x24 LAY-IN PANEL AS REQUIRED.		LB = LONG BLADES PARALLEL TO LONG DIMENSION		OBD = OPPOSED BLADE DAMPER		OBD = OPPOSED BLADE DAMPER		OBD = OPPOSED BLADE DAMPER	
P = PLENUM RETURN GRILLE		3. FINISH TO BE WHITE UNLESS OTHERWISE SPECIFIED. COORDINATE AND VERIFY ALL FINISHES WITH ARCHITECT. ALL SELECTIONS ARE BASED ON A MAXIMUM NC OF 25		SB = SHORT BLADES PARALLEL TO LONG DIMENSION		FD = FIRE DAMPER		FD = FIRE DAMPER		FD = FIRE DAMPER	
E = EXHAUST GRILLE		4. UNLESS NOTED OTHERWISE, CONTRACTOR SHALL VERIFY ALL CEILING TYPES AND ASSOCIATED BORDER TYPES. MARKS USED MAY NOT BE IN SEQUENCE.		LF = LOUVERED FACE		RSR = ROOM SIDE REPLACEABLE HEPA		RSR = ROOM SIDE REPLACEABLE HEPA		RSR = ROOM SIDE REPLACEABLE HEPA	
L = LAMINAR FLOW SUPPLY DIFFUSER				LA = LAMINAR AIRFLOW		TZ = FILTER		TZ = FILTER		TZ = FILTER	
F = FAN FILTER SUPPLY DIFFUSER				DE = DAMPER / EXTRACTOR		NP = TECHZONE CEILING COMPATIBLE		NP = TECHZONE CEILING COMPATIBLE		NP = TECHZONE CEILING COMPATIBLE	
C = SECURITY GRILLE				EI = EXTERNALLY INSULATED		NOT PAINTED		NOT PAINTED		NOT PAINTED	
U = FLOOR MOUNTED SUPPLY GRILLE				AI = AIRFLOW LIGHT INDICATOR (GREEN)							
				FI = FILTER LOAD INDICATOR (RED)							
				CF = CONTINUOUS FILTER MONITORING (0-10V SIGNAL)							
				DD = DIFFUSION DISC ROOM SIDE BALANCING DISK							

MARK	TYPE	IMAGE	BASED ON		MOUNT	PANEL SIZE	FACE SIZE	MATERIAL	BLADE SPACING / SLOT WIDTH	DEFLECTION	REMARKS
			MFR	MODEL							
EA	EXHAUST GRILLE		TITUS	350FL	LAY-IN	24x24	12x12	ALUMINUM	3/4	35°	SB
EB	EXHAUST GRILLE		TITUS	350FL	LAY-IN	24x24	24x24	ALUMINUM	3/4	35°	SB
LA	LAMINAR FLOW SUPPLY DIFFUSER		TITUS	TLF-SS	SURFACE	24x24		ALUMINUM	-	-	DD, LA
LB	LAMINAR FLOW SUPPLY DIFFUSER		TITUS	TLF-SS	SURFACE	24x48		ALUMINUM	-	-	DD, LA
LE	LAMINAR FLOW SUPPLY DIFFUSER		TITUS	TLF-SS	SURFACE	12x48		ALUMINUM	-	-	DD, LA
RC	RETURN GRILLE		TITUS	350FL	LAY-IN	24x24	22x22	ALUMINUM	3/4	35°	LB
RW	WALL RETURN		TITUS	350FL	WALL	SEE PLANS	SEE PLANS	ALUMINUM	3/4	35°	
SC	SUPPLY DIFFUSER		TITUS	TDC-AA	LAY-IN	24x24	12x12	ALUMINUM	-	-	LOUVERED FACE

## EXHAUST FAN SCHEDULE

### REMARKS:

1. PROVIDE WITH ECM MOTOR, FAN SPEED CONTROLLER, BACKDRAFT DAMPER, BIRDSCREEN, INTERNAL WIRING PIGTAIL AND ROOF CURB.  
ALL EXHAUST FANS SHALL HAVE PERMANENTLY LUBRICATED BEARINGS AND DISCONNECT SWITCH PROVIDED AND INSTALLED BY EC.

MARK	AREA SERVED	LOC	MFR	MODEL	TYPE	FAN									MOTOR			ELECTRICAL			WEIGHT	REMARKS
						CFM	ESP	TYPE	QTY	HP	DRIVE	RPM	DBA	SONE S	HP	RPM	SPEED	VOLTS	PHASE	AMPS		
EF-01	HYBRID OR ADDITION	ROOF	GREENHECK	G-123-VG	DN	950	1	DOWN	1	0.26	DIR	1435	62	11.7	0.5	1725	VAR	120	1	6.4	100	ALL

## TERMINAL UNIT SCHEDULE - HYDRONIC

### REMARKS:

1. ALL TERMINAL UNITS SHALL BE PROVIDED WITH FLOW-RING SERVICE 'T'.  
2. ALL TERMINAL UNITS FOR USE IN HEALTHCARE APPLICATIONS SHALL BE PROVIDED WITH FIBER FREE STERIOLOC LINER. UNLESS INDICATED OTHERWISE.  
3. ALL ELECTRIC TERMINAL UNITS SHALL BE PROVIDED WITH INDEPENDENT DISCONNECT SWITCH AND FUSE BLOCK BY EQUIPMENT MANUFACTURER.

MARK	MFR	MODEL	UNIT SIZE	PRIMARY AIR		OP SP	MAX NC RAD	FAN			HEATING COIL										ELECTRICAL			LINER TYPE	REMARKS
				MAX	MIN			CFM	ESP	HP	CFM	EAT	LAT	MBH	EWT	LWT	MAX APD	GPM	MAX WPD	ROWS	VOLTS	PHASE	EP		
T1-01A	TITUS	DES	24	2250	2250	1	30	0	0	0	2250	45	90	93	180	150.3	0.17	5.0	1.9	2	24	1	Yes	STERIOLOC	ALL
T1-01B	TITUS	DES	24	2250	2250	1	30	0	0	0	2250	45	90	93	180	150.3	0.17	5.0	1.9	2	24	1	Yes	STERIOLOC	ALL
T1-02	TITUS	DES	9	700	210	1	30	0	0	0	700	45	90	57	180	150.3	0.56	2.5	0.15	2	24	1	Yes	STERIOLOC	ALL
T1-03	TITUS	DES	7	500	150	1	30	0	0	0	500	45	90	24	180	24.4	0.16	1.8	0.57	2	24	1	Yes	STERIOLOC	ALL
T1-04	TITUS	DES	6	250	75	1	30	0	0	0	250	45	90	12	180	152.3	0.2	0.9	0.2	2	24	1	Yes	STERIOLOC	ALL

## TERMINAL UNIT SCHEDULE - RETURN

### REMARKS:

1. ALL TERMINAL UNITS SHALL BE PROVIDED WITH FLOW-RING SERVICE 'T'.  
2. ALL TERMINAL UNITS FOR USE IN HEALTHCARE APPLICATIONS SHALL BE PROVIDED WITH FIBER FREE STERIOLOC LINER. UNLESS INDICATED OTHERWISE.  
3. ALL ELECTRIC TERMINAL UNITS SHALL BE PROVIDED WITH INDEPENDENT DISCONNECT SWITCH AND FUSE BLOCK BY EQUIPMENT MANUFACTURER.

MARK	BASED ON		UNIT SIZE	PRIMARY AIR		OP SP	MAX NC RAD	FAN			AIR		ELECTRICAL		LINER TYPE	REMARKS	
	MFR	MODEL		MAX	MIN			CFM	ESP	HP	EAT	LAT	VOLTS	PHASE			EP
TR1-01A	TITUS	DES/V	14	1950	585	1	30	0	0	0	0	0	24	1	Yes	STERIOLOC	ALL
TR1-01B	TITUS	DES/V	14	1950	585	1	30	0	0	0	0	0	24	1	Yes	STERIOLOC	ALL

## COIL SCHEDULE - CHILLED WATER

### REMARKS:

1. BASED ON 30% PROPYLENE GLYCOL.

MARK	MATCH WITH MARK	LOC	MFR	MODEL	FLUID TYPE	AIR						COIL								COIL DESCRIPTION				REMARKS		
						CFM	MAX APD	FV FPM	EAT		LAT		MBH		SIZE		WATER				COIL TYPE	ROWS	FIN TYPE		FPI	CONN SIZE
CC-01	RTU-01	ROOF	YORK	TBD	GLYCOL	6000	0.45	324	72.9	61.1	46.7	46.6	227	162	39"	68"	37.8	42	54	6.3	FULL	8	SINE	10	2.5"	ALL

## COIL SCHEDULE - DX

### REMARKS:

1. MANUFACTURER SHALL CONFIRM SELECTION MEETS PERFORMANCE REQUIREMENTS AND ADJUST AS REQUIRED. MC SHALL BE RESPONSIBLE FOR ALL PIPING CONNECTIONS, SIZING AND ROUTING OF REFRIGERANT PIPING.

MARK	MATCH WITH MARK	LOC	MFR	MODEL	REFRIG TYPE	AIR								COIL				COIL DESCRIPTION				REMARKS
						CFM	APD MAX	FV FPM	EAT		LAT		MBH		SIZE		COIL TYPE	ROWS	FIN TYPE	FPI		
									DB	WB	DB	WB	TOT	SENS	H	W						
CC-02	RTU-01	RTU-01	YORK	TBD	R-410a	6000	0.58	324	47	47	37.9	37.9	121	59	68"	39"	FULL	8	SINE	10	ALL	

## COIL SCHEDULE - STEAM

### REMARKS:

1. BASED ON IFB COIL.

MARK	MATCH WITH MARK	LOC	MFR	MODEL	AIR					COIL					COIL DESCRIPTION					REMARKS		
					CFM	MAX APD	FV FPM	EAT DB	LAT DB	MBH TOT	SIZE		STEAM		TRAP LB/HR	COIL TYPE	ROWS	FIN TYPE	FPI		CONN SIZE	
											H	W	PSIG ENT COIL	CONTROL VALVE PSIG ENT								PSIG LVG
HC-01	RTU-01	RTU-01	YORK	TBD	6000	0.02	326	40	85.5	295	68"	39"	5	85	5	30	FULL	1	COR	6	2	ALL





3/23/2020 10:49:16 AM

E

D

C

B

BM 360//190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER MECH-R19.rvt

6

5

4

3

2

1

CRAC INDOOR UNIT SCHEDULE

REMARKS

- 1. ALL CRAC UNITS SHALL BE PROVIDED WITH VARIABLE SPEED ECM OR SCR FAN, FILTER, FILTER CLOG INDICATOR AND ALARM, INFRARED HUMIDIFIER, STAGED ELECTRIC REHEAT, SUPPLY AIR SENSOR, TEMPERATURE AND HUMIDITY SENSOR, COMMON ALARM CONTACT, CONDENSATE PUMP (WHERE REQUIRED), TOUCH SCREEN CONTROLS, BACNET INTEGRATION AND DISCONNECT SWITCH PROVIDED BY EQUIPMENT MANUFACTURER.
- 2. CEILING MOUNTED CRAC UNITS SHALL BE PROVIDED WITH AIR DISTRIBUTION PLENUM.
- 3. ABOVE CEILING MOUNTED CRAC UNITS SHALL BE PROVIDED WITH FILTER RACK AND FLANGED DUCT CONNECTIONS.
- 3. FLOOR MOUNTED CRAC UNITS SHALL BE PROVIDED WITH STAND WITH ADJUSTABLE LEGS, LEAK DETECTION SENSOR AND CABLE.

MARK	MATCH WITH	MANUFACTURER	MODEL	TYPE	CFM	FAN HP	COOLING								HEATING		HUMIDIFIER			ELECTRICAL						FILTER TYPE	WEIGHT	REMARKS
							MBH TOTAL	MBH SENS	EAT DB	EAT WB	ENT RH %	LAT DB	LAT WB	AMBIENT	KW	AMBIENT	TYPE	CAPACITY LB/H	KW	VOLTS	PHASE	AMPS	FLA	MOP	EP			
CRAC-01	COND-CRAC-01	LIEBERT	MMD36E	CEILING	1250	0.5	28.9	25.4	72	58.7	45	53.1	50.6	105	7.3	0	IFR	4.3		460	3	16.5	13.2	20	Yes	MERV 8	350	ALL

CRAC CONDENSING UNIT SCHEDULE

REMARKS:

- 1.PROVIDE WITH DIGITAL SCROLL COMPRESSOR, STEAM GENERATED HUMIDIFIER, REHEAT SECTION, CONDENSATE PUMP, DISCONNECT PROVIDED BY EQUIPMENT MANUFACTURER AND OVERFLOW DRAIN SENSOR IN PIT. BACNET INTEGRATION AS REQUIRED

MARK	MATCH WITH MARK	MFR	MODEL	MBH TOTAL	SUMMER AMB	WINTER AMB	COMPRESS OR TYPE	ELECTRICAL					WEIGHT	REMARKS
								VOLTS	PHASE	FLA	MOP	EP		
COND-CRAC-01	CRAC-01	LIEBERT	PFH037AH	28.9	105	0	SCROLL	460	3	6.4	15	Yes	250	ALL

LOUVER SCHEDULE

REMARKS:

- 1. PROVIDE WITH BRIDSCREEN. CONFIRM FINAL ELEVATION WITH ARCHITECT.

MARK	MATCH WITH MARK	AREA SERVED	USAGE	MFR	MODEL	MATERIAL	DESIGN CFM	MAX APD	MIN. FREE AREA	SIZE			FINISH	USAGE	MAX H2O PEN OZ/SF AT 1000 FPM	REMARKS
										WIDTH	HEIGHT	DEPTH				
L-9A	(E) AHLU-09	RELIEF AIR	RELIEF AIR	RUSKIN	ELF6375DX	ALUMINUM	6000	0.05	5.5	48"	30"	6"	KYNAR	INTAKE	0.01	ALL

HUMIDIFIER SCHEDULE

REMARKS:

- 1. STEAM HUMIDIFIER PROVIDED WITH UNIT. BASED ON 5 PSI STEAM.

MARK	MATCH WITH	LOCATION	MFR	MODEL	TYPE	CFM	SIZE		MANIFOLD QTY	WATER SOURCE	EAT		LAT		HUMID LOAD	ABSORP DIST	REMARKS
							W	H			DB	RH	DB	RH			
HU-01	RTU-01	RTU-01	YORK	HUMIDIFIER		6000	81"	48"	1	STEAM	50	15	50	55	84	14"	ALL



ACI BOLAND ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By Author  
Checked By Checker

Revision		
Number	Date	Description

M5.1

© 2020 ACI/BOLAND, Inc

MECHANICAL SCHEDULES



1. THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL IN THE CASE OF A SEISMIC EVENT. THEREFORE ALL STATIONARY EQUIPMENT ON THE FLOOR OR A MEZZANINE AND ALL CONCRETE PADS SHALL BE FIXED RIGIDLY TO THE STRUCTURE. ALL ROTATING OR RECIPROCATING OR VIBRATING EQUIPMENT SHALL BE INSTALLED WITH EARTHQUAKE SNUBBERS TO LIMIT MOVEMENT. ALL HANGING EQUIPMENT, PIPING, AND DUCTWORK SHALL BE BRACED TO THE STRUCTURE. REFER TO SPECIFICATION SECTION 21 0548, 22 0548 AND 23 0548.
2. EXISTING CONDITIONS WERE TAKEN FROM ORIGINAL DRAWINGS & SITE VISITS AND MAY NOT REFLECT EXACT "AS-BUILT" CONDITION. VERIFY ALL EXISTING CONDITIONS PRIOR TO SUBMITTING FINAL BIDS. AND PRIOR TO FABRICATION OR ORDERING OF EQUIPMENT OR MATERIALS. BRING ANY DISCREPANCIES FROM THE DRAWINGS AND NOTES TO THE OWNER'S REPRESENTATIVE IMMEDIATELY. CONTRACTOR SHALL CAREFULLY COORDINATE NEW WORK AND DEMOLITION WITH ALL OTHER DISCIPLINES AND ALL EXISTING CONDITIONS. LACK OF SUCH COORDINATION AND MINOR CHANGES IN THE SCOPE OF THE DEMOLITION WORK SHALL NOT JUSTIFY AN ADDITIONAL COST.
3. REMOVAL OF EXISTING TERMINAL UNITS, FIXTURES AND EQUIPMENT WILL REQUIRE ISOLATING THE PIPING RISERS OR MAINS VIA SHUT-OFF VALVES. INSTALL AND ISOLATE VALVES WHERE REQUIRED FOR COMPLETION OF NEW WORK.
4. REMOVAL OF EXISTING DUCTWORK, DIFFUSERS, GRILLES, REGISTERS, PLUMBING FIXTURES, TERMINAL UNITS, ETC. WILL REQUIRE CAPPING, SEALING AND INSULATING EXISTING MAINS OR BRANCHES AS NECESSARY AND REQUIRED TO ALLOW THE REMAINING SYSTEMS TO FULLY OPERATE WITHOUT DEGRADATION.
5. CONTRACTOR SHALL PROVIDE PROTECTIVE PLASTIC DROP CLOTHS TO PROTECT THE EXISTING OCCUPIED AREAS AND EQUIPMENT FROM DUST AND DEBRIS DURING THE CONSTRUCTION WORK, AND SHALL CLEAN THE AREAS OF ALL CONSTRUCTION DIRT DAILY, AND UPON COMPLETION OF THE WORK. PHASING REQUIREMENTS AND SCHEDULE WILL BE PROVIDED BY OWNER.
6. REMOVE ALL EXISTING DUCTWORK, GRILLES, DIFFUSERS, AND PIPING SHOWN SHADED, CROSS HATCHED OR DASHED.
7. REPLACE EXISTING FLEXIBLE DUCTS WHERE INDICATED TO BE REUSED IF THEY EXCEED THE MAXIMUM LENGTH AS DICTATED IN THE SPECIFICATIONS.
8. REMOVE INSULATION FROM PIPING AND DUCTWORK THAT IS INDICATED TO BE REUSED. REFER TO SPECIFICATION FOR TYPE AND THICKNESS OF INSULATION TO BE USED FOR RE-INSULATION OF EXISTING PIPING.
9. ALL DRAINED PIPING RISERS AND MAINS SHALL BE REFILLED WITH FLUID AND PROPERLY VENTED BY THIS CONTRACTOR, ONCE NEW WORK HAS BEEN COMPLETED.
10. COORDINATE WITH GENERAL CONTRACTOR THE REMOVAL AND REPLACEMENT OF ALL EXISTING CEILINGS, WALLS, ETC. AS REQUIRED FOR MECHANICAL DEMOLITION WORK.
11. EXISTING DUCTS, PIPING AND EQUIPMENT, ETC., NOT TO BE UTILIZED IN THE COMPLETED BUILDINGS SHALL BE DISCONTINUED OR REMOVED AS REQUIRED. ALL ENDS OF DISCONTINUED PIPING AND DUCTS SHALL BE CAPPED IN THE NEAREST WALL, CEILING OR FLOOR SO THAT THEY ARE COMPLETELY CONCEALED OPENINGS LEFT IN WALLS, CEILINGS, ETC., WHERE EQUIPMENT, PIPE AND DUCTS, ETC., ARE REMOVED AND NOT REPLACED SHALL BE PATCHED NEATLY WITH SIMILAR MATERIAL TO ADJACENT CONSTRUCTION. REFER TO DRAWINGS DELINEATING NEW WORK FOR ADDITIONAL INFORMATION REGARDING SYSTEMS OR PORTIONS OF SYSTEMS WHERE USE IS TO BE DISCONTINUED.
12. EXISTING PIPING, FIXTURES AND EQUIPMENT THAT ARE NOT TO BE REUSED SHALL BE REMOVED AND SHALL REMAIN THE PROPERTY OF THE OWNER IF HE WISHES TO RETAIN OWNERSHIP OF SAME. IF NOT, EQUIPMENT SHALL BECOME THE PROPERTY OF THIS CONTRACTOR AND SHALL BE REMOVED FROM THE SITE AS SOON AS PRACTICAL AND DISPOSED OF IN ACCORDANCE WITH APPLICABLE LAWS AND REGULATIONS.
13. THE REMOVAL AND CHAMMELING OF EXISTING BUILDINGS SHALL BE ACCOMPLISHED IN A NEAT AND WORKMANLIKE MANNER WITHOUT REMOVAL OF EXCESS MATERIALS. THIS CONTRACTOR SHALL PATCH AND REPLACE WITH MATERIAL SIMILAR TO ADJACENT CONSTRUCTION.
14. WHERE EXISTING DUCTS, PIPING AND EQUIPMENT, ETC., THAT ARE TO BE UTILIZED IN THE COMPLETED PROGRAM CONFLICT WITH NEW CONSTRUCTION AND THE REQUIRED DEMOLITION, THEY SHALL BE RELOCATED AND RECONNECTED TO MAINTAIN THE DESIRED SERVICE.
15. THIS CONTRACTOR SHALL GIVE FULL COOPERATION TO THE GENERAL CONTRACTOR IN THE SCHEDULING AND PROCEDURE OF WORK AND SHALL TAKE EVERY PRECAUTION TO PREVENT DAMAGE FROM FREEZING TO EXISTING SYSTEMS.





3/23/2020 10:49:20 AM

\\BIM-360\190711-000- Lee's Summit Med Ctr Hybrid OR Addn\190711-000-MASTER MECH-R49.rvt

HVAC & PLUMBING SYMBOL SCHEDULE			
SYMBOL	DESCRIPTION	SYMBOL	DESCRIPTION
(#)	REFER TO PLAN NOTES	(RTU)	ROOM CALLOUT
(E)	EXISTING EQUIPMENT OR MATERIAL DESIGNATION	△	REVISION NUMBER
	EXISTING COMPONENT PEN WEIGHT	⊙	CONNECT NEW TO EXISTING. VERIFY EXACT LOCATION.
----	DEMOLITION PEN WEIGHT - COMPONENT MAY ALSO BE SHADED	⊖	DISCONNECT FROM EXISTING. VERIFY EXACT LOCATION.
T.C.C.	TEMPERATURE CONTROL CONTRACTOR	G.C.	GENERAL CONTRACTOR
E.C.	ELECTRICAL CONTRACTOR	M.C.	MECHANICAL CONTRACTOR
P.C.	PLUMBING CONTRACTOR	TYP.	TYPICAL ALL INSTANCES
24x12	(UP)DUCT SEC., POSITIVE PRESSURE-FIRST SIZE IS TOP DIM.(TYP.)		BALANCING DAMPER W/ MANUAL LOCKING QUADRANT
24x12	(DOWN) DUCT SECTION, POSITIVE PRESSURE		RECTANGULAR - OPPOSED BLADE / ROUND - BUTTERFLY
24x12	(UP) DUCT SECTION, NEGATIVE PRESSURE		BALANCING DAMPER W/ MOTORIZED LOCKING QUADRANT
24x12	(DOWN) DUCT SECTION, NEGATIVE PRESSURE		RECTANGULAR - OPPOSED BLADE / ROUND - BUTTERFLY
	SUPPLY DUCT DROP	18x12	DUCT SIZE, FIRST FIGURE IS SIDE SHOWN-CLEAR INSIDE DIM.
	SUPPLY DUCT RISER		DUCT CHANGE OF ELEVATION RISE(R) DROP(D)
	RETURN DUCT DROP		FLEXIBLE CONNECTION
	RETURN DUCT RISER		SIDE WALL SUPPLY REGISTER
	FLEXIBLE DUCT	RTU	ROOFTOP UNIT
	TURNING VANES	AHU	AIR HANDLING UNIT
SA	SUPPLY AIR	VAV	VARIABLE AIR VOLUME UNIT
OA	OUTSIDE AIR	FTU	FAN POWERED TERMINAL UNIT
RA	RETURN AIR	FCU	FAN COIL UNIT
EA	EXHAUST AIR	MAU	MAKE-UP AIR UNIT
OB	OPPOSED BLADE DAMPER	SF	SUPPLY AIR FAN
BOD	BOTTOM OF DUCT ELEVATION ABOVE FLOOR	EF	EXHAUST FAN
BOS	BOTTOM OF STEEL	SR	SUPPLY REGISTER
TOD	TOP OF DUCT ELEVATION ABOVE FLOOR	RG	RETURN GRILLE
DH	DUCT HEATER	F	FURNACE
DP	DIFFERENTIAL PRESSURE	UH	UNIT HEATER
CVR	CONSTANT VOLUME REHEAT UNIT	CRAC	COMPUTER ROOM AIR CONDITIONING UNIT
V V R	VARIABLE VOLUME REHEAT UNIT	H	HUMIDIFIER
V V T	VARIABLE VOLUME VARIABLE TEMPERATURE	VFD	VARIABLE FREQUENCY DRIVE
UV	ULTRAVIOLET STERILE CONDITIONER	FD + + +	FIRE DAMPER IN FLOOR (VERTICAL POSITION)
	RADIATION DAMPER	FD + + +	FIRE DAMPER IN WALL (HORIZONTAL POSITION)
(M)	MOTOR	SD + + +	SMOKE DAMPER
(T)	TEMPERATURE SENSOR	FSD + + +	COMBINATION FIRE/SMOKE DAMPER (VERTICAL POSITION)
(H)	HUMIDITY SENSOR	FSD + + +	COMBINATION FIRE/SMOKE DAMPER (HORIZONTAL POSITION)
(H)	ELECTRIC OR DDC HUMIDISTAT (HSTAT)	(T)	ELECTRIC OR DDC THERMOSTAT (TSTAT)
(H)	PNEUMATIC HUMIDISTAT	(T)	PNEUMATIC THERMOSTAT
----	CHILLED WATER SUPPLY LINE (CWS)	----	HOT WATER SUPPLY LINE (HWS)
----	CHILLED WATER RETURN LINE (CWR)	----	HOT WATER RETURN LINE (HWR)
----	CHILLED HOT WATER SUPPLY	----	HOT WATER REVERSE RETURN LINE (HWRR)
----	CHILLED HOT WATER RETURN	----	COOLING TOWER WATER SUPPLY (CS)
----	CHILLED WATER PRIMARY PUMP	----	COOLING TOWER WATER RETURN (CR)
----	CHILLED WATER SECONDARY PUMP	----	CHILLED WATER PUMP
----	HOT WATER PRIMARY PUMP	----	HOT WATER PUMP
----	HOT WATER SECONDARY PUMP	----	CHILLED/HOT WATER PUMP
	DOUBLE CHECK BACKFLOW ASSEMBLY		BALL VALVE
	REDUCED PRESSURE ZONE BACKFLOW ASSEMBLY		CALIBRATED BALANCE VALVE - CIRCUIT SETTER
	GAS COCK		BUTTERFLY VALVE
	VALVE IN DROP		2-WAY CONTROL VALVE (PNEUMATIC)
	VALVE IN RISER		3-WAY CONTROL VALVE (PNEUMATIC)
	GATE VALVE / SHUT OFF VALVE		2-WAY CONTROL VALVE (ELECTRIC)
	GLOBE VALVE		3-WAY CONTROL VALVE (ELECTRIC)
	3 PIECE BALL VALVE		CHECK VALVE
	HYDRAULIC VALVE		PRESSURE REDUCING VALVE (PRV)
	EMERGENCY VALVE WITH FIRE LINK		WAFER CHECK VALVE
	STRAINER		AUTOMATIC FLOW CONTROL VALVE
	PLUG VALVE		CALIBRATED ORIFICE PLATE FLOW METER
	SPRING HANGER		THERMOMETER
	PIPE HANGER		PRESSURE GAUGE
	CAP		CONCENTRIC REDUCER OR INCREASER
	PIPE RISE		ECCENTRIC REDUCER
	PIPE DROP		TOP CONNECTION, 45° OR 90°
	UNION OR FLANGE CONNECTION		BOTTOM CONNECTION, 45° OR 90°
	DIRECTION OF FLOW		SIDE CONNECTION
	ANCHOR		CAPPED OUTLET
----	DOMESTIC COLD WATER LINE (CW)	----	ABOVE FLOOR WASTE LINE (W)
----	DOMESTIC HOT WATER LINE (HW)	----	BELOW WASTE LINE (W)
----	HOT WATER RECIRC LINE (HWC)	----	PLUMBING VENT LINE (V)
F	FIRE PROTECTION LINE (F)	RL	RAIN LEADER (RL)
CA	COMPRESSED AIR (CA)	ORL	OVERFLOW RAIN LEADER (ORL)
TW	DOMESTIC TEMPERED WATER LINE (TW)	SWS	STORM SEWER (SWS)
FCW	FILTERED COLD WATER LINE (FCW)	FS	FUEL SUPPLY
SCW	SOFT COLD WATER LINE (SCW)	UF	UNUSABLE FUEL
RO	REVERSE OSMOSIS PURE WATER SUPPLY LINE (RO)	FOS	FUEL OIL SUPPLY
ROR	REVERSE OSMOSIS PURE WATER RETURN LINE (ROR)	FOR	FUEL OIL RETURN
DI	DEIONIZED PURE WATER SUPPLY (DI)	FOG	FUEL OIL GAUGE
IW	INDUSTRIAL WASTE	TOP	TOP OF PIPE ELEVATION ABOVE FLOOR
G	NATURAL GAS LINE (G)	RD	ROOF DRAIN
CD	COOLING COIL CONDENSATE DRAIN LINE (CD)	ORD	OVERFLOW ROOF DRAIN
VTR	VENT THROUGH ROOF	CI	CAST IRON
FD	FLOOR DRAIN	VCP	VITRIFIED CLAY PIPE
CO ●	CLEANOUT (FLOOR)	PVC	POLYVINYL CHLORIDE PIPE
CO ●●	2-WAY CLEANOUT (FLOOR)	TD	TRENCH DRAIN
WCO —	WALL CLEANOUT	WH	WALL HYDRANT
CO —I	END OF LINE CLEANOUT	WH#	WATER HEATER CALLOUT
P#	PLUMBING FIXTURE CALLOUT	F/S	FILTER-SEPARATOR
WHA#	WATER HAMMER ARRESTOR - PDI SIZE	FS	FLOOR SINK
FL	FLOW LINE ELEVATION	FHC	FIRE HOSE CABINET
HR	HOSE REEL	BOP	BOTTOM OF PIPE ELEVATION ABOVE FLOOR
HB	HOSE BIBB	DHWP	DOMESTIC HOT WATER PUMP
TMV	THERMOSTATIC MIXING VALVE		
----	MEDICAL OXYGEN LINE (O2)	----	NITROUS OXIDE LINE (NO)
----	MEDICAL VACUUM LINE (MV)	----	WASTE ANESTHESIA GAS DISPOSAL (WAGD)
----	MEDICAL COMPRESSED AIR LINE (MA)		
----	LOW PRESSURE (<30psig) STEAM (LPS)	----	HIGH PRESSURE (>150psig) STEAM (HPS)
----	LOW PRESSURE (<30psig) CONDENSATE RETURN (LPR)	----	HIGH PRESSURE (>150psig) CONDENSATE RETURN (HPR)
----	MEDIUM PRESSURE (30-150psig) STEAM (MPS)	----	STEAM TRAP (ST)
----	MEDIUM PRESSURE (30-150psig) CONDENSATE RETURN (MPR)		
NOT ALL MAY BE USED ON PROJECT			

## GENERAL NOTES

- VERIFY JOB SITE CONDITIONS AND DIMENSIONS BEFORE BEGINNING WORK. PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
- NO PIPING, DUCTWORK, ETC. SHALL PENETRATE STRUCTURAL MEMBERS.
- PROVIDE MISCELLANEOUS CUTTING, PATCHING AND REPAIRING OF FINISHES, ROOF, WALLS, ETC., AS REQUIRED TO ACCOMMODATE THE NEW WORK.
- G.C. IS TO PATCH ANY OPENINGS IN CORRIDORS REQUIRED TO BE CONSTRUCTED TO LIMIT THE TRANSFER OF SMOKE AND IN SMOKE BARRIERS AS REQUIRED TO MEET CODE REQUIREMENTS. SEE ARCHITECTURAL DRAWINGS FOR LOCATIONS.
- IT IS THE CONTRACTOR'S RESPONSIBILITY TO FIELD VERIFY EXACT LOCATION, CONFIGURATION AND ROUTING OF EXISTING SYSTEMS REQUIRED TO REMAIN IN OPERATION DURING THE PROJECT TO PREVENT DAMAGE DURING DEMOLITION AND PHASING.
- REMOVE ALL EXISTING EQUIPMENT, DUCTWORK AND PIPING THAT IS NOT REQUIRED FOR A WORKING INSTALLATION.
- COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO INSTALLATION.
- UNLESS OTHERWISE INDICATED, INSTALL ALL SPACE THERMOSTATS AND OTHER OCCUPANT ADJUSTABLE CONTROL DEVICES SAME HEIGHT AS ADJACENT LIGHT SWITCHES, BUT IN NO CASE HIGHER THAN 48 INCHES ABOVE FINISHED FLOOR PER ADA REQUIREMENTS. COORDINATE EXACT HEIGHT WITH ARCHITECT PRIOR TO INSTALLATION.
- ALL CUTTING AND PATCHING SHALL BE CLOSELY COORDINATED WITH THE G.C.
- COORDINATE ROUTING OF PLUMBING, AND HVAC PIPING WITH DUCTWORK, LIGHTS, ARCHITECTURAL CEILING AND STRUCTURAL ELEMENTS. PIPING SHALL RISE AND DROP, JOG OR OFFSET AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL TAKE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE. REWORK OF INSTALLED WORK TO RESOLVE CONFLICTS ARISING FROM LACK OF COORDINATION SHALL NOT JUSTIFY AN INCREASE IN THE CONTRACT AMOUNT.
- ALL DIFFUSERS ARE 4-WAY BLOW UNLESS INDICATED OTHERWISE ON THE DRAWINGS.
- FLEXIBLE DUCTWORK IS ALLOWED ON RUNOUTS TO SUPPLY DIFFUSERS ONLY. UTILIZE ONLY ABOVE LAY-IN ACCESSIBLE CEILINGS. DO NOT INSTALL FLEX DUCT ABOVE HARD CEILINGS OR WHERE EXPOSED. A MAXIMUM LENGTH OF 6'-0" MAY BE USED AT EACH CONNECTION.
- SEAL DUCTWORK AS CALLED OUT BELOW USING HARDCAST DT TAPE AND FTA-20 ADHESIVE OR HARDCAST AFG-1402 "FOIL GRIP" PER MANUFACTURERS INSTRUCTIONS. SEAL TO SMACTA SEAL CLASS A:

TYPE OF DUCT	APPLY TO JOINTS
EXHAUST DUCT (ROUND OR RECT)	TRANSVERSE AND LONGITUDINAL
MEDIUM VELOCITY (ROUND)	TRANSVERSE AND LONGITUDINAL
MEDIUM VELOCITY (RECTANGULAR)	TRANSVERSE AND LONGITUDINAL
LOW VELOCITY SUPPLY AND RETURN (RECT)	TRANSVERSE AND LONGITUDINAL
LOW VELOCITY SUPPLY (ROUND)	TRANSVERSE AND LONGITUDINAL
- INSTALL BALANCE DAMPER WITH STANDOFF AND LOCKING QUADRANT IN AN ACCESSIBLE LOCATION AT EACH RUNOUT TO SUPPLY DIFFUSERS, EXHAUST GRILLES, AND RETURN GRILLES WHERE AIRFLOW IS INDICATED, OR AS INDICATED OTHERWISE.
- ALL PENETRATIONS THROUGH FIRE RATED ASSEMBLIES SHALL BE FIRE STOPPED BY THE TRADE MAKING THE PENETRATION. REFER TO ARCHITECTURAL DRAWINGS AND SPECIFICATIONS FOR REQUIREMENTS.
- DO NOT ROUTE PIPING OR DUCTWORK OVER ELECTRICAL PANELS OR EQUIPMENT. PIPING OR DUCTWORK SHALL NOT BE ROUTED THROUGH ELECTRICAL ROOMS, TELECOM ROOMS OR ELEVATOR EQUIPMENT ROOMS UNLESS SPECIFICALLY SERVING THAT ROOM. COORDINATE WITH E.C. PROVIDE WATERTIGHT DRIP PAN WITH DRAIN TO NEAREST APPROVED RECEPTOR WHERE REQUIRED.
- COORDINATE SIZE AND LOCATION OF ACCESS DOORS IN CONSTRUCTION REQUIRED FOR ACCESS TO MECHANICAL EQUIPMENT WITH G.C.
- COORDINATE SIZE AND LOCATION OF MECHANICAL EQUIPMENT PADS WITH G.C.
- ALL WORK IS TO CONFORM WITH APPLICABLE CODES AND STANDARDS.
- DUCT SIZES SHOWN ARE ACTUAL INSIDE CLEAR DIMENSIONS. INCREASE SHEET METAL DIMENSIONS AS REQUIRED TO ACCOMMODATE DUCT LINER WHERE LINER IS SPECIFIED.
- ALL EQUIPMENT SUPPORT STANDS SHALL BE PRIMED AND PAINTED WITH EPOXY ENAMEL.
- REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATION OF ALL CEILING MOUNTED AIR DISTRIBUTION DEVICES.
- PAINT INSIDE OF DUCTWORK BLACK ANYWHERE VISIBLE THROUGH FACE OF GRILLE OR DIFFUSER.
- WHERE HYDRONIC RUNOUT SIZES ARE NOT INDICATED, SIZE PER THE FOLLOWING:  
UP TO 1 GPM - 1/2"; UP TO 3 GPM - 3/4"; UP TO 6 GPM - 1"; UP TO 10 GPM - 1-1/4"; UP TO 17 GPM - 1-1/2"
- HYDRONIC PIPING SHALL BE MAINTAINED FULL SIZE UP TO COIL CONNECTIONS. SHUT-OFF VALVES, STRAINERS, BALANCE VALVES, ETC. WILL NOT BE ALLOWED TO REDUCE FROM LINE/RUNOUT SIZE. CONTROL VALVES MAY BE DOWN SIZED FOR FLOW RATE, NOT TO EXCEED 4 PSIG PRESSURE DROP AT DESIGN FLOW.
- UNDERGROUND-TYPE UTILITY MARKER: PROVIDE A CAST ALUMINUM UTILITY MARKER AT EVERY 100 FEET FOR ALL UNDERGROUND UTILITIES (INCLUDING HEAT PUMP WELL FIELD). 4"x7" TOP WITH 10" MINIMUM SPIKE LABEL WITH THE APPROPRIATE UTILITY. EACH VERTICAL GROUND SOURCE HEAT PUMP WELL/BORE SHALL BE LABELED "GCHP WELL #X WITH APPROPRIATE NUMERIC WELL NUMBER IDENTIFICATION. MARKERS AS MANUFACTURED BY LAKE SHORE MARKERS, ERIE, PENNSYLVANIA.
- TEMPERATURE CONTROLS CONTRACTOR (TCC) SHALL FURNISH AND INSTALL ALL LOW VOLTAGE WIRING AND ASSOCIATED CONDUIT REQUIRED FOR MECHANICAL CONTROL SYSTEM. WIRING SHALL BE IN CONDUIT INSIDE WALLS, IN ROOMS WITH EXPOSED CEILINGS, AND ABOVE HARD CEILINGS. LINE VOLTAGE WIRING AND ASSOCIATED CONDUIT SHALL BE PROVIDED AND INSTALLED BY E.C. CONTROL SYSTEM SHALL BE INSTALLED IN ACCORDANCE WITH SPECIFICATIONS.
- ALL CONTROL DAMPERS SHALL BE FURNISHED BY TCC AND INSTALLED BY THE MC. MOTOR OPERATORS SHALL BE FURNISHED AND INSTALLED BY THE TCC.
- COORDINATE ACCESS TO EQUIPMENT AND VALVES INSTALLED ABOVE 'HARD' CEILINGS AND IN MASONRY CHASES WITH GENERAL CONTRACTOR. PROVIDE LOCKING ACCESS DOORS FOR INSTALLATION BY CONTRACTOR AS REQUIRED TO SERVICE CONCEALED DAMPERS, VALVES AND EQUIPMENT. CEILING ACCESS DOORS FOR FIRE DAMPERS, SMOKE DAMPERS AND FIRE SMOKE DAMPERS FURNISHED AND INSTALLED BY CONTRACTOR.
- CONTRACTOR TO INSTALL TEMPORARY FILTERS OVER ALL RETURN AND EXHAUST GRILLES IN WORK AREA DURING CONSTRUCTION.
- THESE DRAWINGS ARE ACCOMPANIED BY SPECIFICATIONS. REFER TO SPECIFICATIONS FOR FURTHER INFORMATION.
- EQUIPMENT THAT REQUIRES MAINTENANCE SHALL BE LOCATED A MINIMUM OF 10'-0" FROM THE BUILDING ROOF EDGE WHERE REQUIRED BY CODE.
- REFER TO ARCHITECTURAL DRAWINGS FOR LOCATIONS OF TEMPORARY PARTITIONS.

NOTE: NOT ALL MAY APPLY ON PROJECT.

## GENERAL DEMOLITION NOTES

- VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING WORK. BRING ANY DISCREPANCIES FROM THE DRAWINGS AND NOTES TO THE ARCHITECT IMMEDIATELY. MINOR CHANGES IN THE SCOPE OF THE DEMOLITION WORK SHALL NOT JUSTIFY AN ADDITIONAL COST.
- REMOVAL OF EXISTING FIXTURES AND EQUIPMENT WILL REQUIRE ISOLATING THE PIPING RISERS OR MAINS VIA SHUT-OFF VALVES. INSTALL NEW ISOLATION VALVES WHERE REQUIRED FOR COMPLETION OF WORK.
- REMOVAL OF EXISTING PLUMBING FIXTURES AND EQUIPMENT, ETC. WILL REQUIRE CAPPING AND SEALING EXISTING MAINS OR BRANCHES AS NECESSARY AND REQUIRED TO ALLOW THE REMAINING SYSTEMS TO FULLY OPERATE WITHOUT DEGRADATION.
- CONTRACTOR SHALL PROVIDE PROTECTIVE PLASTIC DROP CLOTHS TO PROTECT THE EXISTING OCCUPIED AREAS AND EQUIPMENT FROM DUST AND DEBRIS DURING THE CONSTRUCTION WORK, AND SHALL CLEAN THE AREAS OF ALL CONSTRUCTION DIRT DAILY, AND UPON COMPLETION OF THE WORK.
- ALL DRAINED PIPING RISERS AND MAINS SHALL BE REFILLED WITH PROPER FLUID AND PROPERLY VENTED BY THIS CONTRACTOR, ONCE NEW WORK HAS BEEN INSTALLED.
- COORDINATE WITH GENERAL CONTRACTOR THE REMOVAL AND REPLACEMENT OF ALL EXISTING CEILINGS, WALLS, ETC. AS REQUIRED FOR MECHANICAL DEMOLITION WORK.
- EXISTING PIPING AND EQUIPMENT, ETC., NOT TO BE UTILIZED IN THE COMPLETED BUILDING SHALL BE DISCONTINUED OR REMOVED AS REQUIRED. ALL ENDS OF DISCONTINUED PIPING SHALL BE CAPPED IN THE NEAREST WALL, CEILING OR FLOOR SO THAT THEY ARE COMPLETELY CONCEALED. OPENINGS LEFT IN WALLS, CEILINGS, ETC., WHERE EQUIPMENT AND PIPE, ETC., ARE REMOVED AND NOT REPLACED, SHALL BE PATCHED NEATLY WITH SIMILAR MATERIAL TO ADJACENT CONSTRUCTION. REFER TO DRAWINGS DELINEATING NEW WORK FOR ADDITIONAL INFORMATION REGARDING SYSTEMS OR PORTIONS OF SYSTEMS WHERE USE IS TO BE DISCONTINUED.
- EXISTING PIPING, FIXTURES AND EQUIPMENT THAT ARE NOT TO BE REUSED SHALL BE REMOVED AND SHALL REMAIN THE PROPERTY OF THE OWNER IF THEY WISH TO RETAIN OWNERSHIP OF SAME. IF NOT, EQUIPMENT SHALL BECOME THE PROPERTY OF THIS CONTRACTOR AND SHALL BE REMOVED FROM THE SITE AS SOON AS PRACTICAL AND DISPOSED OF IN ACCORDANCE WITH APPLICABLE LAWS AND REGULATIONS.
- ALL CUTTING AND CHANNELING OF EXISTING BUILDING SHALL BE ACCOMPLISHED IN A NEAT AND WORKMANLIKE MANNER WITHOUT REMOVAL OF EXCESS MATERIALS. THIS CONTRACTOR SHALL PATCH AND REPLACE WITH MATERIAL SIMILAR TO ADJACENT CONSTRUCTION.
- WHERE EXISTING PIPING AND EQUIPMENT, ETC., THAT ARE TO BE UTILIZED IN THE COMPLETED PROGRAM CONFLICT WITH NEW CONSTRUCTION AND THE REQUIRED DEMOLITION, THEY SHALL BE RELOCATED AND RECONNECTED TO MAINTAIN THE DESIRED SERVICE.
- PORTIONS OF EXISTING SYSTEMS MAY BE SHOWN FOR CLARITY EVEN THOUGH IT MAY NOT BE NECESSARY TO MODIFY OR REVISE THEM. ALL EXISTING SYSTEMS ARE SHOWN BASED ON ORIGINAL OR REMODEL BUILDING DRAWINGS. CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS.
- ALL WORK MUST BE COORDINATED AND SCHEDULED WITH THE OWNER AND OCCUPANTS OF THIS BUILDING SO AS TO PROVIDE THE LEAST AMOUNT OF DISRUPTION OF BUILDING ACTIVITIES AS POSSIBLE. MAINTAIN CONDITIONED SPACE FOR ALL OWNER OCCUPIED AREAS DURING CONSTRUCTION.
- ALL ACCESSIBLE ABANDONED PIPING AND DUCTWORK SHALL BE REMOVED AND PROPERLY DISPOSED OF.

NOTE: NOT ALL MAY APPLY TO PROJECT

## DRAWING SYMBOLS

EQUIPMENT CALLOUT	SECTIONS	DETAILS

## HVAC DESIGN CONDITIONS

SPACE OR AREA	OUTDOOR AIR		INDOOR HEATING	INDOOR COOLING	RELATIVE HUMIDITY	MODES	NOTES
	SUMMER DBWB	WINTER DB	°F	°F	%RH		
CORRIDOR	96.4 F	-1 F	72	72	50		
EQUIPMENT ROOM	96.4 F	-1 F	68	68	50		
HYBRID OR	96.4 F	-1 F	62	62	50		
STORAGE ROOM	96.4 F	-1 F	72	72	50		

### SEISMIC RESTRAINTS:

THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL IN THE CASE OF A SEISMIC EVENT. THEREFORE ALL STATIONARY EQUIPMENT ON THE FLOOR AND ALL CONCRETE PADS SHALL BE FIXED RIGIDLY TO THE STRUCTURE. ALL ROTATING OR RECIPROCATING OR VIBRATING EQUIPMENT SHALL BE INSTALLED WITH EARTHQUAKE SNUBBERS TO LIMIT MOVEMENT. ALL HANGING EQUIPMENT, PIPING, AND DUCTWORK SHALL BE BRACED TO THE STRUCTURE. REFER TO SPECIFICATION SECTIONS 21 0548, 22 0548, AND 23 0548.

## SHEET LIST

FP1.10 FIRE PROTECTION FLOOR PLAN  
MP1.0 MECHANICAL COVER SHEET  
PD1.0 PLUMBING DEMOLITION FLOOR PLAN  
P1.0 PLUMBING FLOOR PLANS  
P1.1 MEDICAL GAS FLOOR PLAN  
MD1.0 HVAC DEMOLITION FLOOR PLAN  
M1.0 HVAC FLOOR PLANS  
M2.0 MECHANICAL HYDRONICS & ROOF PLAN  
M3.0 MECHANICAL DETAILS  
M3.1 MECHANICAL DETAILS  
M4.0 CONTROL DIAGRAMS  
M4.1 CONTROL DIAGRAMS  
M5.0 MECHANICAL SCHEDULES  
M5.1 MECHANICAL SCHEDULES  
MR1.0 AIRFLOW DIAGRAM



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
633 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description

MP1.0

© 2020 ACI/BOLAND, Inc

MECHANICAL COVER SHEET



AIR BALANCE SCHEDULE						
SYSTEM	SUPPLY	RETURN	EXHAUST	OFFSET	OA	% OA
RTU-01	5950	4800	850	300	1150	19




ACI  
BOLAND  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600  
  
ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:


STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

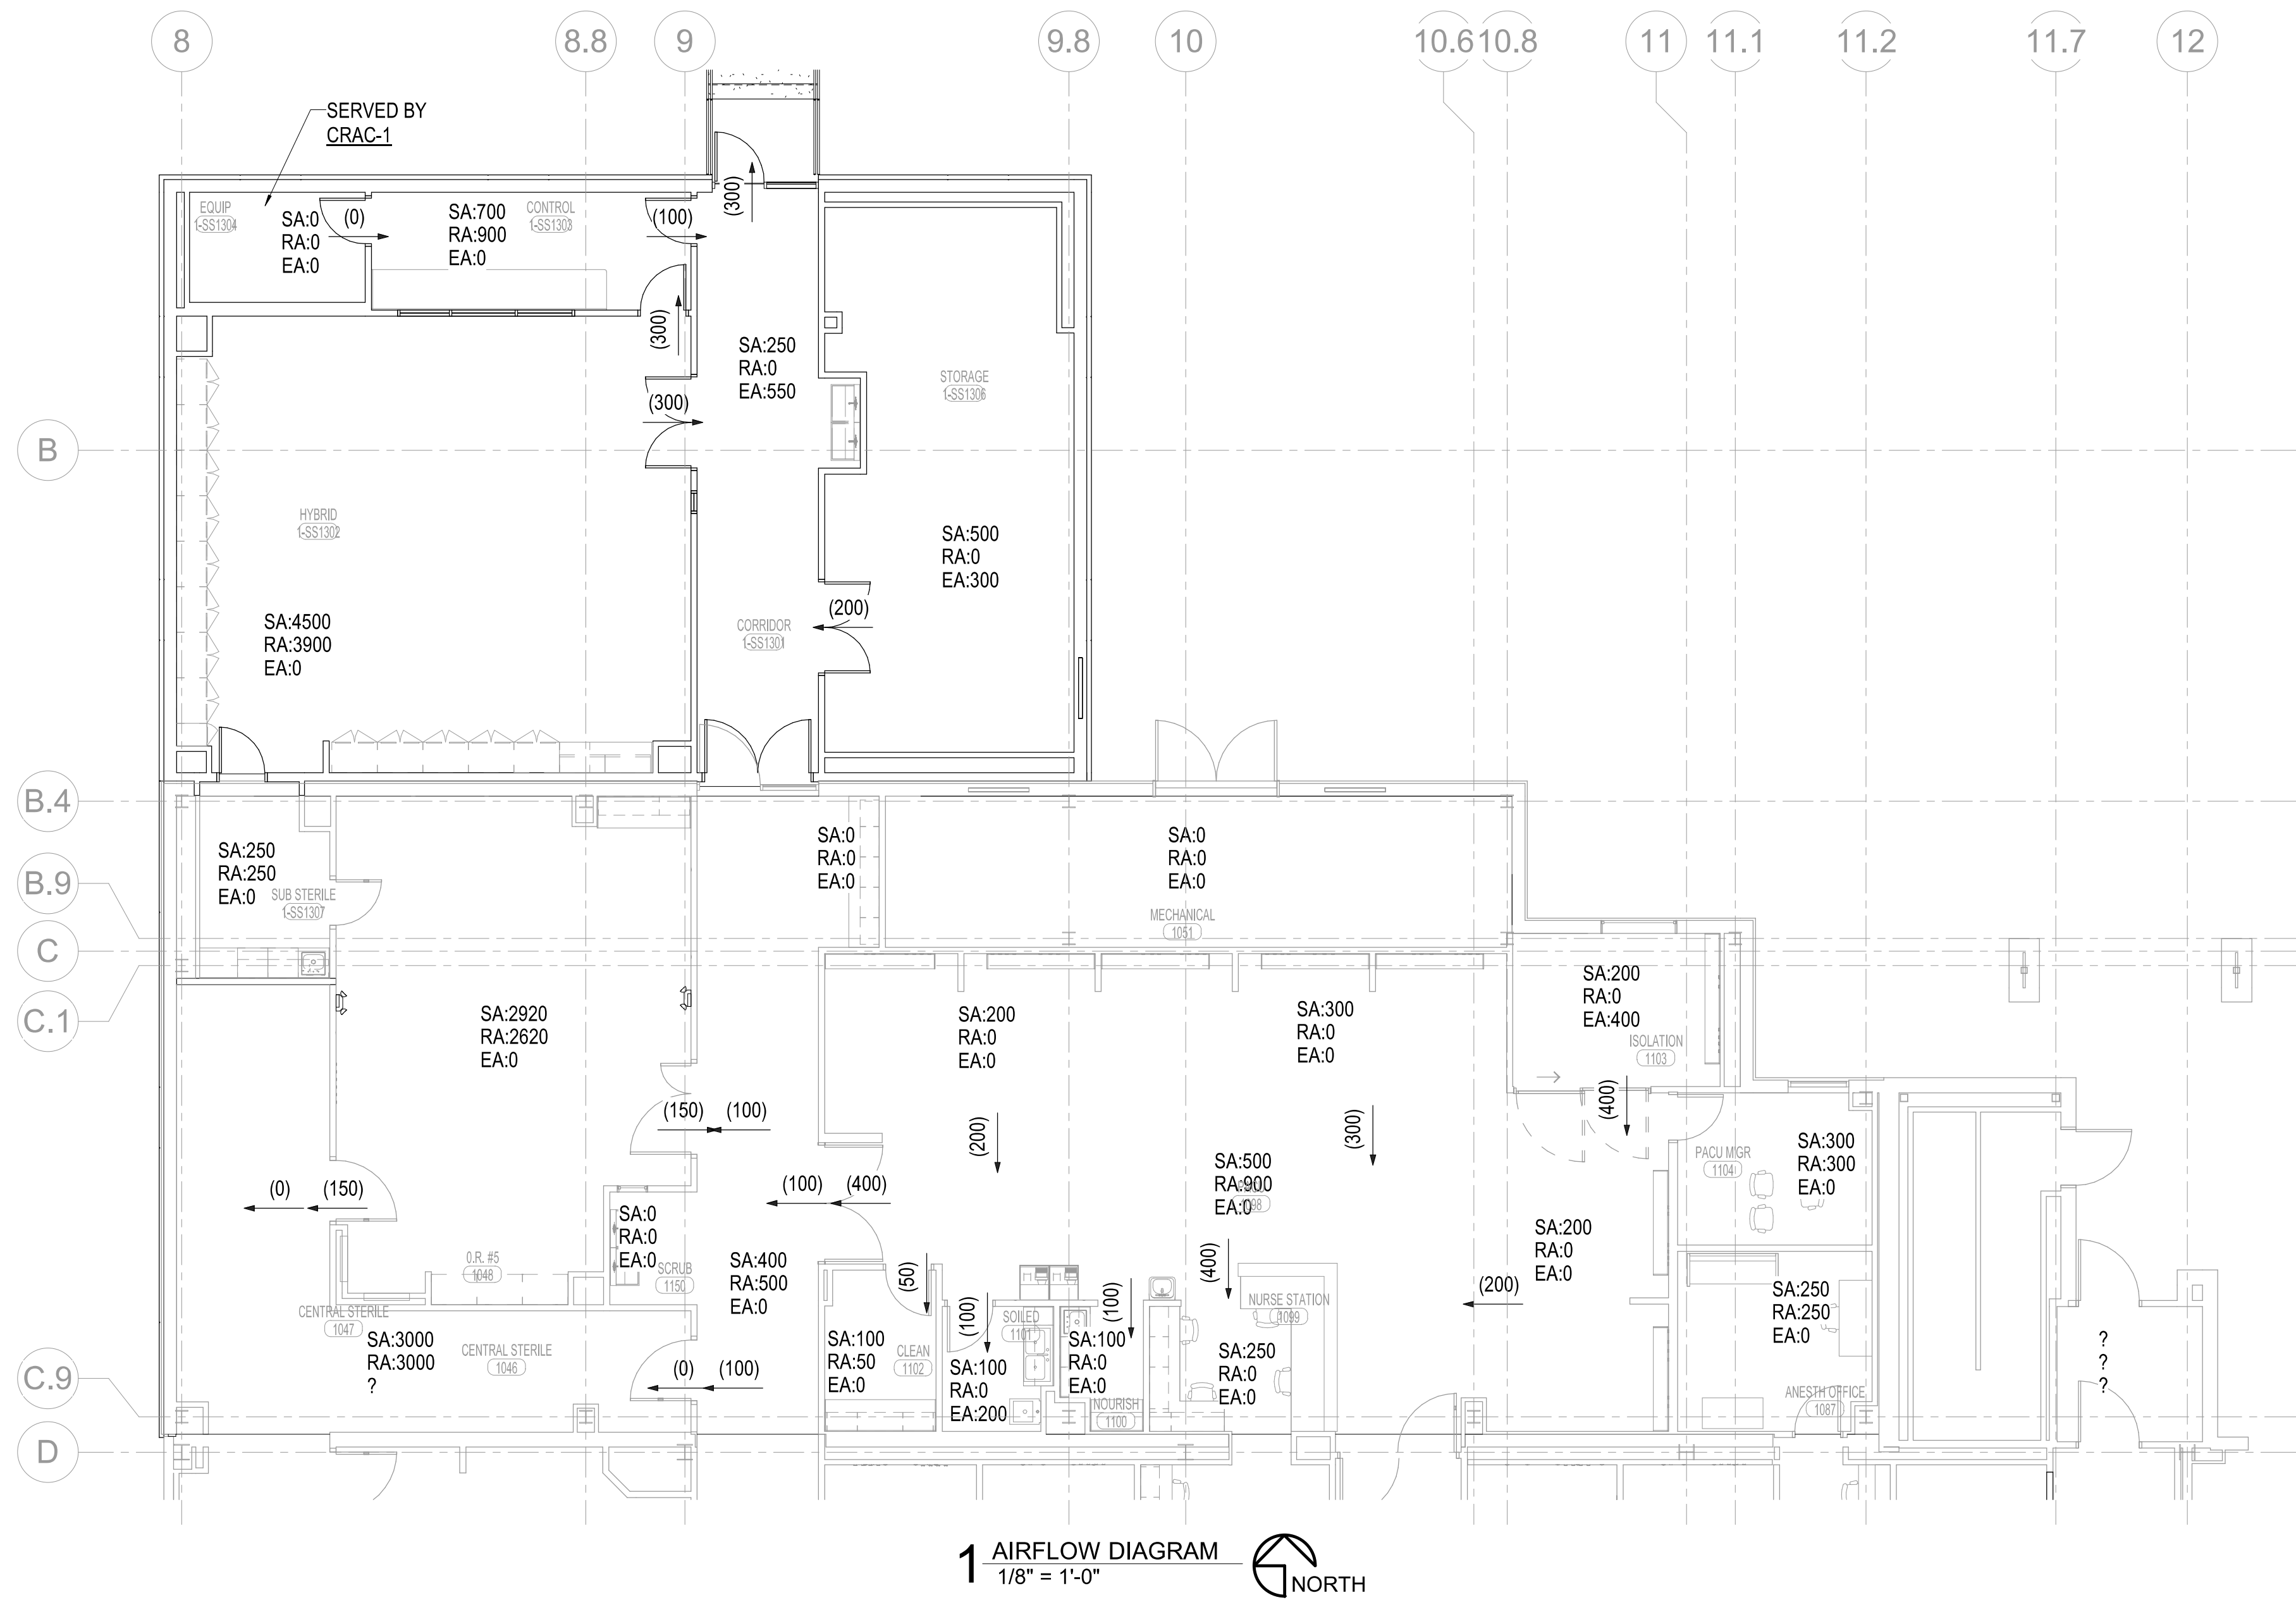

1 AIRFLOW DIAGRAM  
1/8" = 1'-0" NORTH

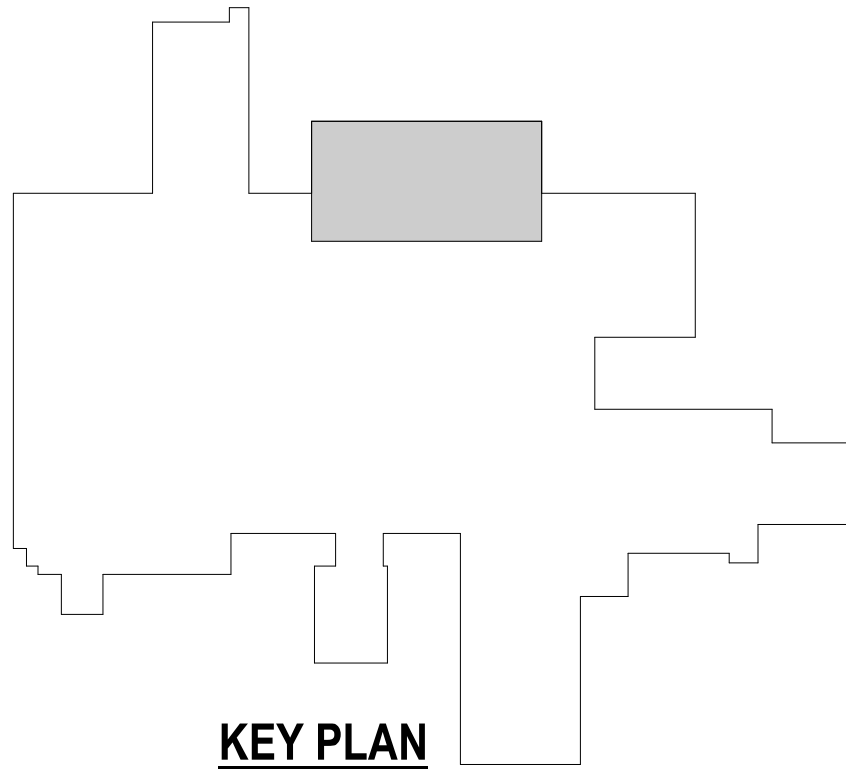

KEY PLAN



Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date	3-23-2020
Job Number	3-19058
Drawn By	DBB
Checked By	SPH

Revision		
Number	Date	Description

MR1.0



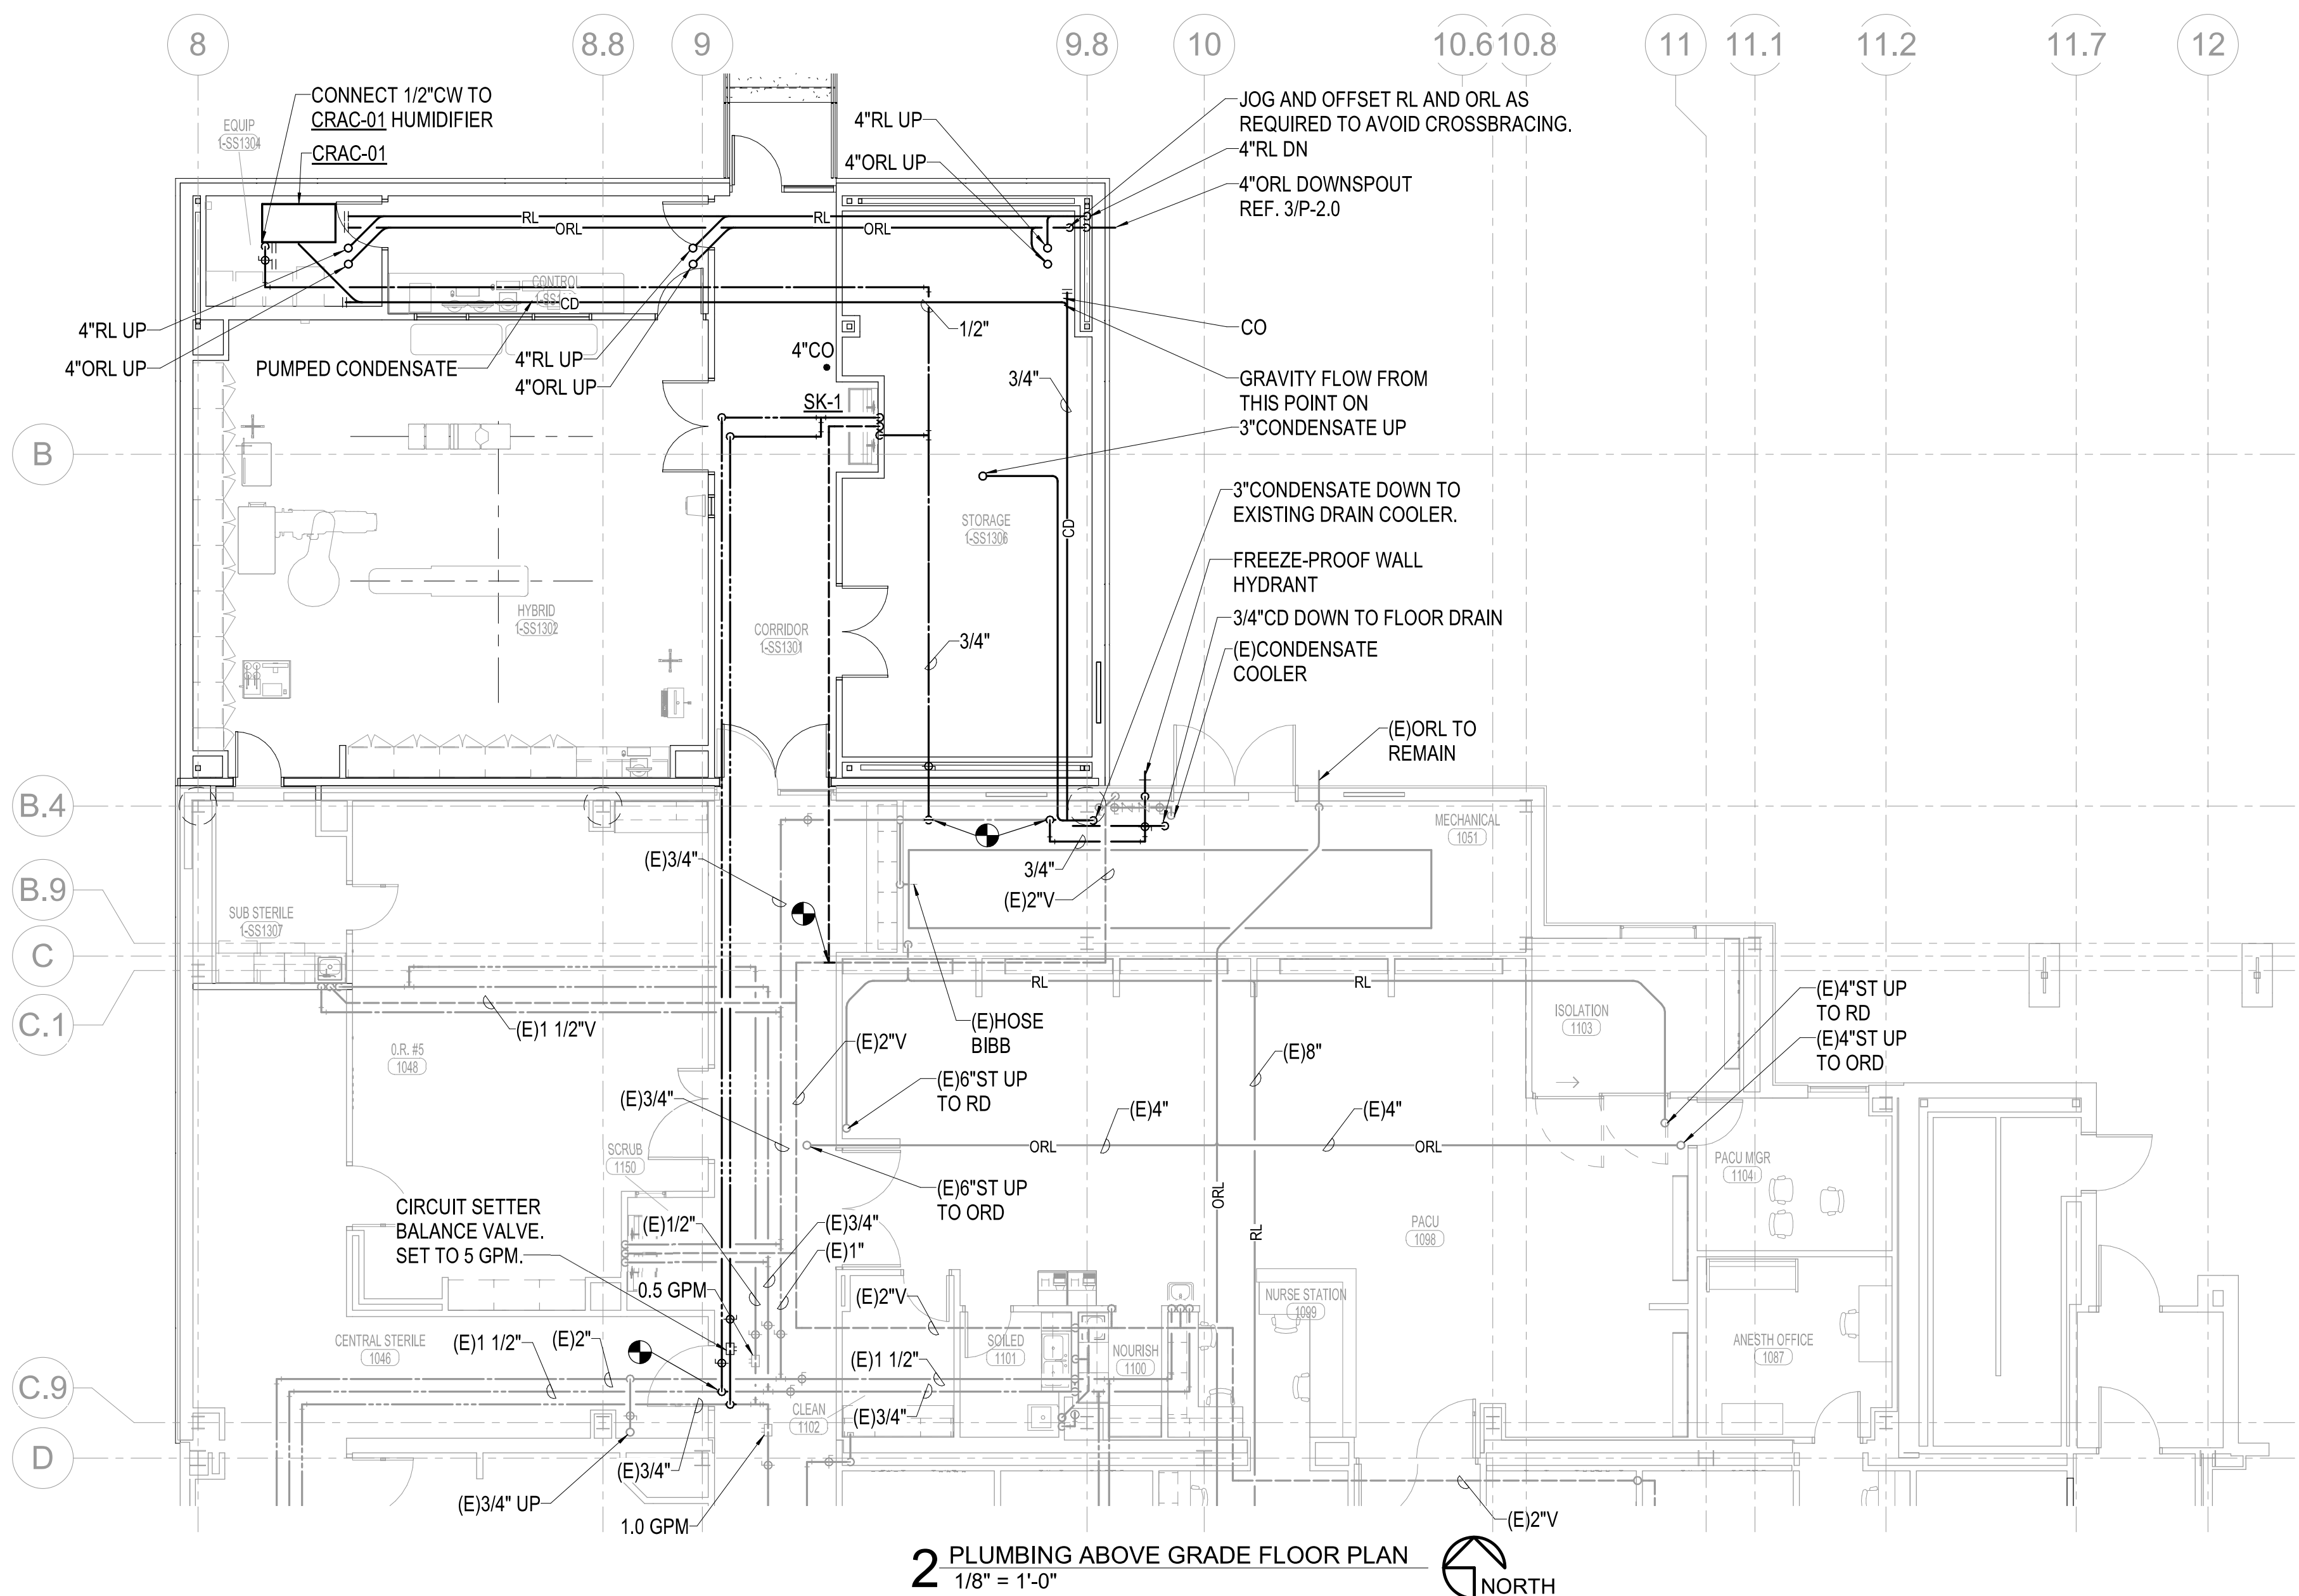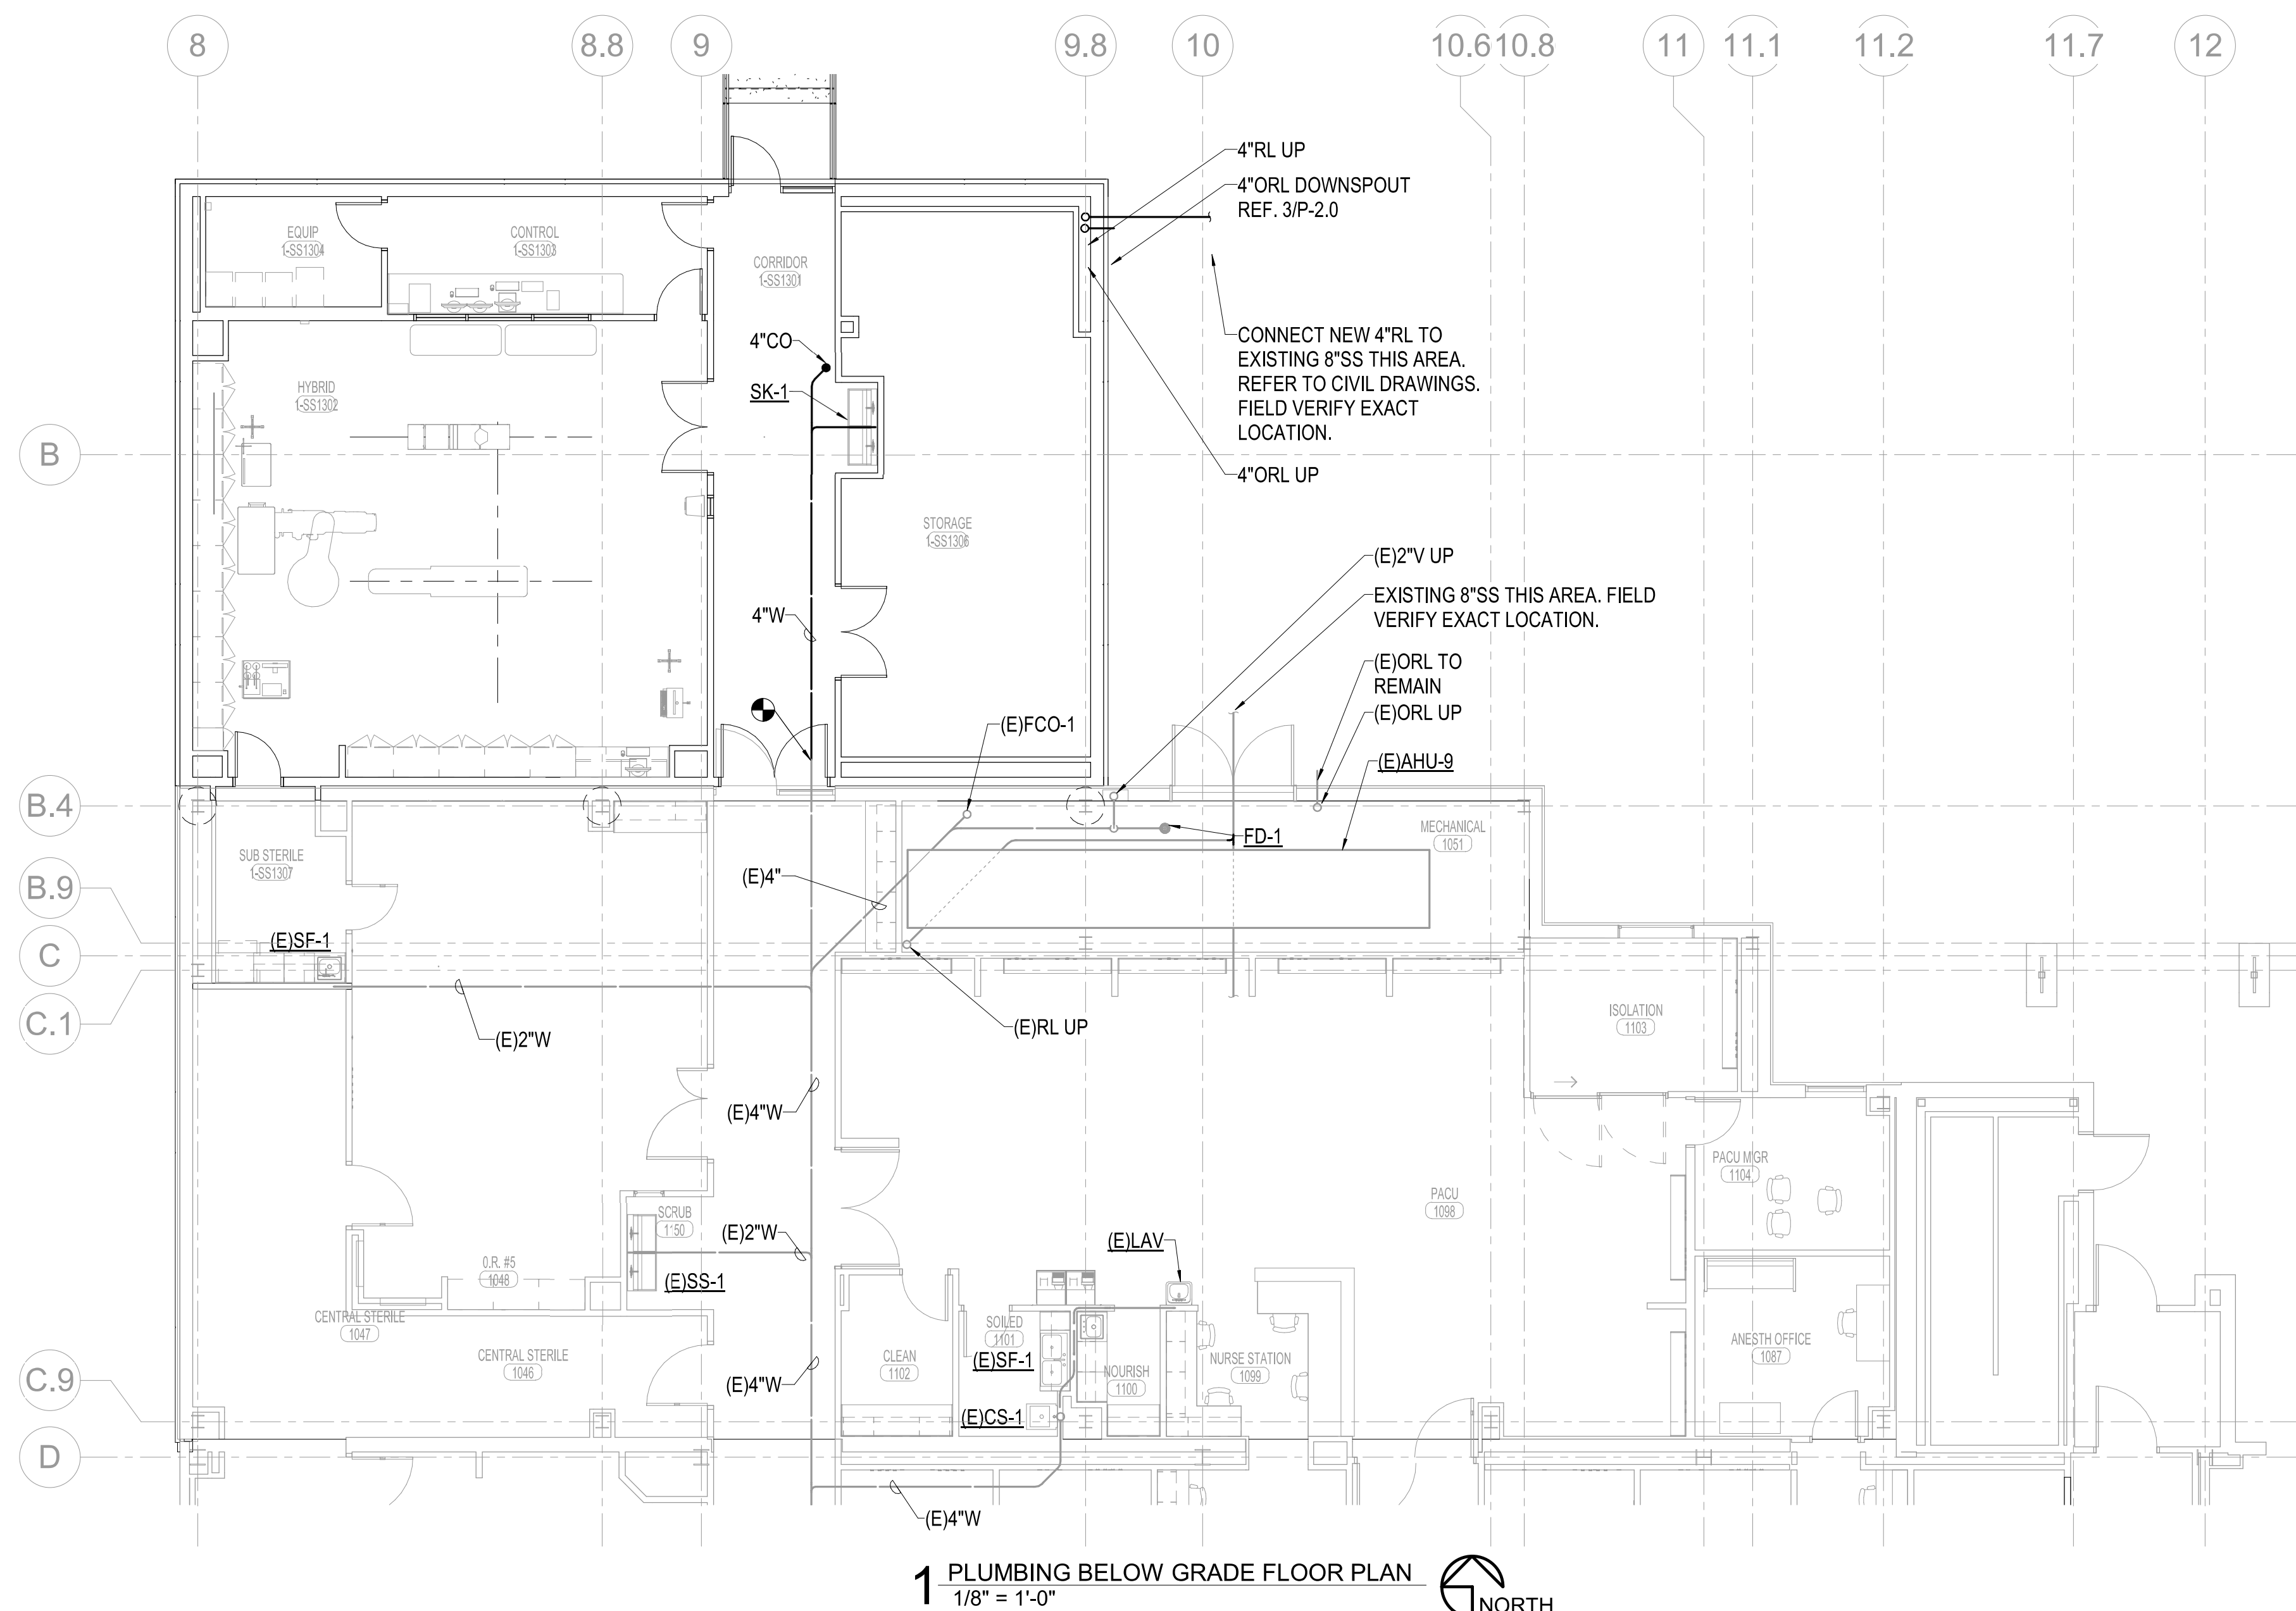

**PLUMBING GENERAL NOTES:**



1. PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
2. ALL CUTTING, PATCHING AND DEMOLITION WORK SHALL BE CLOSELY COORDINATED WITH THE EXISTING CONDITIONS AND THE REQUIRED NEW WORK. G.C. SHALL PATCH AND FINISH PENETRATIONS OF EXISTING SURFACES TO MATCH ADJACENT SURFACES.
3. FIELD VERIFY BEST ROUTING FOR NEW PIPING AND DUCTWORK. COORDINATE WITH EXISTING EQUIPMENT, PIPING AND DUCTWORK. NEW PIPING SHALL RISE AND OPEN UP AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL BE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE. ANY EXPENSES ARISING FROM LACK OF COORDINATION SHALL BE MADE AT THE CONTRACTOR'S EXPENSE.
4. REFER TO ARCHITECTURAL SPECIFICATIONS AND PLANS FOR PHASING OF DEMOLITION AND NEW WORK. ADJACENT AREAS ARE 100% OCCUPIED AND CONTRACTOR SHALL WORK CLOSELY WITH OWNER TO SCHEDULE DEMOLITION AND CONSTRUCTION TO BE AS LEAST DISRUPTIVE AS POSSIBLE.

## PLUMBING FIXTURE SCHEDULE

MARK	FIXTURE	WATER				WASTE		VENT	REMARKS
		COLD		HOT		RUNOUT	CONN.		
		RUNOUT	CONN.	RUNOUT	CONN.				
SK-1	SCRUB SINK	1/2"	1/2"	1/2"	1/2"	2"	1-1/4"	1-1/2"	

## PLUMBING FIXTURE LIST

SK-1: SCRUB SINK  
WHITEHALL #4102, 63-1/2"x27". DUAL STATION, TYPE 304 STAINLESS STEEL, POLISHED SATIN FINISH WITH WALL MOUNTING CARRIER, FLAT GRID STRAINERS AND TAILPIECES, MOUNT RIM @ 40" AFF. FAUCETS KNEE  
ACTIVATED, DIGITAL TIME DISPLAY, FACE MOUNT, SURGICAL BEND GOOSENECK SPOUT, SENSOR OPERATED, 120 VAC/24 PLUG-IN TRANSFORMER, T&P MIXING VALVE ADJUSTABLE AT BACKSPASH AND FILTERED  
SOLENOID VALVES.

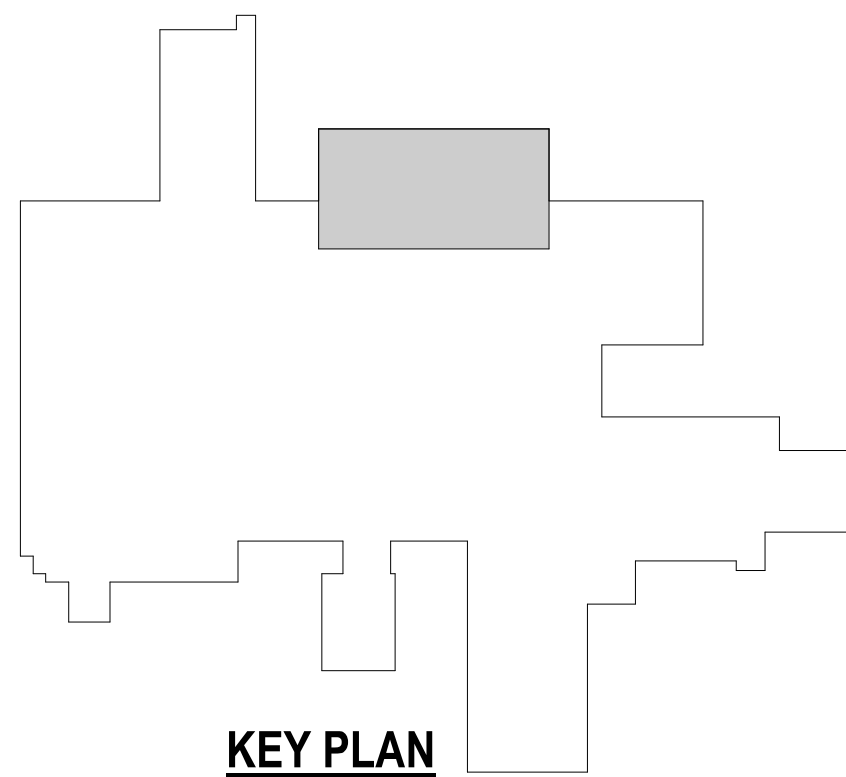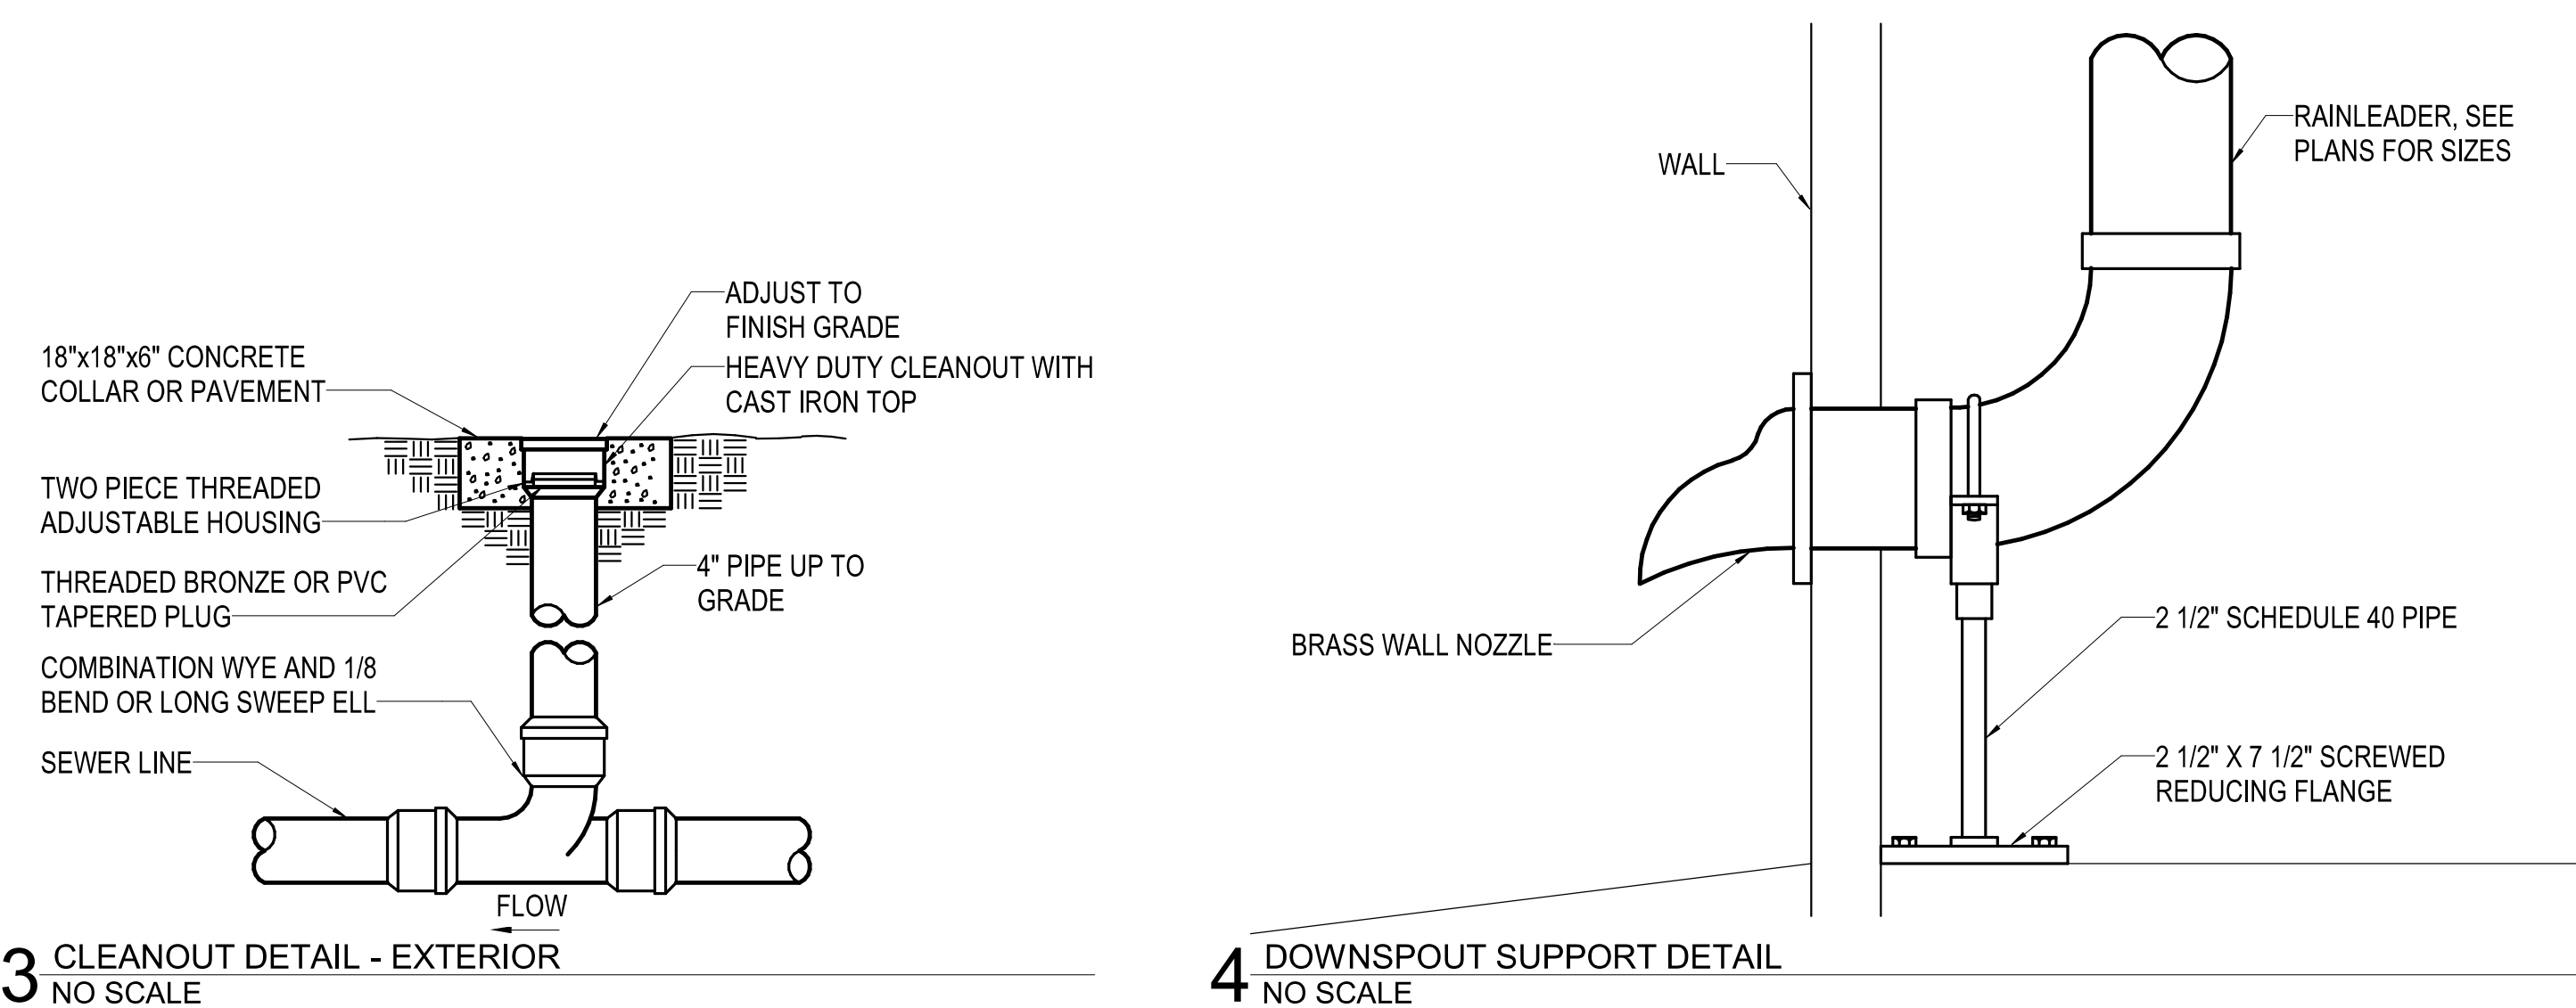

**A C I**  
**BOLAND**  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



**Professional Engineering Consultants, P.A.**  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date	3-23-2020
Job Number	3-19058
Drawn By	DBB
Checked By	SPH

Revision		
Number	Date	Description

# P1.0

© 2020 ACI/BOLAND, Inc

---

PLUMBING FLOOR PLANS



## MEDICAL GAS CONNECTION SCHEDULE

REMARKS:

- WHERE ZONE VALVE BOXES OR AREA ALARM PANELS ARE LOCATED IN SMOKE WALL, PROVIDE APPROPRIATE PROTECTION AROUND THE BOX TO MAINTAIN THE RATING.
- INDICATE ABNORMAL PRESSURE.

EQUIPMENT CALLOUT	LOC	SERVING ROOM	PIPING CONNECTIONS					ALARM SIGNAL				
			OXYGEN	VACUUM	MEDICAL AIR	WAGD	NITROUS OXIDE	OXYGEN	VACUUM	MEDICAL AIR	WAGD	NITROUS OXIDE
ZVB-01	CORRIDOR 1-SS1301	HYBRID 1-SS1302	3/4"	3/4"	3/4"	3/4"	3/4"					
AREA ALARM-01	CORRIDOR 1-SS1301	HYBRID 1-SS1302						2	2	2	2	2

## MEDICAL GAS OUTLET SCHEDULE

REMARKS:

- MINIMUM RUNOUT SIZE TO BRANCH MAIN TO BE 1/2" FOR OXYGEN AND MED AIR; 3/4" FOR VAC.

MARK	DESCRIPTION	OXYGEN (O)	VAC (VAC)	MEDICAL AIR (MA)	WASTE ANETH. DISPOSAL (WAGD)	NITROUS OXIDE (NO)	REMARKS
MGO-01	BOOM CONNECTION	2	2	1	1	1	1

PLUMBING GENERAL NOTES:

- PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
- ALL CUTTING, PATCHING AND DEMOLITION WORK SHALL BE CLOSELY COORDINATED WITH THE EXISTING CONDITIONS AND THE REQUIRED NEW WORK. G.C. SHALL PATCH AND FINISH PENETRATIONS OF EXISTING SURFACES TO MATCH ADJACENT SURFACES.
- FIELD VERIFY BEST ROUTING FOR NEW PIPING AND DUCTWORK. COORDINATE WITH EXISTING EQUIPMENT, PIPING AND DUCTWORK. NEW PIPING SHALL RISE AND DROP, JOG OR OFFSET AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL TAKE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE. ANY EXPENSES ARISING FROM LACK OF COORDINATION SHALL BE MADE AT THE CONTRACTOR'S EXPENSE.
- REFER TO ARCHITECTURAL SPECIFICATIONS AND PLANS FOR PHASING OF DEMOLITION AND NEW WORK. ADJACENT AREAS ARE 100% OCCUPIED AND CONTRACTOR SHALL WORK CLOSELY WITH OWNER TO SCHEDULE DEMOLITION AND CONSTRUCTION TO BE AS LEAST DISRUPTIVE AS POSSIBLE.



# ACI BOLAND ARCHITECTS


1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

## STRUCTURAL, MECHANICAL, ELECTRICAL, & PLUMBING CONSULTANT



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

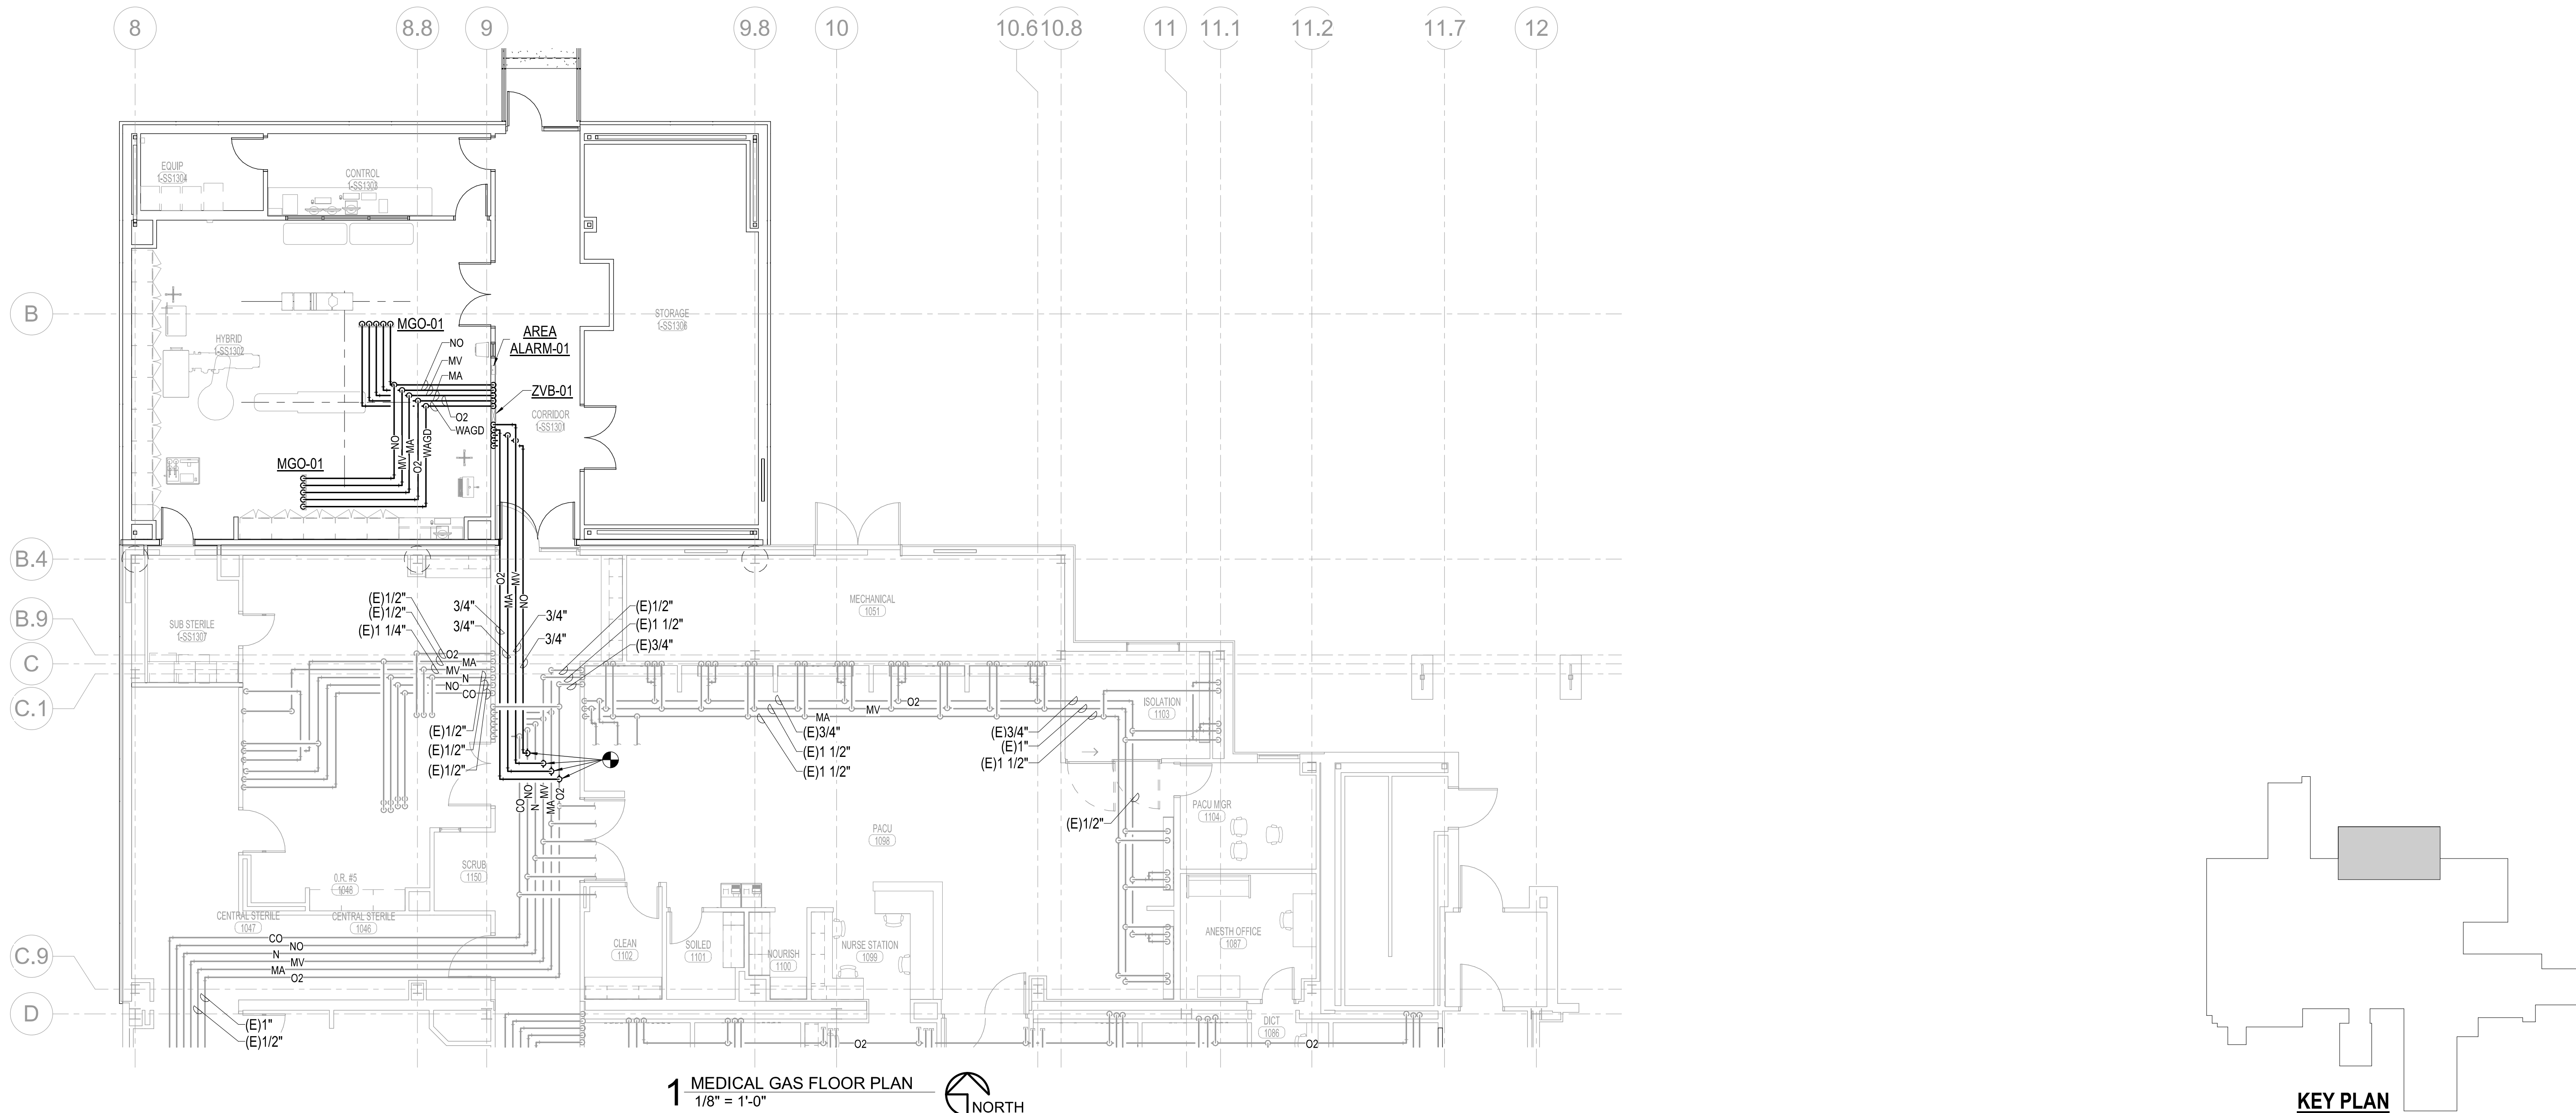

1 MEDICAL GAS FLOOR PLAN  
1/8" = 1'-0"



KEY PLAN

## Lee's Summit Medical Center Hybrid OR Addition 2100 SE Blue Parkway Lee's Summit, MO 64063


Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description


P1.1

© 2020 ACI/BOLAND, Inc.  
MEDICAL GAS FLOOR PLAN



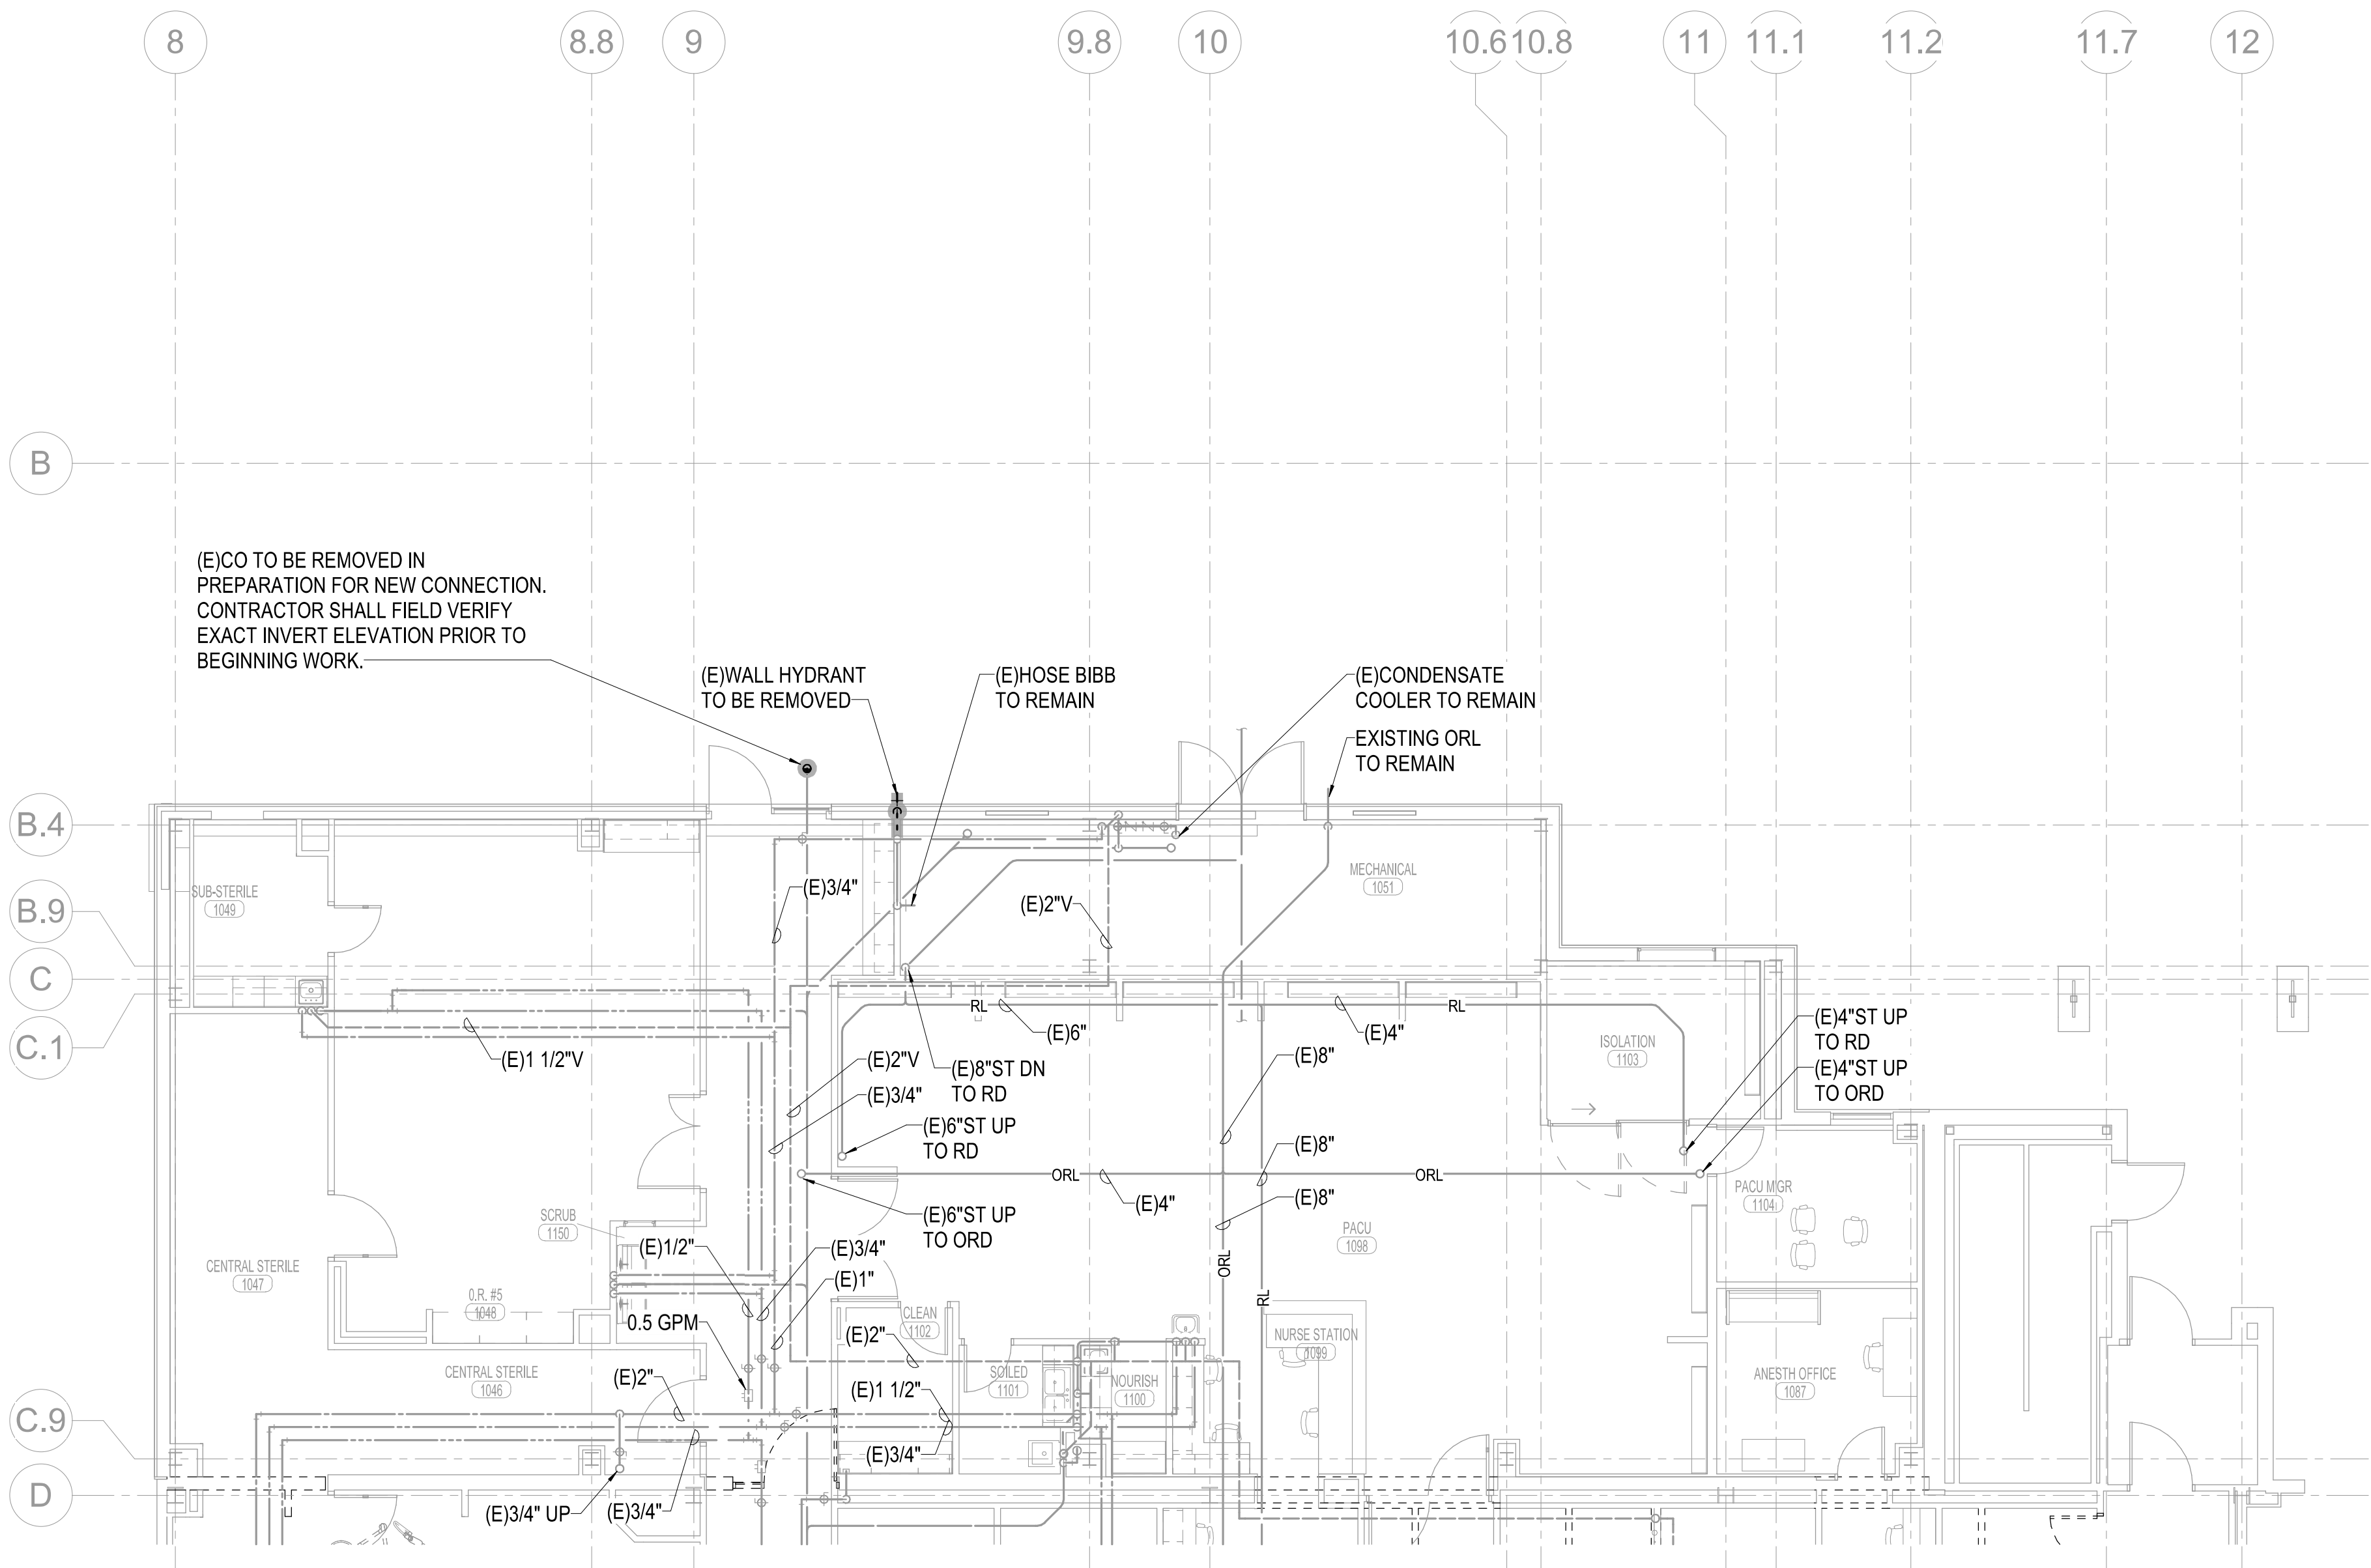

1 PLUMBING DEMOLITION FLOOR PLAN  
1/8" = 1'-0"

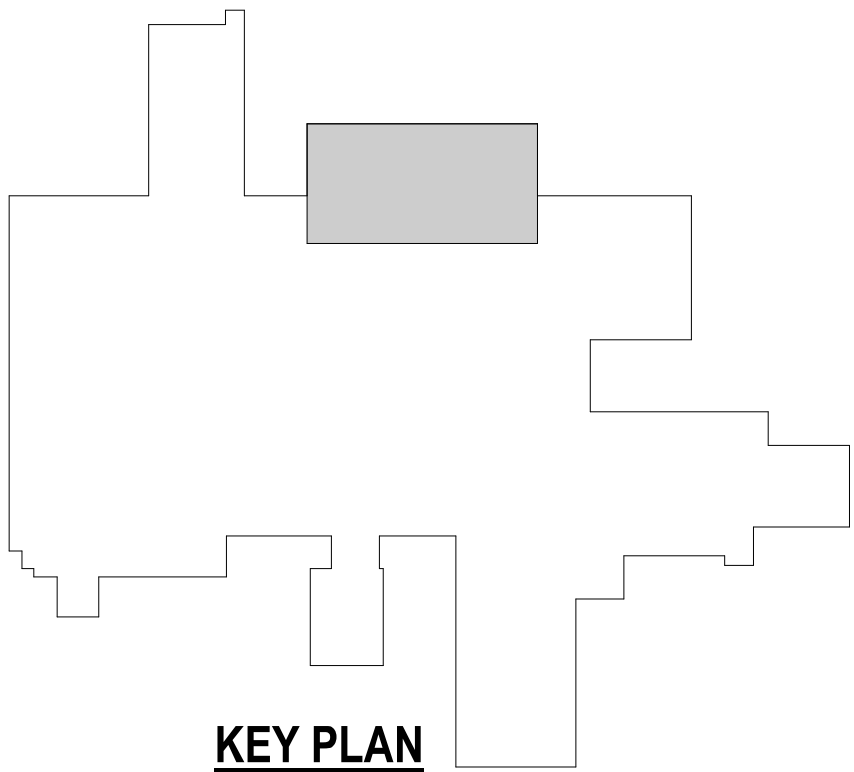

KEY PLAN

PLUMBING DEMOLITION GENERAL NOTES:

1. PLANS ARE SCHEMATIC IN NATURE. LAYOUT IS BASED ON BEST AVAILABLE INFORMATION. CONTRACTOR SHALL FIELD VERIFY EXISTING CONDITIONS AND DIMENSIONS.
2. ALL CUTTING, PATCHING AND DEMOLITION WORK SHALL BE CLOSELY COORDINATED WITH THE EXISTING CONDITIONS AND THE REQUIRED NEW WORK. G.C. SHALL PATCH AND FINISH PENETRATIONS OF EXISTING SURFACES TO MATCH ADJACENT SURFACES.
3. ALL PIPING TO BE REMOVED SHALL BE CAPPED AT THE MAINS UNLESS OTHERWISE NOTED.
4. ALL ACCESSIBLE ABANDONED PIPING SHALL BE REMOVED.
5. REFER TO ARCHITECTURAL SPECIFICATIONS AND PLANS FOR PHASING OF DEMOLITION AND NEW WORK. ADJACENT AREAS ARE 100% OCCUPIED AND CONTRACTOR SHALL WORK CLOSELY WITH OWNER TO SCHEDULE DEMOLITION AND CONSTRUCTION TO BE AS LEAST DISRUPTIVE AS POSSIBLE.



ACI  
BOLAND  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center  
Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision  
Number Date Description

PD1.0

© 2020 ACI/BOLAND, Inc.  
PLUMBING DEMOLITION FLOOR  
PLAN



3/23/2020 10:39:19 AM

BIM 360://190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER ELEC-R19.rvt

## GENERAL NOTES

1. ALL ELECTRICAL WORK SHALL COMPLY WITH THE LATEST EDITION OF THE NATIONAL ELECTRICAL CODE (NEC) & THE AMERICANS WITH DISABILITIES ACT (ADA).	12. LABEL THE FRONT OF EACH RECEPTACLE COVERPLATE WITH PANEL DESIGNATION AND CIRCUIT NUMBER USING CLEAR THERMAL TRANSFER (ELECTRONIC DYMO) LABELS WITH 1/8" HIGH BLACK LETTERS (OR CONTRASTING COLOR IF COVERPLATES ARE BLACK OR BROWN). LABELS SHALL BE SUITABLE FOR INDOOR/OUTDOOR USE. LABEL THE BACK OF EACH LIGHT SWITCH COVERPLATE WITH PANEL DESIGNATION AND CIRCUIT NUMBER USING A FINE BLACK PERMANENT MARKER.
2. REFER TO RELATED ARCHITECTURAL, MECHANICAL, STRUCTURAL, AND CIVIL DRAWINGS FOR RELATED INFORMATION.	
3. REFER TO THE SPECIFICATIONS FOR DATA NOT ON THE DRAWINGS.	
4. E.C. SHALL REFER TO MECHANICAL DRAWINGS AND SPECIFICATIONS FOR THE REQUIREMENTS ASSOCIATED WITH WIRING AND CONNECTION OF INTERLOCKING AND CONTROLS OF MECHANICAL UNITS AND THERMOSTAT LOCATIONS.	13. PROVIDE 18" LONG (MIN.) CONDUIT SLEEVES THRU ALL WALLS WHERE CABLES ARE INDICATED OR REQUIRED TO PASS THRU WALLS. PROVIDE BUSHINGS ON BOTH ENDS. SIZE CONDUIT FOR CABLES INSTALLED. AT CABLE TRAYS, PROVIDE ONE 4" CONDUIT SLEEVE FOR EACH 4" WIDTH OF CABLE TRAY. MAXIMUMS SHALL BE: 1" = 10 CABLES 2 1/2" = 20 CABLES 3" = 30 CABLES 4" = 50 CABLES
5. COORDINATE OUTLET BOX LOCATIONS WITH MASONRY TO MINIMIZE CUTTING OF BRICK OR BLOCK.	
6. ALL MOUNTING HEIGHTS TO CENTERLINE OF ITEM UNLESS OTHERWISE NOTED. VERIFY ALL OUTLET LOCATIONS ON THE JOB PRIOR TO ROUGH-IN.	
7. CONDUIT RUN W/CONDUCTORS AS INDICATED & GROUND WIRE SIZED PER N.E.C. 250.122. CONDUIT SIZE AS REQUIRED.	14. LOCATE CABLE TRAYS 6" ABOVE CEILING. OFFSET TRAY UP AND OVER LIGHT FIXTURES AND DUCTWORK (FIELD VERIFY AND PROVIDE AS REQUIRED). IF PHYSICALLY IMPOSSIBLE TO RUN CABLE TRAY UP AND OVER, THEN PROVIDE CABLE SUPPORT HOOKS FROM STRUCTURE ABOVE, SIZED AND RATED FOR INSTALLED CABLES PLUS 25% SPARE.
8. WHEN INCREASED CONDUCTOR SIZES ARE SHOWN ON THE PLANS, THE LARGER CONDUCTOR SIZE SHALL BE USED THROUGHOUT THE LENGTH OF THE CIRCUIT, INCLUDING NEUTRAL AND GROUND.	15. PROVIDE DIMMER PER THE SPECIFICATIONS. COORDINATE DIMMER TYPE AND WIRING WITH ASSOCIATED LIGHT FIXTURE DIMMING REQUIREMENTS (I.E. 3-WIRE, 0-10V, ELECTRONIC OR MAGNETIC LOW VOLTAGE, ETC.) OR WITH LIGHTING CONTROL SYSTEM PROPRIETARY REQUIREMENTS (I.E. LUTRON, nLIGHT, DALI, ETC.) AS NECESSARY. 3-WIRE DIMMERS SHALL BE PROVIDED WITH A DEDICATED NEUTRAL FOR EACH CONTROL ZONE. 0-10V DIMMERS SHALL BE PROVIDED WITH DIMON/OFF CONTROL. COORDINATE PHASE CONTROL OF LED DRIVERS (I.E. REVERSE PHASE, FORWARD PHASE, ETC.) WITH LIGHT FIXTURE MANUFACTURERS' DUCT RECOMMENDATIONS. LOW VOLTAGE CONTROL WIRING IS NOT SHOWN ON PLANS FOR CLARITY, BUT SHALL BE PROVIDED AS REQUIRED.
9. "CT" INDICATED ADJACENT TO DEVICE INDICATES DEVICE MOUNTED ABOVE BACKSPASH OF COUNTER TOP. VERIFY EXACT HEIGHT WITH ARCHITECTURAL PLANS AND ELEVATIONS.	16. "TV" INDICATED ADJACENT TO DEVICES INDICATES DEVICE MOUNTED ON WALL, LOCATED BEHIND FLAT PANEL TV. VERIFY EXACT LOCATION AND HEIGHT WITH ARCHITECTURAL PLANS AND ELEVATIONS.
10. BRANCH CIRCUITS ARE INDICATED AS ONE CIRCUIT HOME RUNS WITH INDIVIDUAL NEUTRALS. A MAXIMUM OF THREE CIRCUITS (MAXIMUM OF THREE PHASE CONDUCTORS) MAY BE GROUPED IN A SINGLE CONDUIT. WHERE MULTIPLE CIRCUITS ARE LOCATED IN THE SAME RACEWAY, JUNCTION BOX OR ENCLOSURE, NEUTRALS SHALL BE MARKED OR LABELED TO INDICATE WHICH CIRCUIT THEY ARE ASSOCIATED WITH. SEE SPECIFICATION SECTION "LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES" FOR ADDITIONAL INFORMATION.	
11. JUNCTION BOX OR RECEPTACLE FOR DRINKING FOUNTAINS SHALL BE LOCATED BEHIND THE EQUIPMENT SKIRT UNLESS OTHERWISE NOTED. COORDINATE CONNECTION TYPE AND LOCATION WITH EQUIPMENT PROVIDED.	
COMMUNICATION / DATA	
T1. EACH DATA, TELEPHONE, VIDEO, OR OTHER SYSTEMS OUTLET REQUIRES 1" C. WITH PULL ROPE STUBBED 6" ABOVE NEAREST ACCESSIBLE CEILING UNLESS OTHERWISE NOTED ON PLANS. CONDUITS STUBBED UP ABOVE CEILINGS SHALL BE TURNED UP 90 DEGREES. PROVIDE INSULATED BUSHINGS ON ALL CONDUITS. LABEL CONDUIT TO IDENTIFY ITS INTENDED USE (I.E. TELEPHONE, DATA, ETC.).	T3. PROVIDE QUANTITY AND TYPE OF JACKS PER THE DRAWINGS, SPECIFICATIONS AND DETAILS. PROVIDE JACK AND CABLE LABELING PER THE SPECIFICATIONS.
T2. RUN CABLES CONTINUOUS FROM JACK TO ASSOCIATED SYSTEM PATCH PANEL IN CONDUIT, CABLE TRAY, OR J-HOOKS PER THE PLANS AND SPECIFICATIONS. NUMBER BESIDE CABLE SYMBOL INDICATES QUANTITY OF CABLES REQUIRED PER HOME RUN.	
FIRE ALARM	
F1. THE FIRE ALARM SYSTEM SHOWN HAS BEEN DESIGNED PER THE REQUIREMENTS OF NFPA 72, 2013 EDITION. DEVICES SHOWN INDICATE DESIGN INTENT AND SHALL BE THE MINIMUM PROVIDED. SYSTEM SUPPLIER SHALL PROVIDE ANY ADDITIONAL CODE REQUIRED DEVICES OR DEVICES REQUIRED BY THE AUTHORITY HAVING JURISDICTION.	F4. LABEL REMOTE ALARM INDICATOR FOR DUCT MOUNTED SMOKE DETECTORS (I.E. RTU=1 SUPPLY, RTU=2 RETURN, FIRE/SMOKE DAMPER, ETC.). DUCT DETECTORS SHOULD BE LOCATED IN THE AREA BETWEEN 6" AND 10" DUCT EQUIVALENT DIAMETERS OF STRAIGHT, UNINTERRUPTED DUCTWORK. DUCT DETECTORS FOR FIRE/SMOKE DAMPERS SHOULD BE LOCATED BETWEEN THE LAST INLET OR OUTLET UPSTREAM OF THE DAMPER AND THE FIRST INLET OR OUTLET DOWNSTREAM OF THE DAMPER.
F2. FIELD VERIFY LOCATIONS OF AREA SMOKE DETECTORS AND HEAT DETECTORS. DO NOT LOCATE WITHIN 36" OF A HVAC DIFFUSER (SUPPLY OR RETURN), IN A DIRECT AIR FLOW, WITHIN 36" OF A SPRINKLER HEAD, OR WITHIN 36" OF THE TIP OF A CEILING FAN BLADE. SMOKE DETECTORS FOR DOOR RELEASE SHALL BE LOCATED ON THE CENTER LINE OF THE DOOR AND A MAXIMUM OF 5 FEET FROM THE DOOR. THE MINIMUM DISTANCE FROM THE DOOR IS THE DEPTH OF THE WALL SECTION ABOVE THE DOOR, BUT NOT LESS THAN 12".	F5. PROVIDE 120V POWER AND FUSTAT FOR EACH FIRE/SMOKE DAMPER. INTERLOCK WITH FIRE ALARM CONTROL PANEL TO CLOSE THE FIRE/SMOKE DAMPER UPON ANY ALARM AT THE FIRE ALARM CONTROL PANEL AND TO SHUTDOWN THE ASSOCIATED MECHANICAL UNIT.
F3. FAN SHUTDOWN RELAY WIRING SHALL BE LOCATED WITHIN 3 FEET OF THE FAN CONTROLS AND THE WIRING TO THE RELAY SHALL BE MONITORED.	
HEALTHCARE	
H1. DO NOT ROUTE BRANCH CIRCUITS OR FEEDERS ABOVE OR BELOW IMAGING ROOMS BECAUSE OF POSSIBLE ELECTROMAGNETIC INTERFERENCE.	H9. FOR ISOLATION PANEL CIRCUITS, USE 1" MINIMUM EMT CONDUIT ROUTED AS DIRECT AS POSSIBLE. MAXIMUM OF 2 CIRCUITS PER CONDUIT. REFERENCE SPECIFICATION SECTION 260527 FOR ADDITIONAL REQUIREMENTS.
H2. BOND PANELBOARDS SERVING THE SAME PATIENT CARE VICINITY WITH #6 AWG MINIMUM COPPER CONDUCTOR PER NEC ARTICLE 517. THIS INCLUDES NORMAL AND ESSENTIAL PANELBOARDS AND ESSENTIAL PANELBOARDS FED FROM DIFFERENT TRANSFER SWITCHES.	H10. ALL PATIENT CARE AREAS (PATIENT ROOMS AND SUPPORT SPACES) SHALL HAVE TWO GROUND PATHS PER N.E.C. ARTICLE 517.
H3. THE GROUNDING SYSTEM IN PATIENT CARE AREAS SHALL BE TESTED BY VOLTAGE AND IMPEDANCE MEASUREMENTS PER NFPA 99 REQUIREMENTS.	H11. REFER TO MANUFACTURER DRAWINGS FOR ALL IMAGING EQUIPMENT REQUIREMENTS, INCLUDING BUT NOT LIMITED TO CIRCUIT BREAKER SIZE, CABLE TRAY, DUCTS, CONDUITS, CABLES, CONDUCTORS, EPO SWITCHES, AND ALL DEVICES REQUIRED FOR A COMPLETE INSTALLATION.
H4. MEDICAL GAS ALARM CABLING SHALL BE PROVIDED AND INSTALLED BY THE ELECTRICAL CONTRACTOR. VERIFY ALL REQUIREMENTS WITH THE MEDICAL GAS SUPPLIER. ALL MEDICAL GAS CABLING SHALL BE IN CONDUIT.	
H5. COORDINATE ALL BOX ROUGH-IN AND PATHWAY REQUIREMENTS FOR SOUND SYSTEMS IN OPERATING ROOMS WITH THE EQUIPMENT SUPPLIER	
H6. REFER TO THE SPECIFICATIONS FOR REQUIREMENTS ON COLOR CODING BOXES AND/OR CONDUIT ACCORDING TO THE SPECIFIC BRANCH OF THE ESSENTIAL ELECTRICAL SYSTEM.	H12. THE LIFE SAFETY BRANCH AND THE CRITICAL BRANCH OF THE ESSENTIAL ELECTRICAL SYSTEM SHALL BE KEPT ENTIRELY INDEPENDENT OF ALL OTHER WIRING AND EQUIPMENT AND SHALL NOT ENTER THE SAME RACEWAY, BOXES OR CABINETS WITH EACH OTHER OR OTHER WIRING PER N.E.C. ARTICLE 517.
H7. REFER TO THE SPECIFICATIONS FOR REQUIREMENTS ON COLOR CODING OF NAMEPLATES ACCORDING TO THE SPECIFIC BRANCH OF THE ESSENTIAL ELECTRICAL SYSTEM.	H13. DIGITAL CLOCK WITH INTEGRAL TIMER SHALL BE SIMPLEX #6303-9103 CLOCK WITH #6303-9202 CONTROL STATION OR APPROVED EQUAL. PROVIDE 120V. POWER TO CLOCK AND CONTROL WIRING FROM CLOCK TO CONTROL STATION AS REQUIRED.
H8. THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL IN THE CASE OF A SEISMIC EVENT. REFER TO THE SPECIFICATIONS FOR SPECIFIC REQUIREMENTS ON EQUIPMENT BRACING.	H14. DIGITAL CLOCK SHALL BE SIMPLEX #6334-9125 WITH # 6334-9802 MOUNTING BRACKET AND #6334-9803 HARNESS ASSEMBLY OR APPROVED EQUAL. CLOCK SHALL BE 120V. WITH 2-1/2" LED (4) DIGIT DISPLAY.
	H15. HOSPITAL GRADE RECEPTACLES SHALL ONLY BE PROVIDED IN OPERATING ROOMS AND IN CATEGORY 1 AND CATEGORY 2 PATIENT CARE AREAS AS DEFINED BY NEC ARTICLE 517 AND NFPA 99.

## SYMBOL LIST


SYMBOL	DESCRIPTION	MOUNTING	SYMBOL	DESCRIPTION	MOUNTING
COMMUNICATION / DATA					
	1-DATA OUTLET & JACK (GEN NOTES T1 & T3)	18" AFF		2-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF
	1-VOICE OUTLET & JACK (GEN NOTES T1 & T3)	18" AFF		3-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF
	1-VOICE/1-DATA OUTLET & JACKS (GEN NOTES T1 & T3)	18" AFF		4-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF
	1-VOICE/2-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF		2-VOICE/2-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF
	CABLE TV OR VIDEO OUTLET & CONNECTOR (GEN NOTES T1 & T3)	18" AFF		1-VOICE/3-DATA OUTLETS & JACKS (GEN NOTES T1 & T3)	18" AFF
	VOICE UTP CABLE HOME RUN	GEN NOTE T2		### = TERMINATION ROOM XX = CABLE CONFIGURATION	SEE HOR. CABLE SCHEDULE
	DATA UTP CABLE HOME RUN	GEN NOTE T2		FIBER OPTIC CABLE HOME RUN (SINGLE MODE)	GEN NOTE T2
	VIDEO COAX CABLE HOME RUN	GEN NOTE T2			
	FIBER OPTIC CABLE HOME RUN (MULTI MODE)	GEN NOTE T2			
FIRE ALARM					
	FIRE ALARM CONTROL PANEL	WALL		FIRE ALARM REMOTE ANNUNCIATOR	WALL
	FIRE ALARM MANUAL STATION	46" AFF		FIRE ALARM SPEAKER	WALL
	FIRE ALARM HORN	BOTTOM 80"		COMB FA SPEAKER & VISUAL SIGNAL	BOTTOM 80"
	FIRE ALARM VISUAL SIGNAL	BOTTOM 80"		COMB FA HORN & VISUAL SIGNAL	CEILING
	COMB. F.A. HORN & VISUAL SIGNAL	BOTTOM 80"		FIRE ALARM VISUAL SIGNAL	CEILING
	CHIME	WALL		FIRE ALARM CONTROL MODULE	
	FIRE SPRINKLER ALARM BELL	WALL		FIRE ALARM MONITOR MODULE	
	F.A. RELAY (GEN NOTE F3)			FIRE SPRINKLER PRESSURE SWITCH	
	IONIZATION AREA SMOKE DETECTOR (GEN NOTE F2)			FIRE ALARM SPEAKER	CEILING
	PHOTO ELECTRIC AREA SMOKE DETECTOR (GEN NOTE F2)			HEAT DETECTOR (GEN NOTE F2)	WALL
	DUCT SMOKE DETECTOR (GEN NOTE F4)	DUCTWORK		FIRE SPRINKLER TAMPER SWITCH	SPRKL RSR
	DUCT SMOKE DETECTOR & FIRE/ SMOKE DAMPER (GEN NOTES F4 & F5)	DUCTWORK		FIRE SPRINKLER WATER FLOW SW	SPRKL RSR
				ELECTROMAGNETIC DOOR HOLDER	WALL
ONE-LINE					
	CIRCUIT BREAKER ACCESSORIES: LSIG = LONG TIME, SHORT TIME, INSTANTANEOUS, GROUND FAULT GFI = GROUND FAULT ST = SHUNT TRIP K = KIRK KEY INTERLOCK INDICATOR LIGHT(G = GREEN, R = RED) CONTACTS (NORMALLY OPEN,CLOSED)			FUSIBLE SWITCH (CIRCUIT NUMBER / SWITCH SIZE / FUSE SIZE / # OF POLES) (# OF POLES IF OTHER THAN 3)	
	CIRCUIT BREAKER			STARTER WITH FUSIBLE SWITCH (CIRCUIT NUMBER / SWITCH SIZE / FUSE SIZE / # OF POLES / STARTER SIZE) (# OF POLES IF OTHER THAN 3)	
	OVERLOADS			CIRCUIT BREAKER (MOLDED CASE NON-ADJUSTABLE TRIP / ADJUSTABLE TRIP) (CIRCUIT NUMBER / TRIP SIZE) (# OF POLES) (FRAME SIZE / TRIP SIZE) (# OF POLES IF OTHER THAN 3)	
	DRAWOUT CONTACTS			30 TRANSFORMER (DELTA PRIMARY / WYE SECONDARY)	
	DISCONNECT SWITCH (SEE EQUIP CONN SCHED) (VOLTAGE / SWITCH SIZE / FUSE SIZE / # OF POLES - NOTED IF EQUIPMENT NOT SCHEDULED)			10 TRANSFORMER	
	STARTER (SEE EQUIP CONN SCHED) (VOLTAGE / STARTER SIZE / # OF POLES - NOTED IF EQUIPMENT NOT SCHEDULED)			PANELBOARD (BUILT-IN SPD)	
	GROUND CONNECTION			TRANSFER SWITCH (ATS = AUTOMATIC, MTS = MANUAL) (AMP SIZE / VOLTAGE / POLES / AIC RATING / NEMA RATING) (NEMA RATING IF OTHER THAN NEMA-1)	
	LIGHTNING ARRESTOR			MOTOR STARTER (SINGLE SPEED ACROSS-THE-LINE (UON) (NEMA SIZE / RV AT= REDUCED VOLTAGE / AUTO-TRANSFORMER / SS = SOLID STATE)	
	FEEDER DESIGNATION				
	SURGE PROTECTIVE DEVICE				
	METER (UTILITY / PANEL MOUNTED)				
	EQUIPMENT (SINGLE MOTOR / MULTI-MOTOR OR OTHER TYPE AS NOTED)				
	VARIABLE FREQUENCY DRIVE (HP SIZE IF NOT SCHEDULED)				
PEN WEIGHT LEGEND					
ALL DEVICES, LIGHT FIXTURES, ETC., DRAWN IN DARK SOLID LINES ARE NEW TO BE INSTALLED.			ALL DEVICES, LIGHT FIXTURES, ETC., DRAWN IN DARK DASHED LINES ARE EXISTING TO BE REMOVED		
	NEW DUPLEX GROUNDED RECEPTACLE			DUPLEX GROUNDED REC TO BE REMOVED	
	NEW LIGHT FIXTURE			LIGHT FIXTURE TO BE REMOVED	
ALL DEVICES, LIGHT FIXTURES, ETC., DRAWN IN LIGHT SOLID LINES ARE EXISTING TO REMAIN			ALL DEVICES, LIGHT FIXTURES, ETC., DRAWN IN LIGHT DASHED LINES ARE EXISTING TO BE RELOCATED		
	EXISTING DUPLEX GROUNDED REC TO REMAIN			DUPLEX GROUNDED REC TO BE RELOCATED	
	EXISTING LIGHT FIXTURE TO REMAIN			LIGHT FIXTURE TO BE RELOCATED	
--- SYMBOL LIST IS FOR REFERENCE ONLY. ALL SYMBOLS MAY NOT BE USED ON THIS PROJECT. ---					

## GENERAL NOTES

NURSE CALL	
N1. THE CONTRACTOR SHALL PROVIDE OUTLET BOXES AND 1" C. TO ABOVE NEAREST ACCESSIBLE CEILING FOR ALL NURSE CALL DEVICE LOCATIONS. ALL NURSE CALL DEVICE LOCATIONS SHALL BE COORDINATED WITH THE FINAL DRAWINGS FROM THE NURSE CALL SYSTEM SUPPLIER. COORDINATE ALL REQUIREMENTS WITH THE NURSE CALL SYSTEM SUPPLIER. MOUNTING HEIGHT FOR EMERGENCY BATH STATIONS SHALL BE PER AIA GUIDELINES.	

## SYMBOL LIST


SYMBOL	DESCRIPTION	MOUNTING	SYMBOL	DESCRIPTION	MOUNTING
ABBREVIATIONS					
NL	NIGHT LIGHT - WIRE AHEAD OF CONTROLS		AFF	ABOVE FINISHED FLOOR	
EM	ON EMERGENCY POWER		AFG	ABOVE FINISHED GRADE	
WP	WEATHERPROOF		DF	DRINKING FOUNTAIN - SEE GENERAL NOTE 11	
CT	COUNTERTOP (SEE GEN. NOTE 9)		TV	SEE GENERAL NOTE 16	
UON	UNLESS OTHERWISE NOTED				
W	WALL				
CONDUIT AND WIRING					
	EMERGENCY CIRCUIT	CLG/WALL		CONDUIT HOME RUN, 1 CIRCUIT. 2#12 & 1#12 GRD. - 1/2"C.	CLG/WALL
	MASTERSLAVE FIXTURE WHIP	CEILING		CONDUIT HOME RUN, 2 CIRCUITS. 4#12 & 1#12 GRD. - 1/2"C.	CLG/WALL
	LOW VOLTAGE WIRING	CLG/WALL		CONDUIT HOME RUN, 3 CIRCUITS. 6#12 & 1#12 GRD. - 1/2"C.	CLG/WALL
	CDT RUN 2#12 & 1#12 GRD. - 1/2"C. OR CDT RUN AS NOTED ON PLAN			CONDUIT HOME RUN, 2 CIRCUITS. PHASE CONDUCTORS/ NEUTRAL CONDUCTOR (#12 UON)	CLG/WALL
	CDT RUN 2#12 & 1#12 GRD. - 3/4"C. OR CDT RUN AS NOTED ON PLAN	EARTH/ FLOOR		SWITCH LEGS (#12 UON)	
	CONDUIT HOME RUN, 1 CIRCUIT. 2#10 & 1#10 GRD.	CLG/WALL		GROUND CONDUCTOR (#12 UON)	
	CONDUIT RUN PARTIAL CIRCUIT. 2#12 & 1#12 GRD. - 1/2"C.	CLG/WALL			
	MISC. EQUIPMENT CONNECTION				
	CONDUIT SEAL OFF				
LIGHTING, SWITCHES AND SENSORS					
	LIGHT FIXTURE & FIXTURE LETTER	CEILING		SWITCHES (1-POLE, 2-POLE, 3-WAY, 4-WAY)	46" AFF
	STRIP LIGHT FIXTURE & FIXT LETTER	CEILING		SWITCHES (KEYED, PILOT, TIMER)	46" AFF
	LIGHT FIXTURE & FIXTURE LETTER	CEILING		INDICATES SWITCHING SCHEME	
	LIGHT FIXTURE & FIXTURE LETTER	WALL		LOW VOLTAGE SWITCH	46" AFF
	EXIT SIGN (SHADING DENOTES EXIT FACE SIDE)	CEIL/WALL		ON/OFF SWITCH	46" AFF
	LIGHT FIXTURE & FIXTURE LETTER	WALL		ON/OFF 0-10V DIMMING SWITCH	46" AFF
	FIXTURE WITH SHADED LAMP(S) ON EMERGENCY POWER	CEILING		DUAL TECH ON/OFF SENSOR	46" AFF
	EMERGENCY BATTERY LIGHT FIXT	CEIL/WALL		16-SCENE WALL CONTROLLER	46" AFF
	COMB EXIT SIGN/em. BATTERY LIGHT	WALL		DUAL TECH ON/OFF 0-10V DIM SW	46" AFF
	LIGHT FIXTURE & FIXTURE LETTER	POLE		PIR SENSOR	CLG/WALL
	1 RELAY PIR SENSOR	46" AFF		DUAL TECHNOLOGY SENSOR	CLG/WALL
	2 RELAY PIR SENSOR	46" AFF		SWITCHING POWER PACK	
	1 RELAY DUAL TECH SENSOR	46" AFF		UL924 SWITCHING POWER PACK	
	2 RELAY DUAL TECH SENSOR	46" AFF		DIMMING POWER PACK	
	DIMMER (SEE GENERAL NOTE 15)	46" AFF		UL924 DIMMING POWER PACK	
	PHOTOCELL			AV SYSTEM/LIGHTING INTERFACE	
POWER					
	SINGLE GROUNDED RECEPTACLE	18" AFF		BRANCH CIRCUIT PANEL AND PANEL DESIGNATION	72" TO TOP
	DUPLEX GROUNDED RECEPTACLE	18" AFF		ELECTRICAL DISTRIBUTION EQUIP	
	DUPLEX GROUNDED RECEPTACLE	CEILING		EQUIPMENT - SEE EQUIPMENT CONNECTION SCHEDULE	
	DOUBLE DUPLEX GROUNDED REC	18" AFF		CONDUIT SLEEVE (GEN NOTE 13)	
	GROUND FAULT DUPLEX REC	18" AFF		CABLE TRAY (GEN NOTE 14)	
	GRD FAULT DOUBLE DUPLEX REC	18" AFF		MOTOR	
	DUPLEX GRD REC BOTTOM SWITCHD	18" AFF		DISCONNECT SWITCH	
	TAMPER-PROOF DUPLEX REC	18" AFF		MANUAL STARTER	
	TAMPER-PROOF GFI DUPLEX REC	18" AFF		CIRCUIT BREAKER	
	SPECIAL OUTLET (SEE SCHEDULE OR AS NOTED)	FLOOR/WALL		STARTER OR ATS (AS NOTED)	
	SPECIAL DEVICE (AS NOTED)			COMBINATION STARTER/DISC	
	FEEDER DESIGNATION			RELAY	
	JUNCTION BOX - 1-GANG			PUSHBUTTON (1-BUTTON, 2-BUTTON)	46" AFF
	JUNCTION BOX - 2-GANG			BOX MOUNTED TRANSFORMER	
	FUSTAT BUSS HSSY			CONTACTOR	
	THERMOSTAT/TEMP SENSOR	46" AFF		METER	
	PLUG LOAD SENSOR	CEILING		PLUGMOLD SURFACE RACEWAY	WALL
	HANDICAP DOOR PUSHBUTTON	36" AFF		BUSDUCT PLUG	
NURSE CALL					
	NC STAFF ASSIST STATION WITHOUT AUDIO	46" AFF		NC CONTROL PANEL	WALL
	NC STAFF STATION W/ AUDIO	46" AFF		NC ZONE LIGHT	CEILING
	NC PATIENT STATION (GEN NOTE N3)	46" AFF		NC VISUAL SIGNAL	CLG/WALL
	NC DUTY STATION	46" AFF		NC BED INTERFACE UNIT	46" AFF
	NC EMERGENCY BATH STATION	46" AFF		NC CODE BLUE STATION	46" AFF
	NC PRESENCE STATION	46" AFF		NC MASTER STATION	DESKTOP
	NC AUXILIARY JACK	46" AFF			
SECURITY					
	DURESS			DOOR POSITION SWITCH	
	DOOR RELEASE BUTTON			DOOR LOCK & POSITION SWITCH	
	CCTV CAMERA - PAN/TILT/ZOOM	CEILING		ELECTRIC DOOR STRIKE	
	CCTV CAMERA - PAN/TILT/ZOOM	WALL		MAGNETIC LOCK	
	CCTV CAMERA - FIXED	CEILING		GLASS BREAK SENSOR	
	CCTV CAMERA - FIXED	WALL		SECURITY BEAM DETECTOR	
	CARD READER			SEC ROOM MOTION DETECTOR	WALL/CLG
	KEY PAD			SEC ROOM MOTION DETECTOR	CEILING
	REQUEST TO EXIT DEVICE			SEC CORRIDOR MOTION DETECTOR	
--- SYMBOL LIST IS FOR REFERENCE ONLY. ALL SYMBOLS MAY NOT BE USED ON THIS PROJECT. ---					

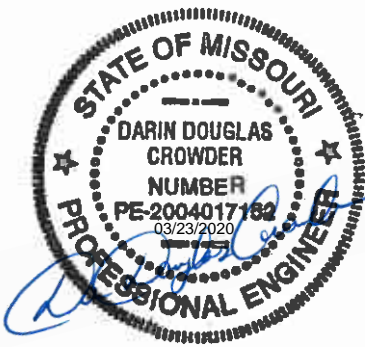

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO




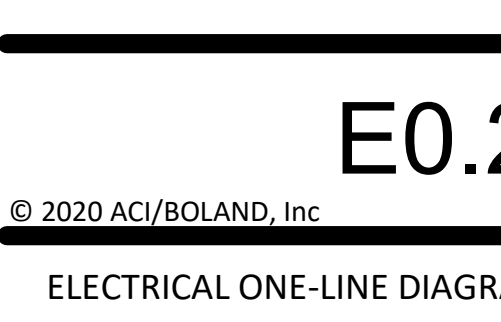







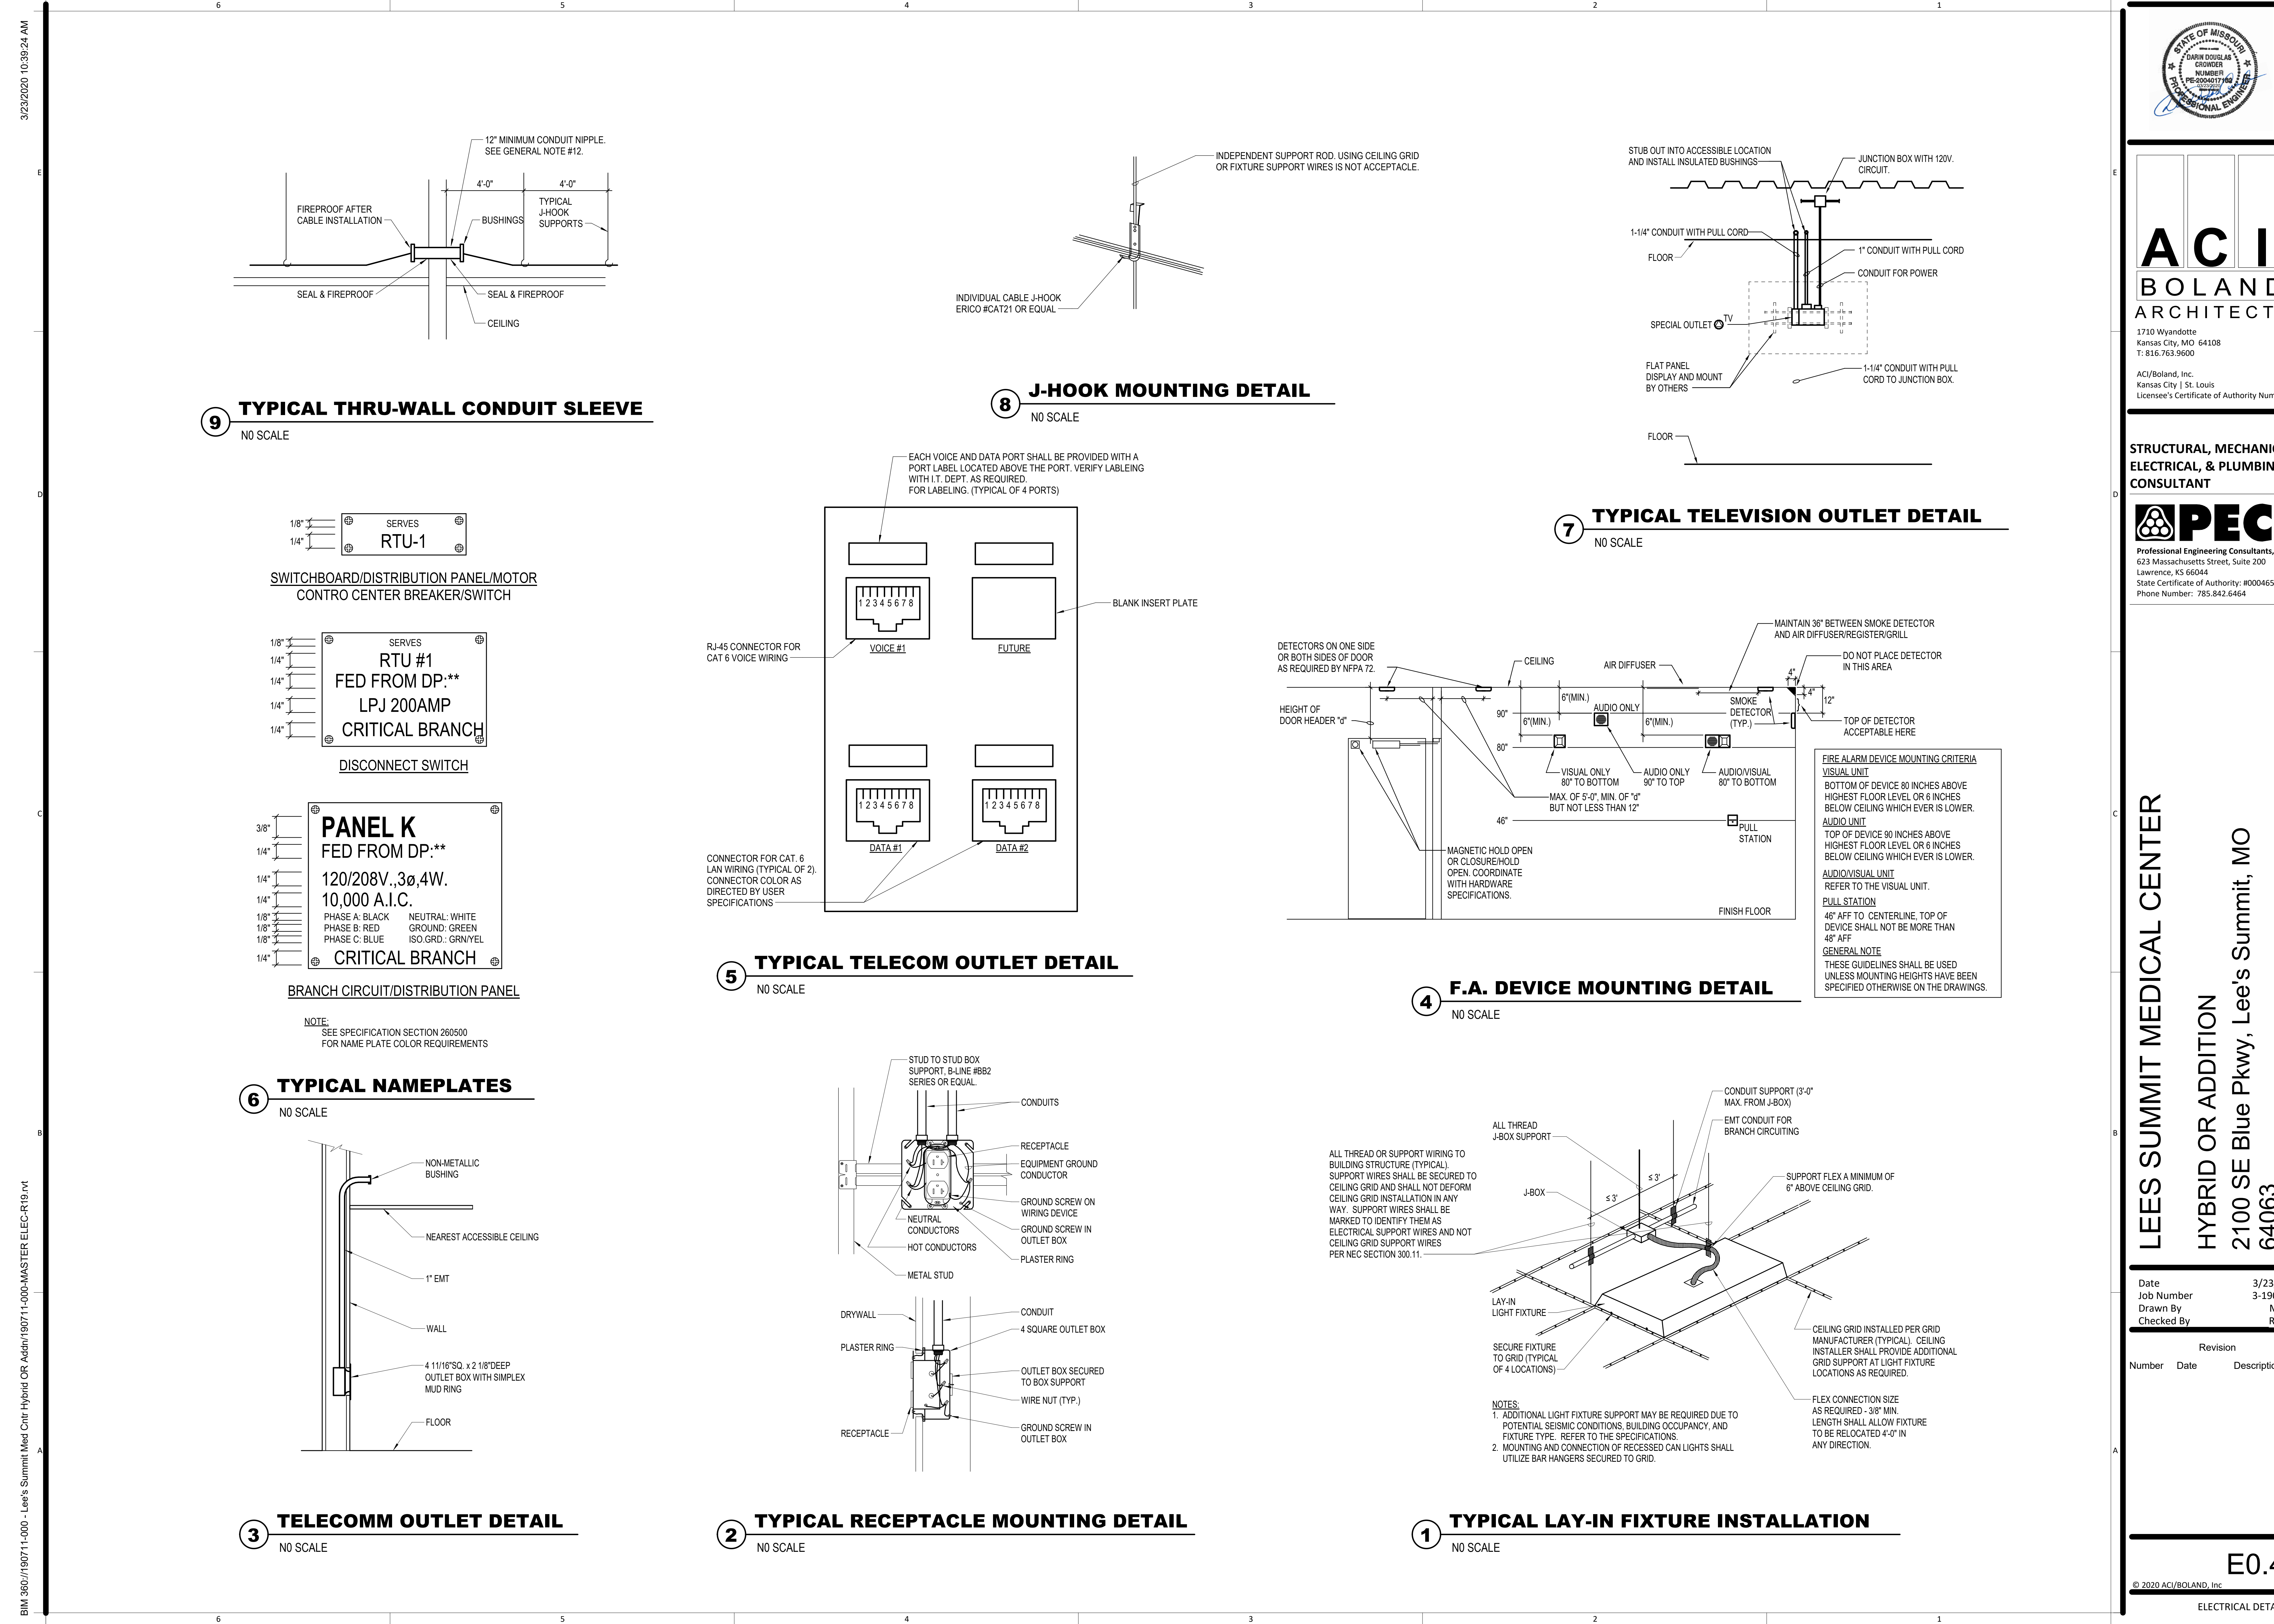

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600  
ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**

**PEC**  
Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**LEES SUMMIT MEDICAL CENTER**  
**HYBRID OR ADDITION**  
**2100 SE Blue Pkwy, Lee's Summit, MO**  
**64063**

Date	3/23/20
Job Number	3-19058
Drawn By	MJU
Checked By	RWL


Number	Date	Description

Revision  
Number Date Description

**E0.4**

© 2020 ACI/BOLAND, Inc.  
ELECTRICAL DETAILS



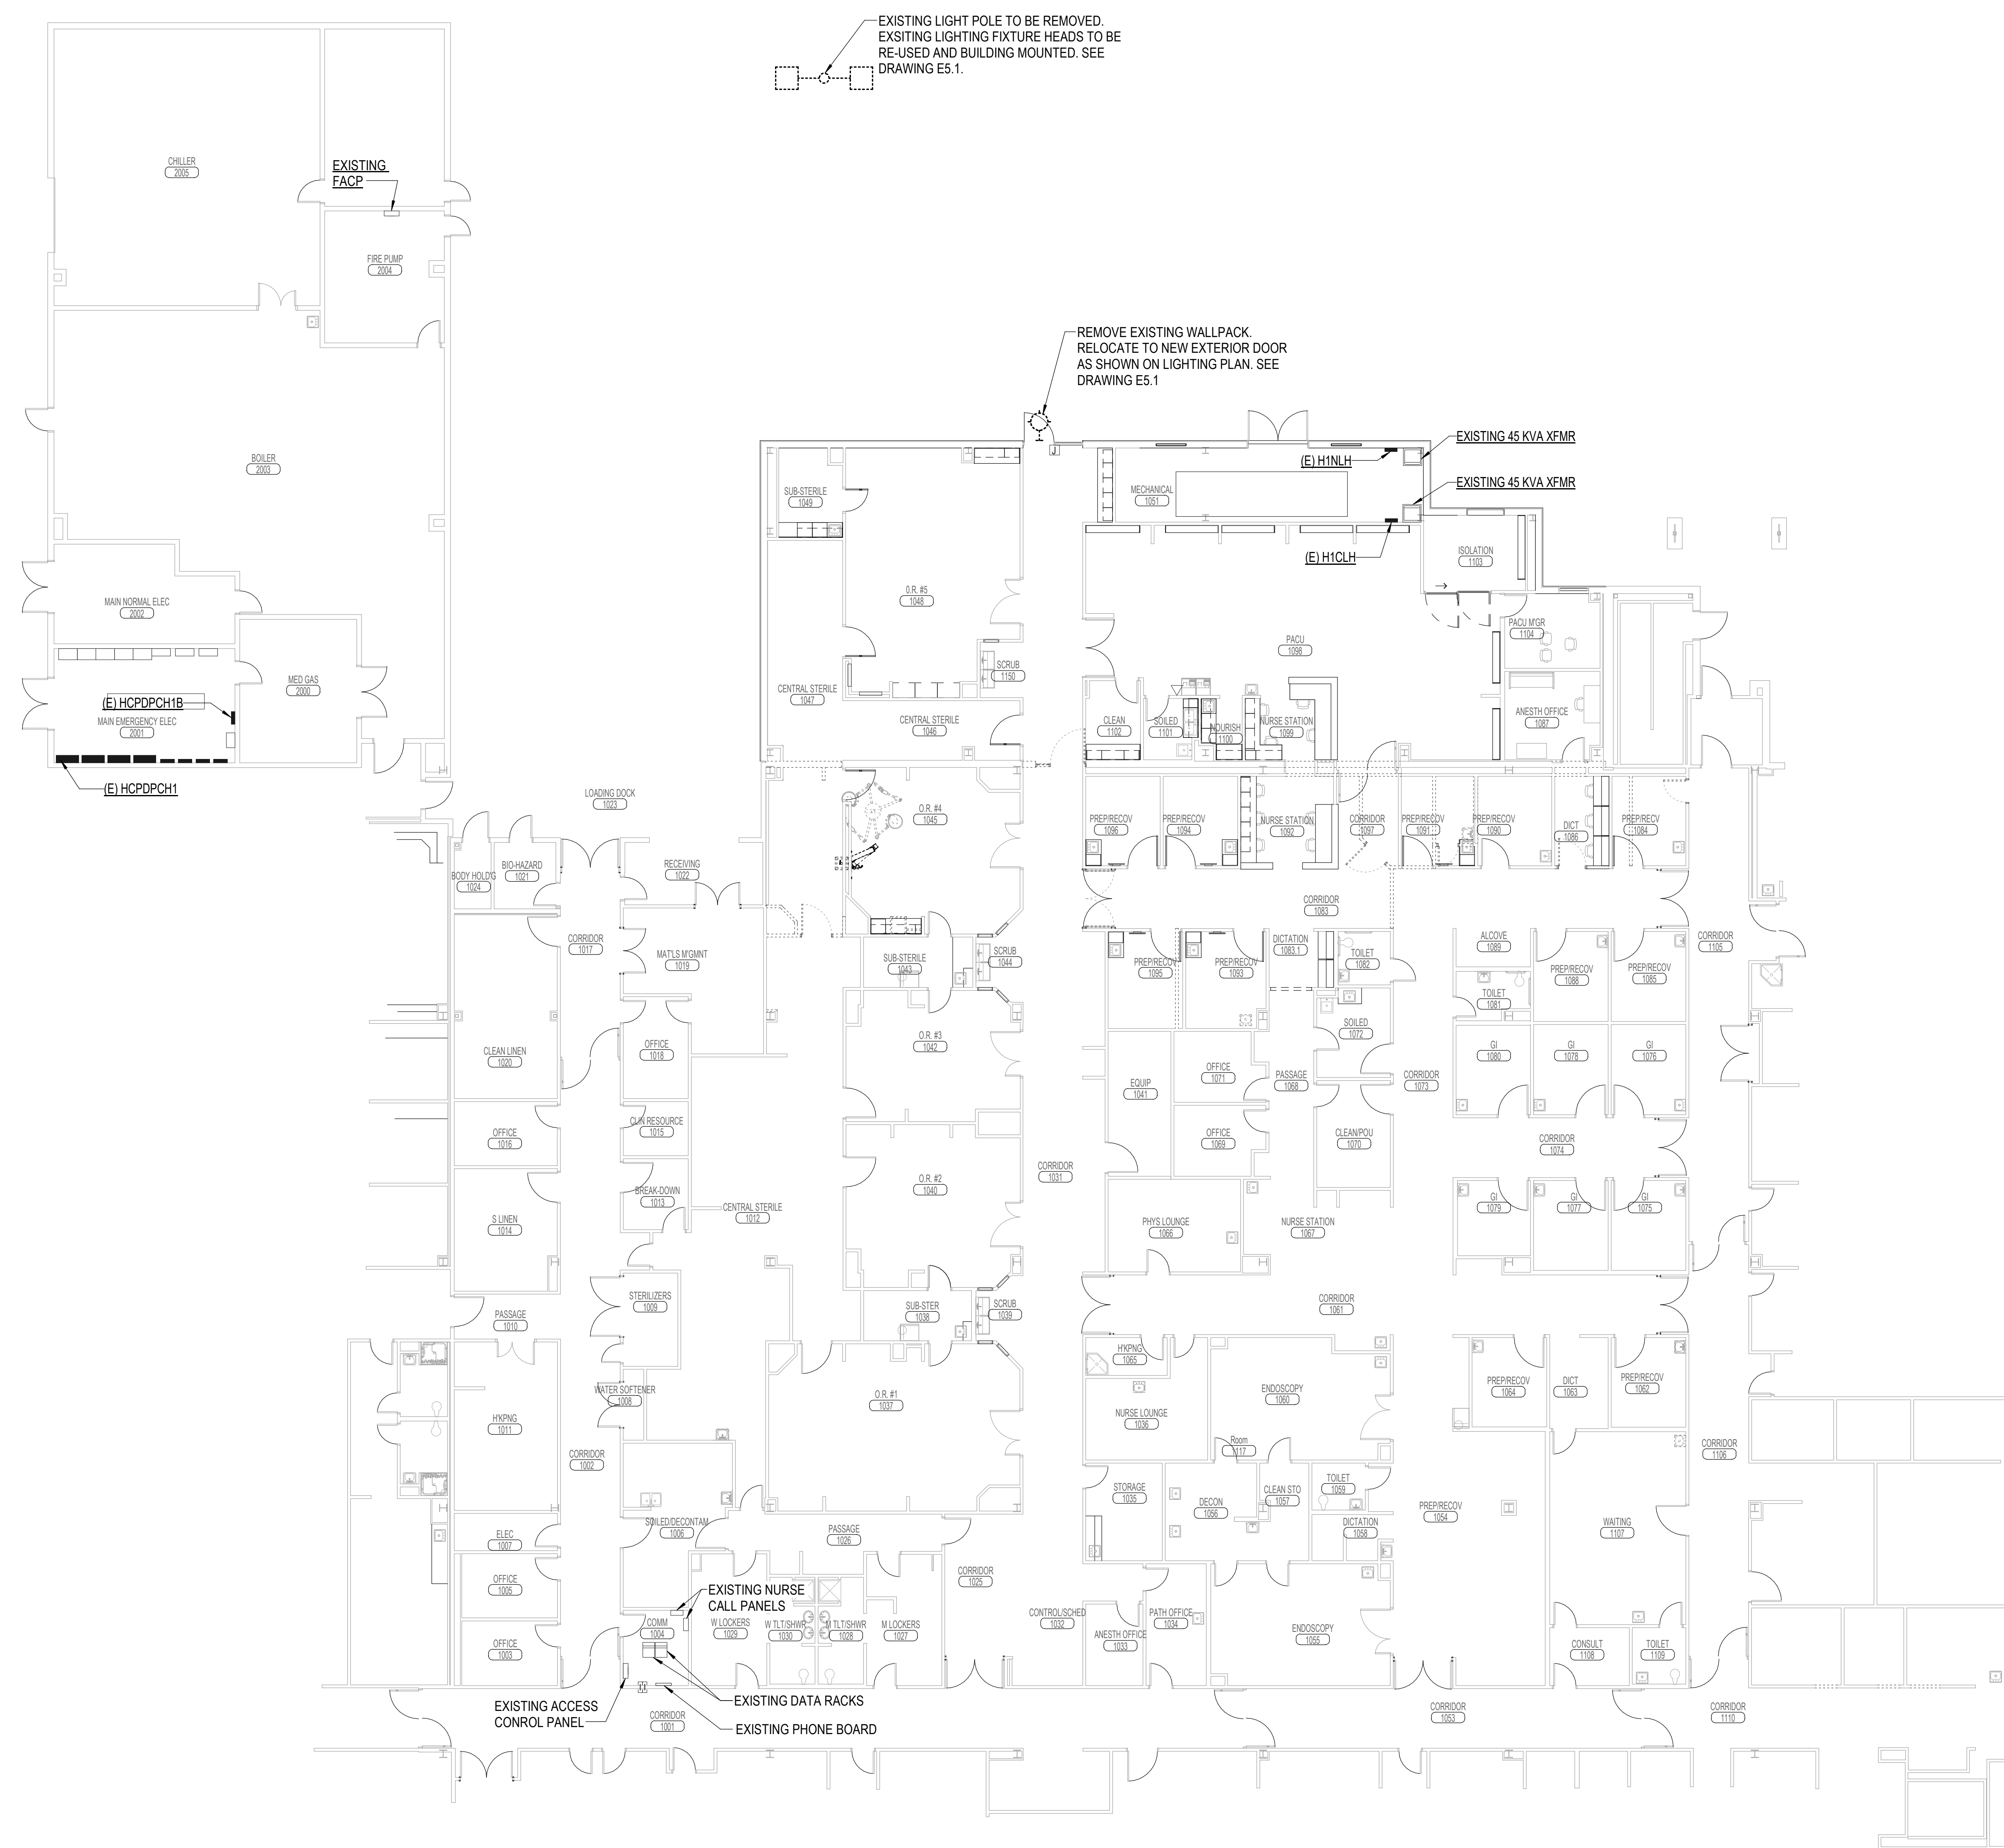

DEMOLITION PLAN NOTES:

- DEMOLITION PLANS SHOW THE GENERAL EXTENT OF THE ELECTRICAL DEMOLITION WORK. THE ELECTRICAL CONTRACTOR SHALL DISCONNECT ELECTRICAL SERVICES TO ALL EQUIPMENT BEING REMOVED. SEE MECHANICAL PLANS. OWNER SHALL HAVE THE OPTION TO RETAIN REUSABLE ITEMS, SUCH AS COVERPLATES, RECEPTACLES, LIGHTS, PANELS, ETC. NOT BEING USED IN THE FINISHED WORK. COORDINATE WITH OWNER PRIOR TO STARTING DEMOLITION. PROPERLY AND LEGALLY DISPOSE OF ALL EQUIPMENT AND MATERIALS BEING REMOVED.
- REMOVE ALL CONDUIT LEFT EXPOSED BY REMOVAL OF WALLS AND CEILINGS IN REMODELED AREAS. PLUG BOTH ENDS OF REMAINING CONDUIT IN WALL OR FLOOR WHERE CUT.
- ELECTRICAL OUTLETS, ETC. POSSIBLY CONCEALED BY STORAGE SHELVING, CASEWORK, FURNITURE, ETC. ARE NOT SHOWN AND MAY REQUIRE REMOVAL.
- GENERAL CONTRACTOR SHALL BE RESPONSIBLE FOR PATCHING ALL OPENINGS IN EXISTING CONSTRUCTION AFTER REMOVAL OF EQUIPMENT AND ELECTRICAL DEVICES, ETC.
- WHERE EQUIPMENT AND OTHER DEVICES ARE BEING REMOVED, THE CIRCUITING SHALL BE REMOVED, IF POSSIBLE, BACK TO POINT OF SUPPLY. WHERE REQUIRED, CIRCUITING SHALL BE EXTENDED TO MAINTAIN CONTINUITY OF THE CIRCUIT OR OPERATION OF THE SYSTEM.
- ALL DEVICES SHOWN DASHED ON THE DEMOLITION PLAN(S) SHALL BE REMOVED, UNLESS NOTED OTHERWISE.
- PROVIDE MATCHING BLANK COVERPLATES WHERE DEVICES ARE BEING REMOVED FROM EXISTING WALLS TO REMAIN.
- FIELD VERIFY ALL EXISTING CONDITIONS AND DIMENSIONS PRIOR TO BEGINNING WORK.

STATE OF MISSOURI  
DARIN DOUGLAS  
ENGINEER  
NUMBER  
PE000401794  
EXPIRATION  
12/31/2024  
PROFESSIONAL ENGINEER

ACI

BOLAND

ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

PEC

Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

LEES SUMMIT MEDICAL CENTER  
HYBRID OR ADDITION  
2100 SE Blue Pkwy, Lee's Summit, MO  
64063


Date	3/23/20
Job Number	3-19058
Drawn By	MJU
Checked By	RWL

Revision		
Number	Date	Description

E1.1  
© 2020 ACI/BOLAND, Inc.  
ELECTRICAL DEMOLITION PLAN




3/23/2020 10:39:32 AM  
BIN 360:/190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER ELEC-R19.rvt

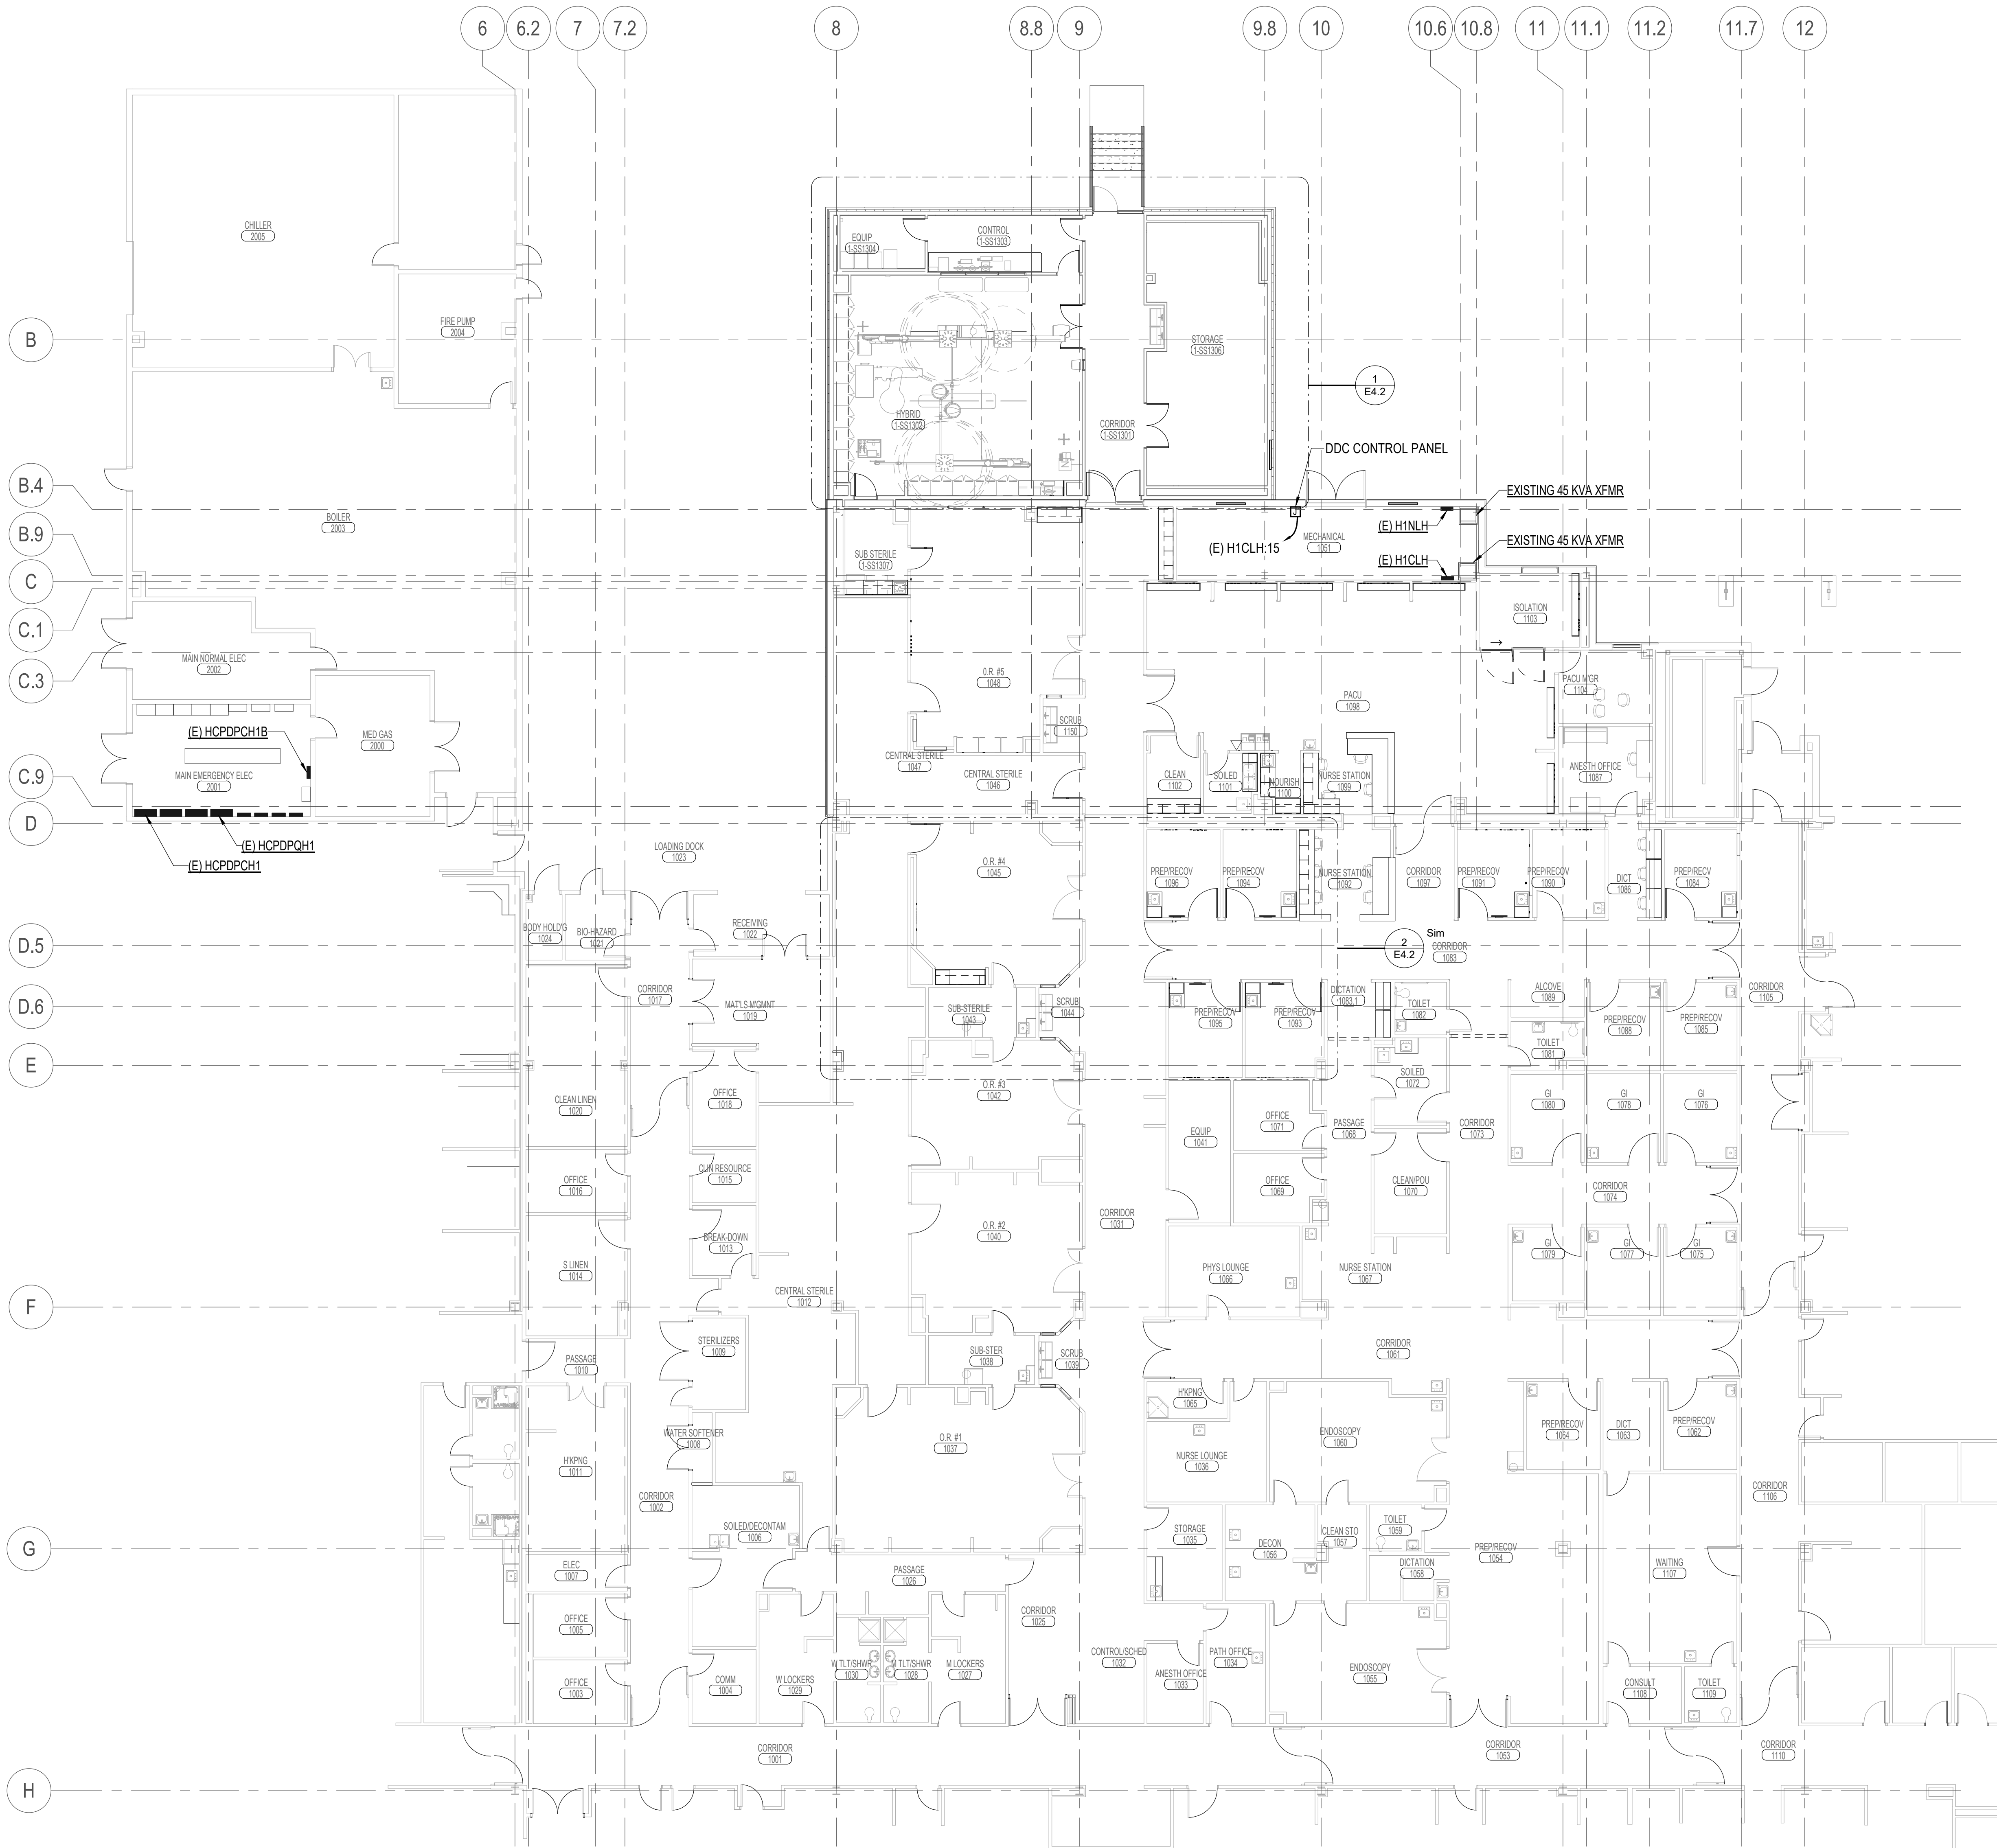

1 POWER PLAN - 1ST FLOOR OVERALL  
3/32" = 1'-0"

POWER PLAN NOTES:

1. BRANCH CIRCUITS ARE INDICATED AS ONE CIRCUIT HOME RUNS WITH INDIVIDUAL NEUTRALS. A MAXIMUM OF THREE CIRCUITS (MAXIMUM OF THREE PHASE CONDUCTORS) MAY BE GROUPED IN A SINGLE CONDUIT. WHERE MULTIPLE CIRCUITS ARE LOCATED IN THE SAME RACEWAY, JUNCTION BOX OR ENCLOSURE, NEUTRALS SHALL BE MARKED OR LABELED TO INDICATE WHICH CIRCUIT THEY ARE ASSOCIATED WITH. SEE SPECIFICATION SECTION "LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES" FOR ADDITIONAL INFORMATION.
2. A GROUND CONDUCTOR SIZED PER N.E.C. ARTICLE 250 IS REQUIRED IN ALL CONDUITS.
3. FOR CONNECTION REQUIREMENTS TO MECHANICAL UNITS, SEE MECHANICAL EQUIPMENT CONNECTION SCHEDULE.
4. ALL PENETRATIONS IN THE RATED WALLS AND CEILINGS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASSES. THE SEALANT SHALL HAVE A T-RATING OF ONE HOUR.
5. ALL PIPING, CONDUIT, AND OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) IN THE RATED WALLS OR CEILING SHALL BE CONSTRUCTED OF NON-COMBUSTIBLE MATERIAL.
6. OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) SHALL BE LIMITED TO TWO OUTLET BOXES PER STUD SPACE. OUTLET BOXES ON OPPOSITE SIDES OF THE RATED WALLS SHALL BE SEPARATED BY A HORIZONTAL DISTANCE OF 24 INCHES.
7. FIELD VERIFY THE EXACT LOCATION OF ALL FLOOR BOXES AND POKE THROUGH WITH ARCHITECT PRIOR TO ROUGH-IN.

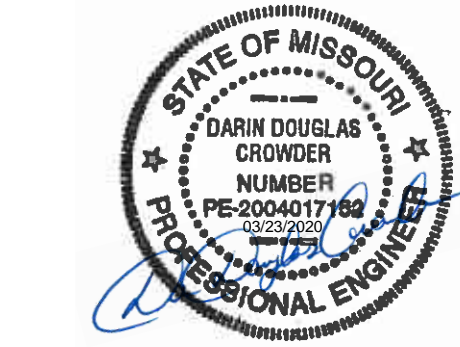

**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600  
ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



**LEES SUMMIT MEDICAL CENTER**  
**HYBRID OR ADDITION**  
**2100 SE Blue Pkwy, Lee's Summit, MO**  
**64063**


Date	3/23/20
Job Number	3-19058
Drawn By	Author
Checked By	Checker

Revision	
Number	Date
Description	

**E4.1**

© 2020 ACI/BOLAND, Inc.  
POWER PLAN - 1ST FLOOR OVERALL



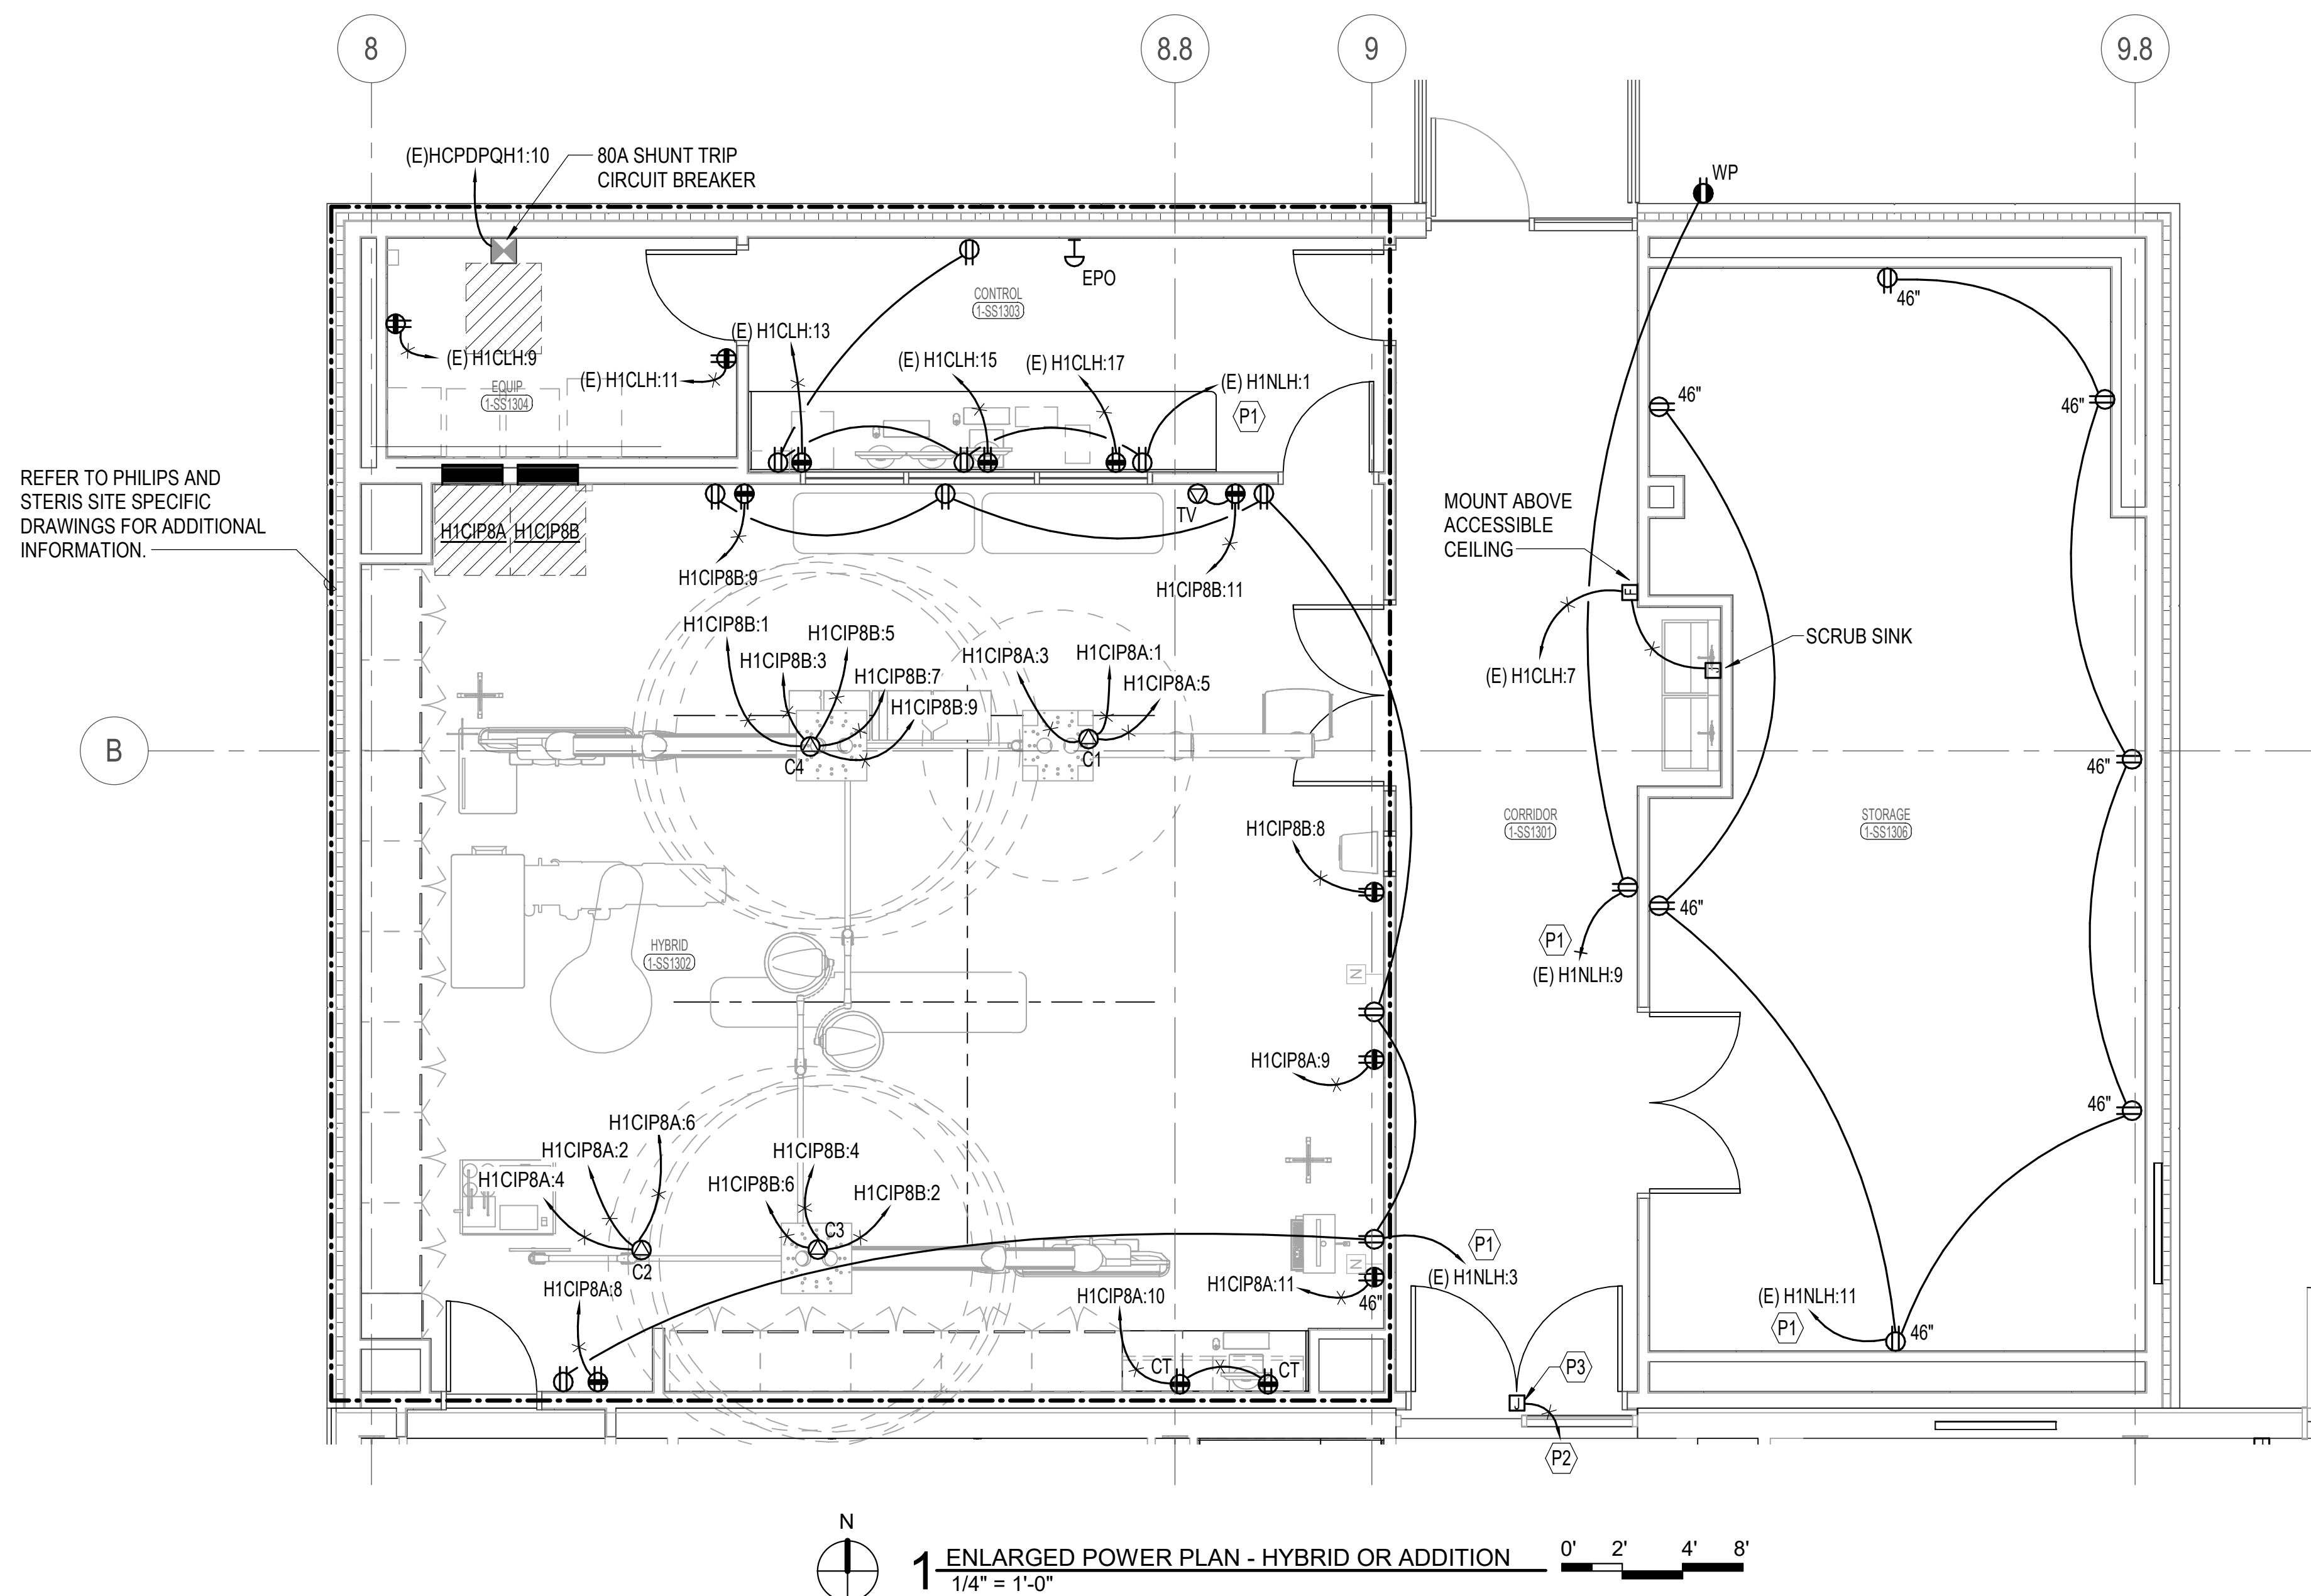

## SPECIAL OUTLETS



7. FIELD VERIFY THE EXACT LOCATION OF ALL FLOOR BOXES AND POKE THROUGHS WITH ARCHITECT PRIOR TO ROUGH-IN.

P3 PROVIDE 120V. CONNECTION TO DOOR OPERATOR PROVIDED BY DOOR HARDWARE SUPPLIER. INTERFACE POWER/CONTROLS WITH FIRE ALARM CONTROL PANEL. VERIFY ALL REQUIREMENTS AS NECESSARY.



3/23/2020 10:39:37 AM

B:\M 360-1190711-000 - Lee's Summit Med Ctr Hybrid OR Addn\190711-000-MASTER ELEC-R19.rvt

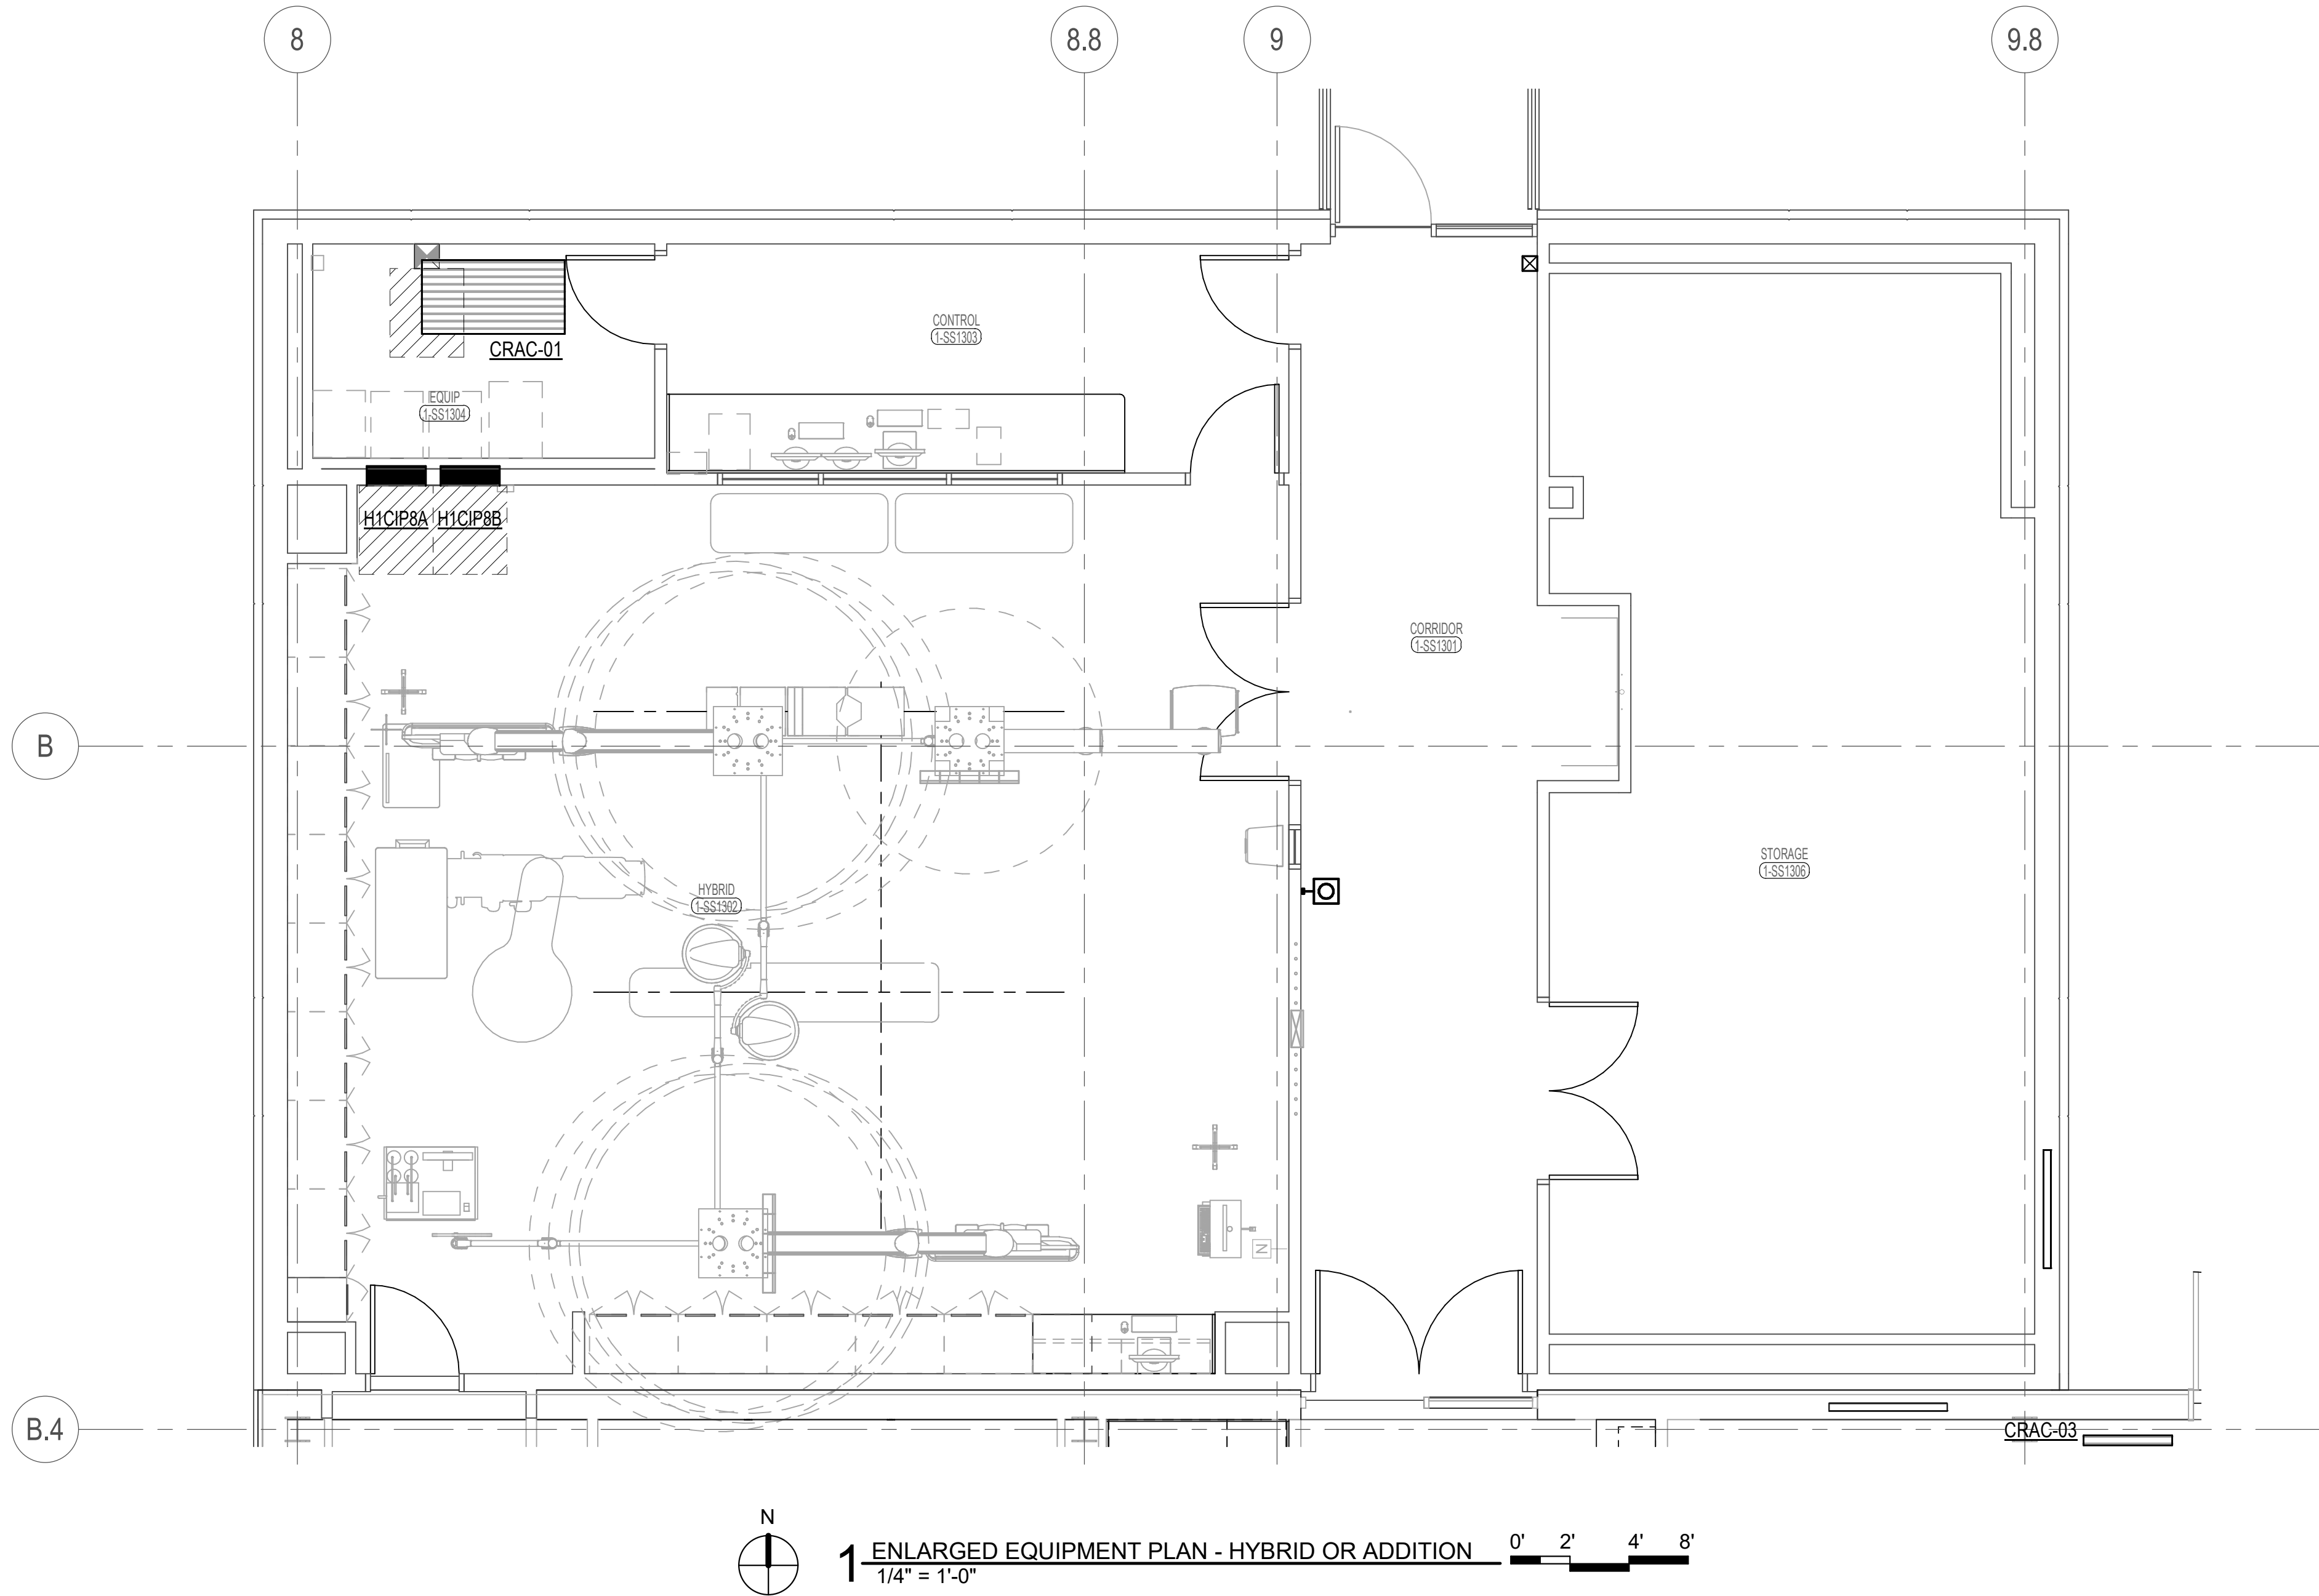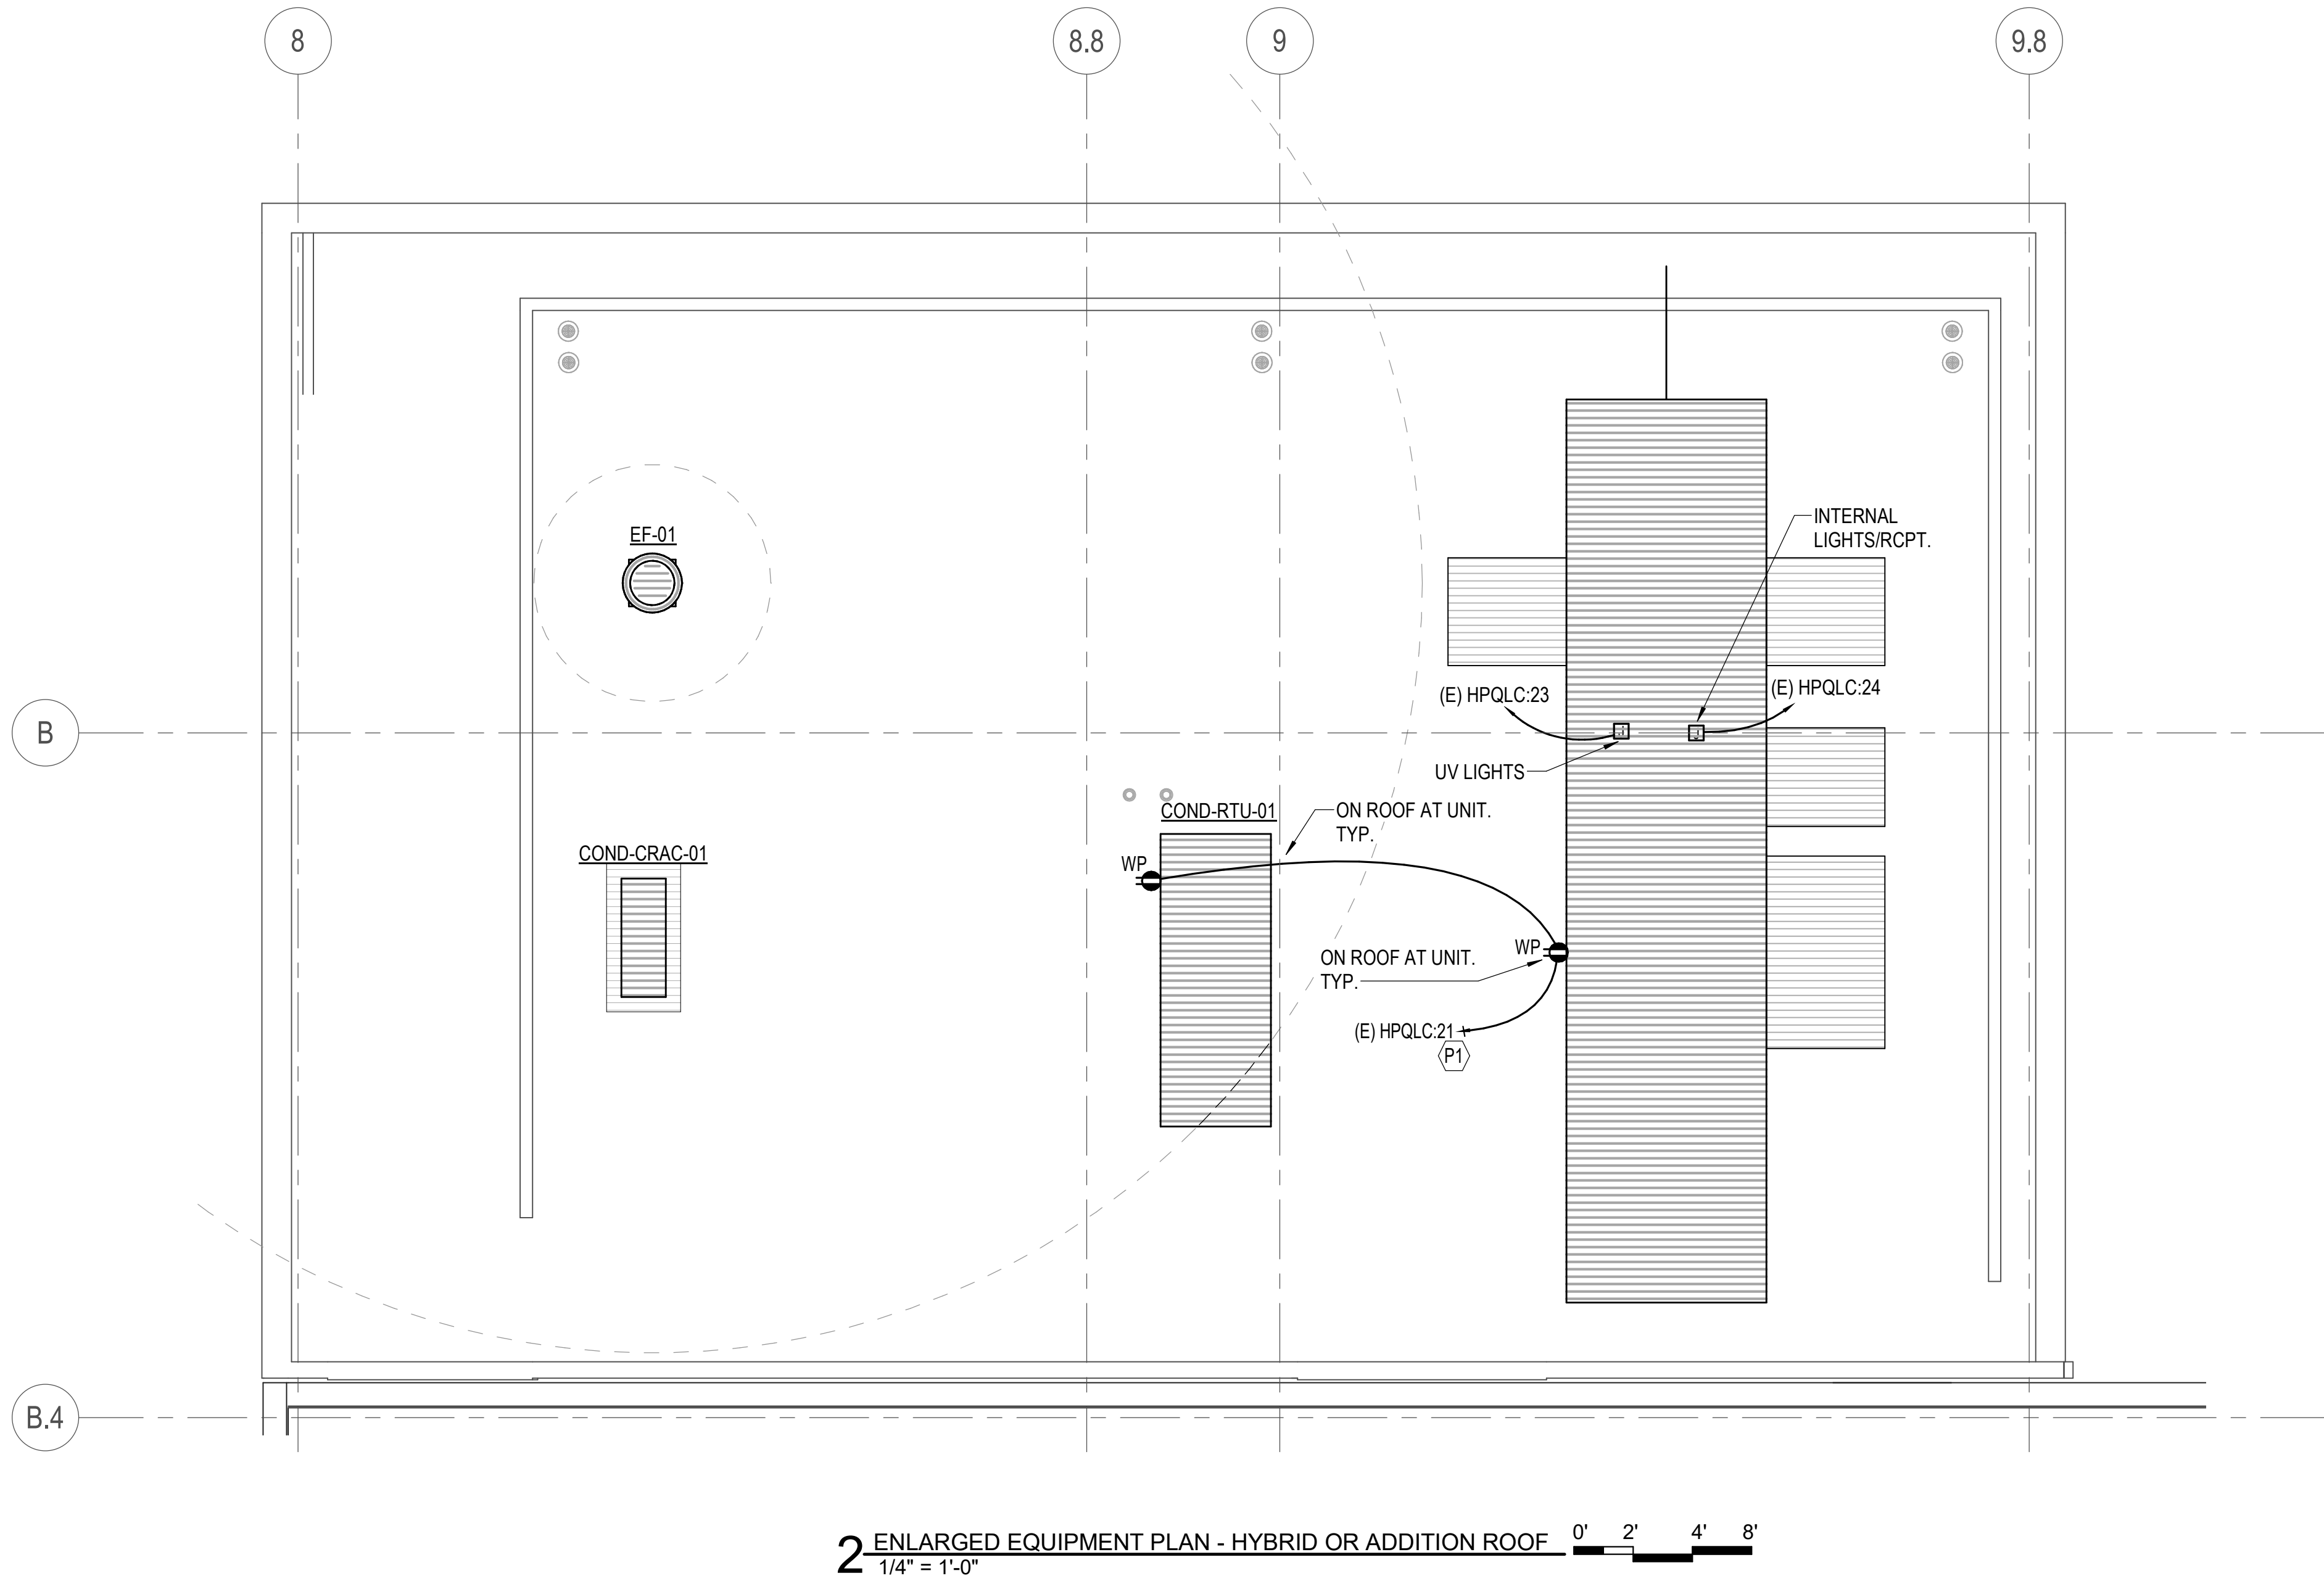

POWER PLAN NOTES:

- BRANCH CIRCUITS ARE INDICATED AS ONE CIRCUIT HOME RUNS WITH INDIVIDUAL NEUTRALS. A MAXIMUM OF THREE CIRCUITS (MAXIMUM OF THREE PHASE CONDUCTORS) MAY BE GROUPED IN A SINGLE CONDUIT. WHERE MULTIPLE CIRCUITS ARE LOCATED IN THE SAME RACEWAY, JUNCTION BOX OR ENCLOSURE, NEUTRALS SHALL BE MARKED OR LABELED TO INDICATE WHICH CIRCUIT THEY ARE ASSOCIATED WITH. SEE SPECIFICATION SECTION "LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES" FOR ADDITIONAL INFORMATION.
- A GROUND CONDUCTOR SIZED PER N.E.C. ARTICLE 250 IS REQUIRED IN ALL CONDUITS.
- FOR CONNECTION REQUIREMENTS TO MECHANICAL UNITS, SEE MECHANICAL EQUIPMENT CONNECTION SCHEDULE.
- ALL PENETRATIONS IN THE RATED WALLS AND CEILINGS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASSES. THE SEALANT SHALL HAVE A T-RATING OF ONE HOUR.
- ALL PIPING, CONDUIT, AND OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) IN THE RATED WALLS OR CEILING SHALL BE CONSTRUCTED OF NON-COMBUSTIBLE MATERIAL.
- OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) SHALL BE LIMITED TO TWO OUTLET BOXES PER STUD SPACE. OUTLET BOXES ON OPPOSITE SIDES OF THE RATED WALLS SHALL BE SEPARATED BY A HORIZONTAL DISTANCE OF 24 INCHES.
- FIELD VERIFY THE EXACT LOCATION OF ALL FLOOR BOXES AND POKE THROUGHS WITH ARCHITECT PRIOR TO ROUGH-IN.

# KEYED NOTES:

- P1 PROVIDE 120V, 1P, 20A. CONNECTION TO EXISTING CIRCUIT BREAKER IN EXISTING PANELBOARD AS INDICATED. UPDATE PANEL DIRECTORY.



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**LEES SUMMIT MEDICAL CENTER**  
**HYBRID OR ADDITION**  
**2100 SE Blue Pkwy, Lee's Summit, MO**  
**64063**

Date	3/23/20
Job Number	3-19058
Drawn By	Author
Checked By	Checker

Revision		
Number	Date	Description


**E4.3**

© 2020 ACI/BOLAND, Inc.  
ENLARGED EQUIPMENT PLAN -  
HYBRID OR ADDITION



3/23/2020 10:39:38 AM

BM 360:/190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER ELEC-R19.rvt

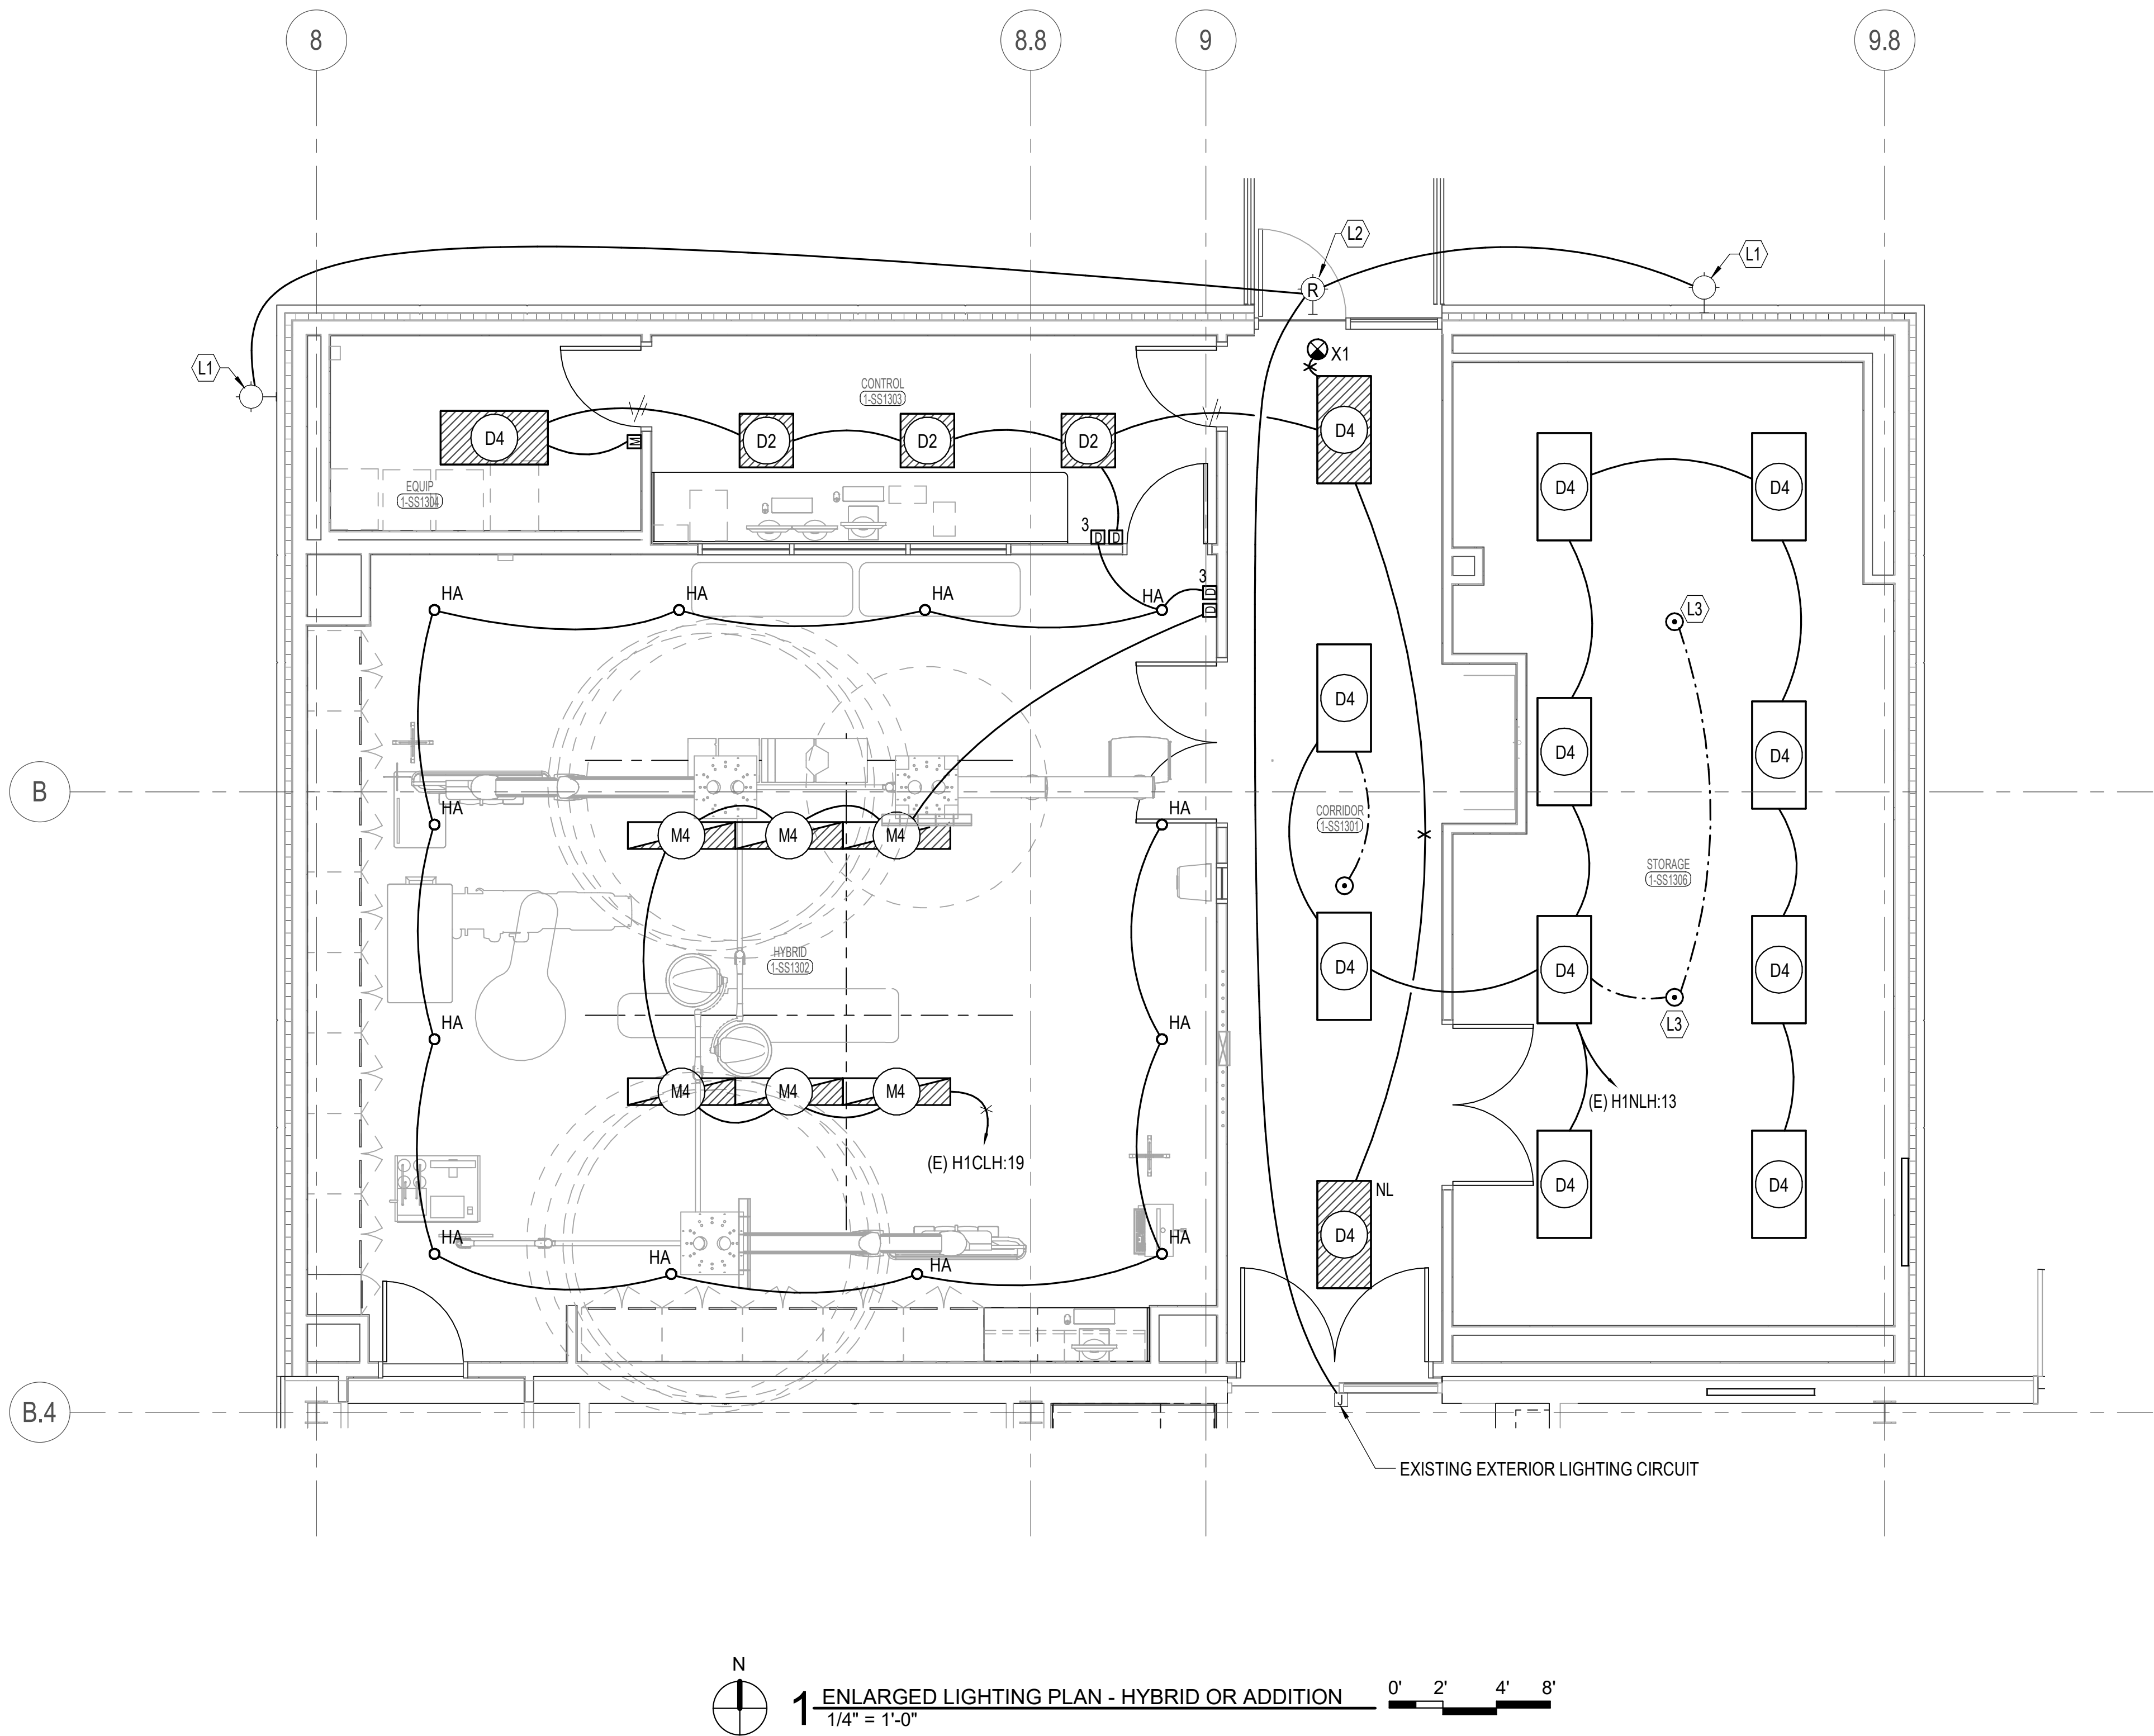

LIGHTING PLAN NOTES:

1. BRANCH CIRCUITS ARE INDICATED AS ONE CIRCUIT HOME RUNS WITH INDIVIDUAL NEUTRALS. A MAXIMUM OF THREE CIRCUITS (MAXIMUM OF THREE PHASE CONDUCTORS) MAY BE GROUPED IN A SINGLE CONDUIT. WHERE MULTIPLE CIRCUITS ARE LOCATED IN THE SAME RACEWAY, JUNCTION BOX OR ENCLOSURE, NEUTRALS SHALL BE MARKED OR LABELED TO INDICATE WHICH CIRCUIT THEY ARE ASSOCIATED WITH. SEE SPECIFICATION SECTION 'LOW VOLTAGE ELECTRICAL POWER CONDUCTORS AND CABLES' FOR ADDITIONAL INFORMATION.
2. A GROUND CONDUCTOR SIZED PER N.E.C. ARTICLE 250 IS REQUIRED IN ALL CONDUITS.
3. ALL PENETRATIONS IN THE RATED WALLS AND CEILINGS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASSES. THE SEALANT SHALL HAVE A T-RATING OF ONE HOUR.
4. ALL PIPING, CONDUIT, AND OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) IN THE RATED WALLS OR CEILING SHALL BE CONSTRUCTED OF NON-COMBUSTIBLE MATERIAL.
5. REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LIGHT FIXTURE LOCATIONS. VERIFY ALL DISCREPANCIES WITH ARCHITECT PRIOR TO ROUGH-IN.

#

KEYED NOTES:

- L1 PROVIDE NEW WALL BRACKET FOR EXISTING POLE MOUNT PARKING LOT LIGHTING FIXTURES. MOUNT FIXTURE AT 12" BELOW PARAPET WALL. EXTEND AND RECONNECT EXISTING SITE LIGHTING CIRCUIT.
- L2 REINSTALL REMOVED WALLPACK FROM ABOVE PREVIOUS EXTERIOR DOOR. RECONNECT TO PREVIOUS EXTERIOR LIGHTING CIRCUIT AS INDICATED.
- L3 PROVIDE INTERLOCK WIRING BETWEEN LOCAL OCCUPANCY SENSORS PER MANUFACTURER'S REQUIREMENTS.



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

**LEES SUMMIT MEDICAL CENTER**  
**HYBRID OR ADDITION**  
**2100 SE Blue Pkwy, Lee's Summit, MO**  
**64063**


Date 3/23/20  
Job Number 3-19058  
Drawn By MJU  
Checked By RWL

Revision  
Number Date Description

**E5.1**

© 2020 ACI/BOLAND, Inc.  
ENLARGED LIGHTING PLAN - HYBRID  
O.R. ADDITION



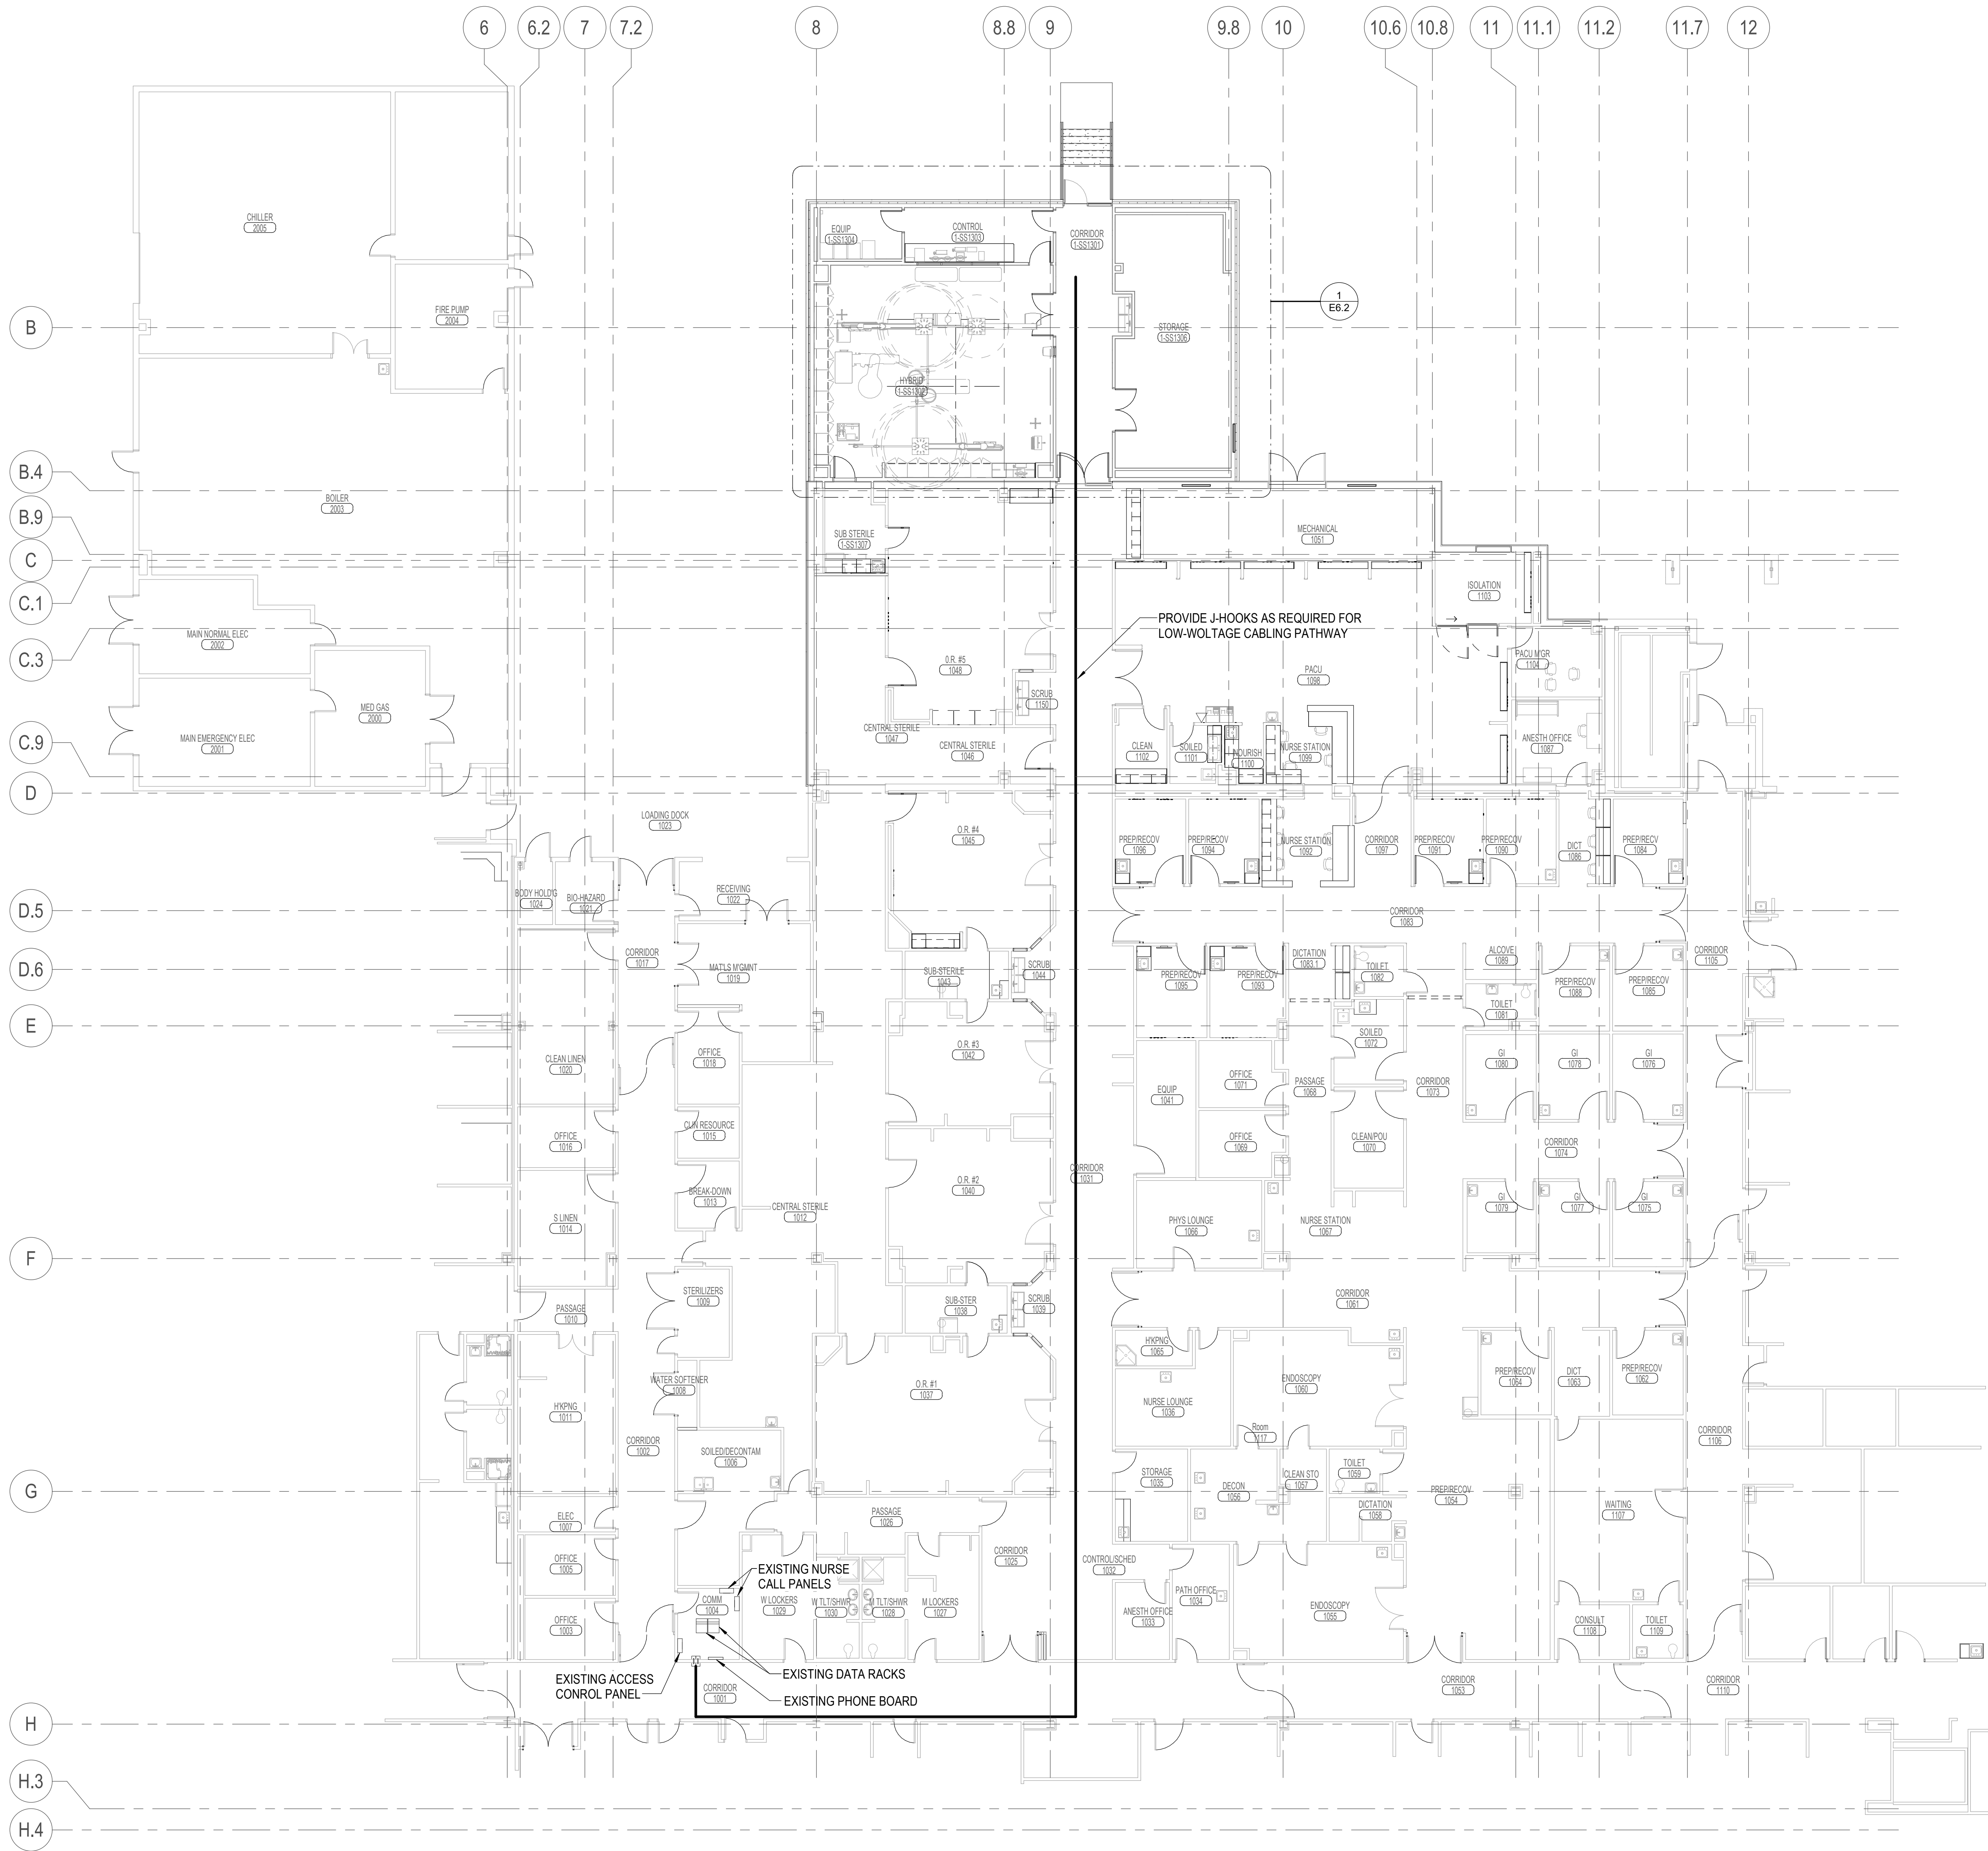

SYSTEMS PLAN NOTES:

1. ALL PENETRATIONS IN THE RATED WALLS AND CEILINGS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASSES. THE SEALANT SHALL HAVE A T-RATING OF ONE HOUR.
2. ALL PIPING, CONDUIT, AND OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) IN THE RATED WALLS OR CEILING SHALL BE CONSTRUCTED OF NON-COMBUSTIBLE MATERIAL.
3. OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) SHALL BE LIMITED TO TWO OUTLET BOXES PER STUD SPACE. OUTLET BOXES ON OPPOSITE SIDES OF THE RATED WALLS SHALL BE SEPARATED BY A HORIZONTAL DISTANCE OF 24 INCHES.
4. WHERE THE SAME DEVICE IS SHOWN IN THE SAME LOCATION ON BOTH THE POWER AND SYSTEMS PLAN, ONLY ONE DEVICE IS REQUIRED. PROVIDE BOTH POWER AND SYSTEMS WIRING AS SHOWN.
5. THE FIRE ALARM SYSTEM SHOWN HAS BEEN DESIGNED PER THE REQUIREMENTS OF NFPA 72. DEVICES SHOWN INDICATE THE DESIGN INTENT AND SHALL BE THE MINIMUM PROVIDED. SYSTEM SUPPLIER SHALL PROVIDE ANY ADDITIONAL CODE REQUIRED DEVICES OR DEVICES REQUIRED BY THE AUTHORITY HAVING JURISDICTION.
6. PROVIDE DEDICATED J-HOOK PATHWAY FOR TELECOMMUNICATIONS CABLING AS REQUIRED. PROVIDE ADDITIONAL J-HOOKS AS REQUIRED FOR LOW-VOLTAGE CABLING AS REQUIRED.

STATE OF MISSOURI

DAVID DOWDAS

PROFESSIONAL ENGINEER

NUMBER 000000000

EXPIRATION DATE 12/31/2024

ACI

BOLAND

ARCHITECTS

1710 Wyandotte

Kansas City, MO 64108

T: 816.763.9600

ACI/Boland, Inc.

Kansas City | St. Louis

Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,

ELECTRICAL, & PLUMBING

CONSULTANT

PEC

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200

Lawrence, KS 66044

State Certificate of Authority: W000465F

Phone Number: 785.842.6464

LEES SUMMIT MEDICAL CENTER  
HYBRID OR ADDITION  
2100 SE Blue Pkwy, Lee's Summit, MO  
64063

Date	3/23/20
Job Number	3-19058
Drawn By	Author
Checked By	Checker


Revision		
Number	Date	Description

E6.1  
© 2020 ACI/BOLAND, Inc.  
SYSTEMS PLAN - 1ST FLOOR OVERALL



BIM 360://190711-000 - Lee's Summit Med Ctr Hybrid OR Addn/190711-000-MASTER ELEC-R19.rvt

3/23/2020 10:39:43 AM

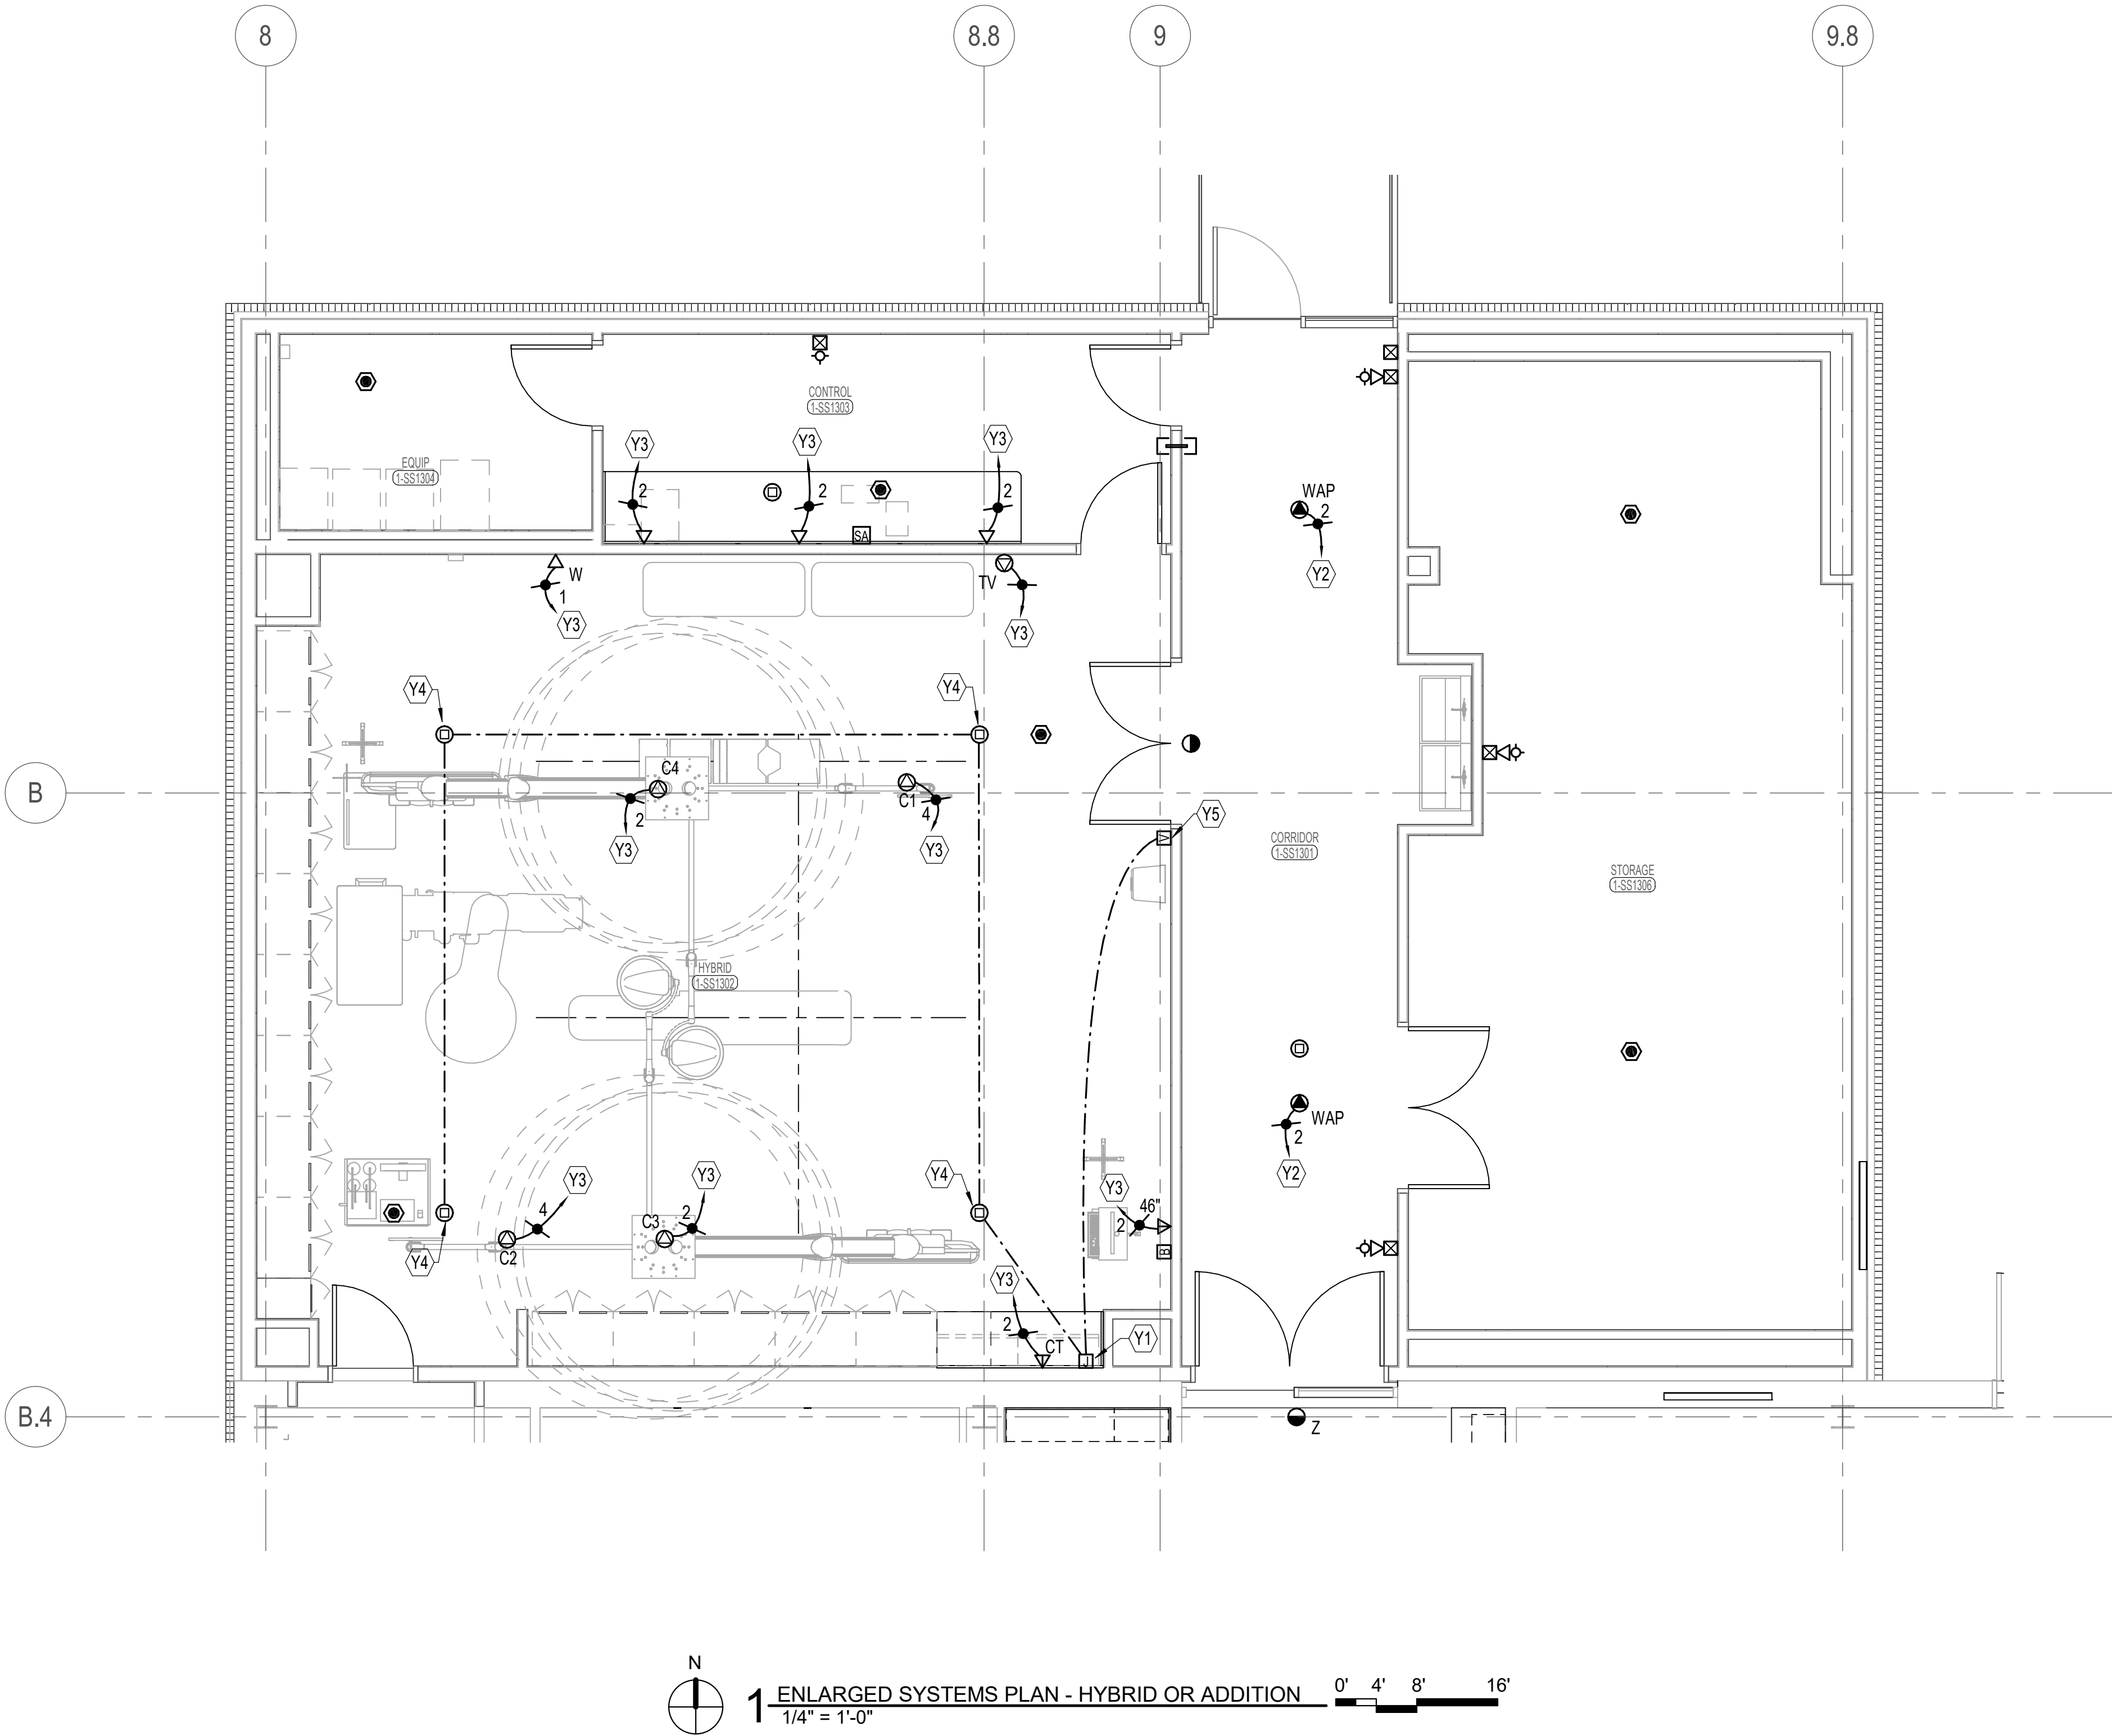

SYSTEMS PLAN NOTES:

- ALL PENETRATIONS IN THE RATED WALLS AND CEILINGS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSAGE OF FLAMES AND HOT GASSES. THE SEALANT SHALL HAVE A T-RATING OF ONE HOUR.
- ALL PIPING, CONDUIT, AND OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) IN THE RATED WALLS OR CEILING SHALL BE CONSTRUCTED OF NON-COMBUSTIBLE MATERIAL.
- OUTLET BOXES (ELECTRIC, TELEPHONE, COMPUTER, ETC.) SHALL BE LIMITED TO TWO OUTLET BOXES PER STUD SPACE. OUTLET BOXES ON OPPOSITE SIDES OF THE RATED WALLS SHALL BE SEPARATED BY A HORIZONTAL DISTANCE OF 24 INCHES.
- WHERE THE SAME DEVICE IS SHOWN IN THE SAME LOCATION ON BOTH THE POWER AND SYSTEMS PLAN, ONLY ONE DEVICE IS REQUIRED. PROVIDE BOTH POWER AND SYSTEMS WIRING AS SHOWN.
- THE FIRE ALARM SYSTEM SHOWN HAS BEEN DESIGNED PER THE REQUIREMENTS OF NFPA 72. DEVICES SHOWN INDICATE THE DESIGN INTENT AND SHALL BE THE MINIMUM PROVIDED. SYSTEM SUPPLIER SHALL PROVIDE ANY ADDITIONAL CODE REQUIRED DEVICES OR DEVICES REQUIRED BY THE AUTHORITY HAVING JURISDICTION.
- PROVIDE DEDICATED J-HOOK PATHWAY FOR TELECOMMUNICATIONS CABLING AS REQUIRED. PROVIDE ADDITIONAL J-HOOKS AS REQUIRED FOR LOW-VOLTAGE CABLING AS REQUIRED.

#

KEYED NOTES:

- Y1 TERMINATION LOCATION FOR SOUND SYSTEM SPEAKER AND VOLUME CONTROLLER TO AMPLIFIER. PROVIDE BLUE FREESPACE DXA 2120 DIGITAL MIXER/AMPLIFIER, OR EQUAL. CONFIGURE AMPLIFIER TO STEREO SELECT MODE. CONNECT VOLUME CONTROL AND SPEAKERS PER MANUFACTURER'S DIRECTION.
- Y2 ROUTE TWO (2) YELLOW CAT 6A CABLES TO COMM 1004, SEE DRAWING E6.1 FOR LOCATION. COIL A MINIMUM OF 30 FEET OF CABLE EACH WITH A BLACK JACK.
- Y3 ROUTE A BLACK CAT 6 CABLE (QUANTITY AS INDICATED) TO COMM 1004, SEE DRAWING E6.1 FOR LOCATION. JACK SHALL BE BLACK.
- Y4 PROVIDE BOSE FREESPACE DS/100F FLUSH MOUNTED WHITE CEILING SPEAKER (PRODUCT CODE 040805) WITH DS 40F/DS100F ROUGH-IN PAN (PRODUCT CODE 041983), OR EQUAL. UTILIZE 2 #18 JACKETED SPEAKER CABLES IN 1/2" C, BELDEN #8461, OR EQUAL, TO AMPLIFIER.
- Y5 PROVIDE BLUE FREESPACE VOLUME CONTROL (PRODUCT CODE 041966), OR EQUAL. UTILIZE 2 #22 TWISTED PAIR DATA GRADE CABLE IN 1/2" C, TO AMPLIFIER.



ACI  
BOLAND  
ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

LEES SUMMIT MEDICAL CENTER  
HYBRID OR ADDITION  
2100 SE Blue Pkwy, Lee's Summit, MO  
64063

Date 3/23/20  
Job Number 3-19058  
Drawn By MJU  
Checked By RWL

Revision  
Number Date Description

E6.2

© 2020 ACI/BOLAND, Inc.  
ENLARGED SYSTEMS PLAN - HYBRID  
O.R. ADDITION



3/25/2020 4:19:42 PM

C:\Users\clauw\Documents\3-19058\_LSMC Hybrid OR\_Arch\_claue\VTDN7.rvt

E

D

C

B

A

STATE OF MISSOURI

REGISTERED ARCHITECT

Victor L. Mosby

Number A-6471

3-23-2020

Victor L. Mosby, Architect  
License - Missouri EA-6471

ACI

BOLAND

ARCHITECTS

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT

Professional Engineering Consultants, P.A.

623 Massachusetts Street, Suite 200  
Lawrence, KS 66044

Licensee's Certificate of Authority Number:

Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition

2100 SE Blue Parkway

Lee's Summit, MO 64063

Date3-23-2020

Job Number3-19058

Drawn ByBR

Checked ByKC


Revision

NumberDateDescription

F1.1

© 2020 ACI/BOLAND, Inc.  
EQUIPMENT PLAN


SPECIALTY EQUIPMENT SCHEDULE			
TYPE MARK	DESCRIPTION	RESPONSIBILITY	COMMENTS
E0945	WORKSTATION, MOBILE	OFOI	POWER AS REQUIRED.
K1910	STAINLESS STEEL TABLE	OFOI	
M0013	INFECTIOUS WASTE BASKET	OFOI	
M0630	ANESTHESIA APPARATUS, 3 GAS	OFOI	
M1801	COMPUTER	OFOI	POWER AS REQUIRED.
M3110	BLANKET WARMER	OFOI	POWER AS REQUIRED.
M4255	IV STAND	OFOI	
M8880	ANESTHESIA CART	OFOI	
M8910	SURGICAL CASE CART	OFOI	
M9110	SURGICAL TABLE	OFOI	POWER AS REQUIRED.
U1000	IMAGE 40E CABINET	VFVI	RE: VENDOR DRAWINGS
U1001	PERIPHERAL 40E CABINET	VFVI	RE: VENDOR DRAWINGS
U1002	CERTISRAY IX GENERATOR CABINET	VFVI	RE: VENDOR DRAWINGS
U1003	MAINS 40E CABINET	VFVI	RE: VENDOR DRAWINGS
U1004	REMOTE ALARM SYSTEM PANEL	VFVI	RE: VENDOR DRAWINGS
U1005	INTRASIGHT WORKSTATION	VFVI	RE: VENDOR DRAWINGS
U1006	CONTROL ROOM CONNECTION BOX	VFVI	RE: VENDOR DRAWINGS
U1007	REMOTE INJECTOR PANEL	VFVI	RE: VENDOR DRAWINGS
U1008	INJECTOR CONSOLE	VFVI	RE: VENDOR DRAWINGS
U1009	C-ARC STAND	VFVI	RE: VENDOR DRAWINGS
U1010	ANGIO DIAGNOST 7 W/ TILT, PIVOT, AND CRADLE	VFVI	RE: VENDOR DRAWINGS
U1011	SWITCH BOX	VFVI	RE: VENDOR DRAWINGS
U1012	AUXILIARY BOX	VFVI	RE: VENDOR DRAWINGS
U1013	LONGITUDINAL STATIONARY RAIL	VFVI	RE: RCP & VENDOR DRAWINGS
U1014	LONGITUDINAL DRIVE BELT	VFVI	RE: RCP & VENDOR DRAWINGS
U1015	CEILING MOUNTED OR LIGHTSMONITOR BOOM	VFVI	RE: RCP & VENDOR DRAWINGS
U1016	CEILING MOUNTED OR LIGHTSMONITOR BOOM	VFVI	RE: RCP & VENDOR DRAWINGS
U1017	CEILING MOUNTED OR LIGHTSMONITOR BOOM	VFVI	RE: RCP & VENDOR DRAWINGS

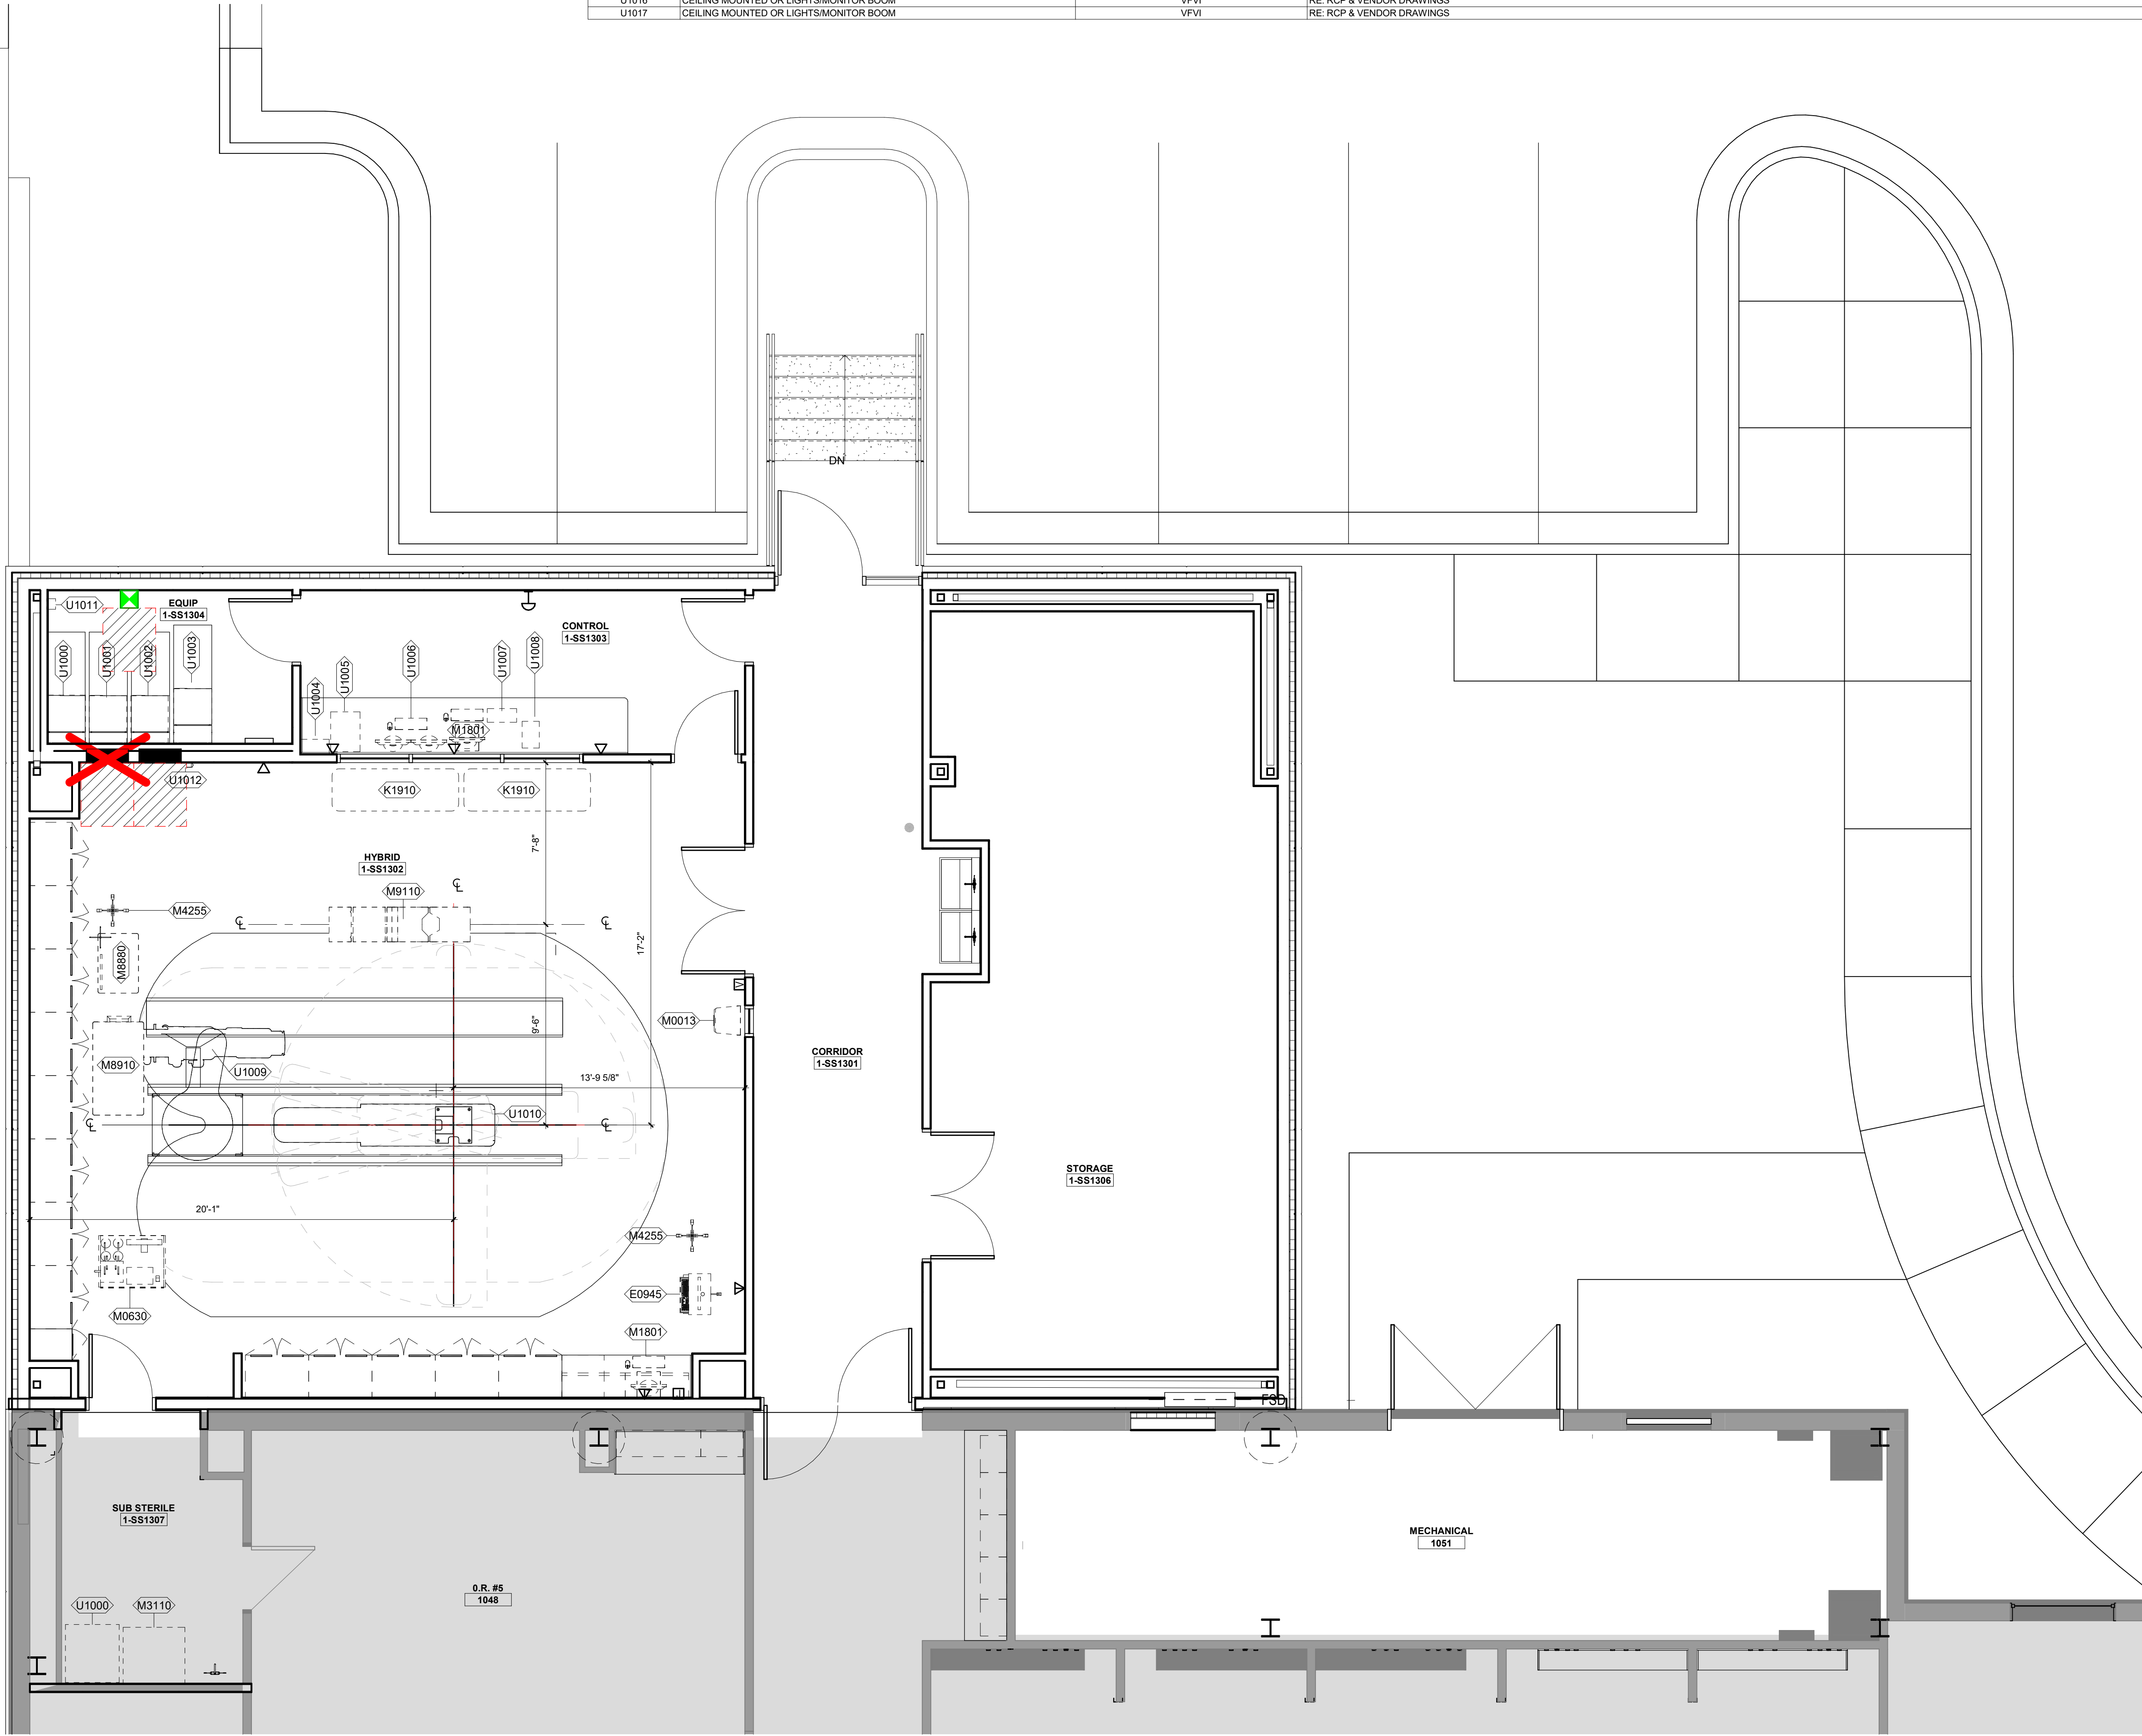


A1 FIRST FLOOR EQUIPMENT PLAN  
1/4" = 1'-0"





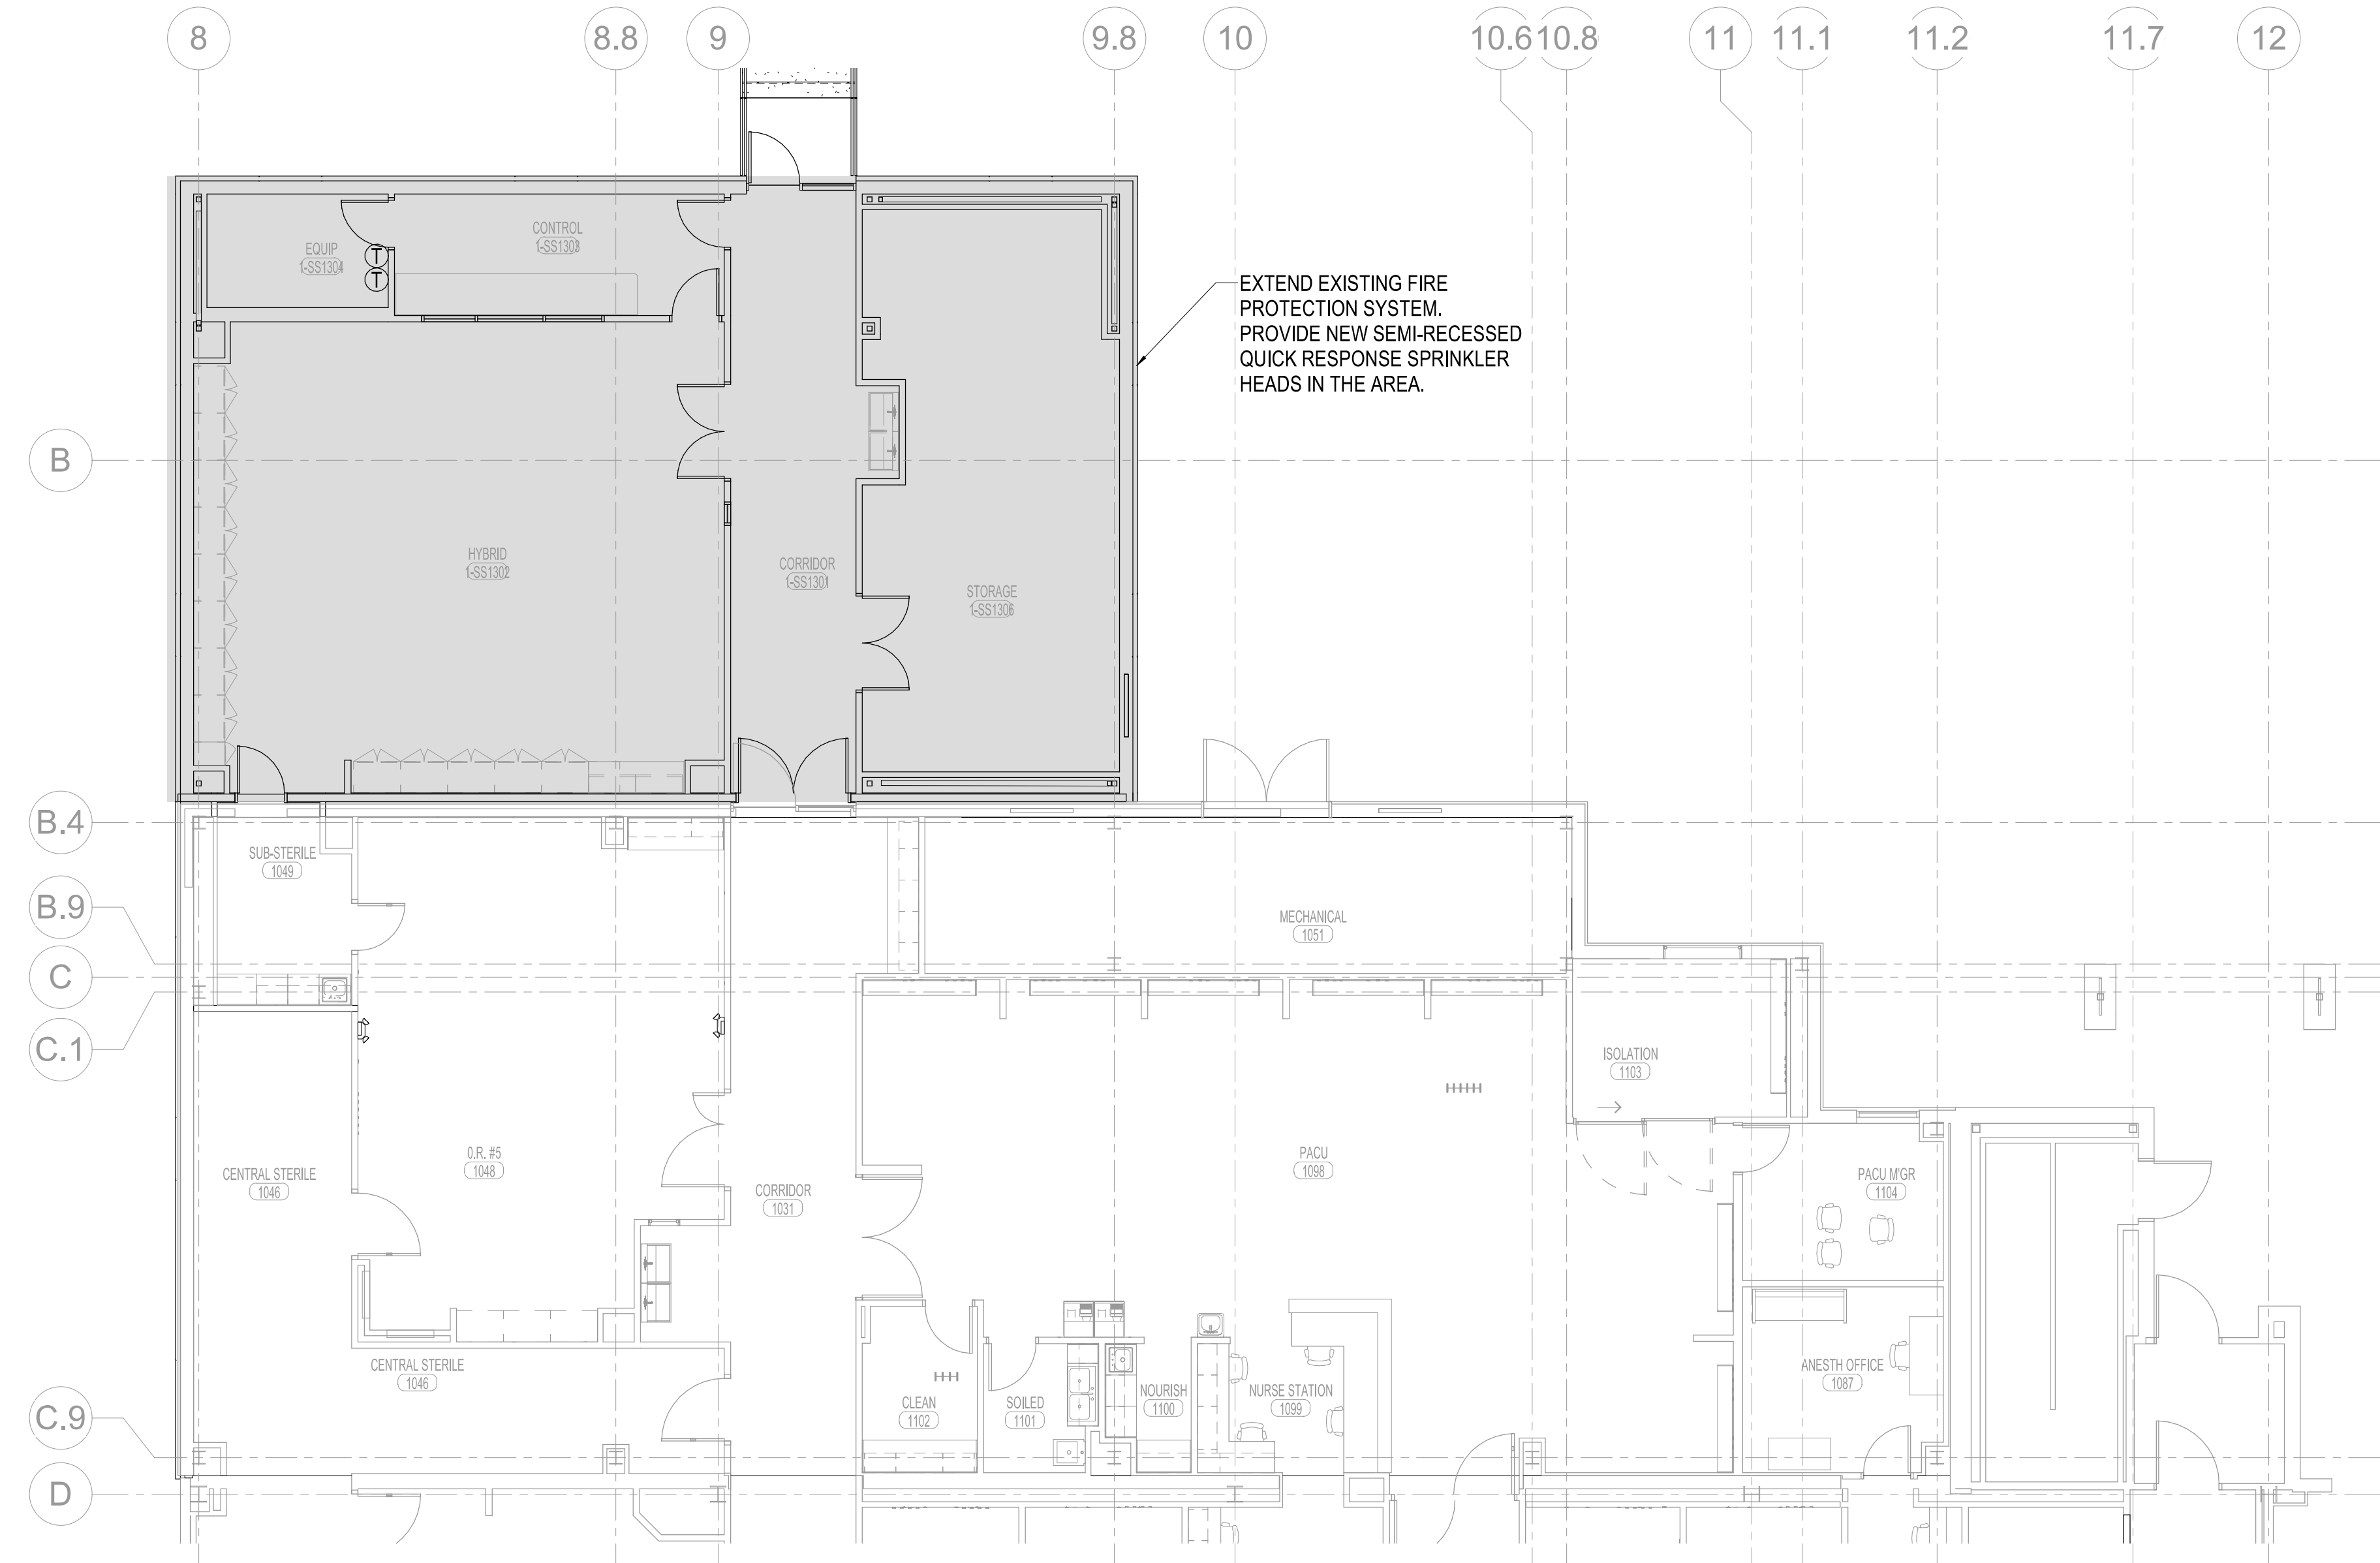

1 FIRE PROTECTION FLOOR PLAN  
1/8" = 1'-0"

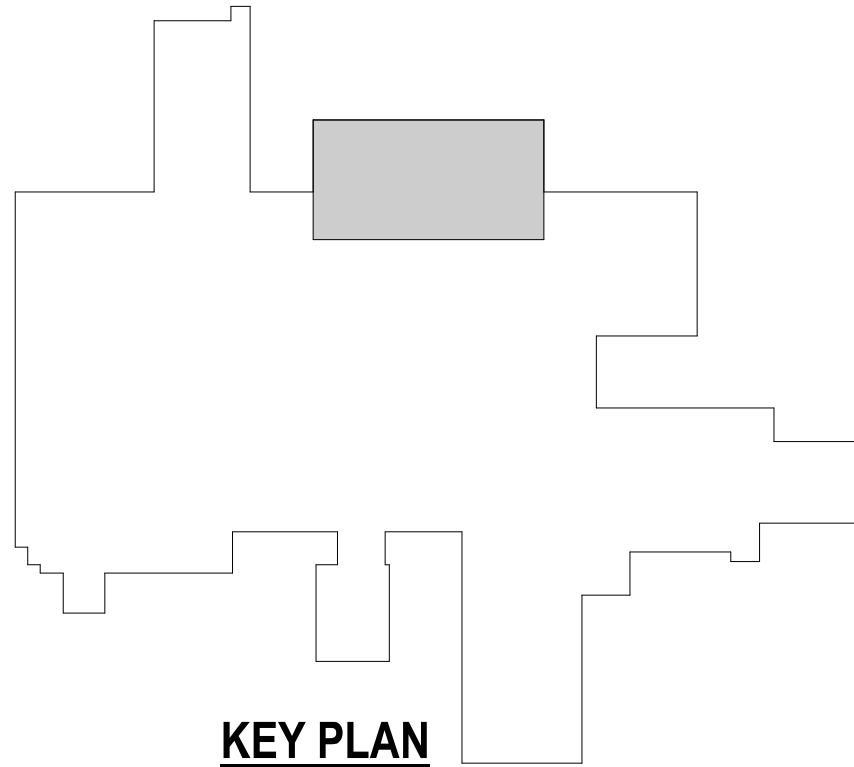

KEY PLAN

FIRE PROTECTION NOTES

1. PIPING TO BE BLACK IRON WITH SCREWED MALLEABLE IRON FITTINGS OR MECHANICAL GROOVE FITTINGS. SEE SPECIFICATIONS FOR DETAILS AND APPLICATIONS.
2. PIPE HANGERS TO BE U.L. LISTED AND MOUNTED IN ACCORDANCE WITH NFPA-13.
3. DO NOT OBSTRUCT SPRINKLERS WITH OTHER UTILITIES.
4. REFER SPECIFICATIONS FOR SPRINKLER HEAD TYPES AND APPLICATIONS. ALL SPRINKLER HEADS TO BE QUICK-RESPONSE TYPE. ALL SPRINKLER HEADS SHALL BE LOCATED IN EXACT CENTER OF CEILING TILES.
5. FIRE SPRINKLER DESIGN IS THE RESPONSIBILITY OF THE FIRE SPRINKLER CONTRACTOR. FINAL DESIGN SHALL BE SEALED BY A REGISTERED LICENSED ENGINEER IN THE STATE OF KANSAS. FIRE MARSHALL APPROVED SHOP DRAWINGS SHALL BE SUBMITTED TO THE DESIGN ENGINEER FOR APPROVAL.
6. COORDINATE PIPE ROUTING AND HEAD LOCATIONS WITH OTHER TRADES. PIPING AND HEADS NOT COORDINATED SHALL BE MOVED AT THE CONTRACTOR'S EXPENSE TO ACCOMPLISH CEILING HEIGHTS AS CALLED OUT ON THE ARCHITECT'S DRAWINGS.
7. COORDINATE CLOSELY WITH ALL OTHER TRADES PRIOR TO CONSTRUCTION AND PROVIDE BIM MODEL TO CONSTRUCTION MANAGER FOR COORDINATION AMONG DISCIPLINES IF APPLICABLE.
8. FIRE PROTECTION ENGINEER OF RECORD SHALL DETERMINE HAZARD CLASSIFICATIONS.

FIRE PROTECTION GENERAL NOTES:

1. THIS IS A LIFE SAFETY BUILDING WHICH MEANS IT SHALL REMAIN REASONABLY OPERATIONAL IN THE CASE OF A SEISMIC EVENT. THEREFORE ALL STATIONARY EQUIPMENT ON THE FLOOR OR A MEZZANINE AND ALL CONCRETE PADS SHALL BE FIXED RIGIDLY TO THE STRUCTURE. ALL ROTATING OR RECIPROCATING OR VIBRATING EQUIPMENT SHALL BE INSTALLED WITH EARTHQUAKE SNUBBERS TO LIMIT MOVEMENT. ALL HANGING EQUIPMENT, PIPING, AND DUCTWORK SHALL BE BRACED TO THE STRUCTURE. REFER TO SPECIFICATION SECTION 21 0548, 22 0548 AND 23 0548.
2. CONTRACTOR SHALL DESIGN FIRE SPRINKLER AND STANDPIPE SYSTEM(S), INCLUDING COMPREHENSIVE ENGINEERING ANALYSIS BY A QUALIFIED PROFESSIONAL ENGINEER, USING PERFORMANCE REQUIREMENTS AND DESIGN CRITERIA INDICATED.
3. SPRINKLER SYSTEM DESIGN SHALL BE APPROVED BY AUTHORITIES HAVING JURISDICTION.
4. ORIGINAL FIRE SPRINKLER SHOP DRAWINGS ARE AVAILABLE UPON REQUEST.
5. VERIFY ALL EXISTING CONDITIONS PRIOR TO BEGINNING WORK. BRING ANY DISCREPANCIES FROM THE DRAWINGS AND NOTES TO THE ARCHITECT IMMEDIATELY. MINOR CHANGES IN THE SCOPE OF THE DEMOLITION WORK SHALL NOT JUSTIFY AN ADDITIONAL COST.
6. REMOVAL OF EXISTING HEADS AND EQUIPMENT WILL REQUIRE ISOLATING THE PIPING RISERS OR MAINS VIA SHUT-OFF VALVES. INSTALL NEW ISOLATION VALVES WHERE REQUIRED FOR COMPLETION OF WORK.
7. REMOVAL OF EXISTING SPRINKLERS HEADS AND PIPING WILL REQUIRE CAPPING AND SEALING EXISTING MAINS OR BRANCHES AS NECESSARY AND REQUIRED TO ALLOW THE REMAINING SYSTEMS TO FULLY OPERATE WITHOUT DEGRADATION.
8. CONTRACTOR SHALL PROVIDE PROTECTIVE PLASTIC DROP CLOTHS TO PROTECT THE EXISTING OCCUPIED AREAS AND EQUIPMENT FROM DUST AND DEBRIS DURING THE CONSTRUCTION WORK, AND SHALL CLEAN THE AREAS OF ALL CONSTRUCTION DIRT DAILY, AND UPON COMPLETION OF THE WORK.
9. ALL DRAINED PIPING RISERS AND MAINS SHALL BE REFILLED WITH PROPER FLUID AND PROPERLY VENTED BY THIS CONTRACTOR, ONCE NEW WORK HAS BEEN INSTALLED.
10. COORDINATE WITH GENERAL CONTRACTOR THE REMOVAL AND REPLACEMENT OF ALL EXISTING CEILINGS, WALLS, ETC. AS REQUIRED FOR DEMOLITION WORK.
11. EXISTING PIPING, ETC., NOT TO BE UTILIZED IN THE COMPLETED BUILDING SHALL BE DISCONTINUED OR REMOVED AS REQUIRED. ALL ENDS OF DISCONTINUED PIPING SHALL BE CAPPED IN THE NEAREST WALL, CEILING OR FLOOR SO THAT THEY ARE COMPLETELY CONCEALED. OPENINGS LEFT IN WALLS, CEILINGS, ETC., WHERE EQUIPMENT AND PIPE, ETC., ARE REMOVED AND NOT REPLACED, SHALL BE PATCHED NEATLY WITH SIMILAR MATERIAL TO ADJACENT CONSTRUCTION. REFER TO DRAWINGS DELINEATING NEW WORK FOR ADDITIONAL INFORMATION REGARDING SYSTEMS OR PORTIONS OF SYSTEMS WHERE USE IS TO BE DISCONTINUED.
12. ALL CUTTING AND CHANNELING OF EXISTING BUILDING SHALL BE ACCOMPLISHED IN A NEAT AND WORKMANLIKE MANNER WITHOUT REMOVAL OF EXCESS MATERIALS. THIS CONTRACTOR SHALL PATCH AND REPLACE WITH MATERIAL SIMILAR TO ADJACENT CONSTRUCTION.
13. WHERE EXISTING PIPING AND EQUIPMENT, ETC., THAT ARE TO BE UTILIZED IN THE COMPLETED PROGRAM CONFLICT WITH NEW CONSTRUCTION AND THE REQUIRED DEMOLITION, THEY SHALL BE RELOCATED AND RECONNECTED TO MAINTAIN THE DESIRED SERVICE.
14. PORTIONS OF EXISTING SYSTEMS MAY BE SHOWN FOR CLARITY EVEN THOUGH IT MAY NOT BE NECESSARY TO MODIFY OR REVISE THEM. ALL EXISTING SYSTEMS ARE SHOWN BASED ON ORIGINAL OR REMODEL BUILDING DRAWINGS. CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS.
15. ALL WORK MUST BE COORDINATED AND SCHEDULED WITH THE OWNER AND OCCUPANTS OF THIS BUILDING SO AS TO PROVIDE THE LEAST AMOUNT OF DISRUPTION OF BUILDING ACTIVITIES AS POSSIBLE. MAINTAIN CONDITIONED SPACE FOR ALL OWNER OCCUPIED AREAS DURING CONSTRUCTION.
16. COORDINATE ALL WORK WITH OTHER TRADES PRIOR TO INSTALLATION.
17. COORDINATE ROUTING OF PIPING AND SPRINKLER HEADS WITH DUCTWORK, LIGHTS, ARCHITECTURAL CEILING AND STRUCTURAL ELEMENTS. PIPING SHALL RISE AND DROP, JOG OR OFFSET AS REQUIRED TO AVOID CONFLICTS. DUCTWORK SHALL TAKE PRECEDENCE OVER ALL PIPING, EXCEPT WHERE GRADE MUST BE MAINTAINED FOR DRAINAGE. REWORK OF INSTALLED WORK TO RESOLVE CONFLICTS ARISING FROM LACK OF COORDINATION SHALL NOT JUSTIFY AN INCREASE IN THE CONTRACT AMOUNT.
18. ALL PENETRATIONS THROUGH FIRE RATED ASSEMBLIES SHALL BE FIRE STOPPED BY THE TRADE MAKING THE PENETRATION. REFER TO ARCHITECTURAL DRAWINGS AND SPECIFICATIONS FOR REQUIREMENTS.
19. DO NOT ROUTE PIPING OVER ELECTRICAL PANELS OR EQUIPMENT. PIPING SHALL NOT BE ROUTED THROUGH ELECTRICAL ROOMS, TELECOM ROOMS OR ELEVATOR EQUIPMENT ROOMS UNLESS SPECIFICALLY SERVING THAT ROOM. COORDINATE WITH E.C.
20. COORDINATE SIZE AND LOCATION OF ACCESS DOORS IN CONSTRUCTION REQUIRED FOR ACCESS TO MECHANICAL EQUIPMENT WITH G.C.
21. ALL WORK IS TO CONFORM WITH APPLICABLE CODES AND STANDARDS.
22. CONTRACTOR TO INSTALL TEMPORARY FILTERS OVER ALL RETURN AND EXHAUST GRILLES IN WORK AREA DURING CONSTRUCTION.
23. THESE DRAWINGS ARE ACCOMPANIED BY SPECIFICATIONS. REFER TO SPECIFICATIONS FOR FURTHER INFORMATION.
24. EQUIPMENT THAT REQUIRES MAINTENANCE SHALL BE LOCATED A MINIMUM OF 10'-0" FROM THE BUILDING ROOF EDGE WHERE REQUIRED BY CODE.



**ACI**  
**BOLAND**  
**ARCHITECTS**

1710 Wyandotte  
Kansas City, MO 64108  
T: 816.763.9600

ACI/Boland, Inc.  
Kansas City | St. Louis  
Licensee's Certificate of Authority Number:

**STRUCTURAL, MECHANICAL,  
ELECTRICAL, & PLUMBING  
CONSULTANT**



Professional Engineering Consultants, P.A.  
623 Massachusetts Street, Suite 200  
Lawrence, KS 66044  
State Certificate of Authority: #000465F  
Phone Number: 785.842.6464

Lee's Summit Medical Center

Hybrid OR Addition  
2100 SE Blue Parkway  
Lee's Summit, MO 64063

Date 3-23-2020  
Job Number 3-19058  
Drawn By DBB  
Checked By SPH

Revision		
Number	Date	Description

**FP1.10**

© 2020 ACI/BOLAND, Inc.  
FIRE PROTECTION FLOOR PLAN