



RE: 400393
Lot 18 HT

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014

Design Program: MiTek 20/20 8.4

Wind Code: N/A

Wind Speed: 115 mph

Roof Load: 45.0 psf

Floor Load: N/A psf

This package includes 90 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I41873995	A1	7/1/2020	27	I41874021	G3	7/1/2020
2	I41873996	A2	7/1/2020	28	I41874022	H1	7/1/2020
3	I41873997	A3	7/1/2020	29	I41874023	H2	7/1/2020
4	I41873998	A4	7/1/2020	30	I41874024	H3	7/1/2020
5	I41873999	B1	7/1/2020	31	I41874025	J1	7/1/2020
6	I41874000	B2	7/1/2020	32	I41874026	J2	7/1/2020
7	I41874001	B3	7/1/2020	33	I41874027	J3	7/1/2020
8	I41874002	B4	7/1/2020	34	I41874028	J4	7/1/2020
9	I41874003	B5	7/1/2020	35	I41874029	J5	7/1/2020
10	I41874004	B6	7/1/2020	36	I41874030	J7	7/1/2020
11	I41874005	C1	7/1/2020	37	I41874031	J8	7/1/2020
12	I41874006	C2	7/1/2020	38	I41874032	J9	7/1/2020
13	I41874007	D1	7/1/2020	39	I41874033	J10	7/1/2020
14	I41874008	D2	7/1/2020	40	I41874034	J11	7/1/2020
15	I41874009	D3	7/1/2020	41	I41874035	J12	7/1/2020
16	I41874010	D4	7/1/2020	42	I41874036	J13	7/1/2020
17	I41874011	D5	7/1/2020	43	I41874037	J14	7/1/2020
18	I41874012	D6	7/1/2020	44	I41874038	J16	7/1/2020
19	I41874013	E1	7/1/2020	45	I41874039	J17	7/1/2020
20	I41874014	E2	7/1/2020	46	I41874040	J18	7/1/2020
21	I41874015	E3	7/1/2020	47	I41874041	J21	7/1/2020
22	I41874016	E4	7/1/2020	48	I41874042	J22	7/1/2020
23	I41874017	E5	7/1/2020	49	I41874043	J23	7/1/2020
24	I41874018	E6	7/1/2020	50	I41874044	J24	7/1/2020
25	I41874019	G1	7/1/2020	51	I41874045	J25	7/1/2020
26	I41874020	G2	7/1/2020	52	I41874046	J26	7/1/2020

The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision
based on the parameters provided by Wheeler - Waverly.
Truss Design Engineer's Name: Johnson, Andrew
My license renewal date for the state of Kansas is April 30, 2022.
Kansas COA: E-943

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.





RE: 400393 - Lot 18 HT

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name:
Lot/Block:
Address:
City, County:

Subdivision:

State:

No.	Seal#	Truss Name	Date
53	I41874047	J27	7/1/2020
54	I41874048	J28	7/1/2020
55	I41874049	J29	7/1/2020
56	I41874050	J30	7/1/2020
57	I41874051	J31	7/1/2020
58	I41874052	J32	7/1/2020
59	I41874053	J33	7/1/2020
60	I41874054	J34	7/1/2020
61	I41874055	J35	7/1/2020
62	I41874056	J36	7/1/2020
63	I41874057	J37	7/1/2020
64	I41874058	J38	7/1/2020
65	I41874059	J39	7/1/2020
66	I41874060	J41	7/1/2020
67	I41874061	J42	7/1/2020
68	I41874062	J43	7/1/2020
69	I41874063	J44	7/1/2020
70	I41874064	J45	7/1/2020
71	I41874065	J46	7/1/2020
72	I41874066	J47	7/1/2020
73	I41874067	J48	7/1/2020
74	I41874068	J49	7/1/2020
75	I41874069	K1	7/1/2020
76	I41874070	K2	7/1/2020
77	I41874071	K3	7/1/2020
78	I41874072	LAY1	7/1/2020
79	I41874073	LAY2	7/1/2020
80	I41874074	LAY3	7/1/2020
81	I41874075	LAY4	7/1/2020
82	I41874076	LAY5	7/1/2020
83	I41874077	LAY6	7/1/2020
84	I41874078	LAY7	7/1/2020
85	I41874079	LAY8	7/1/2020
86	I41874080	LAY9	7/1/2020
87	I41874081	R1	7/1/2020
88	I41874082	V1	7/1/2020
89	I41874083	V2	7/1/2020
90	I41874084	V3	7/1/2020



RE: 400393
Lot 18 HT

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014

Design Program: MiTek 20/20 8.4

Wind Code: N/A

Wind Speed: 115 mph

Roof Load: 45.0 psf

Floor Load: N/A psf

This package includes 90 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I41873995	A1	7/1/2020	27	I41874021	G3	7/1/2020
2	I41873996	A2	7/1/2020	28	I41874022	H1	7/1/2020
3	I41873997	A3	7/1/2020	29	I41874023	H2	7/1/2020
4	I41873998	A4	7/1/2020	30	I41874024	H3	7/1/2020
5	I41873999	B1	7/1/2020	31	I41874025	J1	7/1/2020
6	I41874000	B2	7/1/2020	32	I41874026	J2	7/1/2020
7	I41874001	B3	7/1/2020	33	I41874027	J3	7/1/2020
8	I41874002	B4	7/1/2020	34	I41874028	J4	7/1/2020
9	I41874003	B5	7/1/2020	35	I41874029	J5	7/1/2020
10	I41874004	B6	7/1/2020	36	I41874030	J7	7/1/2020
11	I41874005	C1	7/1/2020	37	I41874031	J8	7/1/2020
12	I41874006	C2	7/1/2020	38	I41874032	J9	7/1/2020
13	I41874007	D1	7/1/2020	39	I41874033	J10	7/1/2020
14	I41874008	D2	7/1/2020	40	I41874034	J11	7/1/2020
15	I41874009	D3	7/1/2020	41	I41874035	J12	7/1/2020
16	I41874010	D4	7/1/2020	42	I41874036	J13	7/1/2020
17	I41874011	D5	7/1/2020	43	I41874037	J14	7/1/2020
18	I41874012	D6	7/1/2020	44	I41874038	J16	7/1/2020
19	I41874013	E1	7/1/2020	45	I41874039	J17	7/1/2020
20	I41874014	E2	7/1/2020	46	I41874040	J18	7/1/2020
21	I41874015	E3	7/1/2020	47	I41874041	J21	7/1/2020
22	I41874016	E4	7/1/2020	48	I41874042	J22	7/1/2020
23	I41874017	E5	7/1/2020	49	I41874043	J23	7/1/2020
24	I41874018	E6	7/1/2020	50	I41874044	J24	7/1/2020
25	I41874019	G1	7/1/2020	51	I41874045	J25	7/1/2020
26	I41874020	G2	7/1/2020	52	I41874046	J26	7/1/2020

The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision
based on the parameters provided by Wheeler - Waverly.
Truss Design Engineer's Name: Johnson, Andrew
My license renewal date for the state of Missouri is December 31, 2021.
Missouri COA: 001193

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.





RE: 400393 - Lot 18 HT

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name:
Lot/Block:
Address:
City, County:

Subdivision:

State:

No.	Seal#	Truss Name	Date
53	I41874047	J27	7/1/2020
54	I41874048	J28	7/1/2020
55	I41874049	J29	7/1/2020
56	I41874050	J30	7/1/2020
57	I41874051	J31	7/1/2020
58	I41874052	J32	7/1/2020
59	I41874053	J33	7/1/2020
60	I41874054	J34	7/1/2020
61	I41874055	J35	7/1/2020
62	I41874056	J36	7/1/2020
63	I41874057	J37	7/1/2020
64	I41874058	J38	7/1/2020
65	I41874059	J39	7/1/2020
66	I41874060	J41	7/1/2020
67	I41874061	J42	7/1/2020
68	I41874062	J43	7/1/2020
69	I41874063	J44	7/1/2020
70	I41874064	J45	7/1/2020
71	I41874065	J46	7/1/2020
72	I41874066	J47	7/1/2020
73	I41874067	J48	7/1/2020
74	I41874068	J49	7/1/2020
75	I41874069	K1	7/1/2020
76	I41874070	K2	7/1/2020
77	I41874071	K3	7/1/2020
78	I41874072	LAY1	7/1/2020
79	I41874073	LAY2	7/1/2020
80	I41874074	LAY3	7/1/2020
81	I41874075	LAY4	7/1/2020
82	I41874076	LAY5	7/1/2020
83	I41874077	LAY6	7/1/2020
84	I41874078	LAY7	7/1/2020
85	I41874079	LAY8	7/1/2020
86	I41874080	LAY9	7/1/2020
87	I41874081	R1	7/1/2020
88	I41874082	V1	7/1/2020
89	I41874083	V2	7/1/2020
90	I41874084	V3	7/1/2020


Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873995
400393	A1	Hip Girder	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:06 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-oOQjzbrsjZWj1dEyZCLpeootKi8RGqtACwyOKyz11RB

Job Reference (optional)



Scale = 1:26.5

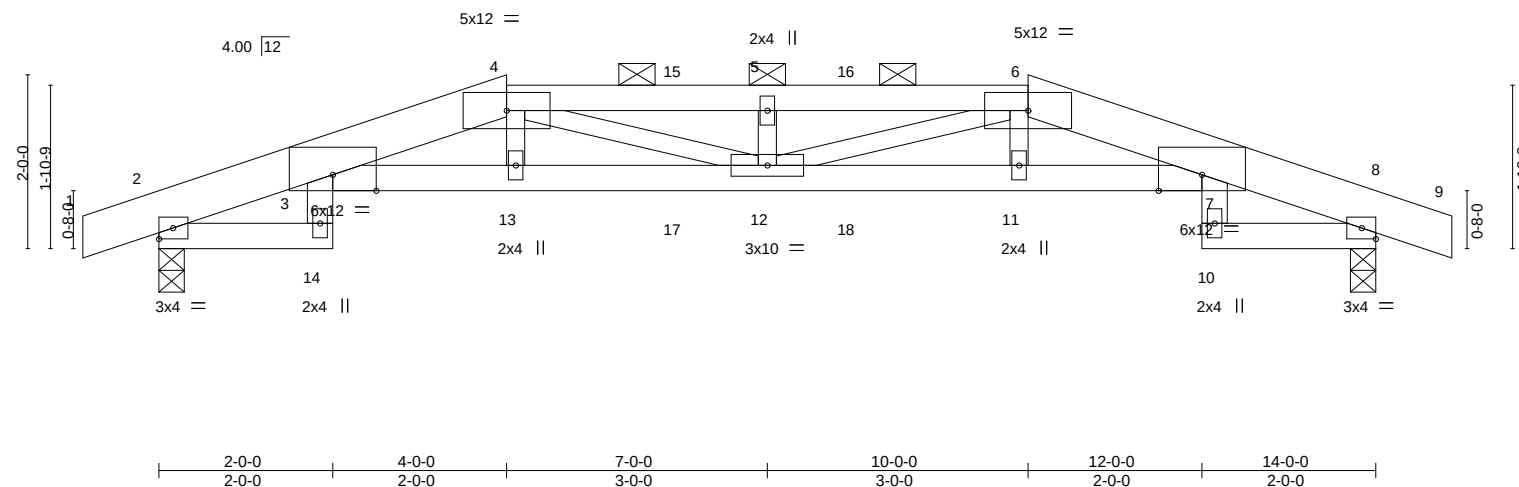

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.66	Vert(LL)	-0.23	12	>720	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.60	Vert(CT)	-0.41	12	>400	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.18	Horz(CT)	0.26	8	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.18	12	>913	240	Weight: 55 lb	FT = 10%

LUMBER-

TOP CHORD 2x6 SP DSS *Except*
4-6: 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
3-7: 2x4 SPF 2100F 1.8E
WEBS 2x3 SPF No.2 *Except*
3-14,7-10: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-3 oc purlins, except 2-0-0 oc purlins (2-7-14 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 8=0-3-8
Max Horz 2=28(LC 33)
Max Uplift 2=-225(LC 4), 8=-225(LC 5)
Max Grav 2=1046(LC 1), 8=1046(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-466/106, 3-4=-3358/613, 4-5=-3809/678, 5-6=-3809/678, 6-7=-3358/601, 7-8=-466/103
BOT CHORD 3-13=-586/3368, 12-13=-580/3366, 11-12=-547/3366, 7-11=-553/3368
WEBS 4-12=-91/534, 6-12=-90/534

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 225 lb uplift at joint 2 and 225 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 84 lb down and 54 lb up at 4-0-0, 84 lb down and 54 lb up at 6-0-0, and 84 lb down and 54 lb up at 8-0-0, and 84 lb down and 54 lb up at 10-0-0 on top chord, and 234 lb down and 70 lb up at 4-0-0, 38 lb down at 6-0-0, and 38 lb down at 8-0-0, and 234 lb down and 70 lb up at 9-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	A1	Hip Girder	1	1	I41873995
Job Reference (optional)					

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-4=-70, 4-6=-70, 6-9=-70, 2-14=-20, 3-7=-20, 8-10=-20

Concentrated Loads (lb)

Vert: 4=-43(F) 6=-43(F) 13=-234(F) 11=-234(F) 15=-43(F) 16=-43(F) 17=-38(F) 18=-38(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873996
400393	A2	Hip	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:08 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-knYUOHt6FBmQGxOLgdNHkDuCwWqVkmWSgERVPrz11R9

Job Reference (optional)

-0-10-8	2-0-0	6-0-0	8-0-0	12-0-0	14-0-0	14-10-8
0-10-8	2-0-0	4-0-0	2-0-0	4-0-0	2-0-0	0-10-8

Scale = 1:26.5

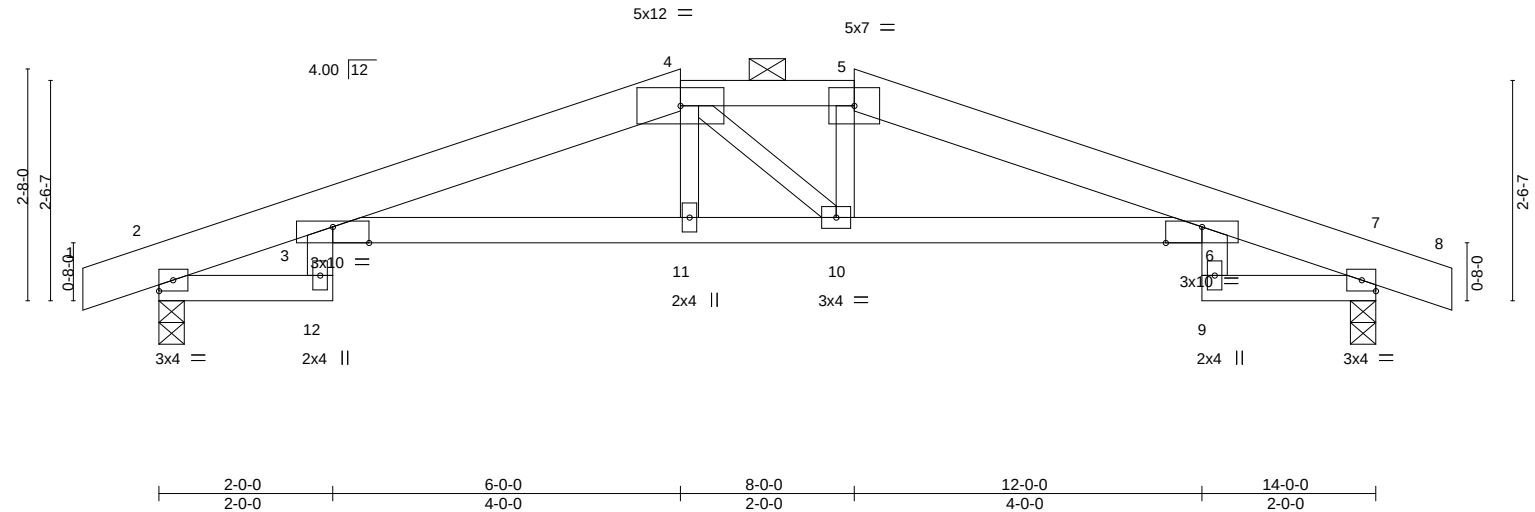

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.72	Vert(LL)	-0.15	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.57	Vert(CT)	-0.27				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.05	Horz(CT)	0.23				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.11	Weight: 50 lb		FT = 10%	

LUMBER-

TOP CHORD 2x6 SPF No.2 *Except*
4-5: 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
3-12,6-9: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-3 oc purlins, except
2-0-0 oc purlins (4-11-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 7=0-3-8
Max Horz 2=-40(LC 9)
Max Uplift 2=-141(LC 4), 7=-141(LC 5)
Max Grav 2=688(LC 1), 7=688(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-295/69, 3-4=-1404/195, 4-5=-1353/196, 5-6=-1404/182, 6-7=-295/63
BOT CHORD 3-11=-152/1353, 10-11=-149/1352, 6-10=-121/1353

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 141 lb uplift at joint 2 and 141 lb uplift at joint 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873997
400393	A3	Roof Special	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:09 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-Cz5sbck?UuHu4zXEKvWGRQNMvAjTDVcuuA2xHz11R8

0-10-8	2-0-0	7-0-0	12-0-0	14-0-0	14-10-8
0-10-8	2-0-0	5-0-0	5-0-0	2-0-0	0-10-8

Scale = 1:25.7

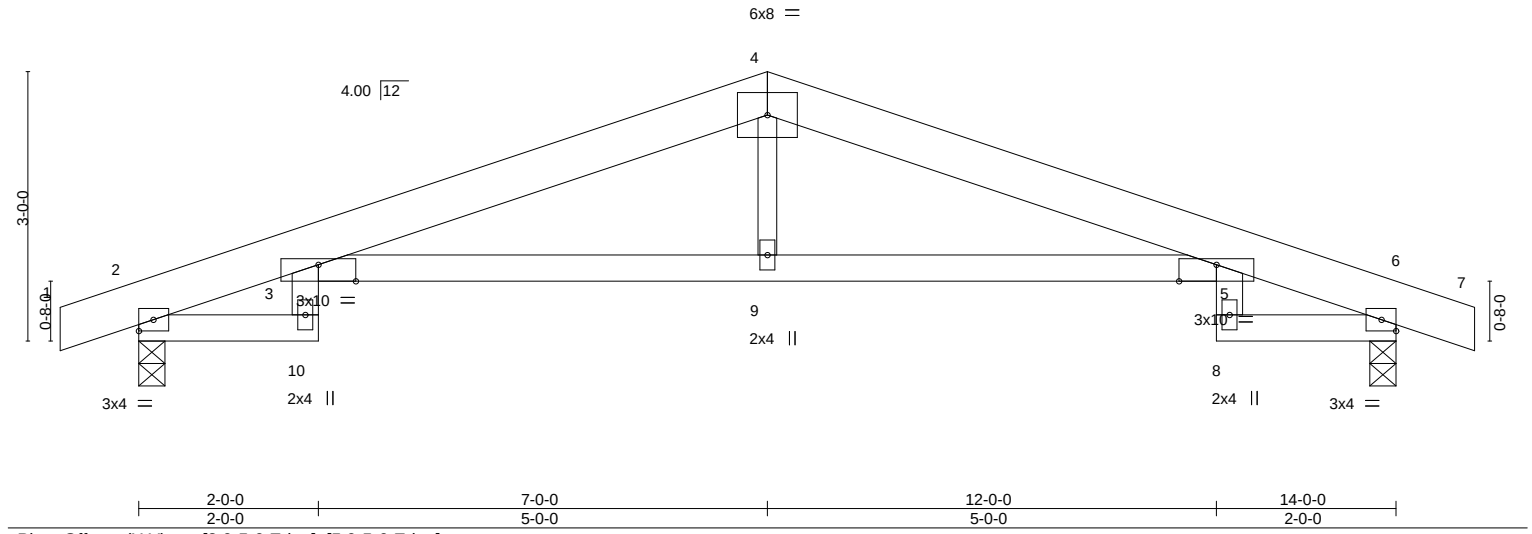


Plate Offsets (X,Y)--		[3:0-5-0,Edge], [5:0-5-0,Edge]							
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	L/defl	L/d
TCLL 25.0		Plate Grip DOL	1.15	TC 0.74		Vert(LL)	-0.16 3-9	>999	360
TCDL 10.0		Lumber DOL	1.15	BC 0.57		Vert(CT)	-0.30 3-9	>548	240
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.06		Horz(CT)	0.25 6	n/a	n/a
BCDL 10.0		Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.12 3-9	>999	240
						PLATES	GRIP		
						MT20	197/144		
						Weight: 49 lb		FT = 10%	

LUMBER-

TOP CHORD 2x6 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 4-9: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-10-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 6=0-3-8
 Max Horz 2=46(LC 8)
 Max Uplift 2=-134(LC 4), 6=-134(LC 5)
 Max Grav 2=688(LC 1), 6=688(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-295/70, 3-4=-1337/145, 4-5=-1337/160, 5-6=-294/59
 BOT CHORD 3-9=-100/1278, 5-9=-100/1278

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 134 lb uplift at joint 2 and 134 lb uplift at joint 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873998
400393	A4	Roof Special	2	1		


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:09 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-Cz5sbcuk?UuHu4zXEKvWGRQNFvAftDVcuuA2xHz11R8

-0-10-8	2-0-0	7-0-0	12-0-0	13-11-8
0-10-8	2-0-0	5-0-0	5-0-0	1-11-8

Scale: 1/2"=1'

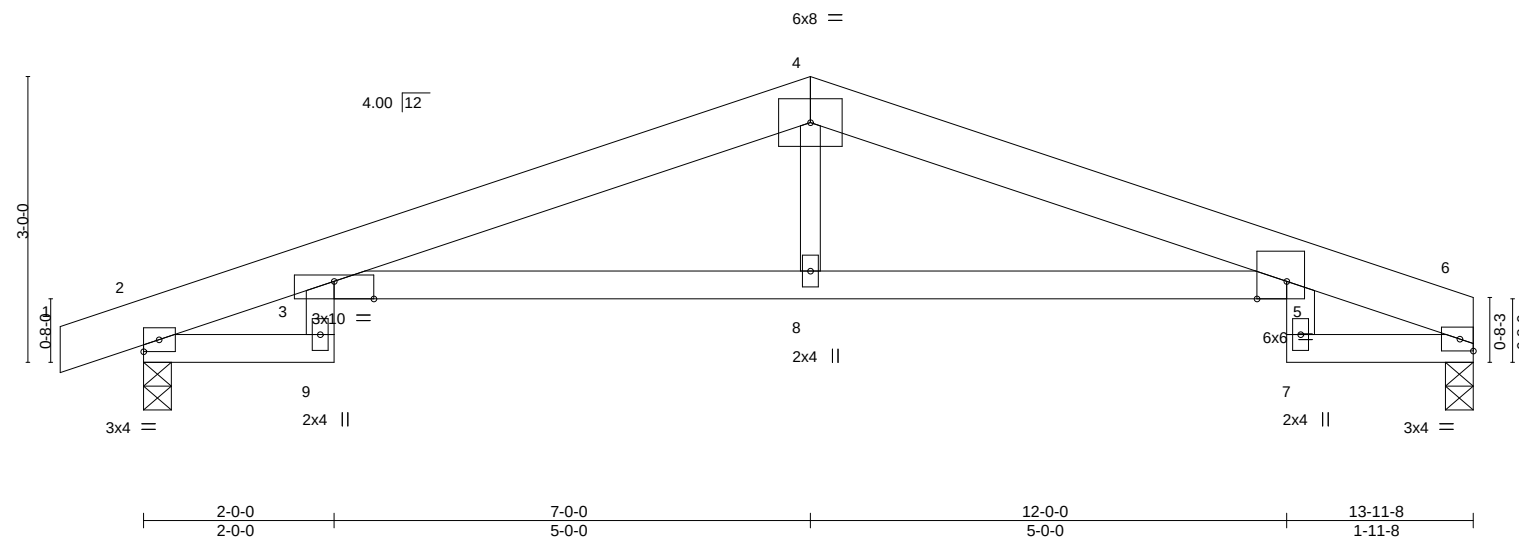

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.75	Vert(LL)	-0.16	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.57	Vert(CT)	-0.30				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.06	Horz(CT)	0.26				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.12	Weight: 47 lb		FT = 10%	

LUMBER-

TOP CHORD 2x6 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2 *Except*
4-8: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-3 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=0-3-8, 2=0-3-8
Max Horz 2=46(LC 12)
Max Uplift 6=-89(LC 5), 2=-134(LC 4)
Max Grav 6=612(LC 1), 2=689(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-295/70, 3-4=-1341/152, 4-5=-1340/161, 5-6=-299/59
BOT CHORD 3-8=-102/1281, 5-8=-102/1281

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 89 lb uplift at joint 6 and 134 lb uplift at joint 2.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873999
400393	B1	Hip Girder	1	1		


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:12 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-cYn?EewdlPGslYi6vSSDu32uF76BgLI2asPjYcz11R5

1-4-8	5-6-8	12-3-8	19-2-4	26-6-12	33-9-8	39-4-0	40-8-8
1-4-8	5-6-8	6-9-0	6-10-12	7-4-8	7-2-12	5-6-8	1-4-8

Scale = 1:70.8

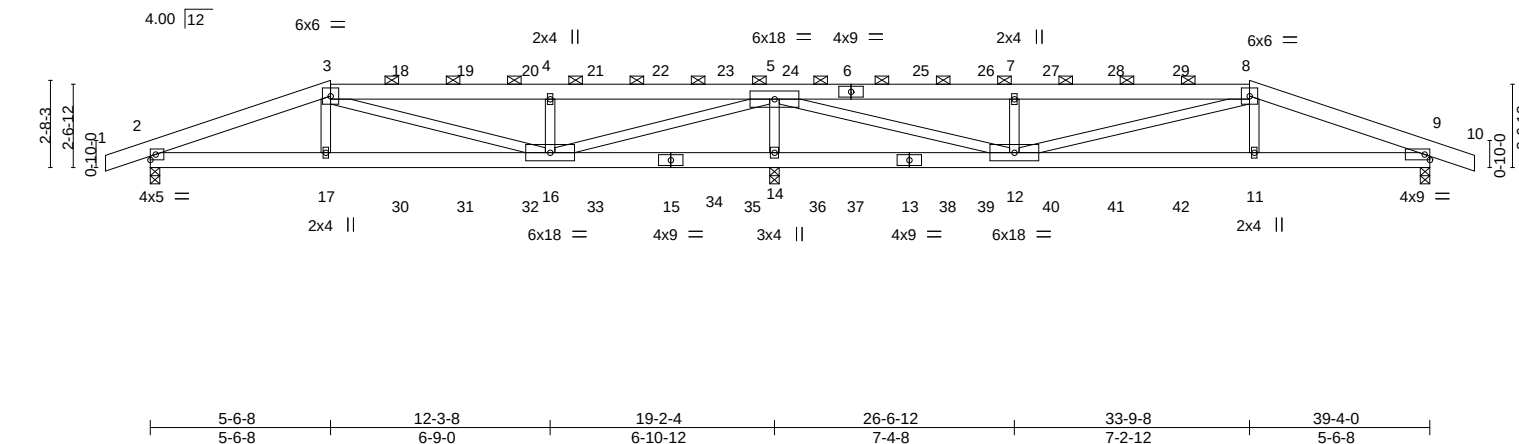

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.76	Vert(LL)	-0.14 11-12	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.90	Vert(CT)	-0.28 11-12	>868	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.96	Horz(CT)	0.04 9	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.10 11-12	>999	240		
								Weight: 193 lb	FT = 10%

LUMBER-

TOP CHORD 2x6 SPF No.2
 BOT CHORD 2x6 SPF No.2 *Except*
 13-15: 2x6 SP 2400F 2.0E
 WEBS 2x4 SPF No.2 *Except*
 5-12,8-12: 2x4 SPF 2100F 1.8E

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-5 oc purlins, except 2-0-0 oc purlins (3-10-3 max.): 3-8.
 BOT CHORD Rigid ceiling directly applied or 5-3-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 14=0-3-8, 9=0-3-8
 Max Horz 2=40(LC 8)
 Max Uplift 2=-252(LC 4), 14=-411(LC 4), 9=-264(LC 5)
 Max Grav 2=1280(LC 21), 14=3729(LC 1), 9=1370(LC 22)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2647/366, 3-4=-1820/256, 4-5=-1816/255, 5-7=-2236/309, 7-8=-2240/311, 8-9=-2904/397
 BOT CHORD 2-17=-309/2396, 16-17=-311/2360, 14-16=-1934/265, 12-14=-1934/265, 11-12=-310/2600, 9-11=-308/2636
 WEBS 3-17=0/579, 3-16=-585/137, 4-16=-791/266, 5-16=-465/3896, 5-14=-3275/545, 5-12=-502/4316, 7-12=-872/290, 8-12=-392/121, 8-11=0/597

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 252 lb uplift at joint 2, 411 lb uplift at joint 14 and 264 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 120 lb down and 55 lb up at 5-6-8, 104 lb down and 55 lb up at 7-8-0, 104 lb down and 55 lb up at 9-8-0, 104 lb down and 55 lb up at 11-8-0, 104 lb down and 55 lb up at 13-8-0, 104 lb down and 55 lb up at 15-8-0, 104 lb down and 55 lb up at 17-8-0, 104 lb down and 55 lb up at 19-8-0, 104 lb down and 55 lb up at 21-8-0, 104 lb down and 55 lb up at 23-8-0, 104 lb down and 55 lb up at 25-8-0, 104 lb down and 55 lb up at 27-8-0, 104 lb down and 55 lb up at 29-8-0, and 104 lb down and 55 lb up at 31-8-0, and 120 lb down and 55 lb up at 33-9-8 on top chord, and 331 lb down and 87 lb up at 5-6-8, 62 lb down at 7-8-0, 62 lb down at 9-8-0, 62 lb down at 11-8-0, 62 lb down at 13-8-0, 62 lb down at 15-8-0, 62 lb down at 17-8-0, 62 lb down at 19-8-0, 62 lb down at 21-8-0, 62 lb down at 23-8-0, 62 lb down at 25-8-0, 62 lb down at 27-8-0, 62 lb down at 29-8-0, and 62 lb down at 31-8-0, and 331 lb down and 87 lb up at 33-8-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.



Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41873999
400393	B1	Hip Girder	1	1	Job Reference (optional)	

NOTES-
10) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-70, 3-8=-70, 8-10=-70, 2-9=-20
Concentrated Loads (lb)
Vert: 3=-97(B) 6=-97(B) 17=-331(B) 8=-97(B) 11=-331(B) 18=-97(B) 19=-97(B) 20=-97(B) 21=-97(B) 22=-97(B) 23=-97(B) 24=-97(B) 25=-97(B) 26=-97(B)
27=-97(B) 28=-97(B) 29=-97(B) 30=-41(B) 31=-41(B) 32=-41(B) 33=-41(B) 34=-41(B) 35=-41(B) 36=-41(B) 37=-41(B) 38=-41(B) 39=-41(B) 40=-41(B) 41=-41(B)
42=-41(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874000
400393	B2	Hip	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:13 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH7NM-4ILNR_xF3jOjNiHJTazSRhb3sXZiPt5CpW8G42z11R4

1-4-8	7-6-8	13-3-12	19-2-4	25-6-8	31-9-8	39-4-0	40-8-8
1-4-8	7-6-8	5-9-4	5-10-8	6-4-4	6-3-0	7-6-8	1-4-8

Scale = 1:70.8

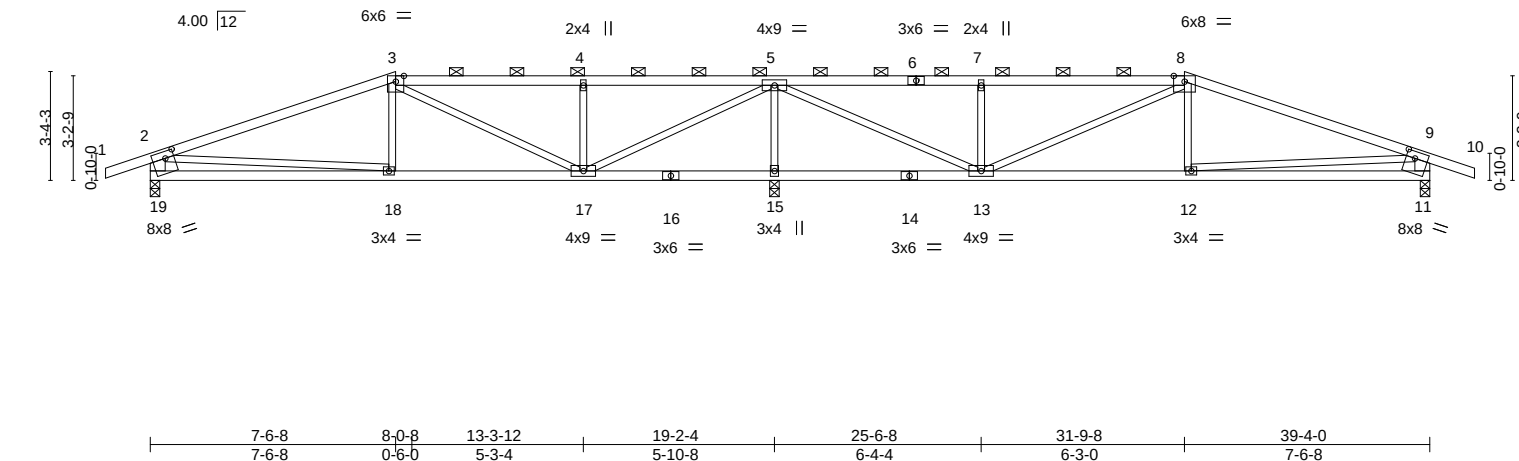


Plate Offsets (X,Y)-- [11:0-3-4,0-2-8], [19:0-3-4,0-2-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.71	Vert(LL)	-0.07 11-12 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.44	Vert(CT)	-0.16 11-12 >999 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.60	Horz(CT)	0.02 11 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05 12-13 >999 240	Weight: 139 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-19,9-11: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-9 oc purlins, except end verticals, and 2-0-0 oc purlins (5-11-3 max.): 3-8.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 19=0-3-8, 15=0-3-8, 11=0-3-8
Max Horz 19=31(LC 12)
Max Uplift 19=-206(LC 4), 15=-350(LC 4), 11=-217(LC 5)
Max Grav 19=830(LC 21), 15=2025(LC 1), 11=880(LC 22)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1135/212, 3-4=-624/185, 4-5=-622/183, 5-7=-792/223, 7-8=-794/225,
8-9=-1264/240, 2-19=-762/247, 9-11=-811/257
BOT CHORD 18-19=-207/580, 17-18=-145/990, 15-17=-824/175, 13-15=-824/175, 12-13=-146/1113,
11-12=-180/588
WEBS 2-18=0/474, 3-18=0/254, 3-17=-430/56, 4-17=-431/175, 5-17=-287/1583,
5-15=-1877/420, 5-13=-314/1749, 7-13=-478/194, 8-13=-370/48, 8-12=0/253,
9-12=-5/586

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 206 lb uplift at joint 19, 350 lb uplift at joint 15 and 217 lb uplift at joint 11.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874001
400393	B3	Hip	1	1		


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:14 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-ZxvlfKxtq1Wa_ssV1tUhZU8H8wqC8JSL2AupcVz11R3

1-4-8	4-9-13	9-6-8	14-3-12	19-2-4	24-6-8	29-9-8	34-6-3	39-4-0
1-4-8	4-9-13	4-8-11	4-9-4	4-10-8	5-4-4	5-3-0	4-8-11	4-9-13

Scale = 1:70.6

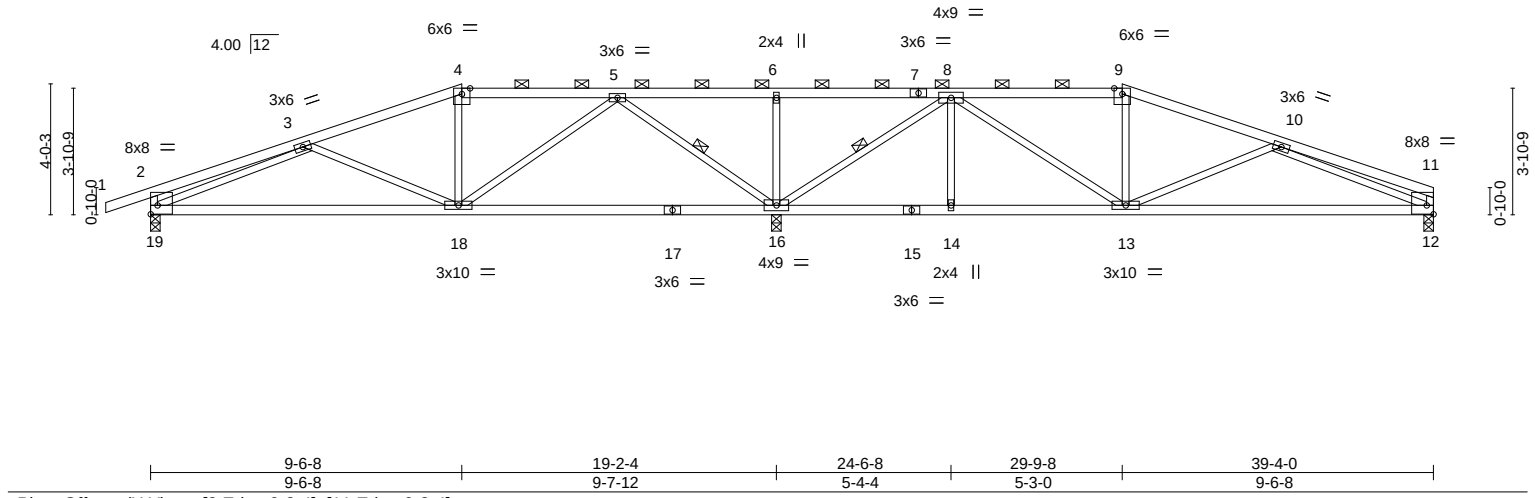

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.54	Vert(LL)	-0.20 12-13	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.74	Vert(CT)	-0.41 12-13	>588	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.66	Horz(CT)	0.04 12	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.04 13	>999	240	Weight: 140 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-7-13 oc purlins, except end verticals, and 2-0-0 oc purlins (5-11-3 max.): 4-9.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 5-16, 8-16

REACTIONS.

(size) 16=0-3-8, 19=0-3-8, 12=0-3-8
Max Horz 19=52(LC 12)
Max Uplift 16=-371(LC 4), 19=-186(LC 4), 12=-133(LC 5)
Max Grav 16=2156(LC 1), 19=791(LC 21), 12=734(LC 22)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-303/20, 3-4=-822/138, 4-5=-734/155, 5-6=-139/1001, 6-8=-139/1001,
8-9=-865/197, 9-10=-961/183, 10-11=-341/10, 2-19=-342/128
BOT CHORD 18-19=-230/1028, 14-16=-14/346, 13-14=-14/346, 12-13=-259/1166
WEBS 3-18=-339/210, 5-18=-60/733, 5-16=-1326/303, 6-16=-365/146, 8-16=-1490/310,
8-13=-81/671, 10-13=-344/212, 3-19=-873/253, 10-12=-976/304

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 371 lb uplift at joint 16, 186 lb uplift at joint 19 and 133 lb uplift at joint 12.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874002
400393	B4	Half Hip	1	1		
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:15 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-17T7sgyVbKeRc?Qhbb?wWigM1K9htlmUHqdN9xz11R2

-1-4-8	5-2-6	11-6-8	16-0-0
1-4-8	5-2-6	6-4-2	4-5-8

Scale = 1:30.6

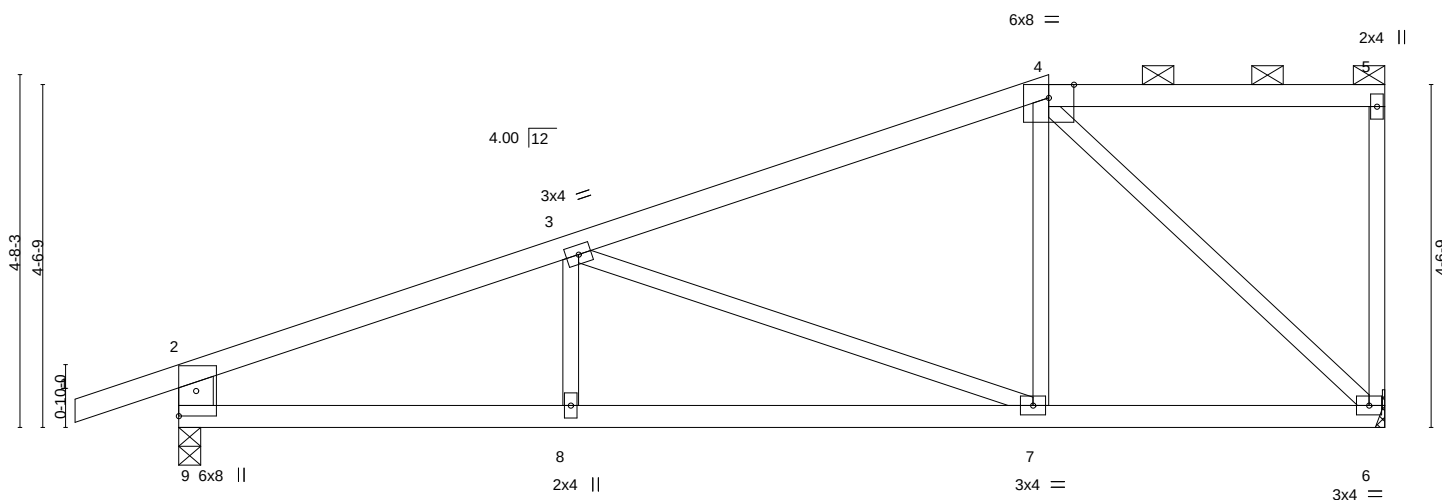

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.86	Vert(LL)	-0.12	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.79	Vert(CT)	-0.22				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.72	Horz(CT)	0.02				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.09	Weight: 58 lb		FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-9: 2x6 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-7 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=Mechanical, 9=0-3-8
 Max Horz 9=197(LC 5)
 Max Uplift 6=-139(LC 4), 9=-192(LC 4)
 Max Grav 6=699(LC 1), 9=823(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1179/202, 3-4=-661/136, 2-9=-713/205
 BOT CHORD 8-9=-205/1043, 7-8=-205/1043, 6-7=-104/558
 WEBS 3-7=-507/170, 4-7=0/371, 4-6=-778/153

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 139 lb uplift at joint 6 and 192 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874003
400393	B5	Roof Special Girder	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:16 2020 Page 1
ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-VK0V30z8MemIE9?t8IX92vDaqkX7c9FeVUNwhNz11R1

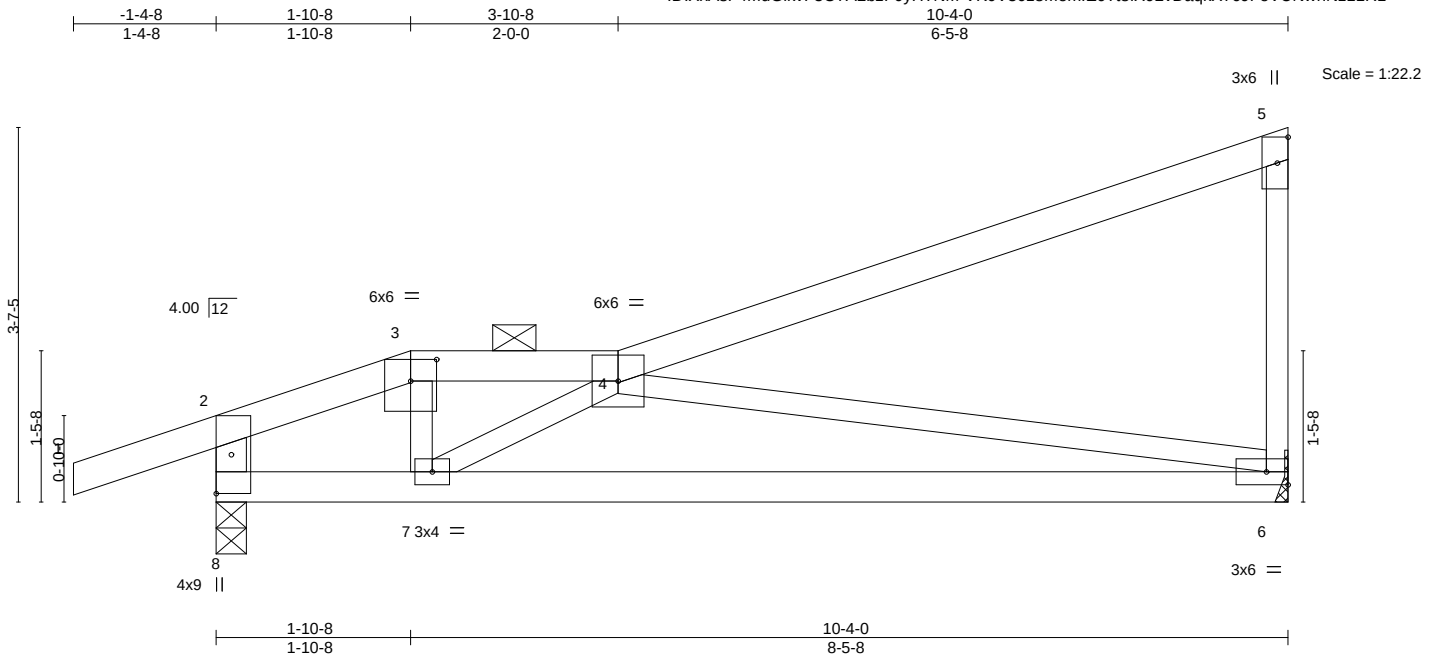


Plate Offsets (X,Y)-- [3:0-3:0,0-2-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.66	Vert(LL)	-0.15	6-7	>812	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.65	Vert(CT)	-0.31	6-7	>388	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.96	Horz(CT)	0.01	6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.04	6-7	>999	240	Weight: 36 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins, except end verticals, and 2'-0" oc purlins (6'-0" max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS.

(size) 6=Mechanical, 8=0-3-8
Max Horz 8=153(LC 5)
Max Uplift 6=-97(LC 8), 8=-161(LC 4)
Max Grav 6=444(LC 1), 8=561(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-585/44, 3-4=-509/45, 2-8=-513/118
BOT CHORD 7-8=-82/481, 6-7=-239/919
WEBS 3-7=-16/332, 4-7=-484/237, 4-6=-893/270

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 97 lb uplift at joint 6 and 161 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 109 lb down and 78 lb up at 1'-10" on top chord, and 14 lb down and 9 lb up at 1'-10" on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 3-4=-70, 4-5=-70, 6-8=-20



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	B5	Roof Special Girder	1	1	I41874003
Job Reference (optional)					

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 7=9(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874004
400393	B6	Roof Special	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:17 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-zWauHM_m7yu9rJa4i02Ob7moE8yrLltnk86UDqz11R0

-1-4-8	3-10-8	5-10-8	10-4-0
1-4-8	3-10-8	2-0-0	4-5-8

2x4 || Scale = 1:22.2

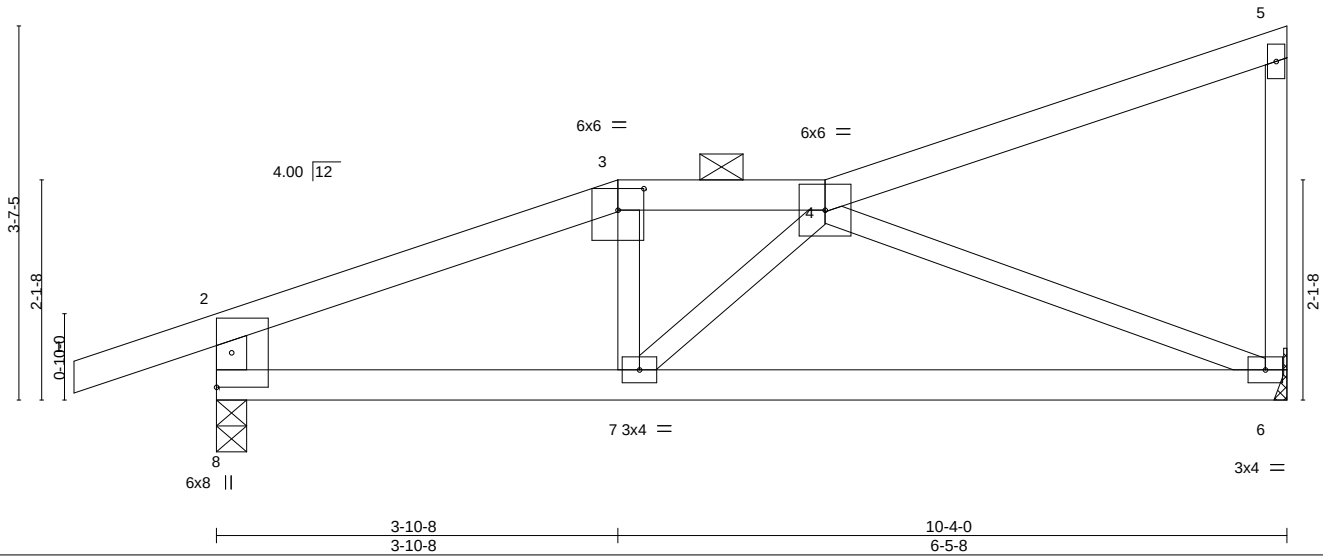


Plate Offsets (X,Y)-- [3:0-3-0,0-2-8]											
LOADING (psf)		SPACING- 2-0-0		CSI.	DEFL. in (loc) l/defl L/d				PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC 0.49	Vert(LL)	-0.06	6-7	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC 0.36	Vert(CT)	-0.13	6-7	>901	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB 0.36	Horz(CT)	0.01	6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.03	6-7	>999	240	Weight: 36 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=Mechanical, 8=0-3-8
Max Horz 8=153(LC 5)
Max Uplift 6=-93(LC 8), 8=-144(LC 4)
Max Grav 6=446(LC 1), 8=568(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-638/87, 3-4=-547/96, 2-8=-502/154
BOT CHORD 7-8=-92/541, 6-7=-127/590
WEBS 4-6=-620/171

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Provide adequate drainage to prevent water ponding.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 93 lb uplift at joint 6 and 144 lb uplift at joint 8.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874005
400393	C1	Hip Girder	1	1		
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:18 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-Ri8GUh?OuF00TT9GGjZd8KI?cYK?4HJxzos1lGz11R?



Scale = 1:19.0

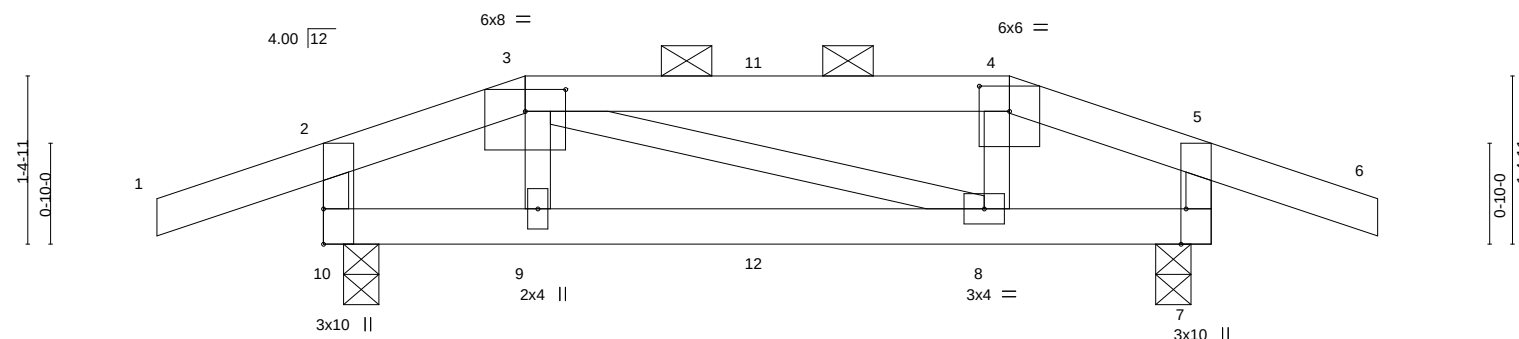

0-2-0	1-8-0	5-8-0	7-2-0	7-4-0
0-2-0	1-6-0	4-0-0	1-6-0	0-2-0

Plate Offsets (X,Y)-- [3:0-4-0,0-2-3], [4:0-3-0,0-2-8], [7:0-3-8,Edge]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.32	Vert(LL)	-0.03	8-9	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.24	Vert(CT)	-0.05	8-9	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.03	Horz(CT)	0.00	7	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	8-9	>999	240	
								Weight: 25 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 10=0-3-8, 7=0-3-8
Max Horz 10=11(LC 47)
Max Uplift 10=-142(LC 4), 7=-142(LC 5)
Max Grav 10=413(LC 1), 7=413(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-347/83, 3-4=-287/75, 4-5=-348/82, 2-10=-335/132, 5-7=-335/131
BOT CHORD 9-10=-42/303, 8-9=-37/302, 7-8=-43/302

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 142 lb uplift at joint 10 and 142 lb uplift at joint 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 111 lb down and 54 lb up at 1-8-0, and 49 lb down and 12 lb up at 3-8-0, and 111 lb down and 54 lb up at 5-8-0 on top chord, and 11 lb down and 9 lb up at 1-8-0, and 3 lb down and 4 lb up at 3-8-0, and 11 lb down and 9 lb up at 5-7-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 3-4=-70, 4-5=-70, 5-6=-70, 7-10=-20
Concentrated Loads (lb)
Vert: 9=9(F) 8=9(F) 12=4(F)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874006
400393	C2	Common	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:19 2020 Page 1
ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-vuiei1?0fZ9s5dkSqR4sgYrBVxgYpkV4BSbaliz11R_



Scale = 1:15.3

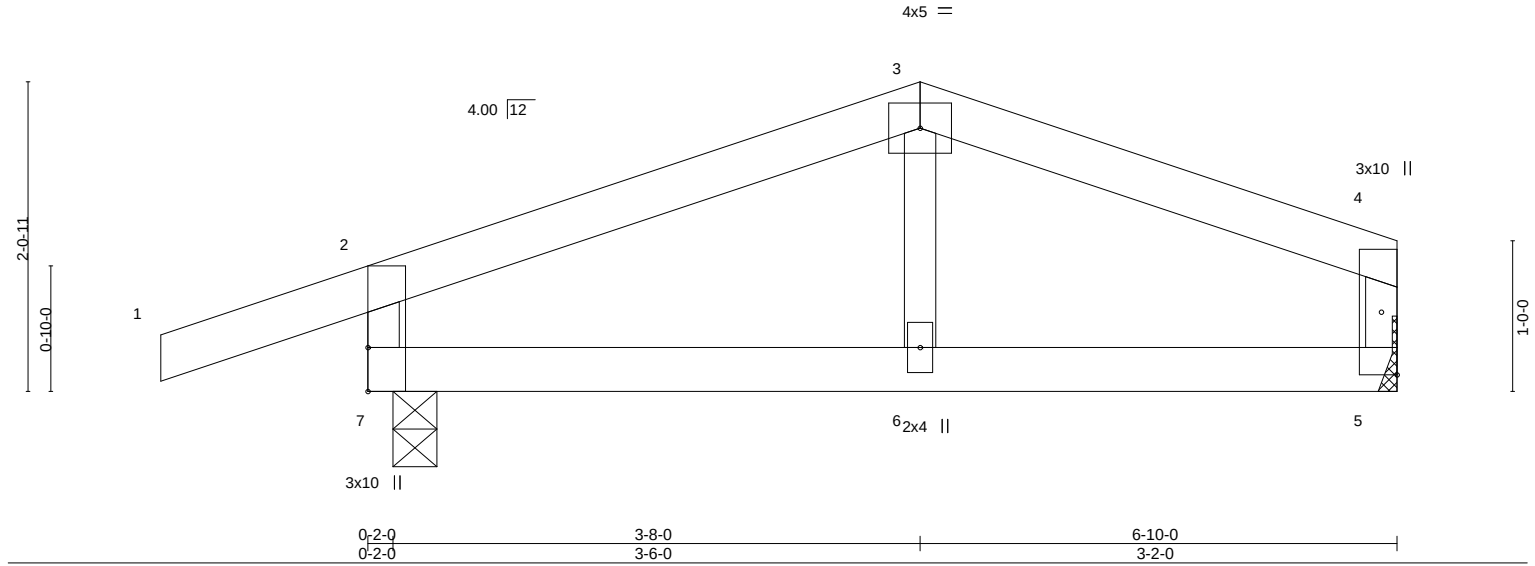

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.31	Vert(LL)	-0.02	6	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.22	Vert(CT)	-0.04	6	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	6	>999	240	Weight: 20 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-3-8, 5=Mechanical
Max Horz 7=27(LC 5)
Max Uplift 7=-113(LC 4), 5=-41(LC 5)
Max Grav 7=413(LC 1), 5=287(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-291/45, 3-4=-282/42, 2-7=-346/131

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 113 lb uplift at joint 7 and 41 lb uplift at joint 5.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	D1	Hip Girder	1	2		I41874007

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:21 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-rHqO7j1GBAPaKwurxr6KlzwO8IGuHV1Nfm4hLbz11Qy

Job Reference (optional)

-1-4-8	6-3-0	12-10-9	19-7-7	26-3-0	31-2-12	32-0-0	33-10-8
1-4-8	6-3-0	6-7-9	6-8-13	6-7-9	4-11-12	0-9-4	1-10-8

Scale = 1:58.4

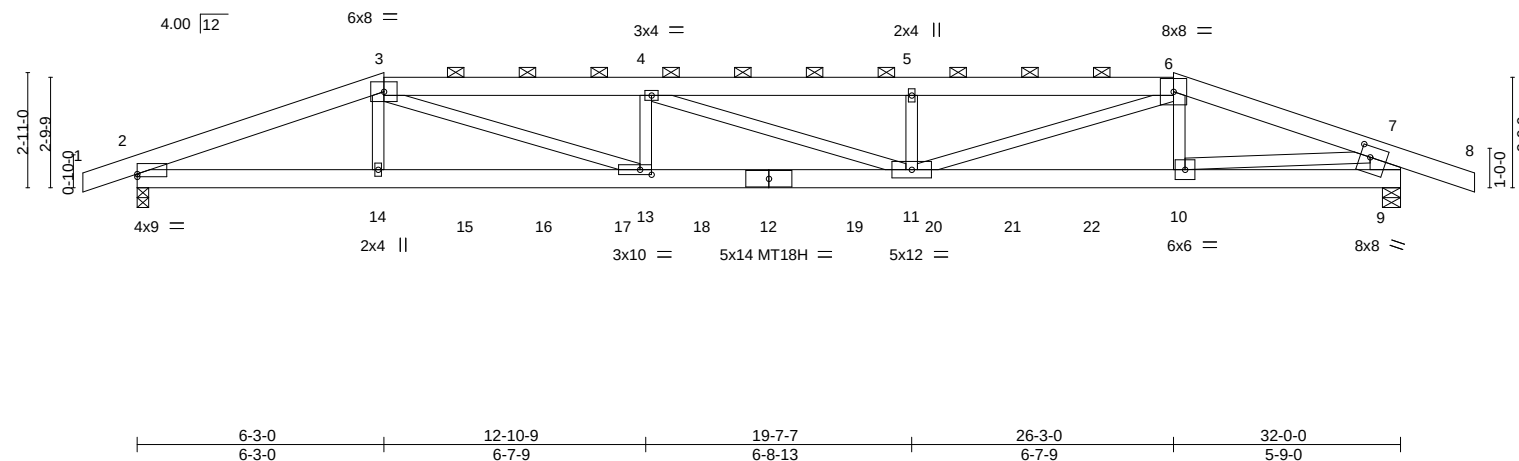


Plate Offsets (X, Y)--		[2:0-0-0,0-0-14], [9:0-3-0,0-3-4], [13:0-3-8,0-1-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.88
TCDL 10.0	Lumber DOL	1.15	BC 0.54
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.60
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S
DEFL.	in (loc)	l/defl	L/d
Vert(LL)	-0.37 11-13	>999	360
Vert(CT)	-0.64 11-13	>591	240
Horz(CT)	0.08 9	n/a	n/a
Wind(LL)	0.23 11-13	>999	240
PLATES	GRIP		
MT20	197/144		
MT18H	244/190		
Weight: 357 lb	FT = 10%		

LUMBER-

TOP CHORD 2x6 SPF No.2
BOT CHORD 2x6 SP 2400F 2.0E
WEBS 2x4 SPF No.2 *Except*
7-9: 2x10 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-5-10 oc purlins, except end verticals, and 2-0-0 oc purlins (4-3-7 max.): 3-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 9=0-5-8
Max Horz 2=-21(LC 24)
Max Uplift 2=-373(LC 4), 9=-393(LC 5)
Max Grav 2=3156(LC 1), 9=3241(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-7795/859, 3-4=-11035/1173, 4-5=-10731/1123, 5-6=-10733/1124, 6-7=-6748/718, 7-9=-3131/411
BOT CHORD 2-14=-759/7183, 13-14=-754/7119, 11-13=-1113/11033, 10-11=-624/6315, 9-10=-138/1451
WEBS 3-14=-93/1045, 3-13=-401/4267, 4-13=-479/132, 4-11=-374/52, 5-11=-556/123, 6-11=-468/4754, 6-10=-149/321, 7-10=-528/4917

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x10 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 373 lb uplift at joint 2 and 393 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	D1	Hip Girder	1	2	I41874007
					Job Reference (optional)

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:21 2020 Page 2
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-rHqO7j1GBAPaKwurxr6KlzwO8IGuHV1Nfm4hLbz11Qy

NOTES-
12) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 610 lb down and 155 lb up at 6-3-0, 239 lb down and 38 lb up at 8-3-12, 239 lb down and 38 lb up at 10-3-12, 239 lb down and 38 lb up at 12-3-12, 239 lb down and 38 lb up at 14-3-12, 239 lb down and 38 lb up at 16-3-0, 239 lb down and 38 lb up at 18-2-4, 239 lb down and 38 lb up at 20-2-4, 239 lb down and 38 lb up at 22-2-4, and 239 lb down and 38 lb up at 24-2-4, and 537 lb down and 132 lb up at 26-2-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-70, 3-6=-70, 6-7=-70, 7-8=-70, 2-9=-20
Concentrated Loads (lb)
Vert: 12=-239(F) 14=-610(F) 10=-537(F) 15=-239(F) 16=-239(F) 17=-239(F) 18=-239(F) 19=-239(F) 20=-239(F) 21=-239(F) 22=-239(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874008
400393	D2	Hip	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:22 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-KTOnK32uyUXRy4T1VZdZiATYj9YF0xnWuQqEt1z11Qx

Job Reference (optional)

1-4-8	4-6-12	8-3-0	16-3-0	24-3-0	32-0-0	33-10-8
1-4-8	4-6-12	3-8-4	8-0-0	8-0-0	7-9-0	1-10-8

Scale = 1:58.4

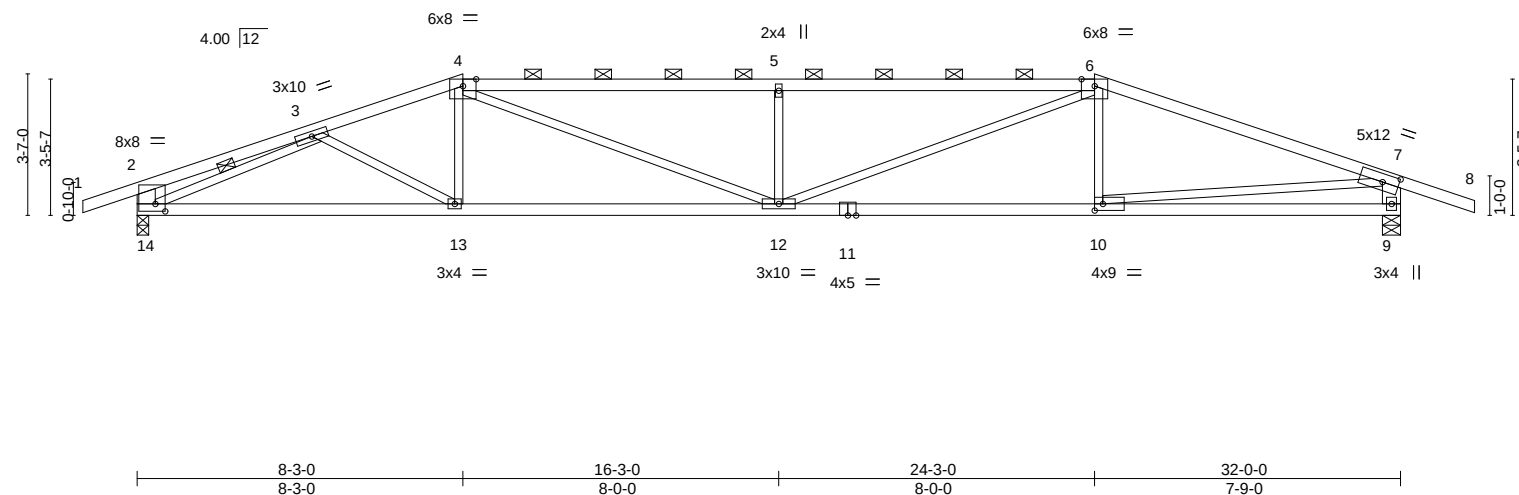

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.95	Vert(LL)	-0.27 12	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.79	Vert(CT)	-0.51 10-12	>744	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.70	Horz(CT)	0.11 9	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.21 12	>999	240	Weight: 113 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-14,7-9: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-10-11 oc purlins, except end verticals, and 2-0-0 oc purlins (2-2-0 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 8-8-11 oc bracing.
WEBS 1 Row at midpt 3-14

REACTIONS.

(size) 14=0-3-8, 9=0-5-8
Max Horz 14=32(LC 8)
Max Uplift 14=-320(LC 4), 9=-341(LC 5)
Max Grav 14=1530(LC 1), 9=1569(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-564/75, 3-4=-2829/506, 4-5=-3671/685, 5-6=-3671/685, 6-7=-2778/468,
2-14=-491/164, 7-9=-1494/379
BOT CHORD 13-14=-445/2470, 12-13=-406/2677, 10-12=-356/2554, 9-10=-133/527
WEBS 3-13=-6/407, 4-12=-260/1199, 5-12=-697/274, 6-12=-282/1332, 3-14=-2221/456,
7-10=-256/2037

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 320 lb uplift at joint 14 and 341 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874009
400393	D3	Hip	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:23 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-ogy9XP2XiofiZE2E3G9oqO0mwZvolMlg63ZoQTz11Qw

Job Reference (optional)

1-4-8	5-2-4	10-3-0	16-3-0	22-3-0	27-3-11	32-0-0	33-10-8
1-4-8	5-2-4	5-0-11	6-0-0	6-0-0	5-0-11	4-8-5	1-10-8

Scale = 1:58.4

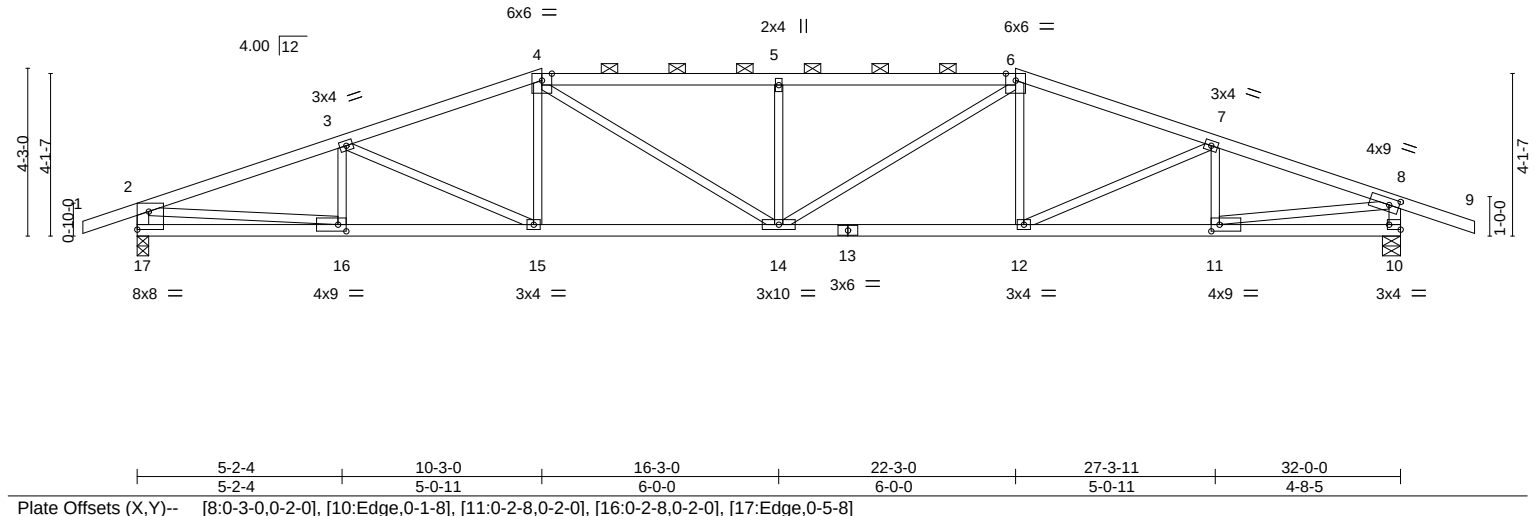


Plate Offsets (X,Y)--		[8:0-3-0,0-2-0], [10:Edge,0-1-8], [11:0-2-8,0-2-0], [16:0-2-8,0-2-0], [17:Edge,0-5-8]
LOADING (psf)	SPACING-	2-0-0
TCLL 25.0	Plate Grip DOL	1.15
TCDL 10.0	Lumber DOL	1.15
BCLL 0.0 *	Rep Stress Incr	YES
BCDL 10.0	Code IRC2018/TPI2014	
CSI.	DEFL.	in (loc) l/defl L/d
TC 0.73	Vert(LL) -0.23	14 >999 360
BC 0.71	Vert(CT) -0.42	14-15 >906 240
WB 0.78	Horz(CT) 0.10	10 n/a n/a
Matrix-S	Wind(LL) 0.18	14 >999 240
PLATES	GRIP	
MT20	197/144	
Weight: 118 lb		FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-17,8-10: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-11-11 oc purlins, except end verticals, and 2-0-0 oc purlins (2-8-3 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 8-10-12 oc bracing.

REACTIONS.

(size) 17=0-3-8, 10=0-5-8
Max Horz 17=45(LC 12)
Max Uplift 17=-310(LC 4), 10=-331(LC 5)
Max Grav 17=1531(LC 1), 10=1570(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2877/491, 3-4=-2727/488, 4-5=-3001/546, 5-6=-3001/546, 6-7=-2645/465,
7-8=-2618/436, 2-17=-1458/333, 8-10=-1505/351
BOT CHORD 16-17=-90/436, 15-16=-438/2667, 14-15=-370/2540, 12-14=-315/2465, 11-12=-349/2428
WEBS 4-15=0/266, 4-14=-150/698, 5-14=-530/206, 6-14=-165/772, 7-11=-310/126,
2-16=-359/2246, 8-11=-377/2275

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 310 lb uplift at joint 17 and 331 lb uplift at joint 10.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	D4	Hip	1	1		I41874010

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:24 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-GsVXII39T5n9BOcQc_g1NbYtayFfUrapLjJLywz11Qv

Job Reference (optional)

1-4-8	8-2-5	12-3-0	20-3-0	24-3-10	32-0-0	33-10-8
1-4-8	8-2-5	4-0-10	8-0-0	4-0-10	7-8-6	1-10-8

Scale = 1:58.4

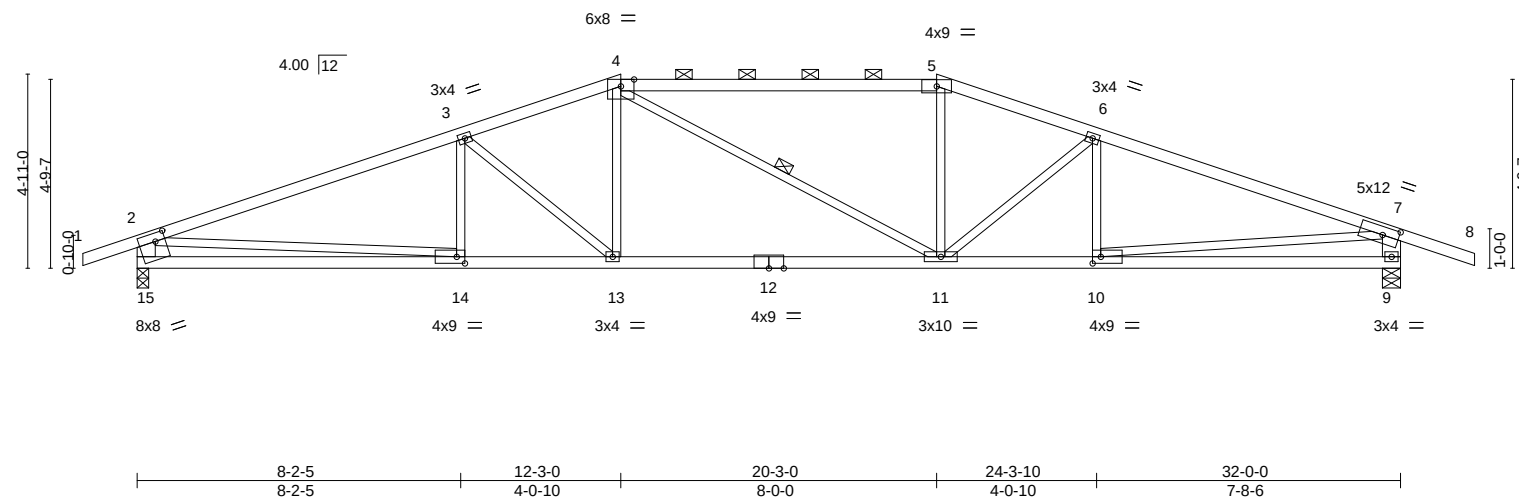


Plate Offsets (X,Y)--		[7:0-4-15,0-2-8], [10:0-2-8,0-2-0], [14:0-2-8,0-2-0], [15:0-3-0,0-2-8]	
LOADING (psf)	SPACING-	CSI.	DEFL.
TCLL 25.0	2-0-0	TC 1.00	in (loc) l/defl L/d
TCDL 10.0	Plate Grip DOL 1.15	BC 0.73	Vert(LL) -0.18 13 >999 360
BCLL 0.0 *	Lumber DOL 1.15	WB 0.68	Vert(CT) -0.44 11-13 >863 240
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.08 9 n/a n/a
	Code IRC2018/TPI2014		Wind(LL) 0.14 13 >999 240
			PLATES GRIP
			MT20 197/144
			Weight: 119 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
4-5: 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-15,7-9: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (2-2-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 9-3-2 oc bracing.
WEBS 1 Row at midpt 4-11

REACTIONS.

(size) 15=0-3-8, 9=0-5-8
Max Horz 15=56(LC 12)
Max Uplift 15=-303(LC 4), 9=-323(LC 5)
Max Grav 15=1530(LC 1), 9=1569(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2868/465, 3-4=-2514/443, 4-5=-2304/424, 5-6=-2468/426, 6-7=-2720/432,
2-15=-1440/348, 7-9=-1483/365
BOT CHORD 14-15=-238/855, 13-14=-393/2626, 11-13=-301/2345, 10-11=-317/2490, 9-10=-104/523
WEBS 3-13=-384/161, 4-13=-30/396, 4-11=-255/182, 5-11=0/370, 6-11=-272/144,
2-14=-175/1775, 7-10=-245/1978

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 303 lb uplift at joint 15 and 323 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874011
400393	D5	HIP	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:25 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-k23vy54nEPv0pYBcAhBGwp54yMazDFFzaN2vUMz11Qu

Job Reference (optional)

-1-4-8	8-2-5	14-3-0	18-3-0	21-11-8
1-4-8	8-2-5	6-0-11	4-0-0	3-8-8

Scale = 1:41.0

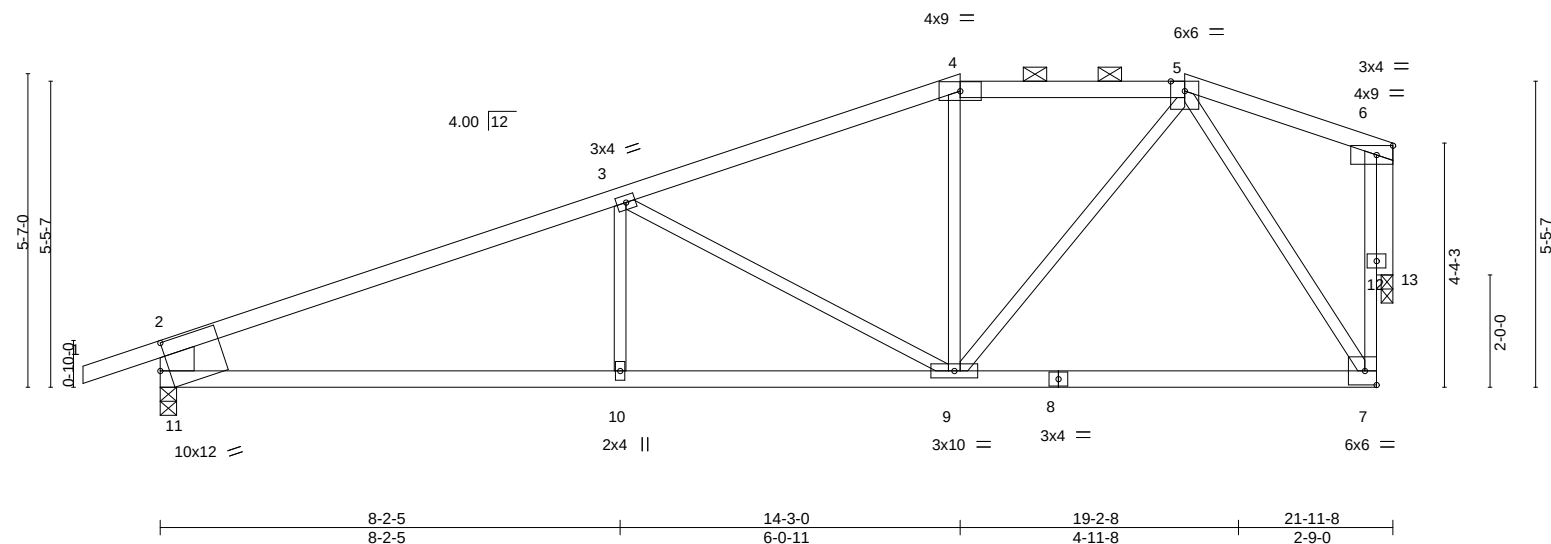

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.89	Vert(LL)	-0.16	MT20	197/144		
TCDL	10.0	Lumber DOL	1.15	BC	0.79	Vert(CT)	-0.29				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.84	Horz(CT)	0.07				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.08	Weight: 81 lb		FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
1-4: 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-11: 2x8 SP 2400F 2.0E
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals, and 2-0-0 oc purlins (5-10-6 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 11=0-3-8, 13=0-2-8
Max Horz 11=110(LC 5)
Max Uplift 11=-86(LC 4), 13=-34(LC 4)
Max Grav 11=1092(LC 1), 13=939(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1700/71, 3-4=-1069/62, 4-5=-954/74, 2-11=-979/132, 7-12=-16/815, 6-12=-16/815
BOT CHORD 10-11=-91/1504, 9-10=-91/1504, 7-9=-39/552
WEBS 3-9=-635/98, 5-9=-17/678, 5-7=-882/66, 6-13=-947/35

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 13 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate at joint(s) 13.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 86 lb uplift at joint 11 and 34 lb uplift at joint 13.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874012
400393	D6	Roof Special	5	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:26 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-CFdHAQ5P?j1tQimokPiVS0dEMmuYylb6o1oS0oz11Qt

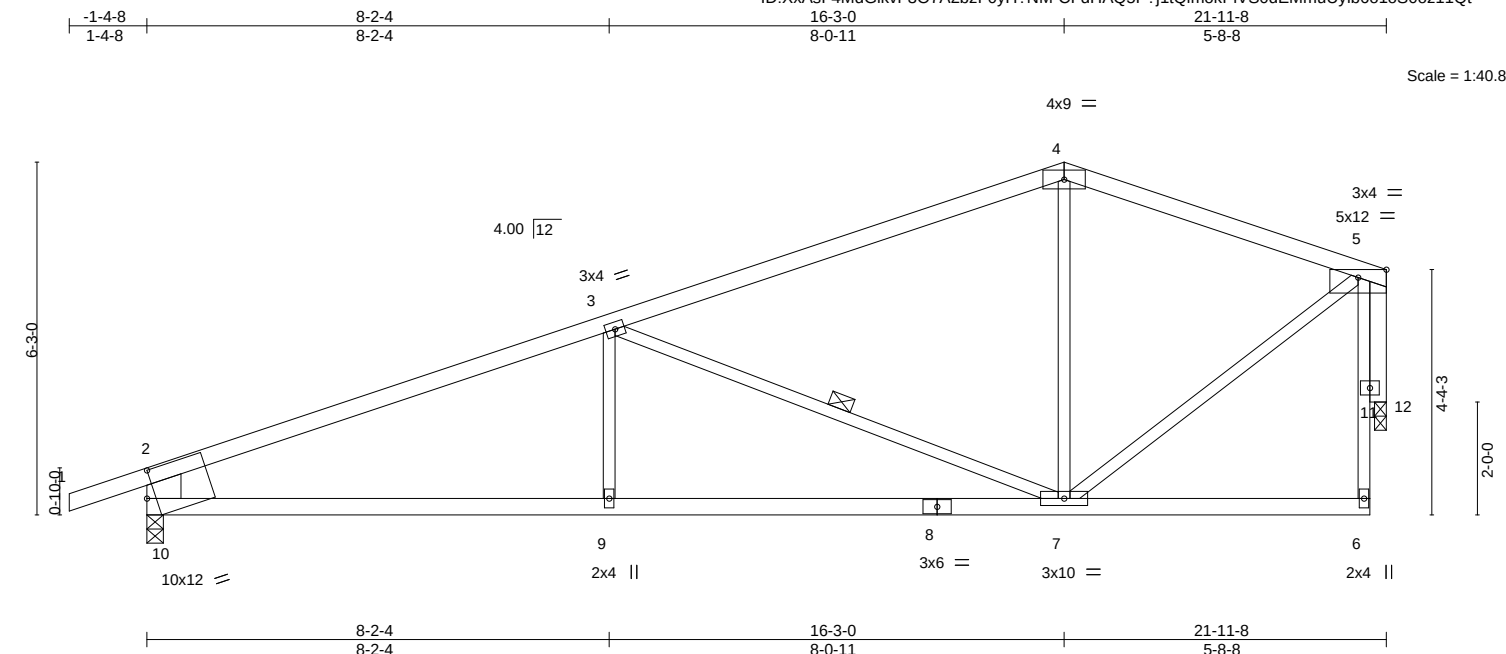


Plate Offsets (X,Y)-- [10:0-1-14,0-5-11]									
LOADING (psf)	SPACING	2-0-0	CSI	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.91	Vert(LL)	-0.19	7-9	>999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.84	Vert(CT)	-0.39	7-9	>665		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.65	Horz(CT)	0.08	12	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.10	7-9	>999	Weight: 79 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E *Except*
4-5: 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10: 2x8 SP 2400F 2.0E
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 3-7

REACTIONS.

(size) 10=0-3-8, 12=0-2-8
Max Horz 10=105(LC 5)
Max Uplift 10=-81(LC 4), 12=-24(LC 4)
Max Grav 10=1092(LC 1), 12=939(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1739/61, 3-4=-853/46, 4-5=-799/57, 2-10=-980/124
BOT CHORD 9-10=-97/1546, 7-9=-97/1546
WEBS 3-9=0/306, 3-7=-915/111, 5-7=-22/812, 5-12=-949/25

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 12 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate at joint(s) 12.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 81 lb uplift at joint 10 and 24 lb uplift at joint 12.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874013
400393	E1	Common	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:27 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-gRBgNm61m09k2rL?I6Dk?EAU0AEAhBqF1hX?ZFz11Qs

-1-4-8	8-2-4	16-3-0	24-3-12	33-0-0	33-10-8
1-4-8	8-2-4	8-0-11	8-0-12	8-8-4	0-10-8

Scale = 1:56.5

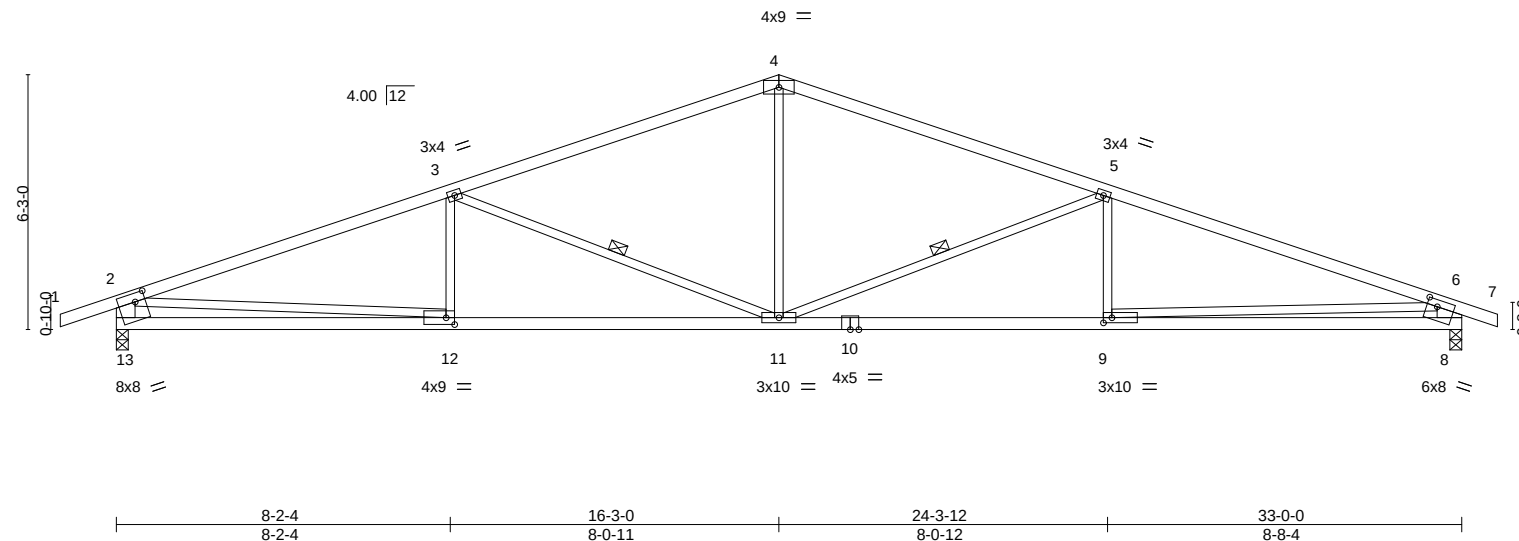


Plate Offsets (X,Y)--		[8:0-3-0,0-2-0], [9:0-2-8,0-1-8], [12:0-2-8,0-2-0], [13:0-3-0,0-2-8]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.60	Vert(LL)	-0.20 9-11 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.87	Vert(CT)	-0.41 11-12 >960 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.71	Horz(CT)	0.10 8 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.14 11-12 >999 240	Weight: 118 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E
 BOT CHORD 2x4 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-13: 2x6 SPF No.2, 6-8: 2x8 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-7 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 9-5-0 oc bracing.
 WEBS 1 Row at midpt 3-11, 5-11

REACTIONS.


(size) 13=0-3-8, 8=0-3-8
 Max Horz 13=-86(LC 13)
 Max Uplift 13=-281(LC 4), 8=-265(LC 5)
 Max Grav 13=1575(LC 1), 8=1542(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-3039/425, 3-4=-2244/327, 4-5=-2244/322, 5-6=-3161/449, 2-13=-1490/323, 6-8=-1455/310
 BOT CHORD 12-13=-232/772, 11-12=-383/2796, 9-11=-342/2906, 8-9=-246/1180
 WEBS 3-11=-903/258, 4-11=-31/830, 5-11=-1007/276, 5-9=0/269, 2-12=-196/2030, 6-9=-107/1728

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 281 lb uplift at joint 13 and 265 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	E2	Hip	1	1		I41874014

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:28 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-8dl2b66fXKHbg?wBrqkzXRjfrRabiQeZPGLHZ5hz11Qr

Job Reference (optional)

1-4-8	8-2-4	15-1-8	17-4-8	24-3-10	33-0-0	33-10-8
1-4-8	8-2-4	6-11-4	2-3-0	6-11-2	8-8-6	0-10-8

Scale = 1:58.4

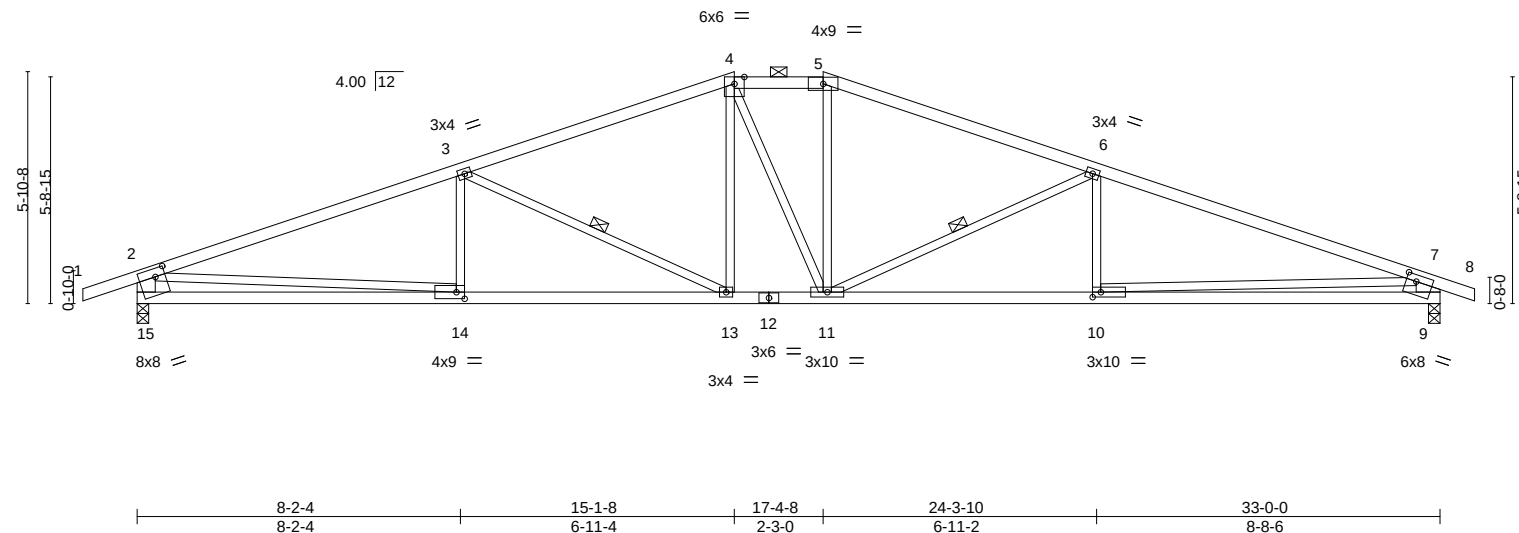


Plate Offsets (X,Y)--		[9:0-3-0,0-2-0], [10:0-2-8,0-1-8], [14:0-2-8,0-2-0], [15:0-3-0,0-2-8]	
LOADING (psf)	SPACING-	CSI.	DEFL.
TCLL 25.0	2-0-0	TC 0.62	in (loc) l/defl L/d
TCDL 10.0	Plate Grip DOL 1.15	BC 0.79	Vert(LL) -0.19 13-14 >999 360
BCLL 0.0 *	Lumber DOL 1.15	WB 0.68	Vert(CT) -0.38 13-14 >999 240
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.10 9 n/a n/a
	Code IRC2018/TPI2014		Wind(LL) 0.14 13-14 >999 240
			PLATES MT20
			GRIP 197/144
			Weight: 124 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E *Except*
4-5: 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-15: 2x6 SPF No.2, 7-9: 2x8 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-0 oc purlins, except end verticals, and 2-0-0 oc purlins (3-9-8 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 9-4-1 oc bracing.
WEBS 1 Row at midpt 3-13, 6-11

REACTIONS.

(size) 15=0-3-8, 9=0-3-8
Max Horz 15=-78(LC 9)
Max Uplift 15=-289(LC 4), 9=-273(LC 5)
Max Grav 15=1575(LC 1), 9=1542(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-3025/439, 3-4=-2353/357, 4-5=-2160/375, 5-6=-2364/364, 6-7=-3146/464,
2-15=-1490/332, 7-9=-1455/319
BOT CHORD 14-15=-240/803, 13-14=-389/2780, 11-13=-208/2151, 10-11=-354/2890, 9-10=-261/1217
WEBS 3-13=-746/217, 4-13=-44/410, 5-11=-37/415, 6-11=-847/234, 6-10=0/261,
2-14=-188/1982, 7-10=-98/1676

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 289 lb uplift at joint 15 and 273 lb uplift at joint 9.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874015
400393	E3	ROOF SPECIAL	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:30 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-50to?o8w3xXjvJ4azEnRdsoyBNFluX5jfm9Zz11Qp

Job Reference (optional)

1-4-8	8-2-4	13-1-8	19-4-8	24-3-10	28-11-0	33-0-0
1-4-8	8-2-4	4-11-3	6-3-0	4-11-2	4-7-6	4-1-0

Scale = 1:59.9

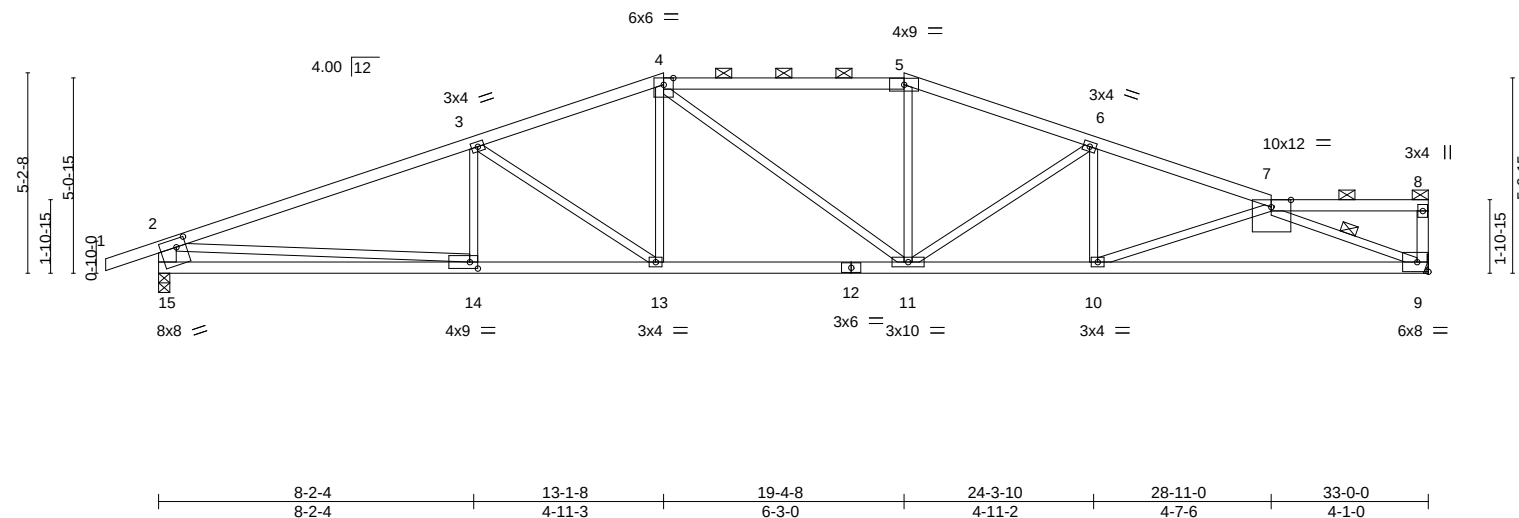


Plate Offsets (X,Y)-- [7:0-6-2,Edge], [14:0-2-8,0-2-0], [15:0-3-0,0-2-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.99	Vert(LL)	-0.22 10-11 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.94	Vert(CT)	-0.44 11-13 >889 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.74	Horz(CT)	0.12 9 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.12 10-11 >999 240	Weight: 122 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
4-5: 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
8-9: 2x4 SPF No.2, 2-15: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (4-2-15 max.): 4-5, 7-8.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 2-2-0 oc bracing: 9-10.
WEBS 1 Row at midpt 7-9

REACTIONS.

(size) 9=Mechanical, 15=0-3-8
Max Horz 15=45(LC 8)
Max Uplift 9=-52(LC 5), 15=-97(LC 4)
Max Grav 9=1465(LC 1), 15=1583(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-3015/103, 3-4=-2570/110, 4-5=-2422/122, 5-6=-2606/114, 6-7=-3094/100, 2-15=-1494/143
BOT CHORD 14-15=-111/848, 13-14=-67/2767, 11-13=-21/2382, 10-11=-84/2893, 9-10=-156/2976
WEBS 3-13=-497/80, 4-13=0/392, 4-11=-186/262, 5-11=0/410, 6-11=-585/55, 6-10=0/272, 7-9=-3129/178, 2-14=0/1925

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 52 lb uplift at joint 9 and 97 lb uplift at joint 15.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	E4	ROOF SPECIAL	1	1		I41874016
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:31 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-ZCQAD89YqFfAXTfmXylg94L5YncHdzAryJVDi0z11Qo

1-4-8	2-9-8	6-11-8	11-1-8	15-6-0	21-4-8	26-11-0	33-0-0
1-4-8	2-9-8	4-2-0	4-2-0	4-4-8	5-10-8	5-6-8	6-1-0

Scale = 1:62.4

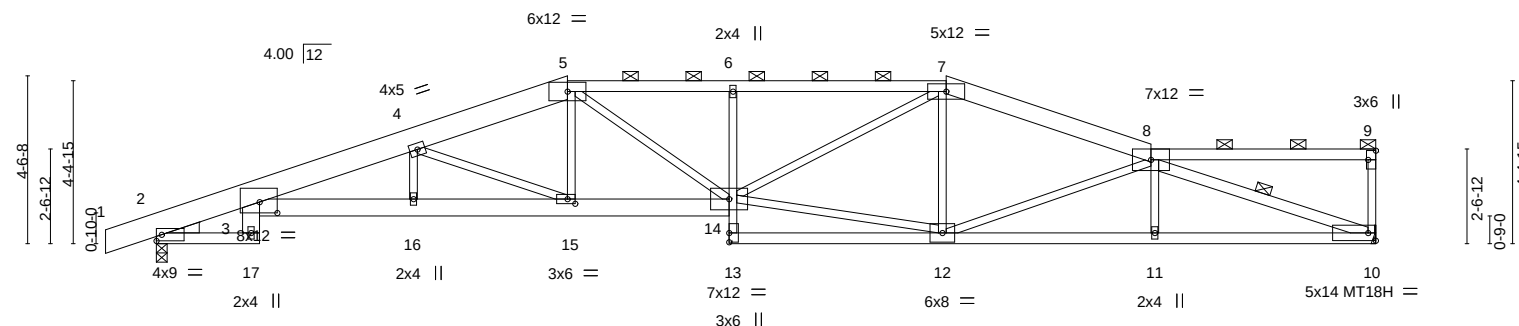

2-9-8	6-11-8	11-1-8	15-6-0	21-4-8	26-11-0	33-0-0
2-9-8	4-2-0	4-2-0	4-4-8	5-10-8	5-6-8	6-1-0

Plate Offsets (X,Y)-- [3:0-5-12,0-3-8], [9:Edge,0-2-8], [15:0-2-8,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.88	Vert(LL)	-0.38 14-15	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.86	Vert(CT)	-0.69 14-15	>568	240	MT18H	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.82	Horz(CT)	0.37 10	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.21 14	>999	240		
									Weight: 161 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
1-5: 2x8 SP DSS, 7-8: 2x6 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
3-14: 2x6 SPF 1650F 1.4E, 6-13: 2x3 SPF No.2
WEBS 2x3 SPF No.2 *Except*
3-17: 2x6 SPF No.2, 8-10: 2x4 SPF No.2

WEDGE
Left: 2x4 SP No.3

REACTIONS. (size) 10=Mechanical, 2=0-3-8
Max Horz 2=64(LC 5)
Max Uplift 10=-60(LC 5), 2=-100(LC 4)
Max Grav 10=1471(LC 1), 2=1583(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-661/12, 3-4=-4417/160, 4-5=-3547/139, 5-6=-3642/159, 6-7=-3635/162,
7-8=-2898/118
BOT CHORD 3-16=-136/4357, 15-16=-134/4345, 14-15=-89/3324, 6-14=-393/95, 12-13=-1/336,
11-12=-136/3209, 10-11=-132/3214
WEBS 4-15=-1136/77, 5-15=0/631, 5-14=-58/560, 12-14=-101/2377, 7-14=-75/1159,
8-12=-579/54, 8-10=-3373/122

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 60 lb uplift at joint 10 and 100 lb uplift at joint 2.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS 66871 8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:32 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-1P_ZQU9AbZn08Ey4tpviHMB?RMT9_BzFmEsZ11Qn

1-4-8 2-9-8 9-1-8 13-6-12 18-0-0 23-4-8 25-0-10 29-8-8 33-0-0
1-4-8 2-9-8 6-4-0 4-5-4 4-5-4 2-4-0 3-0-8 1-8-2 4-7-14 3-3-8

Scale = 1:60.7

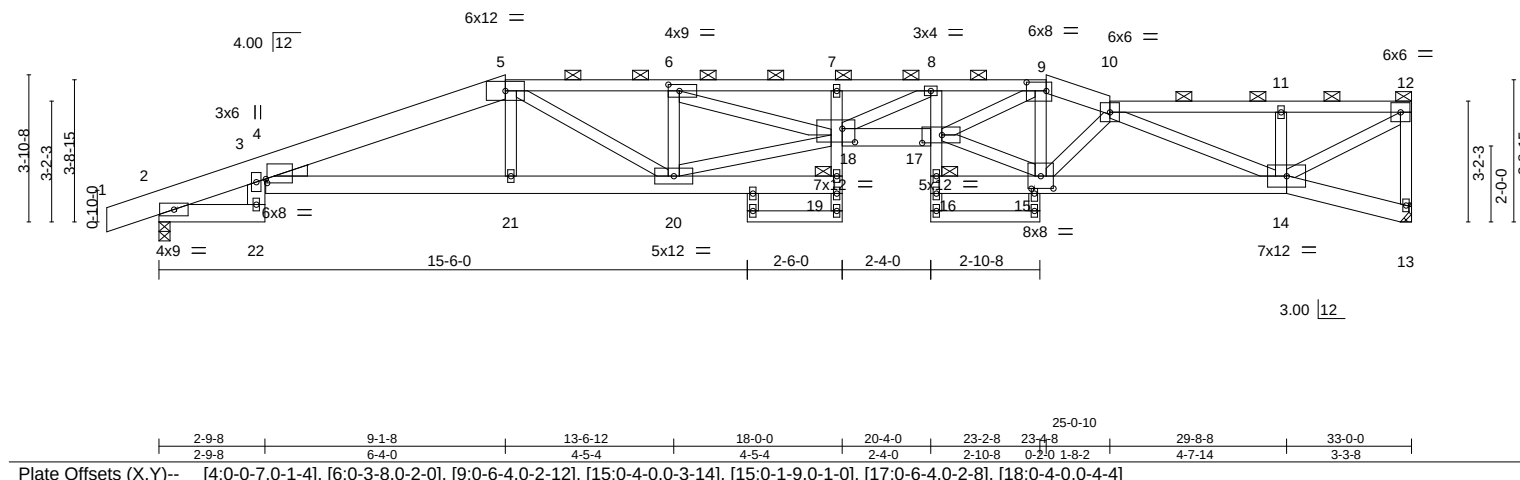

LOADING	(psf)	SPACING-	2-0-0	CSI.		DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.47	Vert(LL)	-0.47	18	>828	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.67	Vert(CT)	-0.85	18	>463	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.58	Horz(CT)	0.34	13	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.27	18	>999	240	Weight: 407 lb	FT = 10%

LUMBER-

TOP CHORD	2x4 SPF No.2 *Except* 1-5: 2x8 SP DSS, 9-10: 2x6 SPF No.2
BOT CHORD	2x6 SP 2400F 2.0E *Except* 17-18: 2x6 SPF No.2, 23-24,26-27: 2x4 SPF No.2
WEBS	2x4 SPF No.2 *Except* 3-22: 2x6 SPF No.2
WEDGE	
Left: 2x4 SP No.3	

REACTIONS. (size) 13=Mechanical, 2=0-3-8
Max Horz 2=94(LC 7)
Max Uplift 13=-69(LC 5), 2=-108(LC 4)
Max Grav 13=1466(LC 1), 2=1574(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=676/18, 3-4=58/1051, 4-5=4017/152, 5-6=4409/194, 6-7=8269/410,
7-8=8582/422, 8-9=7959/399, 9-10=3941/170, 10-11=2138/91, 11-12=2137/91,
12-13=1415/85


BOT CHORD 4-21=162/3795, 20-21=158/3816, 19-20=17/374, 17-18=425/8151, 15-16=14/264,
14-15=231/4155

WEBS 8-17=477/72, 5-21=0/396, 5-20=64/861, 18-20=205/4190, 6-18=226/4041,
8-18=58/634, 15-17=180/3716, 9-17=262/4708, 9-15=891/91, 10-15=653/71,
10-14=2222/116, 11-14=327/62, 12-14=125/2498, 6-20=1521/145

NOTES-

- 1) 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
 Top chords connected as follows: 2x8 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-7-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
 Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
 Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
- 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 3) Unbalanced roof live loads have been considered for this design.
- 4) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BC DL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 5) Provide adequate drainage to prevent water ponding.
- 6) All plates are 2x4 MT20 unless otherwise indicated.
- 7) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 8) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 9) Refer to girder(s) for truss to truss connections.

Continued on page 2



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7743 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Grain Highway, Suite 203 Waldorf, MD 20601.



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	E5	ROOF SPECIAL	1	2	I41874017
					Job Reference (optional)

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:32 2020 Page 2
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-1P_ZQU9AbZn08dEy4fpviHtMIB?RMT9_BzFmESz11Qn

- NOTES-**
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 69 lb uplift at joint 13 and 108 lb uplift at joint 2.
 - 11) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 12) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	E6	HALF HIP GIRDER	1	3		I41874018

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:34 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-zn6JrABQ7A1kOwNLC4rNnizdk_iLqJcHeHktJLz11QI

Job Reference (optional)

1-4-8	2-9-8	7-1-8	11-3-12	15-6-0	19-4-4	23-2-8	29-8-8	33-0-0
1-4-8	2-9-8	4-4-0	4-2-4	4-2-4	3-10-4	3-10-4	6-6-0	3-3-8

Scale = 1:59.9

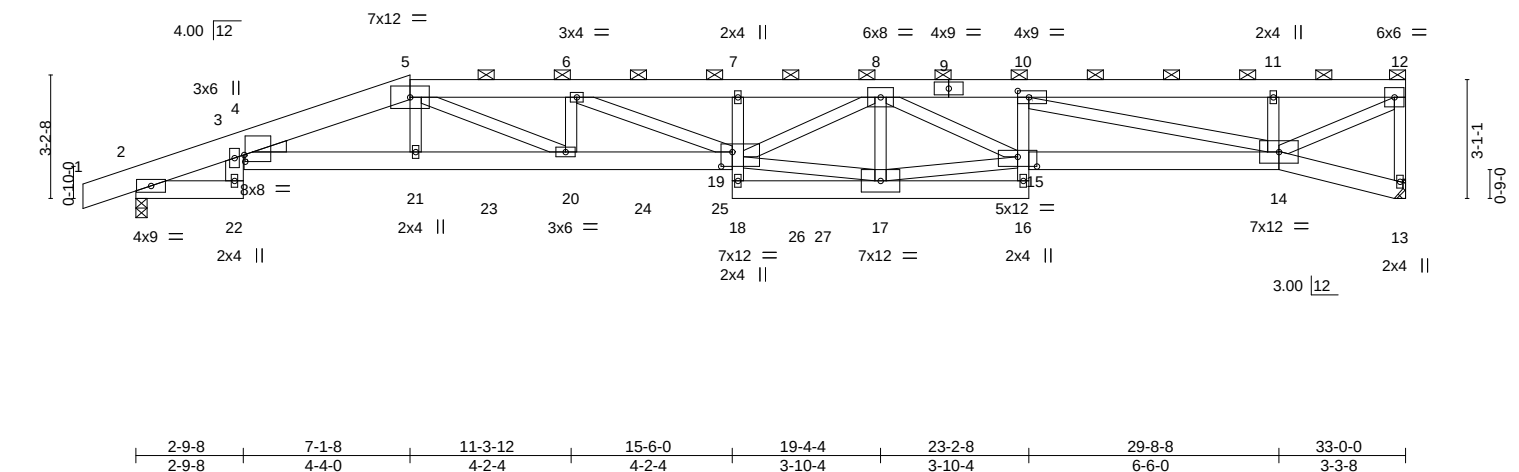

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.82	Vert(LL)	-0.49	19	>805	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.52	Vert(CT)	-0.85	19	>463	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.84	Horz(CT)	0.30	13	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.31	19	>999	240	Weight: 619 lb	FT = 10%

LUMBER-

TOP CHORD 2x6 SPF No.2 *Except*
1-5: 2x8 SP DSS
BOT CHORD 2x6 SP 2400F 2.0E
WEBS 2x4 SPF No.2 *Except*
3-22: 2x6 SPF No.2

WEDGE

Left: 2x4 SP No.3

REACTIONS.

(size) 13=Mechanical, 2=0-3-8
Max Horz 2=92(LC 7)
Max Uplift 13=-250(LC 4), 2=-433(LC 4)
Max Grav 13=2692(LC 1), 2=3413(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1549/177, 3-4=-329/2599, 4-5=-11811/1446, 5-6=-14329/1648, 6-7=-15884/1752,
7-8=-15526/1717, 8-10=-11098/1154, 10-11=-4532/450, 11-12=-4488/442,
12-13=-2666/261
BOT CHORD 4-21=-1389/11356, 20-21=-1408/11485, 19-20=-1635/14329, 17-18=-109/1024,
16-17=-74/745, 14-15=-1194/11540
WEBS 3-22=-30/371, 18-19=-66/742, 10-15=-150/1890, 5-21=-241/1681, 5-20=-249/3256,
6-20=-987/116, 6-19=-119/1779, 10-14=-7283/775, 11-14=-578/116, 12-14=-500/5201,
8-17=-2985/364, 15-17=-1087/10232, 8-15=-331/685, 8-19=-630/5271, 17-19=-1052/9947

NOTES-

- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x8 - 2 rows staggered at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-7-0 oc.
Webs connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 250 lb uplift at joint 13 and 433 lb uplift at joint 2.

Continued on page 2



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	E6	HALF HIP GIRDER	1	3	I41874018

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:34 2020 Page 2
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-zn6JrABQ7A1kOwNLC4rNnizdk_iLqJcHeHktJLz11Ql

- NOTES-**
- 10) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 11) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - 12) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 799 lb down and 223 lb up at 7-1-8, 247 lb down and 39 lb up at 9-2-4, 247 lb down and 39 lb up at 11-2-4, 247 lb down and 39 lb up at 13-2-4, 247 lb down and 39 lb up at 15-2-4, and 247 lb down and 39 lb up at 17-2-4, and 1030 lb down and 135 lb up at 17-10-7 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

- LOAD CASE(S)** Standard
- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 - Uniform Loads (plf)
 - Vert: 1-5=-70, 5-12=-70, 2-22=-20, 4-19=-20, 16-18=-20, 14-15=-20, 13-14=-20
 - Concentrated Loads (lb)
 - Vert: 21=-799(B) 20=-247(B) 23=-247(B) 24=-247(B) 25=-247(B) 26=-247(B) 27=-1030(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874019
400393	G1	Roof Special	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:35 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-Rzgh3VC2uUAb?4yXmoMcKwVtnO4tZrXRtxTRrnz11Qk

Job Reference (optional)

5-2-0	7-0-0	7-6-0	9-4-0	11-8-8	15-0-0
5-2-0	1-10-0	0-6-0	1-10-0	2-4-8	3-3-8

Scale = 1:27.6

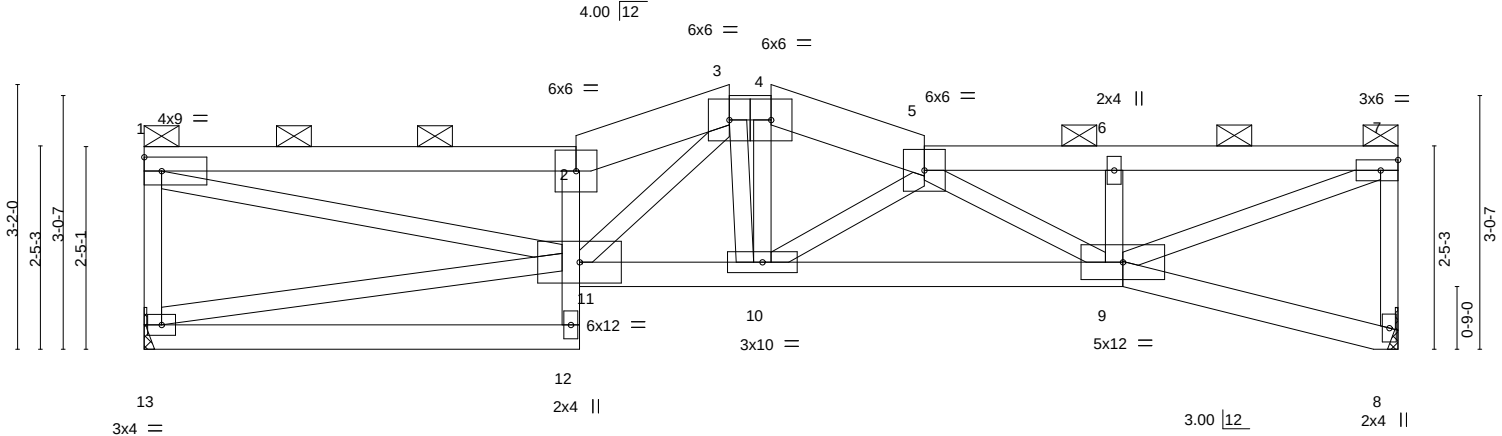

5-2-8	7-0-0	7-6-0	9-4-0	11-8-8	15-0-0
5-2-8	1-9-8	0-6-0	1-10-0	2-4-8	3-3-8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.48	Vert(LL)	-0.08	2	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.43	Vert(CT)	-0.14	10-11	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.54	Horz(CT)	0.06	8	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.04	11	>999	240	
									Weight: 62 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
2-3,4-5: 2x6 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
2-12: 2x3 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-7-15 oc purlins, except end verticals, and 2-0-0 oc purlins (4-0-2 max.): 1-2, 3-4, 5-7.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 13=Mechanical, 8=Mechanical
Max Horz 13=62(LC 7)
Max Uplift 13=-20(LC 4), 8=-22(LC 5)
Max Grav 13=666(LC 1), 8=666(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-13=-600/44, 1-2=-1553/18, 2-3=-1705/31, 3-4=-1251/24, 4-5=-1311/21, 5-6=-1248/33, 6-7=-1247/33, 7-8=-630/42
BOT CHORD 2-11=-778/76, 10-11=-35/1234, 9-10=-70/1608
WEBS 1-11=-23/1565, 3-11=-43/525, 4-10=0/285, 5-10=-458/43, 5-9=-425/16, 7-9=-50/1335

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 20 lb uplift at joint 13 and 22 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS 66871 8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:37 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-NMoRUBDJp5QJFO6wtDP4PLbEzCf61kwwKFyXvzf11Qi
3-1-8 4-11-8 9-6-8 11-8-8 15-0-0
3-1-8 1-10-0 4-7-0 2-2-0 3-3-8
Scale = 1:26.0

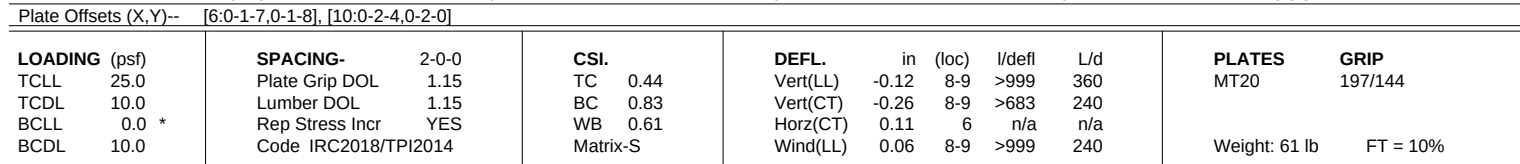

REACTIONS. (size) 13=Mechanical, 6=Mechanical
Max Horz 13=-43(LC 6)
Max Uplift 13=-27(LC 4), 6=-25(LC 5)
Max Grav 13=668(LC 1), 6=668(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-13=-554/26, 1-2=-1769/10, 2-3=-2181/23, 3-4=-1771/49, 4-5=-1871/42, 5-6=-2577/96
BOT CHORD 12-13=0/304, 9-10=-37/1650, 8-9=-37/1650, 7-8=-62/2243, 6-7=-69/2381
WEBS 1-10=-15/1768, 2-10=-722/43, 3-8=-47/258, 4-8=0/295, 5-8=-487/77, 5-7=-8/510,
3-10=0/529, 10-13=-264/19

The seal of the State of Missouri is a circular emblem. It features a blue border with the words "STATE OF MISSOURI" in a serif font. Inside the border, the name "ANDREW THOMAS JOHNSON" is written in a larger, bold serif font. Two blue stars are positioned on either side of the name, one near the top and one near the bottom of the circle.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BC DL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 27 lb uplift at joint 13 and 25 lb uplift at joint 6.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	G3	Hip Girder	1	1		I41874021
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:38 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-sYMqhXExAPYAsYh6RwwJxY7Mmb6omACtZvi5S6z11Qh



Scale = 1:26.9

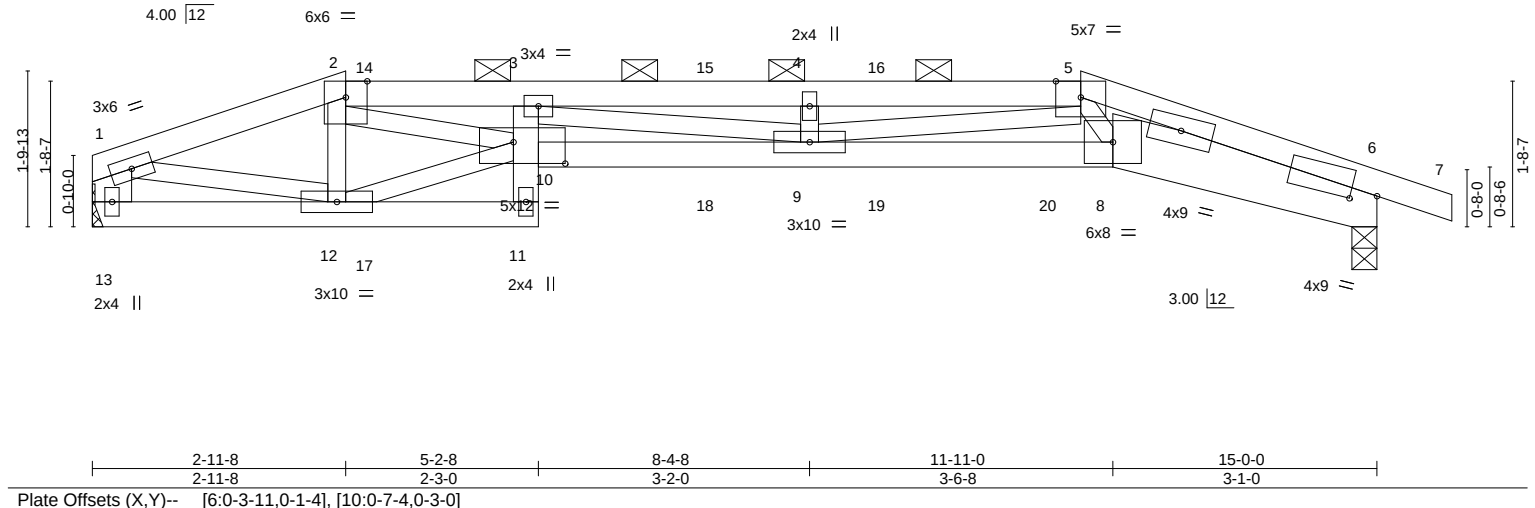

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.63	Vert(LL)	-0.22	9	>790	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.42	Vert(CT)	-0.42	9	>414	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.67	Horz(CT)	0.15	6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.23	9	>759	240	Weight: 57 lb	FT = 10%

LUMBER-
TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF 2400F 2.0E *Except*
6-8: 2x8 SP DSS
WEBS 2x3 SPF No.2 *Except*
3-11: 2x4 SPF No.2, 1-13: 2x6 SPF No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied or 3-0-11 oc purlins, except end verticals, and 2-0-0 oc purlins (2-9-12 max.): 2-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 8-9-15 oc bracing: 9-10.

REACTIONS. (size) 13=Mechanical, 6=0-3-8
Max Horz 13=-25(LC 34)
Max Uplift 13=-182(LC 4), 6=-224(LC 5)
Max Grav 13=681(LC 1), 6=756(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-1149/325, 2-3=-2905/788, 3-4=-3327/872, 4-5=-3327/872, 5-6=-3210/841, 1-13=-632/189
BOT CHORD 11-12=-113/425, 9-10=-891/3432, 8-9=-682/2505, 6-8=-778/3019
WEBS 2-12=-429/174, 10-12=-194/723, 2-10=-475/1878, 5-9=-158/891, 5-8=-150/867, 1-12=-258/938, 4-9=-253/123

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Bearing at joint(s) 6 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 182 lb uplift at joint 13 and 224 lb uplift at joint 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 82 lb down and 126 lb up at 2-11-8, 65 lb down and 44 lb up at 3-3-4, 65 lb down and 43 lb up at 5-3-4, 65 lb down and 43 lb up at 7-3-0, and 65 lb down and 43 lb up at 9-3-0, and 147 lb down and 171 lb up at 11-6-8 on top chord, and 29 lb down at 2-11-8, 16 lb down at 3-3-4, 16 lb down at 5-0-12, 16 lb down at 7-3-0, 16 lb down at 9-3-0, and 16 lb down at 11-3-0, and 29 lb down at 11-5-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

On the CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	G3	Hip Girder	1	1	I41874021
Job Reference (optional)					

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-2=-70, 2-5=-70, 5-7=-70, 11-13=-20, 8-10=-20, 6-8=-20

Concentrated Loads (lb)

Vert: 2=-3(B) 5=-6(B) 11=-5(B) 3=-3(B) 12=-0(B) 14=-3(B) 15=-3(B) 16=-3(B) 17=-5(B) 18=-5(B) 19=-5(B) 20=-6(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874022
400393	H1	Hip Girder	1	1		
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:41 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-G71yJZGpTKwk?Qh62T0ZBI_vp8zdz3JFtl2Rz11Qe

-1-4-8	2-0-0	5-11-0	9-10-0	11-10-0	13-2-8
1-4-8	2-0-0	3-11-0	3-11-0	2-0-0	1-4-8

Scale = 1:24.5

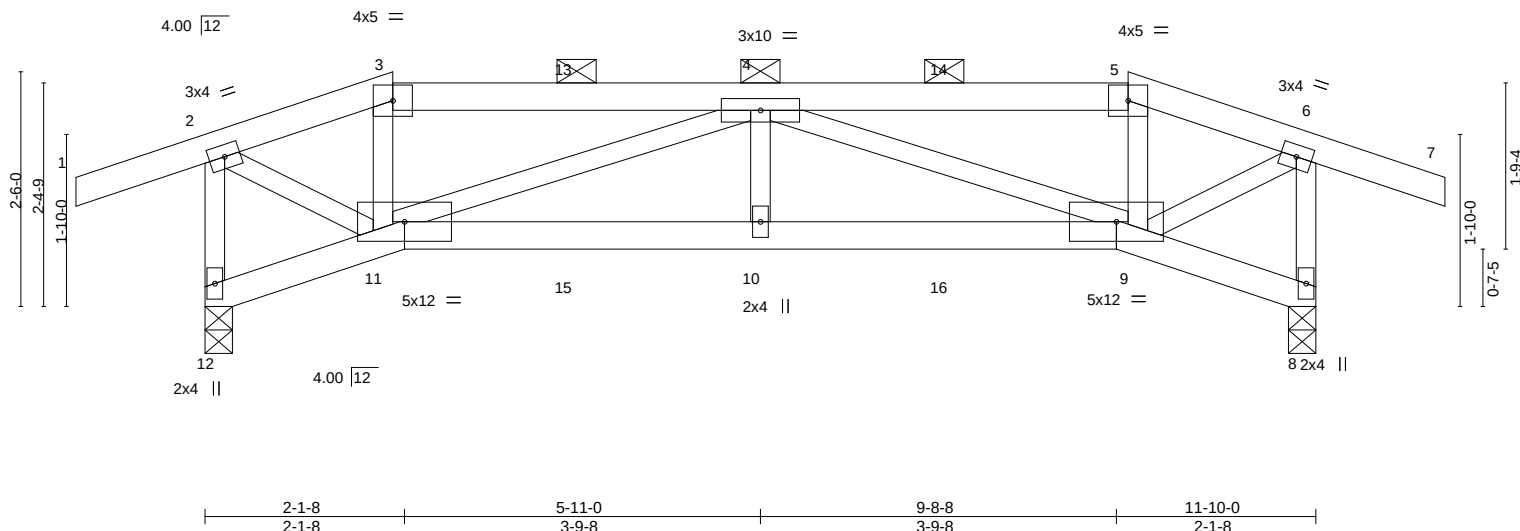

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.19	Vert(LL)	-0.03	10	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.33	Vert(CT)	-0.06	10	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.28	Horz(CT)	0.03	8	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.03	10	>999	240		
									Weight: 46 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-5.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 12=0-3-8, 8=0-3-8
Max Horz 12=-48(LC 6)
Max Uplift 12=-267(LC 4), 8=-267(LC 5)
Max Grav 12=620(LC 1), 8=620(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-12=-606/265, 2-3=-535/246, 3-4=-494/241, 4-5=-484/227, 5-6=-525/231, 6-8=-606/278
BOT CHORD 10-11=-390/1027, 9-10=-390/1027
WEBS 2-11=-226/577, 4-11=-598/203, 4-9=-598/205, 6-9=-219/572

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 12, 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 267 lb uplift at joint 12 and 267 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 117 lb up and 106 lb up at 2-0-0, 55 lb down and 27 lb up at 3-11-0, 55 lb down and 27 lb up at 5-11-0, and 55 lb down and 27 lb up at 7-11-0, and 117 lb down and 106 lb up at 9-10-0 on top chord, and 28 lb down and 37 lb up at 1-10-12, 18 lb down and 21 lb up at 3-11-0, 18 lb down and 21 lb up at 5-11-0, and 18 lb down and 21 lb up at 7-11-0, and 28 lb down and 37 lb up at 9-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	H1	Hip Girder	1	1	I41874022
Job Reference (optional)					

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-2=-70, 2-3=-70, 3-5=-70, 5-6=-70, 6-7=-70, 11-12=-20, 9-11=-20, 8-9=-20

Concentrated Loads (lb)

Vert: 11=5(F) 10=2(F) 9=5(F) 15=2(F) 16=2(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874023
400393	H2	Hip	1	1		

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:42 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-kKbKXvHREd2cL9_tgm_F6OI8GDVfi5rTUXglbtz11Qd

Job Reference (optional)

-1-4-8	4-0-0	7-10-0	11-10-0	13-2-8
1-4-8	4-0-0	3-10-0	4-0-0	1-4-8

Scale = 1:24.5

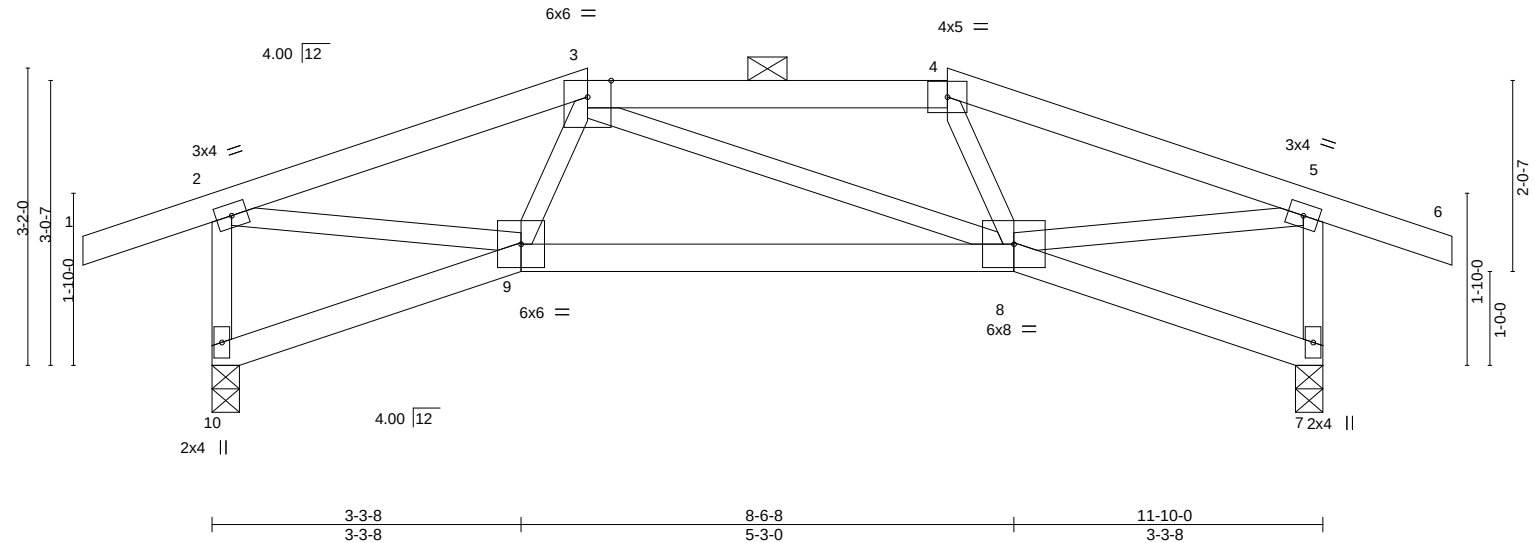

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.21	Vert(LL)	-0.04	8-9	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.30	Vert(CT)	-0.08	8-9	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.24	Horz(CT)	0.03	7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	8-9	>999	240		
									Weight: 45 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 10=0-3-8, 7=0-3-8
Max Horz 10=-40(LC 6)
Max Uplift 10=-154(LC 4), 7=-154(LC 5)
Max Grav 10=627(LC 1), 7=627(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-10=-602/162, 2-3=-794/114, 3-4=-726/159, 4-5=-793/121, 5-7=-602/172
BOT CHORD 8-9=-92/727
WEBS 2-9=-55/711, 5-8=-70/709

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 10, 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 154 lb uplift at joint 10 and 154 lb uplift at joint 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874024
400393	H3	Roof Special	4	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:43 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-CW9jkFI3?xATzJZ4ETWUecrFQcrDRYjcjBP57Jz11Qc

Job Reference (optional)

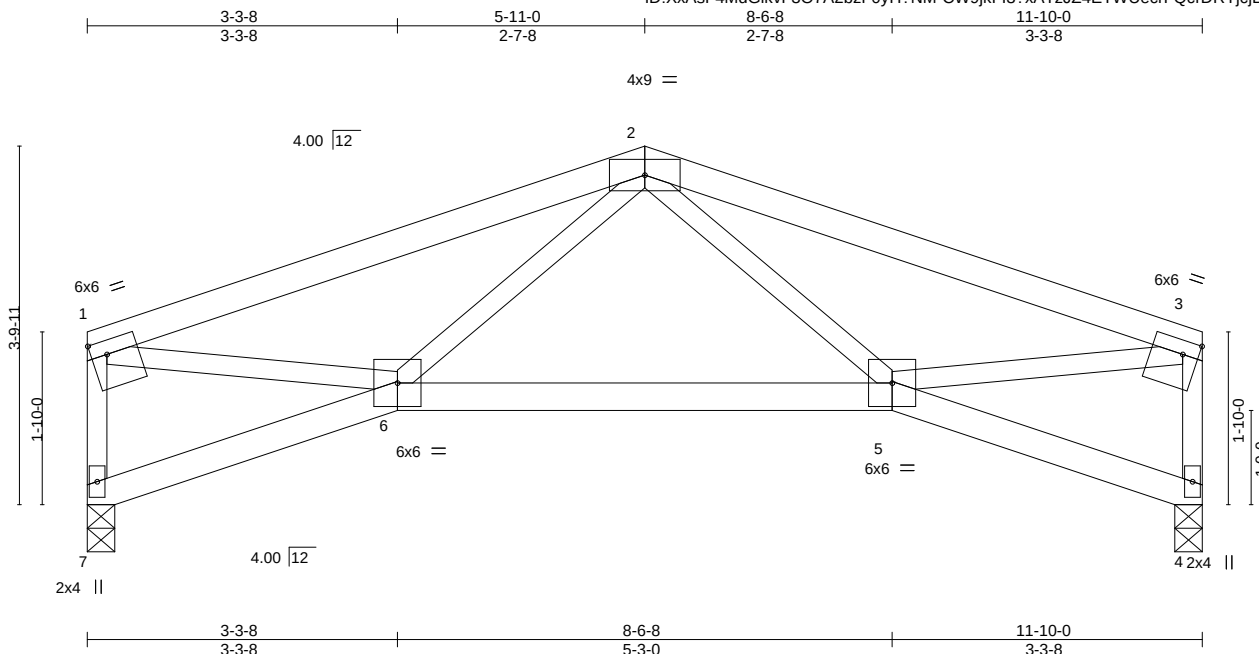


Plate Offsets (X,Y)--		[1:0-2-0,0-1-12], [3:0-2-0,0-1-12]									
LOADING	(psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC 0.51	Vert(LL)	-0.04	5-6	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC 0.28	Vert(CT)	-0.08	5-6	>999	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB 0.20	Horz(CT)	0.02	4	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.01	5-6	>999	240	Weight: 41 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-7-6 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-3-8, 4=0-3-8
Max Horz 7=-37(LC 4)
Max Uplift 7=-78(LC 4), 4=-78(LC 5)
Max Grav 7=523(LC 1), 4=523(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-7=-510/91, 1-2=-739/86, 2-3=-739/75, 3-4=-510/103
BOT CHORD 5-6=-98/643
WEBS 3-5=-10/594, 1-6=-17/594

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 7, 4 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 78 lb uplift at joint 7 and 78 lb uplift at joint 4.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874025
400393	J1	Diagonal Hip Girder	2	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:44 2020 Page 1
ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-gij5yaJimFIJbT8GnB1jBpNSn0BRA2tmxr9Pflz11Qb

1-2-14	2-9-3	5-6-6
1-2-14	2-9-3	2-9-3

Scale = 1:13.6

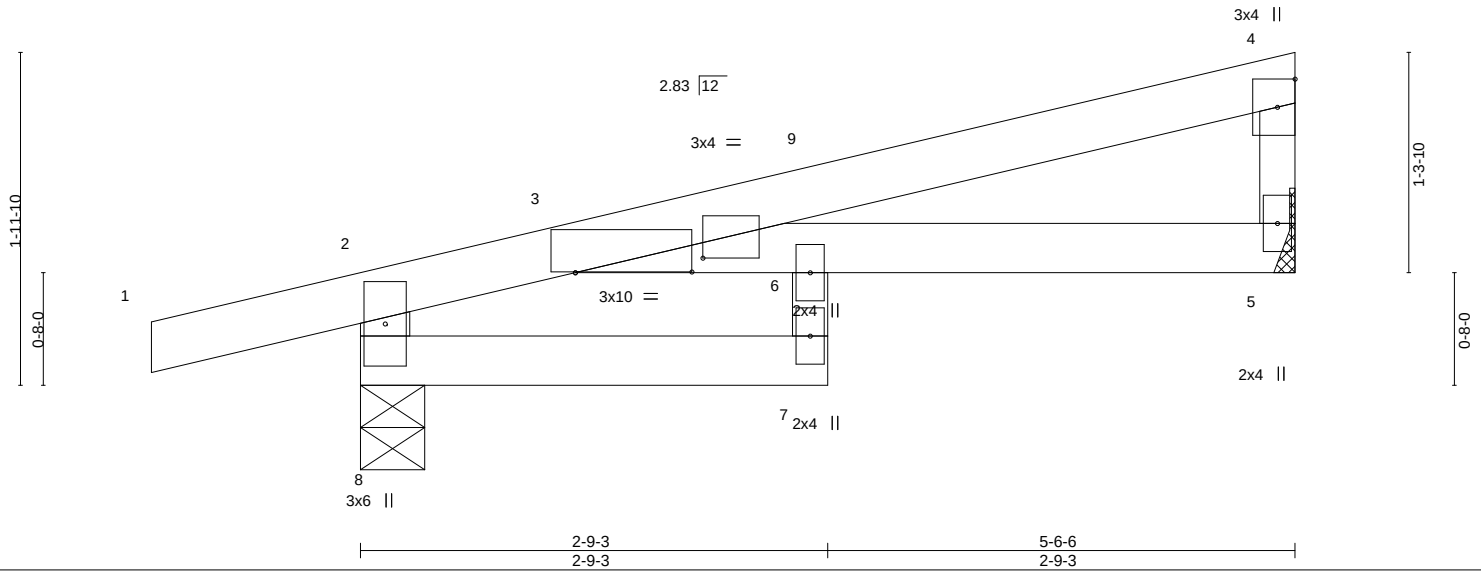


Plate Offsets (X,Y)--		[3:0-9-1,0-1-1], [3:0-8-4,0-0-1]								
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL 1.15		TC 0.34		Vert(LL) -0.04	6	>999	360	MT20 197/144
TCDL 10.0		Lumber DOL 1.15		BC 0.28		Vert(CT) -0.07	6	>907	240	
BCLL 0.0 *		Rep Stress Incr NO		WB 0.02		Horz(CT) 0.03	5	n/a	n/a	
BCDL 10.0		Code IRC2018/TPI2014		Matrix-R		Wind(LL) 0.03	6	>999	240	Weight: 17 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-6-6 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-4-9, 5=Mechanical
Max Horz 8=64(LC 5)
Max Uplift 8=-105(LC 4), 5=-46(LC 8)
Max Grav 8=347(LC 1), 5=225(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-8=-332/125

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 105 lb uplift at joint 8 and 46 lb uplift at joint 5.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 67 lb down and 31 lb up at 2-9-8, and 67 lb down and 31 lb up at 2-9-8 on top chord, and 2 lb down and 0 lb up at 2-7-15, and 2 lb down and 0 lb up at 2-7-15 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S)

- Standard
- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-2=-70, 2-4=-70, 7-8=-20, 5-6=-20
- Concentrated Loads (lb)
- Vert: 7=1(F=0, B=0)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874026
400393	J2	Jack-Open	4	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:51 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-z2ekQ_O56OBKwYBci9fMzIAhSrChJCtnYQLHPsz11QU

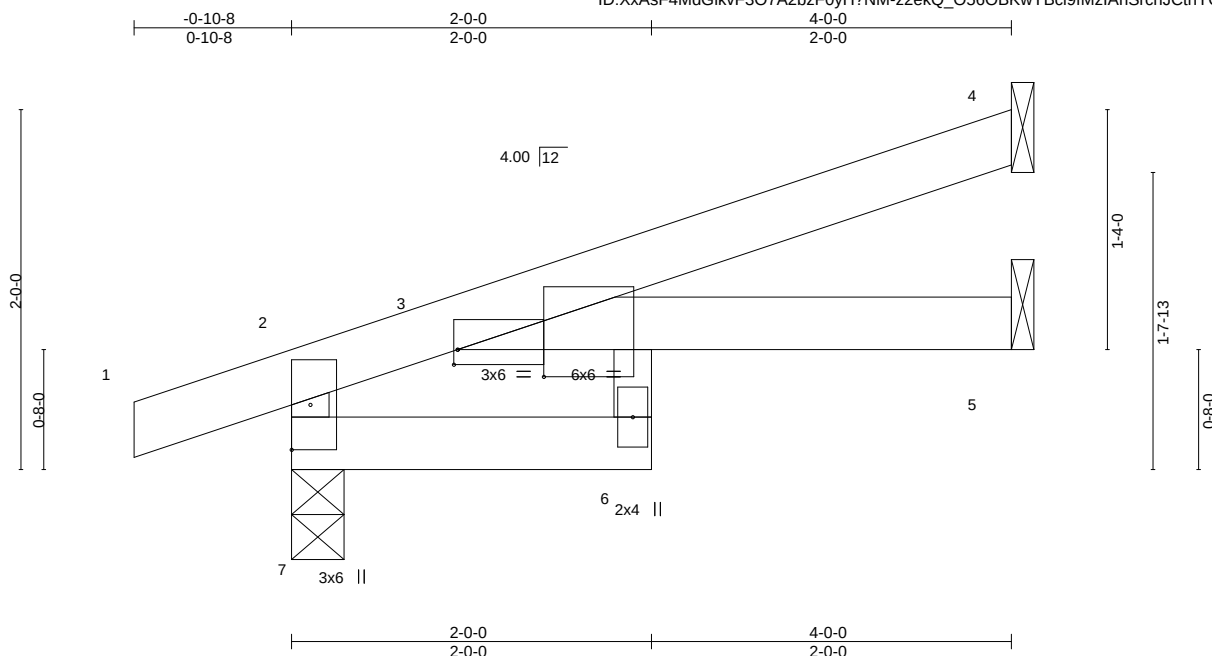

Scale = 1:12.8

Plate Offsets (X,Y)--	[3:0-5-12,0-1-13], [3:0-0-4,0-1-0]
-----------------------	------------------------------------

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.18	Vert(LL)	-0.02	6	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.17	Vert(CT)	-0.05	6	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.02	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.03	6	>999	240	Weight: 12 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 3-6: 2x3 SPF No.2
 WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 7=0-3-8, 4=Mechanical, 5=Mechanical
 Max Horz 7=63(LC 4)
 Max Uplift 7=-56(LC 4), 4=-46(LC 8)
 Max Grav 7=263(LC 1), 4=113(LC 1), 5=75(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 56 lb uplift at joint 7 and 46 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874027
400393	J3	Jack-Open	4	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:58 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-GPZOuNUUTY3KGcDyc7H?ImywZf0fSNcp90Y89yz11QN

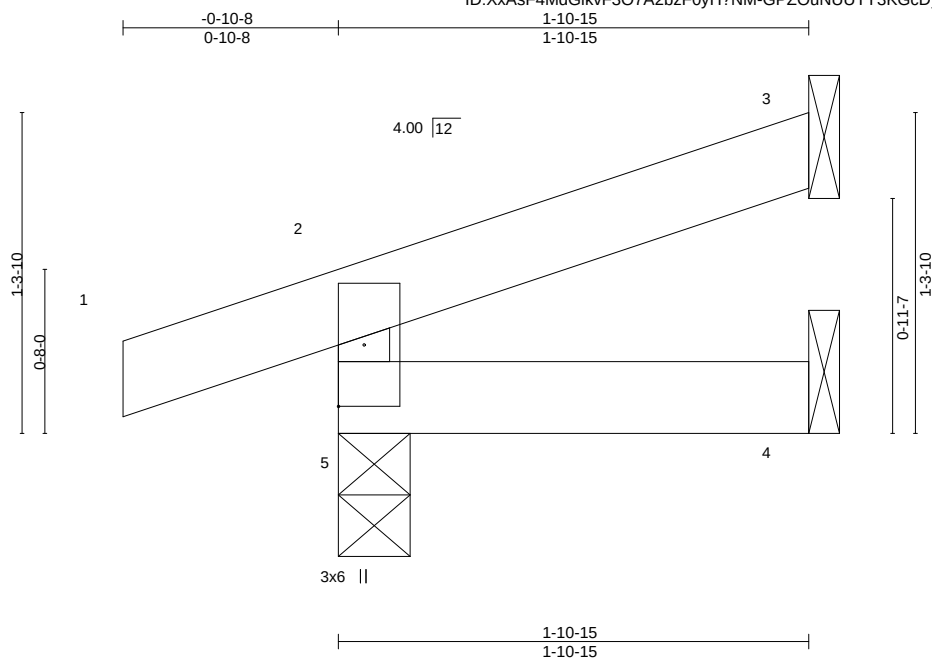

Scale = 1:9.4

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	-0.00	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 6 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-10-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=35(LC 4)
Max Uplift 5=-57(LC 4), 3=-26(LC 8)
Max Grav 5=168(LC 1), 3=46(LC 1), 4=33(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 57 lb uplift at joint 5 and 26 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874028
400393	J4	Jack-Closed Supported Gable	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:06 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-1x2PZ6aVa?4CDrqU4oQt4SHHXulZK_b??GUaRUz11QF

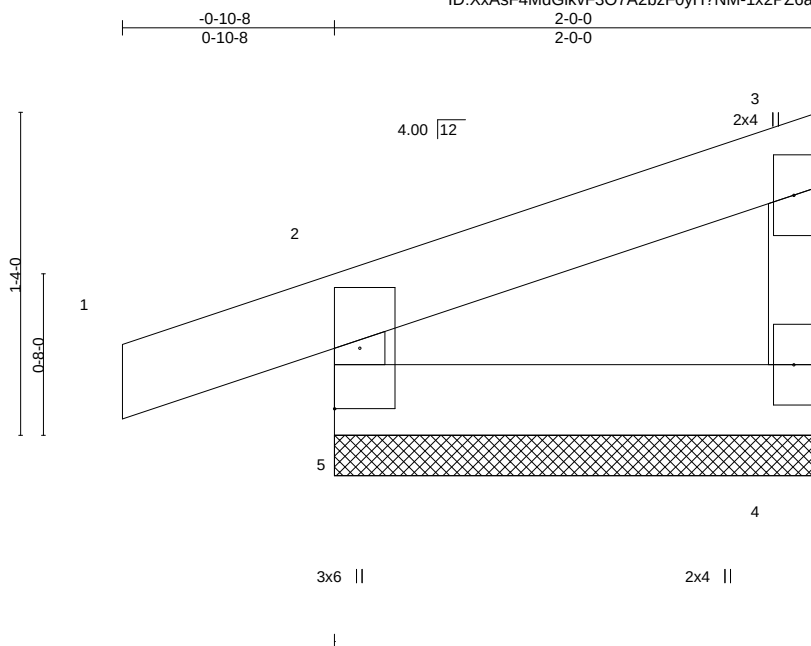

Scale = 1:9.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	0.00	1	n/r	120	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	1	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=2-0-0, 4=2-0-0
Max Horz 5=49(LC 5)
Max Uplift 5=63(LC 4), 4=14(LC 5)
Max Grav 5=168(LC 1), 4=62(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) Gable requires continuous bottom chord bearing.
- 4) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 5) Gable studs spaced at 2-0-0 oc.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 63 lb uplift at joint 5 and 14 lb uplift at joint 4.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874029
400393	J5	Jack-Closed	5	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:13 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-KHz21Vfux9yCZwsr_m2Wsx4Umi8BT9K1crgRBaz11Q8

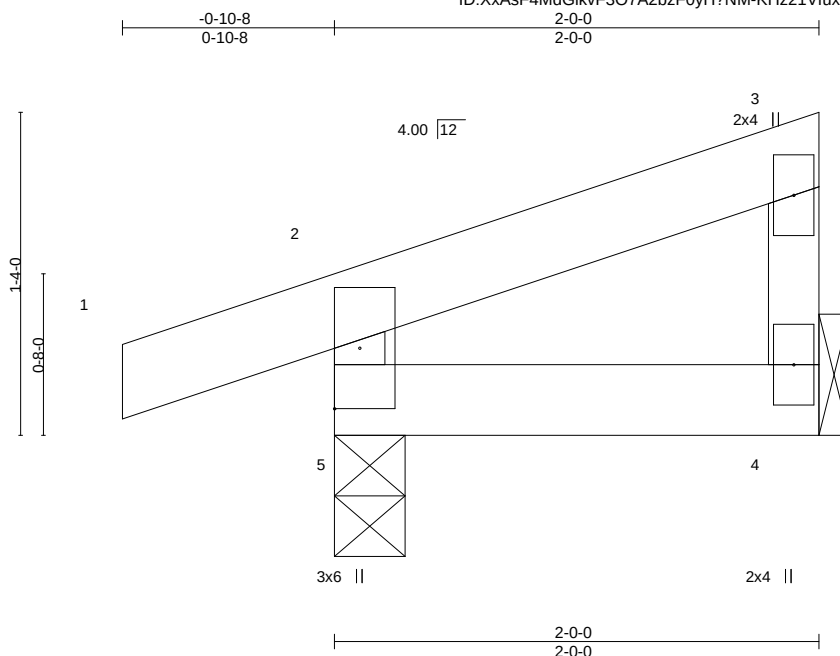

Scale = 1:9.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	-0.00	5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240		
									Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 4=Mechanical
Max Horz 5=49(LC 5)
Max Uplift 5=63(LC 4), 4=-14(LC 5)
Max Grav 5=168(LC 1), 4=62(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 63 lb uplift at joint 5 and 14 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874030
400393	J7	JACK-CLOSED SUPPORTE	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:14 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-oUXRFrgWiT43B4R1YUZIP8df56UWCcaArVQ?j0z11Q7

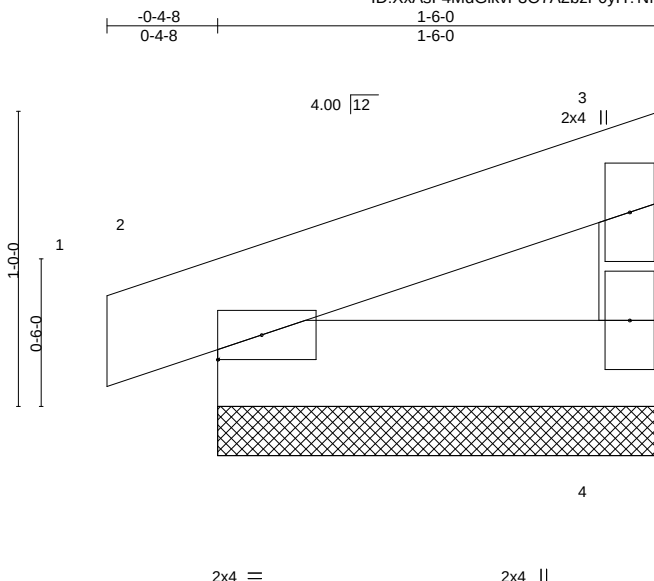

Scale = 1:7.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.03	Vert(LL)	-0.00	1	n/r	120	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	0.00	1	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 4 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-6-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 4=1-6-0, 2=1-6-0
Max Horz 2=28(LC 5)
Max Uplift 4=-14(LC 8), 2=-27(LC 4)
Max Grav 4=59(LC 1), 2=93(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) Gable requires continuous bottom chord bearing.
- 4) Gable studs spaced at 2-0-0 oc.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 14 lb uplift at joint 4 and 27 lb uplift at joint 2.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874031
400393	J8	JACK-CLOSED	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:14 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-oUXRFrgWiT43B4R1YUZIP8df76UXCcaArVQ?j0z11Q7

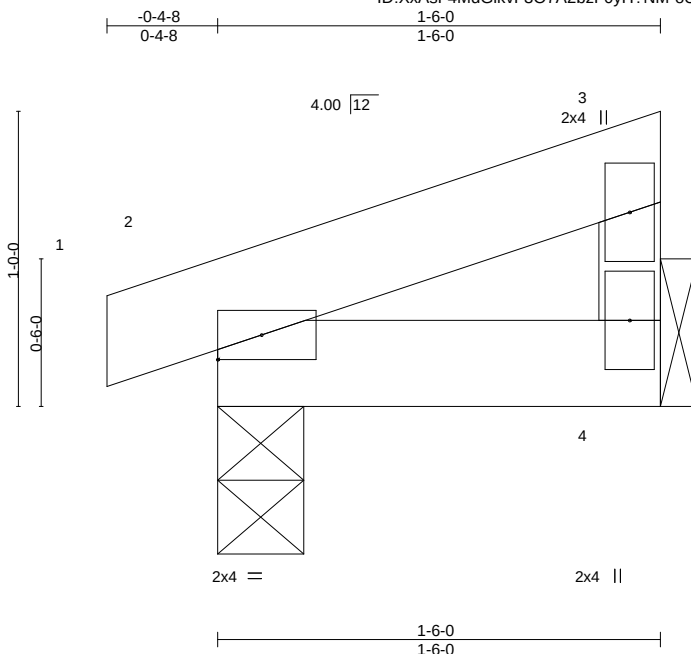

Scale = 1:7.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.02	Vert(LL)	-0.00	2	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	2	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P	Wind(LL)	0.00	2	****	240	Weight: 4 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-6-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 4=Mechanical, 2=0-3-8
Max Horz 2=28(LC 5)
Max Uplift 4=-13(LC 8), 2=-28(LC 4)
Max Grav 4=57(LC 1), 2=94(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 13 lb uplift at joint 4 and 28 lb uplift at joint 2.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874032
400393	J9	Diagonal Hip Girder	2	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:15 2020 Page 1

ID:XXAsF4MdgikvF3O7A2bzF0yH?NM-Gg5pSBh8TmCwpE0D6B4_xM9oMWqPx3pK499YFSz11Q6

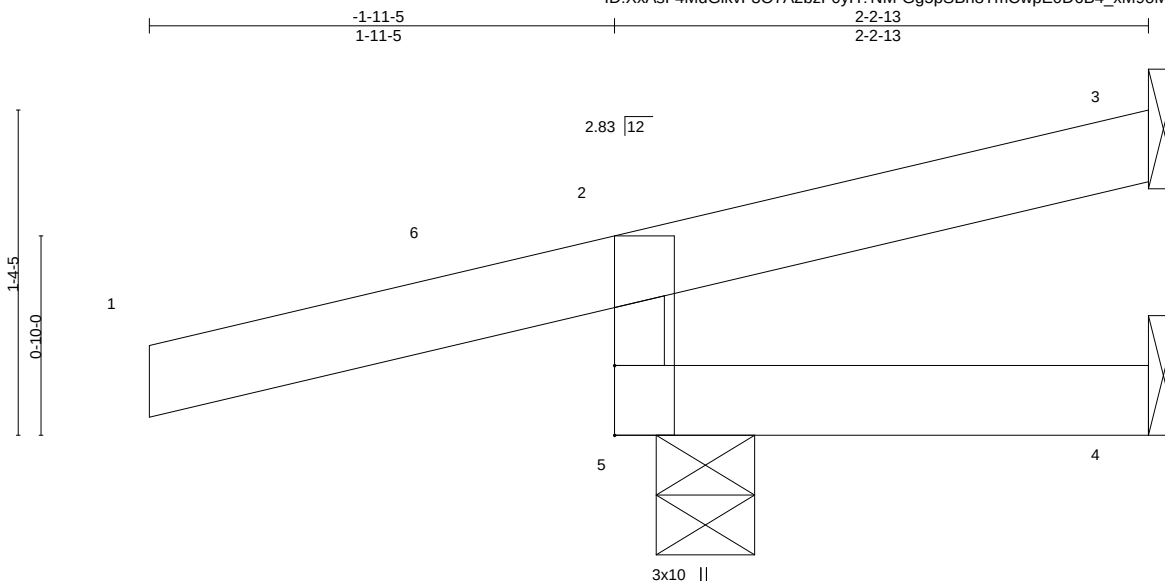

Scale = 1:9.6

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.19	Vert(LL)	-0.00 5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	-0.00 4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.00 3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	-0.00 5	>999	240		
								Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-13 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-4-15, 3=Mechanical, 4=Mechanical
Max Horz 5=43(LC 7)
Max Uplift 5=-141(LC 6), 3=-15(LC 12)
Max Grav 5=133(LC 1), 3=8(LC 4), 4=27(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 141 lb uplift at joint 5 and 15 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 22 lb down and 8 lb up at -1-11-5, and 22 lb down and 8 lb up at -1-11-5 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).


LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Concentrated Loads (lb)

Vert: 1=-35(F=-18, B=-18)

Trapezoidal Loads (plf)

Vert: 1=-0(F=35, B=35)-to-6=-24(F=23, B=23), 6=0(F=35, B=35)-to-2=-13(F=29, B=29), 2=-13(F=29, B=29)-to-3=-49(F=10, B=10), 5=-4(F=8, B=8)-to-4=-14(F=3, B=3)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874033
400393	J10	Jack-Open	3	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:45 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-8vHT9wJKXYQACcjSLuYyk1wgaQadvVOvAVuyBCz11Qa

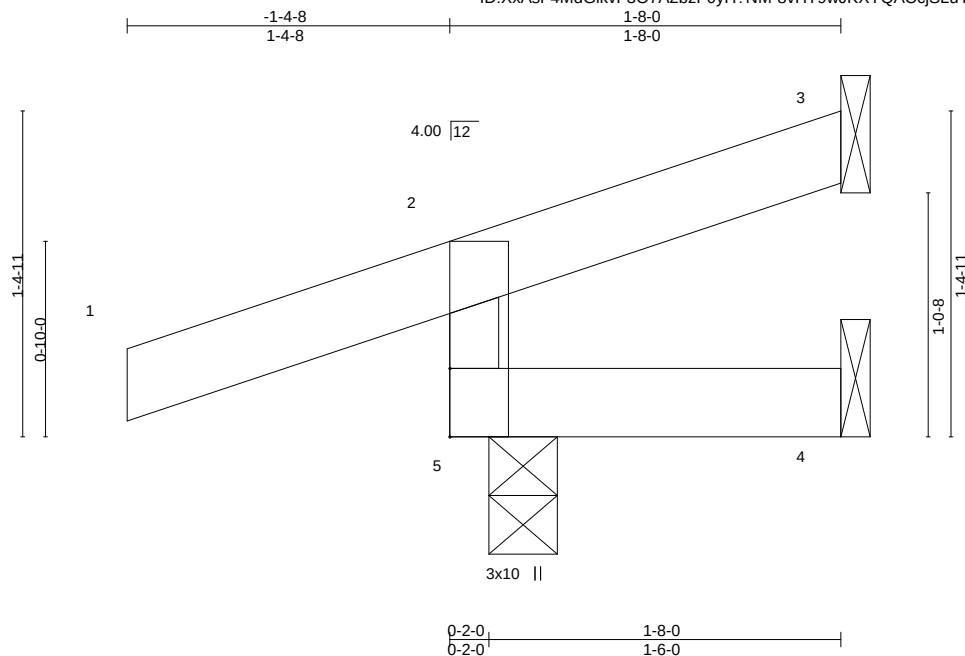

Scale = 1:9.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 6 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 1-8-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=38(LC 4)
Max Uplift 5=90(LC 4), 3=-15(LC 8)
Max Grav 5=223(LC 1), 3=13(LC 1), 4=27(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 90 lb uplift at joint 5 and 15 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874034
400393	J11	Diagonal Hip Girder	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:45 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-8vHT9wJKXYQACcJSLuYyk1wc2QWLvVOvAVuyBCz11Qa

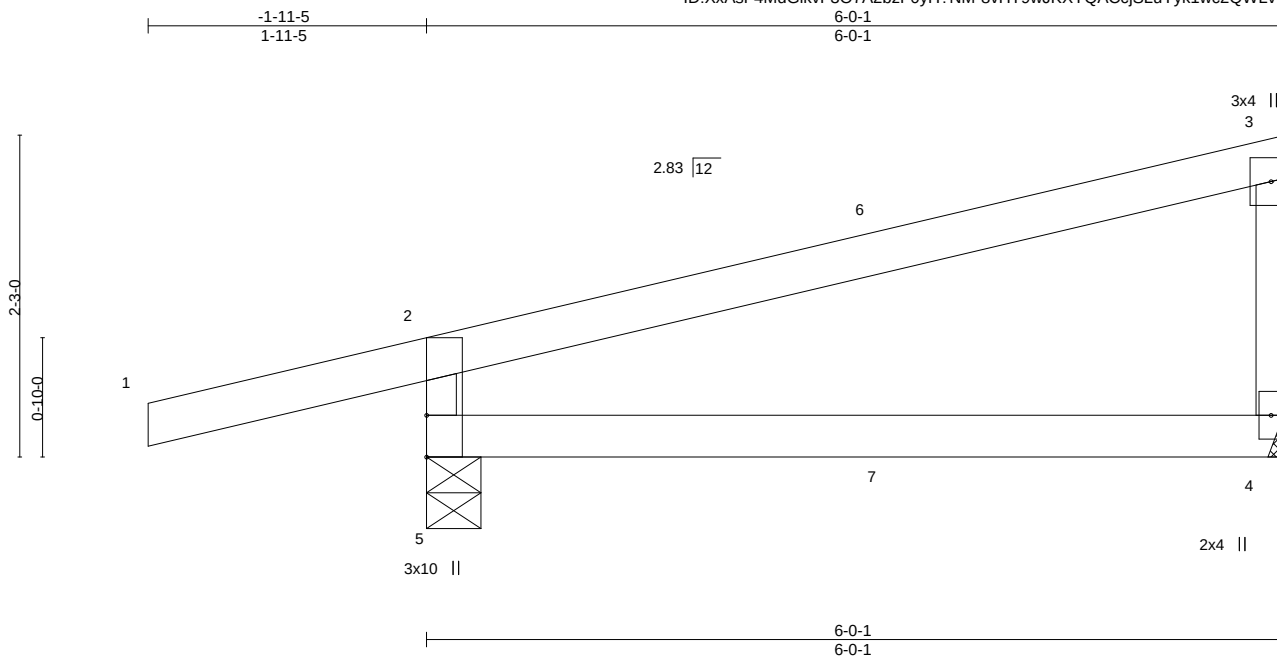

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.43	Vert(LL)	-0.05	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.30	Vert(CT)	-0.09	4-5	>766	240	197/144
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	0.00	4	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	
								Weight: 18 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-4-9, 4=Mechanical
Max Horz 5=90(LC 5)
Max Uplift 5=-145(LC 4), 4=-47(LC 8)
Max Grav 5=427(LC 1), 4=233(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-378/183

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 145 lb uplift at joint 5 and 47 lb uplift at joint 4.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 30 lb up at 3-3-2, and 68 lb down and 30 lb up at 3-3-2 on top chord, and 4 lb down and 2 lb up at 3-3-2, and 4 lb down and 2 lb up at 3-3-2 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 4-5=-20
Concentrated Loads (lb)
Vert: 7=5(F=2, B=2)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874035
400393	J12	Jack-Open	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:46 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-d5qrMGKylsY1qmlv3BGEsrJqwjex2P9eWkez11QZ

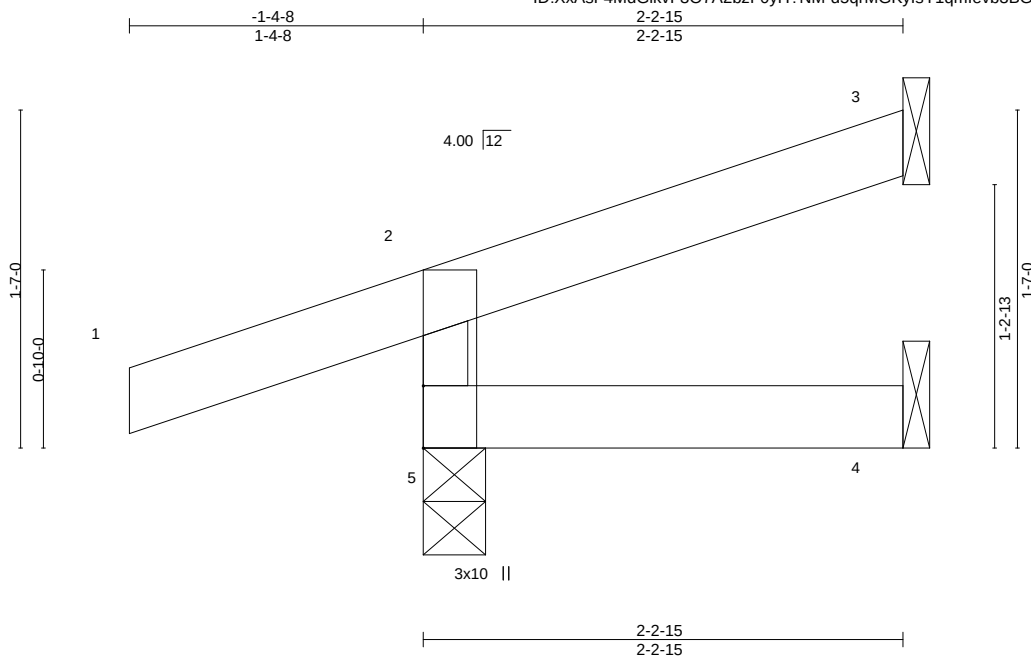

Scale = 1:10.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=46(LC 4)
Max Uplift 5=87(LC 4), 3=27(LC 8)
Max Grav 5=234(LC 1), 3=42(LC 1), 4=38(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 5 and 27 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874037
400393	J14	Diagonal Hip Girder	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:48 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-ZUycnyMCqTol34S1005fLfY02dVr6r8LsS7doXz11QX

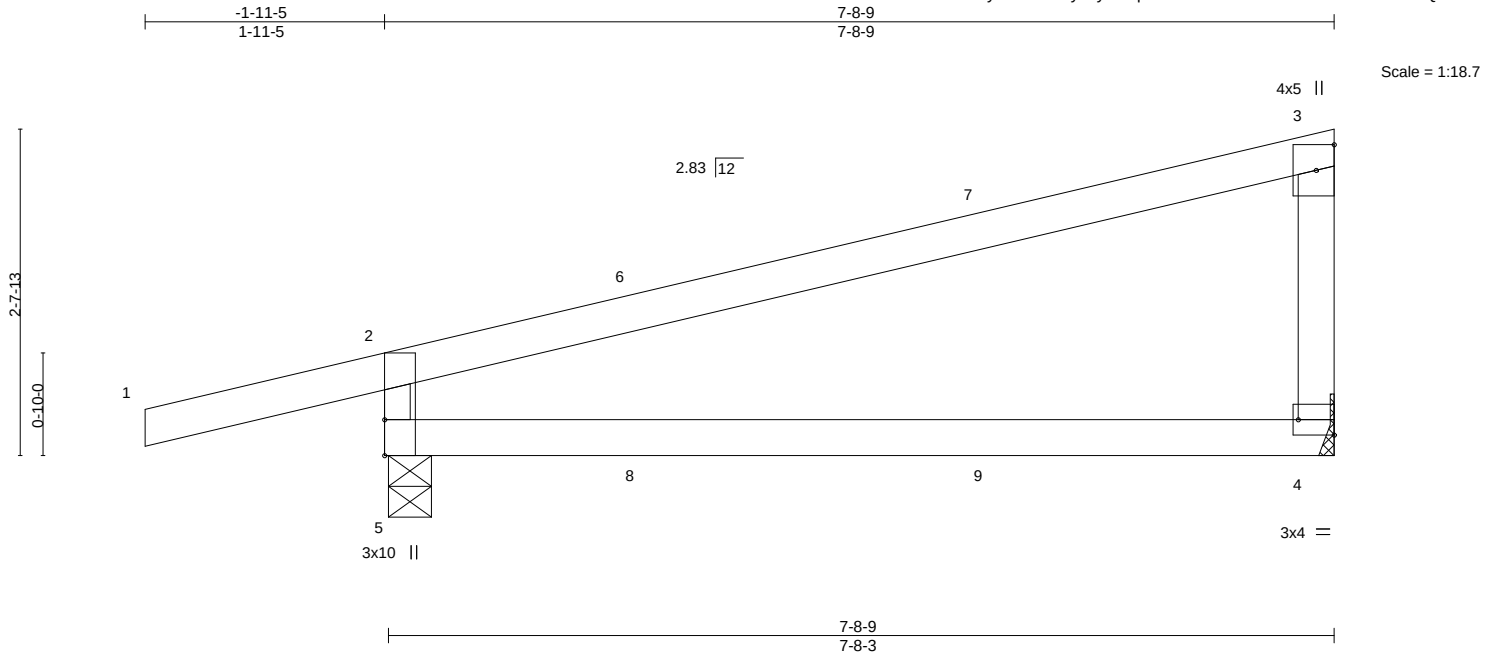


Plate Offsets (X,Y)--		[4:Edge,0-1-8]											
LOADING (psf)	SPACING-		CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP			
TCLL 25.0	Plate Grip DOL	2-0-0	TC 0.77	Vert(LL)	-0.12	4-5	>774	360	MT20	197/144			
TCDL 10.0	Lumber DOL	1.15	BC 0.50	Vert(CT)	-0.24	4-5	>378	240					
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	0.00	4	n/a	n/a					
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.02	4-5	>999	240					
									Weight: 23 lb	FT = 10%			

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
3-4: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-3, 4=Mechanical
Max Horz 5=106(LC 5)
Max Uplift 5=-158(LC 4), 4=-71(LC 8)
Max Grav 5=495(LC 1), 4=319(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-439/210

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 158 lb uplift at joint 5 and 71 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 70 lb down and 72 lb up at 2-1-12, 70 lb down and 72 lb up at 2-1-12, and 84 lb down and 57 lb up at 4-11-11, and 84 lb down and 57 lb up at 4-11-11 on top chord, and 3 lb down and 5 lb up at 2-1-12, 3 lb down and 5 lb up at 2-1-12, and 17 lb down at 4-11-11, and 17 lb down at 4-11-11 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 4-5=-20
Concentrated Loads (lb)
Vert: 8=10(F=5, B=5) 9=-8(F=-4, B=-4)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J16	Truss Type Jack-Open	Qty 15	Ply 1	Lot 18 HT Job Reference (optional)	I41874038
---------------	--------------	-------------------------	-----------	----------	---------------------------------------	-----------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:49 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-1gW_?INqbnwchE1Dakcuut4Hy1ufrOV56sAKzz11QW

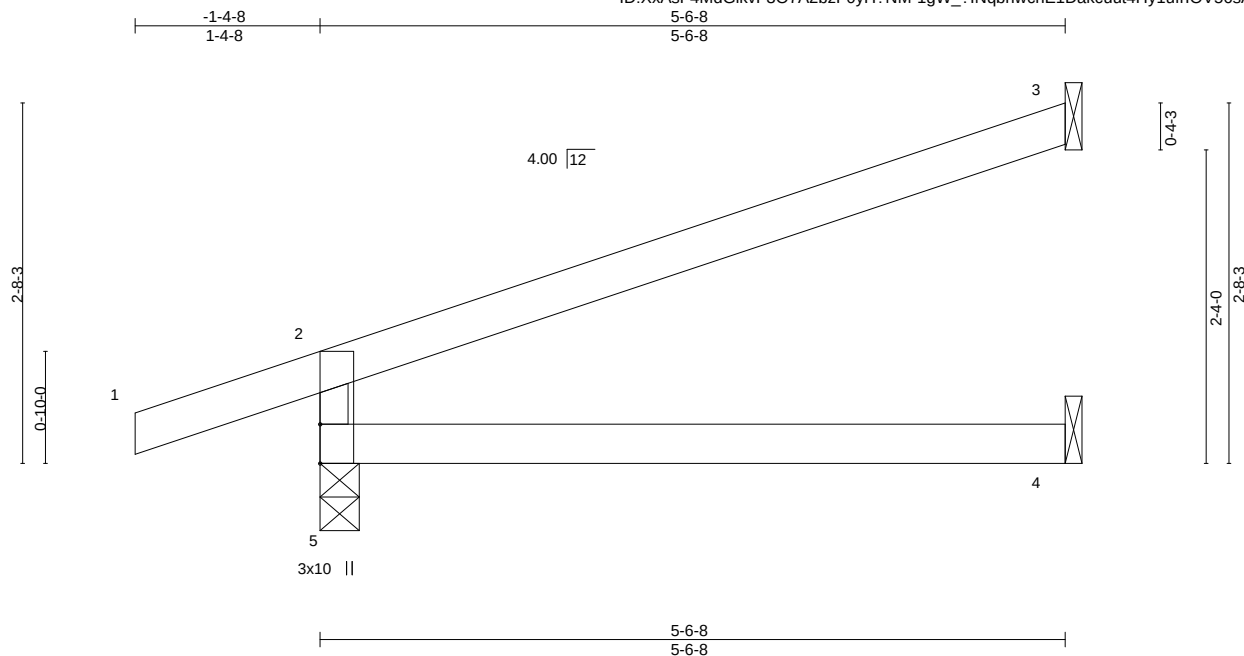

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.44	Vert(LL)	-0.04	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.27	Vert(CT)	-0.09	4-5	>740	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.03	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.02	4-5	>999	240	Weight: 15 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-6-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=65(LC 4)
Max Uplift 5=-47(LC 4), 3=-46(LC 8)
Max Grav 5=360(LC 1), 3=167(LC 1), 4=102(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-313/88

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 47 lb uplift at joint 5 and 46 lb uplift at joint 3.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J17	Truss Type Jack-Open	Qty 4	Ply 1	Lot 18 HT Job Reference (optional)	I41874039
---------------	--------------	-------------------------	----------	----------	---------------------------------------	-----------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:49 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-1gW_?INqbnwchE1Dakcuut4LZ1xvriOV56sAKzz11QW

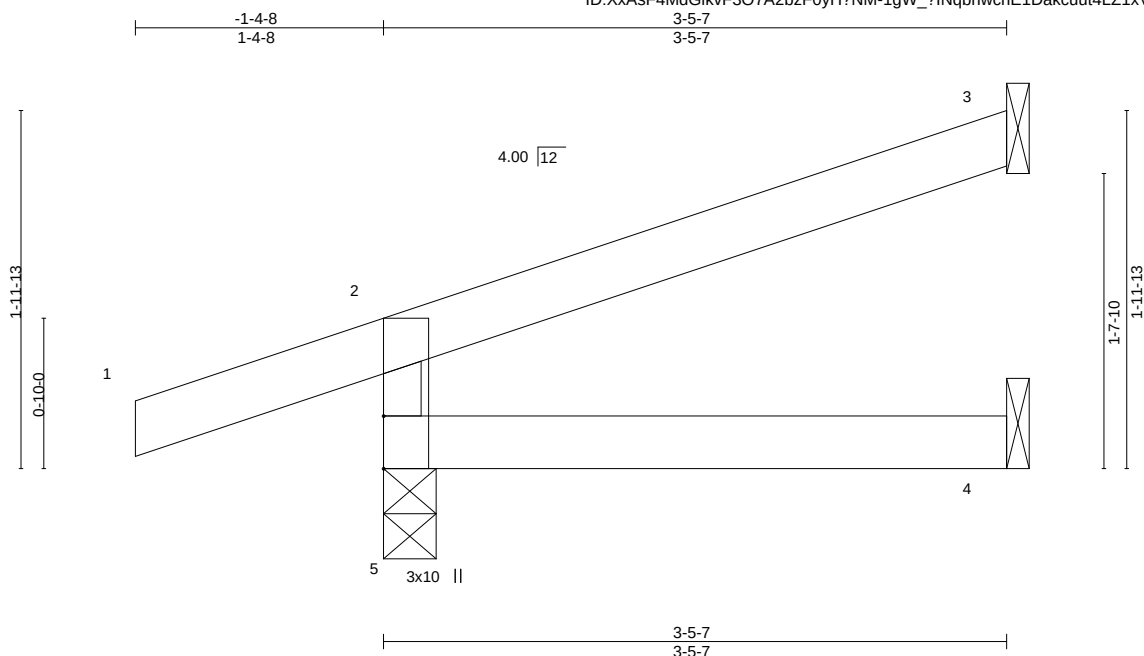

Scale = 1:12.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.09	Vert(CT)	-0.01	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240		
									Weight: 10 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-5-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=62(LC 4)
Max Uplift 5=87(LC 4), 3=48(LC 8)
Max Grav 5=275(LC 1), 3=92(LC 1), 4=61(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 5 and 48 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874040
400393	J18	Jack-Open	4	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:50 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-Vs4MCeNSL53TJOcQ8R87R4dWJRloaldeKmcjtPz11QV

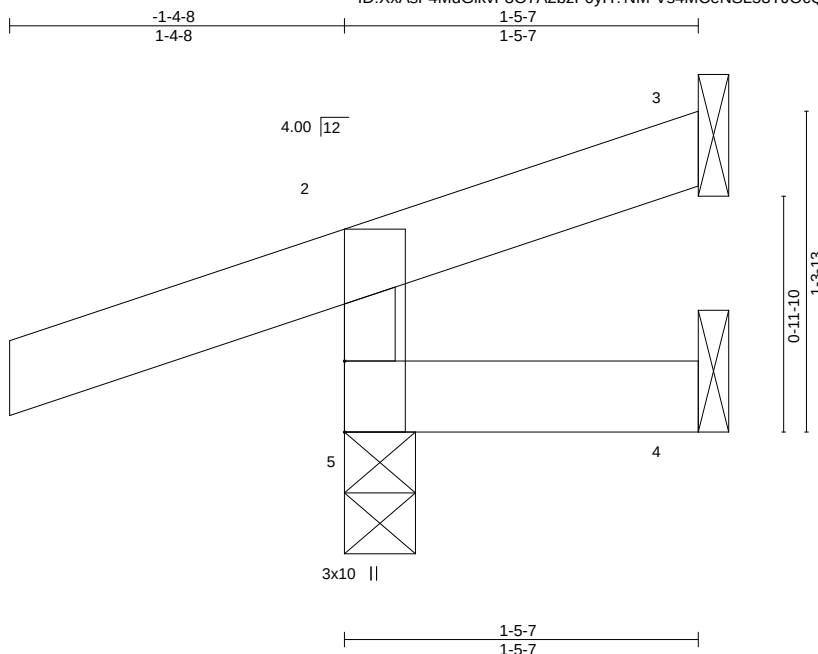

Scale = 1:9.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	0.00	5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 5 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-5-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=36(LC 4)
Max Uplift 5=93(LC 4), 3=-10(LC 8)
Max Grav 5=221(LC 1), 3=3(LC 19), 4=23(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 93 lb uplift at joint 5 and 10 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874041
400393	J21	Diagonal Hip Girder	1	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:51 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-z2ekQ_O56OBKwYBci9fMzIAgmrecJCtnYQLHPsz11QU

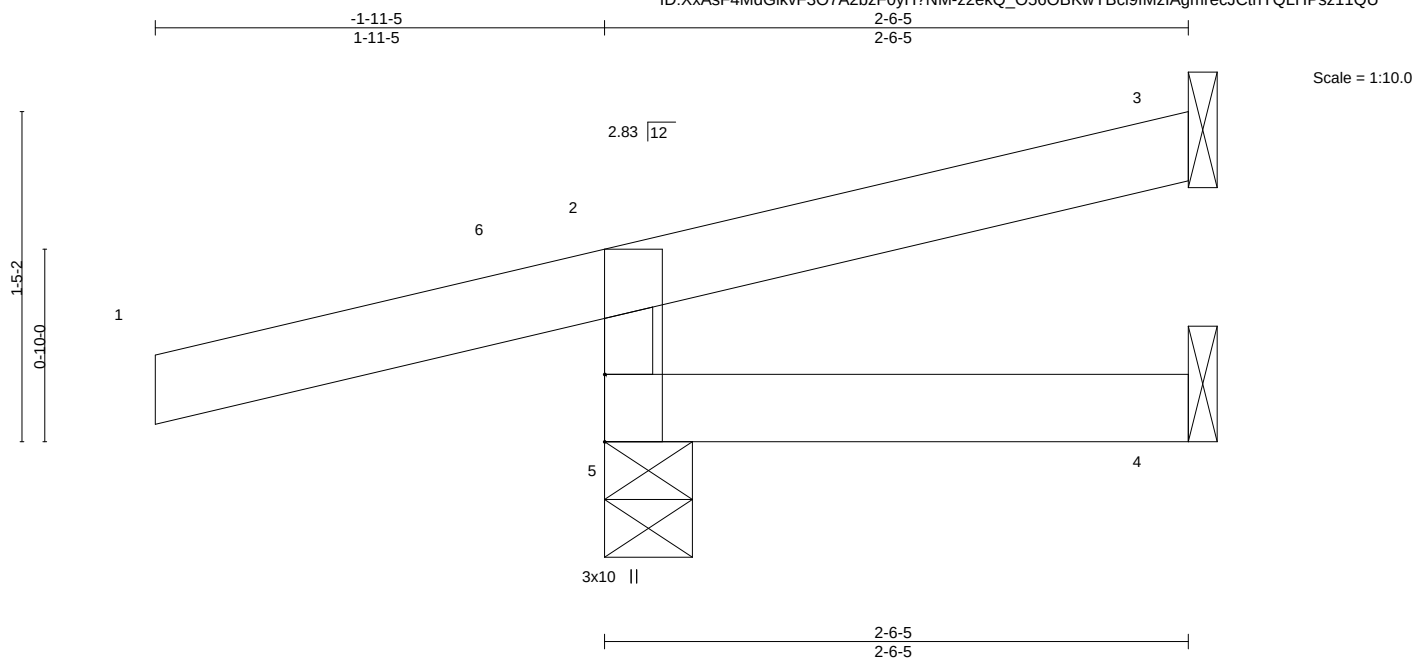

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.23	Vert(LL)	-0.00	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	-0.00	4-5	>999	240	Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-6-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-9, 3=Mechanical, 4=Mechanical
Max Horz 5=46(LC 7)
Max Uplift 5=-128(LC 6), 3=-30(LC 12), 4=-1(LC 19)
Max Grav 5=148(LC 1), 3=6(LC 4), 4=31(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 128 lb uplift at joint 5, 30 lb uplift at joint 3 and 1 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 28 lb down and 10 lb up at -1-11-5, and 28 lb down and 10 lb up at -1-11-5 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Concentrated Loads (lb)
Vert: 1=-44(F=-22, B=-22)
Trapezoidal Loads (plf)
Vert: 1=-0(F=35, B=35)-to-6=-29(F=21, B=21), 6=0(F=35, B=35)-to-2=-7(F=31, B=31), 2=-7(F=31, B=31)-to-3=-50(F=10, B=10), 5=-2(F=9, B=9)-to-4=-14(F=3, B=3)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874042
400393	J22	Jack-Open	1	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:52 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-RFC6dJPjtjBYhloFsAbWVispFzG2f7xn45qxlz11QT

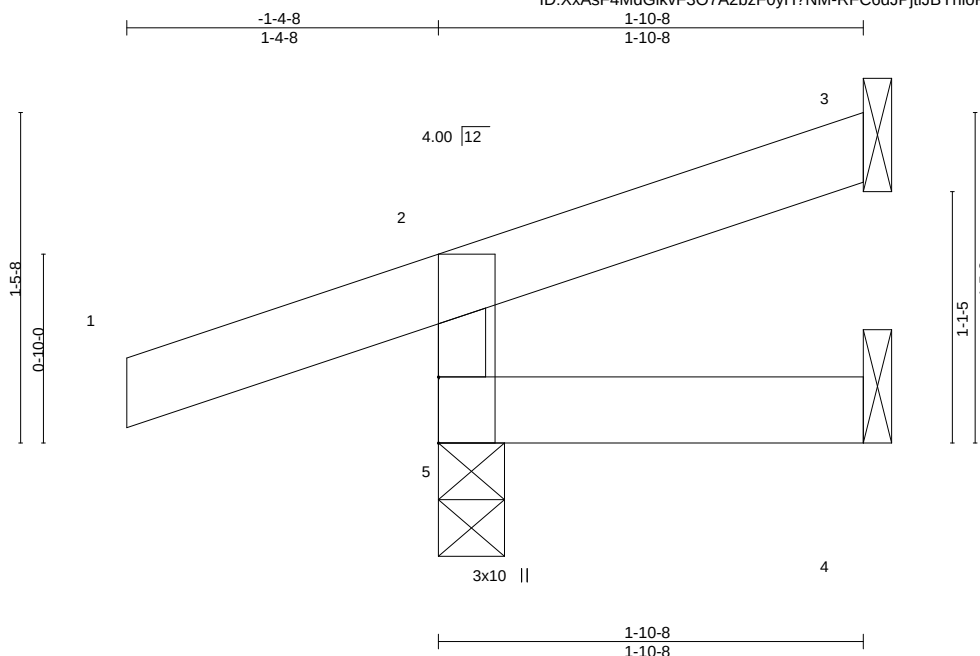

Scale = 1:10.2

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 6 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-10-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=41(LC 4)
Max Uplift 5=-89(LC 4), 3=-20(LC 8)
Max Grav 5=226(LC 1), 3=25(LC 1), 4=31(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 89 lb uplift at joint 5 and 20 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874043
400393	J23	Diagonal Hip Girder	1	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:53 2020 Page 1
ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-vRmVqfQLe0R2ArK?pahq2jFv5e9Rn6N40kqNTkz11QS



Scale = 1:19.6

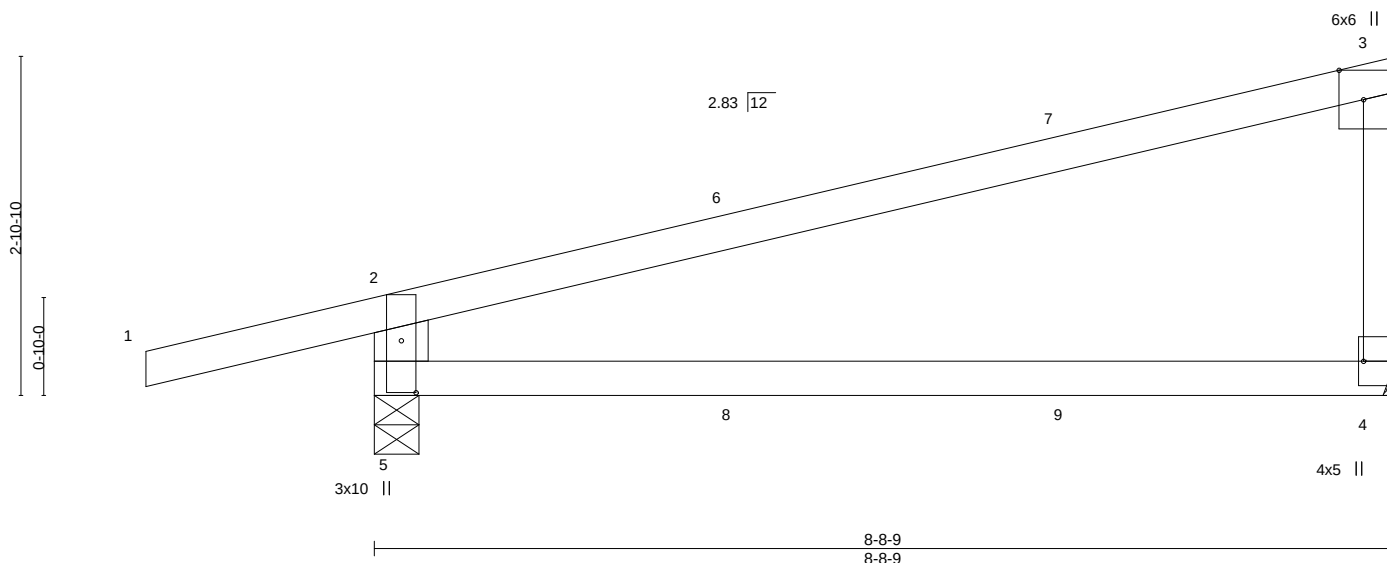


Plate Offsets (X,Y)-- [3:0-3-0,Edge], [4:Edge,0-3-8], [5:0-5-5,0-1-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.69	Vert(LL)	-0.18	4-5	>543	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.67	Vert(CT)	-0.39	4-5	>260	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.05	4-5	>999	240	Weight: 26 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x6 SPF No.2 *Except*
3-4: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-9, 4=Mechanical
Max Horz 5=117(LC 7)
Max Uplift 5=-174(LC 4), 4=-88(LC 8)
Max Grav 5=564(LC 1), 4=399(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-496/237, 3-4=-279/136

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 174 lb uplift at joint 5 and 88 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 28 lb up at 3-1-12, 68 lb down and 28 lb up at 3-1-12, and 95 lb down and 66 lb up at 5-11-11, and 95 lb down and 66 lb up at 5-11-11 on top chord, and 3 lb down and 3 lb up at 3-1-12, 3 lb down and 3 lb up at 3-1-12, and 24 lb down at 5-11-11, and 24 lb down at 5-11-11 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 4-5=-20
Concentrated Loads (lb)
Vert: 7=-39(F=-20, B=-20) 8=5(F=3, B=3) 9=-27(F=-14, B=-14)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874044
400393	J24	Diagonal Hip Girder	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:54 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-OdJt2?QzPJZvn?vBNHC3bwo3j2XEWZdEFOax0Az11QR

-2-7-13
2-7-13

8-0-1
8-0-1

Scale = 1:19.7

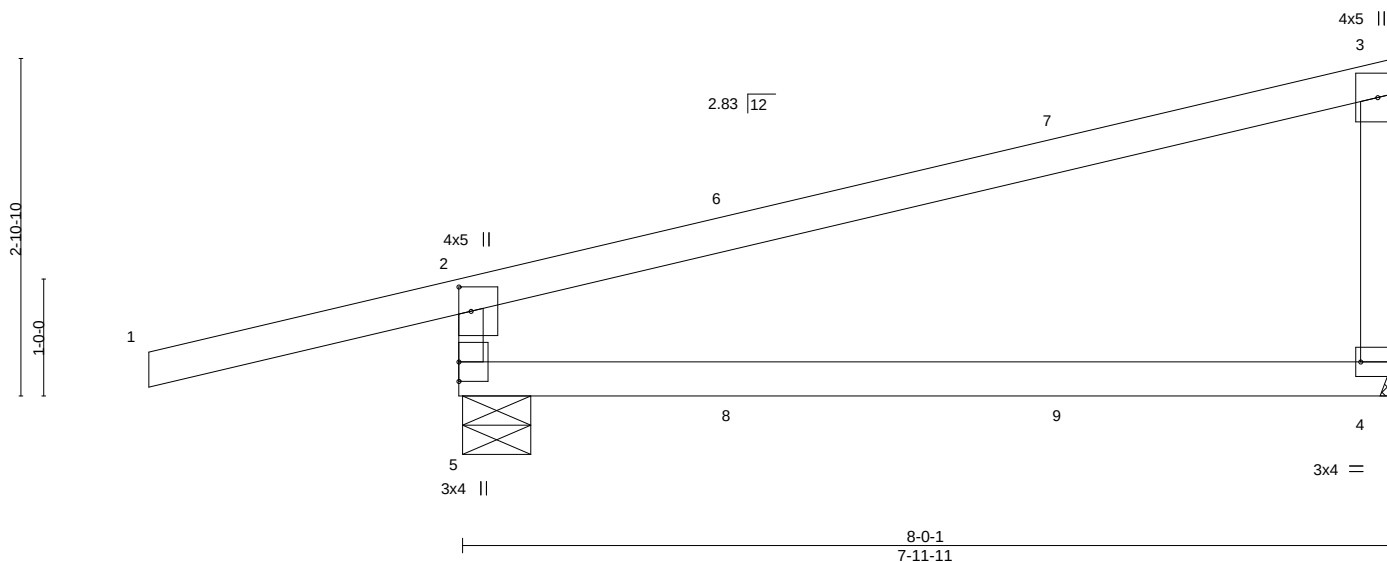


Plate Offsets (X,Y)--		[2:0-2-8,0-1-4], [4:Edge,0-1-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.76
TCDL 10.0	Lumber DOL	1.15	BC 0.57
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R
			DEFL.
			in (loc) l/defl L/d
			Vert(LL) -0.15 4-5 >641 360
			Vert(CT) -0.29 4-5 >322 240
			Horz(CT) 0.00 4 n/a n/a
			Wind(LL) -0.03 4-5 >999 240
			PLATES
			MT20
			GRIP
			197/144
			Weight: 25 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
3-4: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-7-0, 4=Mechanical
Max Horz 5=119(LC 7)
Max Uplift 5=-181(LC 4), 4=-65(LC 8)
Max Grav 5=559(LC 1), 4=326(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-492/233

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 181 lb uplift at joint 5 and 65 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 66 lb down and 119 lb up at 2-5-4, 68 lb down and 28 lb up at 2-5-4, and 84 lb down and 56 lb up at 5-3-3, and 95 lb down and 66 lb up at 5-3-3 on top chord, and 4 lb down and 7 lb up at 2-5-4, 3 lb down and 3 lb up at 2-5-4, and 18 lb down at 5-3-3, and 24 lb down at 5-3-3 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S)

- Standard
- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-2=-70, 2-3=-70, 4-5=-20
- Concentrated Loads (lb)
- Vert: 6=32(F) 7=-20(B) 8=10(F=7, B=3) 9=-16(F=-2, B=-14)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874045
400393	J25	Jack-Closed	11	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:55 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-sqtFFLRbAdhmp9UNx_jl78KljSxYF0tNT2JUydz11QQ

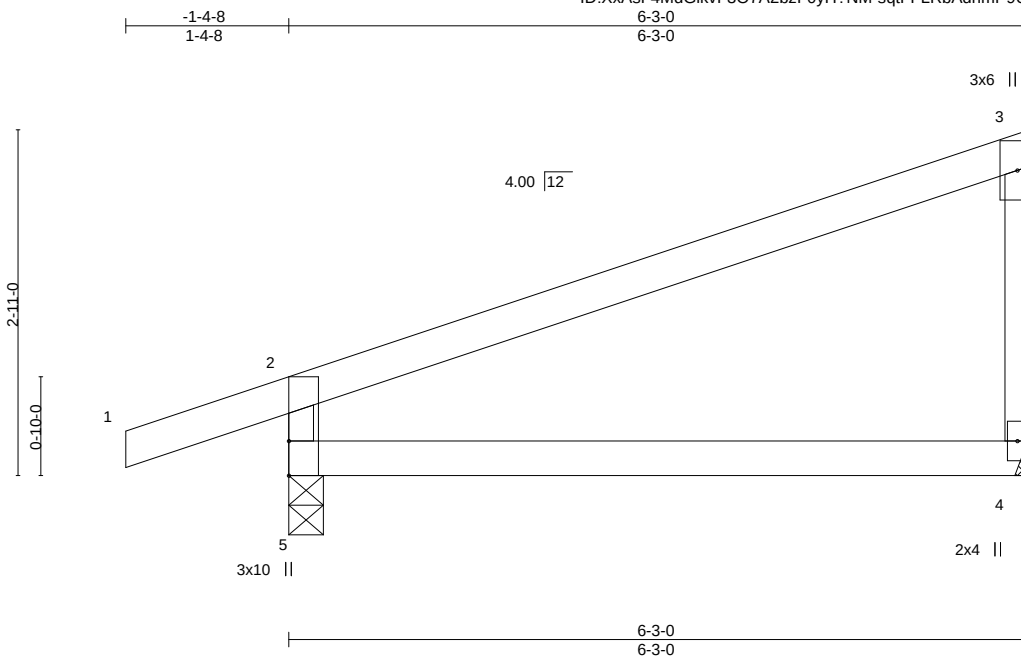

Scale = 1:19.4

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.49	Vert(LL)	-0.06	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.31	Vert(CT)	-0.11	4-5	>636	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240		
									Weight: 19 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 4=Mechanical
Max Horz 5=92(LC 7)
Max Uplift 5=-57(LC 4), 4=-18(LC 8)
Max Grav 5=388(LC 1), 4=259(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-340/98

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 57 lb uplift at joint 5 and 18 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874046
400393	J26	Jack-Open	3	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:55 2020 Page 1
ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-sqtFFLRbAdhmp9UNx_jl78KM_Sz6F0tNT2JUYdz11QQ

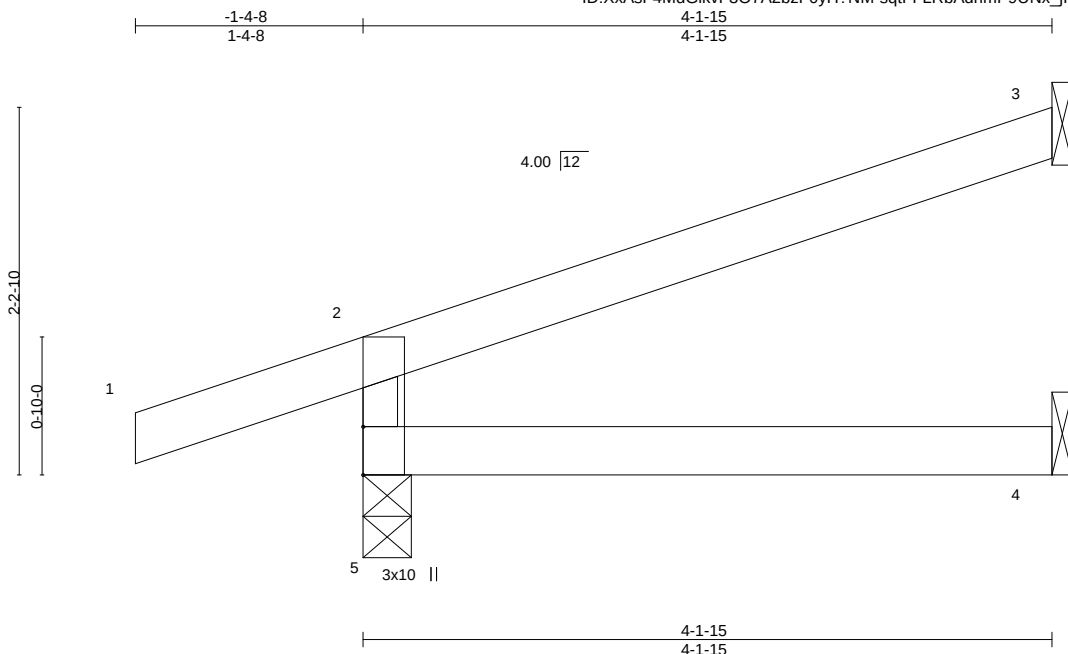

Scale = 1:13.9

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.21	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.14	Vert(CT)	-0.03	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240		
									Weight: 12 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-1-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=72(LC 4)
Max Uplift 5=90(LC 4), 3=59(LC 8)
Max Grav 5=302(LC 1), 3=119(LC 1), 4=75(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-265/122

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 90 lb uplift at joint 5 and 59 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J27	Truss Type Jack-Open	Qty 3	Ply 1	Lot 18 HT Job Reference (optional)	I41874047
---------------	--------------	-------------------------	----------	----------	---------------------------------------	-----------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:56 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-K0RdThSDxxpc1J3ZUiEXgLTyosL6_T6Xi3243z11QP

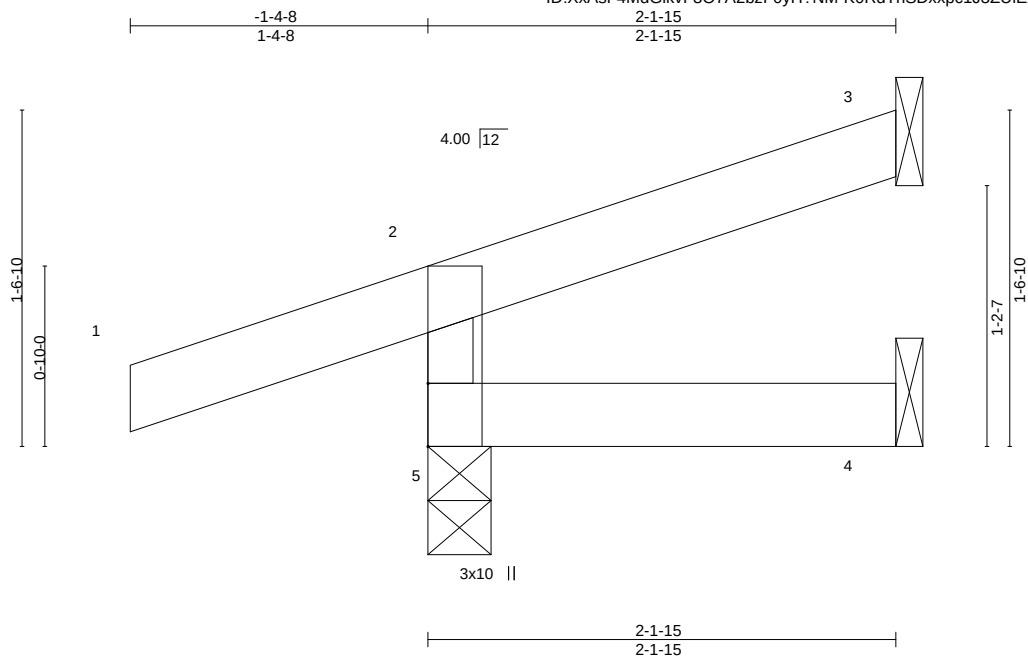

Scale = 1:10.6

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	5	>999	360	MT20
BCLL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	-0.00	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	
								Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-1-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=44(LC 4)
Max Uplift 5=87(LC 4), 3=25(LC 8)
Max Grav 5=232(LC 1), 3=38(LC 1), 4=36(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 5 and 25 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J28	Truss Type Jack-Open	Qty 1	Ply 1	Lot 18 HT Job Reference (optional)	I41874048
---------------	--------------	-------------------------	----------	----------	---------------------------------------	-----------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:57 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-oc??g1TriExTeTem2PmmDZQhdGgCjwMgxMobdVz11QO

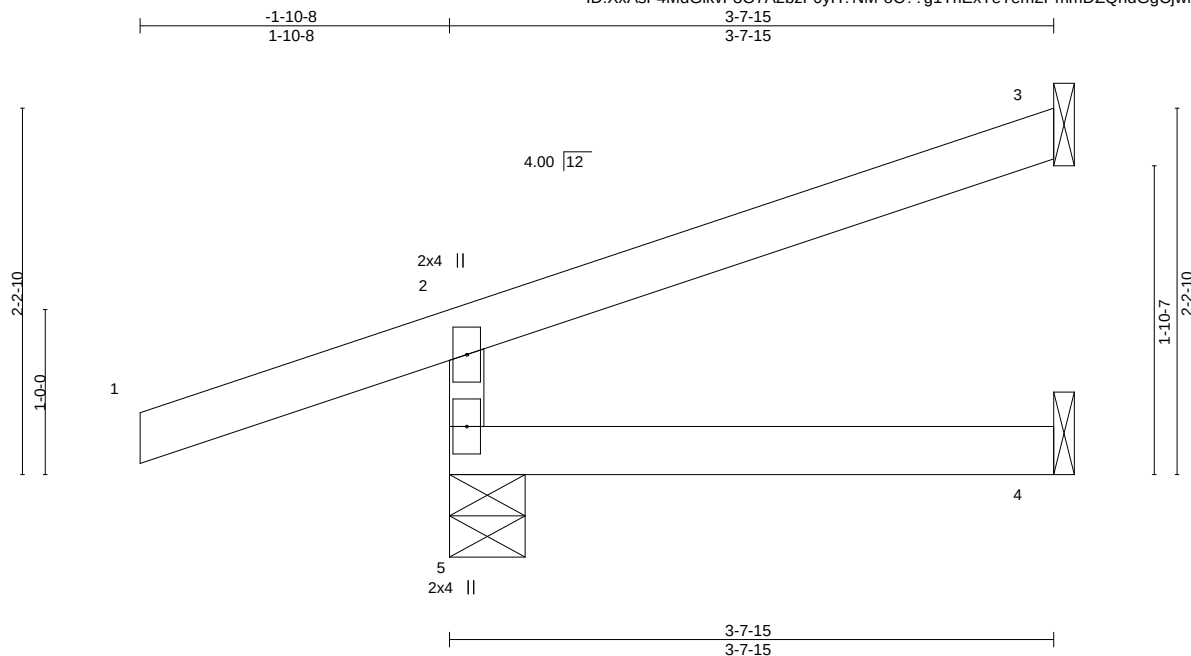

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.10	Vert(CT)	-0.01	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240		
									Weight: 11 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-7-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-5-8, 3=Mechanical, 4=Mechanical
Max Horz 5=71(LC 4)
Max Uplift 5=-116(LC 4), 3=-49(LC 8)
Max Grav 5=335(LC 1), 3=88(LC 1), 4=65(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-295/143

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 116 lb uplift at joint 5 and 49 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874049
400393	J29	Jack-Open	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:57 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-oc??g1TriExTeTem2PmmDZQhdGhBjwMgxMobdVz11QO

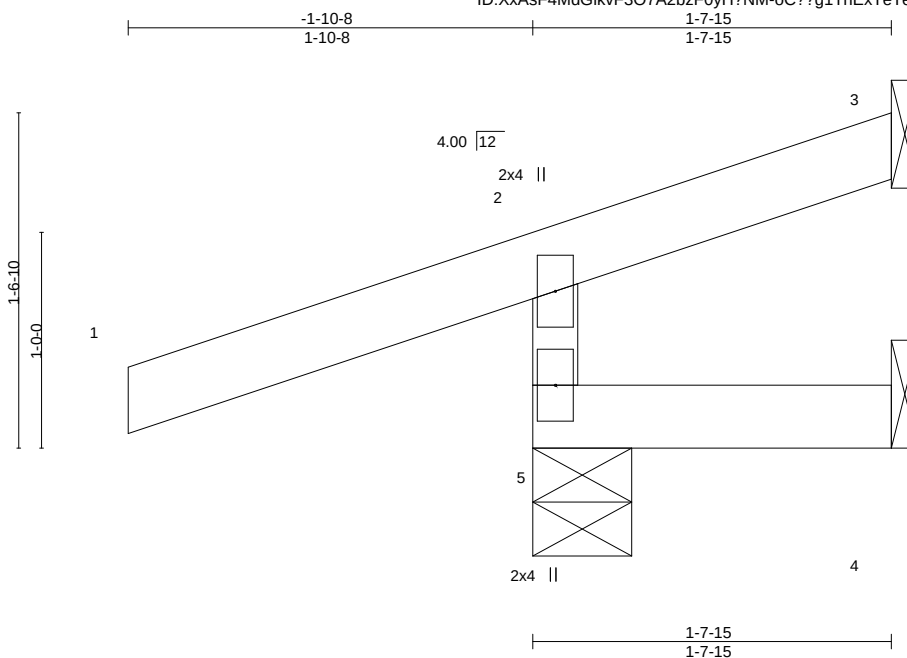

Scale = 1:10.7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	0.00	5	>999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	0.00	5	>999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-7-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-5-8, 3=Mechanical, 4=Mechanical
Max Horz 5=45(LC 5)
Max Uplift 5=-130(LC 4), 3=-20(LC 1)
Max Grav 5=297(LC 1), 3=14(LC 4), 4=26(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-267/142

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 130 lb uplift at joint 5 and 20 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:59 2020 Page 1

Scale = 1:15.3

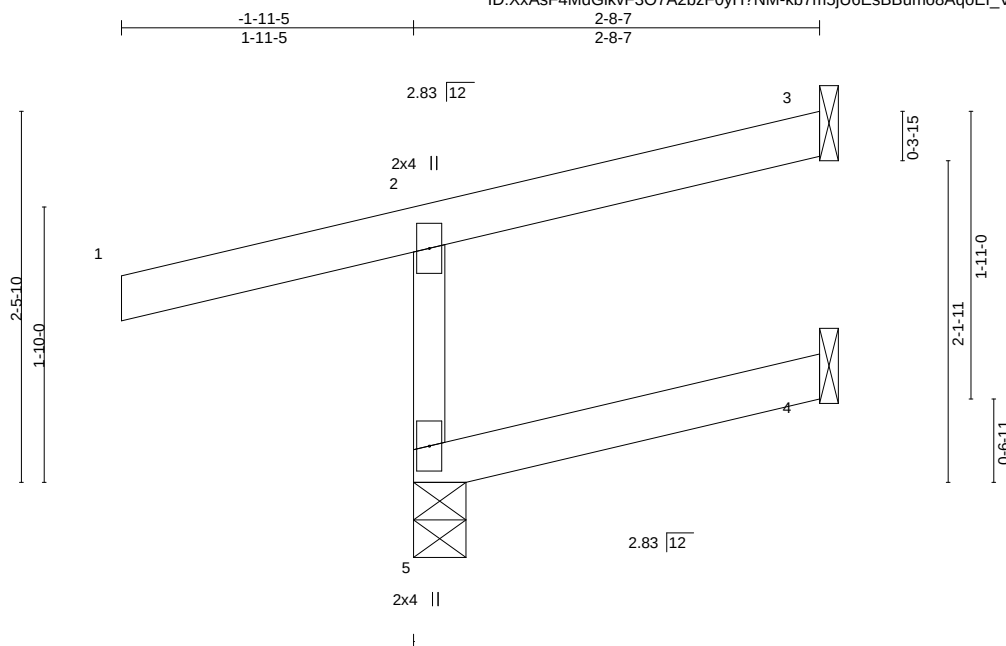

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2

TOP CHORD	Structural wood sheathing directly applied or 2-8-7 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 5=0-4-3, 3=Mechanical, 4=Mechanical
 Max Horz 5=56(LC 7)
 Max Uplift 5=-106(LC 6), 3=-46(LC 12), 4=-5(LC 7)
 Max Grav 5=165(LC 1), 3=7(LC 4), 4=34(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCdL=6.0psf; BCdL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 106 lb uplift at joint 5, 46 lb uplift at joint 3 and 5 lb uplift at joint 4.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 31 lb down and 11 lb up at -1-11-5, and 31 lb down and 11 lb up at -1-11-5 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Concentrated Loads (lb)
Vert: 1=-49(F=-24, B=-24)
Trapezoidal Loads (plf)
Vert: 1=-0(F=35, B=35)-to-2=-36(F=17, B=17), 2=-4(F=33, B=33)-to-3=-49(F=10, B=10), 5=-0(F=10, B=10)-to-4=-14(F=3, B=3)



July 1, 2020



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601.




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874051
400393	J31	Jack-Open	5	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:57:59 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-kb7m5jU6EsBBumo8AqoEI_V313MNBqsZogHihOz11QM

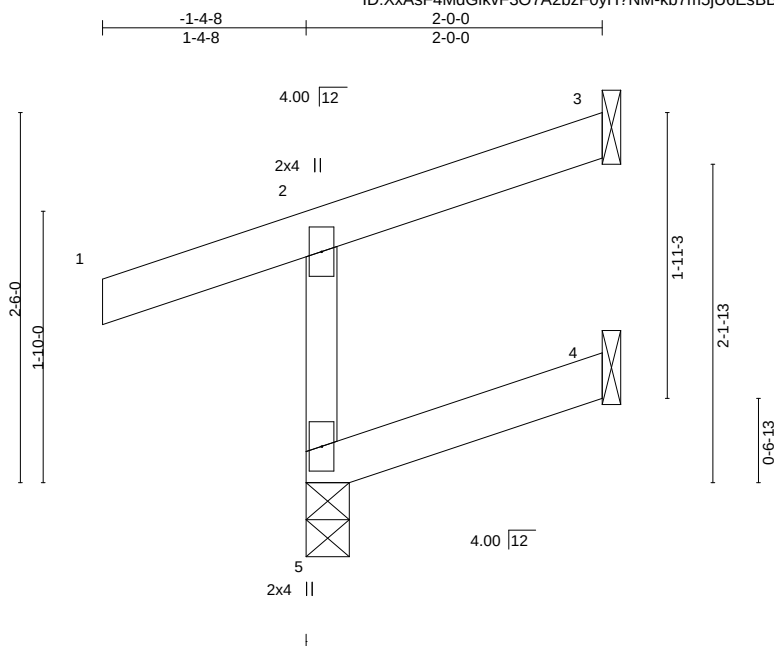

Scale = 1:15.6

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	0.00	5	>999	240	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.02	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=63(LC 5)
Max Uplift 5=69(LC 4), 3=31(LC 8), 4=10(LC 5)
Max Grav 5=229(LC 1), 3=29(LC 1), 4=36(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 69 lb uplift at joint 5, 31 lb uplift at joint 3 and 10 lb uplift at joint 4.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874052
400393	J32	Diagonal Hip Girder	2	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:00 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-Cnh8I3Vvk?9J2VwNLjyJTqB2A_TeLwH66dK1FDqz11QL

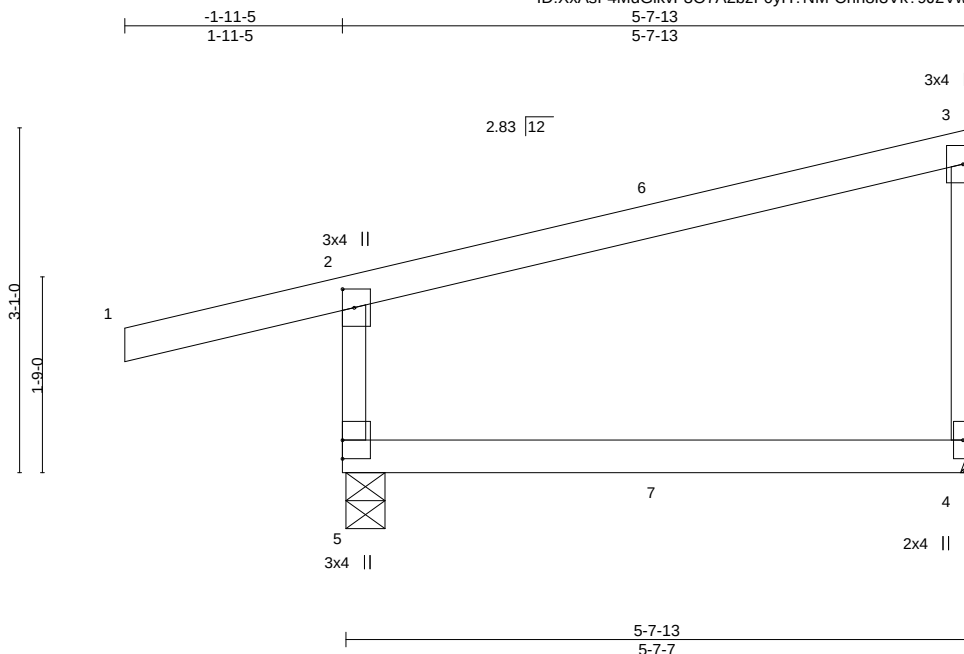

Scale = 1:20.6

Plate Offsets (X,Y)--		[2:0-2-0,0-1-4]									
LOADING	(psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC 0.39	Vert(LL)	-0.04	4-5	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC 0.27	Vert(CT)	-0.07	4-5	>874	240		
BCLL	0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.03	4-5	>999	240	Weight: 18 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-7-13 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-3, 4=Mechanical
Max Horz 5=121(LC 5)
Max Uplift 5=-158(LC 4), 4=-62(LC 8)
Max Grav 5=414(LC 1), 4=217(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-363/178

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 158 lb uplift at joint 5 and 62 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 73 lb down and 39 lb up at 2-10-15, and 71 lb down and 29 lb up at 2-10-15 on top chord, and 12 lb down and 16 lb up at 2-10-15, and 11 lb down and 18 lb up at 2-10-15 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 4-5=-20
Concentrated Loads (lb)
Vert: 7=2(F=1, B=2)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874053
400393	J33	Jack-Open	3	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:01 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-g_EWWOWMmTRv74xXHfQINPaOct0WfkMGs_mpmGz11QK

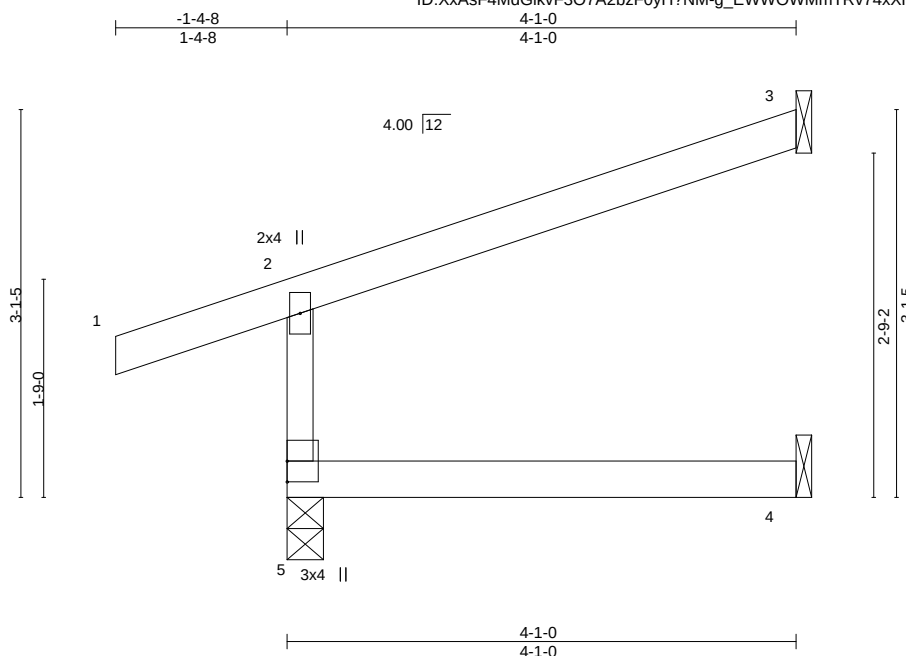

Scale = 1:18.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.14	Vert(CT)	-0.03	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.04	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	Weight: 12 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-1-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=79(LC 5)
Max Uplift 5=-75(LC 4), 3=-67(LC 8)
Max Grav 5=299(LC 1), 3=116(LC 1), 4=75(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-261/112

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 75 lb uplift at joint 5 and 67 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874054
400393	J34	Jack-Open	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:02 2020 Page 1

ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-9AoujkX_XnZmlEWjrLxwc7aHHOCOBcP4eWMljz11QJ

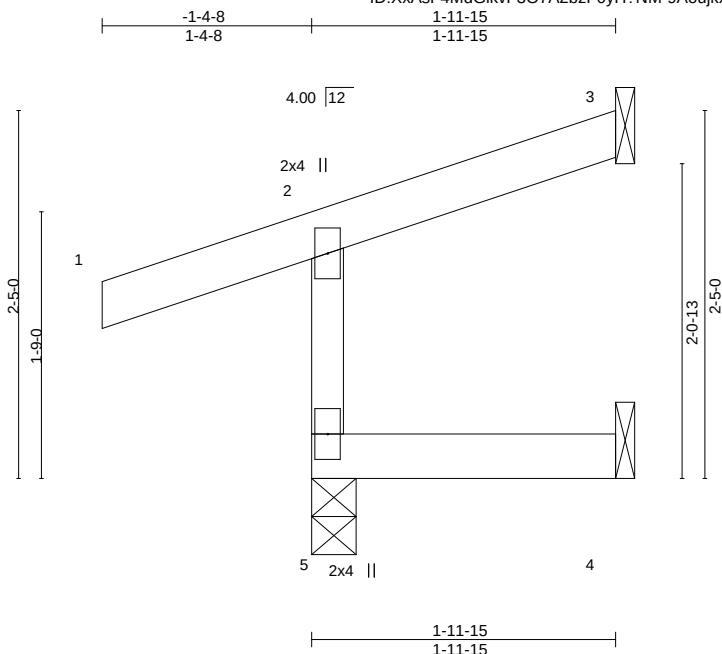

Scale = 1:15.1

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	0.00	5	>999	240	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-11-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=60(LC 5)
Max Uplift 5=-71(LC 4), 3=-30(LC 8), 4=-8(LC 5)
Max Grav 5=229(LC 1), 3=29(LC 1), 4=36(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 71 lb uplift at joint 5, 30 lb uplift at joint 3 and 8 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874055
400393	J35	Jack-Open	2	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:02 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-9AoujkX_XnZmIEWjrLxwc7bxHODOBcP4eWMljz11QJ

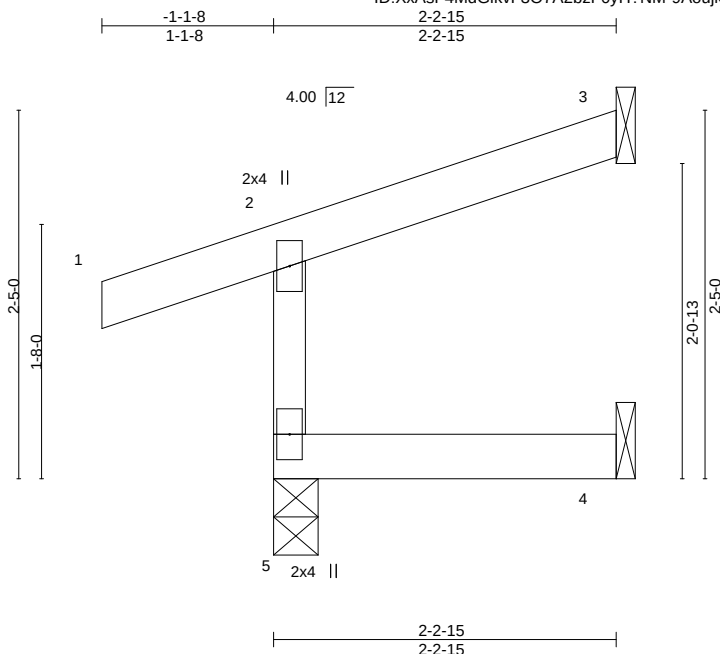

Scale = 1:15.1

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.10	Vert(LL)	-0.00	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240	Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=59(LC 5)
Max Uplift 5=-56(LC 4), 3=-36(LC 8), 4=-4(LC 5)
Max Grav 5=205(LC 1), 3=49(LC 1), 4=40(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 56 lb uplift at joint 5, 36 lb uplift at joint 3 and 4 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874056
400393	J36	Diagonal Hip Girder	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:03 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-dMMHx4Xcl4hdMO5wPgtASqghJgjf7erZJIFvq9z11Ql

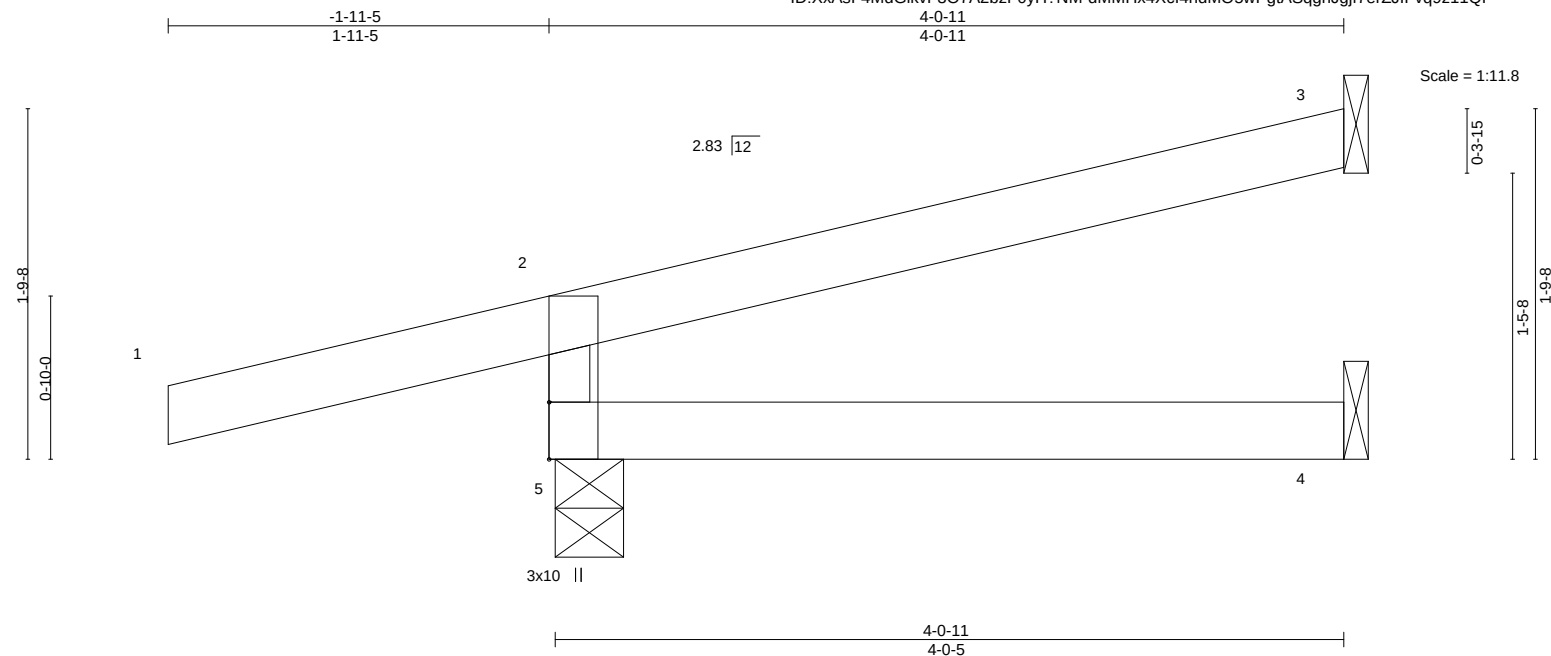

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.38	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.10	Vert(CT)	-0.01	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	Weight: 12 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-4-3, 3=Mechanical, 4=Mechanical
Max Horz 5=54(LC 12)
Max Uplift 5=-101(LC 4), 3=-51(LC 12)
Max Grav 5=216(LC 1), 3=59(LC 1), 4=58(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 101 lb uplift at joint 5 and 51 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 47 lb down and 16 lb up at -1-11-5, and 47 lb down and 16 lb up at -1-11-5 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Concentrated Loads (lb)
Vert: 1=-73(F=-36, B=-36)
Trapezoidal Loads (plf)
Vert: 1=-0(F=35, B=35)-to-2=-36(F=17, B=17), 2=-2(F=34, B=34)-to-3=-71(F=-1, B=-1), 5=-0(F=10, B=10)-to-4=-20(F=-0, B=-0)



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874058
400393	J38	Jack-Open	2	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:04 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-5Zwf8QYE2OpU_Xg6yNOP?1Cvn43Ss55iYy?TMbz11QH

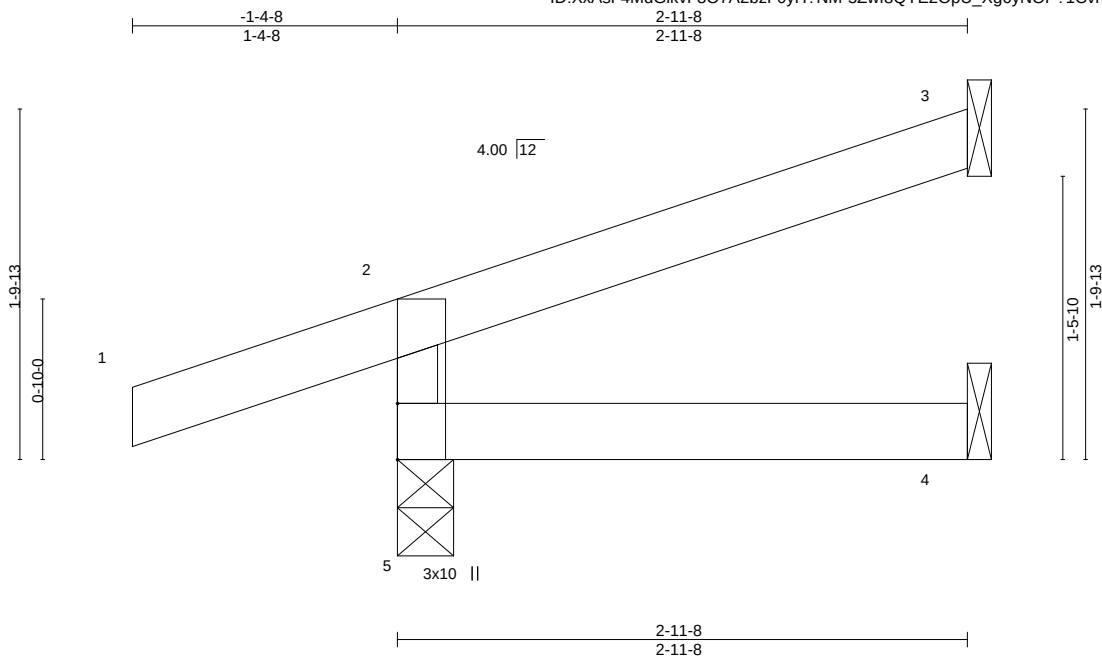

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	4-5	>999	360	MT20
BCLL 10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	-0.01	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240	
								Weight: 9 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-11-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=55(LC 4)
Max Uplift 5=87(LC 4), 3=40(LC 8)
Max Grav 5=257(LC 1), 3=73(LC 1), 4=52(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 5 and 40 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874059
400393	J39	Jack-Open	5	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:05 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-ZIU1MmZtpixLchFIW5veXF4XUOgbXLrmck0v2z11QG

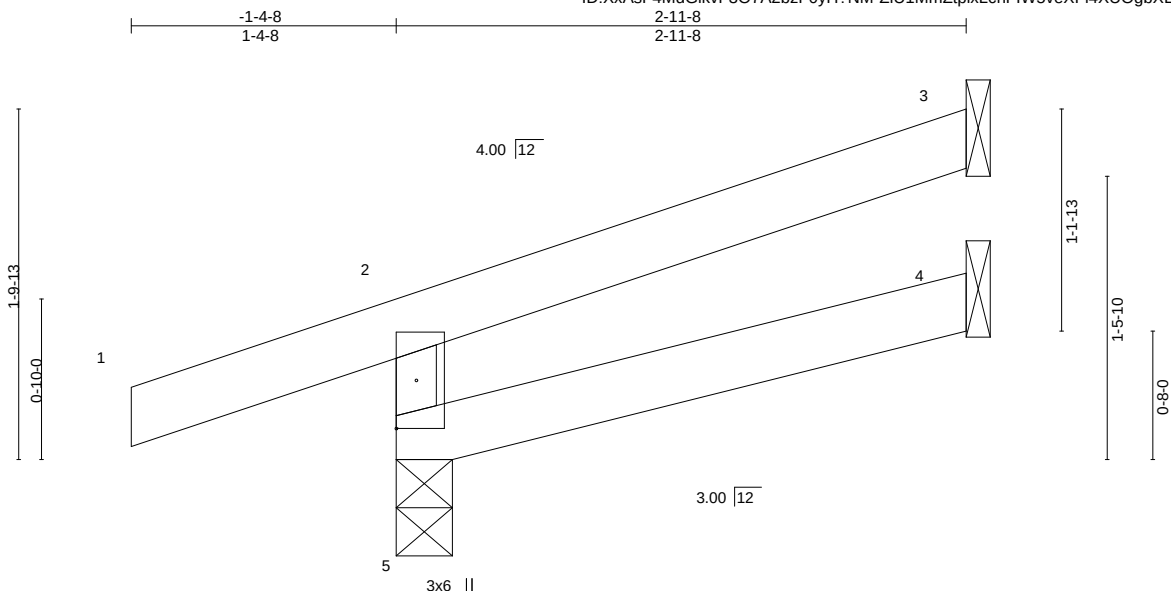

Scale: 1"=1'

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	-0.01	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240	
									Weight: 9 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-11-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=55(LC 4)
Max Uplift 5=86(LC 4), 3=40(LC 8)
Max Grav 5=257(LC 1), 3=73(LC 1), 4=52(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 86 lb uplift at joint 5 and 40 lb uplift at joint 3.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

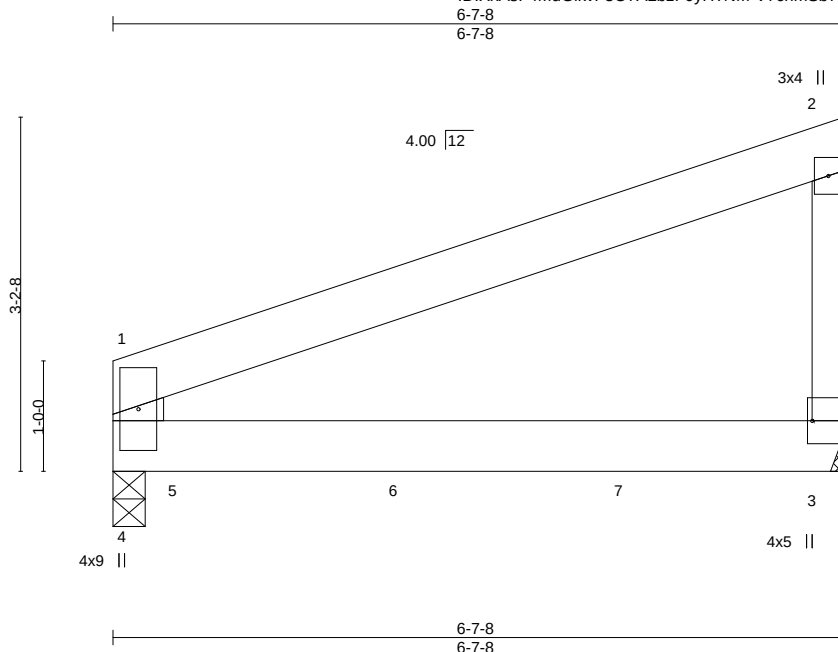


Plate Offsets (X,Y)-- [3:Edge,0-3-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.43	Vert(LL)	-0.08	3-4	>963	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.76	Vert(CT)	-0.14	3-4	>520	240		
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-R		Wind(LL)	0.05	3-4	>999	240	Weight: 55 lb	FT = 10%

LUMBER-		BRACING-	
TOP CHORD	2x6 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x6 SPF No.2		
WEBS	2x6 SPF No.2 *Except*	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
	2-3: 2x4 SPF No.2		

REACTIONS. (size) 4=0-3-8, 3=Mechanical
Max Horz 4=116(LC 24)
Max Uplift 4=-253(LC 4), 3=-115(LC 8)
Max Grav 4=1473(LC 1), 3=1050(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-261/25

NOTES-

- 1) 2-ply truss to be connected together as follows:
Top chords connected with 10d (0.131"x3") nails as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected with 10d (0.131"x3") nails as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
- 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 3) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDF=6.0psf; BCDF=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 253 lb uplift at joint 4 and 115 lb uplift at joint 3.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 667 lb down and 197 lb up at 0-8-4, and 648 lb down and 47 lb up at 2-8-4, and 646 lb down and 40 lb up at 4-8-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 3-4=-20



July 1, 2020

Continued on page 2



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCS Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601.



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	J41	Jack-Closed Girder	1	2	I41874060
					Job Reference (optional)

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 5=-667(B) 6=-648(B) 7=-646(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874061
400393	J42	Diagonal Hip Girder	1	1		


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:08 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-zKAA_obl6dKwT9_tBDSL9tNTThOooovITazgVMz11QD

2-7-13	3-9-14	5-3-0	9-2-15
2-7-13	3-9-14	1-5-2	3-11-15

Scale = 1:22.5

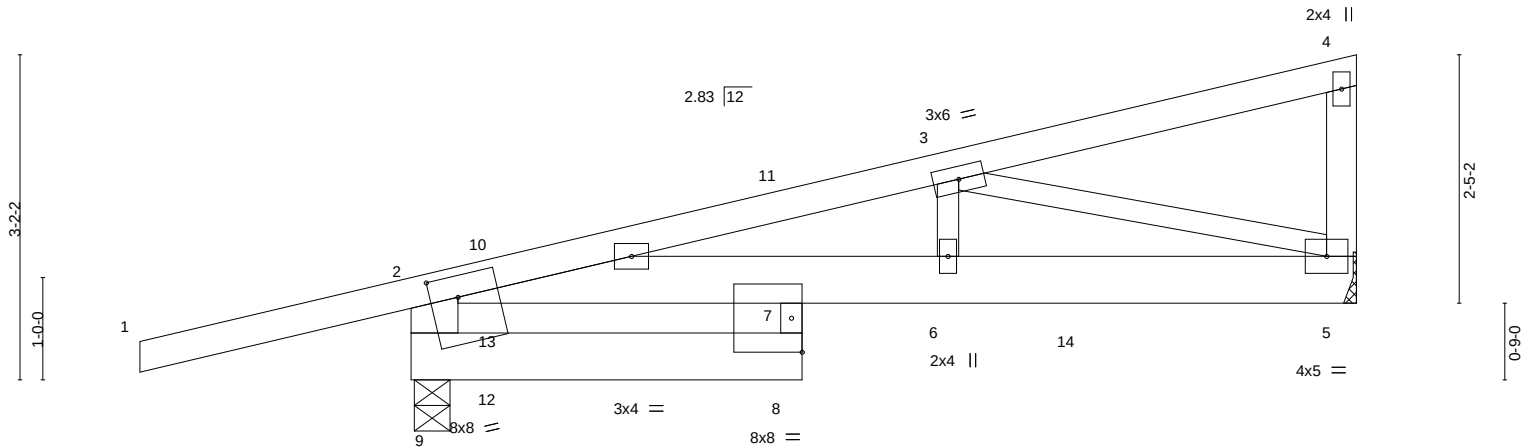

0-0-6	3-9-14	5-3-0	9-2-15
0-0-6	3-9-8	1-5-2	3-11-15

Plate Offsets (X,Y)-- [9:0-3-4,0-2-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.68	Vert(LL)	-0.03	6	>999	360	MT20	197/144
TCCL 10.0	Lumber DOL	1.15	BC 0.23	Vert(CT)	-0.05	5-6	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.42	Horz(CT)	0.01	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.03	6	>999	240	Weight: 48 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x6 SPF No.2 *Except*
 2-5: 2x6 SP DSS
 WEBS 2x3 SPF No.2 *Except*
 2-9: 2x6 SPF No.2, 4-5: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-3-8 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 9=0-4-3, 5=Mechanical
 Max Horz 9=116(LC 5)
 Max Uplift 9=-217(LC 4), 5=-155(LC 8)
 Max Grav 9=688(LC 1), 5=580(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-9=-642/231, 2-3=-1129/275
 BOT CHORD 2-7=-281/1062, 6-7=-281/1063, 5-6=-281/1063
 WEBS 3-5=-1051/297, 3-6=-40/266

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 217 lb uplift at joint 9 and 155 lb uplift at joint 5.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 77 lb down and 138 lb up at 0-10-3, and 78 lb down and 48 lb up at 3-8-2, and 70 lb down and 28 lb up at 3-8-2 on top chord, and 3 lb down and 8 lb up at 0-10-3, 12 lb down and 0 lb up at 3-8-10, 6 lb down and 5 lb up at 3-8-10, and 173 lb down and 74 lb up at 6-6-1, and 135 lb down and 66 lb up at 6-6-1 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-2=-70, 2-4=-70, 8-9=-20, 5-7=-20



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874061
400393	J42	Diagonal Hip Girder	1	1	Job Reference (optional)	

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 8=5(F=0, B=5) 10=35(F) 14=-308(F=-173, B=-135)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874062
400393	J43	Jack-Closed	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:08 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-zKAA_obl6dKwT9_tBDSL9tNZrhPCousITazgVMz11QD

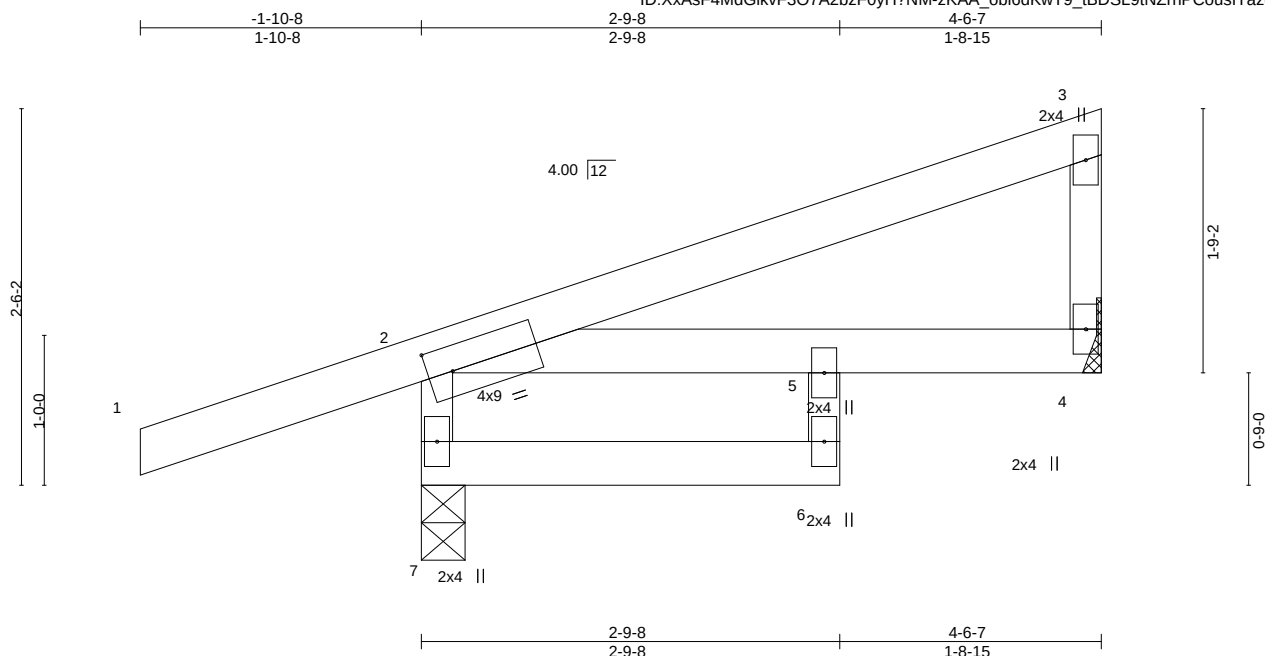


Plate Offsets (X,Y)-- [2:0-1-15,0-2-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	-0.01	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.14	Vert(CT)	-0.02	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.02	Horz(CT)	-0.01	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	5	>999	240	Weight: 18 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 7=0-3-8, 4=Mechanical
Max Horz 7=94(LC 5)
Max Uplift 7=128(LC 4), 4=37(LC 8)
Max Grav 7=365(LC 1), 4=163(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-7=-338/149

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 128 lb uplift at joint 7 and 37 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874063
400393	J44	Jack-Open	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:09 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-RWjYB7cNtwSm4JZ3lxzai5vkb5nyXLRhEiE2pz11QC

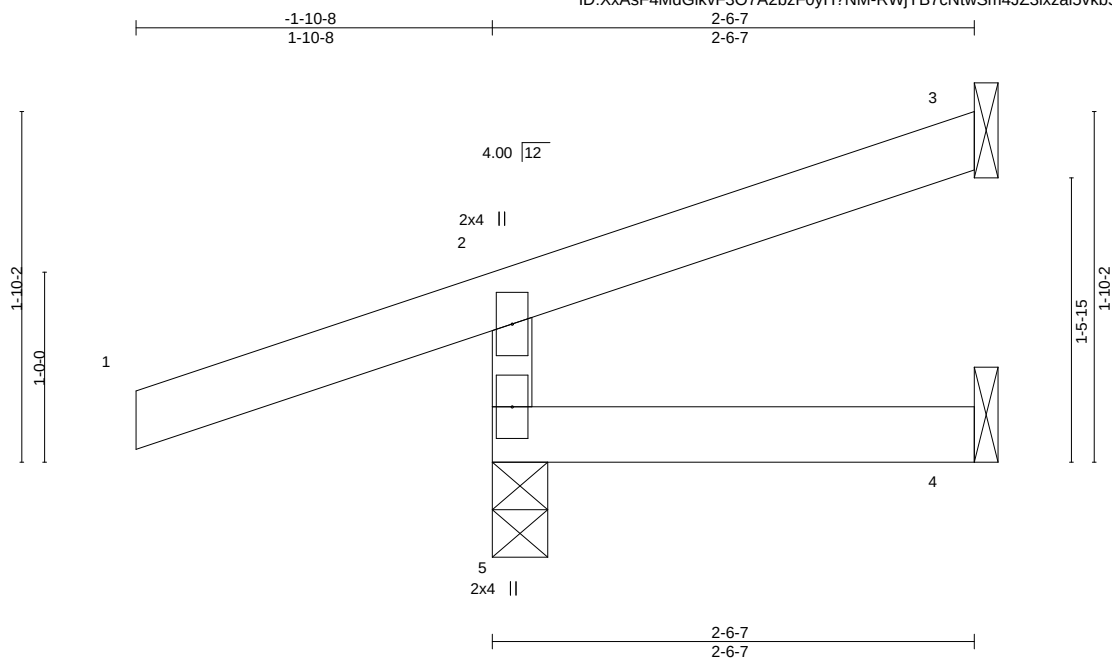

Scale = 1:12.1

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	-0.00	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	-0.00	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 9 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-6-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=56(LC 4)
Max Uplift 5=-119(LC 4), 3=-27(LC 8)
Max Grav 5=303(LC 1), 3=35(LC 1), 4=42(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-269/137

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 119 lb uplift at joint 5 and 27 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874064
400393	J45	Jack-Closed	1	1		

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:10 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-wiHwPTd?eEadiS7GJeVpEISwaV5yGoKawtSnaFz11QB

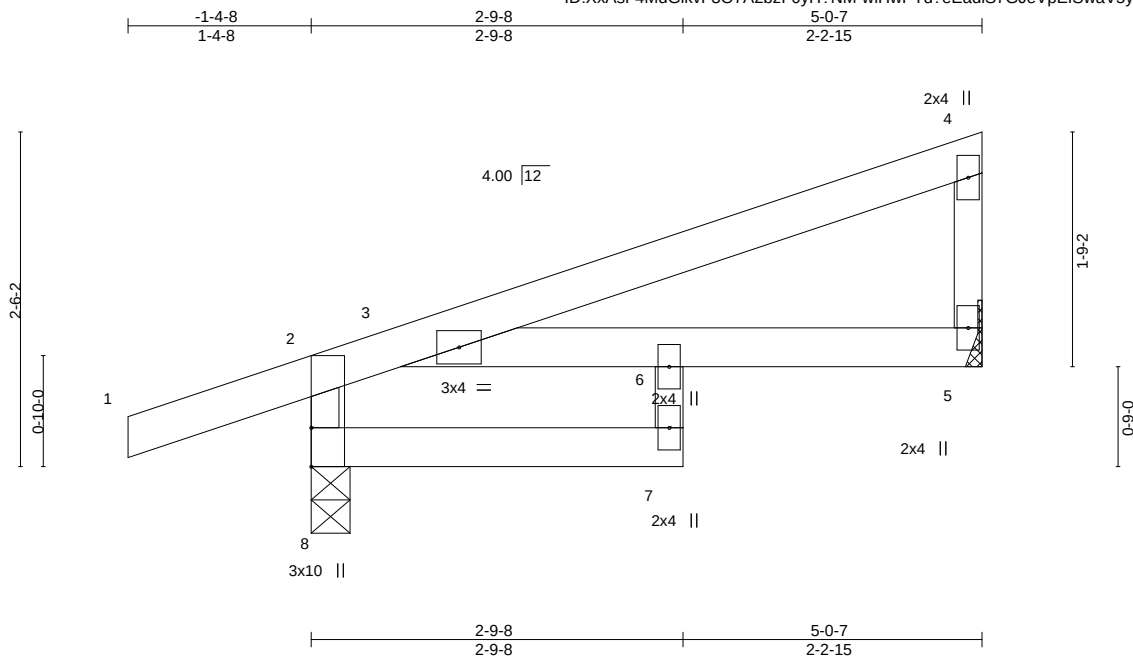

Scale = 1:17.3

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.25	Vert(LL)	-0.02	3-6	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.19	Vert(CT)	-0.04	6	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.02	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.02	3-6	>999	240	Weight: 18 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 8=0-3-8, 5=Mechanical
Max Horz 8=92(LC 5)
Max Uplift 8=-102(LC 4), 5=-46(LC 8)
Max Grav 8=337(LC 1), 5=201(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-8=-315/125

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 102 lb uplift at joint 8 and 46 lb uplift at joint 5.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874065
400393	J46	Jack-Open	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:11 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-OvrlcpdPYiUKciStM02nW?60vR1?Fqk9XBK6hz11QA

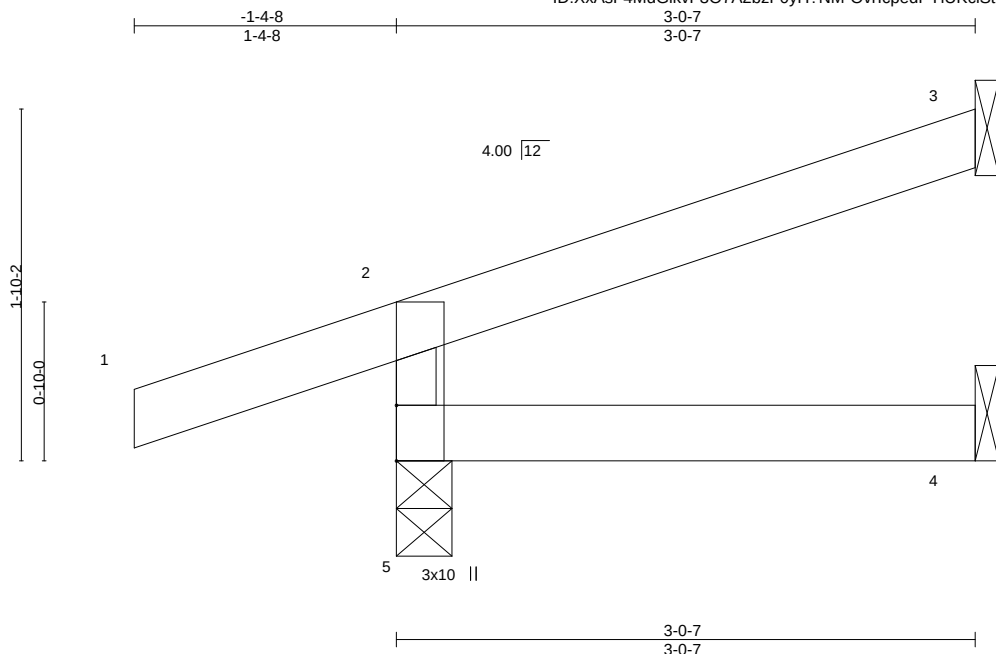

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	-0.00	4-5	>999	360	MT20	197/144
BCLL 10.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	-0.01	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240	Weight: 9 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-0-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=56(LC 4)
Max Uplift 5=-87(LC 4), 3=-41(LC 8)
Max Grav 5=259(LC 1), 3=76(LC 1), 4=53(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 87 lb uplift at joint 5 and 41 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J47	Truss Type Jack-Open	Qty 1	Ply 1	Lot 18 HT I41874066
---------------	--------------	-------------------------	----------	----------	------------------------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:11 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-OvrlcpdPYiUKciStM02nW?60vSm?Fqk9XBK6hz11QA

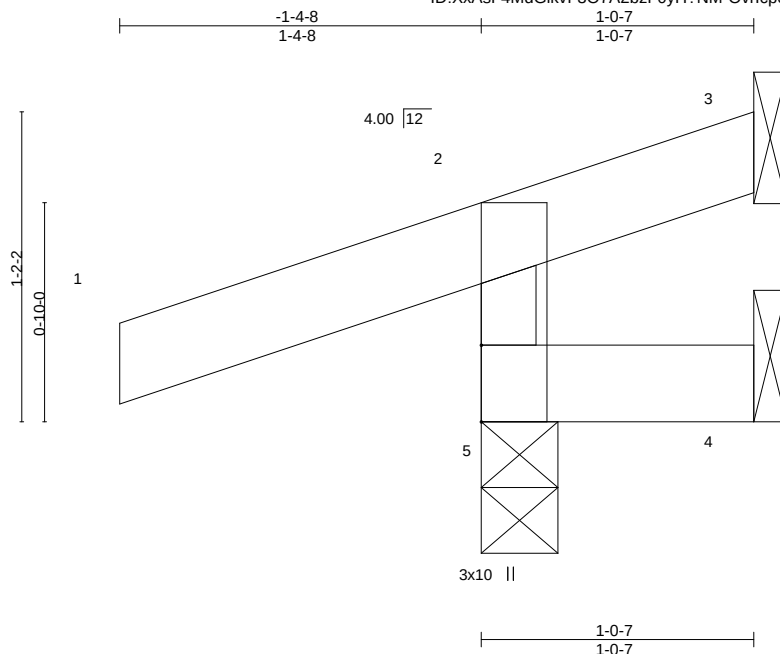

Scale = 1:8.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	0.00	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 4 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 1-0-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=32(LC 5)
Max Uplift 5=-104(LC 4), 3=-39(LC 1), 4=-3(LC 1)
Max Grav 5=228(LC 1), 3=23(LC 4), 4=14(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 104 lb uplift at joint 5, 39 lb uplift at joint 3 and 3 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 400393	Truss J48	Truss Type Jack-Closed	Qty 5	Ply 1	Lot 18 HT I41874067
---------------	--------------	---------------------------	----------	----------	------------------------

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:12 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-s5Pgq9eGARqLymHeQ3XHKjXC6JkTkirtNBxue8z11Q9

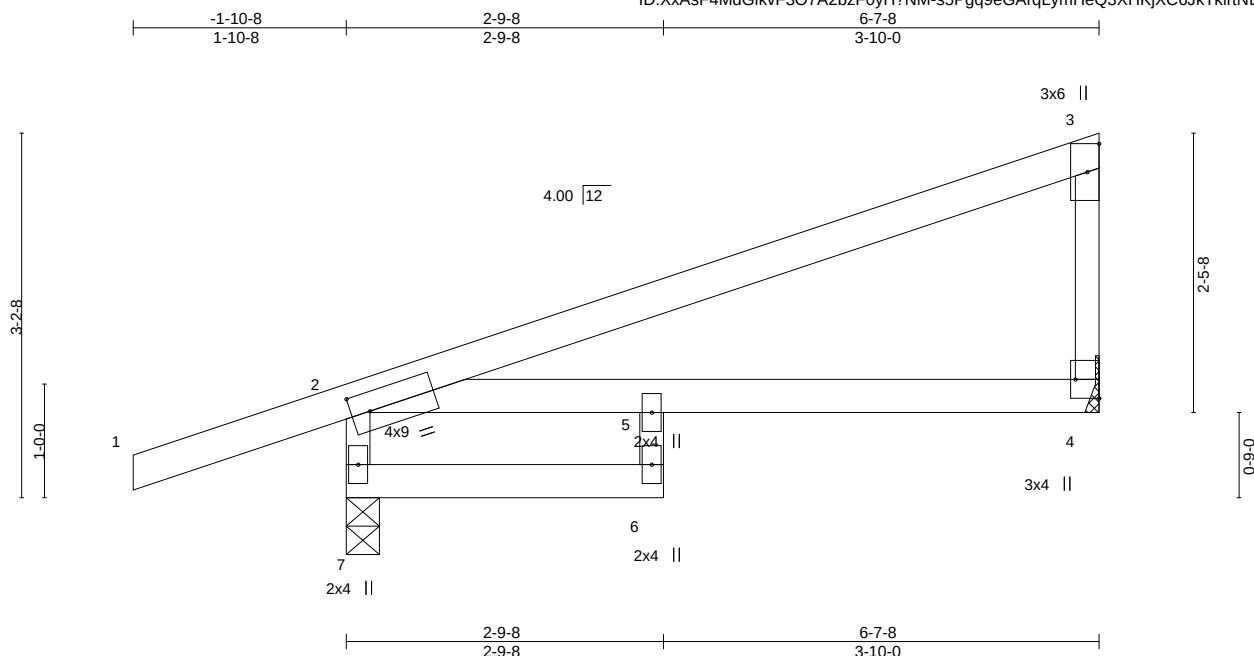

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.51	Vert(LL)	-0.06	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.31	Vert(CT)	-0.13	4-5	>593	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.04	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.03	6	>999	240	Weight: 23 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-3-8, 4=Mechanical
Max Horz 7=95(LC 5)
Max Uplift 7=-75(LC 4), 4=-19(LC 8)
Max Grav 7=449(LC 1), 4=267(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-7=-431/99

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 75 lb uplift at joint 7 and 19 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874068
400393	J49	Jack-Closed	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:12 2020 Page 1
ID:XXAsF4MdGikvF3O7A2bzF0yH?NM-s5Pgq9eGARqLymHeQ3XHKjXBSjvki4tNBxue8z11Q9

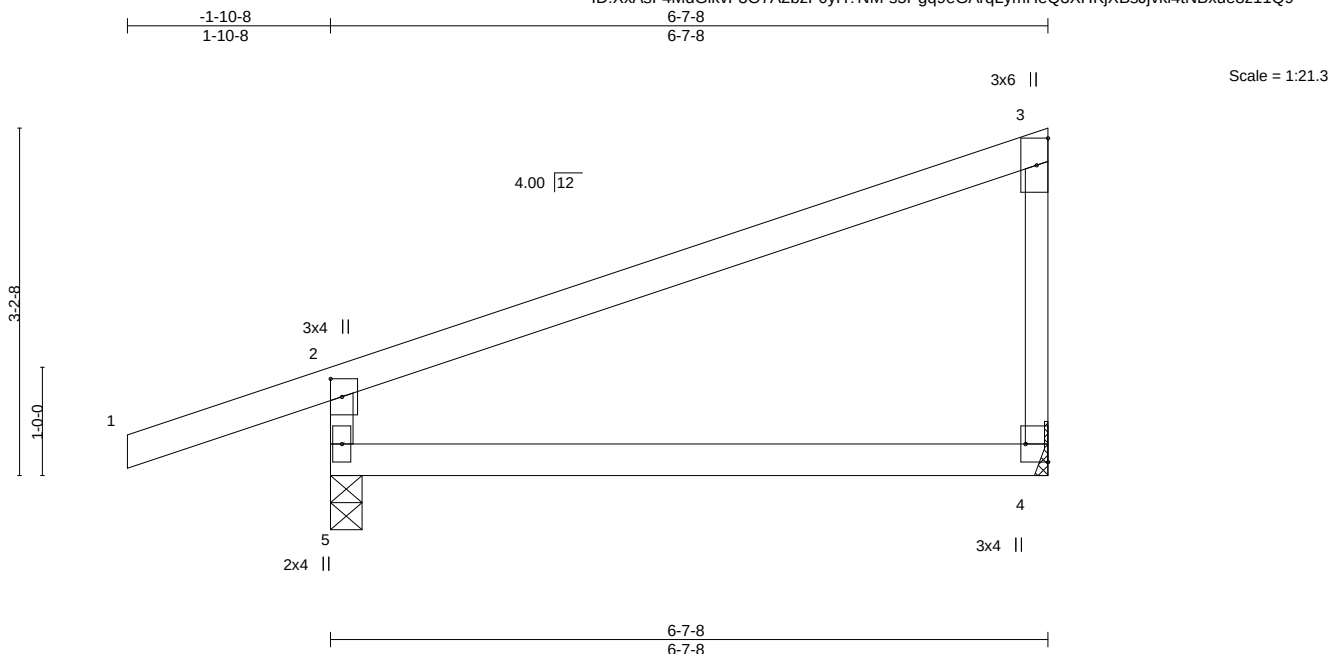


Plate Offsets (X,Y)--		[2:0-2-0,0-1-4], [4:Edge,0-2-8]								
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL 1.15		TC 0.52		Vert(LL) -0.07 4-5	>999	360	MT20	197/144
TCDL 10.0		Lumber DOL 1.15		BC 0.35		Vert(CT) -0.14 4-5	>534	240		
BCLL 0.0 *		Rep Stress Incr YES		WB 0.00		Horz(CT) 0.00 4	n/a	n/a		
BCDL 10.0		Code IRC2018/TPI2014		Matrix-R		Wind(LL) 0.01 4-5	>999	240	Weight: 20 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-3-8, 4=Mechanical
Max Horz 5=104(LC 7)
Max Uplift 5=-76(LC 4), 4=-19(LC 8)
Max Grav 5=449(LC 1), 4=267(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-394/118

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 76 lb uplift at joint 5 and 19 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	K1	Hip Girder	1	1		I41874069
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:16 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-kseBfXhmE4KnQNbPfvbDUZiyPw6rgR?Tlpv5ovz11Q5

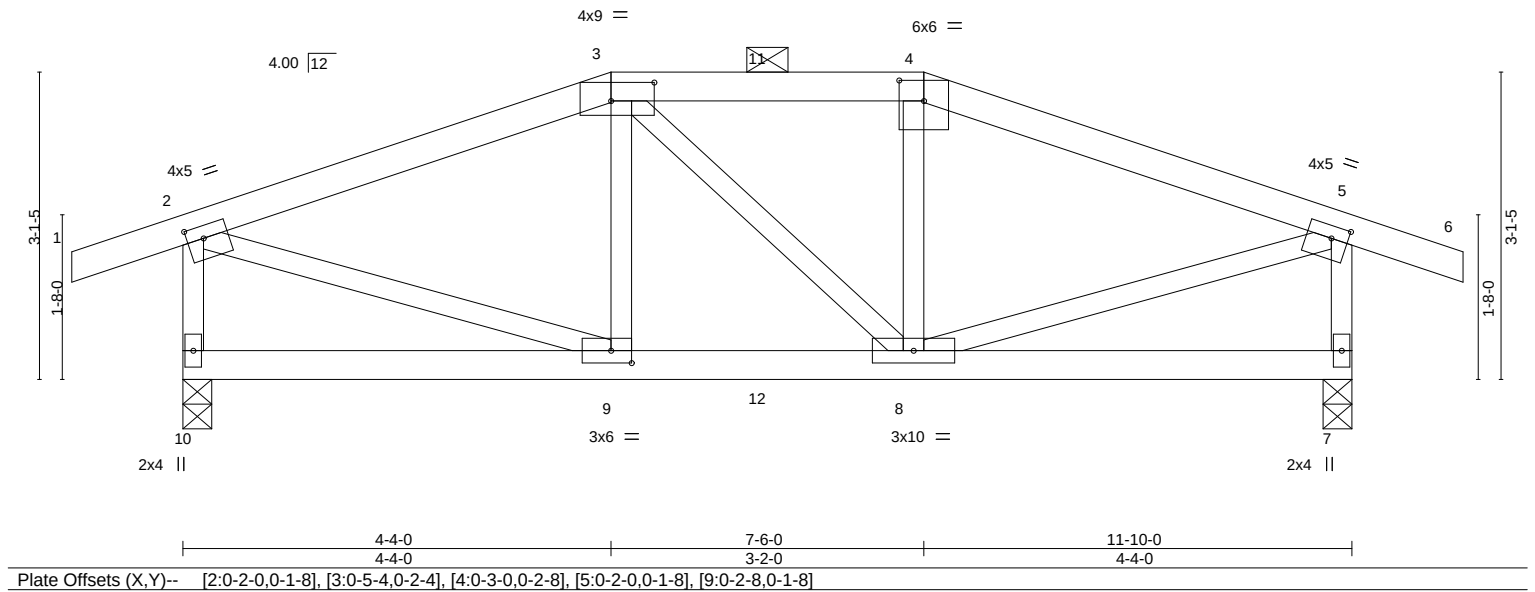



Plate Offsets (X,Y)--		[2:0-2-0,0-1-8], [3:0-5-4,0-2-4], [4:0-3-0,0-2-8], [5:0-2-0,0-1-8], [9:0-2-8,0-1-8]	
LOADING (psf)	SPACING-	CSI.	DEFL.
TCLL 25.0	Plate Grip DOL 1.15	TC 0.23	in (loc) l/defl L/d
TCDL 10.0	Lumber DOL 1.15	BC 0.28	Vert(LL) -0.02 8-9 >999 360
BCLL 0.0 *	Rep Stress Incr NO	WB 0.32	Vert(CT) -0.04 8-9 >999 240
BCDL 10.0	Code IRC2018/TPI2014	Matrix-S	Horz(CT) 0.01 7 n/a n/a
			Wind(LL) 0.02 8-9 >999 240
			PLATES MT20
			GRIP 197/144
			Weight: 46 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-5-14 oc purlins, except end verticals, and 2-0-0 oc purlins (5-9-11 max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 10=0-3-8, 7=0-3-8
Max Horz 10=30(LC 7)
Max Uplift 10=-262(LC 4), 7=-262(LC 5)
Max Grav 10=898(LC 1), 7=898(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-1049/299, 3-4=-947/300, 4-5=-1049/298, 2-10=-852/283, 5-7=-852/283
BOT CHORD 8-9=-234/947
WEBS 2-9=-239/944, 5-8=-239/944

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 262 lb uplift at joint 10 and 262 lb uplift at joint 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 85 lb down and 75 lb up at 4-4-0, and 85 lb down and 75 lb up at 5-11-0, and 85 lb down and 75 lb up at 7-6-0 on top chord, and 209 lb down and 88 lb up at 4-4-0, and 35 lb down at 5-11-0, and 209 lb down and 88 lb up at 7-5-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 3-4=-70, 4-5=-70, 5-6=-70, 7-10=-20



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	K1	Hip Girder	1	1	I41874069
Job Reference (optional)					

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:16 2020 Page 2
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-kseBfxhmE4KnQNbPfvbDUZiyPw6rgR?Tlpv5ovz11Q5

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 3=-46(F) 4=-46(F) 9=-209(F) 8=-209(F) 11=-46(F) 12=-20(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874070
400393	K2	Common	2	1		
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:17 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-C3CZtiO?OSe2XAcDc7T1nF?rKP0PzUcXTefKLz11Q4

-1-1-8	5-11-0	11-10-0	12-11-8
1-1-8	5-11-0	5-11-0	1-1-8

Scale = 1:24.3

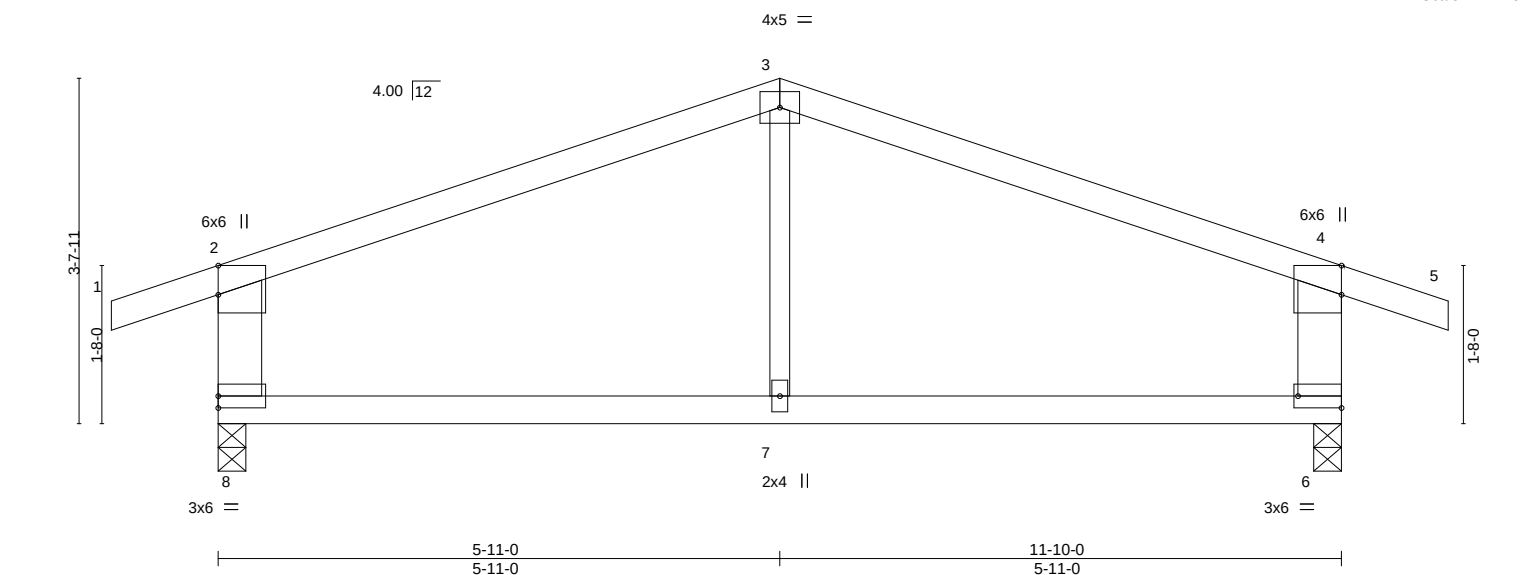


Plate Offsets (X,Y)--		[2:0-3-11,Edge], [4:0-3-11,0-0-0], [6:Edge,0-1-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.76
TCDL 10.0	Lumber DOL	1.15	BC 0.41
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.05
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R
DEFL.	in (loc)	l/defl	L/d
Vert(LL)	-0.11	7	>999
Vert(CT)	-0.22	7	>613
Horz(CT)	0.01	6	n/a
Wind(LL)	0.06	7	>999
PLATES	GRIP		
MT20	197/144		
Weight: 37 lb		FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x6 SPF No.2 *Except*
 3-7: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-3-8, 6=0-3-8
 Max Horz 8=28(LC 20)
 Max Uplift 8=-134(LC 4), 6=-134(LC 5)
 Max Grav 8=607(LC 1), 6=607(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-492/88, 3-4=-492/88, 2-8=-501/167, 4-6=-501/167
 BOT CHORD 7-8=-21/384, 6-7=-21/384

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 134 lb uplift at joint 8 and 134 lb uplift at joint 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874071
400393	K3	Common Girder	1	2	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:18 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-hFmx4Cj0lhaVghlonKeiZ_nDljmw8HQmm7OCsnz11Q3

-1-1-8	5-11-0	11-10-0	12-11-8
1-1-8	5-11-0	5-11-0	1-1-8

Scale = 1:25.5

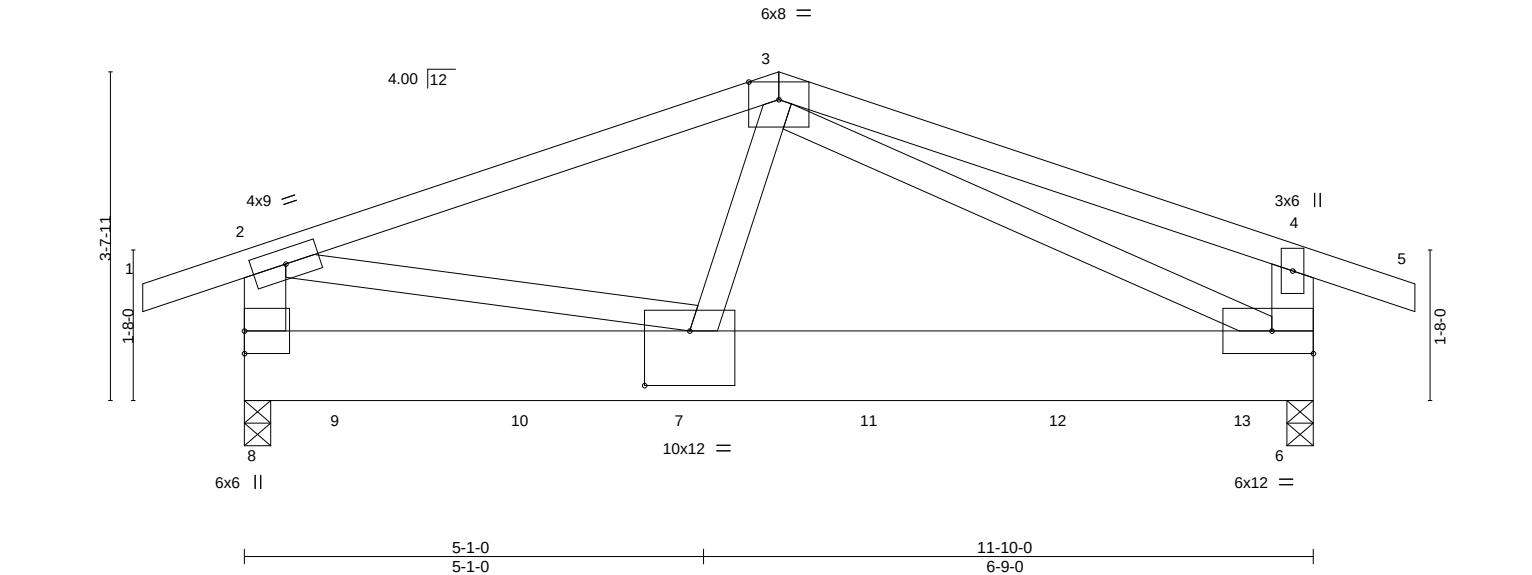


Plate Offsets (X,Y)-- [7:0-6-0,0-7-4]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.56	Vert(LL)	-0.06	6-7	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.37	Vert(CT)	-0.10	6-7	>999	240		
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.59	Horz(CT)	0.01	6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.03	6-7	>999	240	Weight: 163 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x10 SP 2400F 2.0E
WEBS 2x4 SPF No.2 *Except*
2-8,4-6: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-8-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-3-8, 6=0-3-8
Max Horz 8=-25(LC 17)
Max Uplift 8=-330(LC 4), 6=-328(LC 5)
Max Grav 8=5107(LC 1), 6=4419(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-5915/401, 3-4=-1350/157, 2-8=-3360/283, 4-6=-750/138
BOT CHORD 7-8=-84/921, 6-7=-270/4400
WEBS 3-7=-219/3902, 2-7=-288/4775, 3-6=-3637/218

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-7-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x10 - 2 rows staggered at 0-4-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 330 lb uplift at joint 8 and 328 lb uplift at joint 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1446 lb down and 71 lb up at 1-1-12, 1451 lb down and 80 lb up at 3-1-12, 1446 lb down and 89 lb up at 5-0-15, 2672 lb down and 270 lb up at 7-0-2, and 646 lb down and 42 lb up at 9-1-4, and 653 lb down and 39 lb up at 11-1-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard



July 1, 2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	K3	Common Girder	1	2	I41874071
					Job Reference (optional)

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:18 2020 Page 2
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-hFmx4Cj0lhaVghlonKeiZ_nDljmw8HQmm7OCsanz11Q3

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 3-4=-70, 4-5=-70, 6-8=-20
Concentrated Loads (lb)
Vert: 7=-1446(B) 9=-1446(B) 10=-1451(B) 11=-2672(B) 12=-646(B) 13=-653(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	LAY1	GABLE	1	1		I41874072
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:19 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-9RKKIYkIW?iMhrK_L19x6CKV17BttVv_n7mOEz11Q2



Scale = 1:21.8

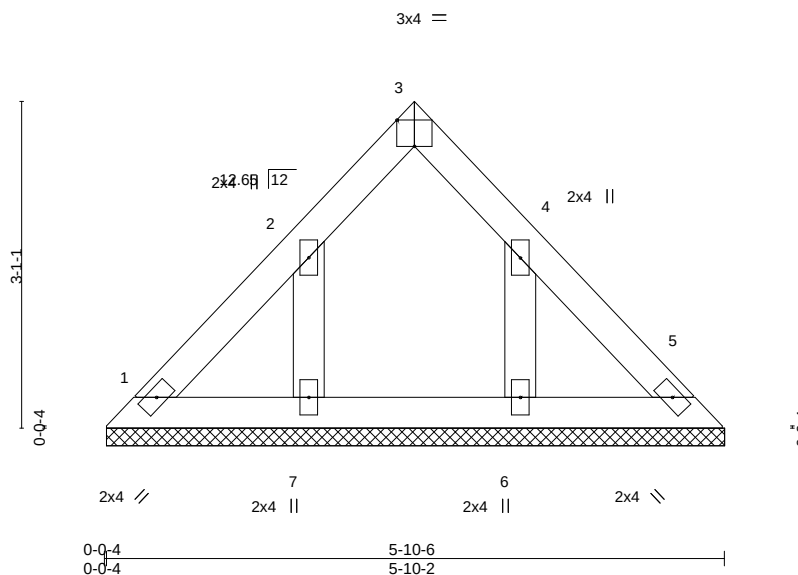


Plate Offsets (X,Y)-- [3:Edge,0-3-0], [4:0-0-1,0-0-0]							
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.03	Vert(LL)	n/a	-	n/a
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	n/a	-	999
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.02	Horz(CT)	0.00	5	n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P				
				PLATES	GRIP		
				MT20	197/144		
				Weight: 19 lb	FT = 10%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-10-6 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 5-10-2.
(lb) - Max Horz 1=-72(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 7, 6
Max Grav All reactions 250 lb or less at joint(s) 1, 5, 7, 6

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITTEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	LAY2	GABLE	1	1		I41874073
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:21 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-5qS4jElv2cy3X9TNSSBPdProxtzLmSCS5csT6z11Q0

6-4-12	10-4-7	24-0-9	28-1-6
6-4-12	3-11-10	13-8-2	4-0-12

Scale = 1:48.7

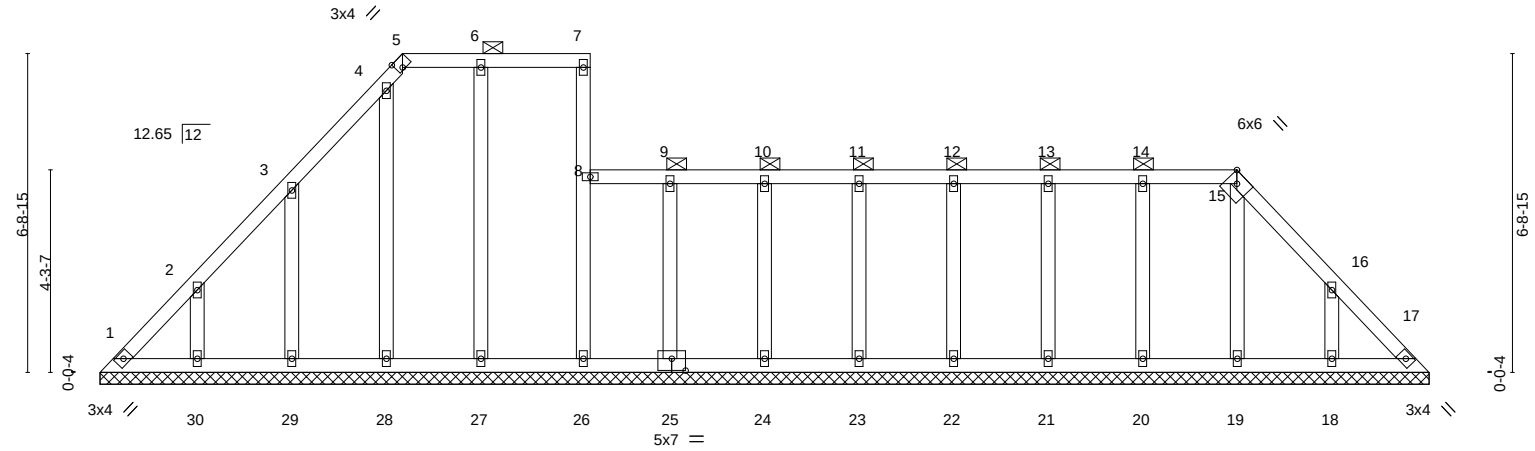


Plate Offsets (X,Y)--		[5:0-1-7,Edge], [15:0-2-9,Edge], [25:0-3-8,0-3-0]					
LOADING (psf)		SPACING-		CSI.		DEFL.	
TCLL 25.0		Plate Grip DOL 1.15		TC 0.06		in (loc) l/defl L/d	
TCDL 10.0		Lumber DOL 1.15		BC 0.03		Vert(LL) n/a - n/a 999	
BCLL 0.0 *		Rep Stress Incr YES		WB 0.12		Vert(CT) n/a - n/a 999	
BCDL 10.0		Code IRC2018/TPI2014		Matrix-S		Horz(CT) 0.01 17 n/a n/a	
						PLATES GRIP	
						MT20 197/144	
						Weight: 127 lb FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-7, 8-26, 8-15.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 28-1-6.
(lb) - Max Horz 1=271(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 1, 26, 17, 24, 25, 27, 23, 22, 21, 20, 19 except 28=120(LC 8), 29=127(LC 8), 30=128(LC 8), 18=140(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 26, 17, 24, 25, 27, 28, 29, 30, 23, 22, 21, 20, 19, 18 except 1=279(LC 8)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-401/193, 2-3=-280/147

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 26, 17, 24, 25, 27, 23, 22, 21, 20, 19 except (jt=lb) 28=120, 29=127, 30=128, 18=140.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 400393	Truss LAY3	Truss Type GABLE	Qty 1	Ply 1	Lot 18 HT Job Reference (optional)
---------------	---------------	---------------------	----------	----------	---------------------------------------

I41874074

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:22 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-Z00SwamXpw5w8l2Z09iekqy0YLDu4CZMhMQ?Zz11Q?



4x5 =

Scale = 1:62.3

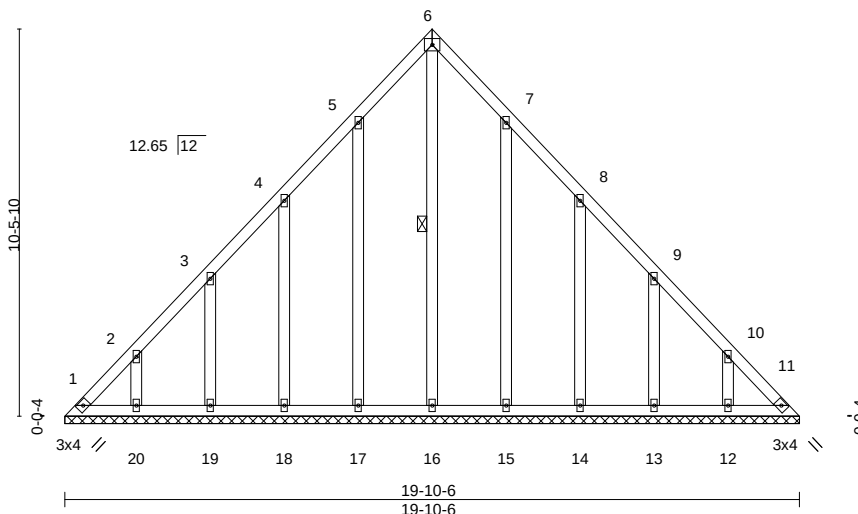

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.19	Horz(CT)	0.01	11	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						
								Weight: 108 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 6-16

REACTIONS.


All bearings 19-10-6.
 (lb) - Max Horz 1=-268(LC 4)
 Max Uplift All uplift 100 lb or less at joint(s) 11 except 1=-125(LC 6), 17=-122(LC 8), 18=-128(LC 8), 19=-124(LC 8), 20=-124(LC 8), 15=-120(LC 9), 14=-129(LC 9), 13=-124(LC 9), 12=-124(LC 9)
 Max Grav All reactions 250 lb or less at joint(s) 11, 16, 17, 18, 19, 20, 15, 14, 13, 12 except 1=-256(LC 8)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-369/230, 2-3=-252/186, 10-11=-327/168

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11 except (jt=lb) 1=125, 17=122, 18=128, 19=124, 20=124, 15=120, 14=129, 13=124, 12=124.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job 400393	Truss LAY4	Truss Type GABLE	Qty 1	Ply 1	Lot 18 HT Job Reference (optional)	I41874075
---------------	---------------	---------------------	----------	----------	---------------------------------------	-----------


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:23 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-1Cag7wn9aEDnmSdmatDtG2VBQkZVpgMVvP5zX?z11Q_

3-10-3 3-10-3 7-8-6 3-10-3

Scale = 1:27.8

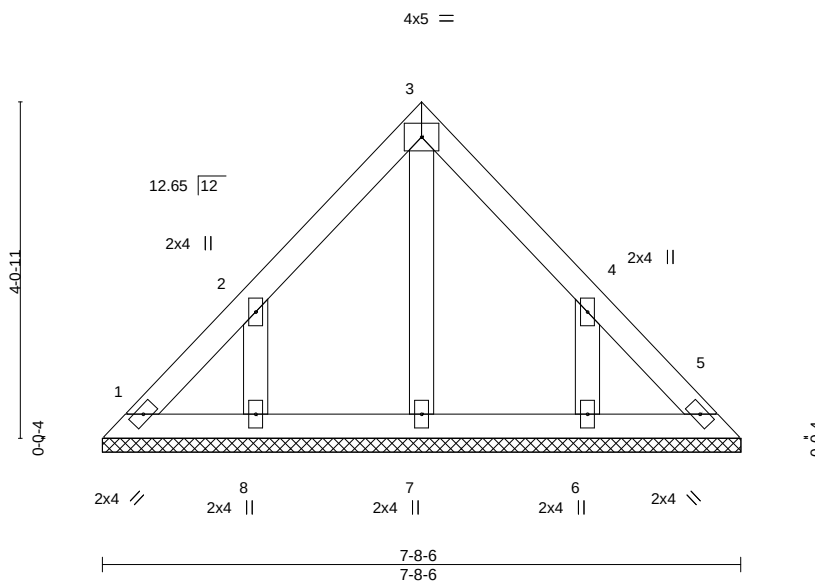

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.05	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 27 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 7-8-6.
(lb) - Max Horz 1=98(LC 5)
Max Uplift All uplift 100 lb or less at joint(s) 1, 5 except 8=-139(LC 8), 6=-139(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 1, 5, 7, 8, 6

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 8=139, 6=139.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	LAY5	GABLE	1	1		I41874076
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:24 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-VP7DLGonLXLeOcCy7al6pF1M28uhY7Ze83rW3Rz11Pz



Scale = 1:30.2

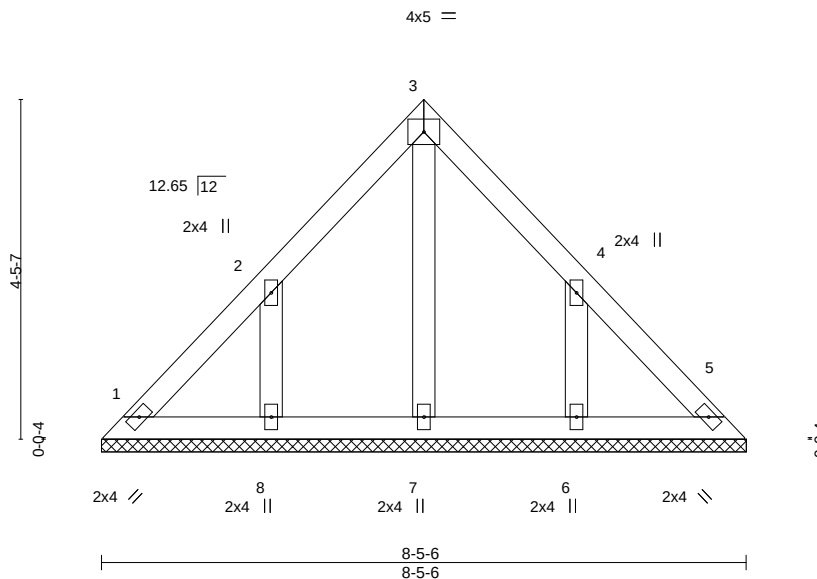

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 31 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 8-5-6.
(lb) - Max Horz 1=-109(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 1, 5 except 8=-151(LC 8), 6=-151(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 1, 5, 7, 8, 6

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 5 except (jt=lb) 8=151, 6=151.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874077
400393	LAY6	GABLE	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:25 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-zbhbYcoQ6rTV?mn8hIGLLTaVUYEXHaPoNja4btz11Py

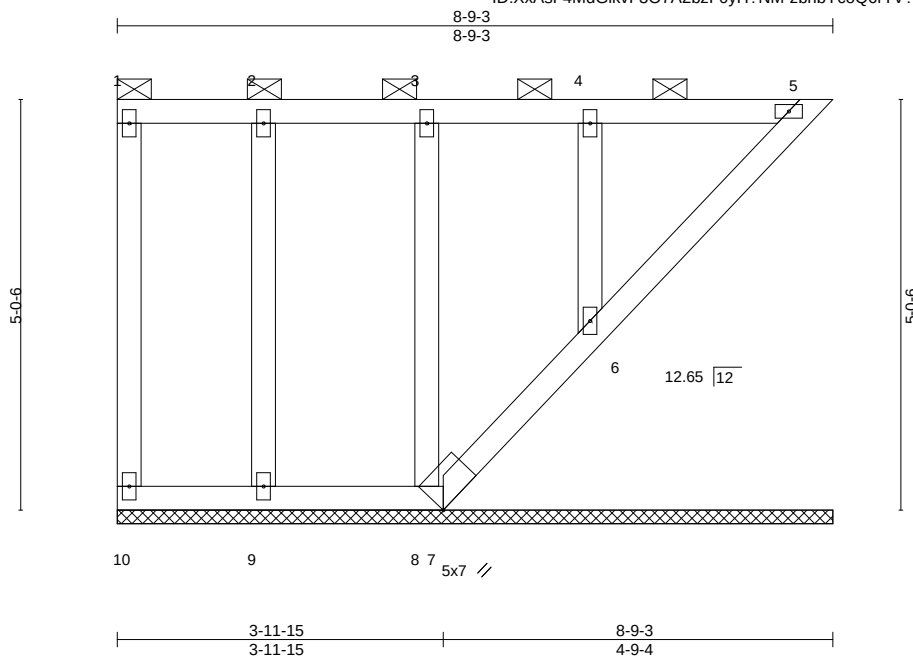

Scale = 1:28.2

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.14	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.06	Horz(CT)	0.00	5	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 40 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD 2-0-0 oc purlins: 1-5, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 5-6.

REACTIONS.

All bearings 8-9-3.
(lb) - Max Horz 10=-135(LC 6)
Max Uplift All uplift 100 lb or less at joint(s) 10, 5, 7, 9, 8, 6
Max Grav All reactions 250 lb or less at joint(s) 10, 5, 7, 9, 8, 6

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Provide adequate drainage to prevent water ponding.
- 3) All plates are 2x4 MT20 unless otherwise indicated.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10, 5, 7, 9, 8, 6.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 5, 6.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874078
400393	LAY7	GABLE	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:26 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-SnFzmypt9bMdwMKF?naug7hAyZO012xbNKd7Kz11Px

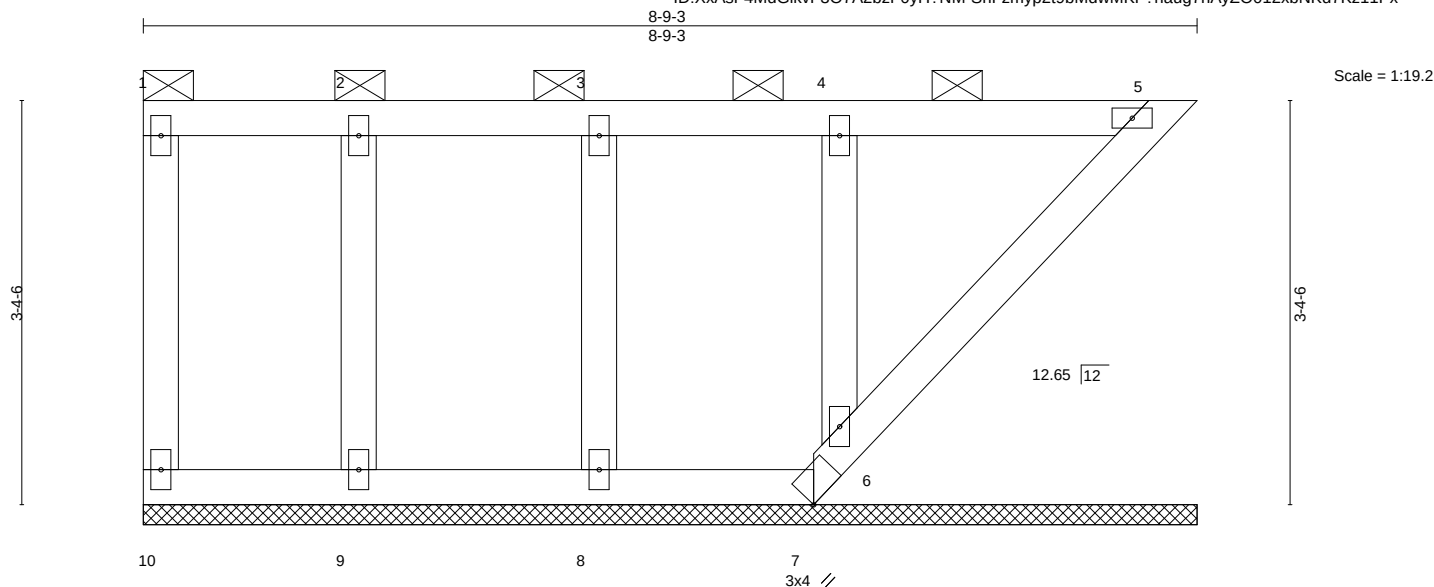

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.08	Vert(LL)	n/a	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.08	Vert(CT)	n/a				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-P							
								Weight: 34 lb		FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD 2-0-0 oc purlins: 1-5, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
6-0-0 oc bracing: 5-6.

REACTIONS.

All bearings 8-9-3.
(lb) - Max Horz 10=-87(LC 6)
Max Uplift All uplift 100 lb or less at joint(s) 10, 5, 9, 8, 6 except 7=-115(LC 6)
Max Grav All reactions 250 lb or less at joint(s) 10, 5, 7, 9, 8 except 6=298(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Provide adequate drainage to prevent water ponding.
- 3) All plates are 2x4 MT20 unless otherwise indicated.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10, 5, 9, 8, 6 except (jt=lb) 7=115.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 5, 6.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	LAY8	GABLE	1	1		I41874079
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:26 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-SnFzmp2t9bMdwMKF?naug7h2ya?01?xbNKd7Kz11Px

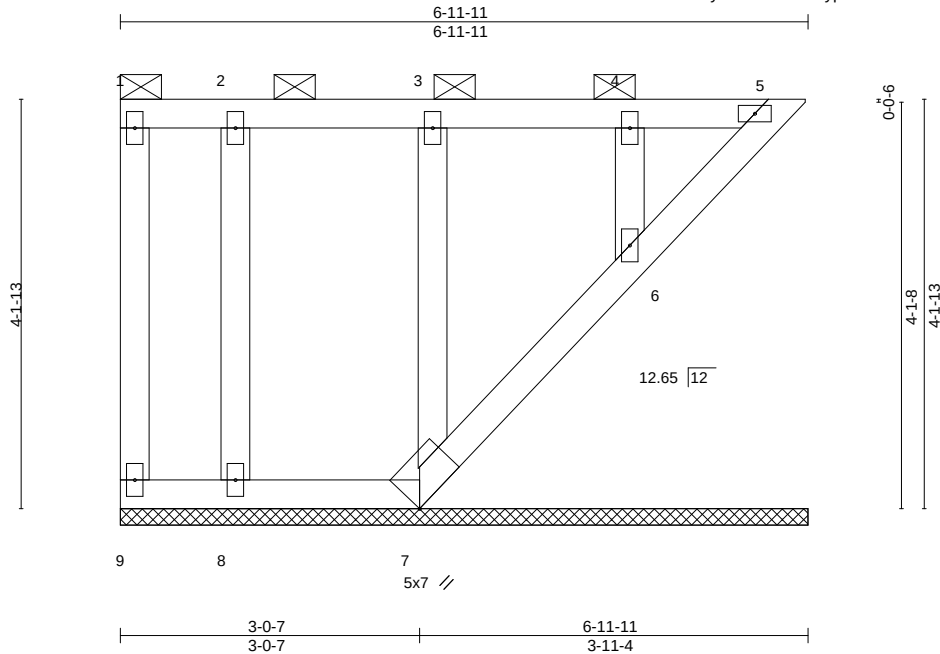

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	5	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						
								Weight: 31 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD 2-0-0 oc purlins (6-0-0 max.): 1-5, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 6-11-11.
(lb) - Max Horz 9=-110(LC 6)
Max Uplift All uplift 100 lb or less at joint(s) 9, 5, 8, 7, 6
Max Grav All reactions 250 lb or less at joint(s) 9, 5, 8, 7, 6

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9, 5, 8, 7, 6.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 5, 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	LAY9	GABLE	1	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:27 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-w_pLzHqgeSjDF4xXpjpRufsBMwwlSL5q13Bfmz11Pw

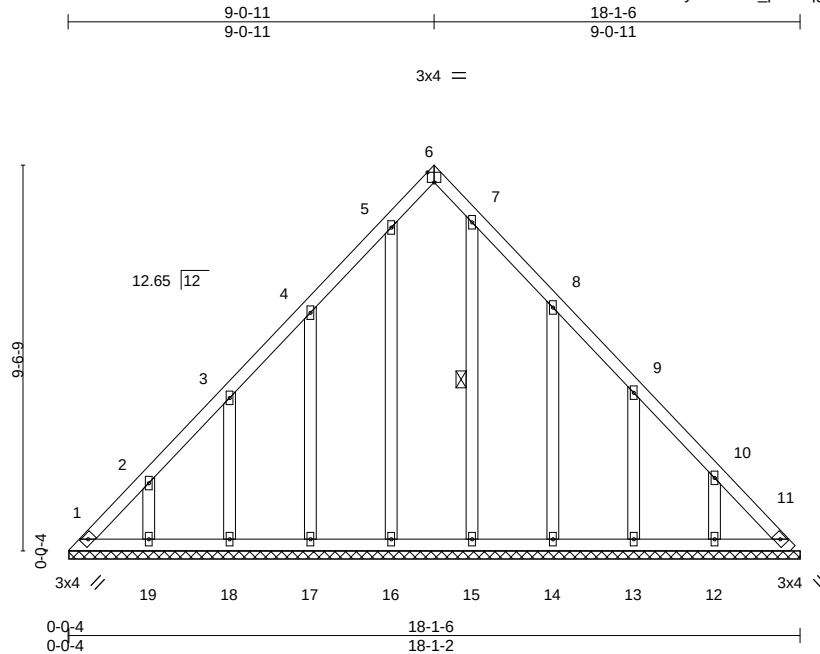

Scale = 1:57.0

Plate Offsets (X,Y)--		[6:Edge,0-3-0]									
LOADING	(psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB 0.16	Horz(CT)	0.01	11	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S						Weight: 93 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 7-15

REACTIONS.

All bearings 18-1-2.
(lb) - Max Horz 1=244(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 11, 16, 15 except 1=100(LC 6), 19=127(LC 8), 18=120(LC 8),
17=145(LC 8), 14=150(LC 9), 13=118(LC 9), 12=132(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 19, 18, 17, 16, 15, 14, 13, 12 except 1=284(LC 8),
11=268(LC 9)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-408/198, 2-3=-288/153, 9-10=-262/124, 10-11=-387/172
BOT CHORD 1-19=-120/295, 18-19=-120/295, 17-18=-120/295, 16-17=-120/295, 15-16=-120/295,
14-15=-120/295, 13-14=-120/295, 12-13=-120/295, 11-12=-120/295

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 1, 11, 19, 18, 17, 16, 15, 14, 13, 12 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11, 16, 15 except (jt=lb) 1=100, 19=127, 18=120, 17=145, 14=150, 13=118, 12=132.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	
400393	R1	FLAT GIRDER	1	2		I41874081
Wheeler Lumber, Waverly, KS 66871						Job Reference (optional)

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:29 2020 Page 1
ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-sMx6OzswA4zxUN4vw7KHWJk5s9XuDD9NilyHkfz11Pu

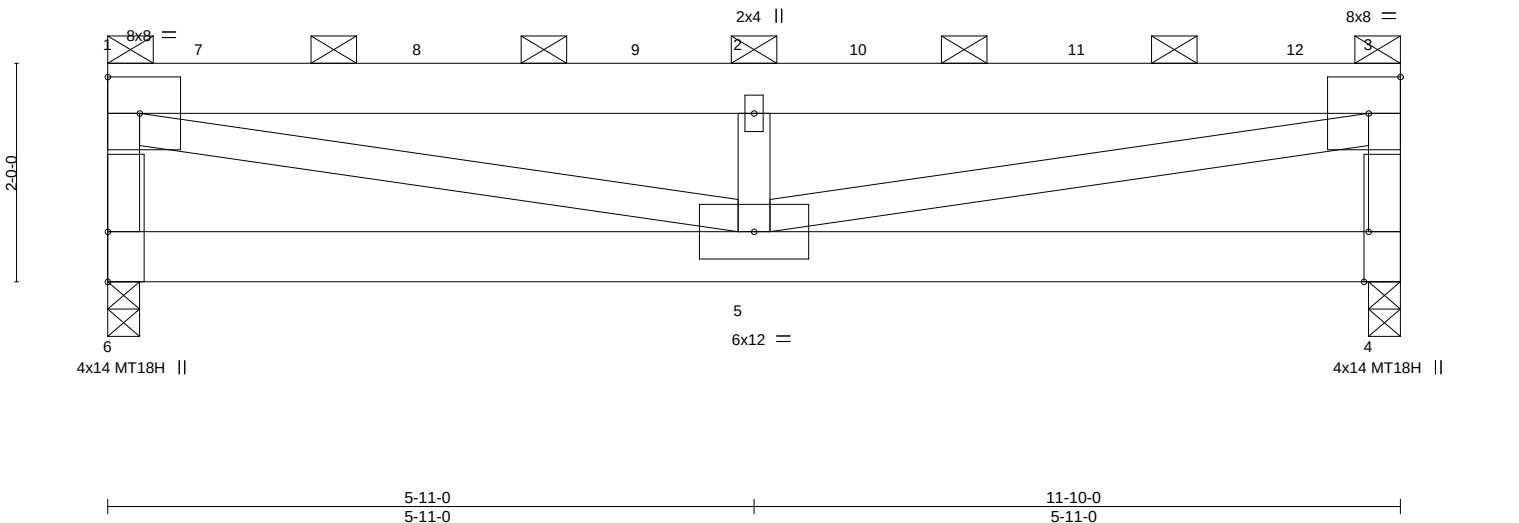



Plate Offsets (X,Y)--		[4:0-5-8,Edge]									
LOADING (psf)		SPACING-		2-0-0		CSI.		DEFL.		PLATES	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.57	in	(loc)	l/defl	L/d	MT20	GRIP
TCDL	10.0	Lumber DOL	1.15	BC	0.35	-0.09	5	>999	360	MT18H	197/144
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.71	-0.16	5	>858	240		197/144
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		0.00	4	n/a	n/a	Weight: 131 lb	FT = 10%
						Wind(LL)	0.05	5	>999		

LUMBER-		BRACING-	
TOP CHORD	2x6 SP 2400F 2.0E	TOP CHORD	2-0-0 oc purlins (6-0-0 max.): 1-3, except end verticals.
BOT CHORD	2x6 SPF No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SPF No.2		

REACTIONS. (size) 6=0-3-8, 4=0-3-8
Max Horz 6=59(LC 22)
Max Uplift 6=-96(LC 4), 4=-91(LC 5)
Max Grav 6=3105(LC 1), 4=3165(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-6=-2907/119, 1-2=-6119/174, 2-3=-6119/174, 3-4=-2968/115
BOT CHORD 5-6=-55/510, 4-5=-26/509
WEBS 1-5=-177/5806, 2-5=-3161/176, 3-5=-179/5807

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 4.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 875 lb down and 23 lb up at 0-11-12, 869 lb down and 15 lb up at 2-11-12, 869 lb down and 15 lb up at 4-11-12, 869 lb down and 15 lb up at 6-11-12, and 869 lb down and 15 lb up at 8-11-12, and 879 lb down and 16 lb up at 10-11-12 on top chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

Continued on page 2



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT
400393	R1	FLAT GIRDER	1	2	I41874081
Wheeler Lumber, Waverly, KS 66871					Job Reference (optional)

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-70, 4-6=-20
Concentrated Loads (lb)
Vert: 7=-875 8=-869 9=-869 10=-869 11=-869 12=-879

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874082
400393	V1	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871


8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:29 2020 Page 1

ID:XxAsF4MdGikvF3O7A2bzF0yH?NM-sMx6OzswA4zxUN4vw7KHWJkC79cQDOHNILYHkfz11Pu

3-6-0

3-6-0

Scale = 1:8.6

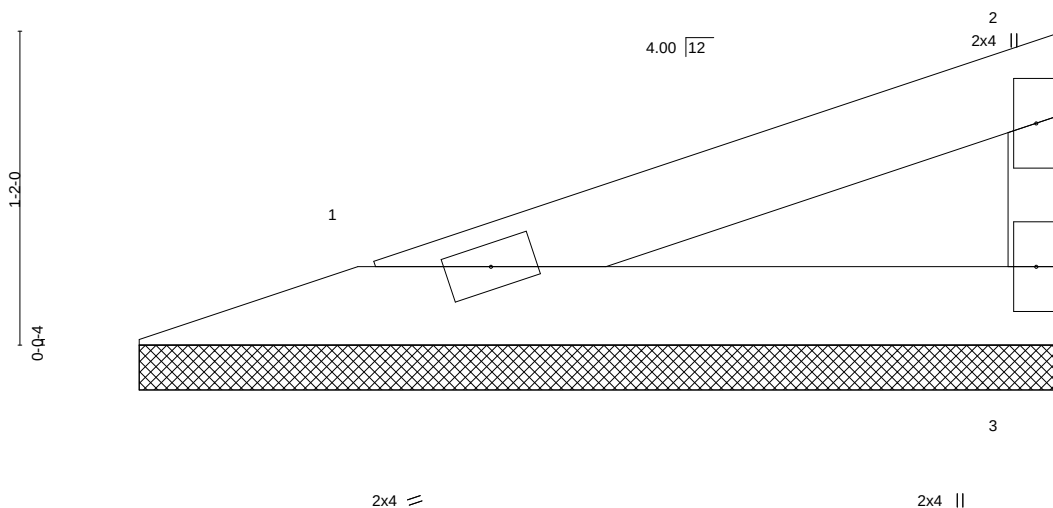

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.10	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-6-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=3-5-4, 3=3-5-4
Max Horz 1=37(LC 5)
Max Uplift 1=-18(LC 4), 3=-24(LC 8)
Max Grav 1=110(LC 1), 3=110(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874083
400393	V2	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:30 2020 Page 1

ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-KZVUbJsYxN5o6Xf6UrsW2WHNhZxYrXXW?IrG5z11Pt

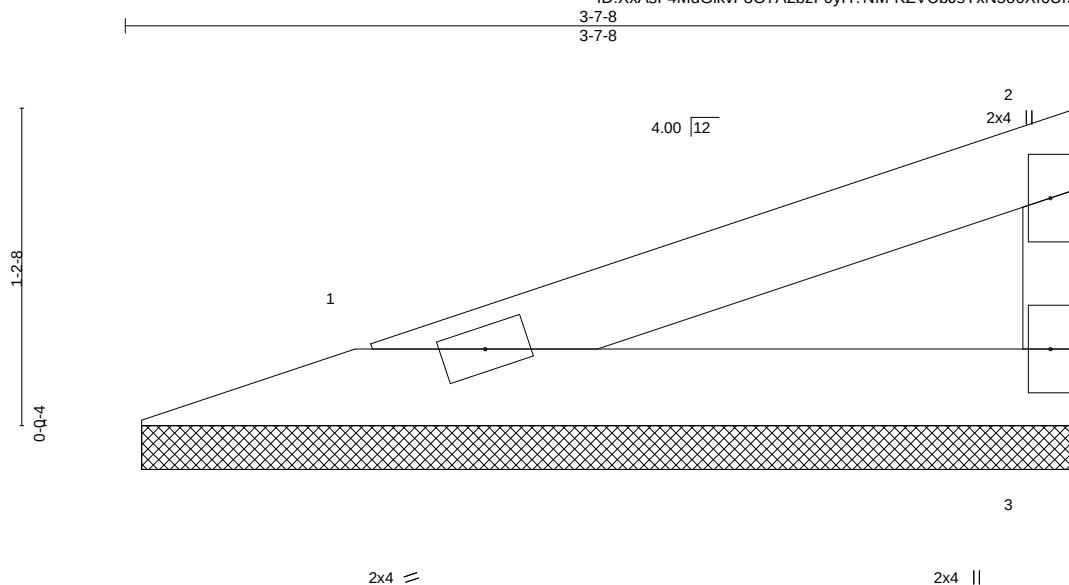

Scale = 1:8.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.11	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-7-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=3-6-12, 3=3-6-12
Max Horz 1=39(LC 7)
Max Uplift 1=-19(LC 4), 3=-25(LC 8)
Max Grav 1=116(LC 1), 3=116(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 18 HT	I41874084
400393	V3	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.410 s May 22 2020 MiTek Industries, Inc. Tue Jun 30 16:58:31 2020 Page 1
ID: XxAsF4MdGikvF3O7A2bzF0yH?NM-ol2sptAihDfjheI2YNlbkqXBzGehinglf1OoXz11Ps

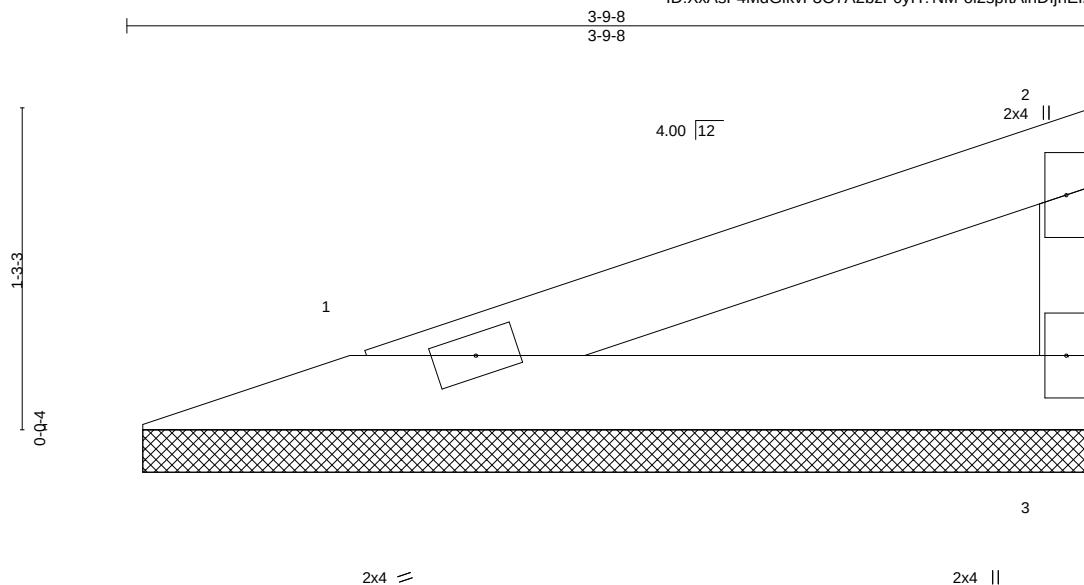

Scale = 1:9.0

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.13	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=3-8-12, 3=3-8-12
Max Horz 1=41(LC 5)
Max Uplift 1=-20(LC 4), 3=-26(LC 8)
Max Grav 1=124(LC 1), 3=124(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



July 1, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 10/03/2015 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless X, Y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.



For 4 x 2 orientation, locate plates 0- $\frac{3}{16}$ " from outside edge of truss.

—
—
This symbol indicates the required direction of slots in connector plates.

*** Plate location details available in MITek 20120 software or upon request.**

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

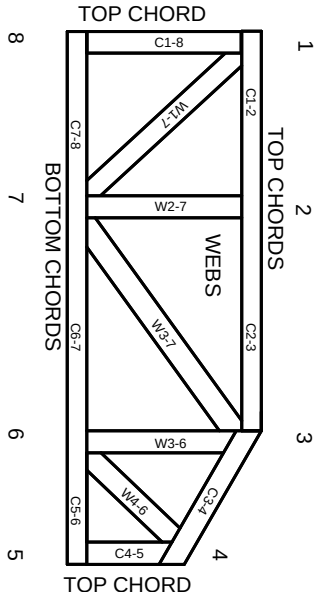

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITek® All Rights Reserved



MITek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.