

SPECIAL STRUCTURAL INSPECTIONS:

- IN ACCORDANCE WITH IBC SECTION 1704 AS NOTED BELOW, TESTING AND INSPECTION SHALL BE BY AN INDEPENDENT TESTING/INSPECTION FIRM UNDER THE SUPERVISION OF A LICENSED ENGINEER EMPLOYED BY THAT FIRM. THIS ENGINEER SHALL BE DEEMED THE DESIGNATED ENGINEER OF RECORD FOR SPECIAL INSPECTIONS PERFORMED BY HIS FIRM OR HIS CONSULTANTS. INSPECTORS SHALL BE ICBO CERTIFIED AND APPROVED BY THE BUILDING OFFICIAL.
- THE DESIGNATED ENGINEER OF RECORD FOR SPECIAL INSPECTIONS SHALL BE RESPONSIBLE FOR DEFINING THE ACTIVITIES OF THE INSPECTORS, FOR CERTIFYING THE QUALIFICATIONS OF THE INSPECTORS WITH THE BUILDING OFFICIAL, AND TO ATTEND THE PRECONSTRUCTION MEETING TO DEFINE THEIR SCOPE OF SERVICES AND THE TESTING OR TEST PROCEDURES THAT ARE REQUIRED AS OUTLINED IN THE INTERNATIONAL BUILDING CODE.
- SPECIAL INSPECTION IS TO BE PROVIDED IN ADDITION TO THE INSPECTIONS CONDUCTED BY THE LOCAL DEPARTMENT OF BUILDING SAFETY AND SHALL NOT BE CONSIDERED TO RELIEVE THE OWNER OR HIS AUTHORIZED AGENT FROM REQUESTING THE PERIODIC AND CALLED INSPECTIONS REQUIRED BY SECTION 1110 OF THE INTERNATIONAL BUILDING CODE.
- CONCRETE: PER SECTION 1705.3 WITH EXCEPTIONS, THE FOLLOWING ITEMS REQUIRE SPECIAL INSPECTION: ALL CONCRETE EXCEPT SLAB-ON-GRADE, SIDEWALKS, AND DRIVEWAYS. ALL SLABS REQUIRE TESTING FOR FLOOR FLATNESS AND LEVELNESS PER PROJECT SPECIFICATIONS.
- STEEL CONSTRUCTION: SPECIAL INSPECTIONS SHALL BE IN ACCORDANCE WITH THE QUALITY ASSURANCE INSPECTION REQUIREMENTS OF AISC 360. SPECIAL INSPECTION FOR SEISMIC RESISTANCE SHALL BE IN ACCORDANCE WITH AISC 341 AND SHALL COMPLY WITH IBC SECTION 1705.12. PROVIDE INSPECTION PER IBC SECTION 1704.2.2 FOR STRUCTURAL LOAD-BEARING MEMBERS AND ASSEMBLIES FABRICATED ON THE PREMISES OF A FABRICATOR'S SHOP. THESE INSPECTIONS SHALL BE AT THE CONTRACTOR'S EXPENSE IF THE FABRICATOR IS NOT AN APPROVED FABRICATOR PER IBC SECTION 1704.2.1.
- WELDING: WELDING INSPECTION SHALL BE IN COMPLIANCE WITH AWS D1.1, THE BASIS FOR WELDING INSPECTOR QUALIFICATIONS SHALL BE AWS D1.1. PROVIDE SPECIAL INSPECTION IN ACCORDANCE WITH AISC TABLE N5.4-1 THROUGH TABLE N5.4-3.
- HIGH STRENGTH BOLTING: INSTALLATION OF HIGH STRENGTH BOLTS SHALL BE PERIODICALLY INSPECTED IN ACCORDANCE WITH AISC SPECIFICATIONS. PROVIDE SPECIAL INSPECTION IN ACCORDANCE WITH AISC TABLE N5.6-1 THROUGH TABLE N5.6-3.
- INSPECTION OF STEEL ELEMENTS OF COMPOSITE CONSTRUCTION PRIOR TO CONCRETE PLACEMENT SHALL BE PER AISC TABLE N6-1.
- STEEL CONSTRUCTION OTHER THAN STRUCTURAL STEEL SHALL BE PER IBC SECTION 1705.2.2 AND REQUIREMENTS OF SDI QA/CQ, AND 1705.2.3 FOR OPEN-WEB STEEL JOISTS AND JOIST GIRDERS.
- STRUCTURAL MASONRY: MASONRY CONSTRUCTION SHALL BE INSPECTED AND VERIFIED IN ACCORDANCE WITH TMS 402/ACI 530/ASCE 5 AND TMS 602/ACI 530.1/ASCE 6 AS FOLLOWS:
 - ENGINEERED MASONRY IN RISK CATEGORY I, II, OR III STRUCTURES: THE MINIMUM SPECIAL INSPECTION PROGRAM FOR MASONRY SHALL COMPLY WITH LEVEL B QUALITY ASSURANCE, TABLE 4.
 - ENGINEERED MASONRY IN RISK CATEGORY IV STRUCTURES: THE MINIMUM SPECIAL INSPECTION PROGRAM FOR MASONRY SHALL COMPLY WITH LEVEL C QUALITY ASSURANCE, TABLE 5.
- GRADING, EXCAVATION AND FILLING: PER SECTION 1705.6. SEE CIVIL DRAWINGS AND SPECIFICATION DIVISION 2.
- SPRAY-APPLIED FIREPROOFING: PER SECTION 1705.14. SEE ARCHITECTURAL DRAWINGS FOR ALL FIREPROOFING METHODS AND REQUIREMENTS.
- FIRE RESISTANT PENETRATIONS AND JOINTS: PER SECTION 1705.17.
- NONBEARING EXTERIOR STUD WALLS AND EXTERIOR VENEER: PER SECTION 1705.12.5 WITH EXCEPTIONS.
- EXPANSION BOLT, SCREW ANCHOR AND ADHESIVE ANCHOR INSTALLATION TO VERIFY INSTALLATION IN ACCORDANCE WITH ICBO REPORTS NOTED PREVIOUSLY OR APPROVED EQUAL.
- HEADED CONCRETE SHEAR CONNECTORS: INSPECTED AND TESTED PER AMERICAN WELDING SOCIETY CODE AWS D1.1.
- CONTINUOUS SPECIAL INSPECTION IS REQUIRED FOR THE INSTALLATION OF ALL FORM SHELTER DOOR, WINDOW AND PROTECTIVE OPENING DEVICES, INCLUDING THE ANCHORAGE TO WALL/ROOF.
- THE INSPECTOR SHALL OBSERVE THE WORK ASSIGNED TO BE CERTAIN IT CONFORMS TO THE APPROVED DESIGN DRAWINGS AND SPECIFICATIONS.
- THE INSPECTOR SHALL FURNISH DAILY INSPECTION REPORTS ON THE WORK TO THE BUILDING OFFICIAL AND TO THE ENGINEER. ALL DISCREPANCIES SHALL BE BROUGHT TO THE IMMEDIATE ATTENTION OF THE CONTRACTOR FOR CORRECTION, AND, IF UNCORRECTED, TO THE ENGINEER AND THE BUILDING OFFICIAL.
- THE TESTING/INSPECTION FIRMS ENGINEER SHALL COMPLETE, SIGN AND SEAL A FINAL REPORT CERTIFYING THAT TO THE BEST OF HIS KNOWLEDGE, THE WORK IS IN CONFORMANCE WITH THE CONTRACT DOCUMENTS.
- CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING THE CONSTRUCTION SCHEDULE WITH THE OWNER'S SPECIAL INSPECTION REPRESENTATIVE IN A TIMELY MANNER AND SHALL NOT PROCEED WITH CONSTRUCTION OF COMPONENTS THAT MAY INTERFERE WITH THE INSPECTORS ABILITY TO PERFORM CODE REQUIRED INSPECTIONS. ANY COST INCURRED ASSOCIATED WITH REMOVAL OF WORK TO PERFORM INSPECTIONS WILL BE BORNE BY THE CONTRACTOR.
- STEEL DETAILING: THE SPECIAL INSPECTOR SHALL PERFORM AN INSPECTION OF THE STEEL FRAME TO VERIFY COMPLIANCE WITH THE DETAILS SHOWN ON THE APPROVED CONSTRUCTION DOCUMENTS, SUCH AS BRACING, STIFFENING, MEMBER LOCATIONS AND PROPER APPLICATION OF JOINT DETAILS AT EACH CONNECTION.

VERIFICATION AND INSPECTION	CONTINUOUS	PERIODIC	REFERENCED STANDARD	IBC REFERENCE
1. Inspect reinforcement, including prestressing tendons, and verify placement	-	X	ACI 318, Ch. 20, 25.2, 25.3, 26.6, 1-26.6.3	1908.4
2. Reinforcing bar welding a. Verify weldability of reinforcing bars other than ASTM A706 b. Inspect single-pass fillet welds, maximum 5/16", and c. Inspect all other welds	-	X	AWS D1.4 ACI 318, 26.6.4	-
3. Inspection of anchors post installed in hardened concrete members a. Adhesive anchors installed in horizontally or upward inclined orientations to resist sustained tension loads b. Mechanical anchors and adhesive anchors not defined in 4.4	X	-	ACI 318, 17.8.2.4	-
4. CONCRETE: PER SECTION 1705.3 WITH EXCEPTIONS, THE FOLLOWING ITEMS REQUIRE SPECIAL INSPECTION: ALL CONCRETE EXCEPT SLAB-ON-GRADE, SIDEWALKS, AND DRIVEWAYS. ALL SLABS REQUIRE TESTING FOR FLOOR FLATNESS AND LEVELNESS PER PROJECT SPECIFICATIONS.	-	X	ACI 318, 17.8.2	-
5. Verify use of required design mix.	-	X	ACI 318, Ch. 19, 26.4.3, 26.4.4	1904.1, 1904.2, 1908.2, 1908.3
6. Prior to concrete placement, fabricate specimens for strength tests, perform slump and air content tests, and determine the temperature of the concrete.	X	-	ASTM C 172 ASTM C 311 ACI 318, 26.5, 26.12	1908.10
7. Inspection of concrete and stone/aggregate preparation for proper application techniques.	X	-	ACI 318, 26.5	1908.6, 1908.7, 1908.8
8. Verify maintenance of specified curing temperature and techniques.	-	X	ACI 318, 26.5.3, 26.5.5	1908.9
9. Inspect prestressing tendons for: a. Application of prestressing force, and b. Covering of bonded prestressing tendons in the seismic force-resisting system	X	-	ACI 318, 26.10	-
10. Inspect erection of precast concrete members.	-	X	ACI 318, 26.9	-
11. Verification of in-situ concrete strength, prior to stressing of tendons in post-tensioned concrete and prior to removal of shores and forms from beams and structural slabs.	-	X	ACI 318, 26.11.2	-
12. Inspect formwork for shape, location, and dimensions of the concrete member being formed. For cast-in-place concrete: a. Where applicable, see also Section 1705.12, Special inspectors for seismic resistance. b. Specific requirements for special inspection shall be included in the research report for the anchor issued by an approved source in accordance with 17.8.2 in AC308 or other qualification procedures. Where specific requirements are not provided, special inspection requirements shall be specified by the registered design professional and shall be approved by the building official prior to the commencement of the work.	-	X	ACI 318, 26.11.1(2b)	-

VERIFICATION AND INSPECTION TASK LISTED	CONTINUOUS DURING TASK LISTED	PERIODICALLY DURING TASK LISTED
1. Verify materials below shallow foundations are adequate to achieve the design bearing capacity	-	X
2. Verify excavations are extended to proper depth and have reached proper material	-	X
3. Perform classification and testing of compacted fill materials	-	X
4. Verify use of proper materials, densities and lift thicknesses during placement and compaction of compacted fill	X	-
5. Prior to placement of compacted fill observe subsgrade and verify that site has been prepared properly	-	X

MINIMUM TESTS	Art 1.5
Prior to construction, verification of compliance of submittals	Art 1.5
Prior to construction, verification of Fin and FACC, except where specifically exempted by the Code.	Art 1.4 B
During construction, verification of Slump flow and Visual Stability Index (VSI) when self-consolidating grout is delivered to the project.	Art 1.5 & 1.6.3

Inspection Task	Frequency (a)	Periodic (b)	Reference for Criteria	TMS 602
1. As masonry construction begins, verify that the following are in compliance: a. Proportions of site-prepared mortar b. Grade and size of prestressing tendons and anchorages c. Grade, type and size of reinforcement, connectors, anchor bolts, and prestressing tendons and anchorages d. Prestressing technique e. Properties of thin-bed mortar for AAC masonry f. Sample panel construction	Continuous	Periodic	Art. 2.1, 2.6 A & 2.6 C, 2.4 B, 2.4 H, Art. 3.4 & 3.6 A, Art. 3.6 B, Art. 2.1 C.1, Art. 1.6 D	TMS 602
2. Prior to grouting, verify that the following are in compliance: a. Grout Splice b. Placement of prestressing tendons and anchorages c. Placement of reinforcement, connectors, and anchor bolts d. Proportions of site-prepared grout and prestressing grout for bonded tendons	X	X(c)	Art. 3.2 D & 3.2 F, Sec. 10.8 & 10.9, Sec. 6.1, 6.3.1 & 6.3.6 & 6.3.7, Art. 2.6 B, & 2.4 G.1 b	-
3. Verify compliance of the following during construction: a. Materials and procedures with the approved submittals b. Placement of masonry units and mortar joint construction c. Size and location of structural elements d. Type, size, and location of anchors, including other details of anchorage of masonry to structural members, frames, or other construction e. Welding of reinforcement f. Preparation, construction, and protection of masonry during cold weather (temperature below 40°F (4°C)) or hot weather (temperature above 50°F (32.2°C)) g. Application and measurement of prestressing force h. Placement of grout and prestressing grout for bonded tendons is in compliance i. Placement of AAC masonry units and construction of thin-bed mortar joints	X	X	Art. 1.5, Art. 3.3 B, Art. 3.3 F, Sec. 1.2 I (6) & 2.1 I & 6.3.1, Art. 1.8 C, & 1.8 D, Art. 3.5 & 3.6 C, Art. 3.3 B & 3.3 F.1 b, Art. 1.4 B.2.a.3, 1.4 B.2.b.3, 1.4 B.2.c.3, 1.4 B.3 & 1.4 B.4	-
4. Observe preparation of grout specimens, mortar specimens, and/or prisms	X	X(c)	Art. 3.5 B	-

TYPE	CONTINUOUS DURING TASK LISTED	PERIODICALLY DURING TASK LISTED
1. Installation of open-web steel joists and joist girders a. End Connections - welding or bolting b. Bridging - Horizontal or diagonal	-	X
2. Standard bridging 3. Bridging that differs from the SJI specifications listed in Section 2207.1	-	X

Inspection Tasks	QC	QA
Welder qualification records and contracts records	P	O
Welding procedure specifications (WPS) available	P	P
Manufacturer certifications for welding consumables available	P	P
Material identification (type/grade)	O	O
Welder identification system 1	O	O
Fit-up of groove welds (including joint geometry) - Joint preparation - Dimensions (alignment, root opening, root face, bevel) - Cleanliness (condition of steel surfaces) - Backing type and fit (if applicable)	O	O
Fit-up of fillet welds - Dimensions (alignment, gaps at root) - Cleanliness (condition of steel surfaces) - Backing type and fit (if applicable)	O	O
Check welding equipment 1. The fabricator or erector, as applicable, shall maintain a system by which a welder who has welded a joint or member can be identified. Stamps, initials, and the low-stress type O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Control and handling of welding consumables - Packaging - Exposure control	O	O
No welding over cracked tack welds	O	O
Environmental conditions - Wind speed within limits - Precipitation and temperature	O	O
WPS followed Settings on welding equipment - Travel speed - Selected welding materials - Shielding gas type/flow rate - Preheat applied - Interpass temperature maintained (min./max.) - Proper position (F, V, H, CH)	O	O
Welding techniques - Interpass and final cleaning - Each pass within profile limitations - Each pass meets quality requirements	O	O
Placement and installation of steel headed stud anchors	P	P
O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Welds cleaned	O	O
Size, length and location of welds	P	P
Welds meet visual acceptance criteria Crack protection - Weld base-metal fusion - Center cross section - Weld profiles - Weld size - Undercut - Porosity	P	P
Arc strikes	P	P
kerf(s) [a]	P	P
Weld access holes in rolled heavy shapes and built-up heavy shapes [b]	P	P
Backing removed and weld tabs removed (if required)	P	P
Repair activities	P	P
Document acceptance or rejection of welded joint or member	P	P
No prohibited welds have been added without the approval of the EOR	O	O

[a] When welding of doubler plates, continuity plates or stiffeners has been performed in the kerf, visually inspect the web kerf for cracks within 3 in. (75 mm) of the weld.
[b] After rolled heavy shapes (see Section A3.1c) and built-up heavy shapes (see Section A3.1d) are welded, visually inspect the weld access hole for cracks.
O. Observe these items on a random basis. Operations need not be delayed pending these inspections.
P. Perform these tasks for each welded joint or member.

Inspection Tasks	QC	QA
Manufacturer's certifications available for fastener materials	O	P
Fasteners marked in accordance with ASTM requirements	O	O
Correct fasteners selected for the joint detail (grade, type, bolt length if threads are to be excluded from shear plane)	O	O
Correct bolting procedure selected for joint detail	O	O
Connecting elements, including the appropriate laying surface condition and hole preparation, if specified, meet applicable requirements	O	O
Pre-installation verification testing by installation personnel observed and documented for fastener assemblies and methods used	P	O
Proper storage provided for bolts, nuts, washers and other fastener components	O	O
O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Fastener assemblies placed in all holes and washers and nuts are positioned as required	O	O
Joint brought to the snug-tight condition prior to the pretensioning operation	O	O
Fastener component not turned by the wrench prevented from rotating	O	O
Fasteners are pretensioned in accordance with the RCSC Specification, progressively starting from the most rigid point toward the free ends	O	O
O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Document acceptance or rejection of bolted connections	P	P

Inspection Tasks	QC	QA
Welder qualification records and contracts records	P	O
Welding procedure specifications (WPS) available	P	P
Manufacturer certifications for welding consumables available	P	P
Material identification (type/grade)	O	O
Welder identification system 1	O	O
Fit-up of groove welds (including joint geometry) - Joint preparation - Dimensions (alignment, root opening, root face, bevel) - Cleanliness (condition of steel surfaces) - Backing type and fit (if applicable)	O	O
Fit-up of fillet welds - Dimensions (alignment, gaps at root) - Cleanliness (condition of steel surfaces) - Backing type and fit (if applicable)	O	O
Check welding equipment 1. The fabricator or erector, as applicable, shall maintain a system by which a welder who has welded a joint or member can be identified. Stamps, initials, and the low-stress type O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Control and handling of welding consumables - Packaging - Exposure control	O	O
No welding over cracked tack welds	O	O
Environmental conditions - Wind speed within limits - Precipitation and temperature	O	O
WPS followed Settings on welding equipment - Travel speed - Selected welding materials - Shielding gas type/flow rate - Preheat applied - Interpass temperature maintained (min./max.) - Proper position (F, V, H, CH)	O	O
Welding techniques - Interpass and final cleaning - Each pass within profile limitations - Each pass meets quality requirements	O	O
Placement and installation of steel headed stud anchors	P	P
O. Observe these items on a random basis. Operations need not be delayed pending these inspections. P. Perform these tasks for each welded joint or member.	O	O

Inspection Tasks	QC	QA
Welds cleaned	O	O
Size, length and location of welds	P	P
Welds meet visual acceptance criteria Crack protection - Weld base-metal fusion - Center cross section - Weld profiles - Weld size - Undercut - Porosity	P	P
Arc strikes	P	P
kerf(s) [a]	P	P
Weld access holes in rolled heavy shapes and built-up heavy shapes [b]	P	P
Backing removed and weld tabs removed (if required)	P	P
Repair activities	P	P
Document acceptance or rejection of welded joint or member	P	P
No prohibited welds have been added without the approval of the EOR	O	O

[a] When welding of doubler plates, continuity plates or stiffeners has been performed in the kerf, visually inspect the web kerf for cracks within 3 in. (75 mm) of the weld.
[b] After rolled heavy shapes (see Section A3.1c) and built-up heavy shapes (see Section A3.1d) are welded, visually inspect the weld access hole for cracks.
O. Observe these items on a random basis. Operations need not be delayed pending these inspections.
P. Perform these tasks for each welded joint or member.

- ABBREVIATIONS:**
ABBREVIATIONS ARE AS SHOWN IN THE CONTRACT DOCUMENTS WITH THE FOLLOWING EXCEPTIONS:
- @ AND ANCHOR ROOF ADDITION OR ADDITIONAL AIR HANDLING UNIT
 - ADON ADDITIONAL ANCHOR
 - AHU AIR HANDLING UNIT
 - ANCH ANCHOR
 - APPROX APPROXIMATE
 - ARCH ARCHITECTURAL
 - BLDG BUILDING
 - BM (S) BEAM (S)
 - BOT BOTTOM
 - BTM BOTTOM OF
 - BRT BRIDGING
 - BRG BRIDGING
 - BTWN BETWEEN
 - CHAN CHANNEL
 - CANT/LEVER CANTILEVER
 - CIP CAST-IN-PLACE CONCRETE
 - CJ CONSTRUCTION/CONTROL JOINT
 - CUP COMPLETE JOINT PENETRATION
 - CL CENTERLINE
 - CMU CONCRETE MASONRY UNIT
 - COL COLUMN
 - CONC CONCRETE
 - CONN(S) CONNECTION (S)
 - CONST CONSTRUCTION
 - CONT CONTINUOUS
 - DB BAR DIAMETER
 - DBA DEFORMED BAR ANCHOR
 - DETAL DETAIL
 - DIA DIAMETER
 - DWA DEFORMED WIRE ANCHOR
 - DWG (S) DRAWING (S)
 - EA EACH
 - EJ EXTENDED END
 - EXP EXPANSION JOINT
 - EL ELEVATION
 - EMBED EMBEDMENT
 - ENGR ENGINEER
 - EQ EQUIPMENT
 - EQV EQUIVALENT
 - EQU EQUIVALENT
 - EXIST EXISTING
 - EXP EXPANSION
 - EXT EXTERIOR
 - FACE FACE
 - FAB FABRICATE
 - FC 28 DAY CONCRETE STRENGTH
 - FLOOR FLOOR
 - FIN FINISH (ED)
 - FS FACE SIDE
 - FTG FOOTING
 - FV FIELD VERIFY
 - FY YIELD STRENGTH
 - GALV GALVANIZED
 - GEN GENERAL
 - HOR HORIZONTAL
 - HORIZ HORIZONTAL
 - HSA HEADED STUD ANCHOR
 - HOLLOW HOLLOW STRUCTURAL SHAPE
 - INT INTERIOR
 - JOINT JOINT
 - KIPS KIPS
 - KSF KIPS PER SQUARE FOOT
 - L DOUBLE ANGLE
 - LLB LONG LEG BACK TO BACK
 - LB (S) POUND (S)
 - Ld DEVELOPMENT LENGTH
 - LLH LONG LEG HORIZONTAL
 - LVH LONG LEG VERTICAL
 - LWS LIGHT WEIGHT CONCRETE
 - MAS MASONRY
 - MAX MAXIMUM
 - MC MOMENT CONNECTION
 - MECH MECHANICAL
 - MEZZ MEZZANINE
 - MFR MANUFACTURE (R)
 - MIN MINIMUM
 - MISC MISCELLANEOUS
 - NOT IN CONTRACT NOT IN CONTRACT
 - NS NEAR SIDE
 - NTS NOT TO SCALE
 - NWC NORMAL WEIGHT CONCRETE
 - OC ON CENTER
 - OPENING (S) OPENING (S)
 - OPP OPPOSITE
 - OPPOSITE HAND OPPOSITE HAND
 - PC PRECAST CONCRETE
 - PCF POUNDS PER CUBIC FOOT
 - PL PLATE
 - PLF POUNDS PER LINEAR FOOT
 - PRELIM PRELIMINARY
 - PSF POUNDS PER SQUARE FOOT
 - PSI POUNDS PER SQUARE INCH
 - PT POST-TENSION (ED)ING
 - QTY QUANTITY
 - RAD / R RADIUS
 - RE / REF REFERENCE
 - REINF REINFORCEMENT
 - REQD REQUIRED
 - REV REVISION
 - RTU ROOF TOP UNIT
 - SC SHEAR CONNECTOR (S)
 - SCHED SCHEDULE
 - SECT SECTION
 - SHEET SHEET
 - SH SHORT LEG BACK TO BACK
 - SLAB SLAB
 - SPA SPADE (ING)
 - SPEC SPECIFICATION (S)
 - SQ SQUARE
 - STD STANDARD
 - STL STEEL
 - STR STIRRUP
 - STRUCT STRUCTURE
 - SYM SYMMETRICAL
 - T THRD PLATE THICKNESS
 - TAB TOP AND BOTTOM
 - TOP TOP
 - TOP OF CONCRETE TOP OF CONCRETE
 - TOM TOP OF MASONRY
 - TOS TOP OF STEEL
 - TYP TYPICAL
 - UNO UNLESS NOTED OTHERWISE
 - VERT VERTICAL
 - W WIDE FLANGE
 - WGT WEIGHT
 - WP WORK POINT
 - WT STEEL TEE SECTION
 - WWR WELDED WIRE REINFORCEMENT
 - X-STR EXTRA STRONG
 - XX-STR DOUBLE EXTRA STRONG

SYMBOLS AND NOTATIONS	
MOMENT CONNECTION	
BEAM SPLICE	
COLLECTOR BEAM AXIAL CONNECTION (TENSION OR COMPRESSION, 15k MIN WHERE AXIAL LOAD NOT INDICATED PER PLAN)	
COLUMN CENTER LINE	
CMU	
COMPOSITE BEAM	
CONCRETE	
EARTH (UNDISTURBED)	
FLOOR OR ROOF SLOPE	
FLOOR STEP IN ELEVATION	
GRAVEL	
STRUCTURED SLAB OR METAL DECK SPAN DIRECTION	
PRECAST CONCRETE	
GROUT	
ROCK	
TOP OF STEEL ELEVATION FROM NOTED TOS	<2 1/2" OR <2 1/2" >
WELDED WIRE REINFORCEMENT	
KEYNOTE MARK	
COLUMN MARK	
FOOTING MARK	
CONCRETE COLUMN MARK	
STEEL BRACED FRAME BAY	
MATCHLINE	
REVISION MARK	
CROSS REFERENCE	
DETAIL REFERENCE	
DETAIL OR WALL SECTION	
FRAME OR SHEAR WALL ELEVATION	
ELEVATION DATUM MARK	
FLOOR OPENING	
ARCHITECTURAL EXTERIOR/CLADDING LINE	

DLR Group
© DLR Group
ALL RIGHTS RESERVED
Member State Certificate of Authority #00309

LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT-R7 SCHOOL DISTRICT

1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64661

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS

13-20102-00
STRUCTURAL
NOTES
S0.2

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 10/20/2020

STRUCTURAL NOTES

- GENERAL STORM SHELTER NOTES:**
- THE PORTION OF STRUCTURE SHOWN ON THIS SHEET IS BASED ON STRUCTURAL RECOMMENDATIONS LISTED IN ICC 500-2014 "CONSASSA STANDARD FOR THE DESIGN AND CONSTRUCTION OF STORM SHELTERS". SHELTER HAS NOT BEEN CONSTRUCTED WITHIN AN AREA SUSCEPTIBLE TO FLOODING.
 - ALL COMPONENTS THAT MAKE UP THE STORM SHELTER AREA, INCLUDING DEFERRED SUBMITTALS, SHALL BE DESIGNED IN STRICT ACCORDANCE WITH ICC 500 STANDARDS. CALCULATIONS SHALL BE PROVIDED AT EACH CONNECTION FOR VERIFICATION OF LOAD PATH.
 - STORM SHELTER WALL AND SLAB ASSEMBLIES HAVE BEEN SELECTED BASED ON ICC 500 AND FEMA 361 RECOMMENDATIONS. NO ADDITIONAL TESTING OR ANALYSIS HAS BEEN PERFORMED TO ESTIMATE THE DYNAMIC IMPACT OF OBJECTS FOUND IN THE ACTUAL ENVIRONMENT AGAINST THE STRUCTURE.
 - REFER TO ARCHITECTURAL, CIVIL, MEP DRAWINGS FOR STORM SHUTTERS, DOORS, WINDOWS AND ATTACHMENT OF THESE COMPONENTS TO THE BUILDING STRUCTURE.
 - DIAPHRAGM SHEARS HAVE BEEN DISTRIBUTED BASED ON A RIGID DIAPHRAGM ASSUMPTION AND ARE SHOWN AS STRENGTH (ULTIMATE) LEVEL WIND FORCES.
 - LOWER LEVEL SLAB-ON-GRADE IS USED AS A STRUCTURAL DIAPHRAGM DISTRIBUTING FORCES TO THE FOUNDATIONS. CONTRACTOR SHALL SUBMIT A POUR PLAN FOR REVIEW SHOWING PLANNED LOCATIONS FOR CONSTRUCTION JOINTS.

SHELTER TYPE:
COMMUNITY TORNADO

WIND LOADS:
IN ACCORDANCE WITH ASCE 7-10, CHAPTER 26 AND 27 DIRECTIONAL PROCEDURE
BASIC WIND SPEED $V = 250$ MPH

$Wp = 1.0$
PARTIALLY ENCLOSED, EXPOSURE CATEGORY = "C"
 $Kz1 = 1.0$
 $Kd = 1.0$
 $GCP = +0.55$

LIVE LOAD:
ROOF: 100 PSF
COLLAPSE OF UPPER STRUCTURES WAS CONSIDERED IN THE DESIGN OF THE STORM SHELTERS.

LOAD COMBINATIONS:

- ALL WIND LOADS SHOWN ON THIS SHEET ARE STRENGTH (ULTIMATE) LEVEL LOADS AND SHALL BE APPLIED WITH THE FOLLOWING LOAD COMBINATIONS IN ADDITION TO THE STANDARD LOAD COMBINATIONS OF ASCE 7-10 CHAPTER 2. COMBINATIONS INDICATED AS NA ARE SEISMIC LOAD CONDITIONS THAT WILL NOT GOVERN IN THE DESIGN.

LRFD	ASD
1) 1.4D	1) D
2) 1.2D + 1.6L + 0.5(Lr or S)	2) D + L
3) 1.2D + 1.6(Lr or S) + (E or 0.5W)	3) D + (Lr or S)
4) 1.2D + 1.0W + 0.5(Lr or S)	4) D + 0.75L + 0.75(Lr or S)
5) NA	5) D + 0.6W
6) 0.9D + 1.0W	6) D + 0.75L + 0.75(0.6W) + 0.75(Lr or S)
7) NA	7) 0.9D + 0.6W
	8) NA

ALL LOAD CONDITION DESIGNATIONS ARE PER ASCE 7-10 EXCEPT THE FOLLOWING:
 W_e = EXTREME WIND EVENT WIND LOAD

TORNADO MISSILE IMPACT CRITERIA:

- MANUFACTURERS SHALL PROVIDE DATA INDICATING THAT ALL STRUCTURAL PRODUCTS MEET THE IMPACT CRITERIA TEST REQUIRED BY ICC-500 INCLUDING THE IMPACT FROM THE END OF A 15-LB 2x4 AT THE FOLLOWING VELOCITY.
 - VERTICAL SURFACES = 100 MPH
 - HORIZONTAL SURFACES = 67 MPH

2. ALL COMPONENTS OF THE STORM SHELTER ENVELOPE SHALL BE TESTED IN ACCORDANCE WITH ICC-500, SECTION 304 (PRESSURE) AND SECTION 305 (IMPACT).

QUALITY ASSURANCE, SPECIAL INSPECTIONS AND STRUCTURAL OBSERVATIONS FOR STORM SHELTER (ICC 500-2014):

THE FOLLOWING SPECIAL INSPECTION REQUIREMENTS SHALL BE PERFORMED ON ALL STORM SHELTER COMPONENTS IN ADDITION TO SPECIAL INSPECTION REQUIREMENTS AS STATED IN 2015 IBC ON SHEET S0.2

- QUALITY ASSURANCE FOR WIND REQUIREMENTS PLAN SHALL BE PROVIDED IN ACCORDANCE WITH SECTION 1705 FOR ALL COMPONENTS MAKING UP THE STRUCTURAL SYSTEM OF THE STORM SHELTER AS FOLLOWS:
 - THE MAIN WIND FORCE-RESISTING SYSTEM THAT IS SUBJECT TO QUALITY ASSURANCE ARE THE:
 - CAST-IN-PLACE CONCRETE ROOF DIAPHRAGM INCLUDING REINFORCEMENT, CHORDS, COLLECTORS, AND CONNECTIONS TO SHEAR WALLS.
 - PRECAST CONCRETE ROOF STRUCTURE
 - PRECAST CONCRETE SHEAR WALLS INCLUDING CONNECTION TO DIAPHRAGMS, WALL PANEL TO PANEL CONNECTIONS AND PANEL TO FOOTING CONNECTIONS.
 - CONCRETE FOUNDATIONS
 - FABRICATION AND INSTALLATION OF COMPONENTS AND ASSEMBLIES AT SHELTER ENVELOPE REQUIRED TO MEET MISSILE IMPACT TESTING OF ICC 500 INCLUDING DOORS, WINDOWS, AND OPENING PROTECTION DEVICES.
 - THE SPECIAL INSPECTIONS REQUIRED ARE INDICATED UNDER SPECIAL INSPECTION ON SHEET S0.2 AND THE ADDITIONAL REQUIREMENTS OF SECTION 1705 OF THE IBC. MATERIALS TESTING REQUIRED IS INDICATED UNDER THE SPECIFICATION FOR EACH MATERIAL.
 - STRUCTURAL OBSERVATIONS SHALL BE PERFORMED BY A REGISTERED DESIGN PROFESSIONAL EMPLOYED BY THE OWNER TO CONDUCT VISUAL OBSERVATIONS OF THE CONSTRUCTION OF THE STRUCTURAL SYSTEM FOR GENERAL CONFORMANCE TO THE APPROVED CONSTRUCTION DOCUMENTS AT SIGNIFICANT CONSTRUCTION STAGES AND AT COMPLETION OF THE CONSTRUCTION OF THE STRUCTURAL SYSTEM.
 - DISTRIBUTION OF OBSERVATION, TESTING AND SPECIAL INSPECTION REPORTS SHALL BE WITHIN TWENTY-FOUR (24) HOURS AFTER EACH SPECIAL INSPECTION. SUBMIT TWO (2) COPIES OF INSPECTION REPORTS TO THE CONTRACTOR, ARCHITECT AND BUILDING OFFICIAL.

2. CONTRACTOR RESPONSIBILITY: EACH CONTRACTOR RESPONSIBLE FOR THE CONSTRUCTION OF A MAIN-FORCE RESISTING SYSTEM OR A WIND-RESISTING COMPONENT LISTED IN THE QUALITY ASSURANCE PLAN SHALL SUBMIT A WRITTEN CONTRACTOR'S STATEMENT OF RESPONSIBILITY TO THE BUILDING OFFICIAL AND TO THE OWNER PRIOR TO THE COMMENCEMENT OF WORK ON THE SYSTEM OR COMPONENTS. THE CONTRACTOR'S STATEMENT OF RESPONSIBILITY SHALL INCLUDE THE FOLLOWING:

- ACKNOWLEDGEMENT OF AWARENESS OF THE SPECIAL REQUIREMENTS CONTAINED IN THE QUALITY ASSURANCE PLAN.
- ACKNOWLEDGE THAT CONTROL WILL BE EXERCISED TO OBTAIN CONFORMANCE WITHIN THE CONSTRUCTION DOCUMENTS APPROVED BY THE BUILDING OFFICIAL.
- PROCEDURES FOR EXERCISING CONTROL, WITHIN THE CONTRACTOR'S ORGANIZATION THE METHOD AND FREQUENCY OF REPORTING, AND DISTRIBUTION OF THE REPORTS.
- IDENTIFICATION AND QUALIFICATIONS OF THE PERSON(S) EXERCISING SUCH CONTROL AND THEIR POSITION IN THE ORGANIZATION.

COMPONENT AND CLADDING WIND LOADS:
ALL LOADS SHALL BE CONSIDERED AS POSITIVE OR NEGATIVE.

- WALLS:
 - $W_x = 250$ PSF (ZONE 4, TYP)
 - $W_x = 300$ PSF (ZONE 5, WITHIN 8'-0" OF CORNERS)
- PARAPETS:
 - $W_x = 520$ PSF (CASE A ZONE 2)
 - $W_x = 520$ PSF (CASE A ZONE 3)
 - $W_x = 310$ PSF (CASE B INTERIOR)
 - $W_x = 350$ PSF (CASE B CORNER)
- ROOFS:
 - $W_x = 360$ PSF (UPLIFT ZONE 1)
 - $W_x = 240$ PSF (UPLIFT ZONE 1)
 - $W_x = 460$ PSF (UPLIFT ZONE 2)
 - $W_x = 460$ PSF (UPLIFT ZONE 3)
 - $W_x = 140$ PSF (POSITIVE ZONE 1 & 1')
 - $W_x = 240$ PSF (POSITIVE ZONE 2 & 3)


MAIN WIND FORCE RESISTING SYSTEM LOADS (MWFRS):

$W_x = 200$ PSF (WINDWARD)
 $W_x = 160$ PSF (LEEWARD)
 $W_x = 185$ PSF (SIDE WALL)
 USE 200 PSF AGAINST WALL IN EACH ORTHOGONAL DIRECTION


$W_x = 210$ PSF (ROOF UPLIFT PRESSURE)
 $W_x = 250$ PSF (WINDWARD NET PARAPET PRESSURE)
 $W_x = 170$ PSF (LEEWARD NET PARAPET PRESSURE)

NOTATIONS:

V = TOTAL DIAPHRAGM SHEAR DUE TO EXTREME WIND EVENT IN DIRECTION INDICATED
 W_e = UNIFORMLY DISTRIBUTED LOAD APPLIED TO ROOF DIAPHRAGM (PERPENDICULAR TO WALL)
 W_w = TOTAL SHEAR LOAD RESISTED BY THE ENTIRE LENGTH OF SHEAR WALL FROM DIAPHRAGM FORCE DISTRIBUTION
 W_x = DIAPHRAGM SHEAR WALL FORCE OVER THE LENGTH OF THE WALL (PARALLEL TO WALL)

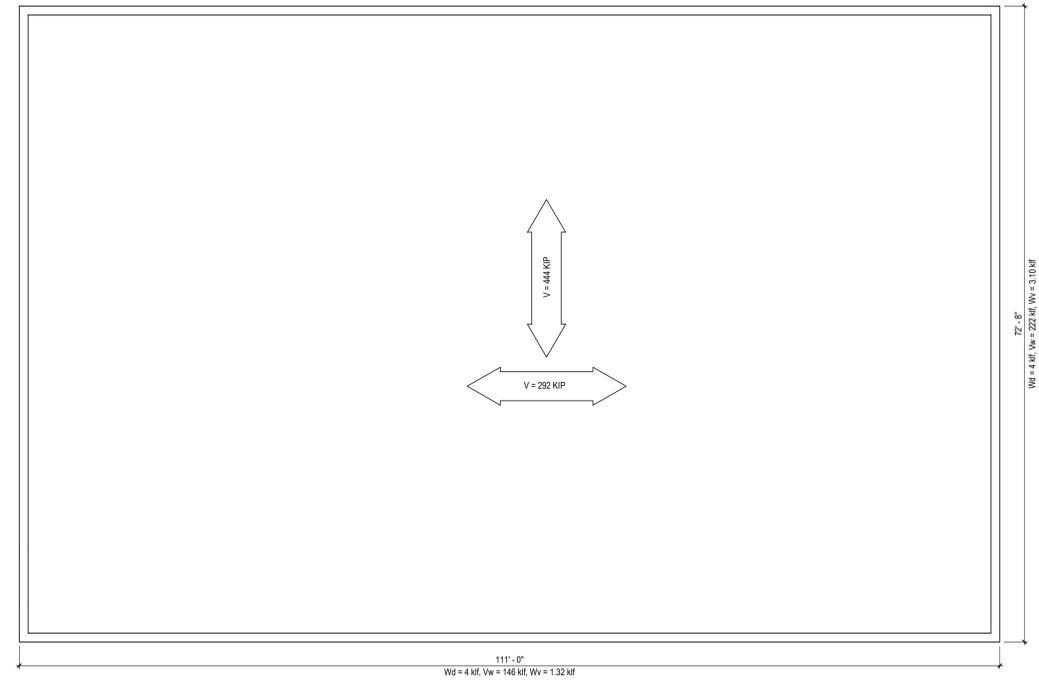

SHELTER ROOF PLAN (MWFRS)
SCALE: 1/8" = 1'-0"

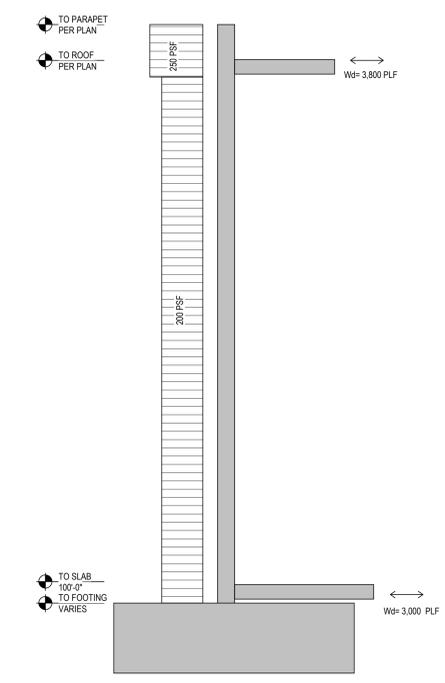

SHELTER WINDWARD WALL SECTION (MWFRS)
SCALE: 1/4" = 1'-0"



RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 10/20/2020

LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT
1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64081


PACKAGE 3 - BUILDING & SITE
ISSUE FOR PERMIT
10/08/20
REVISIONS

13-20102-00
STORM SHELTER
STRUCTURAL
CRITERIAL

S0.4

BM_350/15-20102-00_Lee's Summit Middle School 4/15/2010 10:00 AM Lee's Summit Middle School_4_ST_2020.rvt
10/7/2020 4:32:03 PM

 **GRID GEOMETRY**
SCALE: 1/32" = 1'-0"

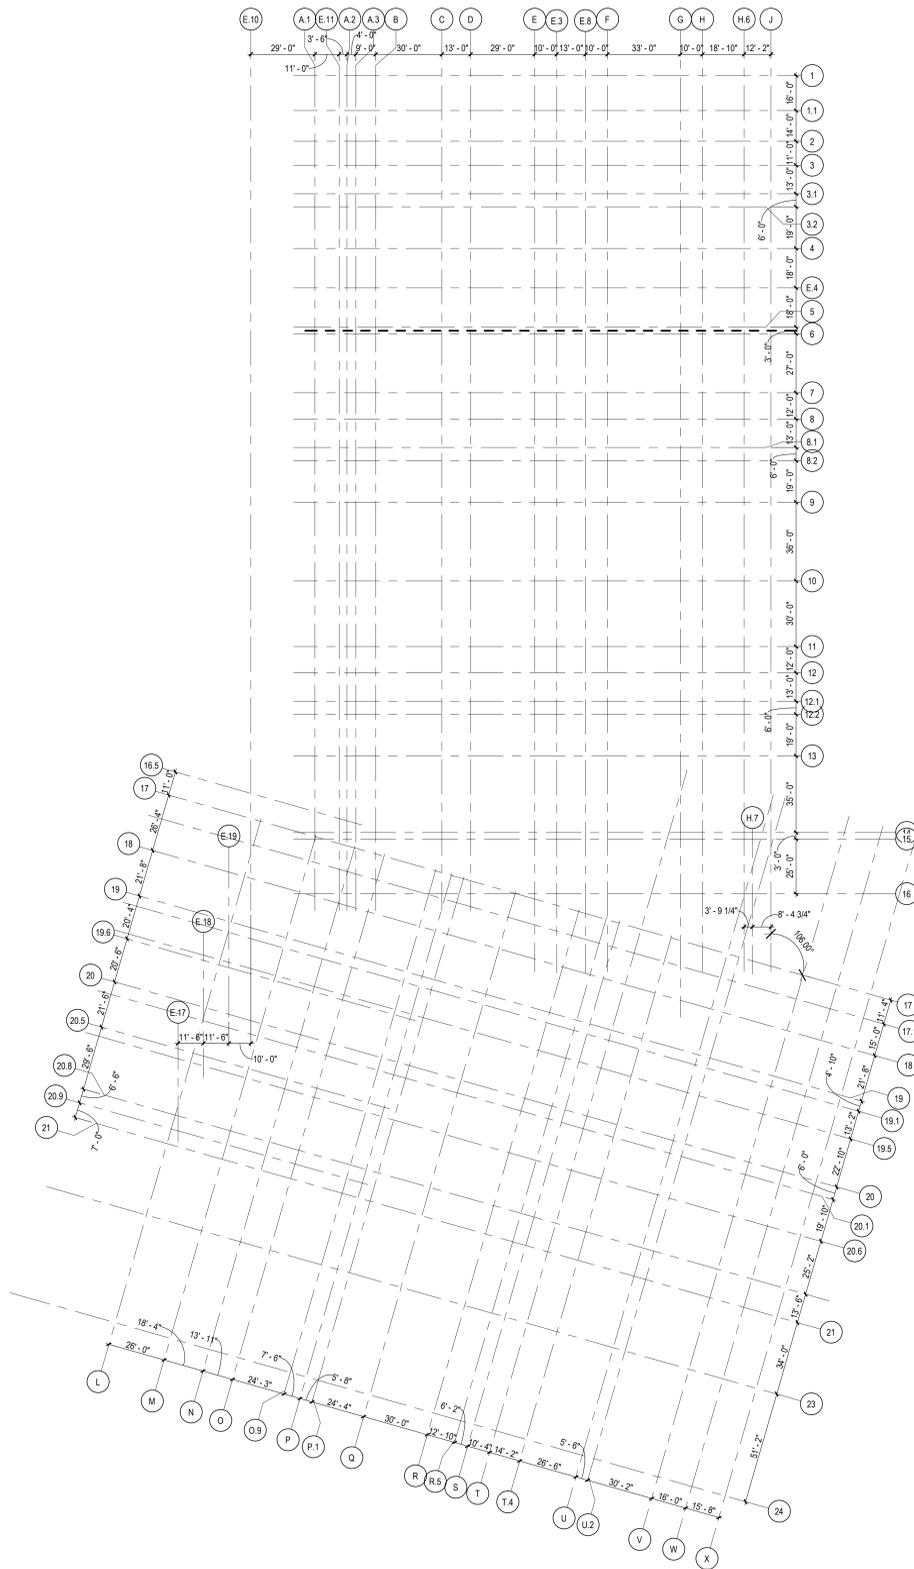

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2020


LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT

1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64681

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS



13-20102-00
GRID GEOMETRY
PLAN

S0.5

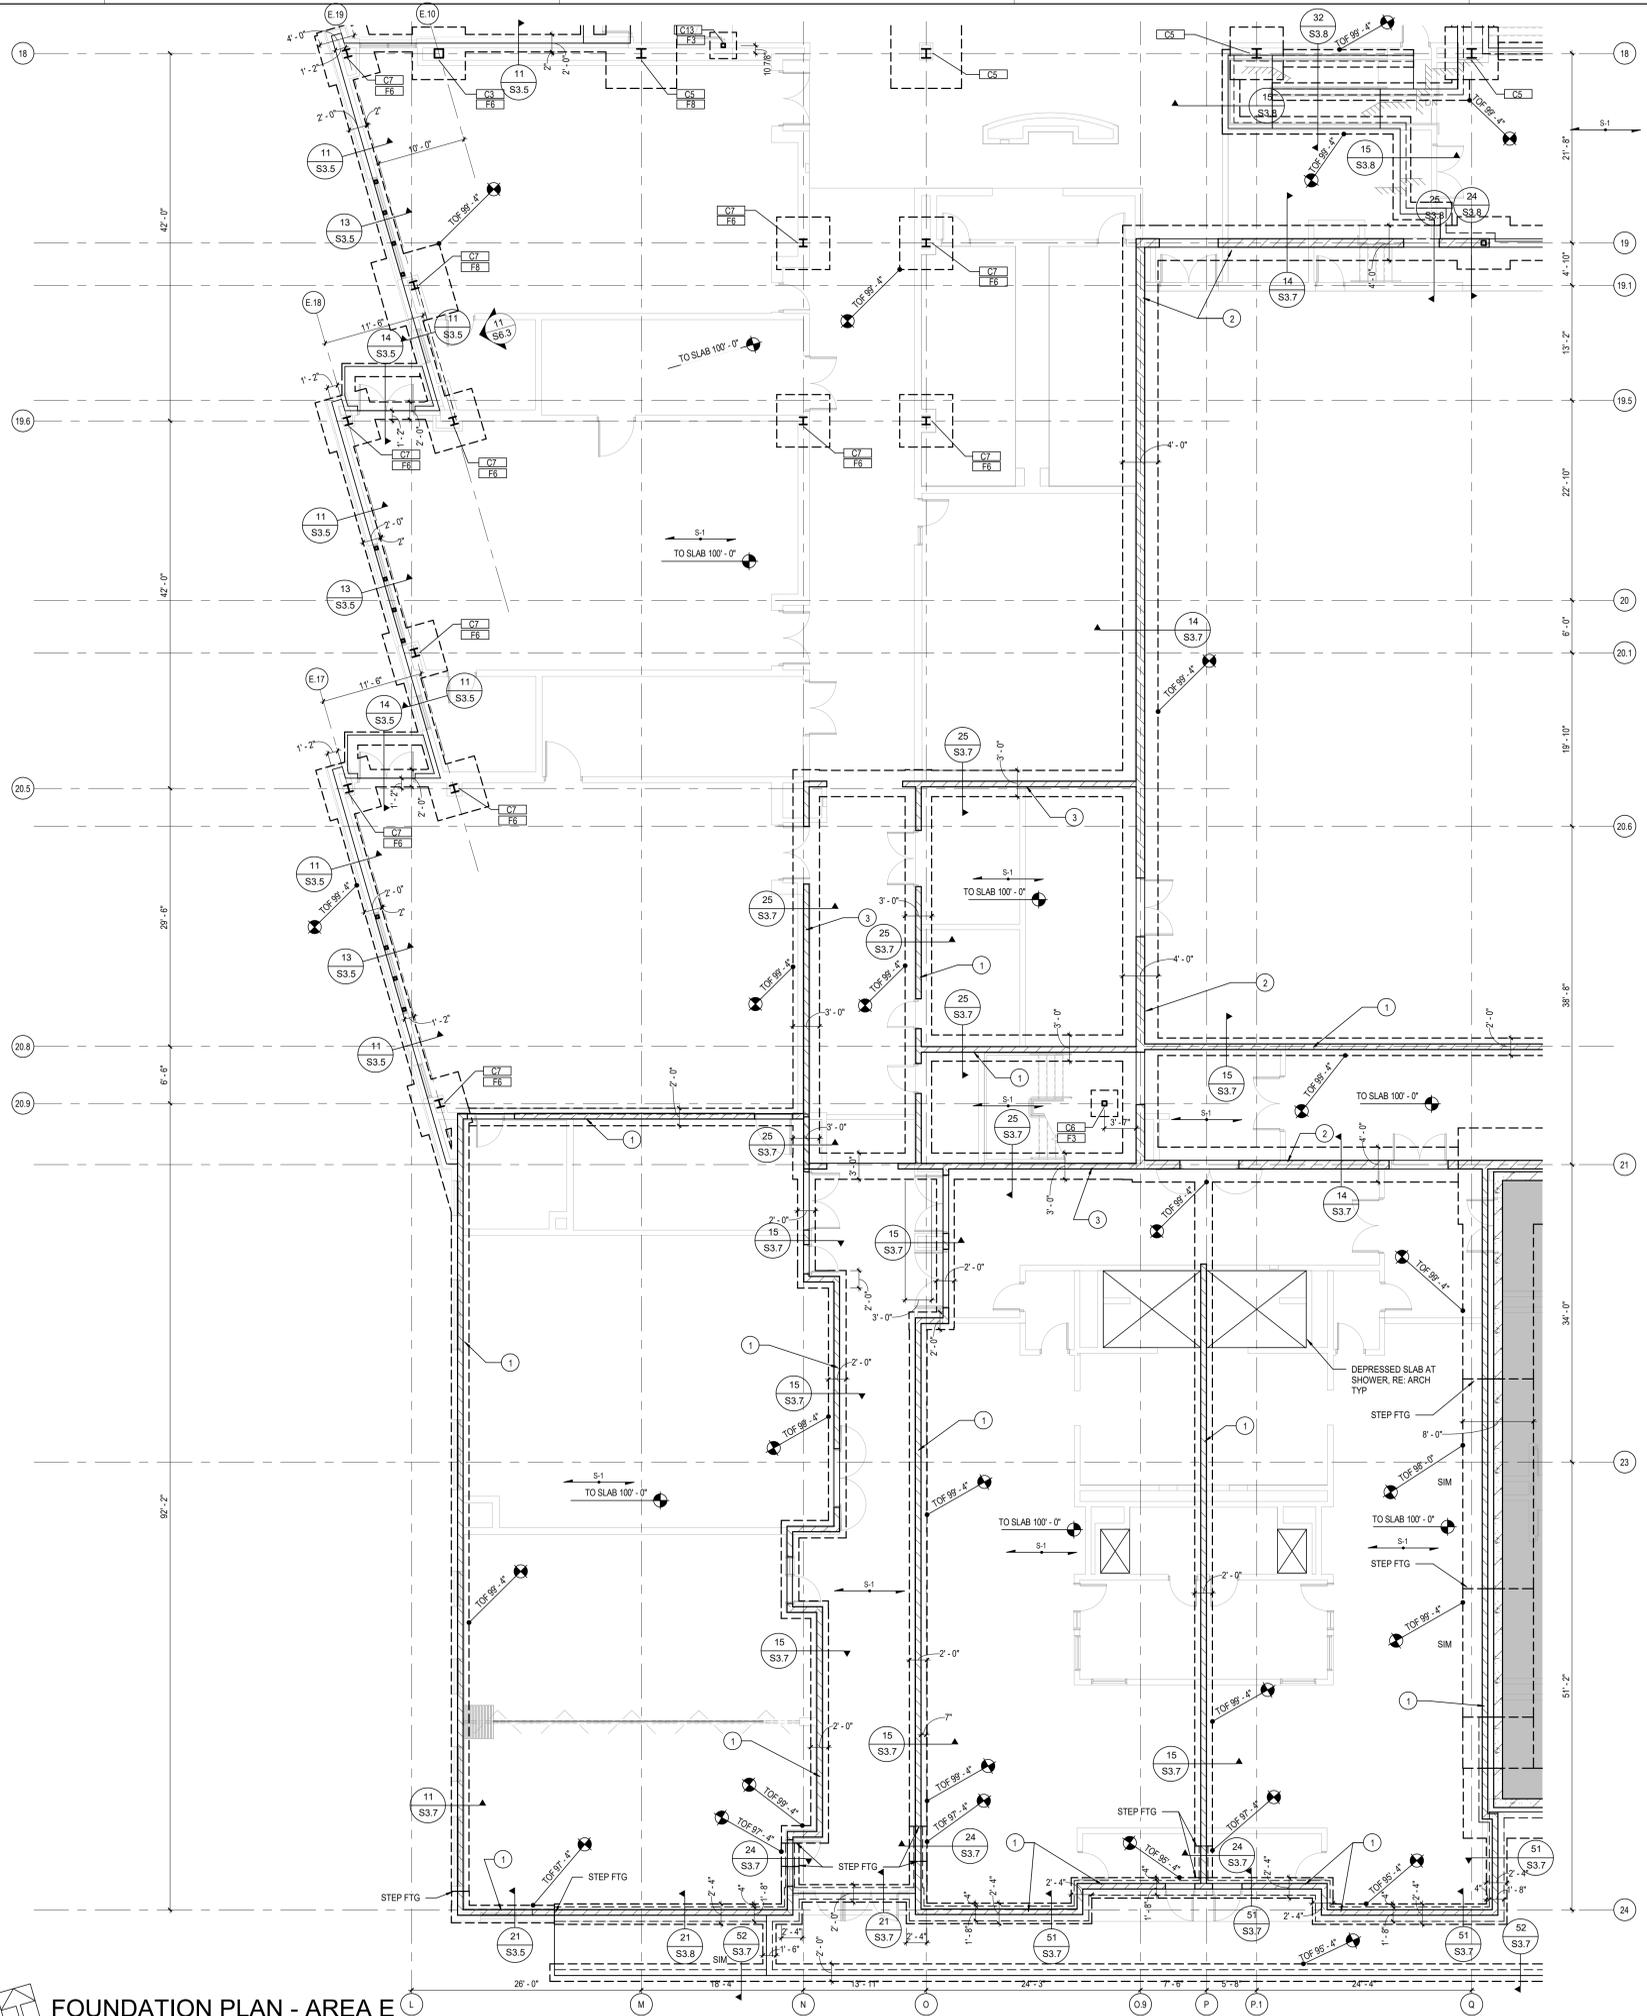

FOUNDATION PLAN - AREA E
 SCALE: 1/8" = 1'-0"

- 1 8" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 2 12" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 3 8" CMU LOAD-BEARING WALL, REINFORCE WITH (1) #5 VERTICAL @ 16" OC.
- 4 8" CMU LOAD-BEARING WALL, REINFORCE WITH (2) #5 VERTICAL @ 8" OC.

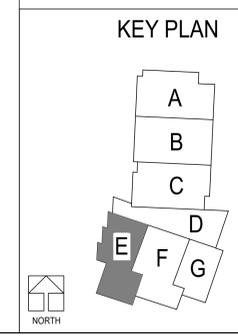

RELEASE FOR CONSTRUCTION
 AS NOTED ON PLANS REVIEW
 DEVELOPMENT SERVICES
 LEE'S SUMMIT, MISSOURI
 10/20/2020


LEE'S SUMMIT MIDDLE SCHOOL #4
 LEE'S SUMMIT R-7 SCHOOL DISTRICT
 1001 SE BAILEY ROAD
 LEE'S SUMMIT, MO 64681

PACKAGE 3 - BUILDING & SITE
 - ISSUE FOR PERMIT
 10/08/20
 REVISIONS

13-20102-00
 FOUNDATION PLAN - AREA E

S1.1E

BN 360/13-20102-01 Lee's Summit Middle School 4/15/2010 10:00 AM Lee's Summit Middle School - S1_2020.rvt
10/7/2020 4:32:50 PM

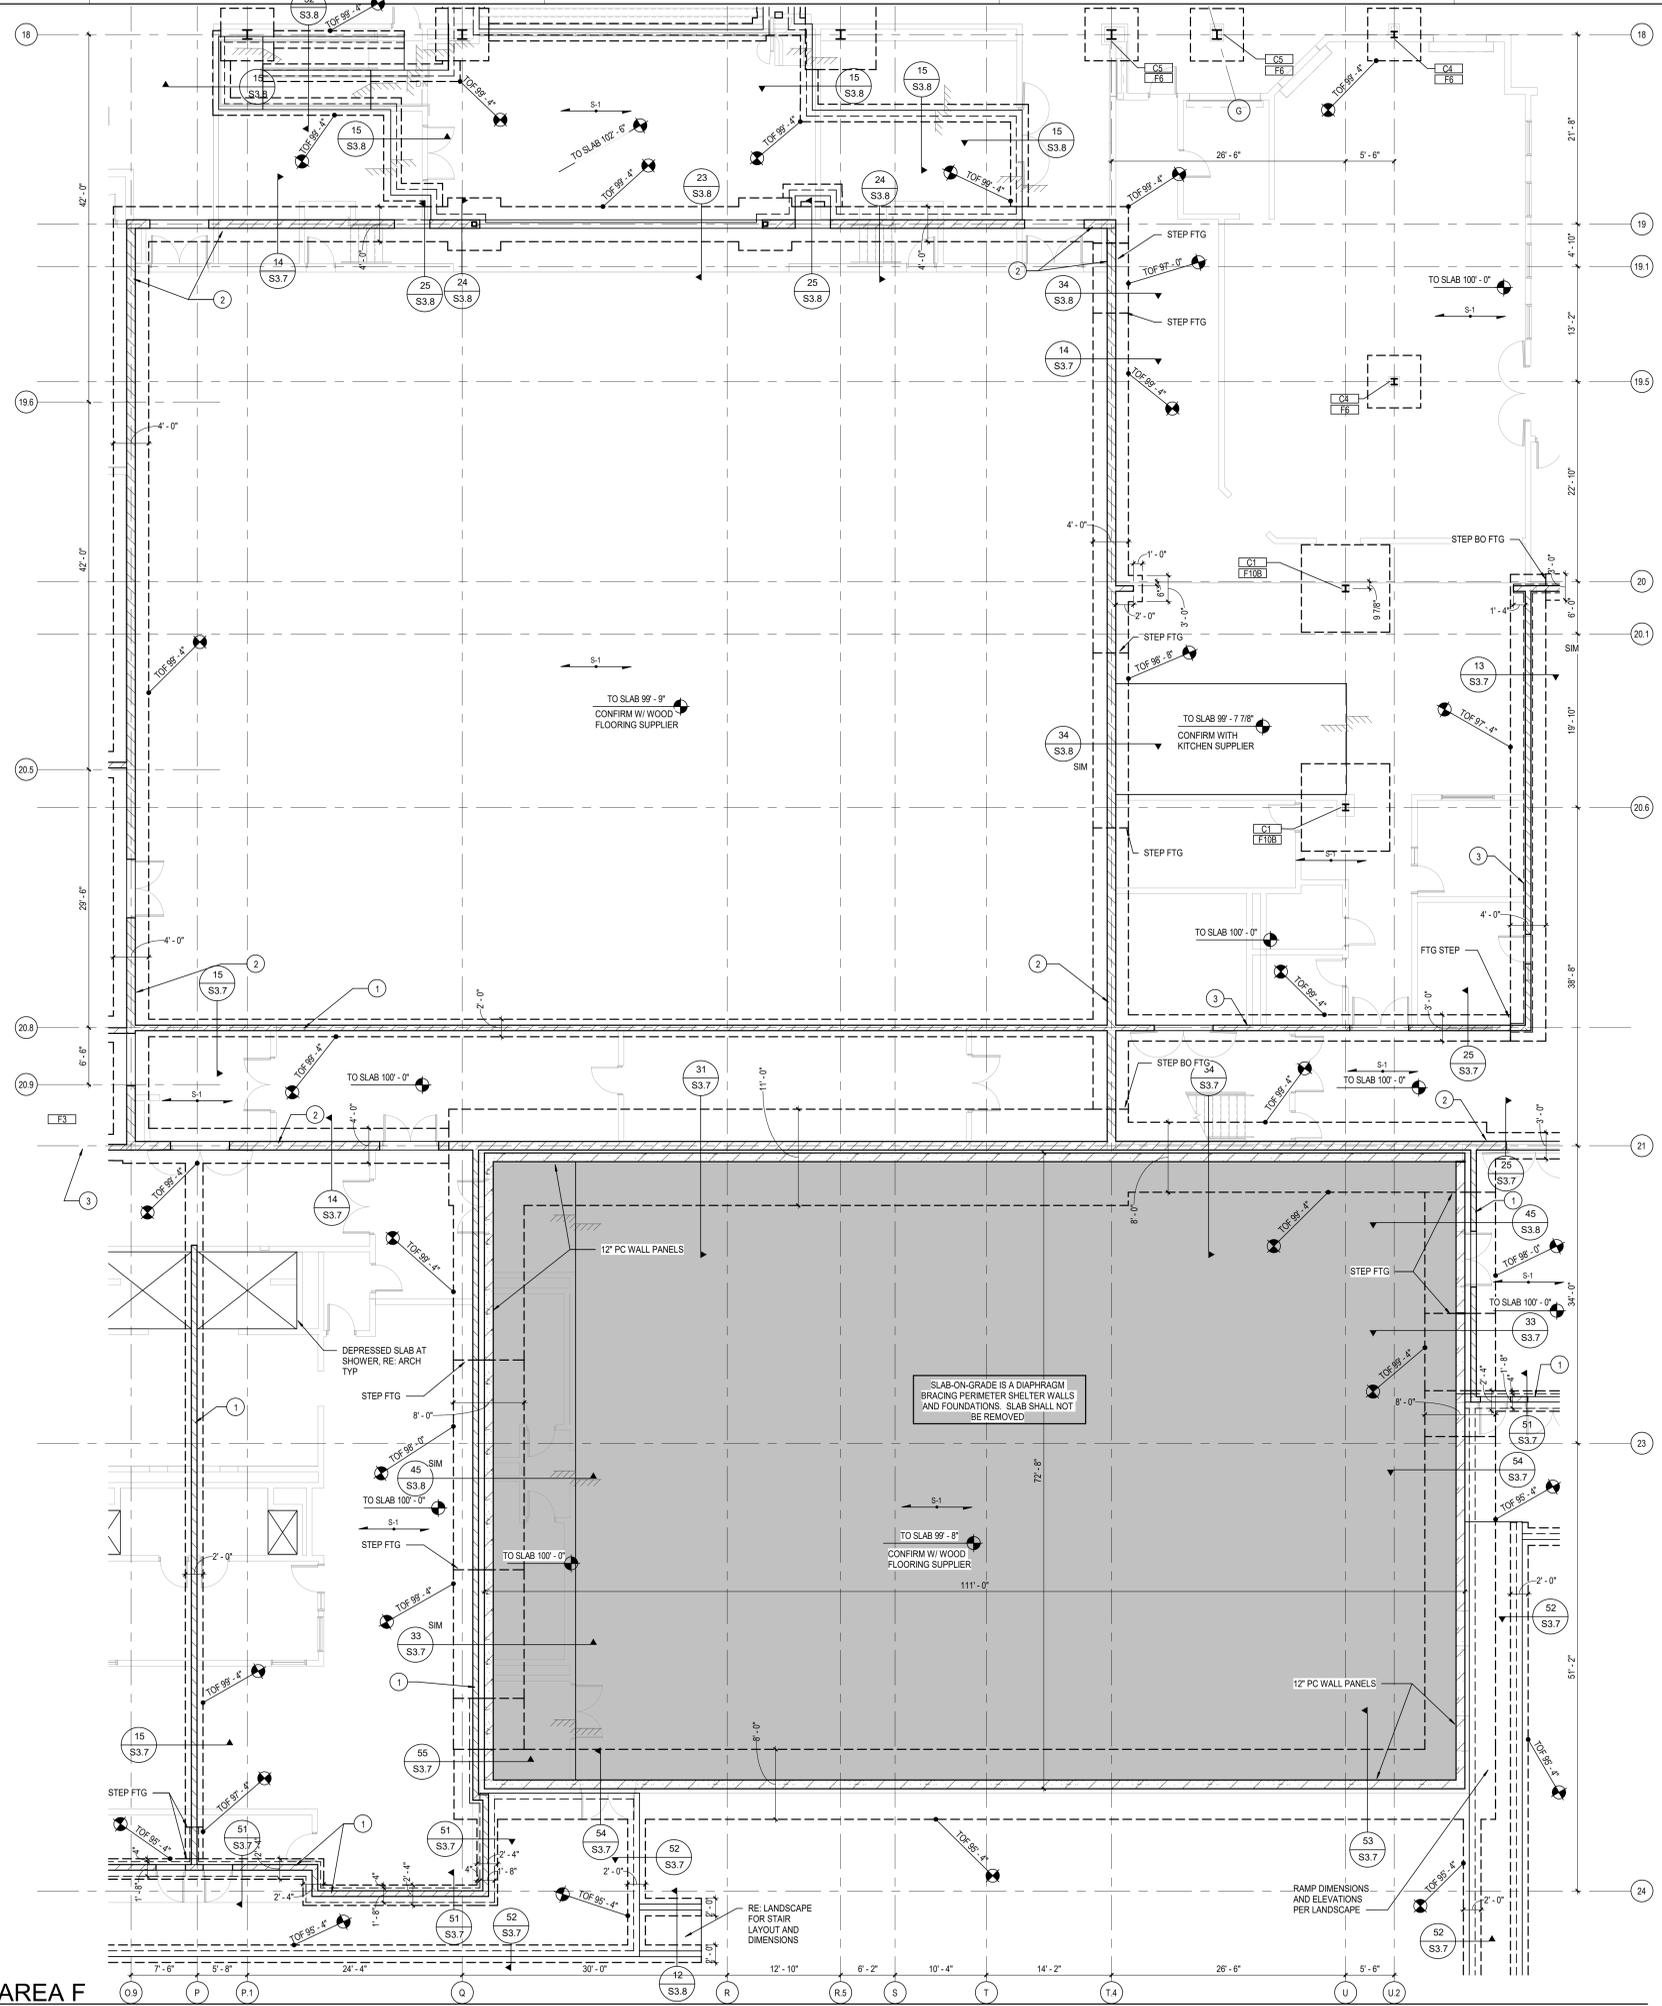

- 1 6" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 2 12" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 3 6" CMU LOAD-BEARING WALL, REINFORCE WITH (1) #5 VERTICAL @ 16" OC.
- 4 6" CMU LOAD-BEARING WALL, REINFORCE WITH (2) #5 VERTICAL @ 17" OC.



RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 10/20/2020


LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS


13-20102-00
FOUNDATION PLAN - AREA F

S1.1F

FOUNDATION PLAN - AREA F
SCALE: 1/8" = 1'-0"


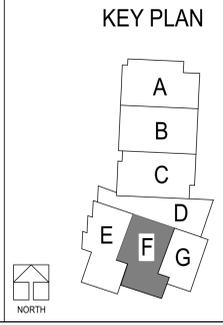


B:\13-20102-00\Lee's Summit Middle School 415-20102-00_Lee's Summit Middle School - S1.1G.dwg
10/7/2020 4:33:04 PM

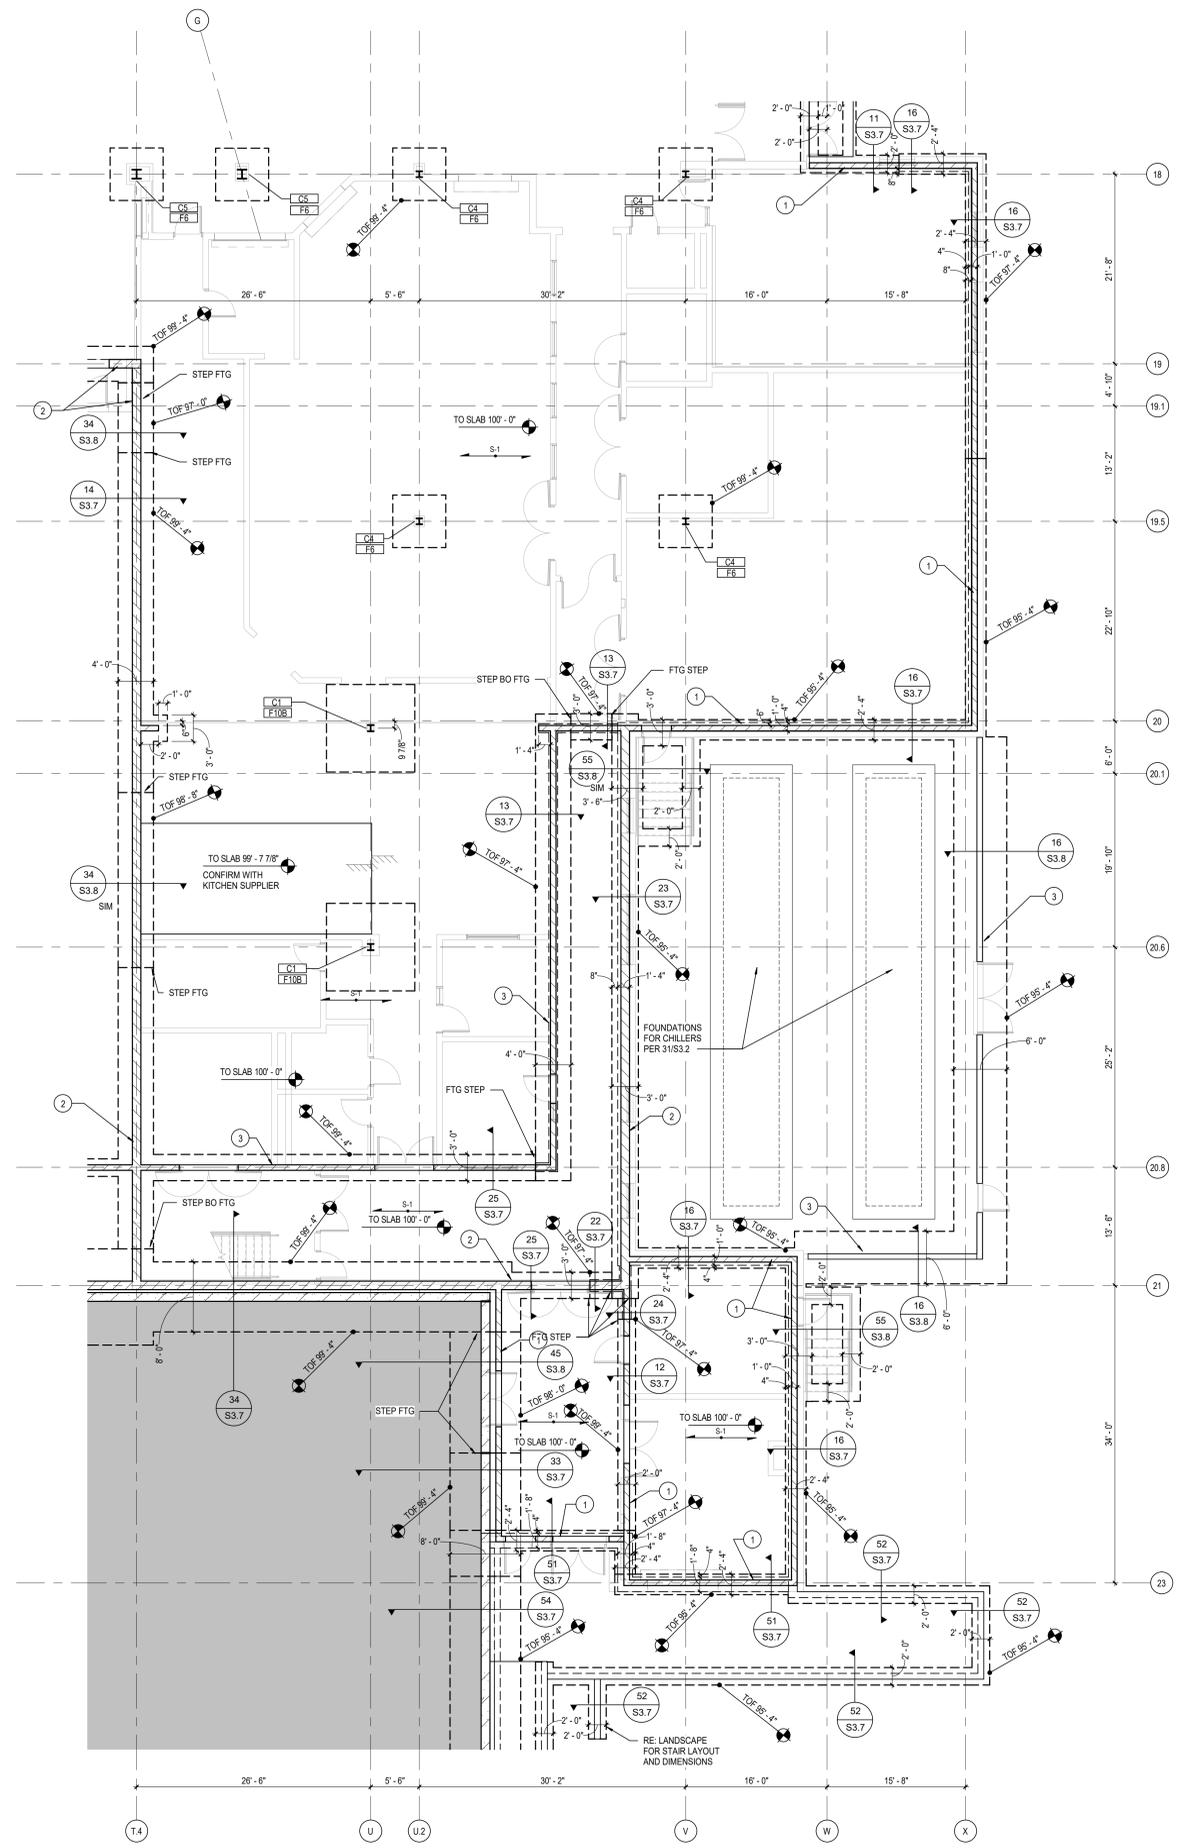

FOUNDATION PLAN - AREA G
SCALE: 1/8" = 1'-0"

- 1 8" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 2 12" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 3 8" CMU LOAD-BEARING WALL, REINFORCE WITH (1) #5 VERTICAL @ 16" OC.
- 4 8" CMU LOAD-BEARING WALL, REINFORCE WITH (2) #5 VERTICAL @ 8" OC.

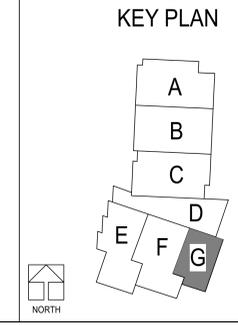


RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2020

LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT
1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64681


PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS

13-20102-00
FOUNDATION PLAN - AREA G

S1.1G

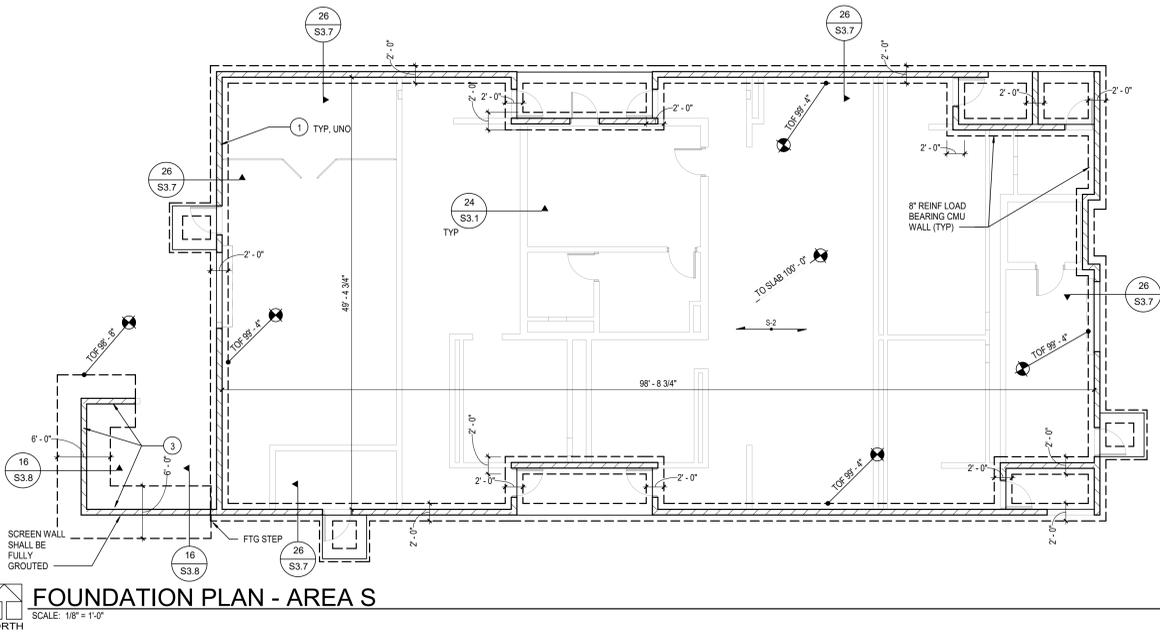

FOUNDATION PLAN - AREA S
SCALE: 1/8" = 1'-0"
NORTH

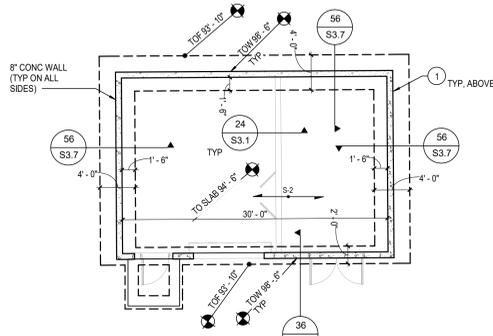

FOUNDATION PLAN - AREA T
SCALE: 1/8" = 1'-0"
NORTH

- 1 8" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 2 12" CMU LOAD-BEARING WALL, REINFORCE PER GENERAL NOTES.
- 3 8" CMU LOAD-BEARING WALL, REINFORCE WITH (1) #5 VERTICAL @ 18" OC
- 4 8" CMU LOAD-BEARING WALL, REINFORCE WITH (2) #5 VERTICAL @ 8" OC.




RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 10/20/2020

LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT
1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64661

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS


13-20102-00
FOUNDATION
PLAN AREAS S &
T

S1.1S

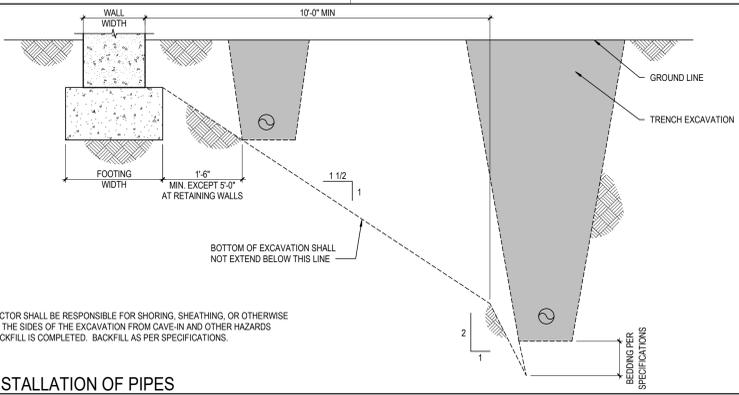


11 TYP INSTALLATION OF PIPES
S3.2 SCALE: 3/4" = 1'-0"

NOTE:
THE CONTRACTOR SHALL BE RESPONSIBLE FOR SHORING, SHEATHING, OR OTHERWISE MAINTAINING THE SIDES OF THE EXCAVATION FROM CAVE-IN AND OTHER HAZARDS UNTIL ALL BACKFILL IS COMPLETED. BACKFILL AS PER SPECIFICATIONS.


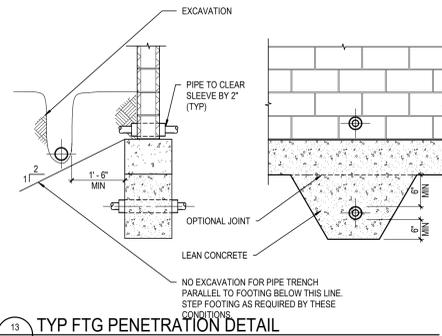


13 TYP FTG PENETRATION DETAIL
S3.2 SCALE: 1/2" = 1'-0"

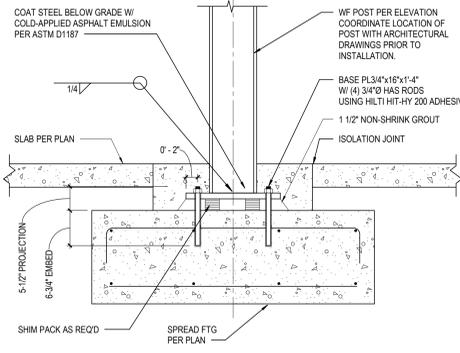


23 TYPICAL WF POST CONNECTION DETAIL
S3.2 SCALE: 1" = 1'-0"


14 TYP INSTALLATION OF PIPES
S3.2 SCALE: 3/4" = 1'-0"

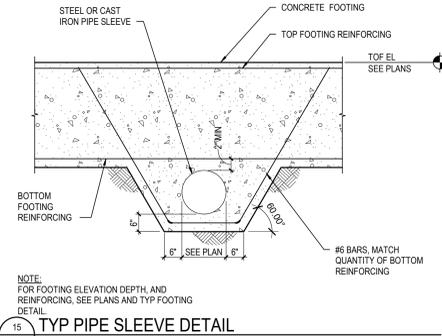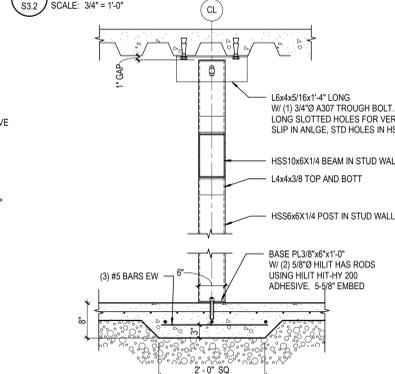


15 TYP PIPE SLEEVE DETAIL
S3.2 SCALE: 1/2" = 1'-0"

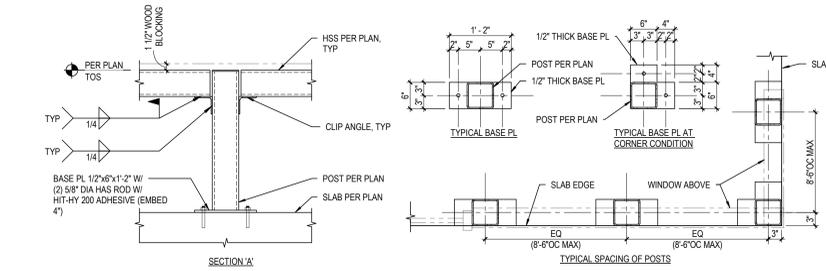

21 TYP WINDOW OR LOUVER FRAMING SUPPORTS
S3.2 SCALE: 3/4" = 1'-0"

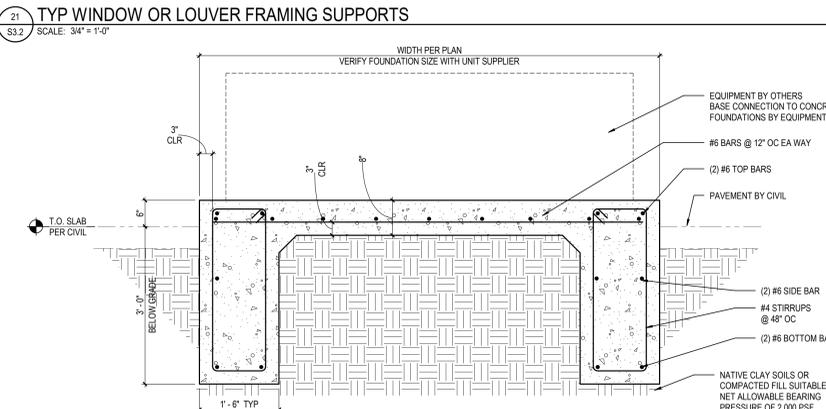


31 TYPICAL MECHANICAL EQUIPMENT FOUNDATION
S3.2 SCALE: 3/4" = 1'-0"

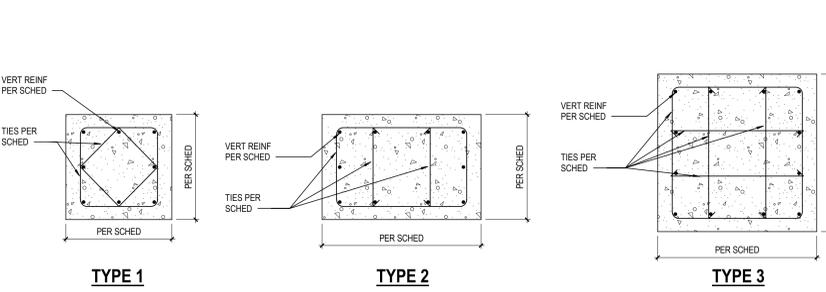


32 TYP REINFORCED WALL OPENING DETAIL
S3.2 SCALE: 3/8" = 1'-0"

41 CONCRETE COLUMN SCHEDULE & REINF DETAILS
S3.2 SCALE: 3/4" = 1'-0"

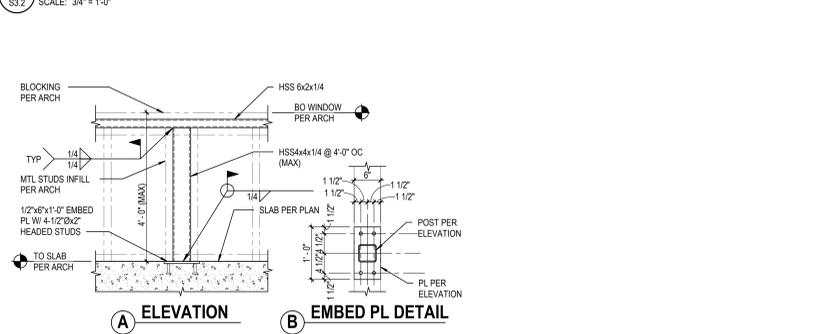


51 TYPICAL DETAIL
S3.2 SCALE: 3/4" = 1'-0"


CONC COLUMN SCHEDULE				
MARK	SIZE	VERTICAL REINFORCEMENT	TIES	TYPE
CC1	24 x 24	(8) #5 VERT	#4 TIES @ 3R@12	TYPE 1
CC2	24 x 36	(10) #5 VERT	#4 TIES @ 3R@12	TYPE 2
CC3	36 x 36	(12) #5 VERT	#4 TIES @ 3R@12	TYPE 3

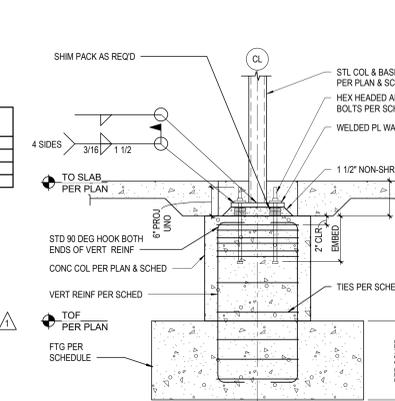


44 TYP COLUMN BASE ON CONC COLUMN DETAIL
S3.2 SCALE: 3/4" = 1'-0"

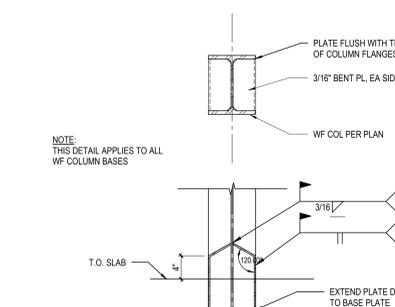


54 TYP WF BASE CLOSURE PLATE DETAIL
S3.2 SCALE: 1" = 1'-0"

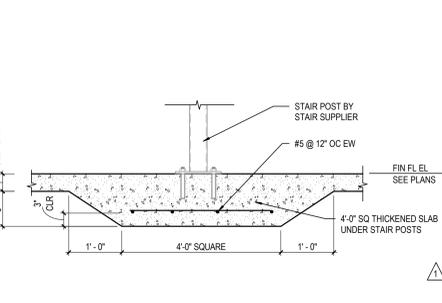


25 TYP STAIR POST BASE DETAIL
S3.2 SCALE: 3/4" = 1'-0"

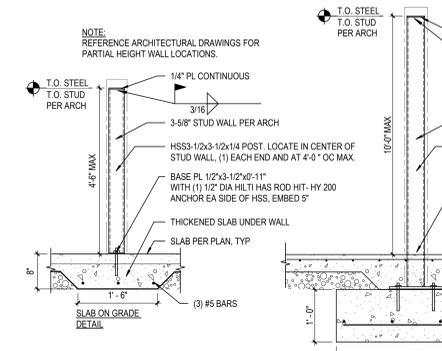


35 TYP PARTIAL HEIGHT WALL SUPPORT DETAIL
S3.2 SCALE: 3/4" = 1'-0"

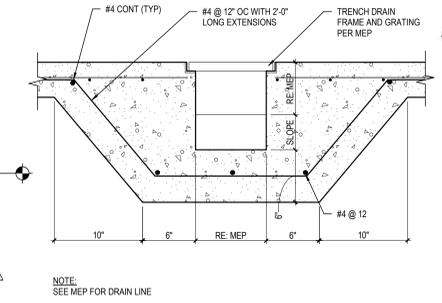

26 TYP TRENCH DRAIN & UTILITY TRENCH DETAIL
S3.2 SCALE: 1 1/2" = 1'-0"

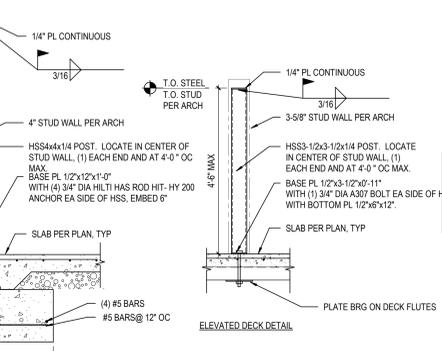


36 TYP ELEVATED DECK DETAIL
S3.2 SCALE: 3/4" = 1'-0"

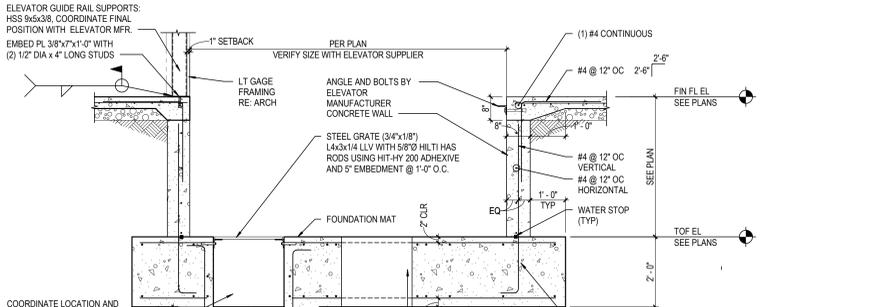


55 TYP ELEVATOR PIT DETAIL
S3.2 SCALE: 1/2" = 1'-0"


10/7/2020 4:37:07 PM B:\350\15-20102-01\Lee's Summit Middle School 4\15-20102-01_Lee's Summit Middle School - ST_2020.rvt

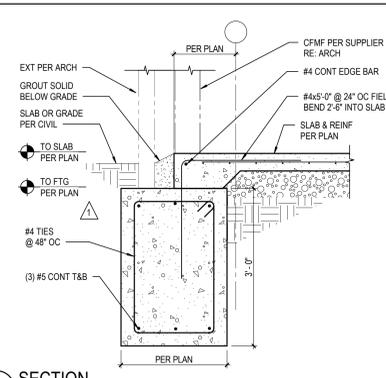


11 SECTION
S3.5 SCALE: 3/4" = 1'-0"

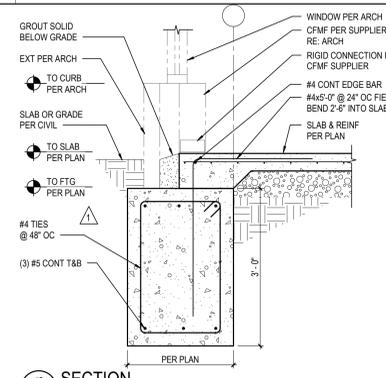


12 SECTION
S3.5 SCALE: 3/4" = 1'-0"

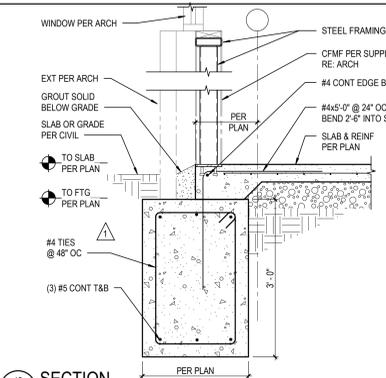


13 SECTION
S3.5 SCALE: 3/4" = 1'-0"

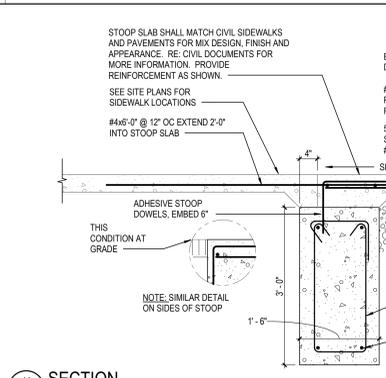


14 SECTION
S3.5 SCALE: 3/4" = 1'-0"

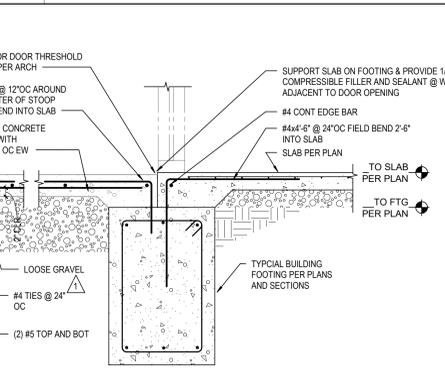


15 SECTION
S3.5 SCALE: 3/4" = 1'-0"

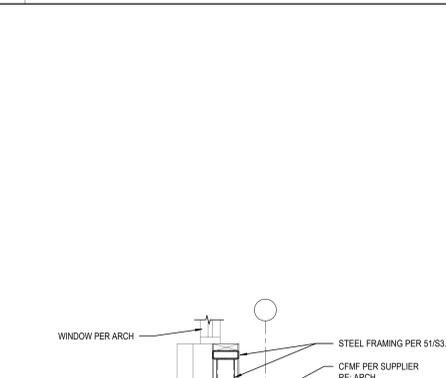


16 SECTION
S3.5 SCALE: 3/4" = 1'-0"

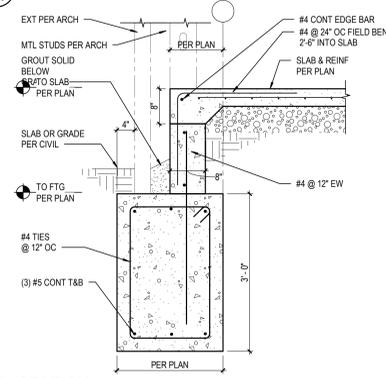


21 SECTION
S3.5 SCALE: 3/4" = 1'-0"

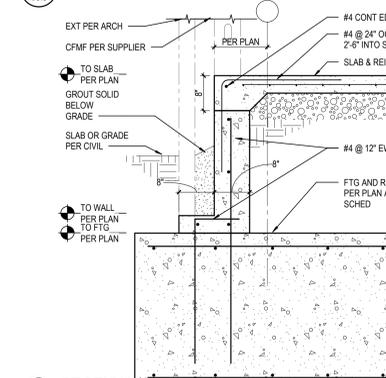

22 SECTION
S3.5 SCALE: 3/4" = 1'-0"

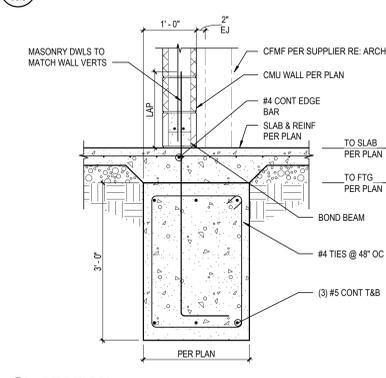


23 SECTION
S3.5 SCALE: 3/4" = 1'-0"

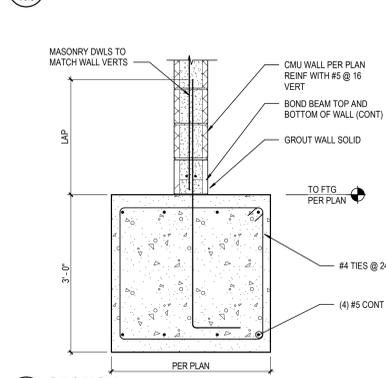


24 SECTION
S3.5 SCALE: 3/4" = 1'-0"




25 SECTION
S3.5 SCALE: 3/4" = 1'-0"

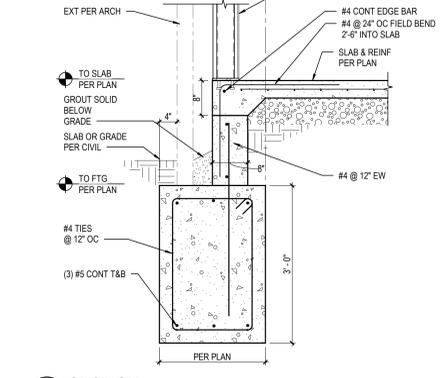

26 SECTION
S3.5 SCALE: 3/4" = 1'-0"

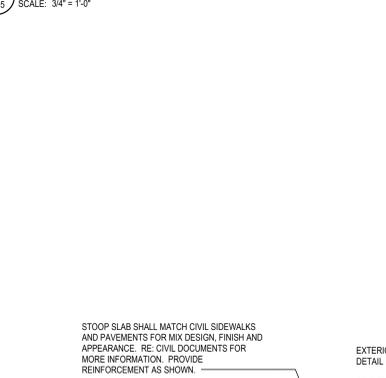

31 SECTION
S3.5 SCALE: 3/4" = 1'-0"

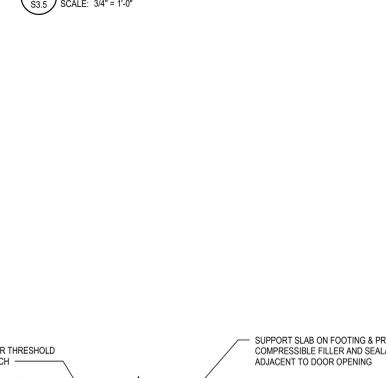

32 SECTION
S3.5 SCALE: 3/4" = 1'-0"




33 SECTION
S3.5 SCALE: 3/4" = 1'-0"




34 SECTION
S3.5 SCALE: 3/4" = 1'-0"




35 SECTION
S3.5 SCALE: 3/4" = 1'-0"

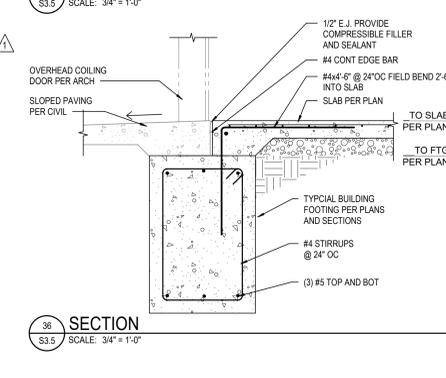

36 SECTION
S3.5 SCALE: 3/4" = 1'-0"

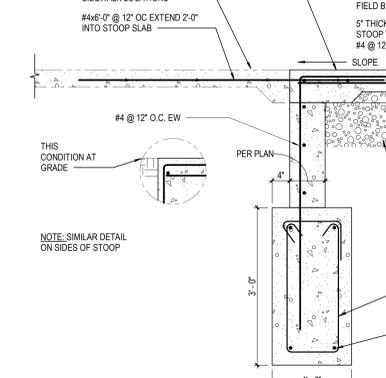

41 SECTION
S3.5 SCALE: 3/4" = 1'-0"

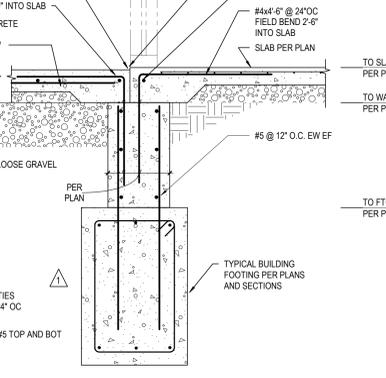

42 SECTION
S3.5 SCALE: 3/4" = 1'-0"



43 SECTION
S3.5 SCALE: 3/4" = 1'-0"




44 SECTION
S3.5 SCALE: 3/4" = 1'-0"



45 SECTION
S3.5 SCALE: 3/4" = 1'-0"



46 SECTION
S3.5 SCALE: 3/4" = 1'-0"




RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2020


LEE'S SUMMIT MIDDLE SCHOOL #4
LEE'S SUMMIT R-7 SCHOOL DISTRICT
1001 SE BAILEY ROAD
LEE'S SUMMIT, MO 64681

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS
1 ASH-01 10/08/20


13-20102-00
FOUNDATION SECTIONS

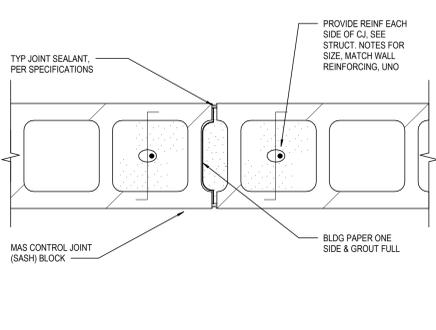


11 TYP CMU WALL CJ DETAIL
S4.8 SCALE: 1/12" = 1'-0"

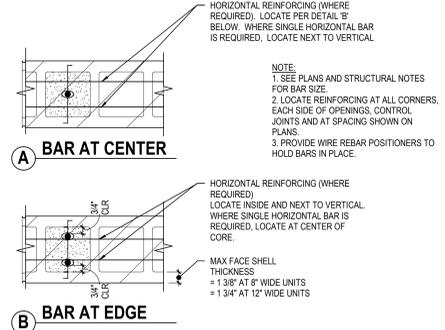


12 TYP CMU WALL REINF PLACEMENT
S4.8 SCALE: 1/12" = 1'-0"

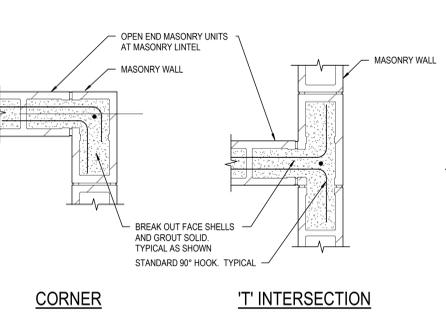


13 TYP LINTEL/BOND BM @ INTERSECTION
S4.8 SCALE: 1" = 1'-0"

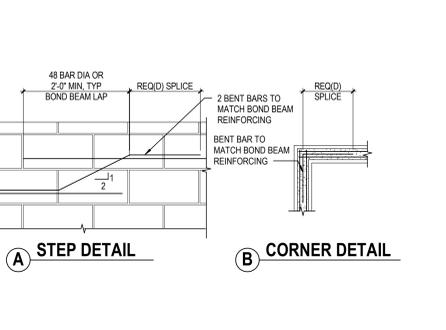


14 TYP BOND BEAM DETAIL
S4.8 SCALE: 3/4" = 1'-0"

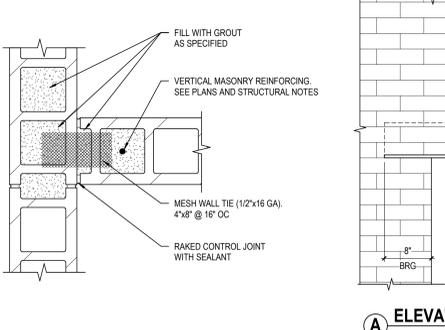


15 TYP INTERSECTION REINF DETAIL
S4.8 SCALE: 1/12" = 1'-0"

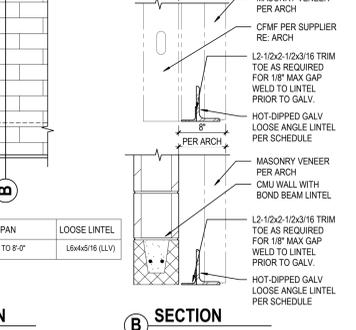

16 TYP LOOSE LINTEL DETAIL
S4.8 SCALE: 1" = 1'-0"

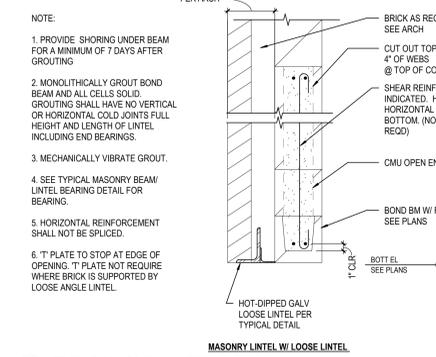

21 TYPICAL CMU LINTEL DETAIL
S4.8 SCALE: 1" = 1'-0"

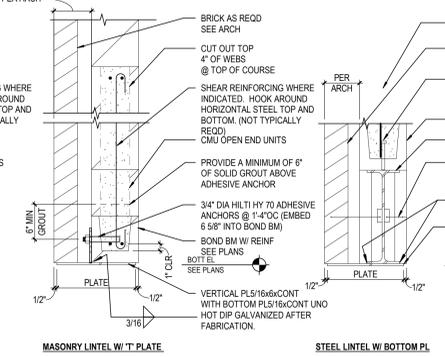


22 TYPICAL CMU LINTEL DETAIL
S4.8 SCALE: 1" = 1'-0"


13 TYP LINTEL/BOND BM @ INTERSECTION
S4.8 SCALE: 1" = 1'-0"

OPENING LINTEL SCHEDULE			
SPAN TABLE	8" CMU	10" OR 12" CMU	COMMENTS
0' < L < 4'-0"	ML-1	ML-2	8" DEEP BOND BM W/ 2-#4 T&B
4'-0" < L < 6'-0"	ML-3	ML-4	16" DEEP BOND BM W/ 2-#5 T&B
6'-0" < L < 9'-4"	ML-5	ML-6	24" DEEP BOND BM W/ 2-#6 T&B
9'-4" < L < 11'-4"	WBX21	WBX24	PROVIDE 5/16" BOT PLATE AS REQ'D
11'-4" < L < 13'-4"	WBX31	WBX31	PROVIDE 5/16" BOT PLATE AS REQ'D
13'-4" < L < 20'-0"	WBX55	WBX55	PROVIDE 5/16" BOT PLATE AS REQ'D


NOTE:
1. ALL OPENINGS REQUIRE A LINTEL. THE CONTRACTOR SHALL COORDINATE ALL OPENING AND PENETRATION LOCATIONS WITH OTHER CONSULTANTS' WORK AND REFER TO THIS SCHEDULE FOR LINTEL SIZES.
2. BOND BEAM REINFORCING SHALL BE CONTINUOUS, WITHOUT SPLICES.
3. DO NOT LOCATE CMU CONTROL JOINTS WITHIN OPENING OR JAMB EXTENTS.
4. STEEL LINTEL BOTTOM PLATES SHALL BE 1" LESS THAN THE NOMINAL WIDTH OF WALL (INCLUDES MASONRY VENEER EXCEPT WHERE BRICK IS SUPPORTED BY LOOSE ANGLE).
5. STEEL LINTELS SHALL HAVE 5/8" DIA X 6" HEADED ANCHOR STUS @ 24" OC INTO AN 8" DEEP BOND BEAM W/ 2#4 T&B.
6. REFER TO OTHER TYPICAL DETAILS FOR FURTHER INFORMATION.
7. SCHEDULE IS SUPERSEDED WHERE LINTEL SIZES ARE SPECIFICALLY NOTED ON PLANS.
8. PROVIDE #4 @ 8" OC SHEAR REINFC FOR ML-5 AND ML-6. SEE TYP MASONRY LINTEL FOR ADDL INFO.

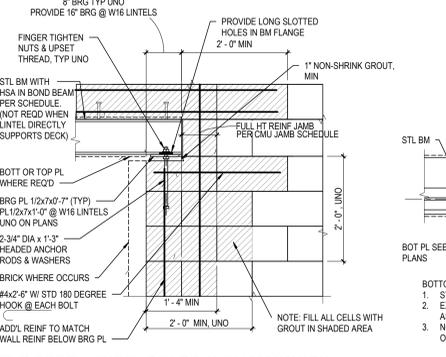


24 TYP STEEL LINTEL BEARING ON MASONRY
S4.8 SCALE: 3/4" = 1'-0"

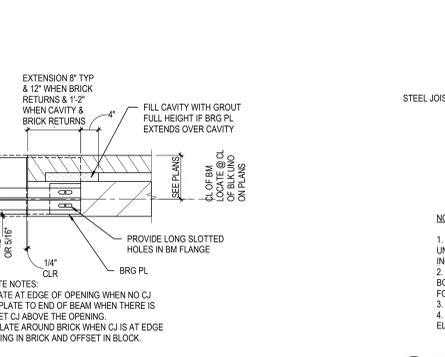

25 TYP MECH PENETRATION IN CMU WALL
S4.8 SCALE: 1/2" = 1'-0"

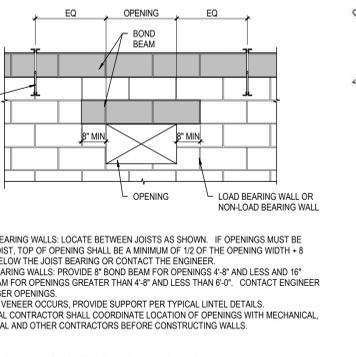

26 TYP MECH PENETRATION IN CMU WALL
S4.8 SCALE: 1/2" = 1'-0"

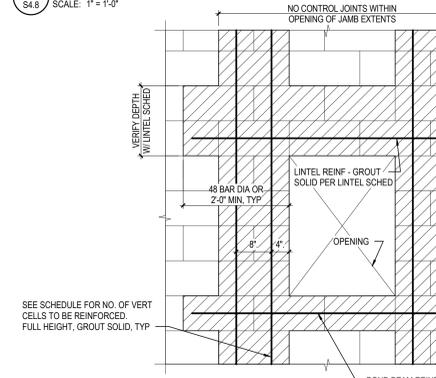


31 TYPICAL CMU OPENING
S4.8 SCALE: 1" = 1'-0"


21 TYPICAL CMU LINTEL DETAIL
S4.8 SCALE: 1" = 1'-0"

JAMB REINFORCEMENT SCHEDULE			
OPENING WIDTH	WALL REINF SPACING	NO. OF REINFORCED CELLS EACH JAMB	COMMENTS
≤ 4'-0"	8" OC	3	
	16" OC	2	
	24" OC	1	
	32" OC	1	
4'-0" < L < 8'-0"	8" OC	6	
	16" OC	3	
	24" OC	2	
	32" OC	2	
8'-0" < L < 12'-0"	8" OC	9	
	16" OC	5	
	24" OC	3	
	32" OC	3	


NOTE:
1. PROVIDE SAME BAR SIZE AND QUANTITY OF BARS PER CELL AS NOTED FOR WALL WHICH OPENING IS LOCATED IN.
2. SCHEDULE IS SUPERSEDED IF SPECIFICALLY NOTED OTHERWISE ON THE PLANS.
3. DO NOT LOCATE CMU CONTROL JOINTS WITHIN OPENING OR JAMB EXTENTS.

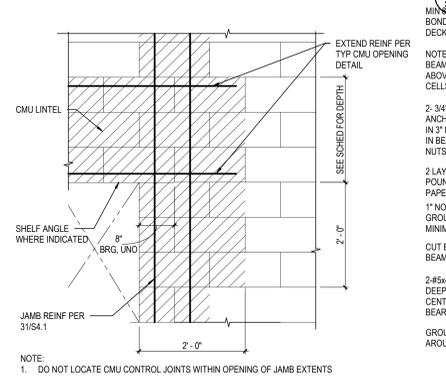


33 TYP CMU LINTEL BRG
S4.8 SCALE: 3/4" = 1'-0"

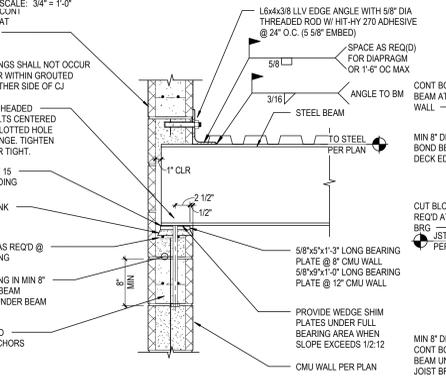


34 TYP STEEL BEAM BEARING AT MASONRY WALL
S4.8 SCALE: 1" = 1'-0"

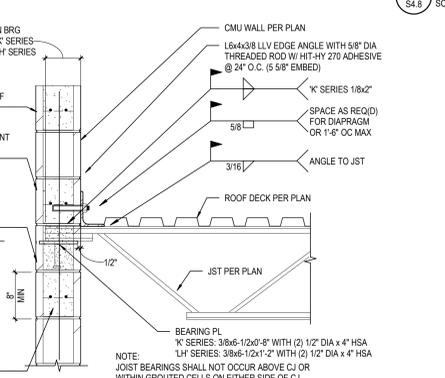


35 TYP JOIST BEARING AT MASONRY WALL
S4.8 SCALE: 1" = 1'-0"

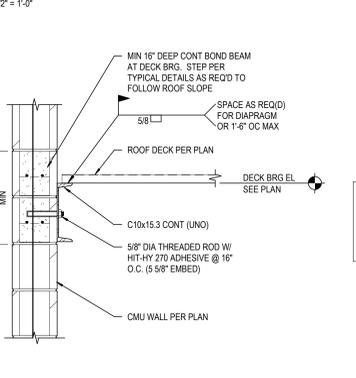


36 TYP DECK TO MASONRY WALL DETAIL
S4.8 SCALE: 1" = 1'-0"

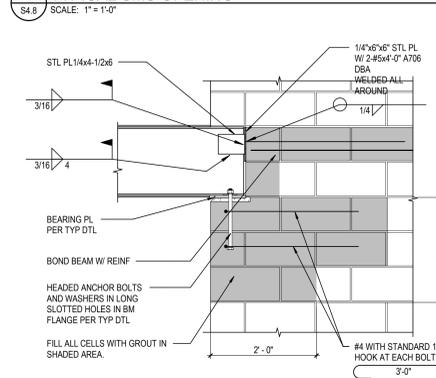


41 TYP CMU COLLECTOR BEAM DETAIL
S4.8 SCALE: 3/4" = 1'-0"

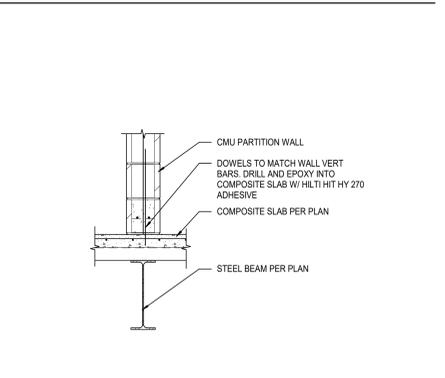


42 TYP ELEVATED CMU WALLSUPPORT DETAIL
S4.8 SCALE: 3/4" = 1'-0"

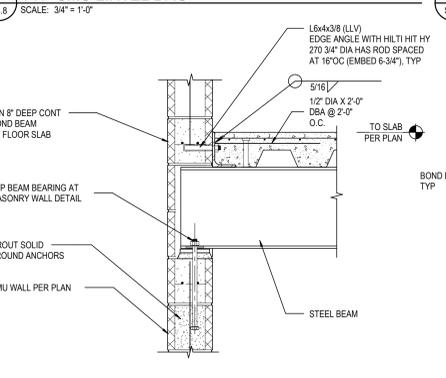


43 TYP FLOOR BEAM AT MASONRY DETAIL
S4.8 SCALE: 1" = 1'-0"

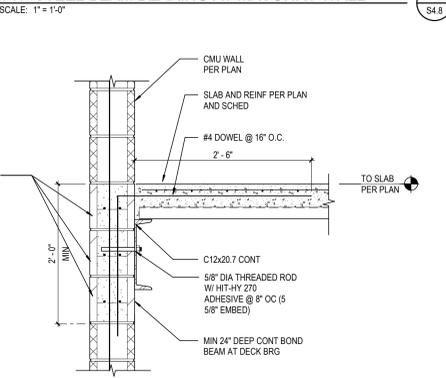


44 TYP FLOOR SLAB AT MASONRY DETAIL
S4.8 SCALE: 1" = 1'-0"

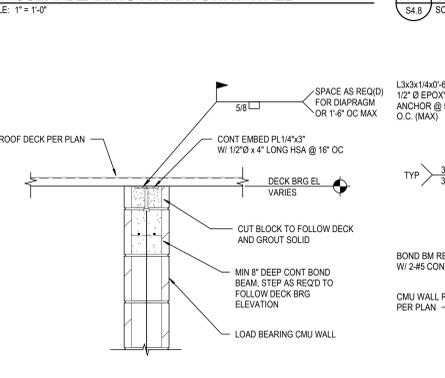


45 TYP INTERIOR BRG ON CMU WALL DETAIL
S4.8 SCALE: 1" = 1'-0"

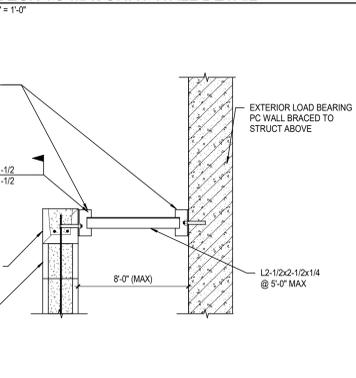


46 TYP PARTITION WALL BRACE TO ADJACENT WALL
S4.8 SCALE: 3/4" = 1'-0"

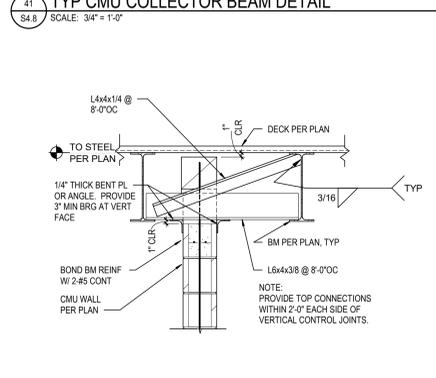


51 TYP CMU PARTITION WALL BRACING DETAIL
S4.8 SCALE: 3/4" = 1'-0"

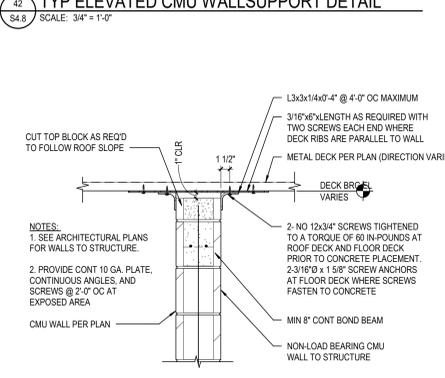


52 TYP CMU PARTITION WALL BRACING DETAIL
S4.8 SCALE: 1" = 1'-0"

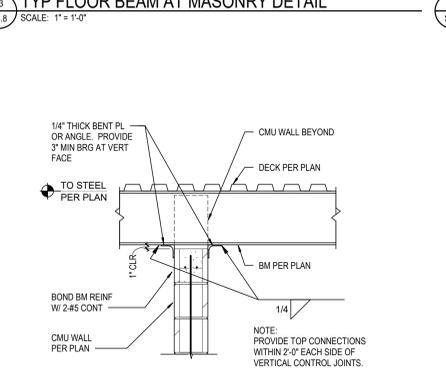


53 TYP CMU PARTITION WALL BRACING DETAIL
S4.8 SCALE: 3/4" = 1'-0"

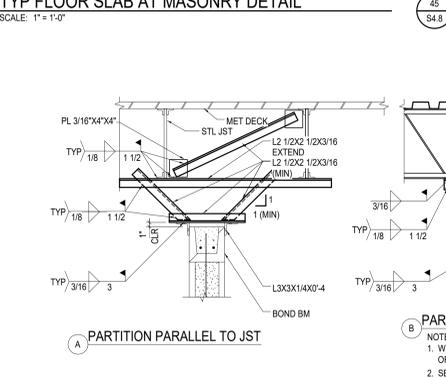


54 TYP CMU PARTITION BRACING DETAIL
S4.8 SCALE: 3/4" = 1'-0"

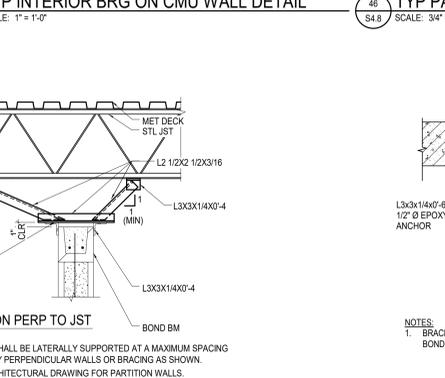


55 TYP PARTITION WALL BRACE TO ADJACENT WALL
S4.8 SCALE: 3/4" = 1'-0"

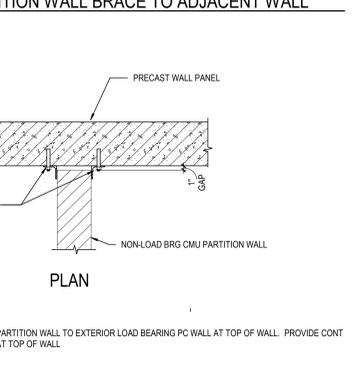


56 TYP PARTITION WALL BRACE TO ADJACENT WALL
S4.8 SCALE: 3/4" = 1'-0"

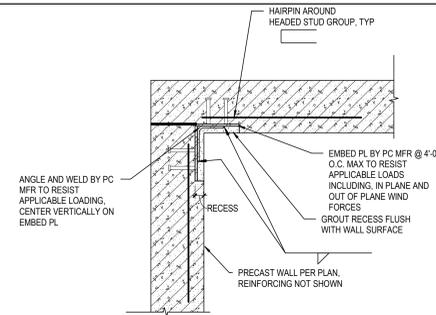


11 TYPICAL CORNER CONNECTION
S4.9 SCALE: 3/4" = 1'-0"

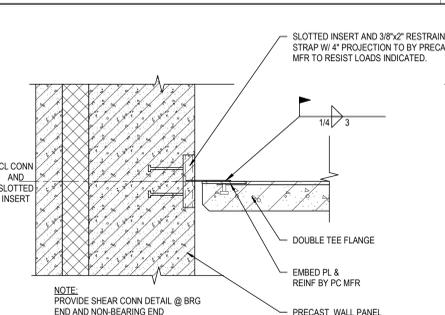


12 TYP PRECAST WALL TO DIAPHRAGM CONN DET
S4.9 SCALE: 1 1/2" = 1'-0"

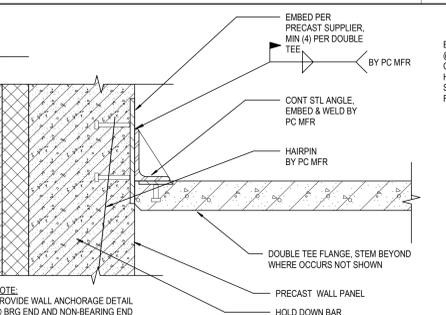


13 TYP OUT OF PLANE WALL ANCHORAGE CONN
S4.9 SCALE: 3" = 1'-0"

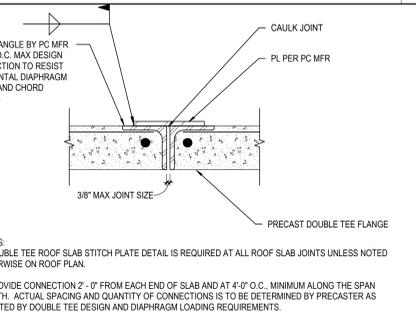


14 TYP DIAPHRAGM CHORD DETAIL
S4.9 SCALE: 3" = 1'-0"

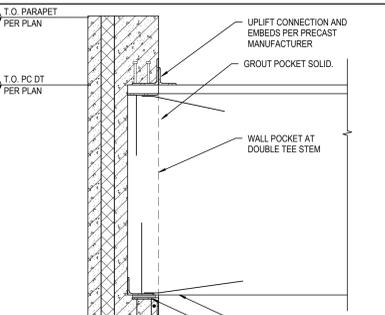


15 TYP DOUBLE TEE / WALL DETAIL
S4.9 SCALE: 3/4" = 1'-0"

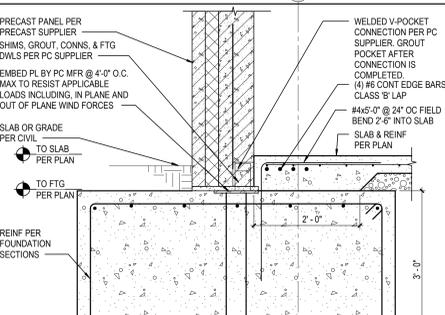


16 TYP PRECAST FOUNDATION CONNECTION
S4.9 SCALE: 3/4" = 1'-0"

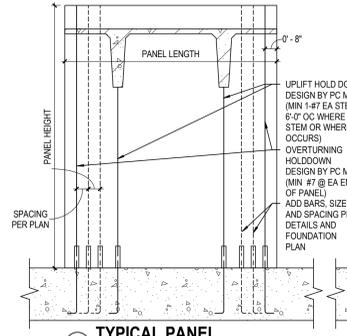


21 TYP HOLD DOWN LOCATIONS
S4.9 SCALE: 1/4" = 1'-0"

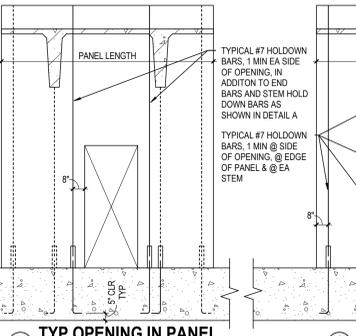


22 TYP OPENING IN PANEL
S4.9 SCALE: 1/4" = 1'-0"

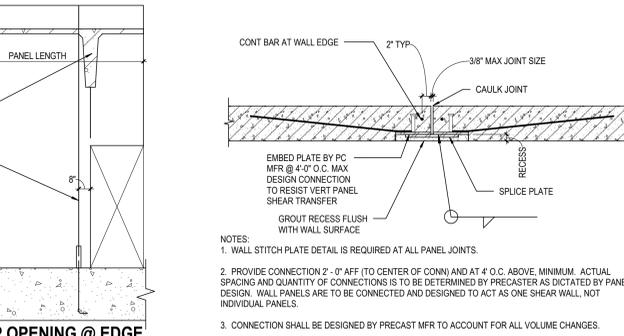


23 WALL STITCH PLATE
S4.9 SCALE: 3/4" = 1'-0"

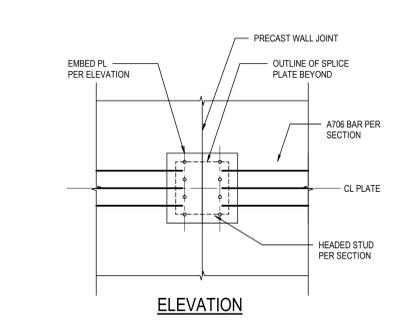


24 ELEVATION
S4.9 SCALE: 3/4" = 1'-0"

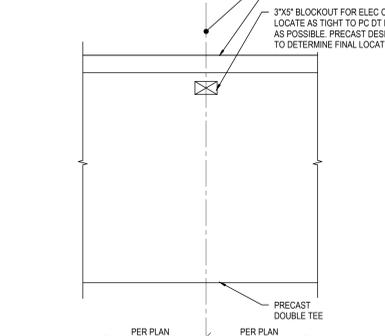


25 TYP BLOCKOUT FOR ELEC CONDUIT DETAIL
S4.9 SCALE: 3/4" = 1'-0"

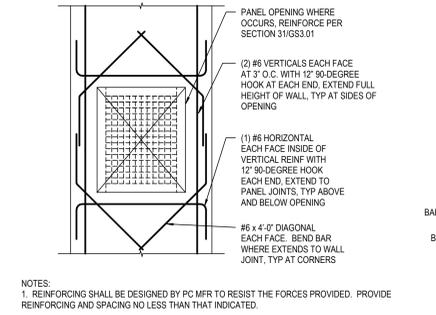


31 ELEVATION - WALL PENETRATION
S4.9 SCALE: 1/2" = 1'-0"

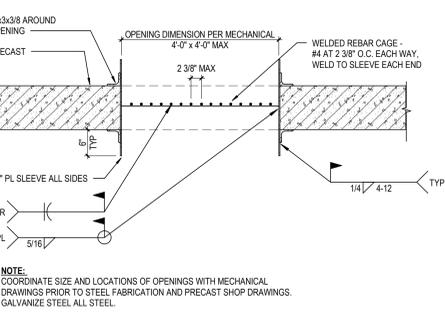

32 TYP WALL/ROOF OPENING PROTECTION DET
S4.9 SCALE: 3/4" = 1'-0"

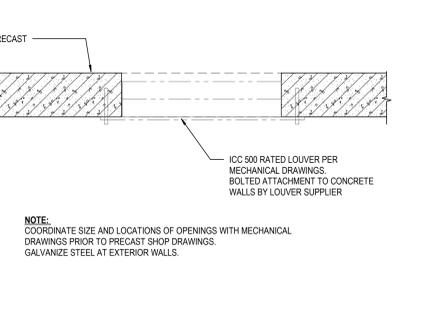

33 TYP WALL/ROOF OPENING PROTECTION DET
S4.9 SCALE: 3/4" = 1'-0"



RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 10/20/2020

PACKAGE 3 - BUILDING & SITE
- ISSUE FOR PERMIT
10/08/20
REVISIONS

13-20102-00
PRECAST
TYPICAL DETAILS

