


RELEASE FOR  
CONSTRUCTION  
AS NOTED ON PLANS REVIEW  
DEVELOPMENT SERVICES  
LEE'S SUMMIT, MISSOURI  
11/03/2020








# Walker Custom Homes 504 Main St

## Recommended 1st Floor Placement Plan

Joist Spacing 16" O.C

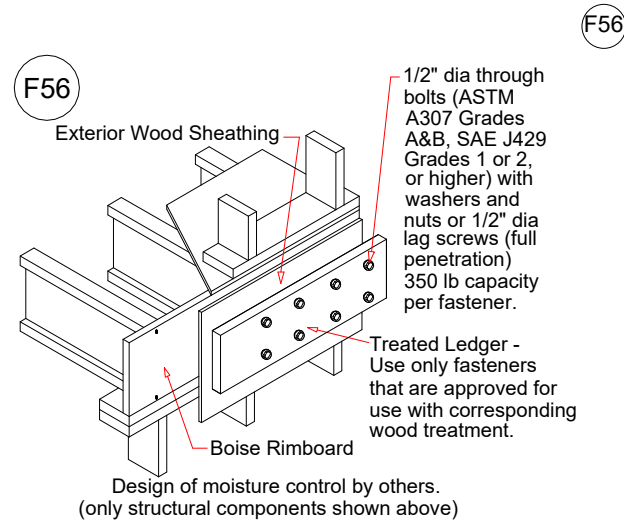

Typical Deck Attachment

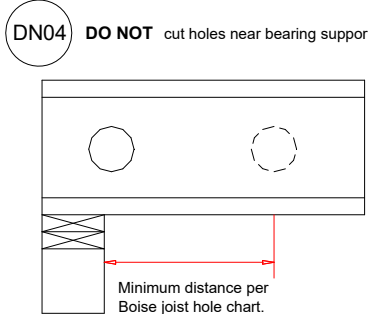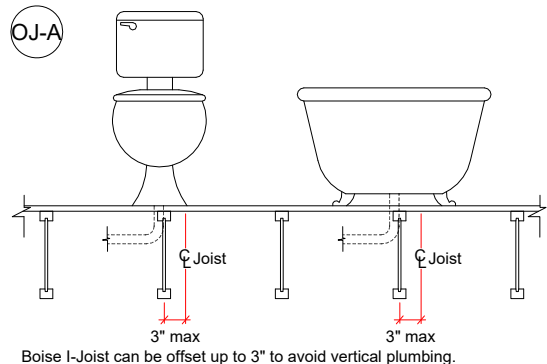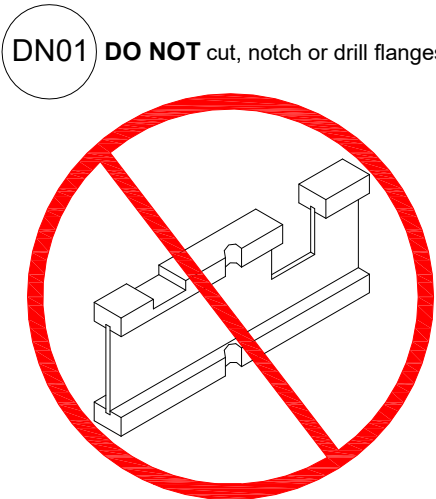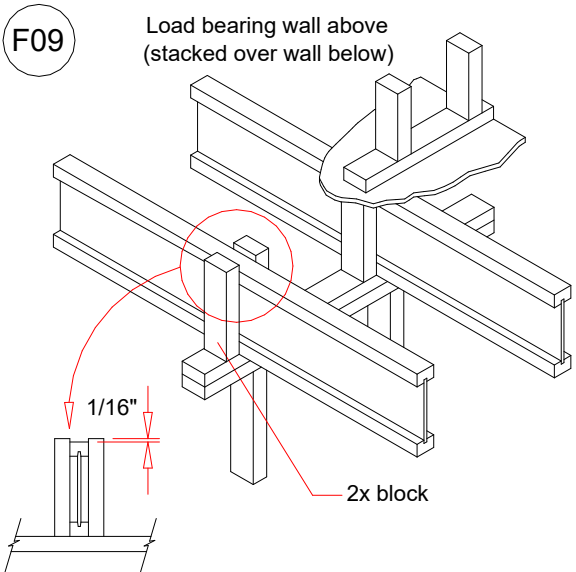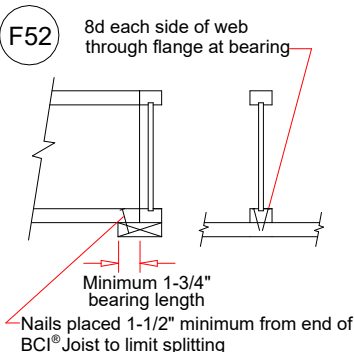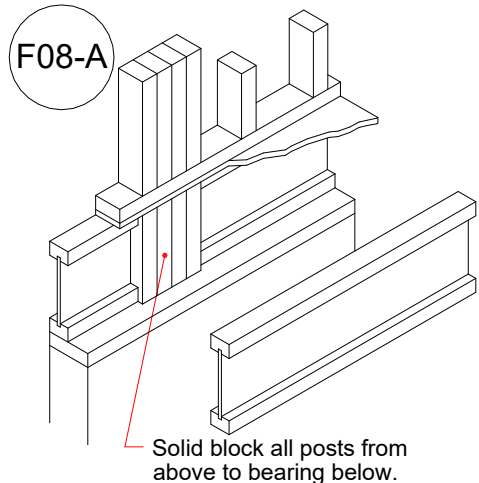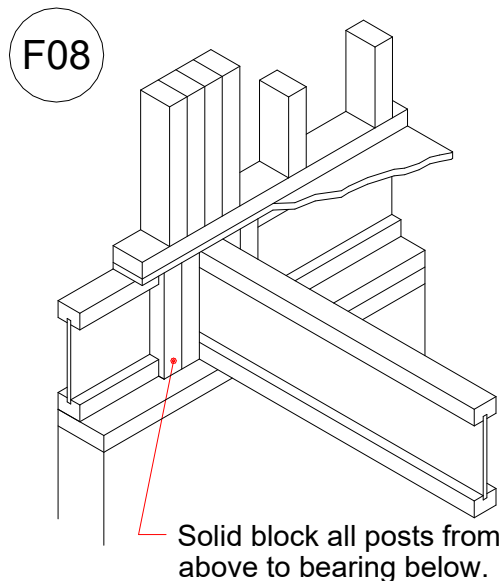

See Boise Specifier Guide For Filler Block Detail And Table  
In Regard To Double Joist Installation

Products					
PlotID	Net Qty	Product	Length	Plies	
FJ1	29	11-7/8" BCI® 5000s-1.8	32' 0"	1	
FJ2	9	11-7/8" BCI® 5000s-1.8	16' 0"	1	
FJ3	8	11-7/8" BCI® 5000s-1.8	14' 0"	1	
BM1-2	2	1-3/4" x 11-7/8" VERSA-LAM® 2.0 3100 SP	18' 0"	2	
Ca1	16	1-1/8" x 11-7/8" BC RIM BOARD OSB	12' 0"	1	
Accessories					
PlotID	Net Qty	Product	Length	Plies	
	51	3/4" 4x8 OSB		1	

DESIGN LOAD  
Live Load 40 PSF  
Dead Load 15 PSF  
Total Load 55 PSF