



RE: 210210
Lot 47 W2

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Customer: Project Name: 210210
Lot/Block:
Address:
City:

Model:
Subdivision:
State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014
Wind Code: N/A
Roof Load: 45.0 psf

Design Program: MiTek 20/20 8.4
Wind Speed: 115 mph
Floor Load: N/A psf

This package includes 42 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I42923357	A1	1/8/2021	21	I42923377	H7	1/8/2021
2	I42923358	A2	1/8/2021	22	I42923378	H8	1/8/2021
3	I42923359	B1	1/8/2021	23	I42923379	H9	1/8/2021
4	I42923360	B2	1/8/2021	24	I42923380	J1	1/8/2021
5	I42923361	C1	1/8/2021	25	I42923381	J2	1/8/2021
6	I42923362	C2	1/8/2021	26	I42923382	J3	1/8/2021
7	I42923363	D1	1/8/2021	27	I42923383	J4	1/8/2021
8	I42923364	D2	1/8/2021	28	I42923384	J5	1/8/2021
9	I42923365	E1	1/8/2021	29	I42923385	R1	1/8/2021
10	I42923366	E2	1/8/2021	30	I42923386	V1	1/8/2021
11	I42923367	E3	1/8/2021	31	I42923387	V2	1/8/2021
12	I42923368	G1	1/8/2021	32	I42923388	V3	1/8/2021
13	I42923369	G2	1/8/2021	33	I42923389	V4	1/8/2021
14	I42923370	G3	1/8/2021	34	I42923390	V5	1/8/2021
15	I42923371	H1	1/8/2021	35	I42923391	V6	1/8/2021
16	I42923372	H2	1/8/2021	36	I42923392	V7	1/8/2021
17	I42923373	H3	1/8/2021	37	I42923393	V8	1/8/2021
18	I42923374	H4	1/8/2021	38	I42923394	V9	1/8/2021
19	I42923375	H5	1/8/2021	39	I42923395	V10	1/8/2021
20	I42923376	H6	1/8/2021	40	I42923396	V11	1/8/2021


The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision
based on the parameters provided by Wheeler - Waverly.

Truss Design Engineer's Name: Garcia, Juan

My license renewal date for the state of Kansas is April 30, 2022.

Kansas COA: E-943

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



January 08, 2021



RE: 210210 - Lot 47 W2

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name: 210210

Lot/Block:

Subdivision:

Address:

City, County:

State:

No.	Seal#	Truss Name	Date
41	I42923397	V12	1/8/2021
42	I42923398	V13	1/8/2021



RE: 210210
Lot 47 W2

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Customer: Project Name: 210210
Lot/Block:
Address:
City:

Model:
Subdivision:
State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014
Wind Code: N/A
Roof Load: 45.0 psf

Design Program: MiTek 20/20 8.4
Wind Speed: 115 mph
Floor Load: N/A psf

This package includes 42 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I42923357	A1	1/8/2021	21	I42923377	H7	1/8/2021
2	I42923358	A2	1/8/2021	22	I42923378	H8	1/8/2021
3	I42923359	B1	1/8/2021	23	I42923379	H9	1/8/2021
4	I42923360	B2	1/8/2021	24	I42923380	J1	1/8/2021
5	I42923361	C1	1/8/2021	25	I42923381	J2	1/8/2021
6	I42923362	C2	1/8/2021	26	I42923382	J3	1/8/2021
7	I42923363	D1	1/8/2021	27	I42923383	J4	1/8/2021
8	I42923364	D2	1/8/2021	28	I42923384	J5	1/8/2021
9	I42923365	E1	1/8/2021	29	I42923385	R1	1/8/2021
10	I42923366	E2	1/8/2021	30	I42923386	V1	1/8/2021
11	I42923367	E3	1/8/2021	31	I42923387	V2	1/8/2021
12	I42923368	G1	1/8/2021	32	I42923388	V3	1/8/2021
13	I42923369	G2	1/8/2021	33	I42923389	V4	1/8/2021
14	I42923370	G3	1/8/2021	34	I42923390	V5	1/8/2021
15	I42923371	H1	1/8/2021	35	I42923391	V6	1/8/2021
16	I42923372	H2	1/8/2021	36	I42923392	V7	1/8/2021
17	I42923373	H3	1/8/2021	37	I42923393	V8	1/8/2021
18	I42923374	H4	1/8/2021	38	I42923394	V9	1/8/2021
19	I42923375	H5	1/8/2021	39	I42923395	V10	1/8/2021
20	I42923376	H6	1/8/2021	40	I42923396	V11	1/8/2021


The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision
based on the parameters provided by Wheeler - Waverly.

Truss Design Engineer's Name: Garcia, Juan

My license renewal date for the state of Missouri is December 31, 2022.

Missouri COA: 001193

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.



January 08, 2021



RE: 210210 - Lot 47 W2

MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name: 210210

Lot/Block:

Subdivision:

Address:

City, County:

State:


No.	Seal#	Truss Name	Date
41	I42923397	V12	1/8/2021
42	I42923398	V13	1/8/2021

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923357
210210	A1	Hip Girder	1	1		

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:16 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-d10j4veqyOpHhBrizUYZ5Z_9mUJ4UBXV_Hrv4yapHH



Scale = 1:22.4




Plate Offsets (X,Y)--	[3:0-5-0,0-2-8], [4:0-2-8,0-2-4], [7:0-4-1,0-2-8], [10:0-4-1,0-2-8]
-----------------------	---

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.71	Vert(LL)	-0.07	8-9	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.67	Vert(CT)	-0.13	8-9	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.10	Horz(CT)	0.02	7	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.06	8-9	>999	240	
								Weight: 39 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10,5-7: 2x6 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-3-4 oc purlins, except end verticals, and 2-0-0 oc purlins (5-0-4 max.): 3-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 10=0-3-8, 7=0-3-8
Max Horz 10=50(LC 7)
Max Uplift 10=201(LC 8), 7=201(LC 9)
Max Grav 10=899(LC 1), 7=899(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1231/277, 3-4=-1024/269, 4-5=-1232/276, 2-10=-806/214, 5-7=-806/213
BOT CHORD 9-10=-219/1012, 8-9=-219/1023, 7-8=-196/1013
WEBS 3-9=0/271, 4-8=-5/279

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 10=201, 7=201.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 79 lb down and 74 lb up at 4-0-0, and 86 lb down and 74 lb up at 6-0-0, and 79 lb down and 74 lb up at 8-0-0 on top chord, and 220 lb down and 76 lb up at 4-0-0, and 31 lb down at 6-0-0, and 220 lb down and 76 lb up at 7-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 3-4=-70, 4-5=-70, 5-6=-70, 7-10=-20



September 23,2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923357
210210	A1	Hip Girder	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:16 2020 Page 2
ID:vBszku21ozNPT?RlZytJMSyXqDi-d10j4veqyOpHhBrizUYZ5Z_9mUJ4UBXV_Hrvm4yapHH

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 3=-46(F) 4=-46(F) 9=-220(F) 8=-220(F) 11=-46(F) 12=-25(F)

Job 210210	Truss A2	Truss Type Common	Qty 4	Ply 1	Lot 47 W2	I42923358
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:17 2020 Page 1
ID: vBsZku21ozNPT?RizYtJMSyXqDi-5Da5lFeSjix8lLQVXB3oemXP7tlbDe4fDxaTIWyapHG




Plate Offsets (X,Y)--		[6:0-4-1,0-2-8], [8:0-4-1,0-2-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.42
TCDL 10.0	Lumber DOL	1.15	BC 0.27
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.08
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R
			DEFL.
			in (loc) l/defl L/d
			Vert(LL) -0.02 7-8 >999 360
			Vert(CT) -0.05 7-8 >999 240
			Horz(CT) 0.01 6 n/a n/a
			Wind(LL) 0.01 7-8 >999 240
			PLATES GRIP
			MT20 197/144
			Weight: 35 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x6 SPF No.2 *Except*
3-7: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-3-8, 6=0-3-8
Max Horz 8=62(LC 7)
Max Uplift 8=90(LC 8), 6=90(LC 9)
Max Grav 8=597(LC 1), 6=597(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-638/89, 3-4=-638/89, 2-8=-544/131, 4-6=-544/131
BOT CHORD 7-8=-14/480, 6-7=-14/480

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923359
210210	B1	Monopitch	7	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:17 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-5Da5IFeSjix8ILQVXB3oemXP6tm8DfHfDxaTIWyapHG



Scale = 1:13.9

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.42	Vert(LL)	-0.03	2-4	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.23	Vert(CT)	-0.06	2-4	>933	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P	Wind(LL)	0.00	2	****	240		
									Weight: 13 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 4=Mechanical, 2=0-3-8
Max Horz 2=76(LC 5)
Max Uplift 4=45(LC 8), 2=58(LC 4)
Max Grav 4=212(LC 1), 2=252(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 2.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923360
210210	B2	Monopitch	3	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:18 2020 Page 1

ID:vBszku21ozNPT?RIzYtJMSyXqDi-ZP8UVaf4U03?wV?h5va1A_4VPH3Ry6XoSbK0qyyapHF



Scale = 1:18.7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.77	Vert(LL)	-0.17	2-4	>553	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.42	Vert(CT)	-0.34	2-4	>276	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P	Wind(LL)	0.00	2	****	240		
									Weight: 21 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E

BOT CHORD 2x4 SPF 2100F 1.8E

WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0" oc purlins, except end verticals.

BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.

REACTIONS.


(size) 4=Mechanical, 2=0-3-8
Max Horz 2=121(LC 5)
Max Uplift 4=74(LC 8), 2=79(LC 4)
Max Grav 4=348(LC 1), 2=386(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 3-4=-270/121

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 2.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923361
210210	C1	GABLE	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:18 2020 Page 1

ID:vBsZku21ozNPT?RlZyUJSyXqDi-ZP8UVaf4U03?wV?h5va1A_4fwH9cy66oSbK0qyyapHF



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	0.00	1	n/r	120	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	0.00	1	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	-0.00	8	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						Weight: 35 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 10-0-0.

(lb) - Max Horz 2=158(LC 5)


Max Uplift All uplift 100 lb or less at joint(s) 8, 2, 12, 11, 10, 9

Max Grav All reactions 250 lb or less at joint(s) 8, 2, 12, 11, 10, 9

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) All plates are 2x4 MT20 unless otherwise indicated.
- 4) Gable requires continuous bottom chord bearing.
- 5) Gable studs spaced at 2-0-0 oc.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 2, 12, 11, 10, 9.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923362
210210	C2	Monopitch	10	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:19 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-1cisjwgiFJBsYeatfc5GjBcnRhR8hS1yhF3ZNPypaHE



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	I/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.30	Vert(LL)	-0.02	2-6	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.26	Vert(CT)	-0.04	5-6	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.50	Horz(CT)	0.01	5	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	2-6	>999	240	
									Weight: 33 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=Mechanical, 2=0-3-8
Max Horz 2=158(LC 5)
Max Uplift 5=94(LC 8), 2=115(LC 4)
Max Grav 5=435(LC 1), 2=514(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-782/113
BOT CHORD 2-6=-134/682, 5-6=-134/682
WEBS 3-5=-714/178

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5 except (jt=lb) 2=115.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923364
210210	D2	Common	5	1		


Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:21 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-z_qc7chznxRanykGm18koci4IV0t9RNF8ZZgRHyapHC

0-10-8	5-3-15	11-2-0	17-0-1	22-4-0	23-2-8
0-10-8	5-3-15	5-10-1	5-10-1	5-3-15	0-10-8

Scale = 1:38.6



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 25.0	2-0-0	TC 0.47	in (loc) l/defl L/d	MT20	197/144
TCDL 10.0	Plate Grip DOL 1.15	BC 0.69	Vert(LL) -0.12 9-10 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.19	Vert(CT) -0.25 6-9 >999 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.07 6 n/a n/a		
	Code IRC2018/TPI2014		Wind(LL) 0.08 9-10 >999 240	Weight: 68 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-7-2 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-3-8, 6=0-3-8
Max Horz 2=-71(LC 13)
Max Uplift 2=-189(LC 4), 6=-189(LC 5)
Max Grav 2=1063(LC 1), 6=1063(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2232/355, 3-4=-1909/259, 4-5=-1909/260, 5-6=-2232/355
BOT CHORD 2-10=-333/2049, 9-10=-127/1406, 6-9=-280/2049
WEBS 4-9=-59/541, 5-9=-418/221, 4-10=-58/541, 3-10=-418/221

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=189, 6=189.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923365
210210	E1	GABLE	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:22 2020 Page 1
ID:vBszku21ozNPT?RizYtJMSyXqDi-SAN_LyibYEZQP6JSKlfzLqELAuW0uv3ONDIDzkyapHB

-0-10-8 10-0-0 20-0-0 20-10-8
0-10-8 10-0-0 10-0-0 0-10-8



Scale = 1:45.8

Plate Offsets (X,Y)-- [10:0-2-0,Edge], [20:0-5-10,0-1-8], [36:0-5-10,0-1-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.08	Vert(LL)	-0.00	19	n/r	120	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.06	Vert(CT)	-0.00	19	n/r	120		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.09	Horz(CT)	0.00	20	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-R							Weight: 115 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 20-0-0.

(lb) - Max Horz 36=213(LC 7)

Max Uplift All uplift 100 lb or less at joint(s) 36, 20, 34, 33, 32, 31, 30, 27, 26, 24, 23, 22 except 35=133(LC 8), 21=120(LC 9)

Max Grav All reactions 250 lb or less at joint(s) 36, 20, 35, 34, 33, 32, 31, 30, 29, 28, 27, 26, 24, 23, 22, 21

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- Gable studs spaced at 1-4-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 36, 20, 34, 33, 32, 31, 30, 27, 26, 24, 23, 22 except (it=lb) 35=133, 21=120.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923366
210210	E2	Common	3	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:23 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-wNxMYIjDJYhH0GteuSACt1nMshUdKoXbt2nWYapHA

0-10-8 5-2-1 10-0-0 14-10-0 20-0-0 20-10-8
0-10-8 5-2-1 4-10-0 4-10-0 5-2-1 0-10-8

4x5 =

Scale = 1:46.3




Plate Offsets (X,Y)--	[8:0-1-14,0-7-1], [11:0-2-11,0-4-0]				
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc) l/defl L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.72	Vert(LL)	-0.17 10-11 >999 360
TCDL 10.0	Lumber DOL	1.15	BC 0.75	Vert(CT)	-0.35 10-11 >662 240
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.25	Horz(CT)	0.03 8 n/a n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.05 10 >999 240
				PLATES	GRIP
				MT20	197/144
				Weight: 70 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-11,6-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-3-10 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-3-8, 11=0-3-8
Max Horz 11=215(LC 7)
Max Uplift 8=124(LC 9), 11=124(LC 8)
Max Grav 8=957(LC 1), 11=957(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1100/163, 3-4=-842/156, 4-5=-842/155, 5-6=-1100/163, 2-11=-855/174,
6-8=-855/174
BOT CHORD 10-11=-147/836, 8-10=-42/803
WEBS 4-10=-48/492, 5-10=-266/215, 3-10=-266/215

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 8=124, 11=124.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923367
210210	E3	ROOF SPECIAL GIRDER	1	3	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:24 2020 Page 1

ID:vBszku21ozNPT?RlzytJMSyXqDi-OZVImekr3sq8eQSR9hRQFJZci8RMfphqWnK2cyapH9



5x7 ||

Scale = 1:46.1




Plate Offsets (X,Y)-- [1:0-0-0,0-2-0], [1:0-2-5,0-8-7], [7:0-2-5,0-8-7], [7:Edge,0-2-0], [8:0-3-7,0-5-4], [10:0-3-12,0-3-0], [11:0-5-12,0-4-4]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.59	Vert(LL)	-0.12 8-9 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.32	Vert(CT)	-0.21 8-9 >999 240		
BCLL	0.0 *	Rep Stress Incr	NO	WB	0.65	Horz(CT)	0.09 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.06 8-9 >999 240	Weight: 439 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x8 SP 2400F 2.0E
WEBS 2x4 SPF No.2

WEDGE
Left: 2x10 SP DSS , Right: 2x10 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-8-10 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=0-3-8 (req. 0-3-10), 7=0-3-8 (req. 0-3-10)
Max Horz 1=183(LC 28)
Max Uplift 1=374(LC 8), 7=245(LC 9)
Max Grav 1=6961(LC 1), 7=6942(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-9555/468, 2-3=-13506/629, 3-4=-8456/369, 4-5=-8208/458, 5-6=-9326/493,
6-7=-9703/335
BOT CHORD 1-13=-429/7224, 10-11=-542/11441, 8-9=-7/389, 7-8=-204/7671
WEBS 11-12=-24/1261, 3-11=-248/5342, 9-10=-10/1706, 4-10=-196/305, 2-13=-3043/144,
11-13=-477/7989, 2-11=-114/4337, 3-10=-5227/383, 8-10=-141/5361, 5-10=-377/6349,
5-8=-288/3716, 6-8=-298/596

NOTES-

- 1) 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-7-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-5-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- 2) All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- 3) Unbalanced roof live loads have been considered for this design.
- 4) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed;
MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) WARNING: Required bearing size at joint(s) 1, 7 greater than input bearing size.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=374, 7=245.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2
210210	E3	ROOF SPECIAL GIRDER	1	3	I42923367
					Job Reference (optional)

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:24 2020 Page 2
ID:vBszku21ozNPT?RlZytJMSyXqDi-OZVImekr3sq8eQSrR9hRQFJZci8RMfphqWnK2cyapH9

NOTES-

10) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 1338 lb down and 188 lb up at 2-0-0, 1351 lb down and 35 lb up at 4-0-0, 1363 lb down and 44 lb up at 6-0-0, 1363 lb down and 44 lb up at 8-0-0, 1351 lb down and 35 lb up at 10-0-0, 1351 lb down and 35 lb up at 12-0-0, 1338 lb down and 36 lb up at 14-0-0, and 1338 lb down and 36 lb up at 16-0-0, and 1338 lb down and 36 lb up at 18-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard


1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-5=-70, 5-7=-70, 1-12=-20, 10-11=-20, 7-9=-20
Concentrated Loads (lb)
Vert: 14=-1338(B) 15=-1351(B) 16=-1363(B) 17=-1363(B) 18=-1351(B) 19=-1351(B) 20=-1338(B) 21=-1338(B) 22=-1338(B)

Job 210210	Truss G1	Truss Type GABLE	Qty 1	Ply 1	Lot 47 W2	I42923368
---------------	-------------	---------------------	----------	----------	-----------	-----------

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:25 2020 Page 1

ID:vBsZku21ozNPT?RIzYtJMSyXqDi-sl37z_ITq9y?GZ11?tcgzSsiP6Qe5E5q3AXua2yapH8



4x5 ||

Scale = 1:32.8




Plate Offsets (X,Y)-- [8-0-3-10,Edge], [11-0-2-3,Edge], [14-0-1-14,0-1-0], [23-0-1-14,0-1-0]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.72	Vert(LL)	-0.10 9-10 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.51	Vert(CT)	-0.24 9-10 >635 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.14	Horz(CT)	0.09 8 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05 9-10 >999 240	Weight: 65 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-11,6-8: 2x6 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-5-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 11=0-3-8, 8=0-3-8
Max Horz 11=154(LC 7)
Max Uplift 11=88(LC 8), 8=88(LC 9)
Max Grav 11=642(LC 1), 8=642(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-966/113, 3-4=-849/230, 4-5=-849/193, 5-6=-966/70, 2-11=-784/128, 6-8=-784/100
BOT CHORD 10-11=-97/776, 9-10=0/453, 8-9=-2/717
WEBS 4-9=-138/417, 4-10=-161/460

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 1-4-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 11, 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11, 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923369
210210	G2	Roof Special	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:25 2020 Page 1
ID:vBszku21ozNPT?RIzYtJMSyXqDi-sl37z_ITq9y?GZ11?tCgzSsiP6Qe5E5q3AXua2yapH8



Scale = 1:32.8




Plate Offsets (X,Y)--		[8:0-3-10,Edge], [11:0-2-3,Edge]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.72	Vert(LL)	-0.10 9-10 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL 1.15		BC	0.51	Vert(CT)	-0.24 9-10 >635 240		
BCLL	0.0 *	Rep Stress Incr YES		WB	0.14	Horz(CT)	0.09 8 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05 9-10 >999 240	Weight: 48 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-11,6-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-5-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 11=0-3-8, 8=0-3-8
Max Horz 11=154(LC 7)
Max Uplift 11=-88(LC 8), 8=-88(LC 9)
Max Grav 11=642(LC 1), 8=642(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-966/113, 3-4=-849/230, 4-5=-849/193, 5-6=-966/70, 2-11=-784/128, 6-8=-784/100
BOT CHORD 10-11=-97/776, 9-10=0/453, 8-9=-2/717
WEBS 4-9=-138/417, 4-10=-161/460

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Bearing at joint(s) 11, 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11, 8.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923370
210210	G3	Roof Special	4	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:26 2020 Page 1

ID: vBsZku21ozNPT?RizYtJMSyXqDi-KydVBKI5bT4stjcDZajvVgPwAWkrqhE_lqGR7VyapH7



Scale = 1:29.8

Plate Offsets (X,Y)--		[1:0-4-4,0-2-0], [5:0-4-0,0-2-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL 1.15		TC	0.53	Vert(LL)	-0.12	7-8	>999	360	MT20 197/144
TCDL	10.0	Lumber DOL 1.15		BC	0.64	Vert(CT)	-0.27	7-8	>544	240	
BCLL	0.0 *	Rep Stress Incr YES		WB	0.15	Horz(CT)	0.11	6	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05	7-8	>999	240	Weight: 46 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
1-9,5-6: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-2-9 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 9=Mechanical, 6=0-2-0
Max Horz 9=108(LC 5)
Max Uplift 9=2(LC 8), 6=2(LC 9)
Max Grav 9=559(LC 1), 6=559(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-960/18, 2-3=-865/107, 3-4=-832/90, 4-5=-931/0, 1-9=-681/23, 5-6=-667/9
BOT CHORD 8-9=-22/740, 7-8=0/441, 6-7=0/692
WEBS 3-8=-77/456, 3-7=-65/392

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Bearing at joint(s) 6 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate at joint(s) 6.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 9, 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601





16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923371
210210	H1	Common Supported Gable	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:27 2020 Page 1
ID:vBsZku21ozNPT?RIzYtJMSyXqDi-o8BtOfmkMnCjVtBQ7IF82txC1vDOZ8s7WU0_fxyapH6



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	1	n/r	120	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	1	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.19	Horz(CT)	0.01	21	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 147 lb	FT = 10%

LUMBER-
 TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 20-21: 2x3 SPF No.2
 OTHERS 2x4 SPF No.2

BRACING-
 TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 31-0-0.
 (lb) - Max Horz 38=138(LC 12)
 Max Uplift All uplift 100 lb or less at joint(s) 38, 31, 32, 33, 34, 35, 36, 28, 27, 26, 25, 24, 23, 22 except 37=106(LC 8)
 Max Grav All reactions 250 lb or less at joint(s) 38, 21, 30, 31, 32, 33, 34, 35, 36, 37, 28, 27, 26, 25, 24, 23, 22

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
 - 4) All plates are 2x4 MT20 unless otherwise indicated.
 - 5) Gable requires continuous bottom chord bearing.
 - 6) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
 - 7) Gable studs spaced at 2-0-0 oc.
 - 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 9) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 38, 31, 32, 33, 34, 35, 36, 28, 27, 26, 25, 24, 23, 22 except (jt=lb) 37=106.
 - 11) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923372
210210	H2	Roof Special	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:28 2020 Page 1

ID: vBsZku21ozNPT?RlZyYtJMSyXqDi-GKIFb?nM74Ka71mcg?mNa5U8rJL3IS9GI8YBNyapH5

0-10-8	7-9-10	15-6-0	18-9-0	23-2-7	31-0-0
0-10-8	7-9-10	7-8-6	3-3-0	4-5-7	7-9-9

Scale = 1:55.6




Plate Offsets (X,Y)-- [10:0-5-13,0-4-0], [11:0-2-8,0-2-8], [15:Edge,0-2-8], [16:0-2-8,0-1-8], [17:0-1-13,0-3-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.96	Vert(LL)	-0.35 13 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.92	Vert(CT)	-0.67 15-16 >538 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.76	Horz(CT)	0.24 10 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.20 13 >999 240	Weight: 121 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E *Except*
5-7,7-9: 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
5-15,6-12: 2x3 SPF No.2, 10-12: 2x4 SPF 2100F 1.8E
WEBS 2x3 SPF No.2 *Except*
2-17,9-10: 2x10 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
2-2-0 oc bracing: 16-17,10-11.

REACTIONS.

(size) 17=0-3-8, 10=Mechanical
Max Horz 17=137(LC 12)
Max Uplift 17=198(LC 8), 10=168(LC 9)
Max Grav 17=1450(LC 1), 10=1358(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2200/268, 3-5=-2418/266, 5-6=-2289/296, 6-8=-3368/300, 8-9=-2137/261,
2-17=-1341/237, 9-10=-1201/209
BOT CHORD 16-17=-274/1833, 5-14=-109/1610, 13-14=-132/2943, 6-13=-99/1179, 10-11=-151/1789
WEBS 3-16=-603/213, 14-16=-299/1946, 3-14=-30/347, 6-14=-1300/199, 11-13=-182/2172,
8-13=-49/1191, 8-11=-1270/194

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 17=198, 10=168.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS 66871, Mitek

8.410 s May 22 2020 MiTek Industries, Inc. Wed Sep 23 14:06:12 2020 Page 1
ID:vBszku21ozNPT?RizYtJMSvXgDi-WDvMezSGr9Lp0i0l_Ce4RF5o1DeH4?WMk9C1Fi2vaitP



LUMBER-

WEDGE
Left: 2x4 SPF No.2

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-809/45, 3-4=-2945/55, 4-5=-2012/31, 5-6=-1943/58, 6-7=-1824/104, 7-8=-2062/159,
8-9=-2186/122, 9-10=-2224/36, 10-11=-1235/55

BOT CHORD 3-16=-57/2687, 15-16=-57/2687, 12-13=0/1869, 11-12=0/1869

WEBS 4-16=0/304, 4-15=-1168/116, 13-15=0/1258, 7-15=-54/896, 7-13=-135/724,
9-13=-507/203

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCdL=6.0psf; BCdL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 21 lb uplift at joint 2 and 15 lb uplift at joint 11.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 3-3-12 oc purlins, except end verticals.	
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-17.	
WEBS	1 Row at midpt	4-15



September 23, 2020



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 210210	Truss H4	Truss Type Roof Special	Qty 2	Ply 1	Lot 47 W2	I42923374
---------------	-------------	----------------------------	----------	----------	-----------	-----------

Wheeler Lumber, Waverly, KS 66871, Mitek

8.410 s May 22 2020 MiTek Industries, Inc. Wed Sep 23 14:06:20 2020 Page 1
ID:vBszku21ozNPT?RlZyYtJMSyXqDi-HmRNKiYHzcLggFKugKDJan7Mos?ct1xv?Szg_ayajH

-0-10-8 2-3-8 7-9-10 15-6-0 23-2-6 24-4-0 31-0-0
0-10-8 2-3-8 5-6-2 7-8-6 7-8-6 1-1-10 6-8-0

Scale = 1:58.9




Plate Offsets (X,Y)-- [2:Edge,0-0-7], [3:0-6-8,0-2-14], [3:0-6-8,0-1-6], [5:0-3-8,Edge], [9:Edge,0-2-8], [13:0-1-8,0-1-0]											
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC 0.95		Vert(LL) -0.28 3-14 >999 360		MT20		197/144	
TCDL	10.0	Lumber DOL 1.15		BC 0.81		Vert(CT) -0.53 3-14 >698 240					
BCLL	0.0 *	Rep Stress Incr YES		WB 0.84		Horz(CT) 0.36 10 n/a n/a					
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL) 0.16 3-14 >999 240		Weight: 131 lb		FT = 10%	

LUMBER-	BRACING-	
TOP CHORD 2x4 SPF No.2 *Except* 1-5: 2x6 SP 2400F 2.0E	TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 8-9.	
BOT CHORD 2x4 SPF No.2 *Except* 3-15: 2x3 SPF No.2, 3-12: 2x4 SPF 2100F 1.8E	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 2-15.	
WEBS 2x3 SPF No.2 *Except* 8-10,16-18,13-17: 2x4 SPF No.2	WEBS 1 Row at midpt 4-13, 7-13, 8-10	
WEDGE Left: 2x4 SPF No.2		
REACTIONS. (lb/size) 10=1383/Mechanical, 2=1468/0-3-8 Max Horz 2=162(LC 5) Max Uplift 10=-24(LC 9), 2=-20(LC 8)		

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD 2-3=-817/0, 3-4=-2989/77, 4-5=-1877/12, 5-6=-1806/49, 6-7=-1845/61, 7-8=-2796/2	
BOT CHORD 3-14=-108/2732, 13-14=-108/2732, 12-13=-44/2582, 11-12=-44/2582, 10-11=-38/2684	
WEBS 4-14=0/312, 4-13=-1298/171, 6-13=0/1095, 7-13=-1141/98, 7-11=0/461, 8-11=-263/73, 8-10=-2842/29	

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 24 lb uplift at joint 10 and 20 lb uplift at joint 2.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 210210	Truss H5	Truss Type Roof Special	Qty 1	Ply 1	Lot 47 W2	I42923375
---------------	-------------	----------------------------	----------	----------	-----------	-----------

Wheeler Lumber, Waverly, KS 66871, Mitek

8.410 s May 22 2020 MiTek Industries, Inc. Wed Sep 23 14:06:27 2020 Page 1
ID: vBsZku21ozNPT?RlZyYtJMSyXqDi-a6M1o5dgJmEg0KMEalryMFwbMhMIODtxc19YkgajJA



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 25.0	2-0-0	TC 0.80	in (loc) l/defl L/d	MT20	197/144
TCDL 10.0	Plate Grip DOL 1.15	BC 0.90	Vert(LL) -0.29 3-17 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.82	Vert(CT) -0.58 14-15 >626 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.41 11 n/a n/a		
	Code IRC2018/TPI2014		Wind(LL) 0.16 3-17 >999 240		
				Weight: 132 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E *Except*
5-6: 2x4 SPF No.2, 1-5: 2x6 SP 2400F 2.0E
BOT CHORD 2x4 SPF No.2 *Except*
3-18,8-13: 2x3 SPF No.2, 3-16,11-13: 2x4 SPF 2100F 1.8E
WEBS 2x3 SPF No.2 *Except*
8-15,19-21,15-20: 2x4 SPF No.2, 10-11: 2x10 SP DSS

WEDGE
Left: 2x4 SPF No.2


REACTIONS. (lb/size) 2=1455/0-3-8, 11=1371/Mechanical
Max Horz 2=106(LC 5)
Max Uplift 2=-21(LC 8), 11=-15(LC 9)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-809/45, 3-4=-2948/74, 4-5=-1852/11, 5-6=-1781/48, 6-7=-1689/56, 7-8=-1836/31,
8-9=-3074/49, 9-10=-1990/23, 10-11=-1143/37
BOT CHORD 3-17=-80/2693, 16-17=-79/2693, 15-16=-79/2693, 14-15=0/2829, 8-14=0/474,
11-12=0/1654
WEBS 4-17=0/299, 4-15=-1278/169, 6-15=0/1044, 8-15=-1387/152, 12-14=0/1682, 9-14=0/1187,
9-12=-796/29

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 21 lb uplift at joint 2 and 15 lb uplift at joint 11.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 210210	Truss H6	Truss Type Common	Qty 4	Ply 1	Lot 47 W2	142923376
Job Reference (optional)						


Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:32 2020 Page 1

ID:vBszku21ozNPT?RlzytJMSyXqDi-96_mRNqsBjQ0be3NvrqJlxfsdwmsEKHsgmjlk9yapH1

0-10-8 7-9-10 15-6-0 23-2-6 31-0-0
0-10-8 7-9-10 7-8-6 7-8-6 7-9-10

Scale = 1:55.2



LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.85	Vert(LL)	-0.26 10-12 >999 360	MT20	197/144		
TCDL	10.0	Lumber DOL	1.15	BC	0.73	Vert(CT)	-0.50 10-12 >720 240				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.47	Horz(CT)	0.07 9 n/a n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.11 10-12 >999 240			Weight: 106 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF 2100F 1.8E *Except*
11-13: 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-15,8-9: 2x10 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-4-9 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 7-12, 3-12

REACTIONS.

(size) 15=0-3-8, 9=Mechanical
Max Horz 15=112(LC 7)
Max Uplift 15=29(LC 8), 9=16(LC 9)
Max Grav 15=1450(LC 1), 9=1358(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2187/43, 3-5=-1587/73, 5-7=-1589/72, 7-8=-2176/43, 2-15=-1330/74, 8-9=-1211/59
BOT CHORD 14-15=-44/1824, 12-14=-44/1824, 10-12=0/1827, 9-10=0/1827
WEBS 5-12=0/775, 7-12=-651/125, 3-12=-647/124, 3-14=0/267

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 15, 9.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923377
210210	H7	Common	3	1		


Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:33 2020 Page 1

ID: vBsZku21ozNPT?RizYtJMSyXqDi-dlY8fjrUydytDoeZTYLYH8B1fK3Eznz0vQTJsbyapH0

0-10-8 7-9-10 15-6-0 23-2-6 31-0-0 31-10-8
0-10-8 7-9-10 7-8-6 7-8-6 7-9-10 0-10-8

Scale = 1:55.7



LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES	GRIP
TCLL 25.0	2-0-0	TC 0.89	in (loc) l/defl L/d	MT20	197/144
TCDL 10.0	Plate Grip DOL 1.15	BC 0.92	Vert(LL) -0.22 11-13 >999 360		
BCLL 0.0 *	Lumber DOL 1.15	WB 0.47	Vert(CT) -0.44 11-13 >820 240		
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) 0.09 10 n/a n/a		
	Code IRC2018/TPI2014		Wind(LL) 0.13 13-15 >999 240		
				Weight: 108 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-16,8-10: 2x10 SP DSS

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 2-2-0 oc bracing.
WEBS 1 Row at midpt 7-13, 3-13

REACTIONS.

(size) 16=0-3-8, 10=0-3-8
Max Horz 16=-126(LC 6)
Max Uplift 16=-198(LC 8), 10=-198(LC 9)
Max Grav 16=1449(LC 1), 10=1449(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2187/271, 3-5=-1582/243, 5-7=-1582/243, 7-8=-2187/271, 2-16=-1336/239, 8-10=-1336/239
BOT CHORD 15-16=-265/1821, 13-15=-265/1821, 11-13=-140/1821, 10-11=-140/1821
WEBS 5-13=-48/760, 7-13=-647/250, 7-11=0/274, 3-13=-647/250, 3-15=0/274

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 16=198, 10=198.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	142923378
210210	H8	COMMON GIRDER	1	2	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:34 2020 Page 1

ID:vBsZku21ozNPT?RizYtJMSyXqDi-5U6Xs3r7jw4jryDm1GtnqMkCRkSEI9q974CsP1yapH?



Scale = 1:57.5




Plate Offsets (X,Y)--		[2:0-0-0,0-0-13], [8:0-1-1,0-1-14]			
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.89	Vert(LL) -0.16 8-9 >999 360	MT20	197/144
TCDL 10.0	Lumber DOL 1.15	BC 0.67	Vert(CT) -0.29 8-9 >999 240		
BCLL 0.0 *	Rep Stress Incr NO	WB 0.81	Horz(CT) 0.07 8 n/a n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-S	Wind(LL) 0.09 10-12 >999 240		
				Weight: 311 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
1-4,6-8: 2x4 SPF 2400F 2.0E
BOT CHORD 2x6 SP 2400F 2.0E
WEBS 2x4 SPF No.2
WEDGE
Right: 2x4 SP No.3

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 7-12

REACTIONS.


(size) 8=0-3-8 (req. 0-4-7), 2=0-3-8
Max Horz 2=93(LC 26)
Max Uplift 8=336(LC 9), 2=148(LC 8)
Max Grav 8=5627(LC 1), 2=2718(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=5024/291, 3-5=4374/333, 5-7=4375/332, 7-8=9437/667
BOT CHORD 2-14=264/4309, 12-14=264/4309, 10-12=612/8921, 9-10=514/8271, 8-9=513/8219
WEBS 5-12=198/3311, 7-12=5841/597, 7-9=33/2873, 3-12=686/221, 3-14=0/308, 7-10=313/1975

NOTES-

- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-4-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-3-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
- All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- WARNING: Required bearing size at joint(s) 8 greater than input bearing size.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 8=336, 2=148.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 3353 lb down and 392 lb up at 21-10-7, 539 lb down and 22 lb up at 23-11-4, 539 lb down and 22 lb up at 25-11-4, and 539 lb down and 22 lb up at 27-11-4, and 540 lb down and 21 lb up at 29-11-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.



September 23,2020

Continued on page 2

LOAD CASE(S) Standard

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923378
210210	H8	COMMON GIRDER	1	2	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:34 2020 Page 2
ID:vBszku21ozNPT?RizYtJMSyXqDi-5U6Xs3r7jw4jryDm1GtnqMkCRkSEi9q974CsP1yapH?

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
 - Vert: 1-5=-70, 5-8=-70, 2-8=-20
- Concentrated Loads (lb)
 - Vert: 10=-3353(B) 15=-539(B) 16=-539(B) 17=-539(B) 18=-540(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923379
210210	H9	Roof Special	6	1		

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:35 2020 Page 1

ID:vBszku21ozNPT?RIzYtJMSyXqDi-Zhgv3OslUECaT6oybzO0NZHNN8q6RgVIMkyPxTyapH_

-0-10-8 7-9-10 15-6-0 22-0-0
0-10-8 7-9-10 7-8-6 6-6-0

5x7 =

Scale = 1:50.9




Plate Offsets (X,Y)-- [7:Edge,0-2-8], [11:0-1-10,0-3-4]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.88	Vert(LL)	-0.09 8-10 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.57	Vert(CT)	-0.21 8-10 >999 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.53	Horz(CT)	0.17 13 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05 8-10 >999 240	Weight: 84 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-11: 2x8 SP DSS
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 3-8

REACTIONS.


(size) 11=0-3-8, 13=0-2-8
Max Horz 11=223(LC 5)
Max Uplift 11=156(LC 8), 13=122(LC 8)
Max Grav 11=1056(LC 1), 13=943(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1465/195, 3-5=-768/129, 5-6=-705/160, 2-11=-966/201
BOT CHORD 10-11=-269/1196, 8-10=-269/1196
WEBS 3-10=0/302, 3-8=-733/262, 6-8=-93/646, 6-13=-955/124

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 13 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate at joint(s) 13.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 11=156, 13=122.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923380
210210	J1	Diagonal Hip Girder	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:35 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-Zhgv3OslUECaT6oybzO0NZHUm8v6RokIMkyPxTyapH_



Scale = 1:17.0

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.41	Vert(LL)	-0.03	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.25	Vert(CT)	-0.07	4-5	>967	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240		
									Weight: 16 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 3-4: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-6-6 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-9, 4=Mechanical
 Max Horz 5=111(LC 5)
 Max Uplift 5=101(LC 4), 4=50(LC 8)
 Max Grav 5=346(LC 1), 4=224(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-306/140

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4 except (jt=lb) 5=101.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 69 lb down and 36 lb up at 2-9-8, and 69 lb down and 36 lb up at 2-9-8 on top chord, and 3 lb down and 1 lb up at 2-9-8, and 3 lb down and 1 lb up at 2-9-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-2=-70, 2-3=-70, 4-5=-20
 Concentrated Loads (lb)
 Vert: 7=2(F=1, B=1)



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923381
210210	J2	Jack-Open	3	1	Job Reference (optional)	


Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:36 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-1tEHhktNFYKR4GN88hvFvnpigYHGAF_SbOhzSwyapGz



Scale = 1:16.2



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	-0.01	4-5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	-0.02	4-5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	Weight: 11 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 4-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=89(LC 8)
Max Uplift 5=30(LC 8), 3=66(LC 8)
Max Grav 5=252(LC 1), 3=116(LC 1), 4=71(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923382
210210	J3	Jack-Open	4	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:36 2020 Page 1

ID:vBszku21ozNPT?RlZyUJMSyXqDi-1tEHHktNFYKR4GN88hvFvnpklYlvAF_SbOhzSwyapGz



Scale = 1:11.0

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	5	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	-0.00	5	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	Weight: 6 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-10-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=48(LC 8)
Max Uplift 5=26(LC 8), 3=30(LC 8)
Max Grav 5=171(LC 1), 3=44(LC 1), 4=31(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923383
210210	J4	Jack-Closed Supported Gable	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:37 2020 Page 1

ID:vBszku21ozNPT?RlZytJMSyXqDi-V3nfU4u?0rSliQyLiOQUS_MwBxeCviEbq2RW_MyapGy



Scale = 1:6.9

Plate Offsets (X,Y)--		[3:0-10-14,0-2-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.03
TCDL 10.0	Lumber DOL	1.15	BC 0.02
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00
BCDL 10.0	Code	IRC2018/TPI2014	Matrix-P
			DEFL. in (loc) l/defl L/d
			Vert(LL) -0.00 1 n/r 120
			Vert(CT) 0.00 1 n/r 120
			Horz(CT) -0.00 4 n/a n/a
			PLATES GRIP
			MT20 197/144
			Weight: 4 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-6-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 4=1-6-0, 2=1-6-0
Max Horz 2=24(LC 5)
Max Uplift 4=12(LC 8), 2=28(LC 4)
Max Grav 4=59(LC 1), 2=93(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 3) Gable requires continuous bottom chord bearing.
- 4) Gable studs spaced at 2-0-0 oc.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 2.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923384
210210	J5	Jack-Closed	2	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:37 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-V3nfU4u?0rSliQyLiOQUS_MwDxeDviEbq2RW_MyapGy



Scale = 1:6.9

Plate Offsets (X,Y)-- [3:0-10-14,0-2-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.02	Vert(LL)	-0.00	2	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.02	Vert(CT)	-0.00	2	>999	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	-0.00	4	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-P		Wind(LL)	0.00	2	****	240	Weight: 4 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-6-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 4=Mechanical, 2=0-3-8
Max Horz 2=24(LC 5)
Max Uplift 4=12(LC 8), 2=30(LC 4)
Max Grav 4=57(LC 1), 2=94(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 2.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923385
210210	R1	FLAT GIRDER	1	2	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:38 2020 Page 1
ID:vBsZku21ozNPT?RlZytJMSyXqDi-FL1iQvdm9a9KZXG6xj_Cv_ALy9e01I2iA4XoyapGx




Plate Offsets (X,Y)--		[4:Edge,0-2-0]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.46
TCDL 10.0	Lumber DOL	1.15	BC 0.16
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.61
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S
			DEFL. in (loc) l/defl L/d
			Vert(LL) -0.06 5 >999 360
			Vert(CT) -0.11 5 >999 240
			Horz(CT) 0.00 4 n/a n/a
			Wind(LL) 0.04 5 >999 240
			PLATES MT20
			GRIP 197/144
			Weight: 150 lb FT = 10%

LUMBER-
TOP CHORD 2x6 SP DSS
BOT CHORD 2x6 SPF No.2
WEBS 2x4 SPF No.2


BRACING-
TOP CHORD 2-0-0 oc purlins (6-0-0 max.): 1-3, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 6=Mechanical, 4=0-2-0 (req. 0-2-6)
Max Horz 6=-77(LC 4)
Max Uplift 6=-372(LC 4), 4=-329(LC 5)
Max Grav 6=3373(LC 1), 4=3005(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-6=-3245/393, 1-2=-4776/522, 2-3=-4776/522, 3-4=-2876/350
WEBS 1-5=-553/4925, 2-5=-3699/508, 3-5=-555/4937

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-9-0 oc, 2x6 - 2 rows staggered at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - WARNING: Required bearing size at joint(s) 4 greater than input bearing size.
 - Refer to girder(s) for truss to truss connections.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 6=372, 4=329.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 879 lb down and 123 lb up at 1-0-0, 873 lb down and 125 lb up at 3-0-0, 873 lb down and 125 lb up at 5-0-0, 873 lb down and 125 lb up at 7-0-0, and 873 lb down and 125 lb up at 9-0-0, and 873 lb down and 125 lb up at 11-0-0 on top chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard



September 23,2020

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923385
210210	R1	FLAT GIRDER	1	2	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:38 2020 Page 2
ID:vBszku21ozNPT?RlZytJMSyXqDi-_FL1iQvdm9a9KZXG6xj_Cv_ALy9e01I2iA4XoyapGx

LOAD CASE(S) Standard


- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
 - Vert: 1-3=-70, 4-6=-20
- Concentrated Loads (lb)
 - Vert: 7=-879 8=-873 9=-873 10=-873 11=-873 12=-873

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017



Scale = 1:20.7

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.44	Vert(LL) n/a - n/a 999	MT20	197/144
TCDL 10.0	Lumber DOL 1.15	BC 0.23	Vert(CT) n/a - n/a 999		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) -0.00 3 n/a n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-P		Weight: 15 lb	FT = 10%

LUMBER-
TOP CHO
BOT CHO
WEBS

REACTION

FORCES.

NOTES-

- 1) Wind: A
MWFR:
grip DO
- 2) Gable r
- 3) This tru
- 4) * This tr
will fit b
- 5) Provide
- 6) This tru
reference

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2

BRACING-
TOP CHOR
BOT CHOR

Structural wood sheathing directly applied or 5-4-2 oc purlins, except end verticals.
Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=5-3-12, 3=5-3-12
 Max Horz 1=126(LC 5)
 Max Uplift 1=-18(LC 8), 3=-62(LC 8)
 Max Grav 1=214(LC 1), 3=230(LC 15)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDD=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.




September 23, 2020

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017



Scale = 1:15.7

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.19	Vert(LL) n/a - n/a 999	MT20	197/144
TCDL 10.0	Lumber DOL 1.15	BC 0.10	Vert(CT) n/a - n/a 999		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) -0.00 3 n/a n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-P		Weight: 11 lb	FT = 10%

LUMBER-
TOP CHO
BOT CHO
WEBS
REACTION
FORCES.
NOTES-
1) Wind: A
MWFRS
grip DO
2) Gable r
3) This tru
4) * This tr
will fit b
5) Provide
6) This tru
referen

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2

BRACING-
TOP CHOR
BOT CHOR


Structural wood sheathing directly applied or 3-10-2 oc purlins,
except end verticals.
Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=3-9-12, 3=3-9-12
 Max Horz 1=86(LC 7)
 Max Uplift 1=-12(LC 8), 3=-42(LC 8)
 Max Grav 1=147(LC 1), 3=157(LC 15)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDD=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.




September 23, 2020

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017



Scale = 1:10.7

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.05	Vert(LL) n/a - n/a 999	MT20	197/144
TCDL 10.0	Lumber DOL 1.15	BC 0.03	Vert(CT) n/a - n/a 999		
BCLL 0.0 *	Rep Stress Incr YES	WB 0.00	Horz(CT) -0.00 3 n/a n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-P		Weight: 6 lb	FT = 10%

LUMBER-

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 2-4-2 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=2-3-12, 3=2-3-12
 Max Horz 1=47(LC 5)
 Max Uplift 1=-7(LC 8), 3=-23(LC 8)
 Max Grav 1=79(LC 1), 3=85(LC 15)

FORCES.

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDD=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	
210210	V4	Valley	1	1		I42923389
Job Reference (optional)						

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:42 2020 Page 1
ID:vBszku21ozNPT?RlZyYtJM5yXqDi-s1bYXoy8qO5boBqIVx0f923jPyJiaXlKzK8HgZyapGt



Scale = 1:39.2

Plate Offsets (X,Y)--		[8:0-3-8,Edge]									
LOADING (psf)		SPACING-		CSI.		DEFL.				PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.32	in (loc)	l/defl	L/d		MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.19	n/a	-	n/a	999		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.11	n/a	-	n/a	999		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Horz(CT)	0.02	4	n/a	Weight: 41 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
2-6: 2x3 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6'-0'-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6'-0'-0 oc bracing.

REACTIONS.


All bearings 13-5-4.
(lb) - Max Horz 8=171(LC 9)
Max Uplift All uplift 100 lb or less at joint(s) 4, 7 except 8=145(LC 9), 5=191(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 8, 4, 6 except 7=376(LC 18), 5=616(LC 16)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

BOT CHORD 2-7=292/42
WEBS 3-5=390/243

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6'-0 tall by 2'-0'-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 7 except (jt=lb) 8=145, 5=191.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 8.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23,2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923390
210210	V5	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:43 2020 Page 1
ID:vBszku21ozNPT?RIzYtJMSyXqDi-KD9wl8ymbhDSQLPU3fXuhFcvMfpJPkUC_urC0yapGs




Plate Offsets (X,Y)--	[8:0-3-8,Edge]								
LOADING (psf)	SPACING	2-0-0	CSI	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.21	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.06	Horz(CT)	0.02	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 35 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
2-6: 2x3 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 11-11-4.
(lb) - Max Horz 8=131(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 4, 7 except 8=106(LC 9), 5=156(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 8, 4, 6 except 7=313(LC 15), 5=413(LC 16)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
BOT CHORD 2-7=262/23
WEBS 3-5=317/201

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 7 except (jt=lb) 8=106, 5=156.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 8.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923391
210210	V6	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:43 2020 Page 1
ID:vBszku21ozNPT?RlZyYtJMSyXqDi-KD9wl8ymbhDSQLPU3fXuhFcvfMfqJPzUC_urC0yapGs




Plate Offsets (X,Y)--		[8:0-3-8,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.21	Vert(LL)	n/a - n/a	999	MT20	197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.13	Vert(CT)	n/a - n/a	999			
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.05	Horz(CT)	0.01 4 n/a	n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 30 lb	FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
2-6: 2x3 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 10-5-4.
(lb) - Max Horz 8=108(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 8, 4 except 5=136(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 8, 4, 6 except 7=256(LC 1), 5=351(LC 16)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 3-5=277/178

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 4 except (jt=lb) 5=136.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 210210	Truss V7	Truss Type Valley	Qty 1	Ply 1	Lot 47 W2 Job Reference (optional)	I42923392
---------------	-------------	----------------------	----------	----------	---------------------------------------	-----------


Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:44 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-oPiJyTzOM?LJ2U_hcM27ET92cm?W2rzdRedOkSyapGr



Scale = 1:21.8



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.17	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.06	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						Weight: 25 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=9-9-0, 3=9-9-0, 4=9-9-0
Max Horz 1=-77(LC 4)
Max Uplift 1=-39(LC 8), 3=-48(LC 9), 4=-15(LC 8)
Max Grav 1=205(LC 1), 3=205(LC 1), 4=387(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-252/64

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3, 4.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:45 2020 Page 1
ID:vBszku21ozNPT?RlZyYtJMSvXgDi-GcGhAp_07JTAfeZtA4ZMMghFBAMBnJlNfInXGuyapGa



LUMBER-

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
OTHERS	2x3 SPF No.2

SPACING-	2-0-0
Plate Grip DOL	1.15
Lumber DOL	1.15
Rep Stress Incr	YES
Code	IRC2018/TPI2014

CSI.	
TC	0.15
BC	0.07
WB	0.03
Matrix-P	

DEFL.	in	(loc)	l/defl	L/d
Vert(LL)	n/a	-	n/a	999
Vert(CT)	n/a	-	n/a	999
Horz(CT)	0.00	3	n/a	n/a

PLATES	GRIP
MT20	197/144

Weight: 17 lb FT = 10%

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=6-9-0, 3=6-9-0, 4=6-9-0
 Max Horz 1=-51(LC 4)
 Max Uplift 1=-33(LC 8), 3=-39(LC 9)
 Max Grav 1=148(LC 1), 3=148(LC 1), 4=230(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BC DL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020



Design valid for use only with MiTEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923394
210210	V9	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:45 2020 Page 1

ID:vBszku21ozNPT?RizYtJMSyXqDi-GcGhAp_07JTafeZtA4ZMmghH4AM3nJDnfiNxGuyapGq




Plate Offsets (X, Y)--		[2:0-2-0, Edge]							
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d
TCLL	25.0	Plate Grip DOL	1.15	TC	0.03	Vert(LL)	n/a	-	n/a
TCDL	10.0	Lumber DOL	1.15	BC	0.08	Vert(CT)	n/a	-	n/a
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.00	3	n/a
BCDL	10.0	Code	IRC2018/TPI2014	Matrix-P					
						PLATES	GRIP		
						MT20	197/144		
						Weight: 8 lb	FT = 10%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-12 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=3-9-0, 3=3-9-0
Max Horz 1=-25(LC 4)
Max Uplift 1=-15(LC 8), 3=-15(LC 9)
Max Grav 1=128(LC 1), 3=128(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:39 2020 Page 1
ozNPT?RlZyUJSvXqDi-SSvQymvEXTi0xi6iqpSvXPRE6IJMNcyuHMwd3EvapGw



LUMBER-

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2
OTHERS	2x3 SPF No.2

BRACING-	
TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=7-2-8, 4=7-2-8, 5=7-2-8
 Max Horz 1=136(LC 5)
 Max Uplift 4=-26(LC 8), 5=-113(LC 8)
 Max Grav 1=82(LC 16), 4=141(LC 1), 5=378(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
WEBS 2-5=-294/164

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4 except (jt=lb) 5=113.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923396
210210	V11	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:40 2020 Page 1

ID:vBsZku21ozNPT?RizYtJMSyXqDi-weTo76wtlmtZthvNWzB4d_NZ9dr63z2W0fAbhyapGv



Scale = 1:14.2

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.27	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.15	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 12 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-


TOP CHORD Structural wood sheathing directly applied or 4-7-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 1=4-6-8, 3=4-6-8
Max Horz 1=80(LC 5)
Max Uplift 1=22(LC 8), 3=42(LC 8)
Max Grav 1=173(LC 1), 3=173(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:40 2020 Page 1
1ozNPT?RlZyYtJMSvXqDi-weTo76wtlmtZthvNWzB4d Q89fF63z2W0fAbhvpGv



September 23, 2020

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




Job	Truss	Truss Type	Qty	Ply	Lot 47 W2	I42923398
210210	V13	Valley	1	1	Job Reference (optional)	

Wheeler Lumber, Waverly, KS 66871

8.420 s Aug 25 2020 MiTek Industries, Inc. Wed Sep 23 07:57:41 2020 Page 1

ID:vBsZku21ozNPT?RlZyYtJMSyXqDi-Oq1AKSxW34zkB1G6xEVQcQXUQZx_rWDBkgPk77yapGu



Scale = 1:17.7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.52	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.28	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 15 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=5-10-8, 3=5-10-8
Max Horz 1=108(LC 5)
Max Uplift 1=30(LC 8), 3=57(LC 8)
Max Grav 1=233(LC 1), 3=233(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



September 23, 2020

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Symbols

PLATE LOCATION AND ORIENTATION



Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

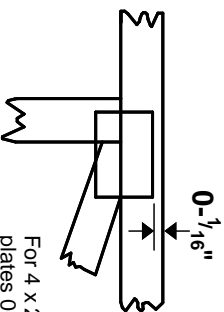

For 4 x 2 orientation, locate plates 0- 1/16" from outside edge of truss.



This symbol indicates the required direction of slots in connector plates.


* Plate location details available in **MiTek 20/20** software or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

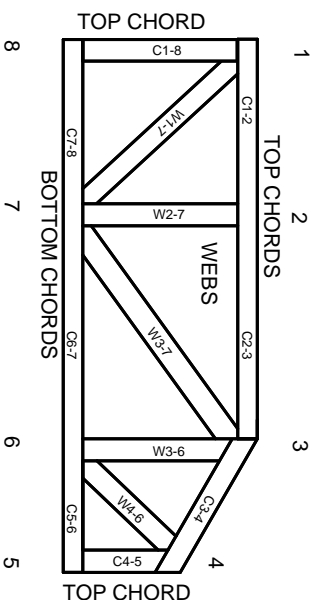

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MiTek® All Rights Reserved



MiTek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.