DO NOT CUT, DRILL, NOTCH, OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para assistencia ANTES de realizar qualquier modification.)

realizar cualquier modification.)

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing.

2. The responsibilities of the Owner, Building

The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

3. The wood components shown on this diagram are to be used in dry service (moisture content-19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless noted otherwise.

4. Refer to the Truss Design Drawings for specific information about each individual truss

design.
5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written

7. In some cases, field framing may be required to achieve the final appearance shown on the Construction Documents.

8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Stagge knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location of along one truss.

3. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or ceilling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

10. This Placement Diagram is based upon the supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the

Owner, Building Designer, and Contractor.

11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SBCA TTB.

12. The Contractor shall follow the SBCA LTB Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues.

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. ESPANOI -(TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION. NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.)

 Trusses shall be installed in a safe manner meeting all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death.

 Buildings under construction are vulnerable to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury of death.

Geath.

3. BCSI INSTRUCTIONS SHALL BE FOLLOWED:
BCSI-B1 = Safe Truss Handling and Installation
BCSI-B2 = Installation and Temporary Restraint

BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading BCSI-B5 = Truss Damage and Modification

Guidelines BCSI-B7 = Floor Truss Installation BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders

BCSI-B9 = Multi-Ply Girders BCSI-B10 = Post Frame Truss Installation BCSI-B11 = Fall Protection

4. Follow TPI Requirements for Long Span Trusses (>60').

TOP TO BOTTOM PITCH 4.5/12 SOFFIT DESIGNED FOR 12" HEEL HEIGHT 7-1/4"

SIDE TO SIDE PITCH 6/12 SOFFIT DESIGNED FOR 12" HEEL HEIGHT 8-3/4"

WALL HEIGHT 9' 1-1/8" EXTERIOR WALL 2X4

BOX VAULTS/COFFERS AT BEDROOM #1, BATHROOM #1, GREAT ROOM, & FOYER.

UNLESS NOTED OTHERWISE SEE LAYOUT FOR INFORMATION DIFFERENT FROM ABOVE STANDARDS

Roof Plane
Hip Lines,232.44
Horizontal Overhang Lines,278.89
Raked Overhang Lines,23.36
Ridge Lines1,46.64
Roof Area,2978.2
Valley Lines.97.01

HNGR	QTY	LOCATION
LUS24	30	D04-D13, E03-E14
HUS26	11	B01-B08
H2.5A SDWC15600	15 150	TRUSS TO BEAM/WALL TIE DOWN TRUSS TO WALL TIE DOWN



RESIDENTIAL ENGINEERING SERVICES, LLC. SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY
AND GENERAL CONFORMANCE TO CONTRACT
DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE
FOR CONFIRMING AND CORRELATING DIMENSIONS AT
JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES,
FABRICATION, COORDINATION OF HIS OR HER WORK
WITH OTHER TRADES, AND FULL COMPLIANCE WITH
CONTRACT DOCUMENTS.

STATUS:


APPROVED

02.12.2021

BH

REVIEWED BY

ENGINEER, RESIDENTIAL ENGINEERING SERVICES, LLC

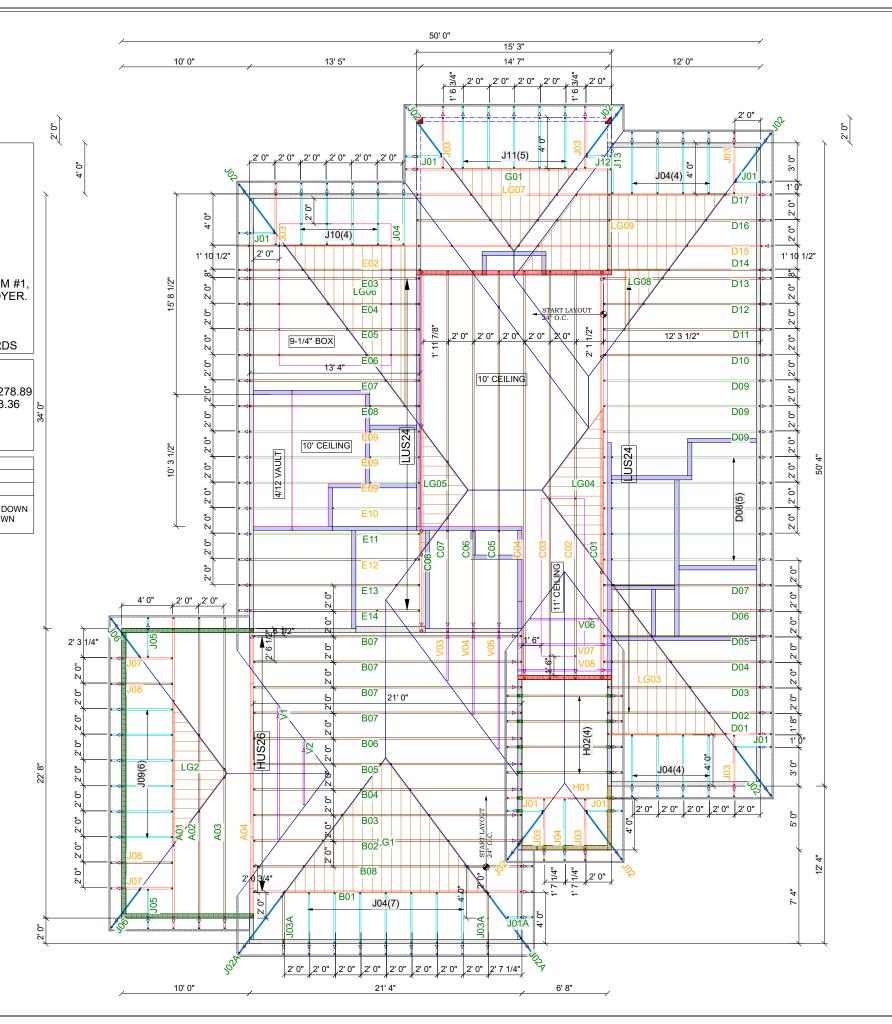

DESIGN LOADS:

25 PSF TCLL

20 PSF TCDL 10 PSF BCDL

GNED AND
OUT BE APPLIED
OUT AT NO TIME
LIED TO THE
FIONS ONLY
CAPABLE OF

WWW.BLDR.

SUMMIT H 2110 NW / LEE'S SUN TODD W N

ROOF

TRUSS LAYOUT

PAGE

1 of 1

SCRIPTION 3 ADDRESS FirstSourc

Builders