



MiTek USA, Inc.
16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Re: 2643945
summit/woodside ridge #36/MO

The truss drawing(s) referenced below have been prepared by MiTek USA, Inc. under my direct supervision based on the parameters provided by Builders FirstSource (Valley Center).

Pages or sheets covered by this seal: I44969809 thru I44969894

My license renewal date for the state of Missouri is December 31, 2021.

Missouri COA: Engineering 001193



February 25, 2021

Johnson, Andrew ,Engineer

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek or TRENCO. Any project specific information included is for MiTek's or TRENCO's customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek or TRENCO has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

Job 2643945	Truss A01	Truss Type Hip Girder	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969809
----------------	--------------	--------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:52 2021 Page 1

ID:wH4RYhEstTneUP2dXvOfi1syQY8e-03W9fKRIIf?xXT?GOOD?lpFrNMJh3bFZq1HMI0yZhYfr

Job Reference (optional)

0-10-8 0-10-8	2-11-12 2-11-12	5-8-0 2-8-4	10-4-0 4-8-0	15-0-0 4-8-0	17-8-4 2-8-4	20-8-0 2-11-12	21-6-8 0-10-8
------------------	--------------------	----------------	-----------------	-----------------	-----------------	-------------------	------------------

Scale = 1:37.1



LOADING (psf)	SPACING- 2-0-0 Plate Grip DOL 1.15 Lumber DOL 1.15 Rep Stress Incr NO Code IRC2018/TPI2014	CSI. TC 0.89 BC 0.90 WB 0.25 Matrix-MS	DEFL. Vert(LL) -0.15 12 Vert(CT) -0.33 12 Horz(CT) 0.08 8	in (loc)	l/defl >999 >750 n/a	L/d 240 180 n/a	PLATES MT20 MT20HS Weight: 79 lb	GRIP 197/144 148/108 FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF 1650F 1.5E
 WEBS 2x4 SPF No.2
 WEDGE
 Left: 2x4 SPF No.2 , Right: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-9-4 oc purlins, except 2-0-0 oc purlins (2-3-7 max.): 4-6.
 BOT CHORD Rigid ceiling directly applied or 8-10-12 oc bracing.

REACTIONS.

(size) 2=0-4-0, 8=0-4-0
 Max Horz 2=41(LC 29)
 Max Uplift 2=-400(LC 4), 8=-400(LC 5)
 Max Grav 2=1751(LC 1), 8=1751(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-3198/719, 3-4=-3196/728, 4-5=-3836/892, 5-6=-3836/892, 6-7=-3196/728, 7-8=-3198/719
 BOT CHORD 2-15=-644/2913, 13-15=-644/2913, 12-13=-642/2996, 11-12=-611/2996, 10-11=-614/2913, 8-10=-614/2913
 WEBS 4-13=-5/262, 4-12=-248/1007, 5-12=-718/280, 6-12=-248/1007, 6-11=-6/262

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=400, 8=400.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-90, 4-6=-90, 6-9=-90, 16-19=-20



February 25, 2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969809
2643945	A01	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:53 2021 Page 2
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-UF4YsgSNQJ3O49raxxWXLsNY6i1IKipzGx5rZPzhYfq

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 12=-27(B) 5=-60(B) 23=-60(B) 24=-60(B) 25=-60(B) 26=-60(B) 28=-177(B) 29=-144(B) 30=-27(B) 31=-27(B) 32=-27(B) 33=-27(B) 34=-144(B) 35=-177(B)

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969810
2643945	A02	Hip	1	1		

Builders FirstSource (Valley Center), Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:53 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-UF4YsgSNQJ3O49raxxWXLsNfPi5uKkvzGx5rZPzhYfq

Job Reference (optional)

0-10-8	4-3-12	8-4-0	12-4-0	16-4-4	20-8-0	21-6-8
0-10-8	4-3-12	4-0-4	4-0-0	4-0-4	4-3-12	0-10-8

Scale = 1:37.1



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.42	Vert(LL)	-0.09	9-11	>999	240	MT20
TCDL 20.0	Lumber DOL	1.15	BC 0.67	Vert(CT)	-0.19	9-17	>999	180	197/144
BCLL 0.0	Rep Stress Incr	YES	WB 0.11	Horz(CT)	0.06	7	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						
								Weight: 75 lb	FT = 20%

LUMBER-
TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
WEDGE
Left: 2x4 SPF No.2 , Right: 2x4 SPF No.2

BRACING-
TOP CHORD Structural wood sheathing directly applied, except
2-0-0 oc purlins (4-4-1 max.): 4-5.
BOT CHORD Rigid ceiling directly applied.

REACTIONS. (size) 2=0-4-0, 7=0-4-0
Max Horz 2=60(LC 16)
Max Uplift 2=-206(LC 8), 7=-206(LC 9)
Max Grav 2=1215(LC 1), 7=1215(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-2211/392, 3-4=-1874/332, 4-5=-1713/340, 5-6=-1874/332, 6-7=-2211/392
Exterior(2R) 12-4-0 to 16-6-9, Interior(1) 16-6-9 to 21-6-8 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
BOT CHORD 2-11=-315/2001, 9-11=-218/1712, 7-9=-315/2001
WEBS 3-11=-331/144, 4-11=-10/287, 5-9=-10/288, 6-9=-332/144

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 8-4-0, Exterior(2E) 8-4-0 to 12-4-0, Exterior(2R) 12-4-0 to 16-6-9, Interior(1) 16-6-9 to 21-6-8 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=206, 7=206.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969811
2643945	A03	Common	1	1		


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:54 2021 Page 1

ID:wH4RYhEstNeUP2dXvOf1syQY8e-yRew40T0BdBFilQmVe2mugwqw6St3Al6UbrO5rzhYfp

0-10-8	5-3-12	10-4-0	15-4-4	20-8-0	21-6-8
0-10-8	5-3-12	5-0-4	5-0-4	5-3-12	0-10-8

Scale = 1:35.9



LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.44	Vert(LL)	-0.10 8-10 >999 240	MT20		197/144	
TCDL	20.0	Lumber DOL	1.15	BC	0.62	Vert(CT)	-0.24 8-10 >999 180				
BCLL	0.0	Rep Stress Incr	YES	WB	0.14	Horz(CT)	0.06 6 n/a n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							
								Weight: 71 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 WEDGE
 Left: 2x4 SPF No.2 , Right: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=0-4-0
 Max Horz 2=74(LC 16)
 Max Uplift 2=-191(LC 8), 6=-191(LC 9)
 Max Grav 2=1215(LC 1), 6=1215(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2205/417, 3-4=-1950/392, 4-5=-1950/392, 5-6=-2205/417
 BOT CHORD 2-10=-321/1989, 8-10=-184/1421, 6-8=-327/1989
 WEBS 3-10=-413/171, 4-10=-100/570, 4-8=-101/570, 5-8=-413/171

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 10-4-0, Exterior(2R) 10-4-0 to 13-4-0, Interior(1) 13-4-0 to 21-6-8 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=191, 6=191.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component





16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969812
2643945	A04	ROOF SPECIAL GIRDER	1	2	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:56 2021 Page 1
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-vqmgUhUGjERzxcZ9d34Ez574bw4jXvyPyvKV9jzhYfn



2-3-14	3-1-3	4-4-0	7-4-0	8-4-0	10-4-0	12-4-0	13-4-0	16-4-0	17-6-13	18-4-2	20-8-0
2-3-14	0-9-5	1-2-13	3-0-0	1-0-0	2-0-0	2-0-0	1-0-0	3-0-0	1-2-13	0-9-5	2-3-14

Plate Offsets (X,Y)-- [3:1-0-8,0-5-0], [9:0-5-0,0-2-12], [12:1-0-12,0-5-0], [13:0-3-12,0-2-0], [14:Edge,0-1-8], [16:0-3-0,0-2-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.81	Vert(LL)	-0.02	19	>999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.85	Vert(CT)	-0.35	18-19	>694	MT20HS	148/108
BCLL 0.0	Rep Stress Incr	NO	WB 0.86	Horz(CT)	0.13	15	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						
								Weight: 266 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x6 SPF No.2 *Except* 3-8,8-12: 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (4-4-9 max.): 1-14.
BOT CHORD 2x4 SP 2400F 2.0E	BOT CHORD Rigid ceiling directly applied.
WEBS 2x4 SPF No.2 *Except* 1-24,14-15: 2x6 SPF No.2	JOINTS 1 Brace at Jt(s): 1, 14, 7, 6, 9

REACTIONS. (size) 24=0-4-0, 15=0-4-0
Max Horz 24=18(LC 16)
Max Grav 24=7116(LC 1), 15=7072(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-24=-952/0, 1-2=-490/0, 2-3=-8838/0, 3-4=-5036/0, 4-6=-4348/0, 6-7=-4348/0,
7-9=-2321/0, 9-11=-3228/0, 11-12=-4724/0, 12-13=-9347/0, 13-14=-554/0, 3-5=-9464/0,
5-8=-7471/0, 8-10=-7469/0, 10-12=-10066/0, 14-15=-632/0
BOT CHORD 23-24=0/5609, 22-23=0/13193, 21-22=0/13674, 19-21=0/11511, 18-19=0/12418,
17-18=0/13914, 16-17=0/13528, 15-16=0/7696
WEBS 7-8=0/4947, 9-10=0/2356, 7-10=-2562/0, 5-6=0/1827, 5-7=-1940/0, 7-19=0/506,
9-18=0/852, 11-17=-649/0, 4-22=-856/0, 4-21=-822/0, 7-21=0/1705, 9-19=-1001/0,
11-18=-1649/0, 2-24=-7868/0, 2-23=0/5936, 3-23=-6699/0, 3-22=0/971, 13-15=-9453/0,
13-16=0/4969, 12-16=-6433/0, 12-17=0/781

- NOTES-**
- 2-ply truss to be connected together with 10d (0.120"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-3-0 oc, 2x4 - 1 row at 0-4-0 oc.
Bottom chords connected as follows: 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc, Except member 24-2 2x4 - 1 row at 0-7-0 oc, member 23-3 2x4 - 1 row at 0-7-0 oc, member 15-13 2x4 - 1 row at 0-7-0 oc, member 16-12 2x4 - 1 row at 0-7-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed;
MWFRS (envelope) interior zone and C-C Exterior(2E) 3-6-2 to 6-6-2, Interior(1) 6-6-2 to 10-4-0, Exterior(2R) 0-2-12 to 3-6-2,
Interior(1) 3-6-2 to 20-5-4, Exterior(2R) 10-4-0 to 13-4-0, Interior(1) 13-4-0 to 17-1-14 zone; cantilever left and right exposed ; end
vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Bearing at joint(s) 24, 15 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and
conforms to ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969812
2643945	A04	ROOF SPECIAL GIRDER	1	2	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:56 2021 Page 2
ID:wH4RYhEsTNeUP2dXvOf1syQY8e-vqmgUhUGjERzxcZ9d34Ez5?4bw4jXvyPyvKV9jzhYfn

NOTES-

- Load case(s) 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28 has/have been modified. Building designer must review loads to verify that they are correct for the intended use of this truss.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) . The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-90, 12-14=-90, 3-8=-90, 8-12=-90, 15-24=-20
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.75 Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-78, 12-14=-78, 3-8=-77, 8-12=-77, 15-24=-20
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + Uninhabitable Attic Without Storage: Lumber Increase=1.25, Plate Increase=1.25
Uniform Loads (plf)
Vert: 1-3=-40, 12-14=-40, 3-8=-40, 8-12=-40, 15-24=-40
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 C-C Wind (Pos. Internal) Case 1: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=34, 12-14=26, 3-34=36, 8-34=32, 8-10=40, 10-12=32, 15-24=-8
Horz: 1-24=20, 3-34=-48, 8-34=-44, 8-10=52, 10-12=44, 14-15=35
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 C-C Wind (Pos. Internal) Case 2: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=26, 12-14=34, 3-5=32, 5-8=40, 8-12=32, 15-24=-8
Horz: 1-24=-35, 3-5=-44, 5-8=-52, 8-12=44, 14-15=-20
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 C-C Wind (Neg. Internal) Case 1: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-56, 12-14=-56, 3-8=-62, 8-12=-62, 15-24=-20
Horz: 1-24=-23, 3-8=22, 8-12=-22, 14-15=-32
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 C-C Wind (Neg. Internal) Case 2: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-56, 12-14=-56, 3-8=-62, 8-12=-62, 15-24=-20
Horz: 1-24=32, 3-8=22, 8-12=-22, 14-15=23
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 MWFRS Wind (Pos. Internal) Left: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=16, 12-14=6, 3-8=32, 8-12=22, 15-24=-8
Horz: 1-24=12, 3-8=-44, 8-12=34, 14-15=18
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 MWFRS Wind (Pos. Internal) Right: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=6, 12-14=16, 3-8=22, 8-12=32, 15-24=-8
Horz: 1-24=-18, 3-8=-34, 8-12=44, 14-15=12
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 MWFRS Wind (Neg. Internal) Left: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-23, 12-14=-34, 3-8=-19, 8-12=-30, 15-24=-20
Horz: 1-24=24, 3-8=-21, 8-12=10, 14-15=6
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- Dead + 0.6 MWFRS Wind (Neg. Internal) Right: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-34, 12-14=-23, 3-8=-30, 8-12=-19, 15-24=-20
Horz: 1-24=-6, 3-8=-10, 8-12=21, 14-15=24
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)

Continued on page 3

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969812
2643945	A04	ROOF SPECIAL GIRDER	1	2	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:56 2021 Page 3
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-vqmgUhUGjERzxcZ9d34Ez5?4bw4jXvyPyvKV9jzhYfn

LOAD CASE(S) Standard

- 12) Dead + 0.6 MWFRS Wind (Pos. Internal) 1st Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=16, 12-14=6, 3-8=35, 8-12=17, 15-24=-8
Horz: 1-24=7, 3-8=-47, 8-12=29, 14-15=15
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 13) Dead + 0.6 MWFRS Wind (Pos. Internal) 2nd Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=6, 12-14=16, 3-8=17, 8-12=35, 15-24=-8
Horz: 1-24=-15, 3-8=-29, 8-12=47, 14-15=-7
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 14) Dead + 0.6 MWFRS Wind (Pos. Internal) 3rd Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=16, 12-14=6, 3-8=22, 8-12=12, 15-24=-8
Horz: 1-24=7, 3-8=-34, 8-12=24, 14-15=15
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 15) Dead + 0.6 MWFRS Wind (Pos. Internal) 4th Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=6, 12-14=16, 3-8=12, 8-12=22, 15-24=-8
Horz: 1-24=-15, 3-8=-24, 8-12=34, 14-15=-7
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 16) Dead + 0.6 MWFRS Wind (Neg. Internal) 1st Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-23, 12-14=-34, 3-8=-17, 8-12=-34, 15-24=-20
Horz: 1-24=19, 3-8=-23, 8-12=6, 14-15=4
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 17) Dead + 0.6 MWFRS Wind (Neg. Internal) 2nd Parallel: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-34, 12-14=-23, 3-8=-34, 8-12=-17, 15-24=-20
Horz: 1-24=-4, 3-8=-6, 8-12=23, 14-15=-19
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 18) Dead: Lumber Increase=0.90, Plate Increase=0.90 Plt. metal=0.90
Uniform Loads (plf)
Vert: 1-3=-40, 12-14=-40, 3-8=-40, 8-12=-40, 15-24=-20
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 19) Dead + 0.75 Roof Live (bal.) + 0.75(0.6 MWFRS Wind (Neg. Int) Left): Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-65, 12-14=-73, 3-8=-62, 8-12=-70, 15-24=-20
Horz: 1-24=18, 3-8=-16, 8-12=8, 14-15=5
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 20) Dead + 0.75 Roof Live (bal.) + 0.75(0.6 MWFRS Wind (Neg. Int) Right): Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-73, 12-14=-65, 3-8=-70, 8-12=-62, 15-24=-20
Horz: 1-24=-5, 3-8=-8, 8-12=16, 14-15=-18
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 21) Dead + 0.75 Roof Live (bal.) + 0.75(0.6 MWFRS Wind (Neg. Int) 1st Parallel): Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-65, 12-14=-73, 3-8=-60, 8-12=-73, 15-24=-20
Horz: 1-24=14, 3-8=-17, 8-12=4, 14-15=3
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 22) Dead + 0.75 Roof Live (bal.) + 0.75(0.6 MWFRS Wind (Neg. Int) 2nd Parallel): Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-73, 12-14=-65, 3-8=-73, 8-12=-60, 15-24=-20
Horz: 1-24=-3, 3-8=-4, 8-12=17, 14-15=-14
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 23) Dead + 0.6 C-C Wind Min. Down: Lumber Increase=1.60, Plate Increase=1.60
Uniform Loads (plf)
Vert: 1-3=-28, 12-14=-28, 3-8=-28, 8-12=-28, 15-24=-8
Horz: 1-24=-16, 3-8=16, 8-12=-16, 14-15=-16
Concentrated Loads (lb)
Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)

Continued on page 4

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969812
2643945	A04	ROOF SPECIAL GIRDER	1	2	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:56 2021 Page 4
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-vqmgUhUGjERzxcZ9d34Ez5?4bw4jXvyPyvKV9jzhYfn

LOAD CASE(S) Standard

- 24) Dead + 0.6 C-C Wind Min. Upward: Lumber Increase=1.60, Plate Increase=1.60
- Uniform Loads (plf)
- Vert: 1-3=4, 12-14=4, 3-8=4, 8-12=4, 15-24=-8
- Horz: 1-24=16, 3-8=-16, 8-12=16, 14-15=16
- Concentrated Loads (lb)
- Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 25) 1st Dead + Roof Live (unbalanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-3=-90, 12-14=-40, 3-8=-90, 8-12=-40, 15-24=-20
- Concentrated Loads (lb)
- Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 26) 2nd Dead + Roof Live (unbalanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-3=-40, 12-14=-40, 3-8=-40, 8-12=-40, 15-24=-20
- Concentrated Loads (lb)
- Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 27) 3rd Dead + 0.75 Roof Live (unbalanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-3=-78, 12-14=-40, 3-8=-77, 8-12=-40, 15-24=-20
- Concentrated Loads (lb)
- Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)
- 28) 4th Dead + 0.75 Roof Live (unbalanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
- Vert: 1-3=-40, 12-14=-40, 3-8=-40, 8-12=-40, 15-24=-20
- Concentrated Loads (lb)
- Vert: 13=-1750(F) 25=-1135(F) 26=-1135(F) 27=-1135(F) 28=-1135(F) 29=-1135(F) 30=-1135(F) 31=-1135(F) 32=-1135(F) 33=-1135(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	B01	HIP GIRDER	1	1	I44969813

Builders FirstSource (Valley Center), Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:58 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-rDtRvNWWFrhhBwjYkU6i2W5Rkjkj?spiPDpcEczhYfl

Job Reference (optional)

0-10-8	2-9-0	6-7-10	10-8-0	14-8-6	18-7-0	21-0-0
0-10-8	2-9-0	3-10-10	4-0-6	4-0-6	3-10-10	2-5-0

Scale = 1:37.2



	2-9-0	6-7-10	10-8-0	14-8-6	18-7-0	21-0-0
	2-9-0	3-10-10	4-0-6	4-0-6	3-10-10	2-5-0

Plate Offsets (X,Y)-- [4:0-4-13,Edge], [8:0-6-0,0-0-15], [9:0-2-8,0-2-8], [11:0-3-8,0-1-8], [13:0-3-8,0-2-0]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.77	Vert(LL)	-0.25	12	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.95	Vert(CT)	-0.56	12	>453	180	MT20HS	148/108
BCLL 0.0	Rep Stress Incr	NO	WB 0.65	Horz(CT)	0.07	9	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MS							
									Weight: 84 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
4-8: 2x4 SPF 1650F 1.5E
BOT CHORD 2x4 SPF 1650F 1.5E
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-7-4 oc purlins, except 2-0-0 oc purlins (2-6-5 max.): 4-8.
BOT CHORD Rigid ceiling directly applied or 6-11-2 oc bracing.

REACTIONS.

(size) 9=Mechanical, 2=0-4-0
Max Horz 2=41(LC 29)
Max Uplift 9=-382(LC 9), 2=-398(LC 8)
Max Grav 9=1797(LC 1), 2=1859(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-2876/636, 4-5=-4847/1106, 5-6=-5502/1253, 6-7=-5502/1253, 7-8=-4704/1073, 8-9=-351/107
BOT CHORD 2-15=-549/2521, 13-15=-548/2502, 12-13=-1093/4843, 11-12=-1049/4700, 10-11=-491/2313, 9-10=-494/2337
WEBS 4-13=-613/2585, 5-13=-863/261, 5-12=-198/733, 6-12=-459/159, 7-12=-230/885, 7-11=-905/269, 8-11=-622/2634, 8-10=-36/291

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 9=382, 2=398.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Use Simpson Strong-Tie LUS24 (4-10d Girder, 2-10d Truss, Single Ply Girder) or equivalent spaced at 16-0-0 oc max. starting at 2-8-0 from the left end to 18-8-0 to connect truss(es) to back face of bottom chord.
- Fill all nail holes where hanger is in contact with lumber.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

Continued on page 2



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969813
2643945	B01	HIP GIRDER	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:58 2021 Page 2
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-rDtRvNWWFrhhBwjYkU6i2W5Rkjkj?spiPDpcEczhYfl

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-4=-90, 4-8=-90, 8-9=-90, 16-20=-20

Concentrated Loads (lb)

Vert: 15=-292(B) 13=-41(B) 5=-57(B) 12=-41(B) 6=-57(B) 7=-57(B) 11=-41(B) 10=-292(B) 24=-57(B) 25=-57(B) 26=-57(B) 27=-57(B) 28=-41(B) 29=-41(B) 30=-41(B) 31=-41(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	B02	Hip	1	1	I44969814

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:59 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-JPRp7jX8?9pXo4IkIbDxbjdax77zkO7setY9m2zhYfk

Job Reference (optional)



Scale = 1:36.0





Plate Offsets (X,Y)--		[1:0-3-8,Edge], [7:0-6-1,0-0-5]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.80	Vert(LL)	-0.11	9	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.75	Vert(CT)	-0.27	8-9	>939	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.32	Horz(CT)	0.06	7	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 79 lb FT = 20%		

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (2-2-0 max.): 3-5.
WEBS 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied.
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0	

REACTIONS. (size) 1=0-4-0, 7=Mechanical
Max Horz 1=39(LC 12)
Max Uplift 1=-167(LC 12), 7=-164(LC 13)
Max Grav 1=1155(LC 1), 7=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1846/300, 3-4=-2685/446, 4-5=-2685/446, 5-7=-1742/288
BOT CHORD 1-11=-236/1623, 9-11=-239/1620, 8-9=-207/1513, 7-8=-204/1514
WEBS 3-9=-241/1212, 4-9=-711/219, 5-9=-253/1314

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 4-3-0, Exterior(2R) 4-3-0 to 8-5-15, Interior(1) 8-5-15 to 17-1-0, Exterior(2E) 17-1-0 to 21-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=167, 7=164.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969815
2643945	B03	Hip	1	1		


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:47:59 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-JPRp7jX879pXo4IkIBdxbjdeT75ikNqsetY9m2zhYfk



Scale = 1:36.1



	5-9-0	15-7-0	21-0-0
	5-9-0	9-10-0	5-5-0
Plate Offsets (X,Y)--	[1:0-2-12,0-0-1], [7:0-6-1,0-0-5]		

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.58	Vert(LL)	-0.27	8-10	>949	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.83	Vert(CT)	-0.60	8-10	>423	MT20HS	148/108
BCLL 0.0	Rep Stress Incr	YES	WB 0.41	Horz(CT)	0.07	7	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						
								Weight: 77 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (4-4-7 max.): 3-5.
WEBS 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied.
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0	

REACTIONS. (size) 1=0-4-0, 7=Mechanical
Max Horz 1=52(LC 12)
Max Uplift 1=-165(LC 12), 7=-162(LC 13)
Max Grav 1=1155(LC 1), 7=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1810/280, 3-4=-1545/283, 4-5=-1468/272, 5-7=-1737/272
BOT CHORD 1-10=-195/1561, 8-10=-280/1933, 7-8=-173/1485
WEBS 3-10=-14/462, 4-10=-561/180, 4-8=-638/187, 5-8=-15/478

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 5-9-0, Exterior(2R) 5-9-0 to 9-11-15, Interior(1) 9-11-15 to 15-7-0, Exterior(2R) 15-7-0 to 19-9-15, Interior(1) 19-9-15 to 21-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) All plates are MT20 plates unless otherwise indicated.
 - 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 6) Refer to girder(s) for truss to truss connections.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=165, 7=162.
 - 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969816
2643945	B04	Hip	1	1		

Builders FirstSource (Valley Center),


Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:00 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-nb?BK3XmmTxOQDtwsv8A7xArJXWVTsN?TXijlVzhYfj



Scale = 1:36.0



LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.44	Vert(LL)	-0.07	MT20		197/144	
TCDL	20.0	Lumber DOL	1.15	BC	0.54	Vert(CT)	-0.16				
BCLL	0.0	Rep Stress Incr	YES	WB	0.26	Horz(CT)	0.06				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							
								Weight: 79 lb		FT = 20%	

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2 *Except* 3-4: 2x6 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except 2-0-0 oc purlins (5-5-11 max.): 3-4.
BOT CHORD	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied.
WEBS	2x4 SPF No.2		
SLIDER	Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0		

REACTIONS. (size) 1=0-4-0, 6=Mechanical
Max Horz 1=67(LC 12)
Max Uplift 1=-163(LC 12), 6=-160(LC 13)
Max Grav 1=1155(LC 1), 6=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1674/291, 3-4=-1399/304, 4-6=-1659/286
BOT CHORD 1-9=-189/1462, 7-9=-191/1457, 6-7=-174/1405
WEBS 3-9=0/288, 4-7=0/285

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 7-3-0, Exterior(2R) 7-3-0 to 11-5-15, Interior(1) 11-5-15 to 14-1-0, Exterior(2R) 14-1-0 to 18-3-15, Interior(1) 18-3-15 to 21-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Refer to girder(s) for truss to truss connections.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=163, 6=160.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969817
2643945	B05	Hip	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:01 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-FoZZYPYPXm4F2NS7PcgPg8i1XxrmCMi85B1GrxzhYfi

Job Reference (optional)

4-6-4	4-8-4	8-9-0	12-7-0	16-7-12	21-0-0
4-6-4	0-2-0	4-0-12	3-10-0	4-0-12	4-4-4

Scale = 1:36.0




Plate Offsets (X,Y)-- [1:0-3-8,Edge], [8:0-6-1,0-0-5]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.35	Vert(LL)	-0.10 11-14 >999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.60	Vert(CT)	-0.21 11-14 >999	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.13	Horz(CT)	0.05 8 n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 85 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (5-0-14 max.): 4-5.
WEBS 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied.
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0	

REACTIONS. (size) 1=0-4-0, 8=Mechanical
Max Horz 1=80(LC 12)
Max Uplift 1=-160(LC 12), 8=-157(LC 13)
Max Grav 1=1155(LC 1), 8=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1758/324, 3-4=-1510/286, 4-5=-1280/291, 5-6=-1466/283, 6-8=-1674/311
BOT CHORD 1-11=-261/1529, 9-11=-137/1262, 8-9=-220/1432
WEBS 4-11=-26/303, 5-9=-28/263, 3-11=-307/155

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 8-9-0, Exterior(2E) 8-9-0 to 12-7-0, Exterior(2R) 12-7-0 to 16-9-7, Interior(1) 16-9-7 to 21-0-0 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=160, 8=157.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969818
2643945	B06	Hip	1	1		

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:02 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-j_7xllZ1I4C6fX1JzKBeCMFCxL9ExmqIKmpNNzhYfh

Job Reference (optional)

5-3-4	5-5-4	10-3-0	11-1-0	15-10-12	21-0-0
5-3-4	0-2-0	4-9-12	0-10-0	4-9-12	5-1-4

Scale = 1:37.7




Plate Offsets (X,Y)--		[1:0-3-8,Edge], [8:0-6-1,0-0-5], [10:0-3-8,0-3-0]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.37
TCDL 20.0	Lumber DOL	1.15	BC 0.72
BCLL 0.0	Rep Stress Incr	YES	WB 0.26
BCDL 10.0	Code	IRC2018/TPI2014	Matrix-AS
DEFL.	in (loc)	l/defl	L/d
Vert(LL)	-0.16 11-14	>999	240
Vert(CT)	-0.34 11-14	>744	180
Horz(CT)	0.05 8	n/a	n/a
PLATES	GRIP		
MT20	197/144		
Weight: 83 lb		FT = 20%	

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (5-1-5 max.): 4-5.
WEBS 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied.
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0	

REACTIONS. (size) 1=0-4-0, 8=Mechanical
Max Horz 1=93(LC 12)
Max Uplift 1=-157(LC 12), 8=-154(LC 13)
Max Grav 1=1155(LC 1), 8=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-3=-1697/297, 3-4=-1387/253, 4-5=-1147/253, 5-6=-1375/252, 6-8=-1669/289
BOT CHORD 1-11=-261/1511, 9-11=-88/1147, 8-9=-193/1432
WEBS 4-11=-45/359, 5-9=-41/263, 6-9=-389/190, 3-11=-467/205

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 10-3-0, Exterior(2E) 10-3-0 to 11-1-0, Exterior(2R) 11-1-0 to 15-3-15, Interior(1) 15-3-15 to 21-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) Refer to girder(s) for truss to truss connections.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=157, 8=154.
 - 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss B07	Truss Type Common	Qty 4	Ply 1	summit/woodside ridge #36/MO I44969819
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:03 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-BAhKy5af3OKzHhcVX1itiZoNTkYcgF_RZVWNvpzhYfg



Scale = 1:39.0




Plate Offsets (X,Y)--		[1:0-3-8,Edge], [7:0-6-1,0-0-5]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.38	Vert(LL)	-0.07 8-10 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL 1.15		BC	0.54	Vert(CT)	-0.17 8-10 >999 180		
BCLL	0.0	Rep Stress Incr YES		WB	0.14	Horz(CT)	0.05 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 81 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 1=0-4-0, 7=Mechanical
Max Horz 1=98(LC 12)
Max Uplift 1=-156(LC 12), 7=-153(LC 13)
Max Grav 1=1155(LC 1), 7=1155(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-3=-1764/349, 3-4=-1615/372, 4-5=-1533/356, 5-7=-1685/338
BOT CHORD 1-10=-255/1525, 8-10=-114/1074, 7-8=-228/1438
WEBS 3-10=-392/190, 4-10=-133/563, 4-8=-114/478, 5-8=-340/179

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 10-8-0, Exterior(2R) 10-8-0 to 13-8-0, Interior(1) 13-8-0 to 21-0-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=156, 7=153.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969820
2643945	C01	HIP GIRDER	1	2		


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:05 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-8Zp4Nmbvb?ahW?lueSkLq_tdSYGz8zMKOp?U_izhYfe



Scale = 1:56.7



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.74	Vert(LL)	-0.17	16	>999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.33	Vert(CT)	-0.39	14-16	>976		
BCLL 0.0	Rep Stress Incr	NO	WB 0.91	Horz(CT)	0.05	11	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MS						
								Weight: 453 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied or 3-9-10 oc purlins, except end verticals, and 2-0-0 oc purlins (3-3-0 max.): 3-8.
BOT CHORD 2x8 SP 2400F 2.0E	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SPF No.2	

REACTIONS.	(size) 20=0-4-0, 11=0-4-0
	Max Horz 20=-92(LC 6)
	Max Uplift 20=-1333(LC 4), 11=-1244(LC 5)
	Max Grav 20=7002(LC 1), 11=6968(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-5296/1027, 2-3=-7195/1411, 3-4=-9439/1788, 4-5=-10581/1926, 5-7=-10581/1926, 7-8=-10259/1847, 8-9=-8766/1591, 9-10=-7161/1282, 1-20=-6250/1216, 10-11=-6297/1139
BOT CHORD	18-19=-927/4907, 17-18=-1263/6773, 16-17=-1711/9435, 14-16=-1771/10256, 13-14=-1439/8193, 12-13=-1203/6642
WEBS	2-19=-3342/656, 2-18=-564/3139, 3-18=-1261/167, 3-17=-730/4384, 4-17=-1979/328, 4-16=-258/1861, 5-16=-376/120, 7-16=-195/585, 7-14=-999/271, 8-14=-563/3433, 9-13=-351/2265, 9-12=-2367/441, 1-19=-1243/6446, 10-12=-1322/7457

- NOTES-**
- 2-ply truss to be connected together with 10d (0.120"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-4-0 oc.
Bottom chords connected as follows: 2x8 - 2 rows staggered at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Bearing at joint(s) 20, 11 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 20=1333, 11=1244.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Use Simpson Strong-Tie LUS24 (4-10d Girder, 2-10d Truss, Single Ply Girder) or equivalent spaced at 2-0-0 oc max. starting at Centerline of the left end to 6-7-4 to connect truss(es) to back face of bottom chord.



February 25, 2021

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969820
2643945	C01	HIP GIRDER	1	2	Job Reference (optional)	

- NOTES-**
- 12) Use Simpson Strong-Tie LUS24 (4-10d Girder, 2-10d Truss, Single Ply Girder) or equivalent spaced at 2-0-0 oc max. starting at 8-7-4 from the left end to 30-7-4 to connect truss(es) to back face of bottom chord.
- 13) Fill all nail holes where hanger is in contact with lumber.

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-3=-90, 3-8=-90, 8-10=-90, 11-20=-20

Concentrated Loads (lb)

Vert: 18=-609(B) 17=-609(B) 21=-615(B) 22=-609(B) 23=-609(B) 24=-609(B) 25=-609(B) 26=-724(B) 27=-724(B) 28=-724(B) 29=-724(B) 30=-724(B) 31=-655(B) 32=-645(B) 33=-645(B) 34=-645(B)

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:06 2021 Page 1
ID:wH4RYhEsTNeUP2dXvOf1svOY8e-cJMSb6cXMJiY88K4CAFaNCOIZvYfUvFSI1W8zhYd

5-9-1	11-2-11	18-5-5	20-8-11	24-8-11	32-0-0
5-9-1	5-5-9	7-2-11	2-3-5	4-0-0	7-3-5

Scale = 1:59.7




Plate Offsets (X,Y)-- [1:0-2-4,0-1-12], [3:0-6-0,0-1-8], [4:0-7-8,0-2-0], [7:0-3-0,0-1-12]													
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.90	Vert(LL)	-0.10	10-12	>999	240	MT20	197/144	
TCDL	20.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.26	10-12	>999	180	MT20HS	148/108	
BCLL	0.0	Rep Stress Incr	YES	WB	0.70	Horz(CT)	0.06	8	n/a	n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 154 lb	FT = 20%	

LUMBER-

TOP CHORD	2x4 SPF No.2 *Except*
	3-4: 2x4 SPF 1650F 1.5E
BOT CHORD	2x4 SPF No.2
WEBS	2x4 SPF No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (2-7-0 max.): 3-4, 5-6.
BOT CHORD	Rigid ceiling directly applied.
WEBS	1 Row at midpt 3-10

REACTIONS.

(size) 14=0-4-0, 8=0-4-0
 Max Horz 14=87(LC 9)
 Max Uplift 14=-257(LC 8), 8=-281(LC 9)
 Max Grav 14=1744(LC 1), 8=1744(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-2018/331, 2-3=-2171/397, 3-4=-2109/422, 4-5=-2252/429, 5-6=-1723/346,
6-7=-1945/324, 1-14=-1682/277, 7-8=-1671/305

BOT CHORD 12-13=-351/1812, 10-12=-344/1964, 9-10=-383/2201

WEBS 2-13=-673/156, 2-12=-29/347, 3-10=-86/349, 4-10=-12/332, 5-10=-268/135,
1-13=-265/1895, 7-9=-275/1777, 5-9=-814/144

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCFL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-4-2, Interior(1) 3-4-2 to 11-2-11, Exterior(2R) 11-2-11 to 14-5-1, Interior(1) 14-5-1 to 18-5-5, Exterior(2E) 18-5-5 to 20-8-11, Interior(1) 20-8-11 to 24-8-11, Exterior(2R) 24-8-11 to 27-11-1, Interior(1) 27-11-1 to 31-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) All plates are MT20 plates unless otherwise indicated.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 14=257, 8=281.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021



WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969822
2643945	C03	Roof Special	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:07 2021 Page 1

ID:W4RYhEsTNeUP2dXvOfi1syQY8e-4xwqoSd97cqPmlvGmtmpvPyyFMSEc_c1U6Va2bzhYfc



Scale = 1:57.2




Plate Offsets (X,Y)--	[1:0-2-0,0-1-8], [4:0-6-12,0-1-12], [5:0-6-0,0-1-15], [14:0-3-8,0-2-0]
-----------------------	--

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.78	Vert(LL)	-0.12	8-9	>999	240	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.73	Vert(CT)	-0.26	8-9	>999	180	148/108
BCLL 0.0	Rep Stress Incr	YES	WB 0.48	Horz(CT)	0.08	8	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						
								Weight: 157 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
4-5: 2x4 SPF 1650F 1.5E
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (3-4-9 max.): 3-4, 5-6.
BOT CHORD Rigid ceiling directly applied.
WEBS 1 Row at midpt 2-13, 5-11, 6-8

REACTIONS.

(size) 15=0-4-0, 8=0-4-0
Max Horz 15=77(LC 9)
Max Uplift 15=-237(LC 8), 8=-263(LC 9)
Max Grav 15=1744(LC 1), 8=1744(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-2189/337, 2-3=-2060/378, 3-4=-1875/391, 4-5=-2125/385, 5-6=-2339/385, 1-15=-1674/266
BOT CHORD 13-14=-347/1958, 11-13=-296/1820, 9-11=-385/2369, 8-9=-265/1421
WEBS 2-14=-524/152, 2-13=-283/146, 3-11=-131/417, 4-11=-43/316, 5-11=-637/172, 5-9=-954/216, 6-9=-179/1450, 1-14=-254/1968, 6-8=-1980/344

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-4-2, Interior(1) 3-4-2 to 13-10-11, Exterior(2E) 13-10-11 to 15-9-5, Exterior(2R) 15-9-5 to 18-11-12, Interior(1) 18-11-12 to 27-4-11, Exterior(2R) 27-4-11 to 30-7-1, Interior(1) 30-7-1 to 31-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- All plates are MT20 plates unless otherwise indicated.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 15=237, 8=263.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969823
2643945	C04	ROOF SPECIAL	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center),
Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:08 2021 Page 1

7-6-12

14-10-0

20-8-0

26-6-0

30-6-0

32-0-0

7-6-12

7-3-4

5-10-0

5-10-0

4-0-0

1-6-0

ID:wH4RYhEsTNeUP2dXvOf1syQY8e-Y8UD0oeouwyGOSUTKaI2SdV8hBeLPzAimE8b1zhYfb

Scale = 1:57.4




Plate Offsets (X,Y)--		[1:0-3-0,0-1-12], [5:0-6-0,0-1-15], [12:0-3-8,0-2-0]								
LOADING (psf)		SPACING- 2-0-0		CSI.	DEFL. in (loc)		l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC 0.74	Vert(LL)	-0.37 9-11	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC 0.78	Vert(CT)	-0.81 9-11	>470	180	MT20HS	148/108
BCLL	0.0	Rep Stress Incr	YES	WB 0.54	Horz(CT)	0.07 8	n/a	n/a	MT18HS	197/144
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 146 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (3-7-11 max.): 5-6.
BOT CHORD	2x4 SPF 1650F 1.5E	BOT CHORD	Rigid ceiling directly applied.
WEBS	2x4 SPF No.2	WEBS	1 Row at midpt 2-11, 4-11
REACTIONS.			
(size) 13=0-4-0, 8=0-4-0			
Max Horz 13=73(LC 9)			
Max Uplift 13=-230(LC 8), 8=-256(LC 9)			
Max Grav 13=1744(LC 1), 8=1744(LC 1)			

FORCES.			
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.			
TOP CHORD	1-2=-2223/312, 2-3=-2019/339, 3-4=-1988/343, 4-5=-2521/366, 5-6=-2326/306, 1-13=-1664/258		
BOT CHORD	11-12=-325/1983, 9-11=-337/2199, 8-9=-133/654		
WEBS	2-12=-501/136, 2-11=-394/181, 3-11=-91/787, 4-11=-670/232, 5-9=-1309/266, 6-9=-270/2200, 1-12=-239/1961, 6-8=-1805/290		

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 14-10-0, Exterior(2R) 14-10-0 to 17-10-0, Interior(1) 17-10-0 to 30-6-0, Exterior(2E) 30-6-0 to 31-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 13=230, 8=256.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25,2021


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	C05	ROOF SPECIAL	1	1	144969824

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:09 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-0K2bD8eQfE47?c3fipH?2H19V14sbKxQ_h7TzhYfa



Scale = 1:60.9





Plate Offsets (X,Y)-- [1:0-3-0,0-1-12], [5:0-6-0,0-1-15], [11:Edge,0-3-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.89	Vert(LL)	-0.24	8-10	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.90	Vert(CT)	-0.54	8-10	>625	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.52	Horz(CT)	0.06	7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 140 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
BOT CHORD Rigid ceiling directly applied.
WEBS 1 Row at midpt 3-10

REACTIONS.

(size) 7=0-4-0, 12=0-4-0
Max Horz 12=-142(LC 10)
Max Uplift 7=-233(LC 13), 12=-205(LC 8)
Max Grav 7=1542(LC 1), 12=1542(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1559/288, 2-3=-1493/355, 3-4=-2249/442, 4-5=-2228/318, 1-12=-1478/242
BOT CHORD 2-10=-589/231, 8-10=-194/1299, 7-8=-276/1514
WEBS 3-10=-117/291, 3-8=-253/1071, 4-8=-711/278, 5-8=-24/500, 5-7=-2024/382, 1-10=-198/1451

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 11-2-0, Exterior(2R) 11-2-0 to 14-2-0, Interior(1) 14-2-0 to 28-2-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=233, 12=205.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	C06	ROOF SPECIAL	1	1	I44969825

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:10 2021 Page 1

ID: wH4RYhEsTNeUP2dXvOfi1syQY8e-UWczQUf2QXC_dmerR?KWX2aSwZsxpKKTAA4jEfwzhYfZ



4x6 =

Scale = 1:59.7





Plate Offsets (X,Y)--	[1:0-3-0,0-1-12], [8:Edge,0-1-12], [12:Edge,0-3-8]					
LOADING (psf)	SPACING	2-0-0	CSI	DEFL.	in (loc)	L/defl
TCLL 25.0	Plate Grip DOL	1.15	TC 0.88	Vert(LL)	-0.33	8-9 >999
TCDL 20.0	Lumber DOL	1.15	BC 0.79	Vert(CT)	-0.69	8-9 >487
BCLL 0.0	Rep Stress Incr	YES	WB 0.48	Horz(CT)	0.07	8 n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS			
				PLATES		GRIP
				MT20		197/144
				MT20HS		148/108
				Weight: 142 lb		FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 8-10: 2x4 SPF 1650F 1.5E
 WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied.
 WEBS 1 Row at midpt 3-11, 5-8

REACTIONS.

(size) 13=0-4-0, 8=0-4-0
 Max Horz 13=-148(LC 10)
 Max Uplift 13=-206(LC 8), 8=-228(LC 13)
 Max Grav 13=1542(LC 1), 8=1542(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1553/291, 2-3=-1494/360, 3-4=-2077/408, 4-5=-2067/329, 5-7=-308/63,
 1-13=-1472/245, 7-8=-323/83
 BOT CHORD 2-11=-599/235, 9-11=-141/1294, 8-9=-294/1895
 WEBS 4-9=-542/206, 3-9=-231/1004, 3-11=-123/272, 5-8=-2019/343, 1-11=-201/1446

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 11-2-0, Exterior(2R) 11-2-0 to 14-2-0, Interior(1) 14-2-0 to 28-2-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) All plates are MT20 plates unless otherwise indicated.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 13=206, 8=228.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969826
2643945	C07	HIP	1	1		


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:12 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-RvkjrAhly9Shs3oEZQM_cTgoxNcgHEJmdOCLkozYfX

7-11-8	8-11-5	13-4-11	20-8-9	28-4-0
7-11-8	0-11-13	4-5-5	7-3-15	7-7-7

Scale = 1:58.3



	7-11-8	13-4-11	20-8-9	28-4-0
	7-11-8	5-5-3	7-3-15	7-7-7

Plate Offsets (X,Y)-- [1:0-3-0,0-1-12], [13:Edge,0-3-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.85	Vert(LL)	-0.11	13-14	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.52	Vert(CT)	-0.22	13-14	>999	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.45	Horz(CT)	0.05	8	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 150 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 7-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and
 2-0-0 oc purlins (4-5-0 max.): 3-4.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 14=0-4-0, 8=0-4-0
 Max Horz 14=-157(LC 10)
 Max Uplift 14=-228(LC 8), 8=-233(LC 9)
 Max Grav 14=1538(LC 1), 8=1538(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-1543/296, 2-3=-1488/356, 3-4=-1548/339, 4-5=-2263/469, 5-7=-2270/357,
 1-14=-1460/248, 7-8=-1460/261
 BOT CHORD 2-12=-618/265, 10-12=-159/1312, 9-10=-176/1553
 WEBS 3-10=-130/533, 4-10=-313/165, 4-9=-225/677, 5-9=-698/275, 7-9=-248/1844,
 1-12=-205/1441

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 8-11-5, Exterior(2E) 8-11-5 to 13-4-11, Exterior(2R) 13-4-11 to 17-7-9, Interior(1) 17-7-9 to 28-1-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 14=228, 8=233.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	C08	HIP GIRDER	1	2	144969827

Builders FirstSource (Valley Center), Valley Center, KS - 67147, 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:13 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-v5H63VwiSaYUDMQ68tD9gC0omya0ZTvs2yvGEzhYfW



Scale = 1:52.3





Plate Offsets (X,Y)--		[8:0-4-8,0-2-0], [9:0-3-8,0-4-0], [11:0-3-0,0-4-8], [13:0-6-8,0-3-8]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.65	Vert(LL)	-0.15 9-11 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.54	Vert(CT)	-0.32 9-11 >999 180	MT20HS	148/108
BCLL	0.0	Rep Stress Incr	NO	WB	0.97	Horz(CT)	0.09 8 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MS				Weight: 338 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2 *Except* 5-7: 2x4 SPF 1650F 1.5E	TOP CHORD Structural wood sheathing directly applied or 4-7-8 oc purlins, except end verticals, and 2-0-0 oc purlins (4-2-10 max.): 2-5.
BOT CHORD 2x6 SPF 2100F 1.8E *Except* 14-16: 2x6 SPF No.2, 3-14: 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SPF No.2	

REACTIONS.	(size) 8=0-4-0, 16=0-6-0 Max Horz 16=-165(LC 6) Max Uplift 8=-1225(LC 5), 16=-1186(LC 4) Max Grav 8=6399(LC 1), 16=6147(LC 1)
-------------------	--

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-4814/987, 2-3=-5967/1238, 3-4=-7446/1535, 4-5=-7449/1537, 5-6=-7997/1632, 6-7=-8766/1710, 1-16=-5463/1082, 7-8=-5241/1039
BOT CHORD	14-15=-64/326, 3-13=-2364/500, 12-13=-1104/6014, 11-12=-1404/7368, 9-11=-1574/8121, 8-9=-104/446
WEBS	1-15=-1092/5654, 2-15=-3731/700, 13-15=-856/4767, 2-13=-1010/5290, 5-11=-481/2275, 6-11=-850/222, 6-9=-340/376, 7-9=-1515/7914, 4-12=-522/153, 5-12=-29/303, 3-12=-515/2466

- NOTES-**
- 2-ply truss to be connected together with 10d (0.120"x3") nails as follows:
Top chords connected as follows: 2x4 - 1 row at 0-4-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-5-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Bearing at joint(s) 8, 16 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 8=1225, 16=1186.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

Our graphic page representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969827
2643945	C08	HIP GIRDER	1	2	Job Reference (optional)	

NOTES-

12) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 703 lb down and 138 lb up at 1-8-12, 703 lb down and 155 lb up at 3-8-12, 703 lb down and 193 lb up at 5-8-12, 712 lb down and 128 lb up at 7-9-12, 671 lb down and 141 lb up at 9-8-12, 671 lb down and 141 lb up at 11-8-12, 671 lb down and 141 lb up at 13-8-12, 671 lb down and 141 lb up at 15-8-12, 671 lb down and 200 lb up at 17-8-12, 671 lb down and 162 lb up at 19-8-12, 652 lb down and 126 lb up at 21-8-12, 652 lb down and 129 lb up at 23-8-12, and 652 lb down and 135 lb up at 25-8-12, and 658 lb down and 135 lb up at 27-8-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-2=-90, 2-5=-90, 5-7=-90, 14-16=-20, 8-13=-20

Concentrated Loads (lb)

Vert: 14=-712(B) 15=-703(B) 18=-703(B) 19=-703(B) 20=-671(B) 21=-671(B) 22=-671(B) 23=-671(B) 24=-671(B) 25=-671(B) 26=-652(B) 27=-652(B) 28=-652(B) 29=-658(B)

Job 2643945	Truss D01	Truss Type HALF HIP GIRDER	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969828
----------------	--------------	-------------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:14 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-NlrUGriYTmIP6NxcgrOSiulDTAG0l9?35ihSohzhYfV

Job Reference (optional)



Scale = 1:21.9




Plate Offsets (X, Y)--		[2:0-4-13, Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.53	Vert(LL)	-0.05	8-9	>999	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.66	Vert(CT)	-0.11	8-9	>999		
BCLL	0.0	Rep Stress Incr	NO	WB	0.44	Horz(CT)	0.01	7	n/a		
BCDL	10.0	Code	IRC2018/TPI2014	Matrix-MS						Weight: 46 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-5-5 oc purlins, except end verticals, and 2-0-0 oc purlins (3-10-11 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-4-0, 2=0-4-0
Max Horz 2=72(LC 28)
Max Uplift 7=-215(LC 5), 2=-219(LC 8)
Max Grav 7=914(LC 1), 2=1043(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-1427/325, 4-5=-1780/426, 5-6=-1777/425, 6-7=-836/222
BOT CHORD 2-9=-326/1238, 8-9=-327/1226
WEBS 4-8=-151/612, 5-8=-631/218, 6-8=-436/1796

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=215, 2=219.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-4=-90, 4-6=-90, 7-10=-20
Concentrated Loads (lb)
Vert: 14=-31(B) 15=-57(B) 16=-57(B) 17=-57(B) 18=-57(B) 19=-153(B) 20=-41(B) 21=-41(B) 22=-41(B) 23=-41(B)



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:15 2021 Page 1
ID:wH4RYhEsTNeUP2dXvOf1sVOY8e-rUPsUBiBE4qGiXWpEZwhE5IRvafJUeFCJMR?K7zhYf

-0-10-8	4-0-0	7-10-4	12-0-0
0-10-8	4-0-0	3-10-4	4-1-12

Scale = 1:21.7




Plate Offsets (X,Y)-- [2:0-4-1,0-0-5]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.29	Vert(LL)	-0.10 7-8 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.46	Vert(CT)	-0.22 7-8 >651 180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.31	Horz(CT)	0.01 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 46 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -t 1-6-0

BRACING-

TOP CHORD	Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 7=0-4-0
 Max Horz 2=98(LC 11)
 Max Uplift 2=-91(LC 12), 7=-119(LC 9)
 Max Grav 2=734(LC 1), 7=649(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-922/220, 4-5=-769/227
BOT CHORD 2-8=-246/774, 7-8=-251/766
WEBS 5-7=-810/261

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCFL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 4-0-0, Exterior(2R) 4-0-0 to 8-2-15, Interior(1) 8-2-15 to 11-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 7=119.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021



Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601.



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969830
2643945	D03	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:16 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOf1syQY8e-JgzEhXkp?Ny7Lh5?oGRwnJqWy_0cD0xMY0AZtZzhYft




Plate Offsets (X,Y)-- [2:0-4-1,0-0-5], [5:Edge,0-2-0]							
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.65	Vert(LL)	-0.05 6-7	>999	240
TCDL 20.0	Lumber DOL	1.15	BC 0.33	Vert(CT)	-0.09 6-7	>999	180
BCLL 0.0	Rep Stress Incr	YES	WB 0.60	Horz(CT)	0.01 6	n/a	n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS				
				PLATES	GRIP		
				MT20	197/144		
				Weight: 45 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=0-4-0
Max Horz 2=129(LC 11)
Max Uplift 2=-103(LC 12), 6=-117(LC 9)
Max Grav 2=734(LC 1), 6=649(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-851/212, 5-6=-292/112
BOT CHORD 2-7=-273/701, 6-7=-275/695
WEBS 4-6=-680/248

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 5-6-0, Exterior(2R) 5-6-0 to 9-8-15, Interior(1) 9-8-15 to 11-10-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=103, 6=117.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss D04	Truss Type HALF HIP	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969831
----------------	--------------	------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:17 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-ntXcutlRmh5_zrgBLzy9JWNjROKkyVNVngw6P0zhYfS

Job Reference (optional)



6x6 =

Scale = 1:26.3





Plate Offsets (X,Y)-- [2:0-3-9,0-0-1], [7:0-4-0,0-1-8], [9:Edge,0-3-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.54	Vert(LL)	0.07 10-13	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.46	Vert(CT)	-0.16 10-13	>936	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.46	Horz(CT)	0.06 6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 53 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 6=Mechanical, 2=0-4-0
Max Horz 2=139(LC 9)
Max Uplift 6=-116(LC 9), 2=-112(LC 12)
Max Grav 6=665(LC 1), 2=750(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-692/179
BOT CHORD 2-10=-235/588, 9-10=-145/393, 7-8=-125/259, 6-7=-270/652
WEBS 4-6=-732/274

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 7-0-0, Exterior(2R) 7-0-0 to 11-2-15, Interior(1) 11-2-15 to 12-1-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 6=116, 2=112.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss D05	Truss Type HALF HIP	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969832
----------------	--------------	------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:18 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-F35?6DI3X?Dra_FOVhToskwzOnhEh?Ff0KfgxSzhYfR




Plate Offsets (X,Y)--	[2:0-4-13,Edge], [8:0-3-0,0-0-8], [10:Edge,0-3-8]			
LOADING (psf)	SPACING-	CSI.	DEFL.	PLATES
TCLL 25.0	2-0-0	TC 0.21	in (loc) l/defl L/d	MT20
TCDL 20.0	Plate Grip DOL 1.15	BC 0.45	Vert(LL) -0.09 11-14 >999 240	GRIP 197/144
BCLL 0.0	Lumber DOL 1.15	WB 0.30	Vert(CT) -0.19 11-14 >781 180	
BCDL 10.0	Rep Stress Incr YES	Matrix-AS	Horz(CT) 0.04 7 n/a n/a	
	Code IRC2018/TPI2014			Weight: 56 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 7=Mechanical, 2=0-4-0
Max Horz 2=170(LC 9)
Max Uplift 7=-111(LC 9), 2=-116(LC 12)
Max Grav 7=665(LC 1), 2=750(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-829/206, 4-5=-537/150
BOT CHORD 2-11=-345/736, 10-11=-134/306, 7-8=-190/423
WEBS 4-11=-389/196, 9-11=-26/352, 5-9=-25/325, 5-7=-586/208

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 8-6-0, Exterior(2E) 8-6-0 to 12-1-12 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=111, 2=116.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969833
2643945	D06	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:19 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-jFfNJZmhILiC8qaTO_dPxS6CB_PQSkoe_PDTuzhYfQ



Scale = 1:34.4

Plate Offsets (X,Y)--	[2:0-4-13,Edge], [8:0-0-8,0-1-8]								
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.33	Vert(LL)	-0.16 11-14	>939	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.58	Vert(CT)	-0.32 11-14	>456	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.28	Horz(CT)	0.02 7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						
								Weight: 57 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 7=Mechanical, 2=0-4-0
 Max Horz 2=201(LC 9)
 Max Uplift 7=-114(LC 12), 2=-116(LC 12)
 Max Grav 7=665(LC 1), 2=750(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-798/195, 4-5=-408/120
 BOT CHORD 2-11=-331/705, 7-8=-137/270
 WEBS 4-11=-509/231, 9-11=-26/499, 5-9=-48/427, 5-7=-605/198

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 10-0-0, Exterior(2E) 10-0-0 to 12-1-12 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=114, 2=116.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969834
2643945	D07	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:19 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-jFfNJZmhIIIC8qaTO_dPxS?LBzPQPAoE_PDTuzhYfQ




Plate Offsets (X,Y)-- [2:0-4-1,0-0-5], [5:0-4-0,0-1-15], [10:0-2-8,0-3-0], [12:Edge,0-3-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.77	Vert(LL)	-0.08 13-16	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.64	Vert(CT)	-0.16 13-16	>895	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.51	Horz(CT)	0.07 9	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 58 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except
 2-0-0 oc purlins (6-0-0 max.): 5-7.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 9=Mechanical
 Max Horz 2=246(LC 12)
 Max Uplift 2=-80(LC 12), 9=-175(LC 12)
 Max Grav 2=741(LC 1), 9=675(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-642/81, 4-5=-1003/249
 BOT CHORD 2-13=-225/667, 12-13=-136/443, 10-11=-443/136
 WEBS 4-11=-675/327, 5-11=-355/1030, 6-9=-527/224

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 11-6-0, Exterior(2E) 11-6-0 to 12-3-8 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 9=175.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969835
2643945	D08	JACK-CLOSED	5	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:20 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOf1syQY8e-CSDIXvnJ3cTZqIPm16VsX9?EZbMa9pWxTe8m0KzhYfP

0-10-8 5-11-8 11-7-8 12-3-8
0-10-8 5-11-8 5-8-0 0-8-0

Scale = 1:38.0




Plate Offsets (X,Y)-- [2:0-4-1,0-0-1], [6:0-0-8,0-4-8], [8:Edge,0-3-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.55	Vert(LL)	-0.06 6-7 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.45	Vert(CT)	-0.11 9-12 >999 180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.69	Horz(CT)	0.08 6 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 57 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=Mechanical
Max Horz 2=225(LC 12)
Max Uplift 2=-57(LC 12), 6=-88(LC 12)
Max Grav 2=781(LC 1), 6=744(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-846/8
BOT CHORD 2-9=-201/730, 8-9=-78/445, 6-8=-40/350, 6-7=-175/403
WEBS 4-7=0/289, 4-6=-910/271

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 12-1-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2, 6.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	D09	JACK-CLOSED	3	1	I44969836


Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:21 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-gem7kFoxqwbQRS_zap15UMYR9?I5ulp5iluKYnzhYfO

Job Reference (optional)



Scale = 1:37.7

Plate Offsets (X,Y)--		[2:0-4-1,0-0-1]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)		l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC 0.43		Vert(LL) -0.03 6-7		>999 240		MT20 197/144	
TCDL	20.0	Lumber DOL 1.15		BC 0.31		Vert(CT) -0.05 7-11		>999 180			
BCLL	0.0	Rep Stress Incr YES		WB 0.56		Horz(CT) 0.02 13		n/a n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 57 lb FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 OTHERS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 -t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 13=Mechanical
 Max Horz 2=209(LC 12)
 Max Uplift 2=-74(LC 12), 13=-117(LC 12)
 Max Grav 2=754(LC 1), 13=629(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-803/48, 6-8=-88/435, 5-8=-88/435
 BOT CHORD 2-7=-207/683, 6-7=-207/683
 WEBS 4-7=0/253, 4-6=-729/215, 5-13=-631/164

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 11-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 13=117.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969838
2643945	D11	HALF HIP	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:22 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-8gKVyapabDJH3cZ98XYK0a4dZP5ldoWEwydt4DzhYfN




Plate Offsets (X,Y)--		[2:0-4-1,0-0-5]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC 0.33		Vert(LL) -0.04 7-8 >999 240		MT20 197/144	
TCDL	20.0	Lumber DOL 1.15		BC 0.31		Vert(CT) -0.10 7-8 >999 180			
BCLL	0.0	Rep Stress Incr YES		WB 0.34		Horz(CT) -0.01 14 n/a n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 61 lb FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 OTHERS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 14=Mechanical
 Max Horz 2=212(LC 12)
 Max Uplift 2=-91(LC 12), 14=-150(LC 12)
 Max Grav 2=754(LC 1), 14=629(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-877/82, 4-5=-910/215, 7-9=-253/649, 6-9=-253/649
 BOT CHORD 2-8=-262/719
 WEBS 4-8=-472/240, 5-8=-258/804, 5-7=-599/282, 6-14=-631/209

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 10-7-14, Exterior(2E) 10-7-14 to 11-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 14=150.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969839
2643945	D12	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:23 2021 Page 1

ID:wH4RYhESTNeUP2dXvOfi1syQY8e-c0ut9wpCMXr8hm7LiE3Z2ndpMoNsMHvO9cNRdfzhYfM

Job Reference (optional)




Plate Offsets (X,Y)-- [2:0-4-13,Edge], [6:0-1-8,0-3-0]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.26	Vert(LL)	-0.11	8-12	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.48	Vert(CT)	-0.22	8-12	>664	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.20	Horz(CT)	0.02	14	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 59 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 OTHERS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 14=Mechanical
 Max Horz 2=181(LC 12)
 Max Uplift 2=-99(LC 12), 14=-115(LC 12)
 Max Grav 2=754(LC 1), 14=629(LC 25)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-828/154, 4-5=-494/68, 5-6=-364/109
 BOT CHORD 2-8=-301/732
 WEBS 4-8=-440/208, 6-8=-184/611, 6-14=-632/186

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 9-1-14, Exterior(2E) 9-1-14 to 11-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2 except (jt=lb) 14=115.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job 2643945	Truss D13	Truss Type HALF HIP	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969840
----------------	--------------	------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:24 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-4DSGNGq7rz_lviXGyao679_xClx5I7XOG6_96zhYfL

Job Reference (optional)




Plate Offsets (X,Y)--		[2:0-4-13,Edge], [6:0-1-8,0-3-0]							
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	L/defl	L/d
TCLL	25.0	Plate Grip DOL	1.15	TC	0.27	Vert(LL)	-0.05 8-12	>999	240
TCDL	20.0	Lumber DOL	1.15	BC	0.36	Vert(CT)	-0.10 8-12	>999	180
BCLL	0.0	Rep Stress Incr	YES	WB	0.14	Horz(CT)	0.02 14	n/a	n/a
BCDL	10.0	Code	IRC2018/TPI2014	Matrix-AS					
						PLATES	GRIP		
						MT20	197/144		
						Weight: 55 lb	FT = 20%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 14=Mechanical
Max Horz 2=151(LC 12)
Max Uplift 2=-102(LC 12), 14=-97(LC 9)
Max Grav 2=754(LC 1), 14=629(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-893/187, 4-5=-627/124, 5-6=-508/150
BOT CHORD 2-8=-308/753
WEBS 6-8=-179/581, 4-8=-301/171, 6-14=-635/182

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 7-7-14, Exterior(2E) 7-7-14 to 11-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14 except (jt=lb) 2=102.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969841
2643945	D14	HALF HIP	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:25 2021 Page 1
ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-YP0eacrSu85rw3Hkpf51eCi58c46q7PgdsXhYzhYfK



Scale = 1:26.3

Plate Offsets (X,Y)--		[2:0-4-13,Edge], [4:0-4-13,Edge]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.56
TCDL 20.0	Lumber DOL	1.15	BC 0.43
BCLL 0.0	Rep Stress Incr	YES	WB 0.46
BCDL 10.0	Code	IRC2018/TPI2014	Matrix-AS
			DEFL.
			in (loc) l/defl L/d
			Vert(LL) 0.06 7-10 >999 240
			Vert(CT) -0.13 7-10 >999 180
			Horz(CT) 0.03 2 n/a n/a
			PLATES
			MT20
			GRIP
			197/144
			Weight: 47 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=0-4-0
Max Horz 2=164(LC 11)
Max Uplift 2=-112(LC 12), 6=-113(LC 9)
Max Grav 2=734(LC 1), 6=649(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-661/177
BOT CHORD 2-7=-257/563, 6-7=-258/556
WEBS 4-7=0/279, 4-6=-702/276

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 7-1-14, Exterior(2R) 7-1-14 to 11-4-13, Interior(1) 11-4-13 to 11-10-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=112, 6=113.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Builders FirstSource (Valley Center), Valley Center, KS - 67147, 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:27 2021 Page 1
 ID: wH4RYhEsTNeUP2dXvOf1syQY8e-Uo8O?IsiPmLZ9NR6x47VjdnOzQd?luS24ELeMqZhYfl
 -Q-10-8 3-0-4 5-9-0 9-6-6 11-10-0 13-3-11 17-1-1 18-7-1 20-0-0 24-6-0 26-9-0 28-11-0 32-11-4 37-3-0 37-8-0 40-0-0 40-10-8
 0-10-8 3-0-4 2-8-12 3-9-6 2-3-10 1-5-11 3-9-6 1-6-0 1-4-15 4-6-0 2-3-0 2-2-0 4-0-4 4-3-12 0-5-0 2-4-0 0-10-8
 Scale = 1:74.5



REACTIONS. All bearings 0-4-0.
 (lb) - Max Horz 2=-74(LC 9)
 Max Uplift All uplift 100 lb or less at joint(s) except 2=-117(LC 8), 16=-245(LC 9),
 24=-491(LC 9), 28=-379(LC 36)
 Max Grav All reactions 250 lb or less at joint(s) except 2=642(LC 21), 16=999(LC
 22), 24=2419(LC 1), 28=1511(LC 25)

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 117 lb uplift at joint 2, 245 lb uplift at joint 16, 491 lb uplift at joint 24 and 379 lb uplift at joint 28.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- 8) "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).



February 25, 2021

Continued on page 2

LOAD CASE(S) Standard

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITER KIT REFERENCE LITERATURE PRIOR TO INSTALLATION. Design valid for use only with MiTeK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969842
2643945	D15	Roof Special Girder	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:27 2021 Page 2
ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-Uo8O?IsiPmLZ9NR6x47VjdnOzQd?luSz4ELemQzhYfi

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-5=-90, 5-7=-90, 7-8=-90, 8-9=-90, 9-10=-90, 10-14=-90, 14-17=-90, 23-31=-20, 19-22=-20, 18-35=-20

Concentrated Loads (lb)

Vert: 19=-153(F) 38=-57(F) 39=41(F) 40=41(F) 41=41(F) 42=41(F) 43=-31(F) 44=-41(F) 45=-195(F) 46=-195(F) 47=-195(F) 48=-195(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969843
2643945	D16	Roof Special	1	1	Job Reference (optional)	


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:28 2021 Page 1

ID: wH4RYhEsTNeUP2dXvOf1syQY8e-z_hmCetKA3TQnX0JvNfKGrKe5p7r1UQ7Ju4BlzhYfH

0-10-8	4-3-0	7-11-10	9-11-0	11-10-0	15-7-1	17-1-1	21-6-0	26-11-0
0-10-8	4-3-0	3-8-10	1-11-6	1-11-0	3-9-1	1-6-0	4-4-15	5-5-0

Scale: 1/4"=1'



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.39	Vert(LL)	-0.07 15-16	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.36	Vert(CT)	-0.14 15-16	>986	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.44	Horz(CT)	0.02 11	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 107 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (6-0-0 max.): 4-7, 8-9.
WEBS 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied.
SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0	

REACTIONS. (size) 11=0-4-0, 2=0-4-0, 15=0-4-0
Max Horz 2=69(LC 12)
Max Uplift 11=-105(LC 13), 2=-126(LC 12), 15=-239(LC 12)
Max Grav 11=723(LC 1), 2=596(LC 1), 15=1721(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-587/140, 4-5=-535/157, 5-6=-41/602, 6-7=-40/604, 7-8=-678/196, 8-9=-756/221, 9-11=-877/206
BOT CHORD 2-16=-124/531, 15-16=-123/263, 13-15=-104/460, 12-13=-92/589, 11-12=-118/757
WEBS 7-13=-20/262, 6-15=-377/120, 5-15=-989/207, 5-16=-19/340, 7-15=-1225/215

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 4-3-0, Exterior(2R) 4-3-0 to 7-3-0, Interior(1) 7-3-0 to 17-1-1, Exterior(2R) 17-1-1 to 20-1-1, Interior(1) 20-1-1 to 21-6-0, Exterior(2R) 21-6-0 to 24-6-0, Interior(1) 24-6-0 to 26-11-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 105 lb uplift at joint 11, 126 lb uplift at joint 2 and 239 lb uplift at joint 15.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	D17	Roof Special Girder	1	1	I44969844

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:30 2021 Page 1

ID:wH4RYhESTNeUP2dXvOfi1syQY8e-vNpXdJvbiHj80qAhcChCLGPvhdglVHNQmBZIMzhYfF

Job Reference (optional)

0-10-8	2-9-0	6-6-6	7-2-10	10-3-11	11-10-0	14-1-1	15-7-1	19-3-8	23-0-0	26-11-0
0-10-8	2-9-0	3-9-6	0-8-4	3-1-1	1-6-5	2-3-1	1-6-0	3-8-8	3-8-8	3-11-0

Scale: 1/4"=1'




Plate Offsets (X,Y)-- [2:0-4-1,0-0-1], [7:0-2-13,Edge], [12:0-6-1,0-0-5]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.70	Vert(LL)	-0.19	16-17	>731	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.85	Vert(CT)	-0.45	16-17	>317	180		
BCLL	0.0	Rep Stress Incr	NO	WB	0.86	Horz(CT)	0.03	12	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MS							Weight: 105 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 -t 2-6-0, Right 2x6 SPF No.2 -t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-11-12 oc purlins, except
 2-0-0 oc purlins (5-1-8 max.): 4-7, 8-10.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except:
 6-0-0 oc bracing: 14-16.

REACTIONS.

(size) 12=0-4-0, 2=0-4-0, 16=0-4-0
 Max Horz 2=55(LC 29)
 Max Uplift 12=-104(LC 30), 2=-225(LC 8), 16=-408(LC 4)
 Max Grav 12=690(LC 1), 2=864(LC 21), 16=2168(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-1225/286, 4-5=-1059/277, 5-6=-163/990, 6-7=-162/990, 7-8=-458/228,
 8-9=-395/210, 9-10=-781/156, 10-12=-920/163
 BOT CHORD 2-17=-264/1082, 16-17=-338/848, 13-14=-245/864, 12-13=-110/789
 WEBS 4-17=-10/416, 7-14=-103/624, 9-14=-662/164, 6-16=-480/165, 7-16=-1153/200,
 5-17=0/380, 5-16=-1954/513

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 104 lb uplift at joint 12, 225 lb uplift at joint 2 and 408 lb uplift at joint 16.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-90, 4-7=-90, 7-8=-90, 8-10=-90, 10-12=-90, 18-22=-20



February 25, 2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.
 Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

MiTek
 16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969844
2643945	D17	Roof Special Girder	1	1	Job Reference (optional)	

LOAD CASE(S)
Standard
Concentrated Loads (lb)
Vert: 3=-31(F) 6=-61(F) 16=-45(F) 26=-57(F) 27=-57(F) 28=-57(F) 29=-57(F) 30=-153(F) 31=-41(F) 32=-41(F) 33=-41(F) 34=-41(F)

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969845
2643945	E02	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:31 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-NZNrvfVDT_r?e_luAwCRuTy5c14BEpOZ?rJsvCzhYfE

Job Reference (optional)

0-10-8	2-4-0	4-1-14	8-7-11	11-1-0	13-5-0
0-10-8	2-4-0	1-9-14	4-5-13	2-5-5	2-4-0

Scale = 1:24.5




Plate Offsets (X,Y)-- [2:0-2-0,0-1-12], [3:0-3-7,0-1-2], [6:Edge,0-1-8], [9:0-4-8,0-2-0], [12:0-3-0,0-0-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.63	Vert(LL)	-0.12 10-11 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.26 10-11 >597 180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.56	Horz(CT)	0.07 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 53 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (4-10-12 max.): 4-6.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 7=0-4-0, 14=0-4-0
Max Horz 14=106(LC 9)
Max Uplift 7=-133(LC 9), 14=-98(LC 12)
Max Grav 7=718(LC 1), 14=817(LC 25)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-550/131, 3-4=-1477/292, 4-5=-1288/301, 7-9=-676/155, 2-14=-805/239
BOT CHORD 13-14=-166/259, 3-12=-187/1051, 11-12=-353/1310, 10-11=-348/1362, 9-10=-296/1428
WEBS 4-11=0/350, 5-9=-1264/398

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 4-1-14, Exterior(2R) 4-1-14 to 8-7-11, Interior(1) 8-7-11 to 13-3-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Bearing at joint(s) 14 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 133 lb uplift at joint 7 and 98 lb uplift at joint 14.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969846
2643945	E03	HALF HIP	1	1		


Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:32 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOf1syQY8e-rlxH2?wrEI_sG8J4kdjgQhVISRQyzlBiEV2PrezhYfD



Scale = 1:26.0



	2-4-0	4-7-14	11-1-0	13-4-0
	2-4-0	2-3-14	6-5-2	2-3-0
Plate Offsets (X,Y)--	[3:0-3-15,0-1-6], [9:0-4-8,0-1-8], [9:0-2-0,0-0-12], [12:0-3-0,0-0-8]			

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.49	Vert(LL)	-0.08 10-11	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.61	Vert(CT)	-0.17 10-11	>923	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.39	Horz(CT)	0.05 18	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 54 lb	FT = 20%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied, except end verticals, and
BOT CHORD 2x4 SPF No.2	2-0-0 oc purlins (5-2-15 max.): 4-6.
WEBS 2x4 SPF No.2 *Except*	BOT CHORD Rigid ceiling directly applied.
2-14: 2x6 SPF No.2	
OTHERS 2x4 SPF No.2	

REACTIONS. (size) 14=0-4-0, 18=Mechanical
 Max Horz 14=88(LC 9)
 Max Uplift 14=99(LC 12), 18=120(LC 9)
 Max Grav 14=820(LC 1), 18=672(LC 25)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-3=-540/104, 3-4=-1352/280, 4-5=-1172/294, 5-6=-254/1, 6-9=-94/490, 2-14=-812/238
 BOT CHORD 3-12=-162/939, 11-12=-311/1187, 10-11=-285/1170, 9-10=-233/1196
 WEBS 4-11=0/290, 5-9=-1023/335, 6-18=-691/144

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 4-7-14, Exterior(2R) 4-7-14 to 8-8-7, Interior(1) 8-8-7 to 12-10-12 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - Refer to girder(s) for truss to truss connections.
 - Bearing at joint(s) 14 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 99 lb uplift at joint 14 and 120 lb uplift at joint 18.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.




February 25,2021

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969847
2643945	E04	HALF HIP	1	1		

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:33 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-JyVfFLxT?c6jtluGHKEvzu1PMqkzinNsS9oyz4zhYfC



Scale = 1:27.4




Plate Offsets (X,Y)--		[3:0-4-3,0-1-6], [4:0-4-13,Edge], [5:0-1-8,0-3-0], [11:0-3-0,0-2-8]	
LOADING (psf)	SPACING-	CSI.	DEFL.
TCLL 25.0	2-0-0	TC 0.74	in (loc) l/defl L/d
TCDL 20.0	Plate Grip DOL 1.15	BC 0.75	Vert(LL) 0.08 10-11 >999 240
BCLL 0.0	Lumber DOL 1.15	WB 0.27	Vert(CT) -0.15 10-11 >999 180
BCDL 10.0	Rep Stress Incr YES	Matrix-AS	Horz(CT) 0.06 17 n/a n/a
	Code IRC2018/TPI2014		
			PLATES MT20
			GRIP 197/144
			Weight: 56 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 2-13: 2x6 SPF No.2
 OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (3-11-2 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 13=0-4-0, 17=Mechanical
 Max Horz 13=112(LC 12)
 Max Uplift 13=108(LC 12), 17=115(LC 9)
 Max Grav 13=820(LC 25), 17=672(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-592/92, 3-4=-1166/247, 4-5=-1013/284, 2-13=-822/227
 BOT CHORD 3-11=-125/689, 10-11=-296/1006, 8-9=-40/273
 WEBS 5-10=-272/839, 5-17=-686/159

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 6-1-14, Exterior(2R) 6-1-14 to 10-4-13, Interior(1) 10-4-13 to 12-10-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Bearing at joint(s) 13 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 108 lb uplift at joint 13 and 115 lb uplift at joint 17.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

 $4 \times 6 =$

Scale = 1:27.5



	2-4-0	7-7-14	11-1-0	13-4-0
	2-4-0	5-3-14	3-5-2	2-3-0
Plate Offsets (X,Y)--	[2:0-4-8.0-3-4],	[5:0-1-8.0-3-0],	[11:0-2-0.0-0-8]	

LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.44	Vert(LL) 0.08 10-11	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL 1.15	BC 0.64	Vert(CT) -0.19 10-11	>819	180		
BCLL 0.0	Rep Stress Incr YES	WB 0.18	Horz(CT) 0.07 14	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-AS				Weight: 62 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except end verticals, and
BOT CHORD	2x4 SPF No.2		2-0-0 oc purlins (5-9-13 max.): 4-5.
WEBS	2x4 SPF No.2 *Except*	BOT CHORD	Rigid ceiling directly applied.
	2-13: 2x6 SPF No.2		
OTHERS	2x4 SPF No.2		

REACTIONS. (size) 13=0-4-0, 14=Mechanical
 Max Horz 13=138(LC 12)
 Max Uplift 13=-103(LC 12), 14=-109(LC 9)
 Max Grav 13=820(LC 1), 14=672(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD	2-3=-1213/290, 3-4=-888/206, 4-5=-749/215, 2-13=-839/194
BOT CHORD	12-13=-217/262, 2-11=-300/858, 10-11=-396/1052
WEBS	5-10=-221/728, 3-10=-367/198, 5-14=-679/172

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 7-7-14, Exterior(2R) 7-7-14 to 11-10-13, Interior(1) 11-10-13 to 12-10-12 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Bearing at joint(s) 13 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 103 lb uplift at joint 13 and 109 lb uplift at joint 14.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969849
2643945	E06	HALF HIP	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:34 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-n832Thy5mvEaVSTsr2l8V6ae?E5kRGB?hpXWVWzhYfB

0-10-8	2-4-0	5-5-7	9-1-14	11-1-0	13-4-0
0-10-8	2-4-0	3-1-7	3-8-7	1-11-2	2-3-0

Scale = 1:30.7




Plate Offsets (X,Y)--	[2:0-4-12,0-2-8], [5:0-1-8,0-3-0], [11:0-2-0,0-0-8]
-----------------------	---

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.49	Vert(LL)	-0.13 10-11	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.65	Vert(CT)	-0.33 10-11	>471	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.17	Horz(CT)	0.09 14	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS					Weight: 65 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 2-13: 2x6 SPF No.2
 OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 13=0-4-0, 14=Mechanical
 Max Horz 13=168(LC 12)
 Max Uplift 13=102(LC 12), 14=106(LC 12)
 Max Grav 13=820(LC 1), 14=672(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1136/247, 3-4=-701/143, 4-5=-552/164, 2-13=-819/182
 BOT CHORD 2-11=-273/798, 10-11=-378/980
 WEBS 5-10=-208/691, 3-10=-508/234, 5-14=-676/180

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 9-1-14, Exterior(2E) 9-1-14 to 12-10-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Bearing at joint(s) 13 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 102 lb uplift at joint 13 and 106 lb uplift at joint 14.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969850
2643945	E07	Half Hip	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:35 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-FKdQg1zjXDMR7c2fPIHN2J7r9eVcAft9wTH32zzhYfA




Plate Offsets (X,Y)--		[2:0-4-1,0-0-5]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL	1.15	TC 0.33		Vert(LL)	-0.04 7-8	>999	240	MT20	197/144
TCDL 20.0		Lumber DOL	1.15	BC 0.36		Vert(CT)	-0.08 7-8	>999	180		
BCLL 0.0		Rep Stress Incr	YES	WB 0.40		Horz(CT)	0.01 14	n/a	n/a		
BCDL 10.0		Code IRC2018/TPI2014		Matrix-AS						Weight: 65 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 OTHERS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 14=Mechanical
 Max Horz 2=212(LC 12)
 Max Uplift 2=-102(LC 12), 14=-142(LC 12)
 Max Grav 2=806(LC 1), 14=691(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-814/113, 4-5=-827/156, 7-9=-202/633, 6-9=-202/633
 BOT CHORD 2-8=-282/800, 7-8=-114/272
 WEBS 4-8=-425/203, 5-8=-165/646, 5-7=-617/241, 6-14=-692/199

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 10-7-14, Exterior(2E) 10-7-14 to 12-10-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 102 lb uplift at joint 2 and 142 lb uplift at joint 14.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:36 2021 Page 1
ID:wH4RYhEsTnElJP2dXvQf1svQY8e-kXAouNzMXlIHlldrzTochXf1E2mQvZlI9Z0daPzhyf9




Plate Offsets (X,Y)--		[2:0-4-1,Edge], [10:0-2-8,0-2-0]									
LOADING	(psf)	SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.31	Vert(LL)	-0.06 12-13	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.64	Vert(CT)	-0.13 12-13	>999	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.32	Horz(CT)	0.06 18	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 77 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except end verticals, and
BOT CHORD	2x4 SPF No.2		2-0-0 oc purlins (6-0-0 max.): 6-7.
WEBS	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied.
OTHERS	2x4 SPF No.2		
SLIDER	Left 2x4 SPF No.2 -t 2-6-0		

REACTIONS. (size) 2=0-4-0, 18=Mechanical
Max Horz 2=242(LC 12)
Max Uplift 2=-90(LC 12), 18=-180(LC 12)
Max Grav 2=806(LC 1), 18=691(LC 25)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 TOP CHORD 2-4=-1810/369, 4-5=-897/114, 5-6=-945/230, 7-10=-245/659
 BOT CHORD 2-13=-569/1618, 12-13=-526/1494
 WEBS 4-13=-132/479, 4-12=-759/295, 5-12=-464/212, 6-12=-311/1012, 6-10=-623/268,
 7-18=-692/223

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1I) 2-1-8 to 12-1-14, Exterior(2E) 12-1-14 to 12-10-12 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 90 lb uplift at joint 2 and 180 lb uplift at joint 18.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	E09	JACK-CLOSED	3	1	I44969852

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:37 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-CjKA5j_3qc8MvC1WAJr7kC7bS7xeZSSNmA6rzhYf8



Scale = 1:39.1

Plate Offsets (X,Y)--	[11:0-5-8,0-3-0]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 25.0	Plate Grip DOL	1.15	TC 0.59	Vert(LL)	-0.22	10-11	>720	MT20	197/144	
TCDL 20.0	Lumber DOL	1.15	BC 0.62	Vert(CT)	-0.51	10-11	>313			
BCLL 0.0	Rep Stress Incr	YES	WB 0.39	Horz(CT)	0.07	15	n/a			
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS							
								Weight: 74 lb	FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 2-11: 2x8 SP 2400F 2.0E
 WEBS 2x4 SPF No.2
 OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 15=Mechanical
 Max Horz 2=223(LC 12)
 Max Uplift 2=-76(LC 12), 15=-121(LC 12)
 Max Grav 2=806(LC 1), 15=691(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-2039/260, 3-5=-2146/385, 6-9=-134/625
 BOT CHORD 2-11=-460/1821, 10-11=-167/506, 9-10=-169/487
 WEBS 3-11=-393/181, 5-9=-693/224, 5-11=-366/1596, 6-15=-692/167

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 12-10-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 76 lb uplift at joint 2 and 121 lb uplift at joint 15.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.




February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017



Scale = 1:39.1

Plate Offsets (X,Y)-- [7:Edge,0-3-8], [10:0-3-0,0-0-0], [11:0-5-4,0-3-0]														
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d					PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.50	Vert(LL)	-0.11	8	>999	240	MT20	197/144		
TCDL	20.0	Lumber DOL	1.15	BC	0.67	Vert(CT)	-0.26	10	>599	180				
BCLL	0.0	Rep Stress Incr	YES	WB	0.80	Horz(CT)	0.05	15	n/a	n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 76 lb	FT = 20%		

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except end verticals.
BOT CHORD	2x4 SPF No.2 *Except*	BOT CHORD	Rigid ceiling directly applied.
	2-11: 2x8 SP 2400F 2.0E		
WEBS	2x4 SPF No.2		
OTHERS	2x4 SPF No.2		

REACTIONS. (size) 2=0-4-0, 15=Mechanical
Max Horz 2=223(LC 12)
Max Uplift 2=-76(LC 12), 15=-121(LC 12)
Max Grav 2=806(LC 1), 15=691(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD	2-3=-192/224, 3-5=-1842/274, 6-9=-76/459
BOT CHORD	2-11=-421/1693, 10-11=-292/922, 9-10=-328/791
WEBS	5-11=-181/968, 5-9=-938/278, 6-15=-692/167

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCdL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8; Interior(1) 2-1-8 to 12-10-12 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 76 lb uplift at joint 2 and 121 lb uplift at joint 15.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021



WARNING – Velly design parameters are READ-ONLY on this and INCLUDED WITH REFERENCE PAGE MH-1413 (Rev. 3/29/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969854
2643945	E11	JACK-CLOSED	1	1		


Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:38 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-gvIYJ3?cq8k?_3nE4uq4gyIJGrX4NwVbcRVjelzhYf7

0-10-8 6-8-0 13-4-0
0-10-8 6-8-0 6-8-0



Scale = 1:40.6

Plate Offsets (X,Y)--		[2:0-4-1,0-0-1]			
LOADING (psf)	SPACING- 2-0-0	CSI.	DEFL. in (loc) l/defl L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL 1.15	TC 0.53	Vert(LL) -0.04 9-10 >999 240	MT20	197/144
TCDL 20.0	Lumber DOL 1.15	BC 0.37	Vert(CT) -0.08 9-10 >999 180		
BCLL 0.0	Rep Stress Incr YES	WB 0.79	Horz(CT) 0.02 9 n/a n/a		
BCDL 10.0	Code IRC2018/TPI2014	Matrix-AS			
				Weight: 55 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 9=Mechanical
Max Horz 2=295(LC 11)
Max Uplift 2=-99(LC 12), 9=-108(LC 9)
Max Grav 2=800(LC 1), 9=732(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-872/172
BOT CHORD 2-10=-303/739, 9-10=-303/739
WEBS 4-10=0/283, 4-9=-828/253

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 13-4-0 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 99 lb uplift at joint 2 and 108 lb uplift at joint 9.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969855
2643945	E12	HALF HIP	1	1		

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:39 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-85sxWO0EbSsscDMQebLJC9HUeFt96M3kr5FHBkzhYf6



Scale = 1:40.3

Plate Offsets (X,Y)--		[2:0-4-1,0-0-1], [5:0-2-1,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL 1.15		TC	0.56	Vert(LL)	-0.05	6-7	>999	240	MT20 197/144
TCDL	20.0	Lumber DOL 1.15		BC	0.38	Vert(CT)	-0.09	6-7	>999	180	
BCLL	0.0	Rep Stress Incr YES		WB	0.83	Horz(CT)	0.02	6	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 55 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=Mechanical
 Max Horz 2=295(LC 11)
 Max Uplift 2=-116(LC 12), 6=-173(LC 12)
 Max Grav 2=807(LC 1), 6=723(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-891/174
 BOT CHORD 2-7=-297/757, 6-7=-297/757
 WEBS 4-7=0/287, 4-6=-847/258

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 13-2-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 116 lb uplift at joint 2 and 173 lb uplift at joint 6.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017




Plate Offsets (X,Y)-- [2:0-4,1,0-0-5]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d					PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.38	Vert(LL)	-0.08	7-8	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.39	Vert(CT)	-0.16	7-8	>972	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.47	Horz(CT)	0.01	7	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 61 lb	FT = 20%

LUMBER-
TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPE No 2 -t 1-6-0

BRACING-	
TOP CHORD	Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS. (size) 2=0-4-0, 7=Mechanical
Max Horz 2=254(LC 11)
Max Uplift 2=-124(LC 12), 7=-135(LC 12)
Max Grav 2=807(LC 1), 7=723(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-967/178, 4-5=-1001/300
BOT CHORD 2-8=-327/792
WEBS 4-8=-512/247, 5-8=-263/892, 5-7=-676/355

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDF=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1I) 2-1-8 to 11-6-0, Exterior(2E) 11-6-0 to 13-2-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 124 lb uplift at joint 2 and 135 lb uplift at joint 7.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TP1 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021



WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969857
2643945	E14	HALF HIP	1	1		

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:41 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-4U_hx41U636arXVpl0NnlaNuu3VYaPJ1IPkNFdzYf4




Plate Offsets (X,Y)--		[2:0-4-13,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.32	Vert(LL)	-0.16	8-11	>999	240	MT20 197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.32	8-11	>491	180	
BCLL	0.0	Rep Stress Incr	YES	WB	0.27	Horz(CT)	0.02	2	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 59 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 - t 1-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 7=Mechanical, 2=0-4-0
 Max Horz 2=223(LC 11)
 Max Uplift 7=-118(LC 9), 2=-126(LC 12)
 Max Grav 7=723(LC 1), 2=807(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-908/212, 4-5=-526/144, 5-6=-384/161, 6-7=-723/245
 BOT CHORD 2-8=-372/799
 WEBS 4-8=-493/214, 6-8=-247/711

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 10-0-0, Exterior(2E) 10-0-0 to 13-2-4 zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 118 lb uplift at joint 7 and 126 lb uplift at joint 2.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job 2643945	Truss G01	Truss Type Hip Girder	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969858
----------------	--------------	--------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:42 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-YgY38Q27INERTH4?Jv0qovzGTohJiXB3Txn3zhYf3

Job Reference (optional)



Scale = 1:28.4




Plate Offsets (X,Y)-- [2:0-4-13,Edge], [9:0-2-0,0-2-8]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.66	Vert(LL)	-0.10 10-11	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.71	Vert(CT)	-0.22 10-11	>823	180		
BCLL 0.0	Rep Stress Incr	NO	WB 0.91	Horz(CT)	0.06 8	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MS					Weight: 60 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF 1650F 1.5E
WEBS 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-5-15 oc purlins, except
2-0-0 oc purlins (3-7-4 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 8-7-10 oc bracing.

REACTIONS.

(size) 2=0-4-0, 8=0-4-0
Max Horz 2=43(LC 29)
Max Uplift 2=-281(LC 8), 8=-266(LC 9)
Max Grav 2=1331(LC 1), 8=1273(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-2007/439, 4-5=-1715/397, 5-6=-1544/356, 6-7=-1754/371
BOT CHORD 2-11=-379/1768, 10-11=-700/3126, 9-10=-700/3126
WEBS 4-11=-104/669, 5-11=-1507/370, 5-10=0/326, 5-9=-1680/403, 6-9=-47/366,
7-8=-1286/272, 7-9=-334/1644

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 281 lb uplift at joint 2 and 266 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 30 lb up at 13-6-4 on top chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-4=-90, 4-6=-90, 6-7=-90, 8-12=-20



February 25, 2021

Continued on page 2

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969858
2643945	G01	Hip Girder	1	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:42 2021 Page 2
ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-YgY38Q27tNERTh4?Jjv0qovzGTohJiXBX3Txn3zhYf3

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 11=-169(B) 10=-41(B) 5=-57(B) 9=-169(B) 17=-57(B) 18=-57(B) 19=-57(B) 20=-57(B) 22=-41(B) 23=-41(B) 24=-41(B) 25=-41(B)

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	I44969859
2643945	H01	HIP GIRDER	1	1		

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:43 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-0t5RMm3legMl4qfBtRQFN?SG4sGz2NkKmjDUKVzhYf2

Job Reference (optional)

-0-10-8	2-9-0	4-7-0	7-4-0	8-2-8
0-10-8	2-9-0	1-10-0	2-9-0	0-10-8

Scale = 1:17.4




Plate Offsets (X,Y)-- [2:0-4-1,0-0-1], [7:0-4-1,0-0-1]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.15	Vert(LL)	-0.01 9 >999 240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.20	Vert(CT)	-0.02 9-10 >999 180		
BCLL	0.0	Rep Stress Incr	NO	WB	0.02	Horz(CT)	0.01 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MP				Weight: 27 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2
 SLIDER Left 2x4 SPF No.2 -t 1-6-15, Right 2x4 SPF No.2 -t 1-6-15

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 2=0-4-0, 7=0-4-0
 Max Horz 2=31(LC 8)
 Max Uplift 2=-129(LC 8), 7=-129(LC 9)
 Max Grav 2=562(LC 1), 7=562(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-588/158, 4-5=-491/142, 5-7=-588/157
 BOT CHORD 2-10=-102/495, 9-10=-104/491, 7-9=-104/495

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 129 lb uplift at joint 2 and 129 lb uplift at joint 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- "NAILED" indicates 3-10d (0.148"x3") or 3-12d (0.148"x3.25") toe-nails per NDS guidelines.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 Uniform Loads (plf)
 Vert: 1-4=-90, 4-5=-90, 5-8=-90, 11-15=-20
 Concentrated Loads (lb)
 Vert: 19=-31(B) 20=-57(B) 21=-31(B) 22=-41(B)




February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017



Scale = 1:19.5




Plate Offsets (X,Y)-- [2:0-2-12,0-0-5], [6:0-4-1,0-0-5]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d					PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.15	Vert(LL)	-0.01	8-15	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.15	Vert(CT)	-0.01	8-15	>999	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	2	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 27 lb	FT = 20%

LUMBER-

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x4 SPF No.2
SLIDER	Left 2x4 SPF No.2 -t 2-0-3, Right 2x4 SPF No.2 -t 2-0-3

BRACING-

TOP CHORD	Structural wood sheathing directly applied.
BOT CHORD	Rigid ceiling directly applied.

REACTIONS.

(size) 2=0-4-0, 6=0-4-0
 Max Horz 2=40(LC 16)
 Max Uplift 2=-74(LC 12), 6=-74(LC 13)
 Max Grav 2=482(LC 1), 6=482(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-4=-384/214, 4-6=-384/214
BOT CHORD 2-8=-77/332, 6-8=-77/332

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 3-8-0, Exterior(2R) 3-8-0 to 6-10-14, Interior(1) 6-10-14 to 8-2-8 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 74 lb uplift at joint 2 and 74 lb uplift at joint 6.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601.



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss J01	Truss Type JACK-OPEN	Qty 5	Ply 1	summit/woodside ridge #36/MO I44969861
----------------	--------------	-------------------------	----------	----------	---

Builders FirstSource (Valley Center),


Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:45 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOf1syQY8e-zFDCnS4?Aic0K8pa_sSJSQXdRg?vVGyD1ibOOzhYf0

0-10-8 2-0-0
0-10-8 2-0-0

Scale = 1:11.6



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	-0.00	5	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	-0.00	4-5	>999	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MR						Weight: 6 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-4-0, 3=Mechanical, 4=Mechanical
Max Horz 5=48(LC 12)
Max Uplift 5=-28(LC 12), 3=-33(LC 12)
Max Grav 5=219(LC 1), 3=61(LC 1), 4=33(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 28 lb uplift at joint 5 and 33 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J01A	Truss Type Jack-Open	Qty 2	Ply 1	summit/woodside ridge #36/MO I44969862
Builders FirstSource (Valley Center), Valley Center, KS - 67147,					Job Reference (optional)

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:46 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-RSna_o5dxbktxlOmYZzy?e4nB4LOEjomShR8xqzhYf?



Scale = 1:9.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	0.00	5	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	0.00	5	>999	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MR						Weight: 4 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-2-1 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-4-0, 3=Mechanical, 4=Mechanical
Max Horz 5=33(LC 9)
Max Uplift 5=-28(LC 12), 3=-15(LC 12), 4=-2(LC 9)
Max Grav 5=194(LC 1), 3=12(LC 19), 4=14(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 28 lb uplift at joint 5, 15 lb uplift at joint 3 and 2 lb uplift at joint 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss J02	Truss Type Jack-Open Girder	Qty 5	Ply 1	summit/woodside ridge #36/MO I44969863
----------------	--------------	--------------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:46 2021 Page 1
ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-RSna_o5dxbkxIOmYZzy?e4lg4JaEjQmShR8xqzhYf?




Plate Offsets (X,Y)--		[5:0-3-0,0-2-0]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	-0.01	4-5	>999	240	MT20 197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.14	Vert(CT)	-0.02	4-5	>999	180	
BCLL	0.0	Rep Stress Incr	NO	WB	0.02	Horz(CT)	-0.00	3	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MP					Weight: 15 lb FT = 20%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-5-11, 3=Mechanical, 4=Mechanical
Max Horz 5=61(LC 8)
Max Uplift 5=-106(LC 8), 3=-48(LC 12)
Max Grav 5=371(LC 1), 3=125(LC 1), 4=72(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-335/251

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -1-5-8 to 2-9-7, Exterior(2R) 2-9-7 to 3-7-15 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 106 lb uplift at joint 5 and 48 lb uplift at joint 3.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969864
2643945	J02A	Jack-Open	2	1	Job Reference (optional)	

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:47 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-veLyB86FivskZSzy6HUBXrcwTUfzA2wgLBiTGzhYf_



Scale = 1:12.7

Plate Offsets (X,Y)--		[2:0-2-0,0-0-7]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	0.02	5-8	>999	240	MT20 197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.14	Vert(CT)	-0.03	5-8	>999	180	
BCLL	0.0	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.01	2	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							Weight: 14 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
SLIDER Left 2x4 SPF No.2 -t 2-6-0

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 4=Mechanical, 2=0-5-11, 5=Mechanical
Max Horz 2=74(LC 8)
Max Uplift 4=-54(LC 12), 2=-101(LC 8)
Max Grav 4=152(LC 1), 2=381(LC 1), 5=72(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -1-5-8 to 2-9-7, Exterior(2R) 2-9-7 to 4-1-5 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 54 lb uplift at joint 4 and 101 lb uplift at joint 2.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017




Plate Offsets (X,Y)-- [2:0-2:0,0-4-11]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d					PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.22	Vert(LL)	-0.02	6-9	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.38	Vert(CT)	-0.05	6-9	>911	180		
BCLL	0.0	Rep Stress Incr	NO	WB	0.02	Horz(CT)	0.03	4	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MP							Weight: 13 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
WEDGE
Left: 2x4 SPF No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 4-0-0 oc purlins, except 2-0-0 oc purlins: 3-4.
BOT CHORD	Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 4=Mechanical, 2=0-4-0, 5=Mechanical
Max Horz 2=55(LC 4)
Max Uplift 4=-45(LC 11), 2=-66(LC 4), 5=-33(LC 8)
Max Grav 4=111(LC 22), 2=307(LC 1), 5=173(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDF=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 45 lb uplift at joint 4, 66 lb uplift at joint 2 and 33 lb uplift at joint 5.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- 9) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 95 lb down and 55 lb up at 3-11-4, and 29 lb down and 36 lb up at 3-0-0 on top chord, and 27 lb down at 3-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 10) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=90, 3-4=90, 5-7=20
Concentrated Loads (lb)
Vert: 4=50(B) 6=-10(B)



February 25, 2021



WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J04	Truss Type JACK-OPEN	Qty 17	Ply 1	summit/woodside ridge #36/MO 144969867
----------------	--------------	-------------------------	-----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:49 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-r1Tjcp7WEW7RoI7LDiXfcGiGFHJNR4XD8fgpW9zhYey



Scale = 1:13.3

Plate Offsets (X,Y)--		[2:0-2,0,0-4-11]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.23	Vert(LL)	0.02	4-7	>999	240	MT20 197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.20	Vert(CT)	-0.03	4-7	>999	180	
BCLL	0.0	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.01	2	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS							
									Weight: 12 lb FT = 20%		

LUMBER-

TOP CHORD 2x4 SPF No.2

BOT CHORD 2x4 SPF No.2

WEDGE

Left: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied.

BOT CHORD Rigid ceiling directly applied.

REACTIONS. (size) 3=Mechanical, 2=0-4-0, 4=Mechanical

Max Horz 2=74(LC 8)

Max Uplift 3=-53(LC 12), 2=-59(LC 8), 4=-1(LC 12)

Max Grav 3=147(LC 1), 2=304(LC 1), 4=77(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 3-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 53 lb uplift at joint 3, 59 lb uplift at joint 2 and 1 lb uplift at joint 4.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601


ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss J05	Truss Type Jack-Open	Qty 2	Ply 1	summit/woodside ridge #36/MO I44969868
Builders FirstSource (Valley Center), Valley Center, KS - 67147,					Job Reference (optional)

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:50 2021 Page 1
ID: wH4RYhEsTNeUP2dXvOfi1syQY8e-JD15q988?qFIQviXnP2u9UETyhitAXnMNJPM3bzhYex



Scale = 1:10.1

Plate Offsets (X,Y)-- [2:0-2-0,0-4-11]							
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00 7	>999	240
TCDL 20.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00 7	>999	180
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00 2	n/a	n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MP				
				PLATES	GRIP		
				MT20	197/144		
				Weight: 7 lb	FT = 20%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEDGE
Left: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-3-4 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 3=Mechanical, 2=0-4-0, 4=Mechanical
Max Horz 2=49(LC 8)
Max Uplift 3=-27(LC 12), 2=-50(LC 8), 4=-3(LC 12)
Max Grav 3=72(LC 1), 2=216(LC 1), 4=41(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 27 lb uplift at joint 3, 50 lb uplift at joint 2 and 3 lb uplift at joint 4.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J06	Truss Type Jack-Open	Qty 2	Ply 1	summit/woodside ridge #36/MO I44969869
----------------	--------------	-------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:51 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-nPaT1V9mm8N923GkL6Z7ihncw523v_1VbZ9vb1zhYew



Scale = 1:9.9

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.22	Vert(LL)	0.00	5	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	4-5	>999	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-MR						Weight: 7 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-3-8 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-5-11, 3=Mechanical, 4=Mechanical
Max Horz 5=44(LC 8)
Max Uplift 5=-104(LC 8), 3=-24(LC 12)
Max Grav 5=315(LC 1), 3=52(LC 1), 4=32(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-279/228

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 104 lb uplift at joint 5 and 24 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969870
2643945	J07	Half Hip Girder	2	1	Job Reference (optional)	

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:51 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-nPaT1V9mm8N923GkL6Z7ihneY516v_xVbz9vb1zhYew



-0-10-8	2-11-7	4-0-0
0-10-8	2-11-7	1-0-9

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:52 2021 Page 1
ID:wH4RYhEsTNeUP2dXvOf1svOY8e-Gc8rFrAOXRv0fDrwwa4MEvKoCVJleRtfacuT7UzhYe

Scale = 1:13.9




Plate Offsets (X,Y)--		[2:0-3-13,0-0-1]		2117		189					
LOADING	(psf)	SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.18	Vert(LL)	0.03 7-10	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.35	Vert(CT)	-0.05 7-10	>994	180		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.04 5	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 15 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied, except
BOT CHORD	2x4 SPF No.2		2-0-0 oc purlins: 4-5.
WEBS	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied.
SILDER	Left 2x4 SPF No 2 -t 2-6-0		

REACTIONS. (size) 5=Mechanical, 2=0-4-0, 6=Mechanical
 Max Horiz 2=72(LC 12)
 Max Uplift 5=-14(LC 8), 2=-44(LC 12), 6=-34(LC 12)
 Max Grav 5=44(LC 1), 2=304(LC 1), 6=164(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-4=-299/199

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDF=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 2-11-7, Exterior(2E) 2-11-7 to 3-11-4 zone; cantilever left and right exposed ; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Refer to girder(s) for truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 14 lb uplift at joint 5, 44 lb uplift at joint 2 and 34 lb uplift at joint 6.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

WARNING – Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO	144969872
2643945	J09	Jack-Open	5	1	Job Reference (optional)	

Builders FirstSource (Valley Center),


Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:53 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-koiDSBB0ldtHNQ6Sxbn6sy3ui2NuXo3Ge0fwzhYeu

-0-10-8 4-0-0
0-10-8 4-0-0

Scale = 1:16.5



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.24	Vert(LL)	-0.01	4-5	>999	240	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.15	Vert(CT)	-0.02	4-5	>999	180		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 11 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 5=0-4-0, 3=Mechanical, 4=Mechanical
Max Horz 5=88(LC 12)
Max Uplift 5=-35(LC 12), 3=-68(LC 12)
Max Grav 5=313(LC 1), 3=150(LC 1), 4=74(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-284/160

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 3-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 35 lb uplift at joint 5 and 68 lb uplift at joint 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J10	Truss Type JACK-OPEN	Qty 4	Ply 1	summit/woodside ridge #36/MO I44969873
----------------	--------------	-------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:54 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-C_GcfXBe33lkvX?I0F6qJKP52l2m6LHyHwNZCMzhYet



Scale = 1:13.3

Plate Offsets (X,Y)--		[2:0-2-0,0-4-11], [3:0-3-0,0-1-14]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.35	Vert(LL)	0.04 8 >999 240	MT20	197/144		
TCDL	20.0	Lumber DOL 1.15		BC	0.18	Vert(CT)	-0.06 8 >797 180				
BCLL	0.0	Rep Stress Incr YES		WB	0.03	Horz(CT)	0.04 6 n/a n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS				Weight: 13 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
WEDGE
Left: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied.
BOT CHORD Rigid ceiling directly applied.

REACTIONS.

(size) 5=Mechanical, 2=0-4-0, 6=Mechanical
Max Horz 2=74(LC 8)
Max Uplift 5=-7(LC 1), 2=-58(LC 8), 6=-61(LC 12)
Max Grav 5=8(LC 12), 2=305(LC 1), 6=215(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-1, Interior(1) 2-1-1 to 3-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 7 lb uplift at joint 5, 58 lb uplift at joint 2 and 61 lb uplift at joint 6.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss J11	Truss Type JACK-OPEN	Qty 5	Ply 1	summit/woodside ridge #36/MO I44969874
----------------	--------------	-------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:54 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-C_GcfXBe33lkvX?I0F6qJKP7_I1Y6LnyHwNZCMzhY



Scale = 1:13.3




Plate Offsets (X,Y)--		[2:0-2-0,0-4-11]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)		l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC 0.23		Vert(LL) 0.02 4-7		>999 240		MT20 197/144	
TCDL	20.0	Lumber DOL 1.15		BC 0.20		Vert(CT) -0.03 4-7		>999 180			
BCLL	0.0	Rep Stress Incr YES		WB 0.00		Horz(CT) 0.01 2		n/a n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-AS						Weight: 12 lb FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2

BOT CHORD 2x4 SPF No.2

WEDGE

Left: 2x4 SPF No.2

BRACING-

TOP CHORD

Structural wood sheathing directly applied.

BOT CHORD

Rigid ceiling directly applied.

REACTIONS.

(size) 3=Mechanical, 2=0-4-0, 4=Mechanical

Max Horz 2=74(LC 8)

Max Uplift 3=-53(LC 12), 2=-59(LC 8), 4=-1(LC 12)

Max Grav 3=147(LC 1), 2=304(LC 1), 4=77(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) -0-10-8 to 2-1-8, Interior(1) 2-1-8 to 3-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 53 lb uplift at joint 3, 59 lb uplift at joint 2 and 1 lb uplift at joint 4.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J12	Truss Type HALF HIP GIRDER	Qty 2	Ply 1	summit/woodside ridge #36/MO I44969875
----------------	--------------	-------------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:55 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-gAq_ttcGpMtbWgaVaye3sXyItiJcrod5Wa77kpzhYes



Scale = 1:11.4




Plate Offsets (X,Y)--		[2:0-2-0,0-4-11]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL	1.15	TC 0.22		Vert(LL)	-0.02 6-9	>999	240	MT20	197/144
TCDL 20.0		Lumber DOL	1.15	BC 0.40		Vert(CT)	-0.05 6-9	>871	180		
BCLL 0.0		Rep Stress Incr	NO	WB 0.03		Horz(CT)	0.03 4	n/a	n/a		
BCDL 10.0		Code IRC2018/TPI2014		Matrix-MP						Weight: 13 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
WEDGE
Left: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-0 oc purlins, except 2-0-0 oc purlins: 3-4.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 4=Mechanical, 2=0-4-0, 5=Mechanical
Max Horz 2=55(LC 4)
Max Uplift 4=-25(LC 5), 2=-68(LC 4), 5=-32(LC 8)
Max Grav 4=69(LC 22), 2=309(LC 1), 5=189(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 25 lb uplift at joint 4, 68 lb uplift at joint 2 and 32 lb uplift at joint 5.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 101 lb down and 52 lb up at 3-5-4 on top chord, and 29 lb down at 3-5-4 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-90, 3-4=-90, 5-7=-20
Concentrated Loads (lb)
Vert: 10=-28(B) 11=-14(B)



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss J13	Truss Type JACK-OPEN	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969876
----------------	--------------	-------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:56 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-8NOM4CDvag?S8q9h8g9lPIUTG6iZaFGEIEsgGFzhYer



Scale = 1:13.3

Plate Offsets (X,Y)--		[1:0-2-0,0-4-11]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.24
TCDL 20.0	Lumber DOL	1.15	BC 0.23
BCLL 0.0	Rep Stress Incr	YES	WB 0.00
BCDL 10.0	Code IRC2018/TPI2014		Matrix-AS
			DEFL. in (loc) l/defl L/d
			Vert(LL) 0.02 3-6 >999 240
			Vert(CT) -0.03 3-6 >999 180
			Horz(CT) 0.01 1 n/a n/a
			PLATES GRIP
			MT20 197/144
			Weight: 10 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2

BOT CHORD 2x4 SPF No.2

WEDGE

Left: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied.

BOT CHORD Rigid ceiling directly applied.

REACTIONS. (size) 1=0-4-0, 2=Mechanical, 3=Mechanical

Max Horz 1=60(LC 12)

Max Uplift 1=-24(LC 12), 2=-54(LC 12), 3=-2(LC 12)

Max Grav 1=217(LC 1), 2=151(LC 1), 3=79(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-0-0 to 3-0-0, Interior(1) 3-0-0 to 3-11-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 24 lb uplift at joint 1, 54 lb uplift at joint 2 and 2 lb uplift at joint 3.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) This truss design requires that a minimum of 7/16" structural wood sheathing be applied directly to the top chord and 1/2" gypsum sheetrock be applied directly to the bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017




Plate Offsets (X,Y)-- [5:0-3:0,0-2:0]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d					PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	-0.01	4-5	>999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.14	Vert(CT)	-0.02	4-5	>999	180		
BCLL	0.0	Rep Stress Incr	NO	WB	0.01	Horz(CT)	-0.00	3	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MP							Weight: 15 lb	FT = 20%

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 3-8-11 oc purlins, except end verticals.
BOT CHORD	2x4 SPF No.2		
WEBS	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-5-11, 3=Mechanical, 4=Mechanical
 Max Horz 5=61(LC 4)
 Max Uplift 5=-108(LC 4), 3=-48(LC 8)
 Max Grav 5=371(LC 1), 3=125(LC 1), 4=72(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-335/121

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCdL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 108 lb uplift at joint 5 and 48 lb uplift at joint 3.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 6) "NAILED" indicates 3-10d (0.148"x3") or 2-12d (0.148"x3.25") toe-nails per NDS guidelines.
- 7) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-90, 2-3=-90, 4-5=-20



February 25, 2021

 WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personnel injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Code**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss J14A	Truss Type Jack-Open Girder	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969878
----------------	---------------	--------------------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:58 2021 Page 1

ID:wH4RYhEstNeUP2dXvOf1syQY8e-4IV6VuE96HFAN8J4F5BmUAapevPO29OXCYNL7zhYep

Job Reference (optional)




Plate Offsets (X,Y)-- [5:0-3-0,0-2-0]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.25	Vert(LL)	-0.01 4-5 >999	240	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.14	Vert(CT)	-0.02 4-5 >999	180		
BCLL	0.0	Rep Stress Incr	NO	WB	0.02	Horz(CT)	-0.00 3 n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-MP					Weight: 15 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-5-11, 3=Mechanical, 4=Mechanical
Max Horz 5=61(LC 8)
Max Uplift 5=-106(LC 8), 3=-48(LC 12)
Max Grav 5=371(LC 1), 3=125(LC 1), 4=72(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-335/251

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) -1-5-8 to 2-9-7, Exterior(2R) 2-9-7 to 3-7-15 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) Refer to girder(s) for truss to truss connections.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 106 lb uplift at joint 5 and 48 lb uplift at joint 3.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG01	GABLE	1	1	I44969879
Job Reference (optional)					

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:48:59 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-Zy3VjEFntbN1?luGpoi?0N60hJnsnYOhRC5KtazhYeo



4x4 =

Scale = 1:66.5



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.10	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.06	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.30	Horz(CT)	0.01	9	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 93 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 5-13

REACTIONS.

All bearings 15-7-5.
(lb) - Max Horz 1=-308(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) except 1=-187(LC 10), 9=-150(LC 11), 14=-208(LC 12), 15=-211(LC 12), 16=-201(LC 12), 12=-206(LC 13), 11=-212(LC 13), 10=-200(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 13 except 1=387(LC 12), 9=364(LC 13), 14=289(LC 19), 15=275(LC 19), 16=270(LC 19), 12=287(LC 20), 11=276(LC 20), 10=270(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-486/330, 2-3=-301/230, 7-8=-273/184, 8-9=-458/330
BOT CHORD 1-16=-202/296, 15-16=-202/296, 14-15=-202/296, 13-14=-202/296, 12-13=-202/296, 11-12=-202/296, 10-11=-202/296, 9-10=-202/296
WEBS 4-14=-280/224, 3-15=-289/229, 2-16=-265/208, 6-12=-280/222, 7-11=-289/230, 8-10=-265/208

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-3-6 to 3-3-6, Interior(1) 3-3-6 to 7-9-11, Exterior(2R) 7-9-11 to 10-9-11, Interior(1) 10-9-11 to 15-3-15 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) All plates are 2x4 MT20 unless otherwise indicated.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 187 lb uplift at joint 1, 150 lb uplift at joint 9, 208 lb uplift at joint 14, 211 lb uplift at joint 15, 201 lb uplift at joint 16, 206 lb uplift at joint 12, 212 lb uplift at joint 11 and 200 lb uplift at joint 10.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021


WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss LG02	Truss Type GABLE	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969880
Builders FirstSource (Valley Center), Valley Center, KS - 67147, 8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:00 2021 Page 1					
Job Reference (optional) ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-18dtwaGPevVudSSSNVDEZbfBej7WW3hqsquP0zhYen					



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	n/a	-	n/a	999	MT20
TCDL 20.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	n/a	-	n/a	999	197/144
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	5	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						
									Weight: 30 lb FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 8-11-11.
(lb) - Max Horz 1=-89(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 1 except 8=-126(LC 12), 6=-125(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 1, 5, 7 except 8=292(LC 19), 6=292(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-4-13 to 3-4-13, Interior(1) 3-4-13 to 4-5-14, Exterior(2R) 4-5-14 to 7-5-14, Interior(1) 7-5-14 to 8-6-14 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 8=126, 6=125.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG03	GABLE	1	1	144969881
Job Reference (optional)					

Builders FirstSource (Valley Center),


Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:00 2021 Page 1

ID:3seZTgShN_qvheIqPBpz4myNXMX-18dtwaGPevVudSSSNVDEZbfARj7fW0lqgsquP0zhYen

1-2-7 3-2-7 5-2-7 7-2-7 8-8-15
1-2-7 2-0-0 2-0-0 2-0-0 1-6-8

Scale = 1:69.4



1-2-7 3-2-7 5-2-7 7-2-7 8-8-15
1-2-7 2-0-0 2-0-0 2-0-0 1-6-8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.17	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.25	Horz(CT)	0.00		n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 65 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 6-7, 5-8

REACTIONS.

All bearings 8-8-15.
(lb) - Max Horz 1=483(LC 12)
Max Uplift All uplift 100 lb or less at joint(s) 7 except 1=-278(LC 10), 11=-174(LC 12), 10=-211(LC 12), 9=-211(LC 12), 8=-188(LC 12)
Max Grav All reactions 250 lb or less at joint(s) 7, 11 except 1=669(LC 12), 10=282(LC 19), 9=281(LC 19), 8=254(LC 19)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-870/753, 2-3=-682/612, 3-4=-454/427
WEBS 2-11=-253/220, 3-10=-306/266, 4-9=-306/228, 5-8=-274/204

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-3-6 to 4-6-4, Exterior(2R) 4-6-4 to 8-7-3 zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are 2x4 MT20 unless otherwise indicated.
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7 except (jt=lb) 1=278, 11=174, 10=211, 9=211, 8=188.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss LG04	Truss Type GABLE	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969882
----------------	---------------	---------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:01 2021 Page 1

ID:3seZTgShN_qvheiqPBpz4myNXMX-VKBF7wH1PCdkEb1fwDkT6oCMV7ScFWI_uWaRxSzhYem



3x4 =

Scale = 1:32.3




Plate Offsets (X,Y)-- [5:0-2-0,Edge]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.08	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.04	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.05	Horz(CT)	0.00	8	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S							Weight: 47 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 12-6-6.
(lb) - Max Horz 1=-128(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 1, 13, 11, 10 except 12=-114(LC 12), 9=-135(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 1, 8, 13, 12, 11, 10 except 9=305(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-4-13 to 3-4-13, Interior(1) 3-4-13 to 6-3-3, Exterior(2R) 6-3-3 to 9-3-3, Interior(1) 9-3-3 to 12-1-9 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 13, 11, 10 except (jt=lb) 12=114, 9=135.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG05	GABLE	1	1	I44969883
Job Reference (optional)					

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:03 2021 Page 1

ID:3seZTgShN_qvheiqPBpz4myNXMX-RjJ?YcllxqtSuvB12enxBDHh8w8GjPVGmq3Y0LzhYek



Scale = 1:26.5




Plate Offsets (X,Y)--		[4:0-2-0,Edge]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.07	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL	20.0	Lumber DOL	1.15	BC	0.03	Vert(CT)	n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr	YES	WB	0.03	Horz(CT)	0.00	7	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S							Weight: 33 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 9-8-12.

(lb) - Max Horz 1=98(LC 9)

Max Uplift All uplift 100 lb or less at joint(s) 1, 11, 10, 9 except 8=121(LC 13)

Max Grav All reactions 250 lb or less at joint(s) 1, 7, 11, 10, 9 except 8=265(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-4-13 to 3-5-4, Interior(1) 3-5-4 to 4-10-8, Exterior(2R) 4-10-8 to 7-10-8, Interior(1) 7-10-8 to 9-4-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 11, 10, 9 except (jt=lb) 8=121.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss LG06	Truss Type GABLE	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969884
Builders FirstSource (Valley Center), Valley Center, KS - 67147,					Job Reference (optional)

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:04 2021 Page 1

ID:wH4RYhESTNeUP2dXvOfi1syQY8e-vvtNmyJwi70J63mDcLIAjRprNKUZSpJQbUo5YnzhYej



Scale = 1:73.3

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.17	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.25	Horz(CT)	-0.00	7	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 68 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 6-7, 5-8

REACTIONS.

All bearings 9-3-3.

(lb) - Max Horz 1=503(LC 12)

Max Uplift All uplift 100 lb or less at joint(s) 7 except 1=287(LC 10), 8=207(LC 12), 9=207(LC 12), 10=212(LC 12), 11=176(LC 12)

Max Grav All reactions 250 lb or less at joint(s) 7, 11 except 1=691(LC 12), 8=287(LC 19), 9=273(LC 19), 10=283(LC 19)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-900/782, 2-3=-719/647, 3-4=-484/462, 4-5=-286/286

WEBS 5-8=-310/227, 4-9=-295/223, 3-10=-307/264

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) 0-3-6 to 4-6-4, Exterior(2R) 4-6-4 to 9-1-7 zone; cantilever left and right exposed; end vertical left exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are 2x4 MT20 unless otherwise indicated.
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7 except (jt=lb) 1=287, 8=207, 9=207, 10=212, 11=176.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG07	GABLE	1	1	I44969885

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:05 2021 Page 1

ID:WH4RYhEsTNUP2dXvOf1sYQY8e-N6RmzHKYTR8AJDLQ93pPGem1PkqZBlmZp8Yf5EzhYei



Scale = 1:34.3

Plate Offsets (X,Y)--		[1:0-0-12,0-1-8], [7:0-1-2,Edge]											
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES		GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.09	Vert(LL)		n/a	-	n/a	999	MT20	197/144
TCDL	20.0	Lumber DOL 1.15		BC	0.04	Vert(CT)		n/a	-	n/a	999		
BCLL	0.0	Rep Stress Incr YES		WB	0.11	Horz(CT)		0.01	10	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S								Weight: 76 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except 2-0-0 oc purlins (6-0-0 max.): 1-7.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 15-6-2.

(lb) - Max Horz 1=240(LC 13)

Max Uplift All uplift 100 lb or less at joint(s) 1, 10, 13, 14, 15, 17, 18 except 16=192(LC 13), 11=243(LC 13)

Max Grav All reactions 250 lb or less at joint(s) 1, 10, 16, 12, 13, 14, 15, 17, 18 except 11=301(LC 20)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 9-11=309/252

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-3-6 to 3-6-2, Interior(1) 3-6-2 to 11-2-0, Exterior(2R) 11-2-0 to 14-2-0, Interior(1) 14-2-0 to 15-2-12 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) All plates are 2x4 MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 10, 13, 14, 15, 17, 18 except (jt=lb) 16=192, 11=243.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 1, 17, 18.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG08	GABLE	1	1	I44969886
Job Reference (optional)					

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:05 2021 Page 1

ID:3seZTgShN_qvhelqPBpz4myNXMX-N6RmzHKYTR8AjDLQ93pPGeM0skpyBI?Zp8Yf5EzhYei



Scale = 1:26.6

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.19	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.08	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.10	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 18 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-3-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=3-3-5, 4=3-3-5
Max Horz 1=160(LC 9)
Max Uplift 1=-42(LC 8), 4=-117(LC 9)
Max Grav 1=212(LC 20), 4=217(LC 19)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-236/254, 2-3=-304/291, 3-4=-296/304
WEBS 2-4=-445/382

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Corner(3) zone; cantilever left and right exposed ; end vertical left and right exposed;C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1 except (jt=lb) 4=117.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	LG09	GABLE	1	1	I44969887
Job Reference (optional)					

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:06 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-rl_8BdLAEIG1LNwcjmKeosvCG8Avwl8j2oHCdgzhYeh



4x4 =

Scale = 1:41.6



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.08	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.10	Horz(CT)	0.00	7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						Weight: 50 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 10-2-14.
(lb) - Max Horz 1=-198(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) except 1=-139(LC 10), 7=-115(LC 11), 11=-222(LC 12), 12=-172(LC 12), 9=-221(LC 13), 8=-172(LC 13)
Max Grav All reactions 250 lb or less at joint(s) 7, 10, 12, 8 except 1=261(LC 12), 11=300(LC 19), 9=299(LC 20)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-320/225, 6-7=-303/225
WEBS 3-11=-312/240, 5-9=-312/239

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-3-6 to 3-1-7, Interior(1) 3-1-7 to 5-1-7, Exterior(2R) 5-1-7 to 8-1-7, Interior(1) 8-1-7 to 9-11-8 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 139 lb uplift at joint 1, 115 lb uplift at joint 7, 222 lb uplift at joint 11, 172 lb uplift at joint 12, 221 lb uplift at joint 9 and 172 lb uplift at joint 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss V01	Truss Type Valley	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969888
----------------	--------------	----------------------	----------	----------	---


Builders FirstSource (Valley Center),

Valley Center, KS - 67147,


8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:07 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-KUYWOzLo?2OuzWVoHTtL3RLQYUEfDQsHS1m96zhYeg

Job Reference (optional)



Scale = 1:15.0



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.25	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.09	Vert(CT)	n/a	-	n/a		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						
								Weight: 18 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=8-1-9, 3=8-1-9, 4=8-1-9
Max Horz 1=22(LC 16)
Max Uplift 1=-38(LC 12), 3=-41(LC 13), 4=-27(LC 8)
Max Grav 1=179(LC 1), 3=179(LC 1), 4=364(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-282/167

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 38 lb uplift at joint 1, 41 lb uplift at joint 3 and 27 lb uplift at joint 4.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss V03	Truss Type VALLEY	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969889
----------------	--------------	----------------------	----------	----------	---


Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:07 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOfi1syQY8e-KUYWOzLo?2OuzWVoHTtL3RMhYUYfD_sHS1m96zhYeg

Job Reference (optional)



Scale = 1:9.7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.17	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	2	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 9 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-8-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 3=3-8-0, 2=3-8-0
Max Horz 3=-47(LC 10)
Max Uplift 3=-32(LC 13), 2=-24(LC 13)
Max Grav 3=151(LC 1), 2=151(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 32 lb uplift at joint 3 and 24 lb uplift at joint 2.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job 2643945	Truss V04	Truss Type GABLE	Qty 1	Ply 1	summit/woodside ridge #36/MO 144969890
----------------	--------------	---------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:08 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-oh6ucJMQIMWlq4?qBN6uH_Vgqxq4OgS0V6mJhYzhYef

6-4-11

6-4-11

Scale = 1:15.4




Plate Offsets (X,Y)--		[4:0-0-2,0-2-0]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.28
TCDL 20.0	Lumber DOL	1.15	BC 0.12
BCLL 0.0	Rep Stress Incr	YES	WB 0.05
BCDL 10.0	Code	IRC2018/TPI2014	Matrix-P
DEFL.	in (loc)	l/defl	L/d
Vert(LL)	n/a	-	n/a
Vert(CT)	n/a	-	n/a
Horz(CT)	0.00	3	n/a
PLATES	GRIP		
MT20	197/144		
Weight: 16 lb		FT = 20%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=6-4-11, 3=6-4-11, 4=6-4-11
Max Horz 5=-91(LC 8)
Max Uplift 5=-38(LC 13), 3=-78(LC 1), 4=-117(LC 13)
Max Grav 5=183(LC 1), 3=44(LC 13), 4=489(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-400/278

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 4-3-8, Interior(1) 4-3-8 to 5-6-10 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 38 lb uplift at joint 5, 78 lb uplift at joint 3 and 117 lb uplift at joint 4.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss V05	Truss Type VALLEY	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969891
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Valley Center), Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:09 2021 Page 1

ID:wH4RYhEstNeUP2dXvOfi1syQY8e-GtgGpfN2WgeCqBouuLQUXgyl9077b9kmWsE?zhYee
9-0-11
9-0-11

Scale = 1:20.5



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.31	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.06	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						Weight: 25 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=9-0-0, 3=9-0-0, 4=9-0-0
Max Horz 5=-136(LC 8)
Max Uplift 5=-27(LC 8), 3=-13(LC 13), 4=-115(LC 9)
Max Grav 5=161(LC 1), 3=185(LC 1), 4=542(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-434/231

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 4-4-11, Interior(1) 4-4-11 to 8-2-10 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 27 lb uplift at joint 5, 13 lb uplift at joint 3 and 115 lb uplift at joint 4.
- 5) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss V06	Truss Type VALLEY	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969892
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:09 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-GtgGpfN2WgecCqeBOuuLQUXjML9F77U9kmWsE?zhYee



3x4 =

Scale = 1:11.1




Plate Offsets (X,Y)--	[2:0-2:0,Edge]	5-3-6	5-3-6	5-3-14	0-0-8
-----------------------	----------------	-------	-------	--------	-------

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.09	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.18	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 11 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-3-14 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=5-2-14, 3=5-2-14
Max Horz 1=18(LC 16)
Max Uplift 1=30(LC 12), 3=30(LC 13)
Max Grav 1=223(LC 1), 3=223(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 30 lb uplift at joint 1 and 30 lb uplift at joint 3.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job 2643945	Truss V07	Truss Type Valley	Qty 1	Ply 1	summit/woodside ridge #36/MO I44969893
----------------	--------------	----------------------	----------	----------	---

Builders FirstSource (Valley Center),


Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:10 2021 Page 1

ID:WH4RYhEsTNeUP2dXvOf1syQY8e-k3Ef0?OhHzmTq_DNycPazi3r_IWhsa8lzQFQmRzhYed



Scale = 1:15.3



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.29	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.11	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P						Weight: 19 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=7-4-0, 3=7-4-0, 4=7-4-0
Max Horz 1=31(LC 16)
Max Uplift 1=-41(LC 12), 3=-47(LC 13), 4=-22(LC 12)
Max Grav 1=200(LC 1), 3=200(LC 1), 4=375(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-4=-286/165

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCCL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 3-8-0, Exterior(2R) 3-8-0 to 6-8-0, Interior(1) 6-8-0 to 7-2-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 41 lb uplift at joint 1, 47 lb uplift at joint 3 and 22 lb uplift at joint 4.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	summit/woodside ridge #36/MO
2643945	V08	Valley	1	1	I44969894
Job Reference (optional)					

Builders FirstSource (Valley Center),

Valley Center, KS - 67147,

8.430 s Feb 12 2021 MiTek Industries, Inc. Thu Feb 25 15:49:11 2021 Page 1

ID:wH4RYhEsTNeUP2dXvOfi1syQY8e-CFo1ELOJ2HuKR8oaWJwpVvc1E9s0b1NSC4?zltzhYec



Scale = 1:19.4

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	n/a	-	n/a	999	MT20	197/144
TCDL 20.0	Lumber DOL	1.15	BC 0.10	Vert(CT)	n/a	-	n/a	999		
BCLL 0.0	Rep Stress Incr	YES	WB 0.04	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 22 lb	FT = 20%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=7-4-0, 4=7-4-0, 5=7-4-0
Max Horz 6=52(LC 9)
Max Uplift 6=52(LC 12), 4=53(LC 13)
Max Grav 6=224(LC 1), 4=224(LC 1), 5=327(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=4.2psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone and C-C Exterior(2E) 0-1-12 to 3-1-12, Interior(1) 3-1-12 to 3-8-0, Exterior(2R) 3-8-0 to 6-8-0, Interior(1) 6-8-0 to 7-2-4 zone; cantilever left and right exposed; end vertical left and right exposed; C-C for members and forces & MWFRS for reactions shown; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 52 lb uplift at joint 6 and 53 lb uplift at joint 4.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



February 25, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Symbols

PLATE LOCATION AND ORIENTATION

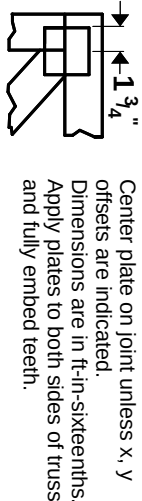


For 4 x 2 orientation, locate plates 0- $\frac{3}{16}$ " from outside edge of truss.

This symbol indicates the required direction of slots in connector plates.


PLATE SIZE

The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION




BEARING

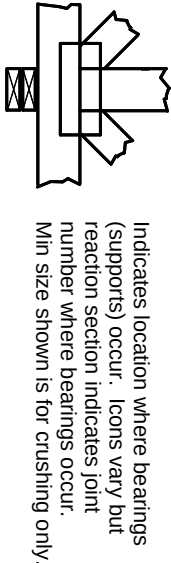

Industry Standards:
ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System



JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:
ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MITek® All Rights Reserved



Mitek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.