DO NOT CUT. DRILL. NOTCH. OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para asistencia ANTES de

Diagram has been prepared by a Truss Technician and is not an engineered drawing. 2. The responsibilities of the Owner, Building

3. The wood components shown on this diagram are to be used in dry service (moisture galvanized to the G60 Standard unless noted

4. Refer to the Truss Design Drawings for

design. 5. The Truss Technician shall provide Truss-to-

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written

7. In some cases, field framing may be required to achieve the final appearance shown on the

8. Field framing, including valley rafters, installed over roof trusses shall have a knee

9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not Drawing. Field framed bottom chord floor or

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol -(TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION, NO MUERTE.)

1. Trusses shall be installed in a safe manner meeting all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death.

2. Buildings under construction are vulnerable to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury or

Guidelines

BCSI-B7 = Floor Truss Installation

BCSI-B10 = Post Frame Truss Installation

4. Follow TPI Requirements for Long Span Trusses (>60').

realizar cualquier modification.)

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This

Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

content<19%) and non-toxic environmental applications. The metal plates and hangers are

Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Stagger knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location or

exceed the maximum shown on the Truss Design celling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

 This Placement Diagram is based upon the supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the

Owner, Building Designer, and Contractor.

11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection
Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SBCA TTB

Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues.

WARNING: HACERLO PODRIA RESULTAR EN LESIONES O


Geaul.

3. BCSI INSTRUCTIONS SHALL BE FOLLOWED:
BCSI-B1 = Safe Truss Handling and Installation
BCSI-B2 = Installation and Temporary Restraint

BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading BCSI-B5 = Truss Damage and Modification

BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders

BCSI-B11 = Fall Protection

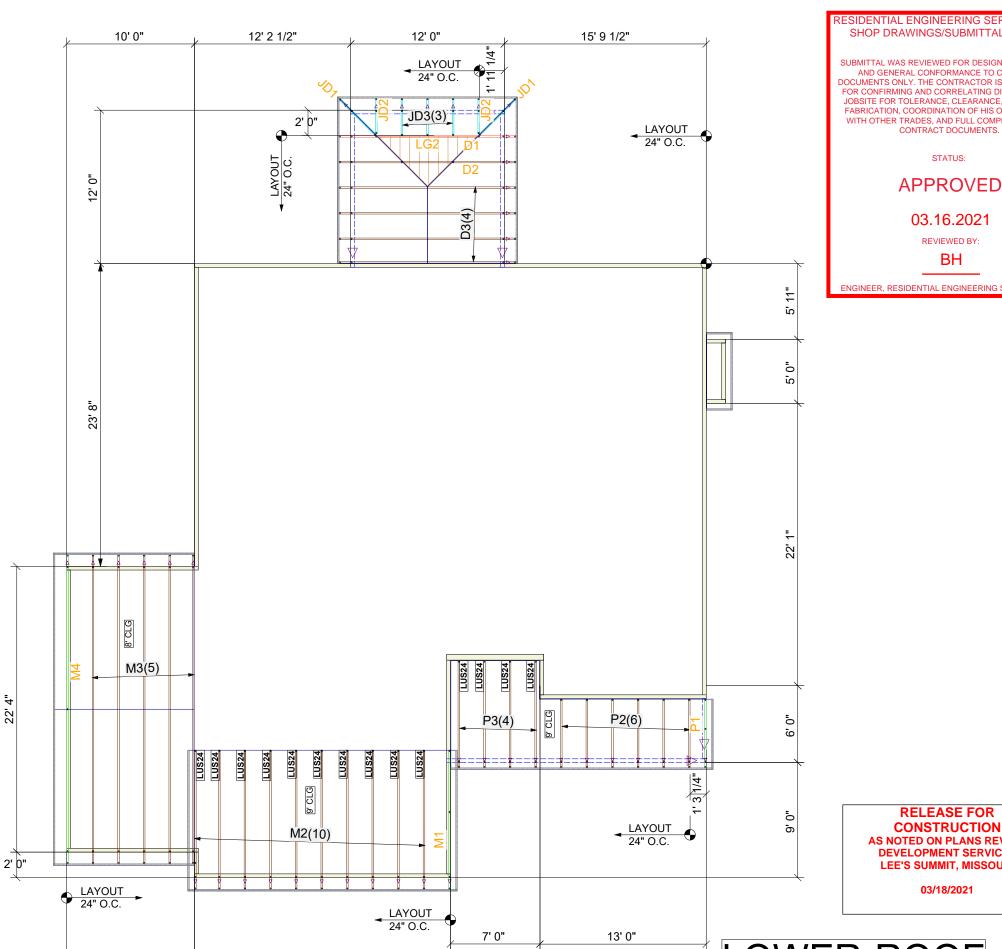

10'0"

20' 0"

## RESIDENTIAL ENGINEERING SERVICES, LLC. SHOP DRAWINGS/SUBMITTAL REVIEW

**DESIGN LOADS:** 

25 PSF TCLL

10 PSF TCDL 10 PSF BCDL

BILITY OF THE INSTALLATION
T BRACING FOR HOLDING
SALLERS ARE DESIGNED AND
ALLERS ARE TO BE APPLIED
IS COMPLETED. AT NO TIME
LOADS BE APPLIED TO THE
IECOMMENDATIONS ONLY
IT USSES ARE CAPABLE OF
ECTION

PROPER HANDLING OF TRU CREW AT THE JOBSITE. TRUSSES PLUMB AND FC INSTALLED BY OTHERS. NC TO TRUSSES UNTIL AFTER V. SHALL CONCENTRATED LO TRUSSES. ALL TRUSS TO I

WWW.BLDR.

**FirstSourc** 

Builders

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY, THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH

STATUS:

## APPROVED

03.16.2021

REVIEWED BY:

BH

ENGINEER, RESIDENTIAL ENGINEERING SERVICES, LLC

## **RELEASE FOR**

**AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES** LEE'S SUMMIT, MISSOURI

03/18/2021

LOWER ROOF

**ROOF** TRUSS LAYOUT PAGE

DESCRIPTION JOB ADDRESS

Summit H
127 NW .
Lee's Sun
Scott Clev

1 of 1

DO NOT CUT, DRILL, NOTCH, OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para asistencia ANTES de

realizar cualquier modification.)

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing.

The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1

3. The wood components shown on this diagram are to be used in dry service (moisture content<19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless noted

4. Refer to the Truss Design Drawings for specific information about each individual truss

design. 5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written

7. In some cases, field framing may be required to achieve the final appearance shown on the

8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Stagger knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location or

9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or celling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

10. This Placement Diagram is based upon the supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the

Duniang Gode are the responsibility of the Owner, Building Designer, and Contractor.

11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SBCA TTB

Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues.

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol -(TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION, NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.)

1. Trusses shall be installed in a safe manner meeting all code, local, OSHA, TPI, and BCSI
Specifications. Failure to follow these specifications may result in injury or death.

to high winds and present a possible safety hazard. The Contractor is responsible for shall take appropriate action to prevent injury or

3. BCSI INSTRUCTIONS SHALL BE FOLLOWED: BCSI-B1 = Safe Truss Handling and Installation BCSI-B2 = Installation and Temporary Restraint BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading

BCSI-B5 = Truss Damage and Modification Guidelines BCSI-B7 = Floor Truss Installation

BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders BCSI-B10 = Post Frame Truss Installation

4. Follow TPI Requirements for Long Span Trusses (>60').

FRONT TO BACK PITCH 6/12 - (4/12 PORCH/GARAGE) SOFFIT DESIGNED FOR 12" HEEL HEIGHT 7 - 1/4" - (3-15/16)

RIGHT TO LEFT PITCH 8/12 SOFFIT DESIGNED FOR 12" HEEL HEIGHT 9 - 5/16"

MAIN LEVEL WALL HEIGHT 9' 1-1/8" UPPER LEVEL WALL HEIGHT 8' 1-1/8" EXTERIOR WALL 2X4

12" BOX VAULT IN MASTER BEDROOM VAULTED CEILING IN MASTE BATH 4/12 VAULT UP 1' IN BEDROOM #2

> ALL OTHER CEILINGS ARE FLAT UNLESS NOTED OTHERWISE SEE LAYOUT FOR INFORMATION DIFFERENT FROM ABOVE STANDARDS

HNGR	QTY	CARRIED MBR		
LUS24	14	P3, M2		
HUS26	15	A2A, A2B, A2C, A2D, A2E, A2F, A5, A6, A7, A8, A9, A10, A11, A12		
H2.5A SWDC15600	50 50	TRUSS TO BEAMWALL TIE DOWN TRUSS TO WALL TIE DOWN		

RESIDENTIAL ENGINEERING SERVICES, LLC. SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


STATUS:

**APPROVED** 

03.16.2021 REVIEWED BY:

ENGINEER, RESIDENTIAL ENGINEERING SERVICES, LLC

ROOF AREA: 2702.56 HORIZONTAL OVERHANG: 184.5 **RIDGE LINES 1: 93.82** VALLEY LINES: 66.72 RAKED OVERHANG: 195.97

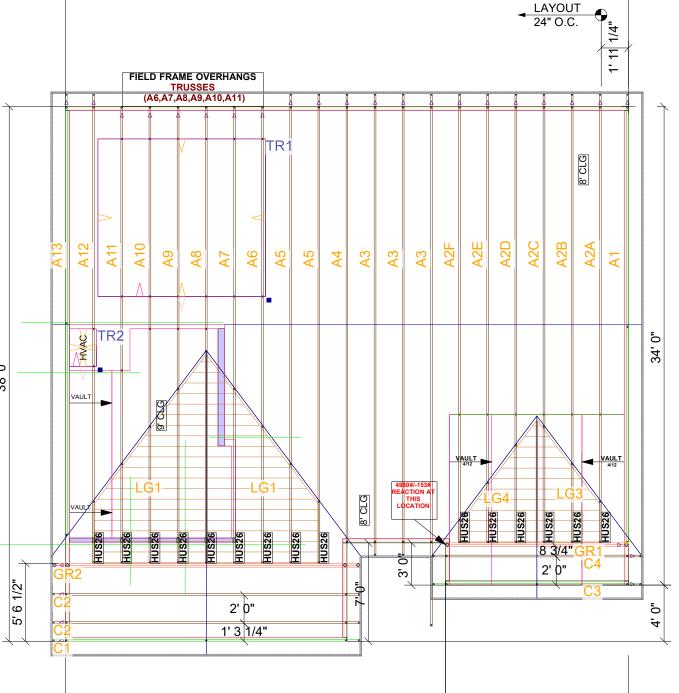

7' 0"

13'0"

20' 0"

**UPPER ROOF** 

40' 0"

25 PSF TCLL 10 PSF TCDL

**DESIGN LOADS:** 

10 PSF BCDL

BILLIY OF THE INSTALLATION
T BRACING FOR HOLDING
SHALL BE DESIGNED AND
TALLERS ARE TO BE APPLIED
IS COMPLETED AT NO TIME
LOADS BE APPLIED TO THE
ECCOMMENDATIONS ONLY
TENUSSES ARE CAPABLE OF
ECTION

WWW.BLDR. Builders FirstSourc



2684908	Summit Homes - Woodside Ridge #67	127 NW Joshua Dr.	Lee's Summit, MO	Scott Clevenger	3/15/2021		
OB No.	PTION	RESS	CITY	GNER	DATE		

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI