DO NOT CUT. DRILL. NOTCH. OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para asistencia ANTES de

realizar cualquier modification.)

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This

Diagram has been prepared by a Truss Technician and is not an engineered drawing. 2. The responsibilities of the Owner, Building Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

3. The wood components shown on this diagram are to be used in dry service (moisture content<19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless noted

4. Refer to the Truss Design Drawings for

design. 5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written

7. In some cases, field framing may be required to achieve the final appearance shown on the

8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Staggel knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location o along one truss.

9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or celling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

10. This Placement Diagram is based upon the supporting structure being structurally adequate, dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the

Owner, Building Designer, and Contractor.

11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection
Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SBCA TTB

Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues. WARNING:

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol -(TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION, NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.) 1. Trusses shall be installed in a safe manner

meeting all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death. 2. Buildings under construction are vulnerable

to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury or


3. BCSI INSTRUCTIONS SHALL BE FOLLOWED: BCSI-B1 = Safe Truss Handling and Installation BCSI-B2 = Installation and Temporary Restraint BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading

BCSI-B5 = Truss Damage and Modification Guidelines BCSI-B7 = Floor Truss Installation

BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders BCSI-B10 = Post Frame Truss Installation

BCSI-B11 = Fall Protection

4. Follow TPI Requirements for Long Span Trusses (>60').

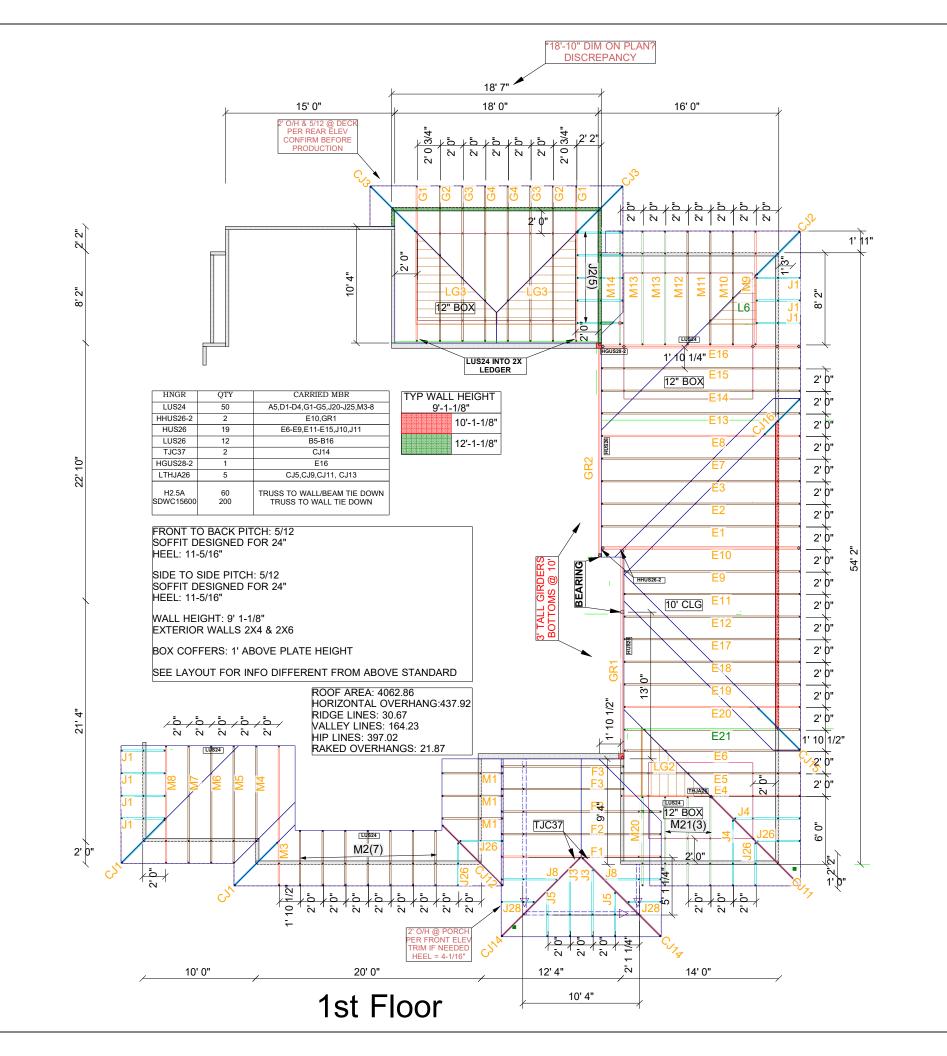

DESIGN LOADS:

25 PSF TCLL 10 PSF TCDL 10 PSF BCDL

RELEASE FOR

IGNED AND
O BE APPLIED
O AT NO TIME
LIED TO THE
TIONS ONLY
CAPABLE OF

WWW.BLDR. Builders FirstSourc



TRUSS LAYOUT/SUBMITTAL REVIEW					
REVIEWED & FOUND TO BE IN CONFORMANCE WITH REFERENCED PLAN FURNISH AS CORRECTED REVIEWED WITH CHANGES TO		Winterset Valley	Lane		
REFERENCED DRAWINGS REVISE AS NOTED & RESUBMIT		Lot 1487	NW Thoreau	Summit, MO	Clevenger
THIS REVIEW IS TO VERIFY GENERAL CONFORMANCE WITH THE DESIGN AND INFORMATION CONTAINED IN THE REFERENCED PLAN AND/OR CONSTRUCTION DOCUMENTS. REVIEW DOES NOT RELIEVE THE CONTRACTOR FROM COMPLIANCE WITH THE PLANS AND SPECIFICATIONS. CONTRACTOR IS RESPONSIBLE FOR ALL DIMENSIONS, MEANS, METHODS, TECHNIQUES, SEQUENCES, PROCEDURES, SAFETY AND COORDINATION OF HIS WORK TO BE PERFORMED.	2742340	Roeser -	3073 NW	Lee's Sur	Scott Cle
HD ENGINEERING & DESIGN 11656 W. 75TH ST., P: 913-631-2222 SHAWNEE, KS 66214 WWW.HDENGINEERS.COM	JOB No.	DESCRIPTION	ADDRESS	CITY	DESIGNER
SIGNED:		DESC	10B /		

04/14/2021

ROOF TRUSS LAYOUT

PAGE

1 of 1

DO NOT CUT. DRILL. NOTCH. OR OTHERWISE DAMAGE TRUSSES. Contact your BFS Representative for assistance PRIOR TO modifying any truss. Espanol - (NO CORTE, PERFORE, HAGA MUESCAS O DANE DE CUALQUIER OTRA MANERA LAS TRUSSES (CERCHAS DE MADERA). Contacte a su representante de BFS para asistencia ANTES de

realizar cualquier modification.)

1. This Truss Placement Diagram is intended to serve as a guide for truss installation. This Diagram has been prepared by a Truss Technician and is not an engineered drawing. 2. The responsibilities of the Owner, Building

Designer, Contractor, Truss Designer, and Truss Manufacturer shall be as defined by the TPI 1 National Standard.

3. The wood components shown on this diagram are to be used in dry service (moisture content<19%) and non-toxic environmental applications. The metal plates and hangers are galvanized to the G60 Standard unless noted

4. Refer to the Truss Design Drawings for

design. 5. The Truss Technician shall provide Truss-to-Truss Connection Requirements. Any special or other connection shall be the responsibility of the Building Designer.

6. The Truss Placement Diagram and Truss Design Drawings are the property of Builders FirstSource and may not be reused or reproduced in part or in total under any circumstances without prior written

7. In some cases, field framing may be required to achieve the final appearance shown on the

8. Field framing, including valley rafters, installed over roof trusses shall have a knee brace from the rafter to the truss top chord at intervals of 48" on center (O.C.) or less. Stagge knee braces from adjacent rafters such that the load is distributed uniformly over multiple truss locations and not concentrated at one location o along one truss.

9. Truss Top Chords shall be fully sheathed or have lateral bracing (purlins) spaced at 24" O.C. or less. Truss Bottom Chord Bracing shall not exceed the maximum shown on the Truss Design Drawing. Field framed bottom chord floor or ceiling attachments shall be spaced at 24" O.C. or less. Proper Bracing prevents buckling of individual truss members due to design loads.

10. This Placement Diagram is based upon the supporting structure being structurally adequate dimensionally correct, square, plumb, and level to adequately support the trusses. The foundation design, structural member sizing, load transfer, bearing conditions, and the structure's compliance with the applicable building code are the responsibility of the

Owner, Building Designer, and Contractor.

11. If Piggyback Trusses are included in this project, refer to the Mitek Piggyback Connection
Detail applicable for the project details and wind load category.

12. The Contractor shall follow the SBCA TTB

Partition Separation Prevention and Solutions for truss attachment to non-load bearing walls and carefully complete these details to avoid gypsum wall board related issues. WARNING:

TRUSSES MUST BE BRACED DURING INSTALLATION. FAILURE TO DO SO MAY RESULT IN INJURY OR DEATH. Espanol -(TRUSSES (CERCHAS) DEBERAN TENER UN SOPORTE DURANTE LA INSTALACION. NO HACERLO PODRIA RESULTAR EN LESIONES O MUERTE.)

1. Trusses shall be installed in a safe manner meeting all code, local, OSHA, TPI, and BCSI Specifications. Failure to follow these specifications may result in injury or death.

2. Buildings under construction are vulnerable to high winds and present a possible safety hazard. The Contractor is responsible for recognizing adverse weather conditions and shall take appropriate action to prevent injury or

3. BCSI INSTRUCTIONS SHALL BE FOLLOWED: BCSI-B1 = Safe Truss Handling and Installation BCSI-B2 = Installation and Temporary Restraint

BCSI-B3 = Permanent Restraint BCSI-B4 = Safe Construction Loading

BCSI-B5 = Truss Damage and Modification Guidelines BCSI-B7 = Floor Truss Installation

BCSI-B8 = Toe-Nailed Connections BCSI-B9 = Multi-Ply Girders BCSI-B10 = Post Frame Truss Installation

BCSI-B11 = Fall Protection 4. Follow TPI Requirements for Long Span Trusses (>60').

HNGR	QTY	CARRIED MBR
LUS24	50	A5,D1-D4,G1-G5,J20-J25,M5-8
HHUS26-2	2	E10,GR1
HUS26	19	E6-E9,E11-E15,J10,J11
LUS26	12	B5-B16
TJC37	2	CJ14
HGUS28-2	1	E16
LTHJA26	5	CJ5,CJ9,CJ11, CJ13
H2.5A SDWC15600	60 200	TRUSS TO WALL/BEAM TIE DOWN TRUSS TO WALL TIE DOWN

FRONT TO BACK PITCH: 5/12 SOFFIT DESIGNED FOR 24" HEEL: 1'-2" @ 2ND FLOOR

SIDE TO SIDE PITCH: 5/12 SOFFIT DESIGNED FOR 24" HEEL: 1'-2" @ 2ND FLOOR

WALL HEIGHT: 8' 1-1/8" **EXTERIOR WALLS 2X4 & 2X6**


BOX COFFERS: 1' ABOVE PLATE HEIGHT

SEE LAYOUT FOR INFO DIFFERENT FROM ABOVE STANDARD

ROOF AREA: 4062.86 HORIZONTAL OVERHANG:437.92 RIDGE LINES: 30.67 WALLEY LINES: 164.23 HIP LINES: 397.02 RAKED OVERHANGS: 21.87

04/14/2021

TRUSS LAYOUT/SUBMITTAL REVIEW REVIEWED & FOUND TO BE IN CONFORMANCE WITH REFERENCED PLAN FURNISH AS CORRECTED REVIEWED WITH CHANGES TO REFERENCED DRAWINGS REVISE AS NOTED & RESUBMIT **HD ENGINEERING & DESIGN**

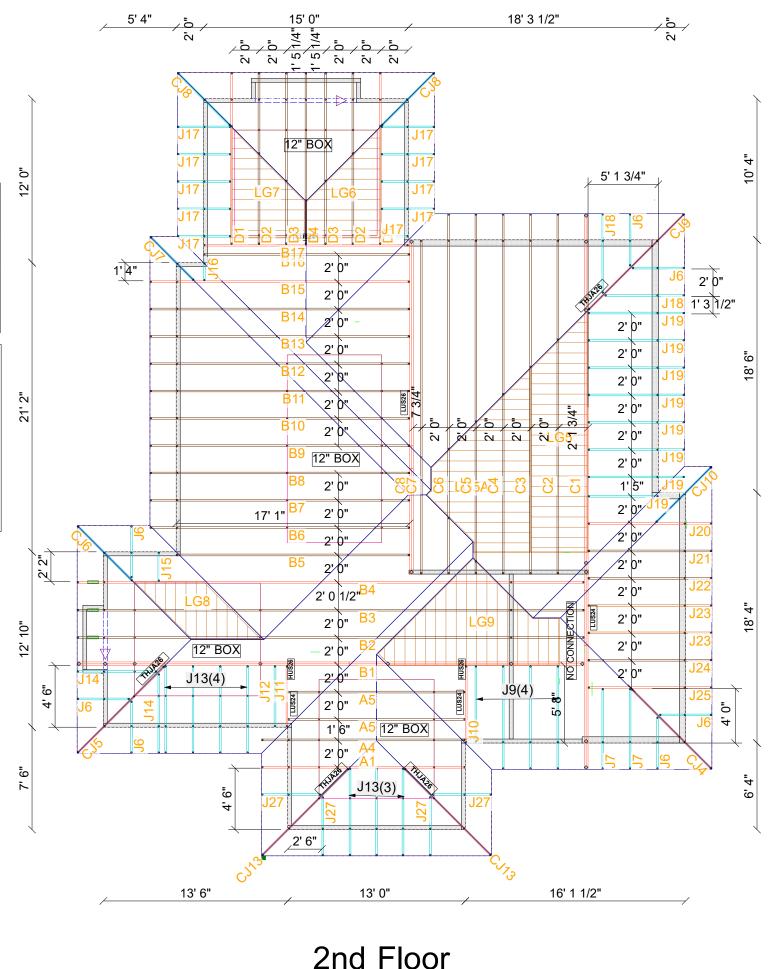

DESIGN LOADS:

25 PSF TCLL 10 PSF TCDL 10 PSF BCDL

IGNED AND

BE APPLIED

AT NO TIME
LIED TO THE
TIONS ONLY
CAPABLE OF

WWW.BLDR. Builders **FirstSourc**



	JOB No. 2742340	TION Roeser - Lot 1487 Winterset Valley	RESS 3073 NW Thoreau Lane	CITY Lee's Summit, MO	SNER Scott Clevenger	DATE 4/9/2021
JOB No. DESCRIPTION JOB ADDRESS CITY CITY DESIGNER	JOB	DESCRIPT	JOB ADDR		DESIG	

ROOF TRUSS LAYOUT

PAGE

1 of 1