



06/03/2021

RE: 210426
Lot 147 HT

MiTek USA, Inc.

16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Customer: Project Name: 210426

Lot/Block:

Model:

Address:

Subdivision:

City:

State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014

Design Program: MiTek 20/20 8.4

Wind Code: ASCE716LowRise

Wind Speed: 115 mph

Roof Load: 45.0 psf

Floor Load: N/A psf

This package includes 73 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I46126268	A1	5/14/2021	21	I46126288	D3	5/14/2021
2	I46126269	A2	5/14/2021	22	I46126289	D4	5/14/2021
3	I46126270	A3	5/14/2021	23	I46126290	E1	5/14/2021
4	I46126271	A4	5/14/2021	24	I46126291	E2	5/14/2021
5	I46126272	A5	5/14/2021	25	I46126292	E3	5/14/2021
6	I46126273	B1	5/14/2021	26	I46126293	E4	5/14/2021
7	I46126274	B2	5/14/2021	27	I46126294	G1	5/14/2021
8	I46126275	B3	5/14/2021	28	I46126295	G2	5/14/2021
9	I46126276	B4	5/14/2021	29	I46126296	G3	5/14/2021
10	I46126277	B5	5/14/2021	30	I46126297	G4	5/14/2021
11	I46126278	B6	5/14/2021	31	I46126298	G5	5/14/2021
12	I46126279	B7	5/14/2021	32	I46126299	H1	5/14/2021
13	I46126280	B8	5/14/2021	33	I46126300	H2	5/14/2021
14	I46126281	B9	5/14/2021	34	I46126301	H3	5/14/2021
15	I46126282	B10	5/14/2021	35	I46126302	H4	5/14/2021
16	I46126283	C1	5/14/2021	36	I46126303	J1	5/14/2021
17	I46126284	C2	5/14/2021	37	I46126304	J2	5/14/2021
18	I46126285	C3	5/14/2021	38	I46126305	J3	5/14/2021
19	I46126286	D1	5/14/2021	39	I46126306	J4	5/14/2021
20	I46126287	D2	5/14/2021	40	I46126307	J5	5/14/2021

The truss drawing(s) referenced above have been prepared by

MiTek USA, Inc. under my direct supervision


based on the parameters provided by Wheeler - Waverly.

Truss Design Engineer's Name: Garcia, Juan

My license renewal date for the state of Kansas is April 30, 2022.

Kansas COA: E-943

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

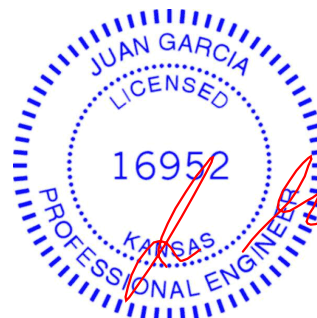

May 14, 2021



06/03/2021

RE: 210426 - Lot 147 HT

MiTek USA, Inc.

16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name: 210426

Lot/Block:

Subdivision:

Address:

City, County:

State:

No.	Seal#	Truss Name	Date
41	I46126308	J6	5/14/2021
42	I46126309	J7	5/14/2021
43	I46126310	J8	5/14/2021
44	I46126311	J9	5/14/2021
45	I46126312	J10	5/14/2021
46	I46126313	J11	5/14/2021
47	I46126314	J12	5/14/2021
48	I46126315	J13	5/14/2021
49	I46126316	J14	5/14/2021
50	I46126317	J15	5/14/2021
51	I46126318	J16	5/14/2021
52	I46126319	J17	5/14/2021
53	I46126320	J18	5/14/2021
54	I46126321	J19	5/14/2021
55	I46126322	J20	5/14/2021
56	I46126323	J21	5/14/2021
57	I46126324	LAY1	5/14/2021
58	I46126325	LAY2	5/14/2021
59	I46126326	LAY3	5/14/2021
60	I46126327	LAY4	5/14/2021
61	I46126328	LAY5	5/14/2021
62	I46126329	LAY6	5/14/2021
63	I46126330	V1	5/14/2021
64	I46126331	V2	5/14/2021
65	I46126332	V3	5/14/2021
66	I46126333	V4	5/14/2021
67	I46126334	V5	5/14/2021
68	I46126335	V6	5/14/2021
69	I46126336	V7	5/14/2021
70	I46126337	V8	5/14/2021
71	I46126338	V9	5/14/2021
72	I46126339	V10	5/14/2021
73	I46126340	V11	5/14/2021



RE: 210426
Lot 147 HT

MiTek USA, Inc.

16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Customer: Project Name: 210426
Lot/Block:
Address:
City:

Model:
Subdivision:
State:

General Truss Engineering Criteria & Design Loads (Individual Truss Design Drawings Show Special Loading Conditions):

Design Code: IRC2018/TPI2014
Wind Code: ASCE716LowRise
Roof Load: 45.0 psf

Design Program: MiTek 20/20 8.4
Wind Speed: 115 mph
Floor Load: N/A psf

This package includes 73 individual, dated Truss Design Drawings and 0 Additional Drawings.

No.	Seal#	Truss Name	Date	No.	Seal#	Truss Name	Date
1	I46126268	A1	5/14/2021	21	I46126288	D3	5/14/2021
2	I46126269	A2	5/14/2021	22	I46126289	D4	5/14/2021
3	I46126270	A3	5/14/2021	23	I46126290	E1	5/14/2021
4	I46126271	A4	5/14/2021	24	I46126291	E2	5/14/2021
5	I46126272	A5	5/14/2021	25	I46126292	E3	5/14/2021
6	I46126273	B1	5/14/2021	26	I46126293	E4	5/14/2021
7	I46126274	B2	5/14/2021	27	I46126294	G1	5/14/2021
8	I46126275	B3	5/14/2021	28	I46126295	G2	5/14/2021
9	I46126276	B4	5/14/2021	29	I46126296	G3	5/14/2021
10	I46126277	B5	5/14/2021	30	I46126297	G4	5/14/2021
11	I46126278	B6	5/14/2021	31	I46126298	G5	5/14/2021
12	I46126279	B7	5/14/2021	32	I46126299	H1	5/14/2021
13	I46126280	B8	5/14/2021	33	I46126300	H2	5/14/2021
14	I46126281	B9	5/14/2021	34	I46126301	H3	5/14/2021
15	I46126282	B10	5/14/2021	35	I46126302	H4	5/14/2021
16	I46126283	C1	5/14/2021	36	I46126303	J1	5/14/2021
17	I46126284	C2	5/14/2021	37	I46126304	J2	5/14/2021
18	I46126285	C3	5/14/2021	38	I46126305	J3	5/14/2021
19	I46126286	D1	5/14/2021	39	I46126306	J4	5/14/2021
20	I46126287	D2	5/14/2021	40	I46126307	J5	5/14/2021


The truss drawing(s) referenced above have been prepared by
MiTek USA, Inc. under my direct supervision
based on the parameters provided by Wheeler - Waverly.

Truss Design Engineer's Name: Garcia, Juan

My license renewal date for the state of Missouri is December 31, 2022.

Missouri COA: 001193

IMPORTANT NOTE: The seal on these truss component designs is a certification that the engineer named is licensed in the jurisdiction(s) identified and that the designs comply with ANSI/TPI 1. These designs are based upon parameters shown (e.g., loads, supports, dimensions, shapes and design codes), which were given to MiTek. Any project specific information included is for MiTek customers file reference purpose only, and was not taken into account in the preparation of these designs. MiTek has not independently verified the applicability of the design parameters or the designs for any particular building. Before use, the building designer should verify applicability of design parameters and properly incorporate these designs into the overall building design per ANSI/TPI 1, Chapter 2.

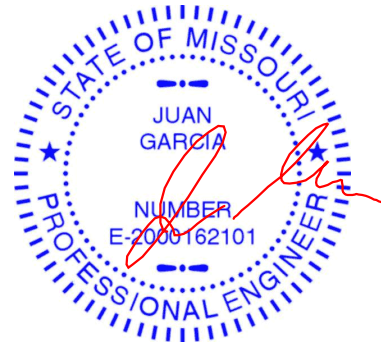

May 14, 2021



06/03/2021

RE: 210426 - Lot 147 HT

MiTek USA, Inc.

16023 Swingley Ridge Rd
Chesterfield, MO 63017
314-434-1200

Site Information:

Project Customer: Project Name: 210426

Lot/Block:

Subdivision:

Address:

City, County:

State:


No.	Seal#	Truss Name	Date
41	I46126308	J6	5/14/2021
42	I46126309	J7	5/14/2021
43	I46126310	J8	5/14/2021
44	I46126311	J9	5/14/2021
45	I46126312	J10	5/14/2021
46	I46126313	J11	5/14/2021
47	I46126314	J12	5/14/2021
48	I46126315	J13	5/14/2021
49	I46126316	J14	5/14/2021
50	I46126317	J15	5/14/2021
51	I46126318	J16	5/14/2021
52	I46126319	J17	5/14/2021
53	I46126320	J18	5/14/2021
54	I46126321	J19	5/14/2021
55	I46126322	J20	5/14/2021
56	I46126323	J21	5/14/2021
57	I46126324	LAY1	5/14/2021
58	I46126325	LAY2	5/14/2021
59	I46126326	LAY3	5/14/2021
60	I46126327	LAY4	5/14/2021
61	I46126328	LAY5	5/14/2021
62	I46126329	LAY6	5/14/2021
63	I46126330	V1	5/14/2021
64	I46126331	V2	5/14/2021
65	I46126332	V3	5/14/2021
66	I46126333	V4	5/14/2021
67	I46126334	V5	5/14/2021
68	I46126335	V6	5/14/2021
69	I46126336	V7	5/14/2021
70	I46126337	V8	5/14/2021
71	I46126338	V9	5/14/2021
72	I46126339	V10	5/14/2021
73	I46126340	V11	5/14/2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	A1	Half Hip Girder	1	1	
Job Reference (optional)					


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:20 2021 Page 1

ID: Hr0U0yIgmOrZQ4rpild7XzssyG-HFtld3OrZB?3DT?2VIRoSglo63n(C5rJ2XNG6GdVW)



Scale = 1:25.8

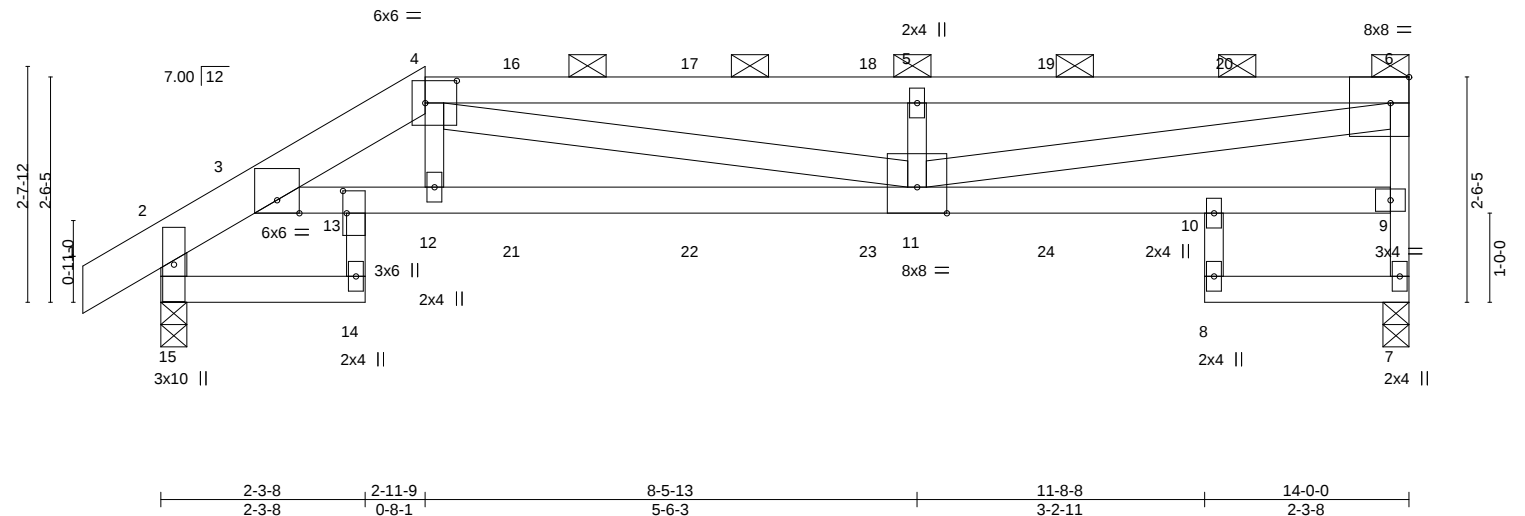

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.66	Vert(LL)	-0.16 11-12	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.97	Vert(CT)	-0.30 11-12	>551	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.81	Horz(CT)	0.16 7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.15 11-12	>999	240	Weight: 60 lb	FT = 10%

LUMBER-

TOP CHORD 2x6 SP DSS *Except*
4-6: 2x4 SPF 2100F 1.8E

BOT CHORD 2x4 SPF No.2 *Except*
13-14,8-10: 2x3 SPF No.2

WEBS 2x3 SPF No.2 *Except*
2-15,4-11,6-11: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-9-4 oc purlins, except end verticals, and 2-0-0 oc purlins (3-6-10 max.): 4-6.

BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 7=0-3-8, 15=0-3-8
Max Horz 15=98(LC 5)
Max Uplift 7=-226(LC 5), 15=-249(LC 8)
Max Grav 7=1121(LC 1), 15=1204(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-604/130, 3-4=-2741/649, 4-5=-3439/788, 5-6=-3439/788, 7-9=-1084/240, 6-9=-995/258, 2-15=-1219/273

BOT CHORD 3-13=-604/2325, 12-13=-652/2469, 11-12=-660/2519, 9-10=-74/271

WEBS 4-11=-255/1000, 5-11=-673/273, 6-11=-782/3285, 4-12=-92/598

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=226, 15=249.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 105 lb down and 72 lb up at 4-0-0, 105 lb down and 72 lb up at 6-0-0, 105 lb down and 72 lb up at 8-0-0, and 105 lb down and 72 lb up at 10-0-0, and 110 lb down and 56 lb up at 12-0-0 on top chord, and 209 lb down and 80 lb up at 2-11-9, 72 lb down and 21 lb up at 4-0-0, 72 lb down and 21 lb up at 6-0-0, 72 lb down and 21 lb up at 8-0-0, and 72 lb down and 21 lb up at 10-0-0, and 68 lb down at 11-9-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

Continued on page 2



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	A1	Half Hip Girder	1	1	
					Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:20 2021 Page 2
ID:Hr0UloylgMOrZQ4rpild7XzssyG-HFItld3OrZB?3DT?2VIRoS...
46126268

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-2=-70, 2-4=-70, 4-6=-70, 14-15=-20, 10-13=-20, 7-8=-20

Concentrated Loads (lb)

Vert: 10=-51(B) 12=-209(B) 16=-89(B) 17=-89(B) 18=-89(B) 19=-89(B) 20=-110(B) 21=-72(B) 22=-72(B) 23=-72(B) 24=-72(B)

06/03/2021

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI
210426	A2	Half Hip	1	1		46126269
Wheeler Lumber, Waverly, KS - 66871,						Job Reference (optional)

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:20 2021 Page 1
ID: Hr0UloylgMOrZQ4rpild7XzssyG-HFild3OrZB?3DT?VIRoSAs-000marJ20NG62GdVIT

-0-10-8	2-3-8	4-1-5	8-11-6	11-8-8	14-0-0
0-10-8	2-3-8	1-9-13	4-10-2	2-9-2	2-3-8

Scale = 1:25.6

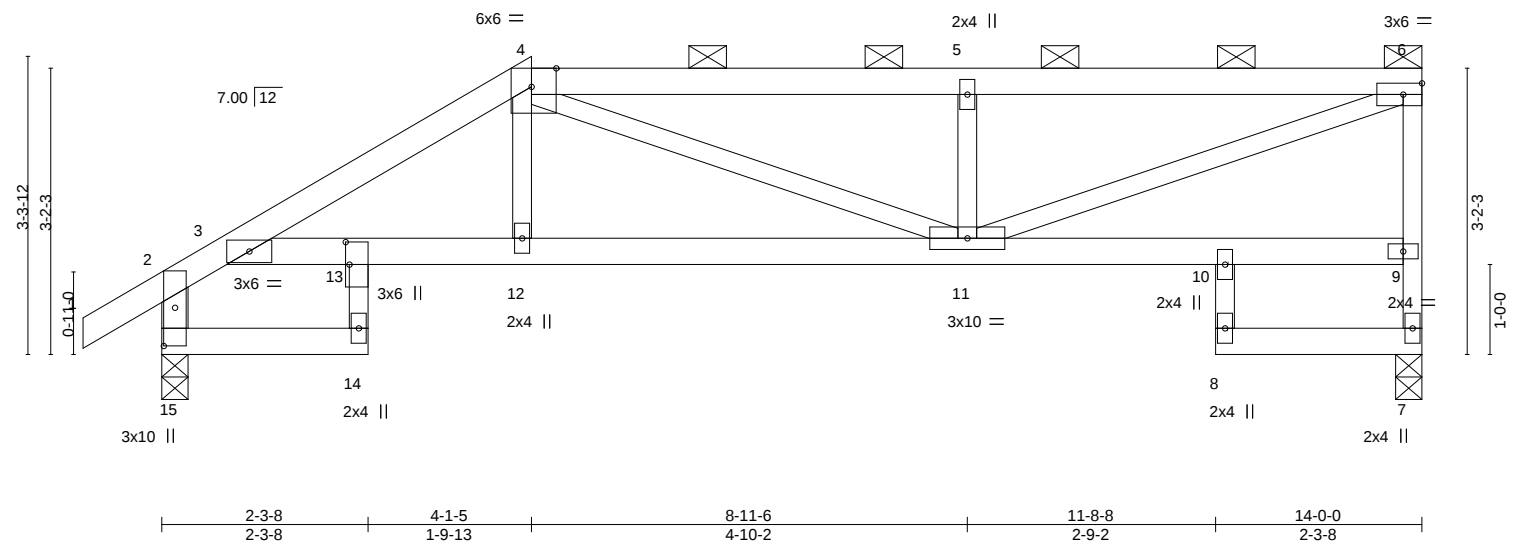

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.31	Vert(LL)	-0.05 11-12 >999	360	MT20	197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.47	Vert(CT)	-0.09 11-12 >999	240			
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.39	Horz(CT)	0.08 7 n/a	n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.04 12-13 >999	240	Weight: 53 lb	FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
13-14,8-10: 2x3 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-15: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-1-12 oc purlins, except end verticals, and 2-0-0 oc purlins (5-2-8 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 7-8.

REACTIONS.


(size) 7=0-3-8, 15=0-3-8
Max Horz 15=123(LC 5)
Max Uplift 7=-117(LC 5), 15=-72(LC 8)
Max Grav 7=616(LC 1), 15=693(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-415/38, 3-4=-1134/183, 4-5=-1119/206, 5-6=-1117/204, 7-9=-590/131, 6-9=-559/139, 2-15=-698/96
BOT CHORD 3-13=-162/827, 12-13=-225/959, 11-12=-225/949
WEBS 4-11=-146/268, 5-11=-399/168, 6-11=-222/1140

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 15 except (jt=lb) 7=117.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

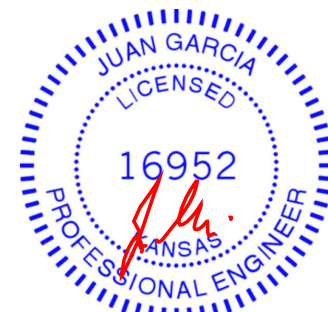

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	A3	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:30Z Page 1

ID: Hr0UoylgMOrZQ4rpild7XzssyG-IRGFyz40ctKshMjBZCpgkglK06s/k/ JmvoY2CdUS



Scale = 1:26.5

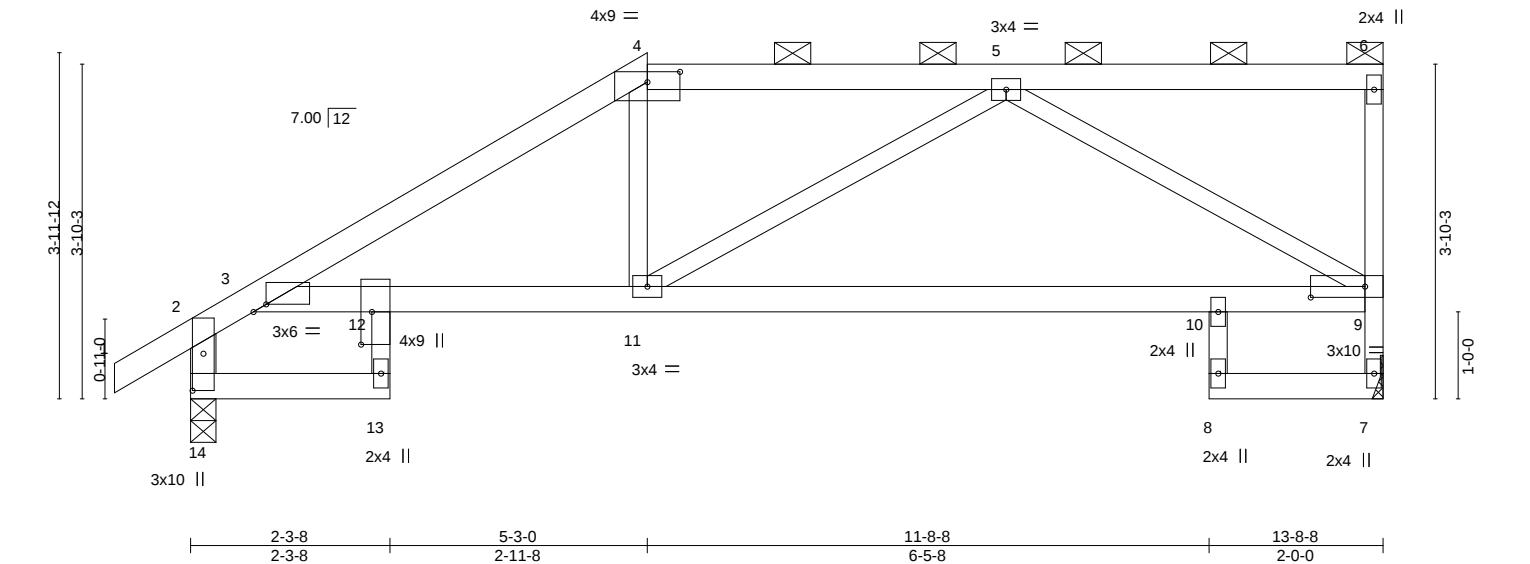


Plate Offsets (X,Y)-- [3:0-1-12,Edge], [4:0-4-8,0-1-7], [9:0-7-8,0-1-8], [12:0-4-8,0-1-8], [14:0-5-2,0-1-8]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.57	Vert(LL)	-0.13 10-11 >999 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.58	Vert(CT)	-0.25 10-11 >643 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.48	Horz(CT)	0.12 7 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05 11-12 >999 240	Weight: 51 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
12-13,8-10: 2x3 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-14: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-2-7 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 7-8.

REACTIONS.

(size) 7=Mechanical, 14=0-3-8
Max Horz 14=121(LC 7)
Max Uplift 7=-37(LC 5), 14=-8(LC 8)
Max Grav 7=603(LC 1), 14=680(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-430/8, 3-4=-996/17, 4-5=-812/33, 7-9=-577/52, 2-14=-687/28
BOT CHORD 3-12=-22/661, 11-12=-74/816, 10-11=-111/698, 9-10=-102/705
WEBS 4-11=0/252, 5-9=-770/115

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 14.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	A4	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:22 2021 Page 1

ID: Hr0UoloylgMOrZQ4rpild7XzssyG-EdqdAJ5eNBSjJWcoWkVttFad0rTECC8xMNJKZGdWR

0-10-8	2-3-8	6-4-11	11-8-8	13-8-8
0-10-8	2-3-8	4-1-3	5-3-13	2-0-0

06/03/2021

Scale = 1:29.7

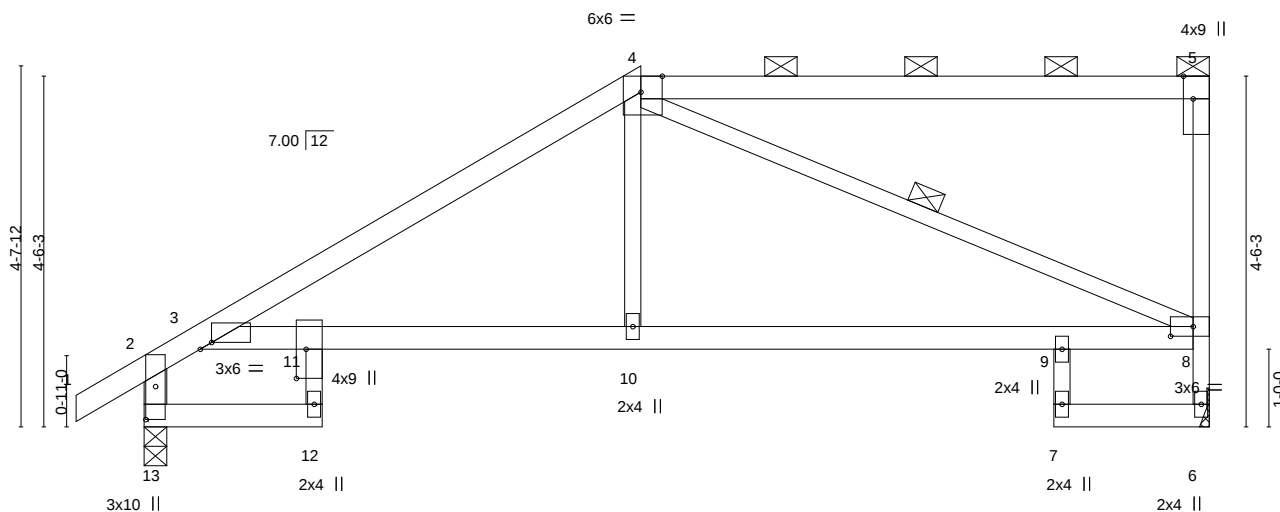


Plate Offsets (X,Y)--	[3:0-1-12,Edge], [4:0-3-5,Edge], [5:0-3-8,Edge], [8:0-3-8,0-1-8], [11:0-4-8,0-1-8], [13:0-5-2,0-1-8]
-----------------------	--

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.80	Vert(LL)	-0.10 10-11	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.69	Vert(CT)	-0.18 10-11	>908	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.44	Horz(CT)	0.12 6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.08 10-11	>999	240	Weight: 51 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 11-12,7-9: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-13: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-4 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 6-7.
 WEBS 1 Row at midpt 4-8

REACTIONS.


(size) 6=Mechanical, 13=0-3-8
 Max Horz 13=143(LC 7)
 Max Uplift 6=-39(LC 5), 13=-12(LC 8)
 Max Grav 6=603(LC 1), 13=680(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-440/18, 3-4=-891/15, 6-8=-578/52, 2-13=-686/36
 BOT CHORD 3-11=-22/550, 10-11=-85/717, 9-10=-88/711, 8-9=-91/720
 WEBS 4-10=0/341, 4-8=-725/58

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 13.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

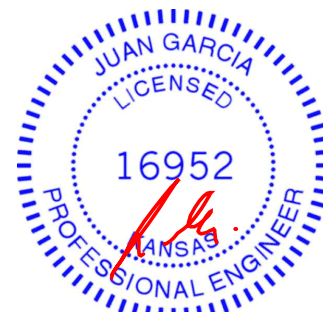

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	A5	Half Hip	1	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,


8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:22 2021 Page 1

ID: Hr0UioyIgmOrZQ4rpild7XzssyG-iq00Nf6G8UaawgBgdR8Q5bLU00ZMPhA051RZGJWQ

0-10-8	2-3-8	3-8-3	7-6-7	11-8-8	13-8-8
0-10-8	2-3-8	1-4-11	3-10-4	4-2-1	2-0-0

06/03/2021

Scale = 1:33.4

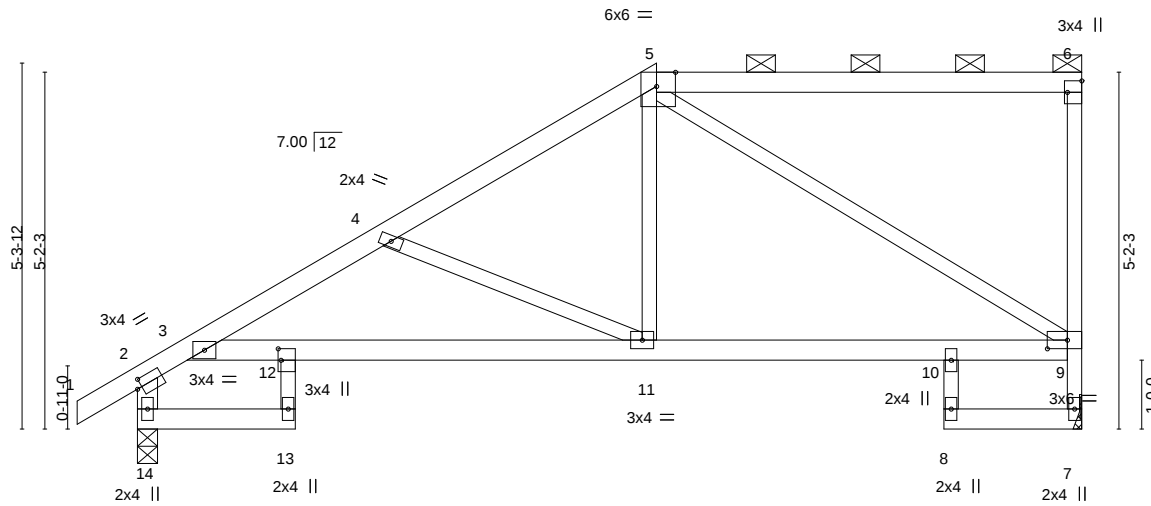

2-3-8	7-6-7	11-8-8	13-8-8
2-3-8	5-2-15	4-2-1	2-0-0

Plate Offsets (X,Y)-- [2:0-0-14,0-1-8], [5:0-3-5,Edge], [6:Edge,0-2-8], [9:0-3-8,0-1-8], [12:0-2-0,0-0-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.57	Vert(LL)	-0.07 11-12	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.51	Vert(CT)	-0.16 11-12	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.83	Horz(CT)	0.10 7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.07 11-12	>999	240	Weight: 55 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 12-13,8-10: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-14: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 5-6.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 7-8.

REACTIONS.

(size) 7=Mechanical, 14=0-3-8
 Max Horz 14=165(LC 7)
 Max Uplift 7=-41(LC 5), 14=-15(LC 8)
 Max Grav 7=603(LC 1), 14=680(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-363/0, 3-4=-1035/60, 4-5=-724/19, 7-9=-581/53, 2-14=-674/39
 BOT CHORD 3-12=-83/809, 11-12=-143/894, 10-11=-79/562, 9-10=-88/564
 WEBS 5-11=0/378, 5-9=-641/46, 4-11=-380/108

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 14.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B1	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:22 2021 Page 1

ID: Hr0UoylgMorZQ4rpild7XzssyG-iq00Nf6G8UaawgBagdr8Q5bJf00bzakA061MRZGfWQ

06/03/2021

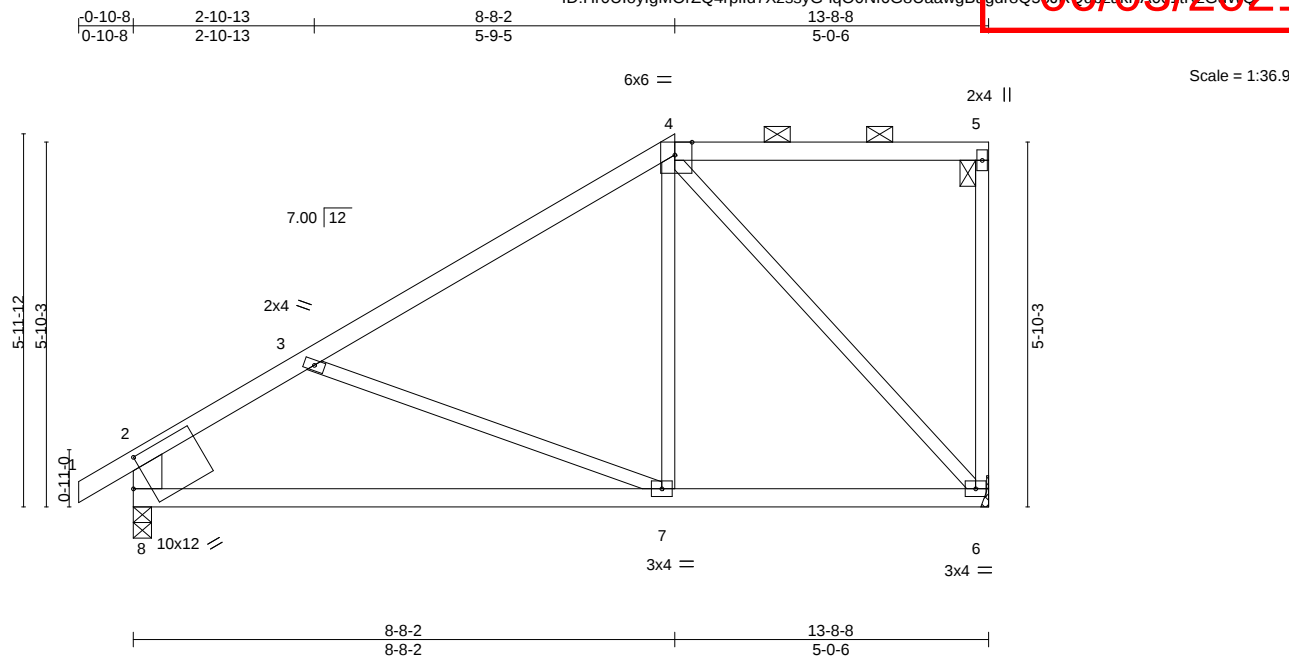


Plate Offsets (X,Y)--		[4:0-3-5,Edge], [8:0-3-1,0-5-4]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)		l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.67	Vert(LL)	-0.12 7-8	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.47	Vert(CT)	-0.23 7-8	>689	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.75	Horz(CT)	0.01 6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.02 6-7	>999	240	Weight: 55 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-0-8 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 6=Mechanical, 8=0-3-8
Max Horz 8=187(LC 7)
Max Uplift 6=-44(LC 5), 8=-17(LC 8)
Max Grav 6=599(LC 1), 8=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-751/69, 3-4=-529/23, 2-8=-593/63
BOT CHORD 7-8=-133/587, 6-7=-57/368
WEBS 4-7=0/335, 4-6=-548/33

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 8.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

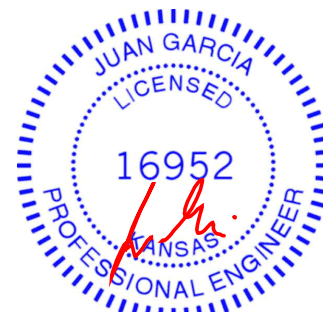

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B2	Half Hip	2	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:24 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-A0xOb?6uvoiRYqmmELNNyIKWAgbn1SFQmPFGWJP

06/03/2021

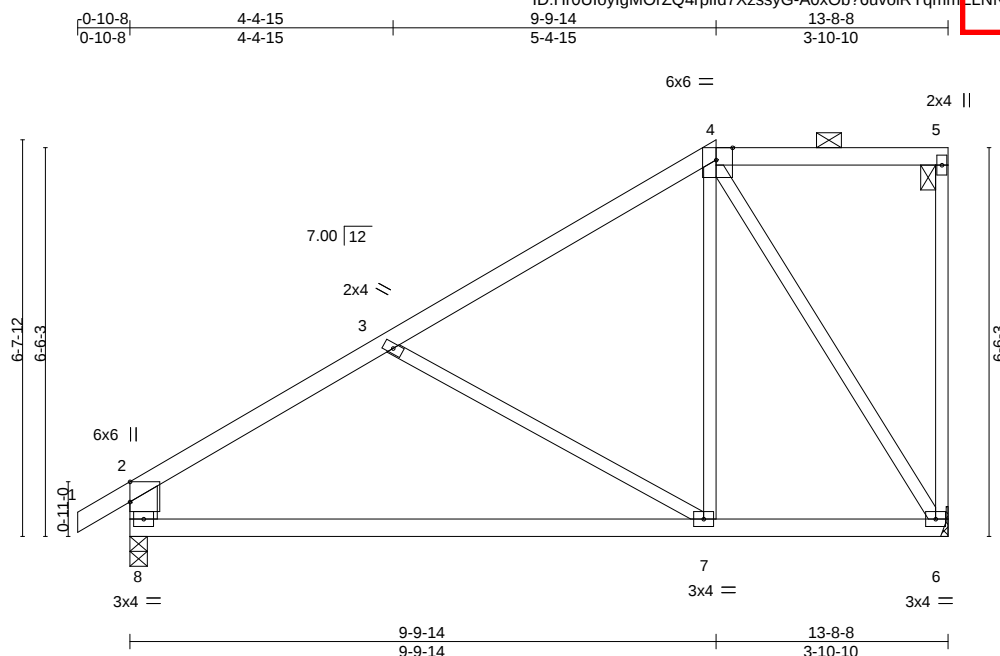


Plate Offsets (X,Y)--		[2:0-4-1,Edge], [4:0-3-5,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d			PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.52	Vert(LL)	-0.20	7-8	>801	360	MT20 197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.60	Vert(CT)	-0.40	7-8	>406	240	
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.73	Horz(CT)	0.01	6	n/a	n/a	
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.01	6-7	>999	240	Weight: 56 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-10-8 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 6=Mechanical, 8=0-3-8
Max Horz 8=208(LC 7)
Max Uplift 6=-47(LC 5), 8=-17(LC 8)
Max Grav 6=599(LC 1), 8=682(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-722/63, 3-4=-436/30, 2-8=-583/70
BOT CHORD 7-8=-124/561, 6-7=-53/290
WEBS 3-7=-304/131, 4-7=0/392, 4-6=-559/26

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 8.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

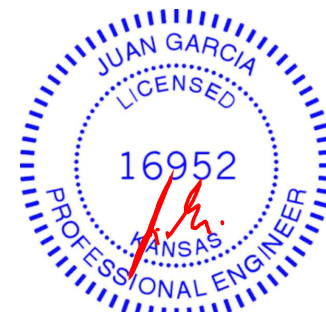

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	B3	Half Hip	2	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:25 2021 Page 1

ID:Hr0UloylgMorZQ4rpild7XzssyG-eCVmoK7Xg6qlA_Lzo2ucVWthN5vRrUjVadK08kjzGdW0

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

06/03/2021

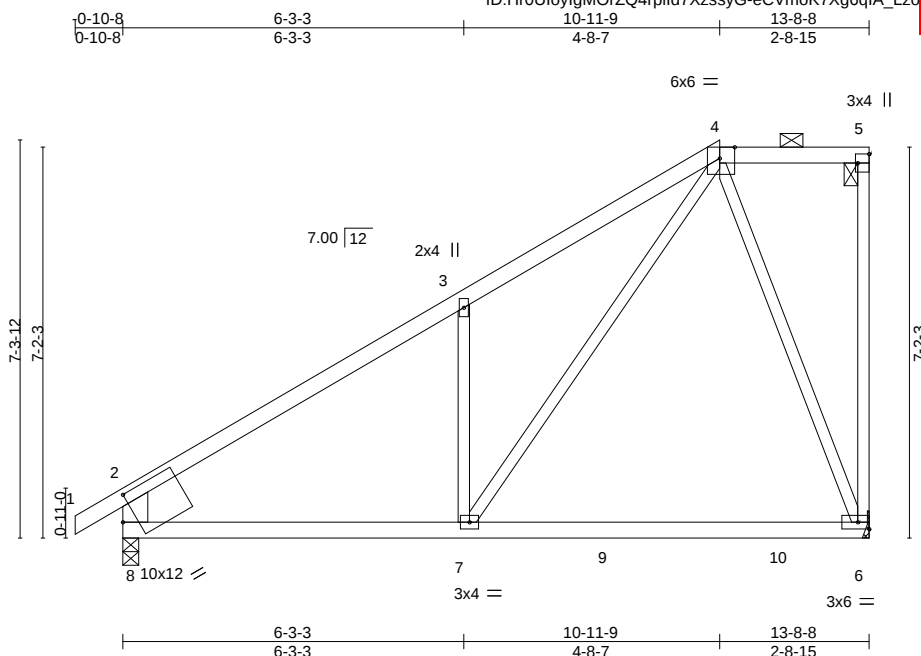


Plate Offsets (X,Y)--		[4:0-3-5,Edge], [5:Edge,0-2-8], [8:0-3-1,0-5-4]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL 1.15		TC	0.58	Vert(LL)	-0.17	6-7	>934	360	MT20	197/144
TCDL	10.0	Lumber DOL 1.15		BC	0.54	Vert(CT)	-0.28	6-7	>573	240		
BCLL	0.0 *	Rep Stress Incr YES		WB	0.73	Horz(CT)	0.01	6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	-0.04	6-7	>999	240	Weight: 57 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-10-8 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 6=Mechanical, 8=0-3-8
Max Horz 8=230(LC 7)
Max Uplift 6=-50(LC 5), 8=-16(LC 8)
Max Grav 6=689(LC 13), 8=734(LC 13)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-774/20, 3-4=-771/129, 2-8=-640/53
BOT CHORD 7-8=-85/649
WEBS 3-7=-355/168, 4-7=-107/769, 4-6=-550/85

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 8.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	B4	Half Hip	2	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:27 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-abdWD09nCj40PHVLvTw4axv11A3xH5tbea0CzGdWw

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

06/03/2021

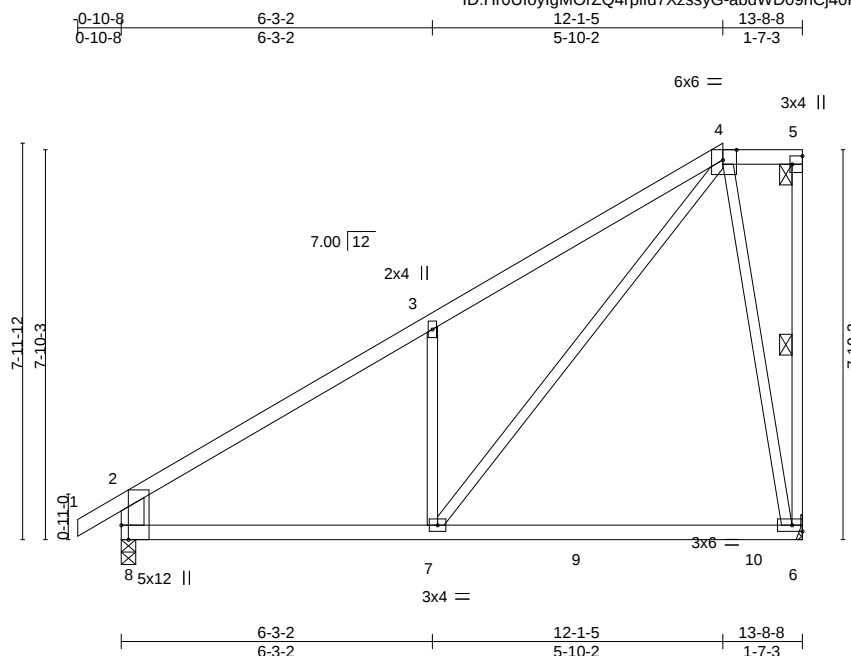


Plate Offsets (X,Y)--		[4:0-3-5,Edge], [5:Edge,0-2-8], [8:0-3-8,Edge]							
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.57	Vert(LL)	-0.17 6-7 >918 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.54	Vert(CT)	-0.29 6-7 >559 240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.92	Horz(CT)	0.01 6 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	-0.05 6-7 >999 240	Weight: 59 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-10-6 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 5-6

REACTIONS.

(size) 6=Mechanical, 8=0-3-8
Max Horz 8=311(LC 5)
Max Uplift 6=-131(LC 8), 8=-93(LC 8)
Max Grav 6=725(LC 15), 8=734(LC 15)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-795/83, 3-4=-796/260, 2-8=-638/132
BOT CHORD 7-8=-139/688
WEBS 3-7=-409/286, 4-7=-266/868, 4-6=-638/166

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8 except (jt=lb) 6=131.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B5	Half Hip	2	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:27 2021 Page 1

ID:HrOUloylgMOrZQ4rpild7XzssyG-abdWD09nCj40PHVlvTw4axy2LBvKQbseu0CzGdWw

06/03/2021

0-10-8 6-3-2 13-3-0 13-8-8
0-10-8 6-3-2 6-11-14 0-5-8

6x8 =

Scale = 1:49.9

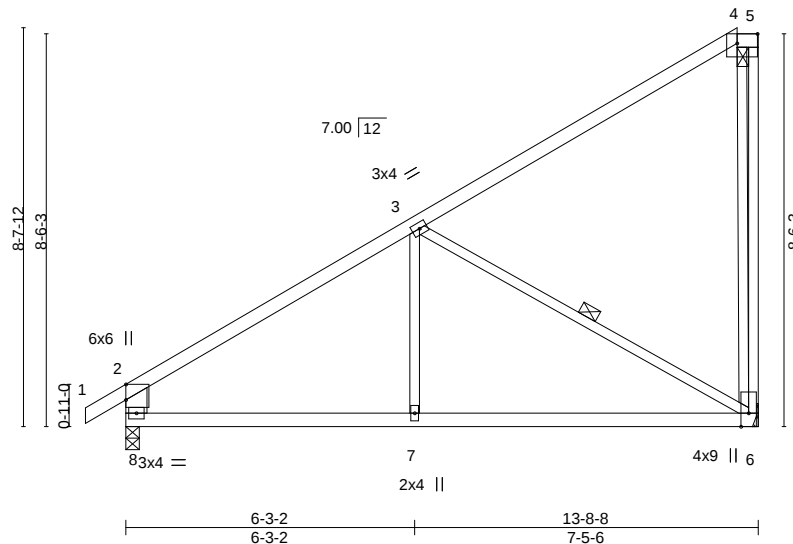


Plate Offsets (X,Y)--		[2:0-4-1,Edge], [4:0-5-5,Edge]									
LOADING (psf)		SPACING-	2-0-0	CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL	1.15	TC 0.68		Vert(LL)	-0.10 6-7	>999	360	MT20	197/144
TCDL 10.0		Lumber DOL	1.15	BC 0.45		Vert(CT)	-0.21 6-7	>754	240		
BCLL 0.0 *		Rep Stress Incr	YES	WB 0.90		Horz(CT)	0.01 6	n/a	n/a		
BCDL 10.0		Code IRC2018/TPI2014		Matrix-S		Wind(LL)	-0.05 6-7	>999	240	Weight: 59 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (10-0-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 3-6

REACTIONS.

(size) 6=Mechanical, 8=0-3-8
Max Horz 8=273(LC 7)
Max Uplift 6=-58(LC 8), 8=-8(LC 8)
Max Grav 6=608(LC 13), 8=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-733/14, 5-6=-148/327, 2-8=-612/45
BOT CHORD 7-8=-96/573, 6-7=-96/573
WEBS 3-7=0/299, 3-6=-608/119, 4-6=-563/215

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 8.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B6	Monopitch	2	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:29 2021 Page 1
ID:HrOUloylgMOrZQ4rpild7XzssyG-W_IHeiA1jKJebft1uyYfM2K3tUuNNCAYVFL442GdV/K

0-10-8
0-10-8
6-3-2
6-3-2
13-8-8
7-5-6

06/03/2021

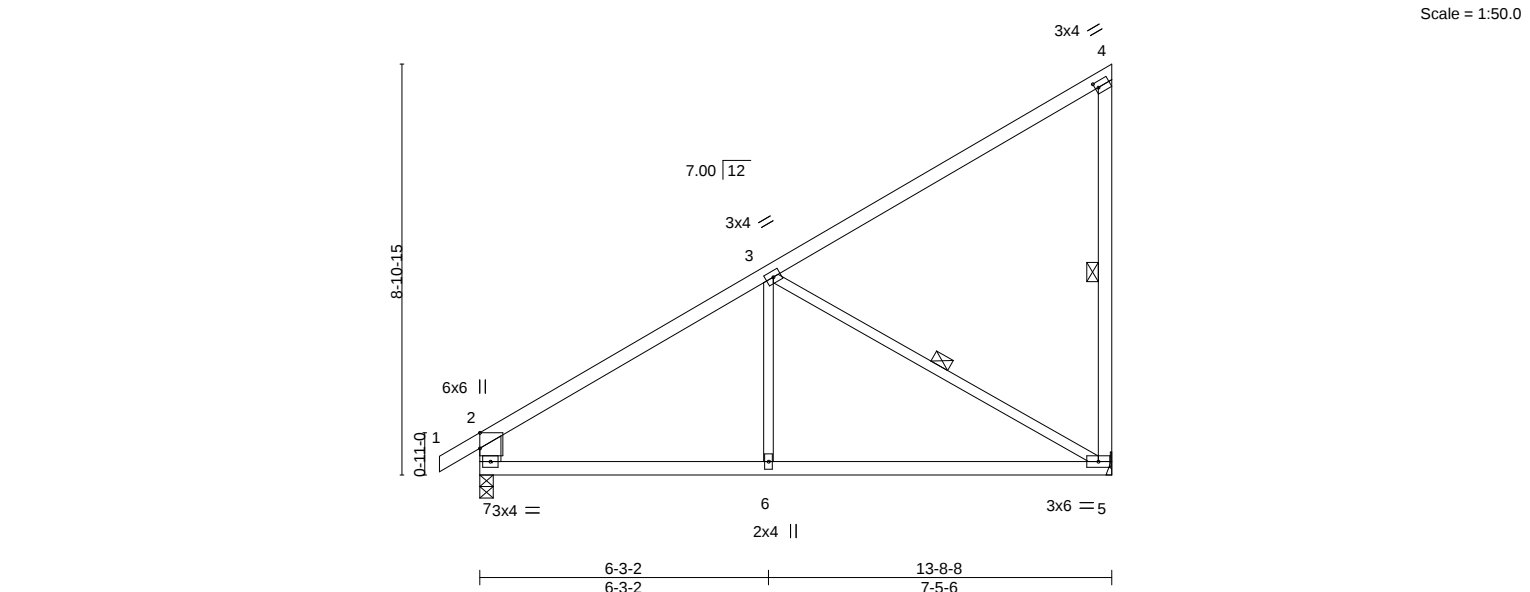


Plate Offsets (X,Y)--		[2:0-4-1,Edge], [4:0-0-13,0-1-8]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP	
TCLL 25.0	Plate Grip DOL	1.15	TC 0.66	Vert(LL)	-0.09	5-6	>999	360	MT20	197/144	
TCDL 10.0	Lumber DOL	1.15	BC 0.42	Vert(CT)	-0.19	5-6	>826	240			
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.40	Horz(CT)	0.01	5	n/a	n/a			
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	-0.05	5-6	>999	240			
									Weight: 55 lb	FT = 10%	

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x3 SPF No.2 *Except*	WEBS	1 Row at midpt 4-5, 3-5
	4-5: 2x4 SPF No.2, 2-7: 2x6 SPF No.2		

REACTIONS.	
(size)	5=Mechanical, 7=0-3-8
Max Horz	7=283(LC 7)
Max Uplift	5=-64(LC 8), 7=-6(LC 8)
Max Grav	5=616(LC 13), 7=680(LC 1)

FORCES.	
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD	2-3=-733/11, 2-7=-607/43
BOT CHORD	6-7=-100/577, 5-6=-100/577
WEBS	3-6=0/291, 3-5=-625/123

- NOTES-**
- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 4) Refer to girder(s) for truss to truss connections.
 - 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 7.
 - 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14,2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	B7	Monopitch	1	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:30 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-?AJfr2BfUeSaGLEwobTnCZaXJFiswqg1nfojycY2CdVUj


RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

06/03/2021

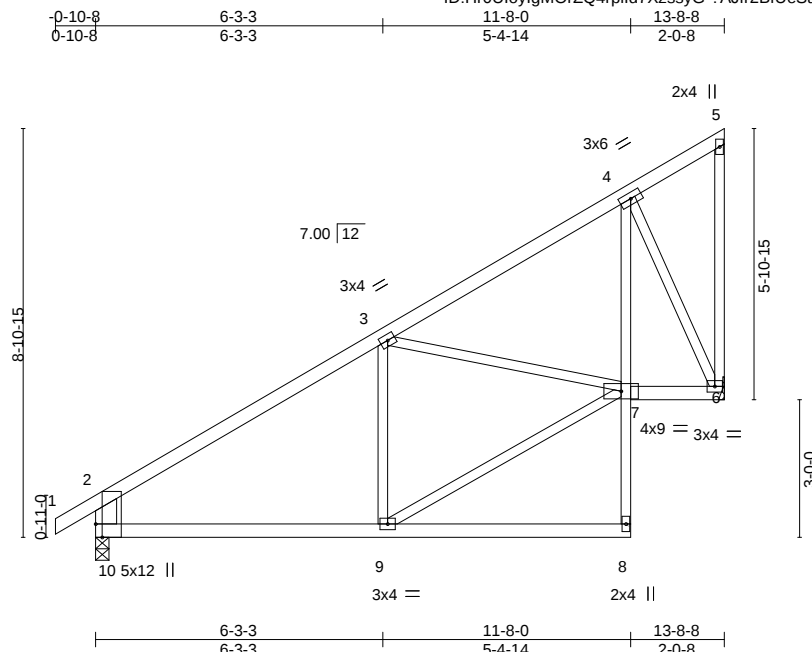

Scale = 1:50.2

Plate Offsets (X,Y)--		[10:0-3-8,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc)		l/defl L/d		PLATES GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.56	Vert(LL)	-0.03 8-9	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL 1.15		BC	0.29	Vert(CT)	-0.07 8-9	>999	240		
BCLL	0.0 *	Rep Stress Incr YES		WB	0.36	Horz(CT)	-0.01 6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	-0.01 8-9	>999	240	Weight: 62 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 4-8: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-10: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 6=Mechanical, 10=0-3-8
 Max Horz 10=246(LC 5)
 Max Uplift 6=-69(LC 8), 10=-1(LC 8)
 Max Grav 6=617(LC 13), 10=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-708/1, 3-4=-412/34, 2-10=-611/42
 BOT CHORD 9-10=-78/534, 4-7=-35/431, 6-7=-55/286
 WEBS 7-9=-93/610, 4-6=-639/104

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 10.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

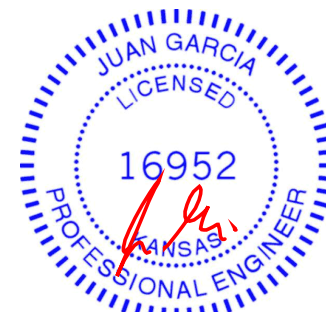

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B8	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:31 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-TMs13OCHFyaru668J70krm66tzJJ7C359Z6dWj

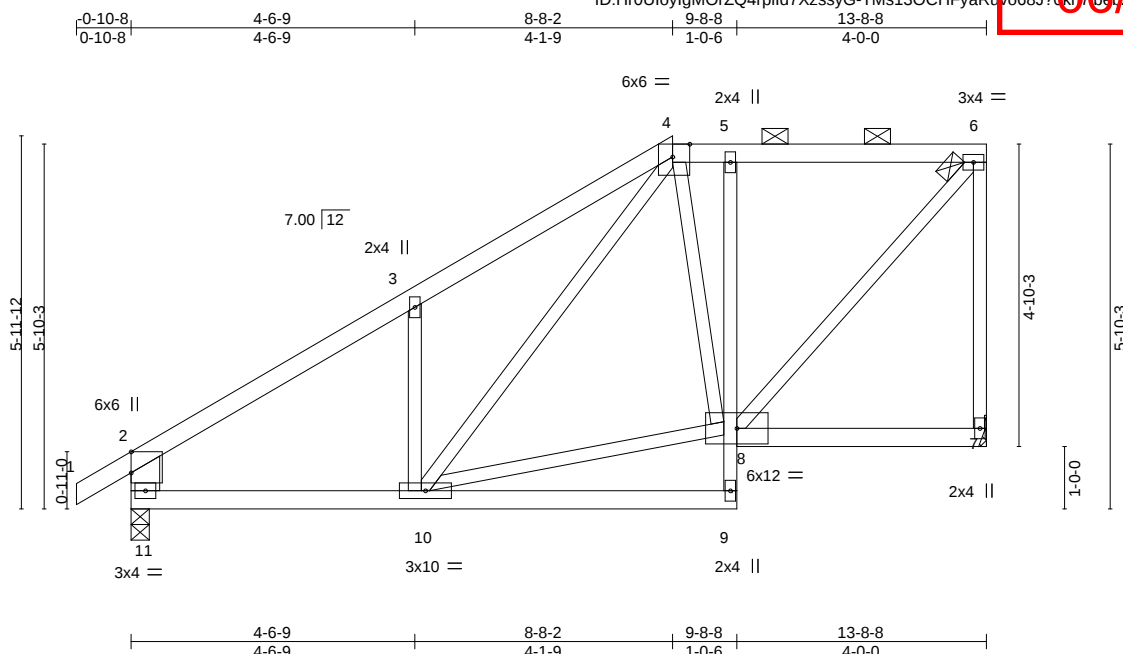


Plate Offsets (X,Y)--		[2:0-4-1,Edge], [4:0-3-5,Edge]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL 1.15		TC	0.53	Vert(LL)	-0.04 9-10	>999 360	MT20	197/144	
TCDL	10.0	Lumber DOL 1.15		BC	0.37	Vert(CT)	-0.09 9-10	>999 240			
BCLL	0.0 *	Rep Stress Incr YES		WB	0.20	Horz(CT)	-0.00 7	n/a n/a			
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.02 9-10	>999 240	Weight: 63 lb	FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 5-9: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-11: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-7 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 4-6.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=Mechanical, 11=0-3-8
 Max Horz 11=175(LC 5)
 Max Uplift 7=-44(LC 5), 11=-17(LC 8)
 Max Grav 7=599(LC 1), 11=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-730/22, 3-4=-671/102, 4-5=-384/48, 5-6=-388/47, 6-7=-556/62, 2-11=-604/44
 BOT CHORD 10-11=-80/539, 5-8=-250/73
 WEBS 8-10=-63/366, 6-8=-51/578, 4-10=-80/265

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 11.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B9	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:32 2021 Page 1

ID:HrOUloylgMOrZQ4rpild7XzssyG-xYQPGkDw0FiV3Nj0VFH_grV24RumMcEwoonIPZGJWH

06/03/2021

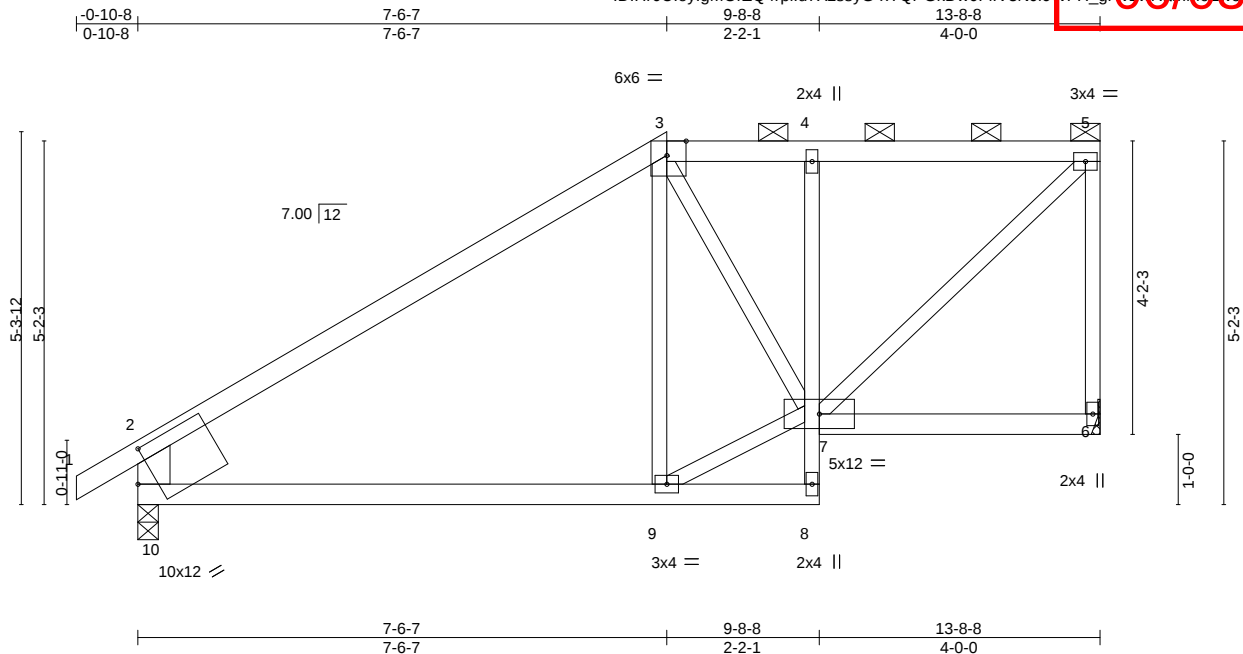


Plate Offsets (X,Y)-- [3:0-3-5,Edge], [10:0-3-1,0-5-4]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.65	Vert(LL)	-0.06	9-10	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.35	Vert(CT)	-0.13	9-10	>999	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.21	Horz(CT)	0.01	6	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.02	9	>999	240	Weight: 55 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 4-8: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-10: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-10-1 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-5.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 6=Mechanical, 10=0-3-8
 Max Horz 10=153(LC 5)
 Max Uplift 6=-41(LC 5), 10=-15(LC 8)
 Max Grav 6=599(LC 1), 10=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-659/21, 3-4=-445/30, 4-5=-450/31, 5-6=-557/60, 2-10=-620/69
 BOT CHORD 9-10=-57/448, 4-7=-264/81
 WEBS 7-9=-46/495, 5-7=-47/615

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 10.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	B10	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,


8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:24 2021 Page 1

ID: Hr0UoylgMOrZQ4rpild7XzssyG-A0xOb?6uvoiRYqmmELNNyK)gQdZihfOQsUPfGJWP

06/06/2021

0-10-8 6-4-11 7-9-13 13-8-8
0-10-8 6-4-11 1-5-1 5-10-11

Scale = 1:29.9

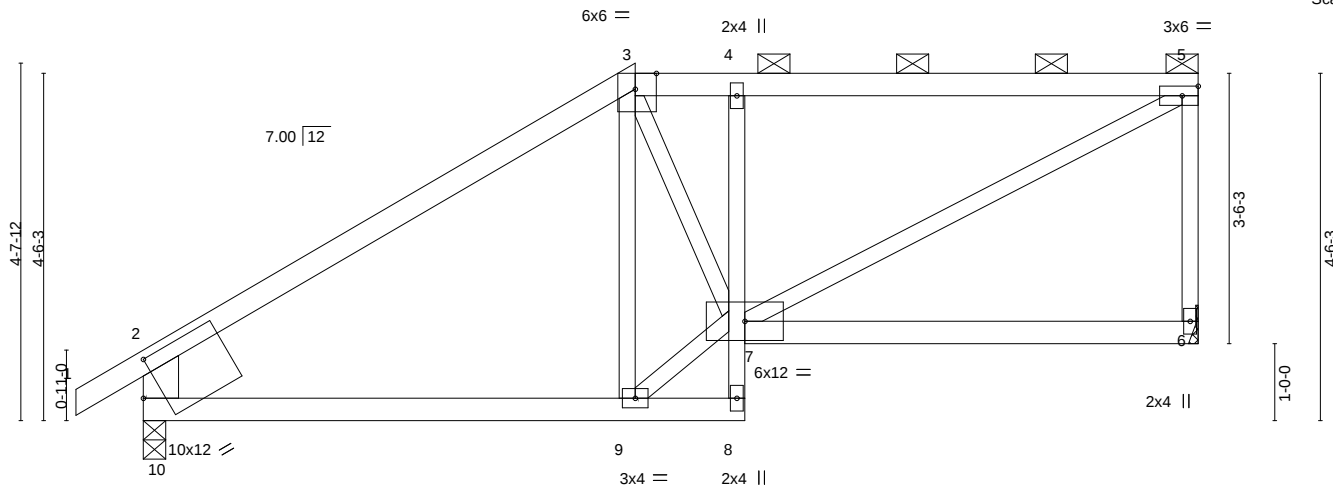

6-4-11 7-9-13 13-8-8
6-4-11 1-5-1 5-10-11

Plate Offsets (X,Y)--		[3:0-3-5,Edge], [10:0-3-1,0-5-4]								
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.58	Vert(LL)	-0.05	6-7	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.26	Vert(CT)	-0.11	6-7	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.26	Horz(CT)	0.01	6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	4	>999	240	Weight: 53 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
4-8: 2x3 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-5.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


(size) 6=Mechanical, 10=0-3-8
Max Horz 10=131(LC 5)
Max Uplift 6=-38(LC 5), 10=-12(LC 8)
Max Grav 6=599(LC 1), 10=682(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-693/16, 3-4=-670/36, 4-5=-681/35, 5-6=-539/70, 2-10=-616/58
BOT CHORD 9-10=-57/489, 4-7=-450/123
WEBS 7-9=-37/598, 3-7=-58/501, 5-7=-62/747

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 10.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

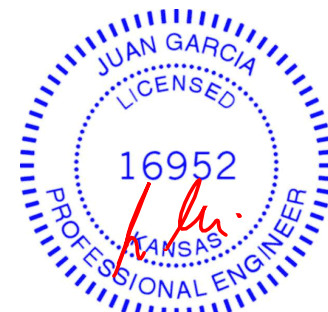

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	C1	Roof Special	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:32 2021 Page 1

ID:Hr0UoylgMOrZQ4rpild7XzssyG-Pl_oU4DYnZq97CyVGx1UqCC1P5H0JEBIraYzDs_GWVG

-0-10-8 2-3-8 6-6-0 7-9-0 13-8-8
0-10-8 2-3-8 4-2-8 1-3-0 5-11-8

4x5 ||

Scale = 1:29.6

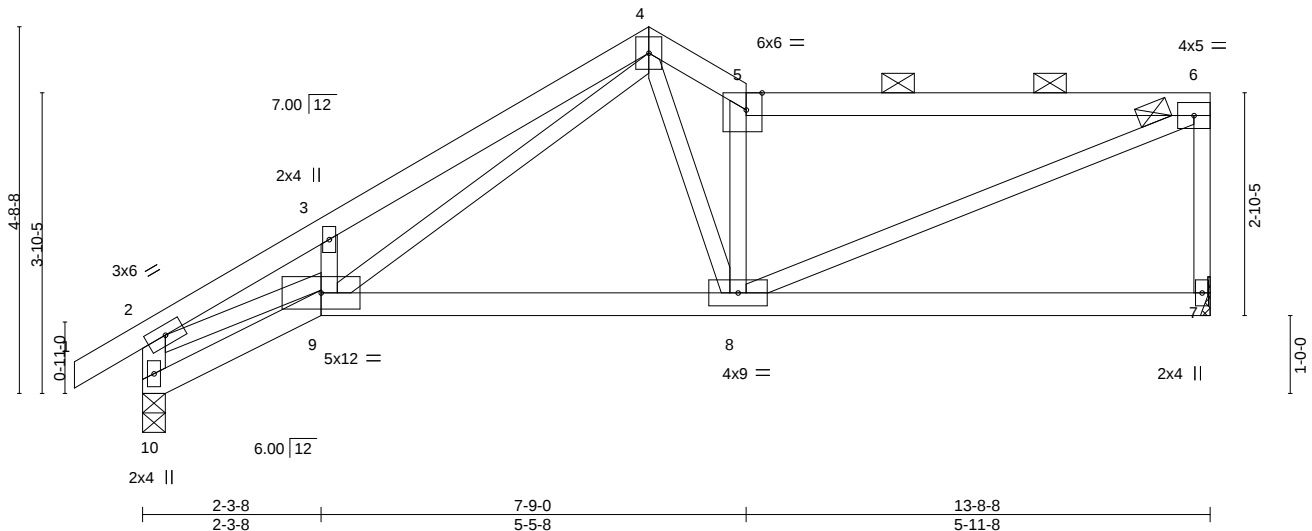


Plate Offsets (X, Y)--		[5:0-2-7,Edge]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP		
TCLL 25.0	Plate Grip DOL	1.15	TC 0.58	Vert(LL)	-0.05	8-9	>999	MT20	197/144		
TCDL 10.0	Lumber DOL	1.15	BC 0.32	Vert(CT)	-0.11	8-9	>999				
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.37	Horz(CT)	0.04	7	n/a				
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.03	8-9	>999				
								Weight: 53 lb	FT = 10%		

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-7-10 oc purlins, except end verticals, and 2-0-0 oc purlins (5-0-8 max.): 5-6.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=Mechanical, 10=0-3-8
Max Horz 10=127(LC 5)
Max Uplift 7=-24(LC 9), 10=-12(LC 8)
Max Grav 7=603(LC 1), 10=680(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1344/62, 3-4=-1370/147, 4-5=-977/35, 5-6=-833/13, 6-7=-549/52, 2-10=-667/45
BOT CHORD 8-9=-31/613
WEBS 4-9=-137/713, 4-8=-1/594, 5-8=-765/90, 6-8=-18/862, 2-9=-30/1068

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Bearing at joint(s) 10 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 10.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	C2	Roof Special	5	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,


8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:34 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-txYAhPEAYty0IMXhqRYjMBHos12eMME16H2cdVf

0-10-8 2-3-8 6-6-0 10-8-8 13-0-0
0-10-8 2-3-8 4-2-8 4-2-8 2-3-8

4x5 ||

Scale = 1:30.0

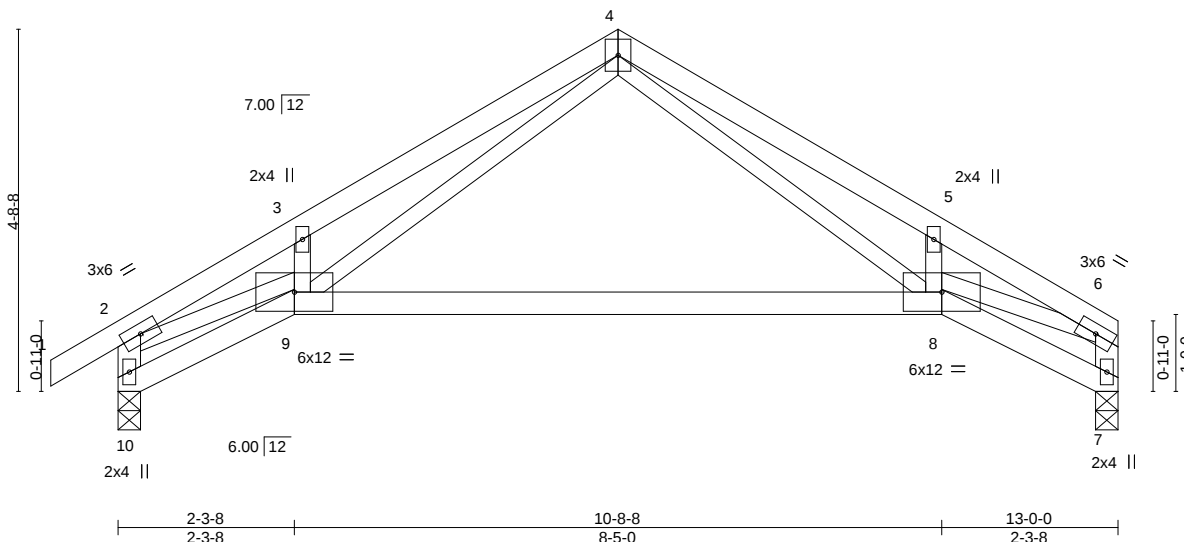

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.28	Vert(LL)	-0.20 8-9	>769	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.60	Vert(CT)	-0.42 8-9	>361	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.37	Horz(CT)	0.08 7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.05 8-9	>999	240	Weight: 49 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10,6-7: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-7-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 10=0-3-8, 7=0-3-8
Max Horz 10=135(LC 5)
Max Uplift 10=-90(LC 8), 7=-66(LC 9)
Max Grav 10=646(LC 1), 7=569(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1326/166, 3-4=-1344/288, 4-5=-1377/245, 5-6=-1349/120, 2-10=-662/111,
6-7=-590/65
BOT CHORD 8-9=-34/517
WEBS 4-8=-162/810, 4-9=-194/857, 2-9=-102/1067, 6-8=-71/1080

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 10, 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10, 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	C3	Roof Special Structural Gable	1	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:35 2021 Page 1

ID: Hr0U0yIgmOrZQ4rpild7XzssyG-L76YulFoJA4tMW6UN83yvvlISG1Gr5c2w0jlkZGdVFE

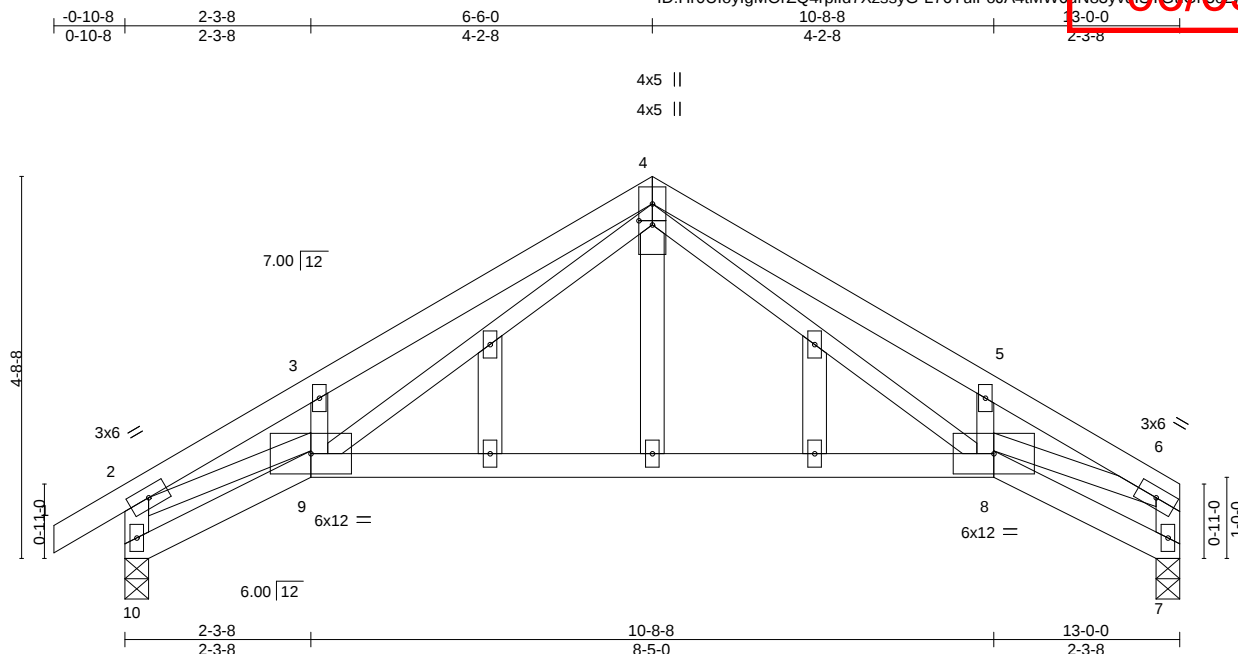

Scale = 1:28.4

Plate Offsets (X,Y)--		[4:0-0-10,0-2-0]										
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL 1.15		TC	0.28	Vert(LL)	-0.20	8-9	>769	360	MT20	197/144
TCDL	10.0	Lumber DOL 1.15		BC	0.60	Vert(CT)	-0.42	8-9	>361	240		
BCLL	0.0 *	Rep Stress Incr YES		WB	0.37	Horz(CT)	0.08	7	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.05	8-9	>999	240	Weight: 55 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-10,6-7: 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-7-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 10=0-3-8, 7=0-3-8
Max Horz 10=135(LC 5)
Max Uplift 10=90(LC 8), 7=66(LC 9)
Max Grav 10=646(LC 1), 7=569(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-1326/166, 3-4=-1344/288, 4-5=-1377/245, 5-6=-1349/120, 2-10=-662/111, 6-7=-590/65
BOT CHORD 8-9=-34/517
WEBS 4-8=-162/810, 4-9=-194/857, 2-9=-102/1067, 6-8=-71/1080

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable studs spaced at 2-0-0 oc.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 10, 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10, 7.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

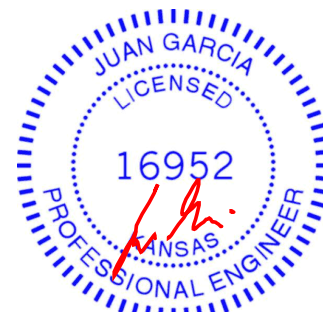

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	D1	HIP GIRDER	1	2		AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871, 8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:37 2021 Page 1
ID: H0UloylgMOrZQ4rpild7XzssyG-HWEIJRG2roLbcqGGVZ6Q_2NKN3ARf6iO8WmMdzGdWC

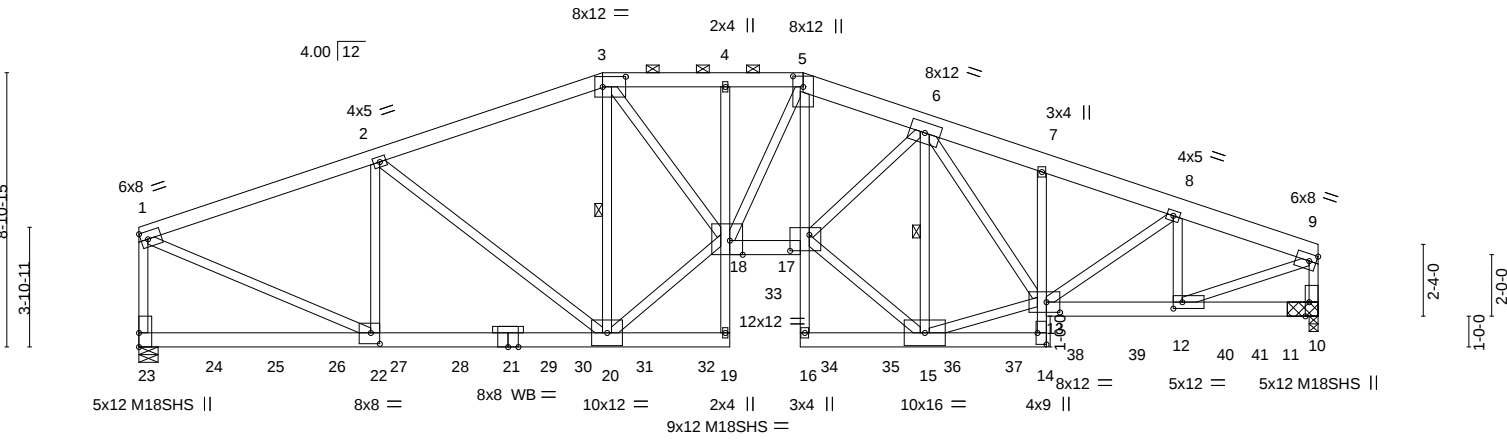


Plate Offsets (X, Y)--	[3:0-9-0,0-4-0], [5:0-4-3,0-4-0], [9:Edge,0-2-12], [10:0-5-8,Edge], [12:0-3-8,0-2-8], [13:0-5-4,0-4-0], [14:Edge,0-3-8], [17:0-7-8,0-6-4], [18:0-5-0,Edge], [22:0-3-8,0-4-4]
------------------------	--

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.57	Vert(LL)	-0.34	16	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.69	Vert(CT)	-0.60	16	>759	240	M18SHS	197/144
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.98	Horz(CT)	0.33	10	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.22	16	>999	240	Weight: 634 lb	FT = 10%

LUMBER-	BRACING-
TOP CHORD 2x6 SPF No.2 *Except* 5-9: 2x8 SP DSS	TOP CHORD Structural wood sheathing directly applied or 5-2-7 oc purlins, except end verticals, and 2-0-0 oc purlins (4-1-3 max.): 3-5.
BOT CHORD 2x6 SP 2400F 2.0E *Except* 4-19,5-16,7-14: 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x4 SPF No.2 *Except* 18-20,15-17,1-22,9-12: 2x4 SPF 2100F 1.8E	WEBS 1 Row at midpt 3-20, 6-15
OTHERS 2x3 SPF No.2	

REACTIONS.	(size) 23=0-7-8, 10=(0-3-8 + bearing block) (req. 0-5-7) Max Horz 23=-69(LC 17) Max Uplift 23=-739(LC 4), 10=-677(LC 5) Max Grav 23=7471(LC 1), 10=6969(LC 1)
-------------------	--

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-8086/867, 2-3=-8388/978, 3-4=-12474/1421, 4-5=-12511/1424, 5-6=-14038/1581, 6-7=-10622/1187, 7-8=-10669/1153, 8-9=-9122/919, 1-23=-6211/682, 9-10=-6596/676
BOT CHORD	20-22=-767/7599, 18-19=-21/385, 17-18=-1384/13351, 16-17=-62/536, 5-17=-599/5511, 14-15=-101/963, 13-14=-19/471, 7-13=-324/78, 12-13=-866/8573
WEBS	2-22=-884/201, 2-20=-86/550, 3-20=-4238/440, 18-20=-994/9762, 3-18=-832/7915, 5-18=-1709/199, 15-17=-1186/11237, 6-17=-628/6302, 6-15=-7887/827, 13-15=-845/7984, 6-13=-232/2539, 8-13=-232/1899, 8-12=-1809/279, 1-22=-866/8225, 9-12=-905/9044

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x8 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - 2x6 SP 2400F 2.0E bearing block 12" long at jt. 10 attached to each face with 3 rows of 10d (0.131"x3") nails spaced 3" o.c. 12
Total fasteners per block. Bearing is assumed to be SPF No.2.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	D1	HIP GIRDER	1	2	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:37 2021 Page 2

ID:Hr0UloyIgMOrZQ4rpild7XzssyG-HWEIJRG2roLbcqGGVZ6Q_2NkN3dRf6iO8VnMdzGdWC

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

46126286

06/03/2021

NOTES-

- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 23=739, 10=677.
- 11) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 12) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- 13) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 591 lb down and 48 lb up at 0-1-12, 583 lb down and 59 lb up at 2-4-0, 583 lb down and 61 lb up at 4-4-0, 579 lb down and 64 lb up at 6-4-0, 579 lb down and 67 lb up at 8-4-0, 610 lb down and 70 lb up at 10-4-0, 623 lb down and 151 lb up at 12-4-0, 579 lb down and 78 lb up at 14-4-0, 577 lb down and 84 lb up at 16-4-0, 577 lb down and 84 lb up at 18-4-0, 579 lb down and 89 lb up at 20-4-0, 579 lb down and 78 lb up at 22-4-0, 623 lb down and 151 lb up at 24-4-0, 617 lb down and 70 lb up at 26-4-0, 579 lb down and 67 lb up at 28-4-0, 579 lb down and 64 lb up at 30-4-0, 579 lb down and 61 lb up at 32-4-0, and 579 lb down and 58 lb up at 34-4-0, and 583 lb down and 44 lb up at 36-4-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 - Uniform Loads (plf)
 - Vert: 1-3=-70, 3-5=-70, 5-9=-70, 19-23=-20, 17-18=-20, 14-16=-20, 10-13=-20
 - Concentrated Loads (lb)
 - Vert: 23=-591(F) 24=-583(F) 25=-583(F) 26=-579(F) 27=-579(F) 28=-579(F) 29=-579(F) 30=-579(F) 31=-577(F) 32=-577(F) 33=-579(F) 34=-579(F) 35=-579(F) 36=-579(F) 37=-579(F) 38=-579(F) 39=-579(F) 40=-579(F) 41=-583(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI
210426	D2	Roof Special	3	1	Job Reference (optional)	


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:38 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-miohXnHgc5TSD_ T3HdfX Fw0112 lk/cduu2GdVfP

0-10-8	5-8-6	9-11-8	13-2-6	21-4-5	28-0-0	34-7-11	42-9-10	48-0-0
0-10-8	5-8-6	4-3-3	3-2-14	8-1-15	6-7-11	6-7-11	8-1-15	5-2-6

Scale = 1:83.7

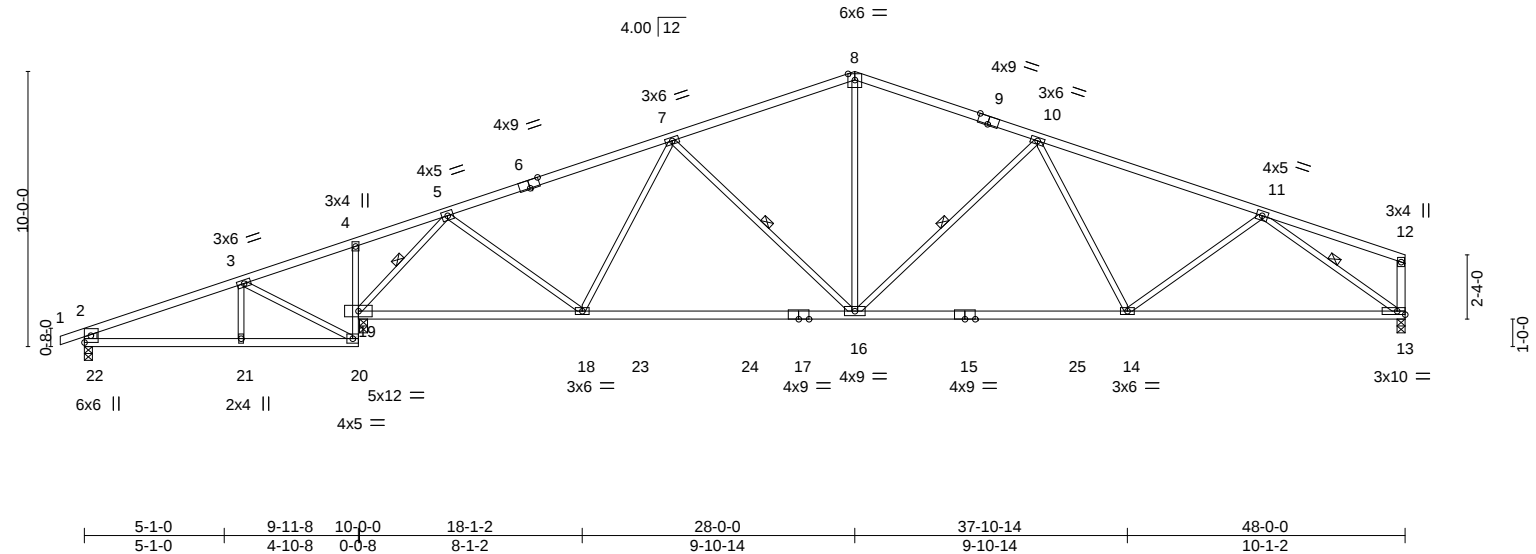

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.86	Vert(LL)	-0.29 16-18 >999 360	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.73	Vert(CT)	-0.50 16-18 >920 240				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.99	Horz(CT)	0.07 13 n/a n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.11 14-16 >999 240				
								Weight: 176 lb		FT = 10%	

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF 2100F 1.8E *Except*
 20-22: 2x4 SPF No.2, 4-20: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-22: 2x6 SPF No.2, 12-13: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
 WEBS 1 Row at midpt 5-19, 7-16, 10-16, 11-13

REACTIONS.

(size) 22=0-3-8, 19=0-3-8 (req. 0-3-12), 13=0-3-8
 Max Horz 22=189(LC 8)
 Max Uplift 22=-94(LC 4), 19=-358(LC 4), 13=-255(LC 5)
 Max Grav 22=449(LC 21), 19=2371(LC 2), 13=1792(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-452/61, 3-4=-76/282, 4-5=-47/321, 5-7=-2277/322, 7-8=-2185/360,
 8-10=-2184/349, 10-11=-2691/385, 2-22=-400/129
 BOT CHORD 21-22=-156/369, 20-21=-156/369, 19-20=-59/342, 18-19=-237/1310, 16-18=-258/2212,
 14-16=-292/2430, 13-14=-353/2103
 WEBS 3-20=-633/166, 5-19=-2345/372, 5-18=0/988, 7-18=-360/121, 7-16=-453/216,
 8-16=-95/1019, 10-16=-684/246, 11-14=0/490, 11-13=-2509/433

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- WARNING: Required bearing size at joint(s) 19 greater than input bearing size.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 22 except (jt=lb) 19=358, 13=255.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI
210426	D3	Roof Special	3	1	Job Reference (optional)	46126288

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:39 2021 Page 1

ID: H0U0y0lgM0RzQ4rpild7XzssyG-EvL3k7IJNPbJr7Qc_8u3T5z0A4mXpVtrRVZG0WJA

0-10-8 5-8-6 9-11-8 13-2-5 21-4-5 28-0-0 35-6-0
 0-10-8 5-8-6 4-3-3 3-2-13 8-2-0 6-7-11 7-6-0

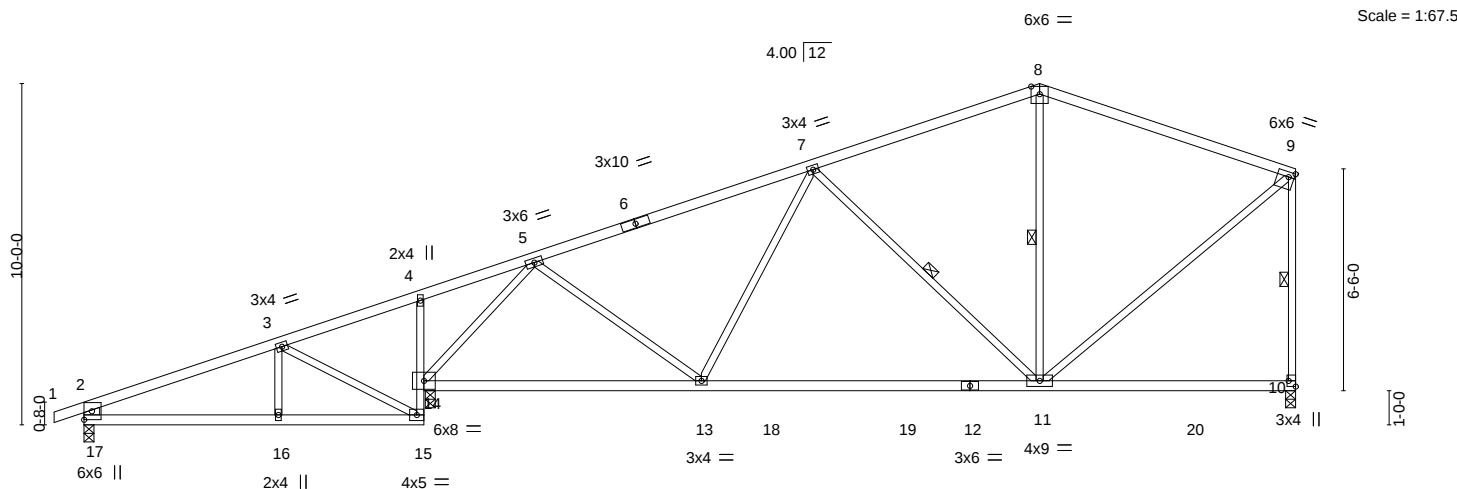

Scale = 1:67.5

Plate Offsets (X,Y)--	5-8-6 5-8-6	9-11-8 4-3-3	10-0-0 0-0-8	18-1-1 8-1-1	28-0-0 9-10-15	35-6-0 7-6-0
	[9:0-2-0,0-1-12], [10:Edge,0-2-8]					

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.99	Vert(LL)	-0.31 11-13	>994	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.90	Vert(CT)	-0.49 11-13	>625	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.95	Horz(CT)	-0.02 10	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.04 11-13	>999	240	Weight: 134 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 4-15: 2x3 SPF No.2
 WEBS 2x3 SPF No.2 *Except*
 2-17: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10'-0" oc bracing.
 WEBS 1 Row at midpt 7-11, 8-11, 9-10

REACTIONS.


(size) 17=0-3-8, 14=0-3-8, 10=0-3-8
 Max Horz 17=279(LC 5)
 Max Uplift 17=-89(LC 4), 14=-305(LC 4), 10=-148(LC 4)
 Max Grav 17=468(LC 21), 14=1731(LC 2), 10=1231(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-557/24, 5-7=-1370/222, 7-8=-888/200, 8-9=-871/207, 2-17=-416/124,
 9-10=-1103/186
 BOT CHORD 16-17=-164/413, 15-16=-164/413, 14-15=-60/343, 13-14=-208/856, 11-13=-178/1185
 WEBS 3-15=-616/168, 5-14=-1509/301, 5-13=0/473, 7-11=-618/230, 9-11=-104/998

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 17 except (jt=lb) 14=305, 10=148.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

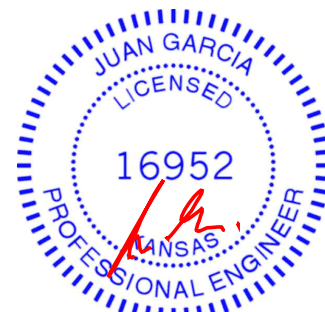

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	D4	Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:40 2021 Page 1

ID: Hr0U0y0lgMOrZQ4rpild7XzssyG-i5vRyTJx8jj9TH_rAif7cg2DfHk5Jm49xRzy2CdwU9

06/03/2021

0-10-8 5-8-6 9-11-8 17-8-5 25-1-11 30-10-5 35-6-0
0-10-8 5-8-6 4-3-3 7-8-13 7-5-6 5-8-10 4-7-11

Scale = 1:65.2

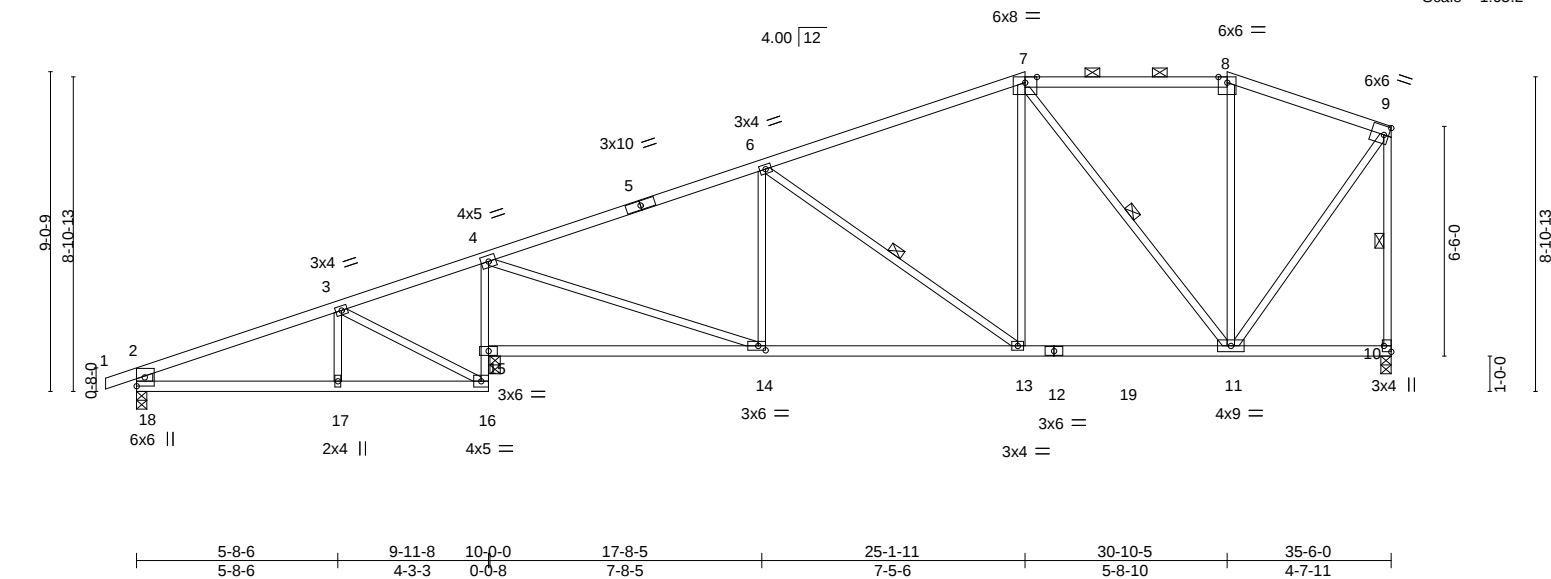


Plate Offsets (X,Y)-- [10:Edge,0-2-8], [14:0-2-8,0-1-8]		5-8-6 9-11-8 10-0-0 17-8-5 25-1-11 30-10-5 35-6-0 5-8-6 4-3-3 0-0-8 7-8-5 7-5-6 5-8-10 4-7-11	
LOADING (psf)	SPACING-	CSI.	DEFL.
TCLL 25.0	2-0-0	TC 0.70	in (loc) l/defl L/d
TCDL 10.0	Plate Grip DOL 1.15	BC 0.61	Vert(LL) -0.10 14-15 >999 360
BCLL 0.0 *	Lumber DOL 1.15	WB 0.57	Vert(CT) -0.20 14-15 >999 240
BCDL 10.0	Rep Stress Incr YES	Matrix-S	Horz(CT) -0.02 10 n/a n/a
	Code IRC2018/TPI2014		Wind(LL) 0.05 13-14 >999 240
			PLATES MT20
			GRIP 197/144
			Weight: 141 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
4-16: 2x3 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-18: 2x6 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-9 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 7-8.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 14-15.
WEBS 1 Row at midpt 6-13, 7-11, 9-10

REACTIONS.


(size) 18=0-3-8, 15=0-3-8, 10=0-3-8
Max Horz 18=292(LC 5)
Max Uplift 18=-92(LC 4), 15=-314(LC 4), 10=-173(LC 4)
Max Grav 18=472(LC 21), 15=1708(LC 2), 10=1191(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-565/26, 4-6=-1409/259, 6-7=-1112/252, 7-8=-595/188, 8-9=-650/184,
2-18=-421/128, 9-10=-1132/203
BOT CHORD 17-18=-150/406, 16-17=-150/406, 15-16=-42/317, 4-15=-1287/316, 13-14=-211/1272,
11-13=-165/982
WEBS 3-16=-553/128, 4-14=-177/1397, 6-14=-263/157, 6-13=-374/163, 7-13=-15/476,
7-11=-664/138, 9-11=-137/1016

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 18 except (jt=lb) 15=314, 10=173.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

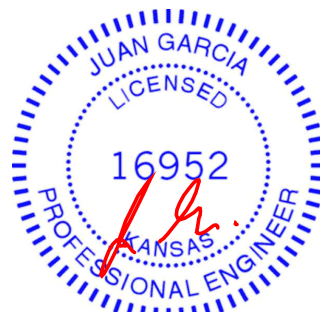

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	E1	Hip	1	1	
Job Reference (optional)					
Wheeler Lumber, Waverly, KS - 66871,					
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:42 2021 Page 1					
ID: Hr0U0yIgmOrZQ4rpild7XzssyG-AHTp9pKZv0r04RZ13PAM8uKhgTgXj0p8VOZGdV8					
0-10-8 4-3-8 8-8-5 14-8-4 21-7-11 29-4-8 34-4-5 35-6-0					
0-10-8 4-3-8 4-4-13 5-11-14 6-11-7 7-8-13 4-11-13 1-1-11					

Scale = 1:64.7

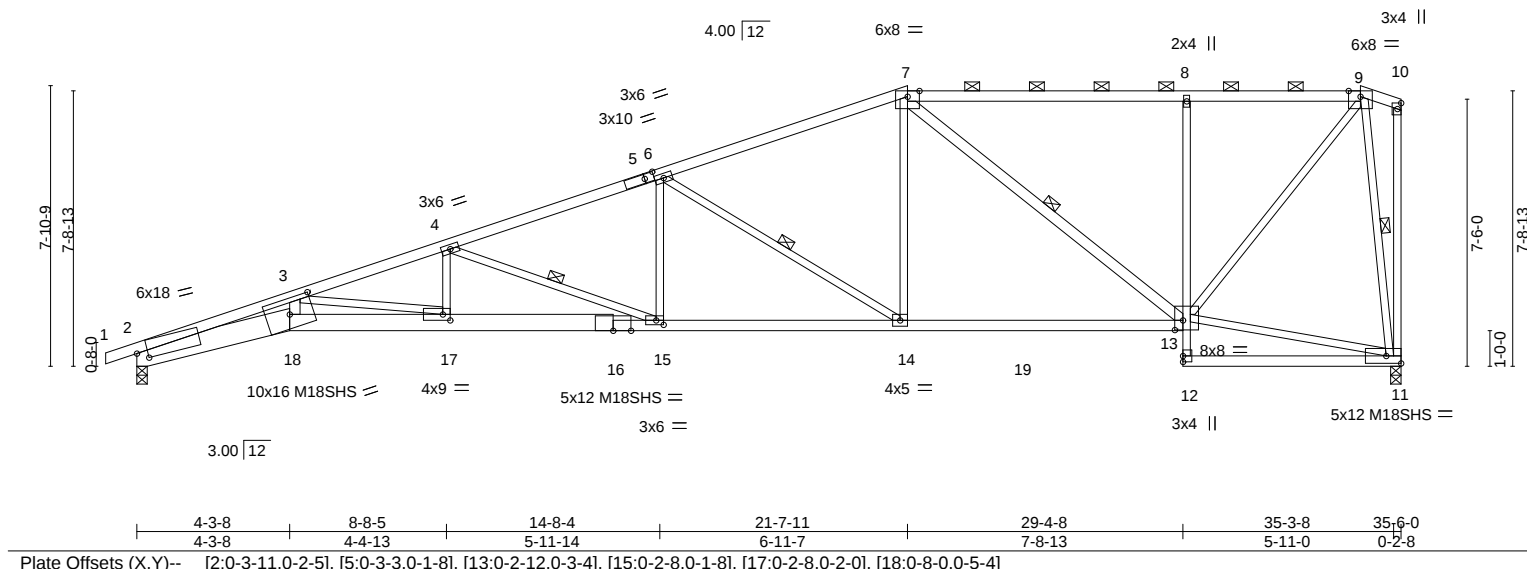



LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.94	Vert(LL)	-0.49 17-18	>862	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.85	Vert(CT)	-0.86 17-18	>493	240	M18SHS	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.92	Horz(CT)	0.35 11	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.38 17-18	>999	240	Weight: 168 lb	FT = 10%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2 *Except* 1-5: 2x4 SPF 2100F 1.8E	TOP CHORD Structural wood sheathing directly applied or 2-1-10 oc purlins, except end verticals, and 2-0-0 oc purlins (3-1-0 max.): 7-9.
BOT CHORD 2x4 SPF No.2 *Except* 2-18: 2x8 SP DSS, 16-18: 2x6 SP DSS, 8-12: 2x3 SPF No.2 13-16: 2x4 SPF 2100F 1.8E	BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 2x3 SPF No.2 *Except* 3-18, 7-13: 2x4 SPF No.2	WEBS 1 Row at midpt 4-15, 6-14, 7-13, 9-11

REACTIONS.	(size) 2=0-3-8, 11=0-3-8
Max Horz	2=317(LC 7)
Max Uplift	2=326(LC 4), 11=309(LC 4)
Max Grav	2=1707(LC 2), 11=1662(LC 2)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-7861/1443, 3-4=-5266/952, 4-6=-3615/678, 6-7=-2405/479, 7-8=-1334/330, 8-9=-1327/331
BOT CHORD	2-18=-1461/7399, 17-18=-1379/6921, 15-17=-937/4995, 14-15=-601/3381, 13-14=-340/2210, 8-13=-581/230
WEBS	3-18=-230/1532, 3-17=-1960/449, 4-17=-58/776, 4-15=-1723/360, 6-15=-39/732, 6-14=-1360/334, 7-14=-79/1063, 7-13=-1141/202, 9-13=-345/1854, 9-11=-1562/341

NOTES-
1) Unbalanced roof live loads have been considered for this design.
2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
3) Provide adequate drainage to prevent water ponding.
4) All plates are MT20 plates unless otherwise indicated.
5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
7) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=326, 11=309.
9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

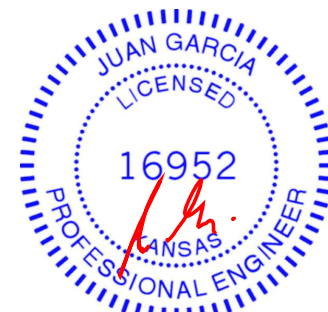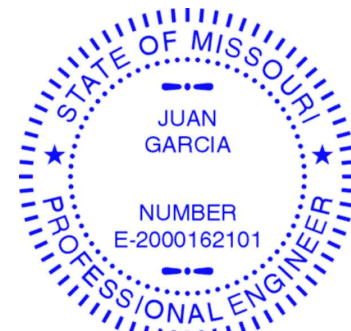

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:42 2021 Page

ID: Hr0UJlovlgMOrZ04rnild7XzssvG-eI1BN8KBqKztih8EI6hhb54Vt4E1w9t4XTDx2czGdV

-0-10-8	4-3-8	11-8-6	18-1-11	23-9-1	29-4-8	35-6-0
0-10-8	4-3-8	7-4-14	6-5-5	5-7-6	5-7-6	8-1-8

Scale = 1:63.3

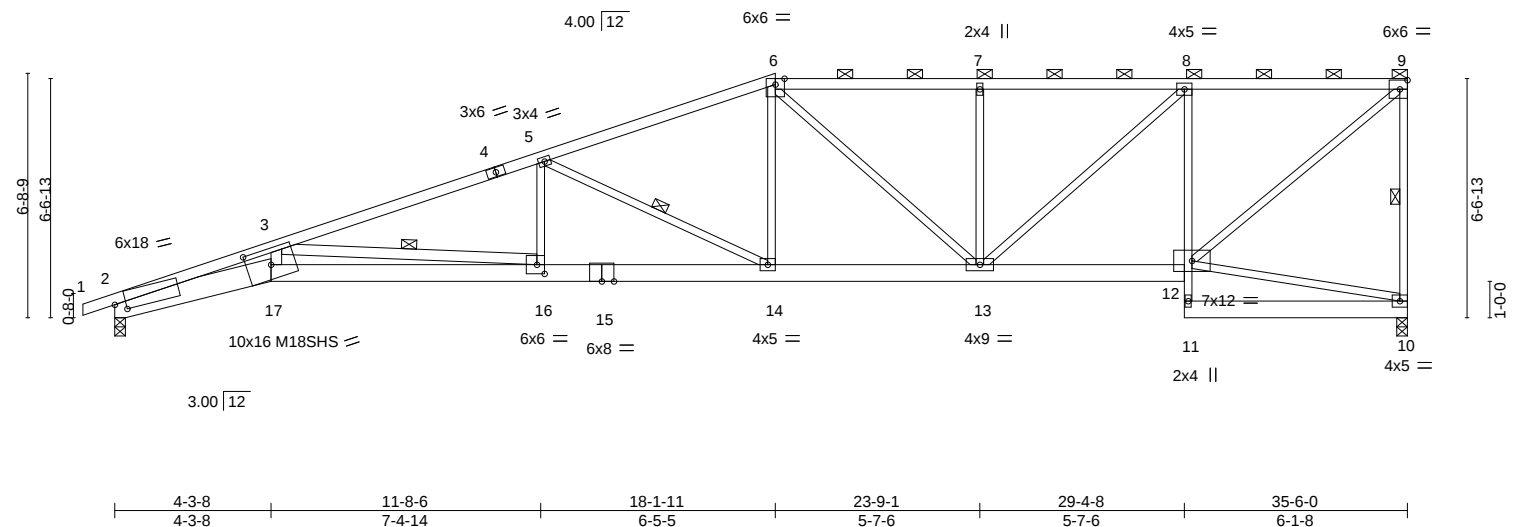


Plate Offsets (X,Y)-- [2:0-3-11,0-2-5], [16:0-2-8,0-3-0], [17:0-8-0,0-5-4]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d		PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.92	Vert(LL)	-0.54 16-17 >784 360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.83	Vert(CT)	-0.98 16-17 >431 240	M18SHS	197/144
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.79	Horz(CT)	0.37 10 n/a n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.45 16-17 >930 240	Weight: 174 lb	FT = 10%

TOP CHORD	2x4 SPF 2100F 1.8E *Except* 6-9: 2x4 SPF No.2
BOT CHORD	2x6 SPF No.2 *Except* 2-17: 2x8 SP DSS, 15-17: 2x6 SP DSS, 8-11: 2x3 SPF No.2
WEBS	2x3 SPF No.2 *Except* 3-17.3-16: 2x4 SPF No.2

TOP CHORD	Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals, and 2-0-0 oc purlins (3-3-5 max.): 6-9.
BOT CHORD	Rigid ceiling directly applied or 7-0-12 oc bracing.
WEBS	1 Row at midpt 9-10, 3-16, 5-14

(size) 10=0-3-8, 2=0-3-8
 Max Horz 2=275(LC 7)
 Max Uplift 10=-306(LC 4), 2=-330(LC 4)
 Max Grav 10=1585(LC 1), 2=1659(LC 1)

TOP CHORD 2-3=-7911/1520, 3-5=-4322/820, 5-6=-2905/590, 6-7=-2422/528, 7-8=-2419/526,
8-9=-1621/373, 9-10=-1522/334

BOT CHORD 2-17=-1521/7451, 16-17=-1441/6963, 14-16=-768/4058, 13-14=-449/2670,
12-13=-337/1626, 8-12=-1172/315

WEBS 3-17=-227/1595, 3-16=-2921/677, 5-16=-7/590, 5-14=-1536/354, 6-14=-87/769,
6-13=-345/130, 7-13=-437/174, 8-13=-207/1075, 9-12=-398/2102

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end envelope left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) All plates are MT20 plates unless otherwise indicated.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3'-6" tall by 2'-0" wide will fit between the bottom chord and any other members.
- 7) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 10=306, 2=330.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021



WARNING: Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE. Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Wheeler Lumber, Waverly, KS - 66871

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:44 2021 Page 1

ID: Hr0lIlovlqMOr7O4rpild7YzssvG-as9vngMPBxDhxyIcPXYk3mVW9xUWw000N2aj6jGdW5

-0-10-8	4-3-8	8-8-6	14-7-11	20-11-5	27-3-0	31-3-4	35-6-0
0-10-8	4-3-8	4-4-14	5-11-5	6-3-10	6-3-10	4-0-4	4-1-12

Scale: 3/16"=1'

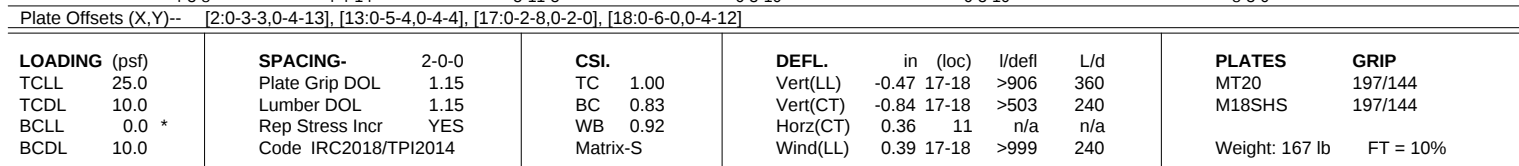

LUMBER-

TOP CHORD	2x4 SPF No.2 *Except*
	1-5: 2x4 SPF 2100F 1.8E
BOT CHORD	2x6 SPF No.2 *Except*
	2-18: 2x8 SP DSS, 16-18: 2x6 SP DSS, 7-12: 2x3 SPF No.2
WEBS	2x3 SPF No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals, and 2-0-0 oc purlins (2-2-0 max.): 5-10.
BOT CHORD	Rigid ceiling directly applied or 7-3-8 oc bracing.
WEBS	1 Row at midpt 4-15, 9-11

REACTIONS.

(size) 11=0-3-8, 2=0-3-8
 Max Horz 2=223(LC 7)
 Max Uplift 11=-302(LC 4), 2=-333(LC 4)
 Max Grav 11=1585(LC 1), 2=1659(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD	2-3=-7509/1423, 3-4=-5089/974, 4-5=-3594/705, 5-6=-3424/702, 6-7=-3421/700, 7-9=-2613/547
BOT CHORD	2-18=-1402/7046, 17-18=-1336/6685, 15-17=-921/4822, 14-15=-585/3339, 13-14=-508/2638, 7-13=-855/245
WEBS	3-18=-2515/1383, 3-17=-1893/421, 4-17=-39/601, 4-15=-1565/357, 5-15=-55/673, 5-14=-65/374, 6-14=-521/207, 7-14=-177/929, 11-13=-299/1182, 9-13=-313/1839 9-11=-2024/423

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) All plates are MT20 plates unless otherwise indicated.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 11=302, 2=333.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14, 2021



WARNING: Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1475 (Rev. 3/25/2020) BEFORE USE. Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	E4	Half Hip Girder	1	2	Job Reference (optional)	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Wheeler Lumber,		Waverly, KS - 66871,		8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:46 2021 Page 1		ID: Hr0UloylgMorZQ4rpild7XzssyG-XFGiCWNijZTJBCS* XymXnF0nhnys/ZbS58BhZCdV2		06/03/2021	
0-10-8	4-3-8	11-1-11	16-6-2	21-10-9	27-3-0	31-3-4	35-6-0		
0-10-8	4-3-8	6-10-3	5-4-7	5-4-7	5-4-7	4-0-4	4-2-12		

Scale: 3/16"=1'

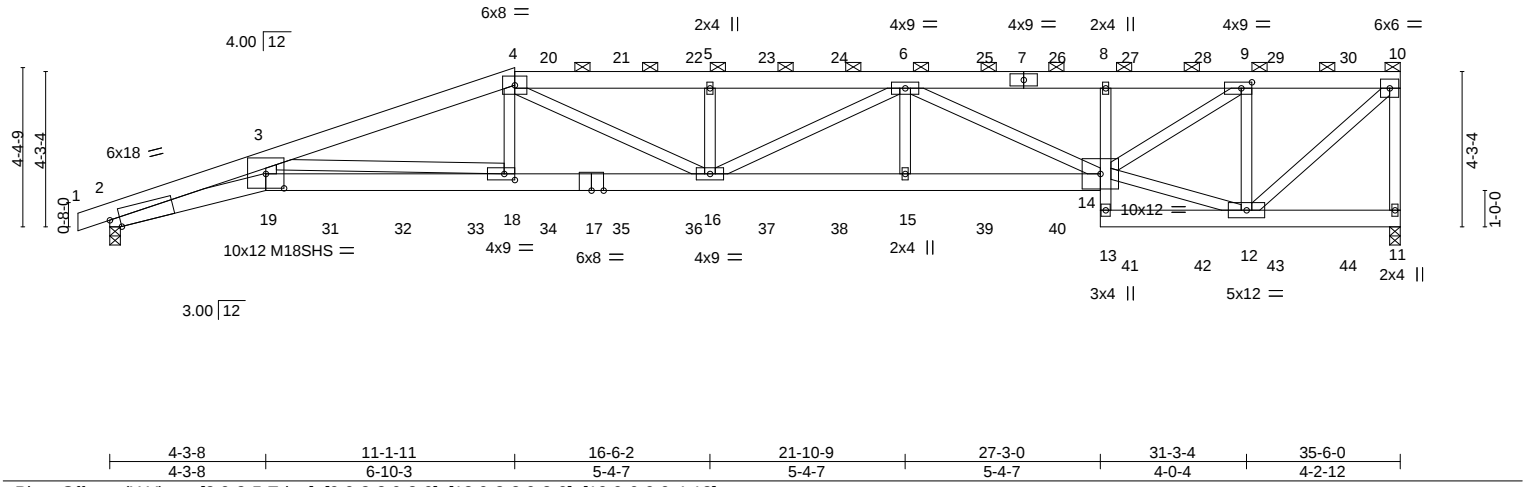



Plate Offsets (X,Y)--		[2:0-3-5,Edge], [9:0-3-8,0-2-0], [18:0-3-8,0-2-0], [19:0-6-0,0-4-12]									
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0		Plate Grip DOL 1.15		TC 0.80		Vert(LL)	-0.54 18-19	>777	360	MT20	197/144
TCDL 10.0		Lumber DOL 1.15		BC 0.80		Vert(CT)	-0.96 18-19	>438	240	M18SHS	197/144
BCLL 0.0 *		Rep Stress Incr NO		WB 0.80		Horz(CT)	0.38 11	n/a	n/a		
BCDL 10.0		Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.38 18-19	>999	240	Weight: 423 lb	FT = 10%

LUMBER-	BRACING-
TOP CHORD 2x6 SPF No.2 *Except*	TOP CHORD Structural wood sheathing directly applied or 3-5-2 oc purlins, except end verticals, and 2-0-0 oc purlins (4-9-3 max.): 4-10.
1-4: 2x6 SPF 1650F 1.4E	
BOT CHORD 2x6 SP 2400F 2.0E *Except*	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
8-13: 2x4 SPF No.2	
WEBS 2x4 SPF No.2	

REACTIONS.	(size) 11=0-3-8, 2=0-3-8
	Max Horz 2=129(LC 24)
	Max Uplift 11=-357(LC 4), 2=-393(LC 4)
	Max Grav 11=3044(LC 1), 2=3052(LC 1)

FORCES.	(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	2-3=-15708/2020, 3-4=-9377/1163, 4-5=-9634/1188, 5-6=-9632/1187, 6-8=-6758/834, 8-9=-6661/825, 9-10=-2936/379, 10-11=-2936/389
BOT CHORD	2-19=-1922/14801, 18-19=-1771/13637, 16-18=-1072/8847, 15-16=-1105/9262, 14-15=-1105/9262, 8-14=-564/196, 12-13=-74/466
WEBS	3-19=-455/3670, 3-18=-4730/709, 4-18=-128/1646, 4-16=-92/1148, 5-16=-689/239, 6-16=-73/417, 6-15=0/490, 6-14=-2810/333, 12-14=-296/2551, 9-14=-559/4603, 9-12=-3245/516, 10-12=-466/3975

- NOTES-**
- 2-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-7-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - All plates are MT20 plates unless otherwise indicated.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Bearing at joint(s) 2 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 11=357, 2=393.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and Contr to meet standard ANSI/TPI 1.

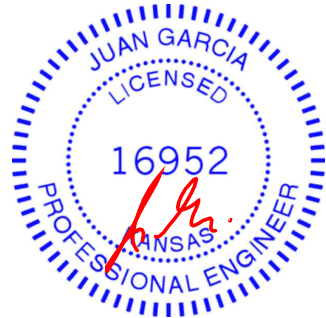

May 14, 2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	E4	Half Hip Girder	1	2	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:46 2021 Page 2
ID:Hr0UloylgMOrZQ4rpild7XzssyG-XFGiCWNijZTJBcS*XymXnF0anlms/ZbSSBbhzCdVz

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

NOTES-

- 12) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
- 13) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 119 lb down and 83 lb up at 12-0-0, 119 lb down and 83 lb up at 14-0-0, 119 lb down and 83 lb up at 16-0-0, 119 lb down and 83 lb up at 18-0-0, 119 lb down and 83 lb up at 20-0-0, 119 lb down and 83 lb up at 22-0-0, 119 lb down and 83 lb up at 24-0-0, 119 lb down and 83 lb up at 26-0-0, 120 lb down and 84 lb up at 28-0-0, 120 lb down and 84 lb up at 30-0-0, and 120 lb down and 84 lb up at 32-0-0, and 120 lb down and 84 lb up at 34-0-0 on top chord, and 442 lb down and 129 lb up at 6-0-0, 230 lb down and 44 lb up at 8-0-0, 230 lb down and 49 lb up at 10-0-0, 70 lb down at 28-0-0, 70 lb down at 30-0-0, and 70 lb down at 32-0-0, and 70 lb down at 34-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
 - Uniform Loads (plf)
 - Vert: 1-4=-70, 4-10=-70, 2-19=-20, 14-19=-20, 11-13=-20
 - Concentrated Loads (lb)
 - Vert: 15=-51 6=-111(B) 20=-111(B) 21=-111(B) 22=-111(B) 23=-111(B) 24=-111(B) 25=-111(B) 26=-111(B) 27=-115(B) 28=-115(B) 29=-115(B) 30=-115(B) 31=-442(B) 32=-230(B) 33=-230(B) 34=-51 35=-51 36=-51 37=-51 38=-51 39=-51 40=-51 41=-50(B) 42=-50(B) 43=-50(B) 44=-50(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	G1	Common Supported Gable	1	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW
Wheeler Lumber, Waverly, KS - 66871,						DEVELOPMENT SERVICES
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:47 2021 Page 1						LEE'S SUMMIT, MISSOURI

ID: Hr0UloylgMOrZQ4rpild7XzssyG-?Rq4QsOKUsbApM1B4ghml9m57ftaibnKli22CdV12

06/03/2021

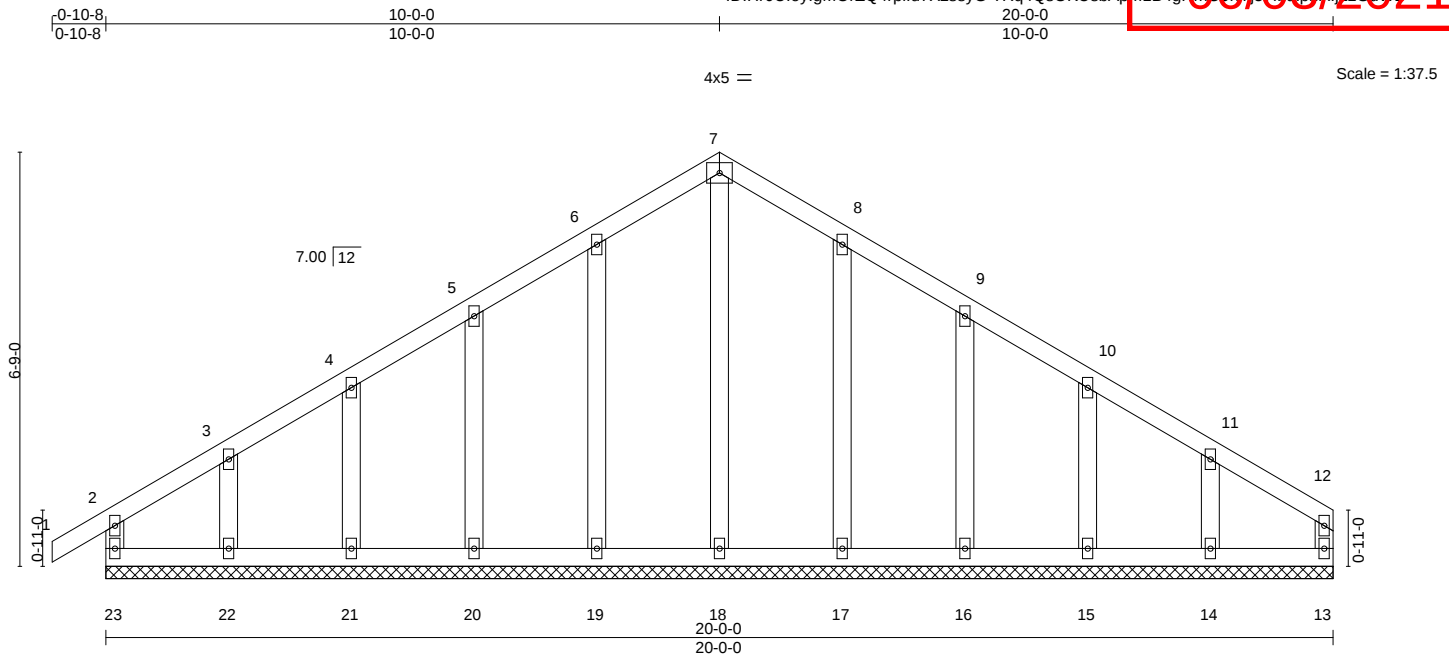

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	1	n/r	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.05	Vert(CT)	-0.00	1	n/r		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.11	Horz(CT)	0.00	13	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R					Weight: 89 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

All bearings 20-0-0.
(lb) - Max Horz 23=187(LC 5)
Max Uplift All uplift 100 lb or less at joint(s) 23, 13, 19, 20, 21, 17, 16, 15 except 22=107(LC 8), 14=101(LC 9)
Max Grav All reactions 250 lb or less at joint(s) 23, 13, 18, 19, 20, 21, 22, 17, 16, 15, 14

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Truss designed for wind loads in the plane of the truss only. For studs exposed to wind (normal to the face), see Standard Industry Gable End Details as applicable, or consult qualified building designer as per ANSI/TPI 1.
- 4) All plates are 2x4 MT20 unless otherwise indicated.
- 5) Gable requires continuous bottom chord bearing.
- 6) Truss to be fully sheathed from one face or securely braced against lateral movement (i.e. diagonal web).
- 7) Gable studs spaced at 2-0-0 oc.
- 8) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 9) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 10) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 23, 13, 19, 20, 21, 17, 16, 15 except (jt=lb) 22=107, 14=101.
- 11) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

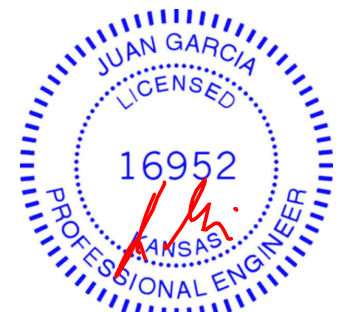

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:48 2021 Page 1

06/03/2021



LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 4-1-7 oc purlins, except end verticals.
BOT CHORD	2x4 SPF No.2		
WEBS	2x3 SPF No.2 *Except*	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
	1-8,5-6: 2x6 SP DSS		

REACTIONS. (size) 8=Mechanical, 6=0-3-8
 Max Horz 8=177(LC 5)
 Max Uplift 8=-103(LC 8), 6=-103(LC 9)
 Max Grav 8=879(LC 1), 6=879(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-1156/181, 2-3=-875/142, 3-4=-875/141, 4-5=-1156/181, 1-8=-763/149,
5-6=-763/149
BOT CHORD 7-8=-177/903, 6-7=-102/894
WEBS 3-7=-9/459, 4-7=-269/210, 2-7=-269/210



NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 8=103, 6=103.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021



WARNING – verify design parameters and READ NOTES ON THIS AND INCLUDED WELDER REFERENCE PAGE MH-1413 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for the building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2671 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	G3	Roof Special	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:49 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-xqyrYQa0Uru2gAaC5JEatm003Fb6B3CEnw2GdV0

06/03/2021

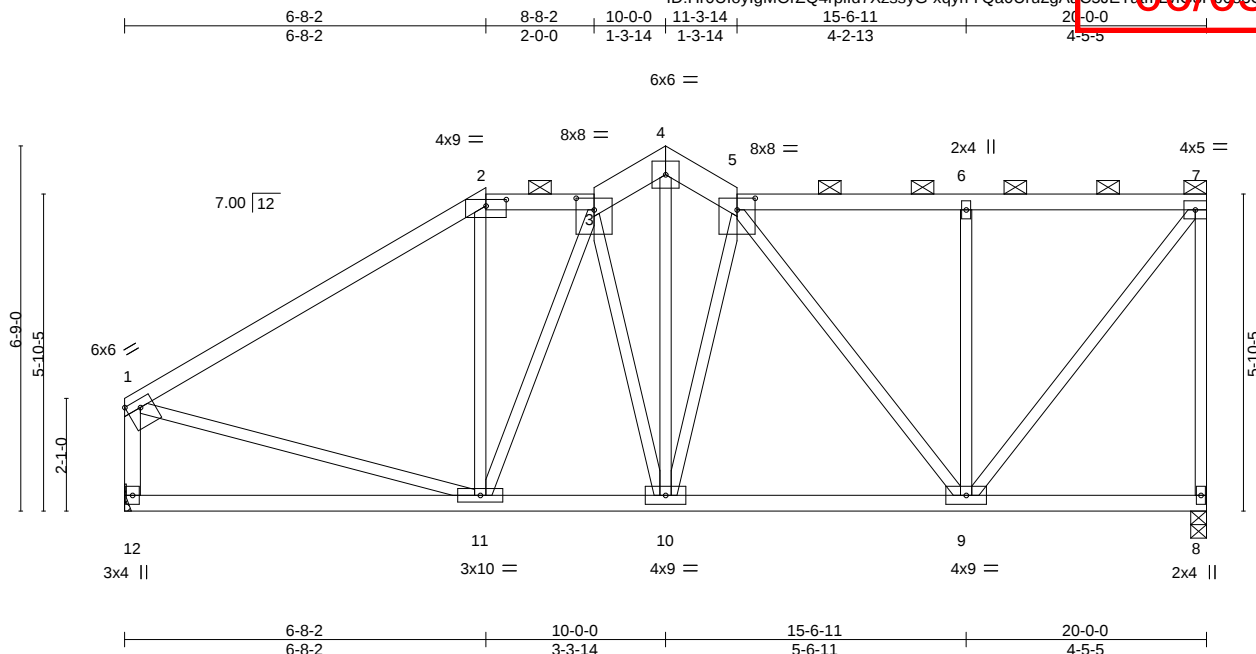


Plate Offsets (X, Y)--	[1:Edge,0-1-12], [2:0-4-8,0-1-7], [3:0-4-0,0-2-9], [5:0-4-0,0-2-9]			
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.64	in (loc) l/defl L/d
TCDL 10.0	Lumber DOL	1.15	BC 0.30	Vert(LL) -0.05 11-12 >999 360
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.40	Vert(CT) -0.11 11-12 >999 240
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Horz(CT) 0.01 8 n/a n/a
				Wind(LL) 0.02 9-10 >999 240
				PLATES MT20 GRIP 197/144
				Weight: 99 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2 *Except*
3-4,4-5: 2x6 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
1-12: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-2 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 2-3, 5-7.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 8=0-3-8, 12=Mechanical
Max Horz 12=193(LC 5)
Max Uplift 8=-35(LC 9), 12=-8(LC 8)
Max Grav 8=889(LC 1), 12=889(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-949/31, 2-3=-722/64, 3-4=-781/51, 4-5=-806/60, 5-6=-573/30, 6-7=-573/30,
7-8=-853/50, 1-12=-825/43
BOT CHORD 10-11=-58/766, 9-10=-56/775
WEBS 4-10=-20/506, 5-10=-280/47, 5-9=-333/29, 6-9=-356/89, 7-9=-32/925, 1-11=0/644

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 12.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

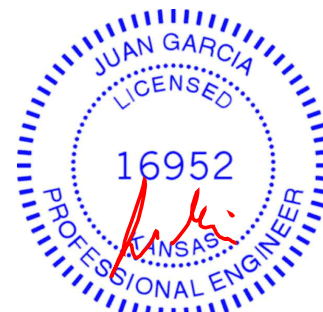

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	G4	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:49 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-xqyrrYQa0Uru2gAaC5JETatdLv1B3D M6B3C5Fny2CddW0

06/03/2021

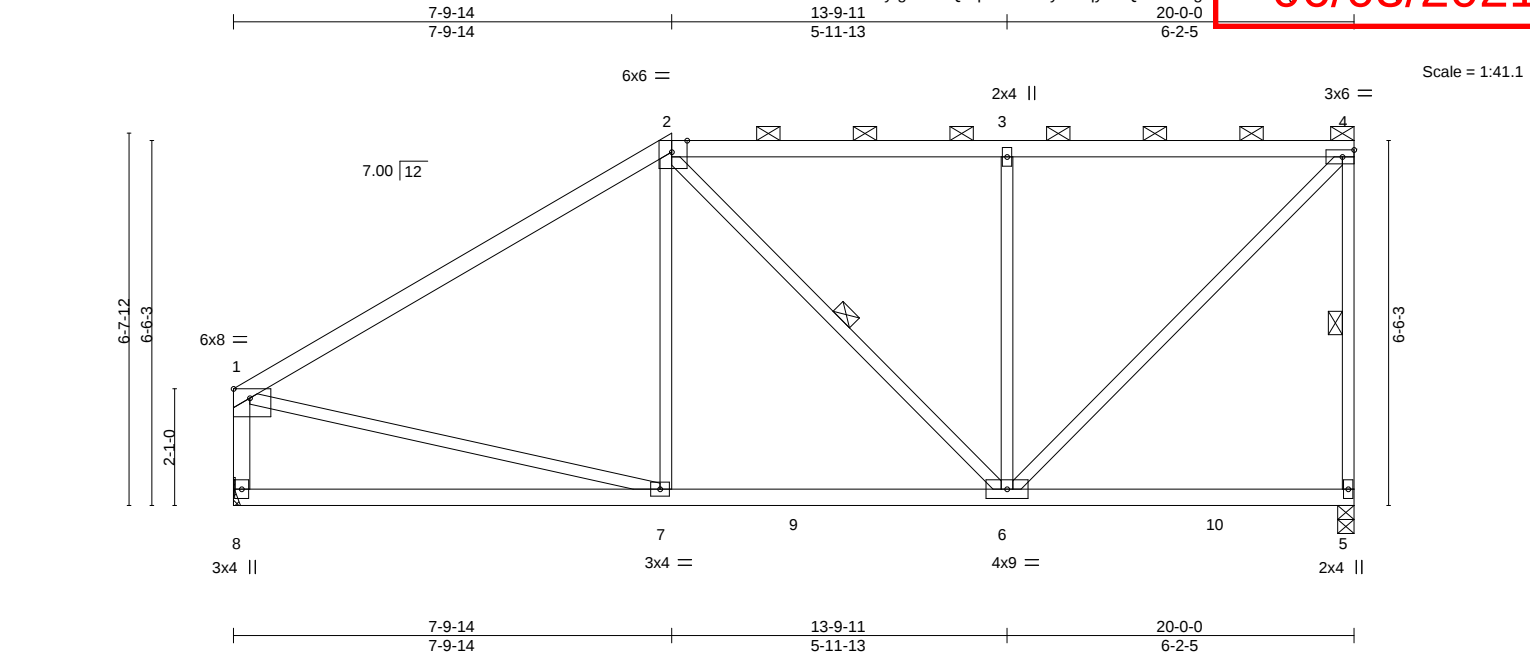


Plate Offsets (X,Y)--		[1:Edge,0-2-0], [2:0-3-5,Edge]							
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.97	Vert(LL)	-0.09	7-8	>999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.47	Vert(CT)	-0.18	7-8	>999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.48	Horz(CT)	0.01	5	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	6-7	>999	Weight: 83 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
1-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 2-4.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 4-5, 2-6

REACTIONS.


(size) 5=0-3-8, 8=Mechanical
Max Horz 8=197(LC 7)
Max Uplift 5=-62(LC 5)
Max Grav 5=963(LC 2), 8=935(LC 2)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-988/12, 2-3=-694/30, 3-4=-692/28, 4-5=-843/88, 1-8=-816/36
BOT CHORD 7-8=-187/252, 6-7=-106/775
WEBS 3-6=-503/119, 4-6=-72/976, 1-7=-8/639

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

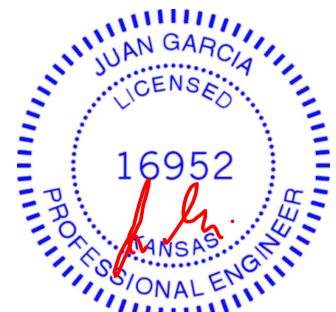

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	G5	Half Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:50 2021 Page 1
ID:Hr0UloylgMOrZQ4rpild7XzssyG-P0WD2uRCnnzlgqImnoqT0nFvW100onJGN97KMZGJW?

06/03/2021

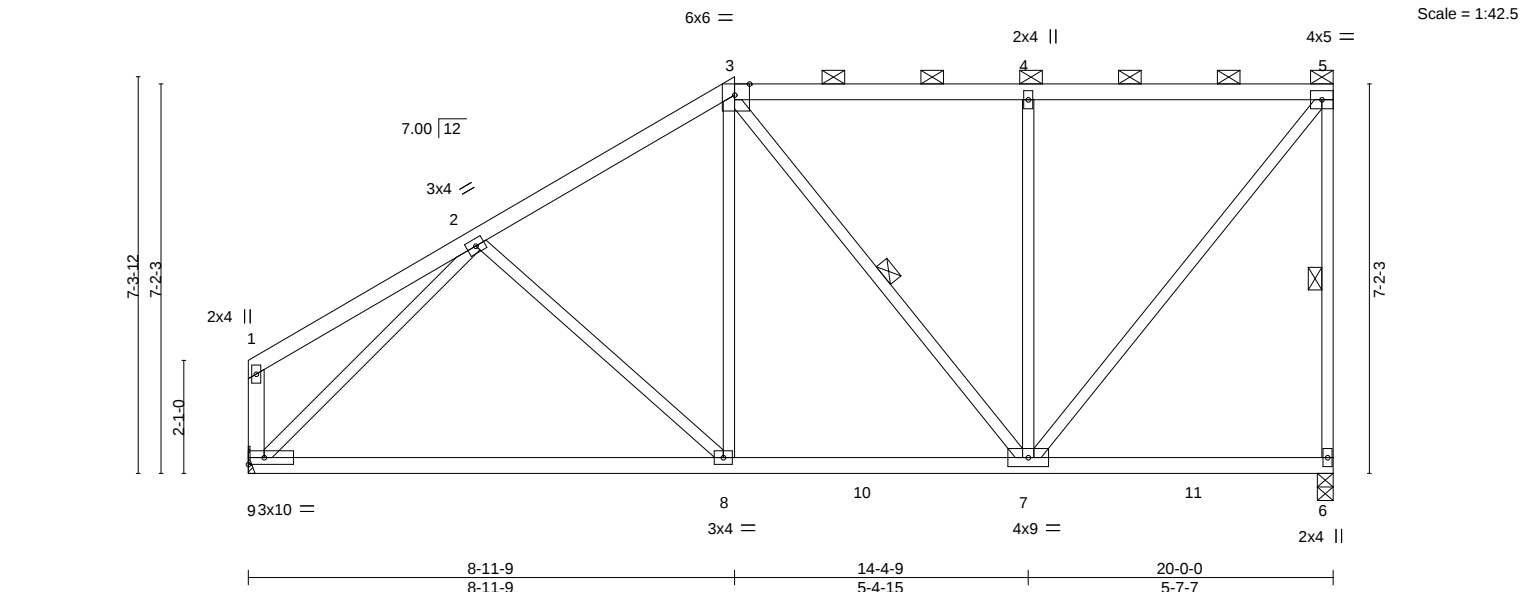


Plate Offsets (X,Y)-- [3:0-3-5,Edge]							
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.55	Vert(LL)	-0.16	8-9	>999
TCDL 10.0	Lumber DOL	1.15	BC 0.60	Vert(CT)	-0.32	8-9	>750
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.75	Horz(CT)	0.02	6	n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.02	7-8	>999
				PLATES		GRIP	
				MT20		197/144	
				Weight: 89 lb		FT = 10%	

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 5-11-12 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 3-5.
BOT CHORD	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x3 SPF No.2 *Except*	WEBS	1 Row at midpt 5-6, 3-7
	1-9: 2x4 SPF No.2		


REACTIONS.	
(size)	6=0-3-8, 9=Mechanical
Max Horz	9=219(LC 7)
Max Uplift	6=-65(LC 5)
Max Grav	6=967(LC 2), 9=943(LC 13)

FORCES.	
(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.	
TOP CHORD	2-3=-890/38, 3-4=-590/45, 4-5=-589/44, 5-6=-853/88
BOT CHORD	8-9=-158/780, 7-8=-101/732
WEBS	3-8=0/349, 3-7=-256/19, 4-7=-459/114, 5-7=-74/928, 2-9=-900/28

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members, with BCDL = 10.0psf.
 - 6) Refer to girder(s) for truss to truss connections.
 - 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6.
 - 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 9) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.



May 14,2021

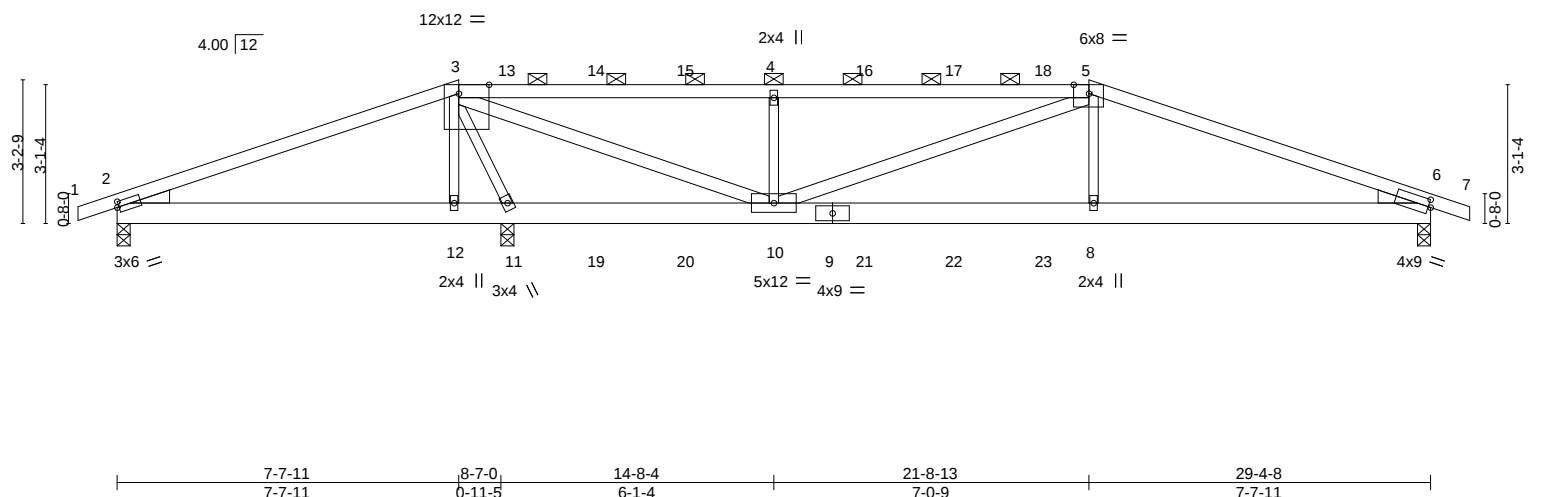

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.98	Vert(LL)	-0.12 8-10	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.67	Vert(CT)	-0.23 8-10	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.82	Horz(CT)	0.02 6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.10 8-10	>999	240	Weight: 117 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF 2100F 1.8E *Except*
3-5: 2x4 SPF No.2

BOT CHORD 2x6 SPF No.2

WEBS 2x3 SPF No.2 *Except*
3-10,5-10: 2x4 SPF No.2

WEDGE
Left: 2x4 SP No.3 , Right: 2x4 SP No.3

BRACING-


TOP CHORD Structural wood sheathing directly applied or 3-9-5 oc purlins, except
2-0-0 oc purlins (3-1-9 max.): 3-5.

BOT CHORD Rigid ceiling directly applied or 5-7-3 oc bracing.

REACTIONS. (size) 2=0-3-8, 11=0-3-8 (req. 0-3-14), 6=0-3-8
Max Horz 2=-49(LC 34)
Max Uplift 2=-195(LC 25), 11=-548(LC 4), 6=-287(LC 5)
Max Grav 2=205(LC 18), 11=2476(LC 1), 6=1182(LC 22)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-109/695, 3-4=-1455/347, 4-5=-1458/349, 5-6=-2439/539
BOT CHORD 2-12=-624/162, 11-12=-629/162, 10-11=-1460/366, 8-10=-429/2177, 6-8=-431/2198
WEBS 3-12=-48/256, 3-10=-646/3112, 4-10=-745/304, 5-10=-799/216, 5-8=-45/574,
3-11=-2270/556

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - Provide adequate drainage to prevent water ponding.
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - WARNING: Required bearing size at joint(s) 11 greater than input bearing size.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 2=195, 11=548, 6=287.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 101 lb down and 84 lb up at 8-8-4, 96 lb down and 55 lb up at 10-8-4, 96 lb down and 55 lb up at 12-8-4, 96 lb down and 55 lb up at 14-8-4, 96 lb down and 55 lb up at 16-8-4, and 96 lb down and 55 lb up at 18-8-4, and 96 lb down and 55 lb up at 20-8-4 on top chord, and 305 lb down and 147 lb up at 7-7-11, 32 lb down at 10-8-4, 32 lb down at 12-8-4, 32 lb down at 14-8-4, 32 lb down at 16-8-4, 32 lb down at 18-8-4, and 32 lb down at 20-8-4, and 305 lb down and 147 lb up at 21-8-13 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- Continue on page 2

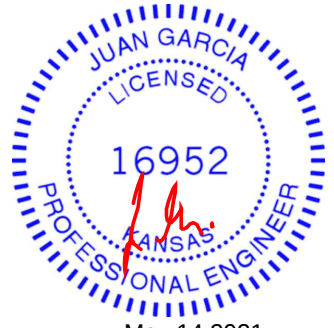

May 14, 2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	H1	Hip Girder	1	1	
					Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:52 2021 Page 2
ID:Hr0UloylgMOrZQ4rpild7XzssyG-LPezTZSSJPESv7v9tDtx5CvB-60E6to/dt58NFZGd/z

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

06/03/2021

LOAD CASE(S) Standard

1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15

Uniform Loads (plf)

Vert: 1-3=-70, 3-5=-70, 5-7=-70, 2-6=-20

Concentrated Loads (lb)

Vert: 12=-305(B) 10=-24(B) 4=-44(B) 8=-305(B) 13=-45(B) 14=-44(B) 15=-44(B) 16=-44(B) 17=-44(B) 18=-44(B) 19=-24(B) 20=-24(B) 21=-24(B) 22=-24(B) 23=-24(B)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	H2	Hip	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:52 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-qbCLgvT54iMJXHLRwOAdC11W02188i3mCdyZedV

0-10-8 5-3-7 11-1-11 18-2-13 23-8-1 29-4-8 0-10-8
0-10-8 5-3-7 5-10-5 7-1-2 5-5-4 5-8-7 0-10-8

Scale = 1:51.6

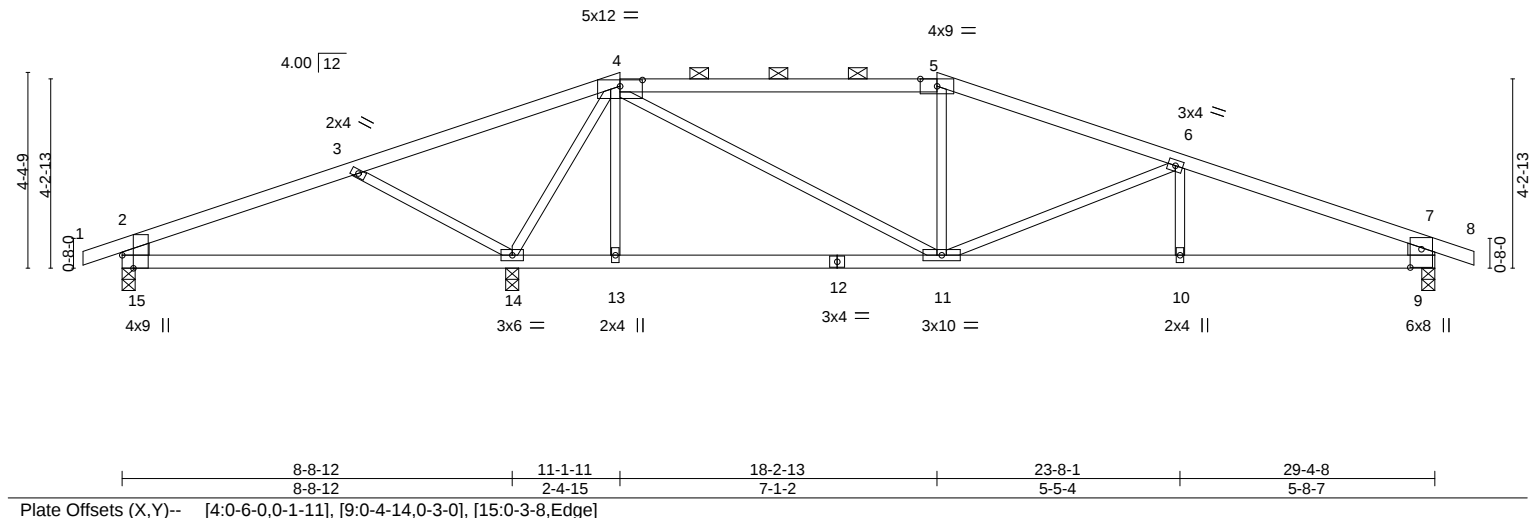

LOADING (psf)		SPACING-		CSI.		DEFL.		PLATES		GRIP	
TCLL	25.0	Plate Grip DOL	1.15	TC	0.93	Vert(LL)	-0.13 14-15 >796 360	MT20		197/144	
TCDL	10.0	Lumber DOL	1.15	BC	0.69	Vert(CT)	-0.25 14-15 >398 240				
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.73	Horz(CT)	0.02 9 n/a n/a				
BCDL	10.0	Code IRC2018/TPI2014		Matrix-S		Wind(LL)	0.09 10-11 >999 240				


LUMBER-
TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-15, 7-9: 2x8 SP DSS

BRACING-
TOP CHORD Structural wood sheathing directly applied or 2-2-0 oc purlins, except end verticals, and 2-0-0 oc purlins (2-2-0 max.): 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 6-0-0 oc bracing: 14-15.

REACTIONS. (size) 15=0-3-8, 14=0-3-8, 9=0-3-8
Max Horz 15=54(LC 8)
Max Uplift 15=-73(LC 4), 14=-268(LC 4), 9=-199(LC 5)
Max Grav 15=291(LC 21), 14=1631(LC 1), 9=918(LC 22)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-3=-59/296, 3-4=-131/715, 4-5=-1004/240, 5-6=-1101/222, 6-7=-1543/282, 7-9=-814/222
BOT CHORD 14-15=-254/103, 10-11=-204/1383, 9-10=-204/1383
WEBS 3-14=-581/249, 4-14=-1372/265, 4-11=-190/997, 6-11=-428/170

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 15 except (jt=lb) 14=268, 9=199.
 - 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 8) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

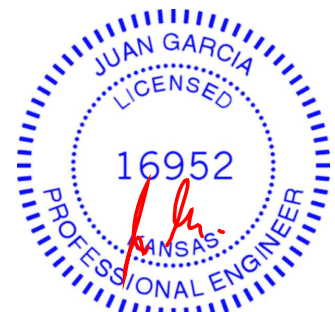

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.


Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	H3	Common Girder	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871, 8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:54 2021 Page 1
ID:Hr0U0y0lgM0rZQ4rpild7XzssyG-InlkuFUjr0UA8F3X?evFAd6bvkckp1m7AS6z6d0/2 30-3-0 0-10-8
06/03/2021
Scale = 1:48.8

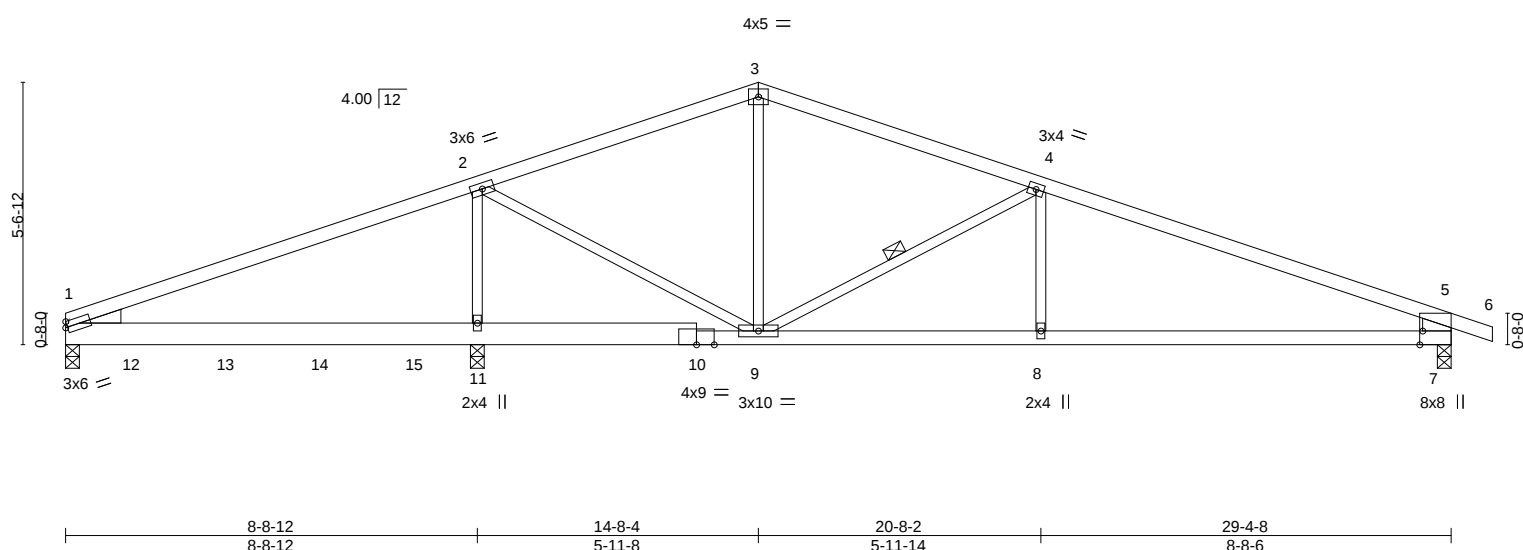

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.75	Vert(LL)	-0.21 1-11	>498	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.80	Vert(CT)	-0.38 1-11	>274	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.41	Horz(CT)	0.02 7	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.04 8	>999	240	Weight: 100 lb	FT = 10%

LUMBER-
TOP CHORD 2x4 SPF 2100F 1.8E
BOT CHORD 2x6 SPF 1650F 1.4E *Except*
7-10: 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
5-7: 2x8 SP DSS

BRACING-
TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.
WEBS 1 Row at midpt 4-9

WEDGE
Left: 2x4 SP No.3


REACTIONS. (size) 1=0-3-8, 11=0-3-8, 7=0-3-8
Max Horz 1=85(LC 12)
Max Uplift 11=-44(LC 4), 7=-222(LC 26)
Max Grav 1=641(LC 21), 11=2186(LC 1), 7=875(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-0/524, 2-3=-501/251, 3-4=-491/241, 4-5=-1341/324, 5-7=-792/270
BOT CHORD 1-11=-377/69, 9-11=-377/71, 8-9=-226/1177, 7-8=-226/1177
WEBS 2-11=-1322/304, 2-9=-126/876, 4-9=-908/217, 4-8=0/325

- NOTES-**
- Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 11 except (jt=lb) 7=222.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 236 lb down at 1-4-8, 236 lb down at 3-4-8, and 236 lb down at 5-4-8, and 236 lb down at 7-4-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard
1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-3=-70, 3-5=-70, 5-6=-70, 1-7=-20

Continued on page 2

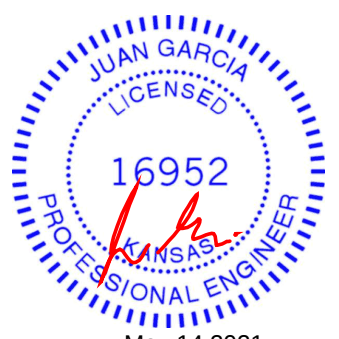

May 14, 2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	H3	Common Girder	1	1	
					Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:54 2021 Page 2
ID:Hr0UloylgMOrZQ4rpild7XzssyG-InlkuFUjr0UA8F3X?evFAc6pHwKckblm7ASbz6d/z

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

46126391

06/03/2021

LOAD CASE(S) Standard
Concentrated Loads (lb)
Vert: 12=-236(F) 13=-236(F) 14=-236(F) 15=-236(F)

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	H4	COMMON GIRDER	1	3		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:55 2021 Page 1
ID:Hr0UloylgMOrZQ4rpild7XzssyG-m_J65bULcKc1mtekyLQsigVhKw7Z2XqJfz2CdVw
46126392
06/03/2021

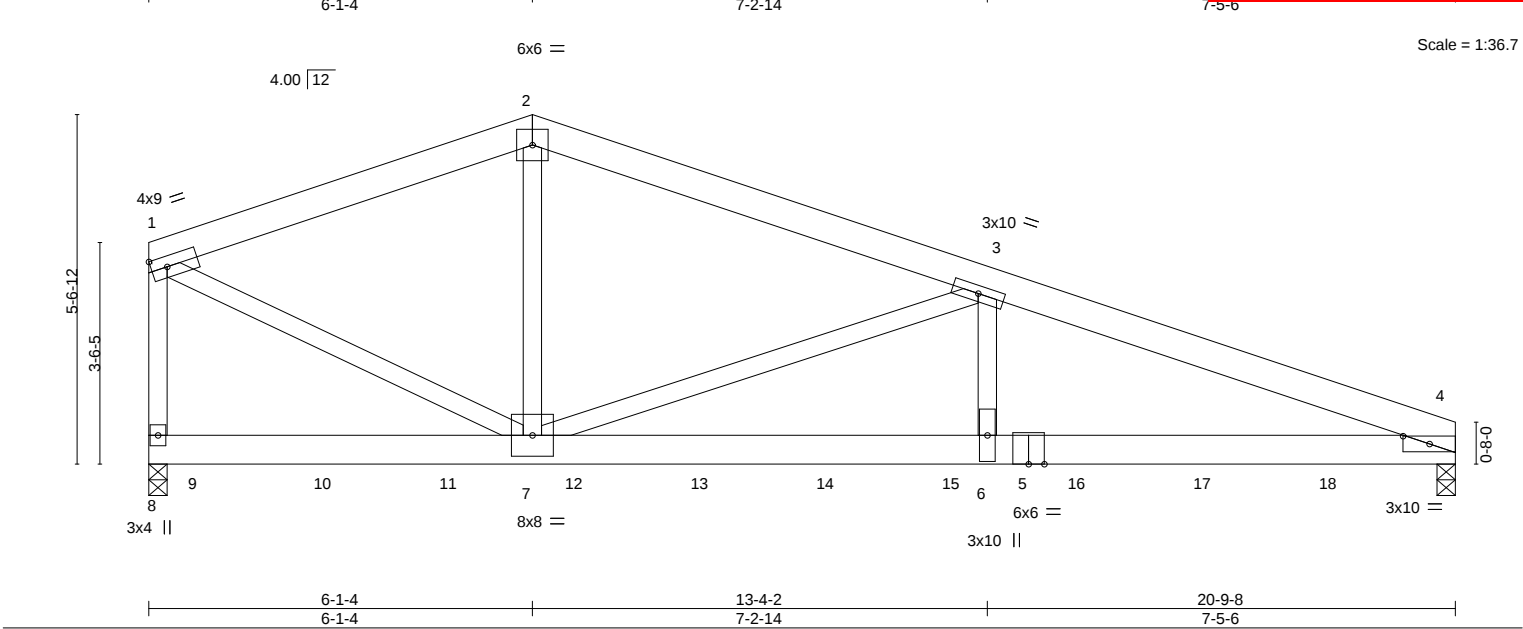


Plate Offsets (X,Y)-- [4:0-5-1,0-1-8]									
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.40	Vert(LL)	-0.12 4-6	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.54	Vert(CT)	-0.22 4-6	>999	240		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.44	Horz(CT)	0.04 4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.08 4-6	>999	240	Weight: 344 lb	FT = 10%

LUMBER-		BRACING-	
TOP CHORD	2x6 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD	2x6 SP 2400F 2.0E	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS	2x4 SPF No.2		

REACTIONS.		(size) 4=0-3-8, 8=0-3-8
		Max Horz 8=-112(LC 6)
		Max Uplift 4=-617(LC 5), 8=-24(LC 5)
		Max Grav 4=4970(LC 1), 8=5500(LC 1)

FORCES.		(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD	1-2=-5161/467, 2-3=-5177/454, 3-4=-10810/1310, 1-8=-4272/387	
BOT CHORD	6-7=-1167/10104, 4-6=-1167/10104	
WEBS	2-7=-139/2823, 3-7=-5640/975, 3-6=-405/3470, 1-7=-441/5327	

- NOTES-**
- 3-ply truss to be connected together with 10d (0.131"x3") nails as follows:
Top chords connected as follows: 2x6 - 2 rows staggered at 0-9-0 oc, 2x4 - 1 row at 0-9-0 oc.
Bottom chords connected as follows: 2x6 - 2 rows staggered at 0-8-0 oc.
Webs connected as follows: 2x4 - 1 row at 0-9-0 oc.
 - All loads are considered equally applied to all plies, except if noted as front (F) or back (B) face in the LOAD CASE(S) section. Ply to ply connections have been provided to distribute only loads noted as (F) or (B), unless otherwise indicated.
 - Unbalanced roof live loads have been considered for this design.
 - Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8 except (jt=lb) 4=617.
 - This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 918 lb down at 0-9-8, 915 lb down at 2-9-8, 869 lb down and 28 lb up at 4-9-8, 859 lb down and 123 lb up at 6-9-8, 859 lb down and 123 lb up at 8-9-8, 859 lb down and 123 lb up at 10-9-8, 859 lb down and 123 lb up at 12-9-8, 859 lb down and 123 lb up at 14-9-8, and 859 lb down and 123 lb up at 16-9-8, and 859 lb down and 123 lb up at 18-9-8 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.

LOAD CASE(S) Standard
May 14,2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	H4	COMMON GIRDER	1	3	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:55 2021 Page 2
ID:Hr0UloylgMOrZQ4rpild7XzssyG-m_J65bULcKc1mtekyLQsigVhKwT7Z2Xqj_s2CdVw

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

46126392

06/03/2021

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-4=-70, 4-8=-20
Concentrated Loads (lb)
Vert: 9=-872(F) 10=-869(F) 11=-869(F) 12=-859(F) 13=-859(F) 14=-859(F) 15=-859(F) 16=-859(F) 17=-859(F) 18=-859(F)

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J1	Diagonal Hip Girder	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:57 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-iMRsWHWb7xsl?uc6gmS6dF04f7SB77J3W428Z6dyU

06/03/2021

Scale = 1:17.2

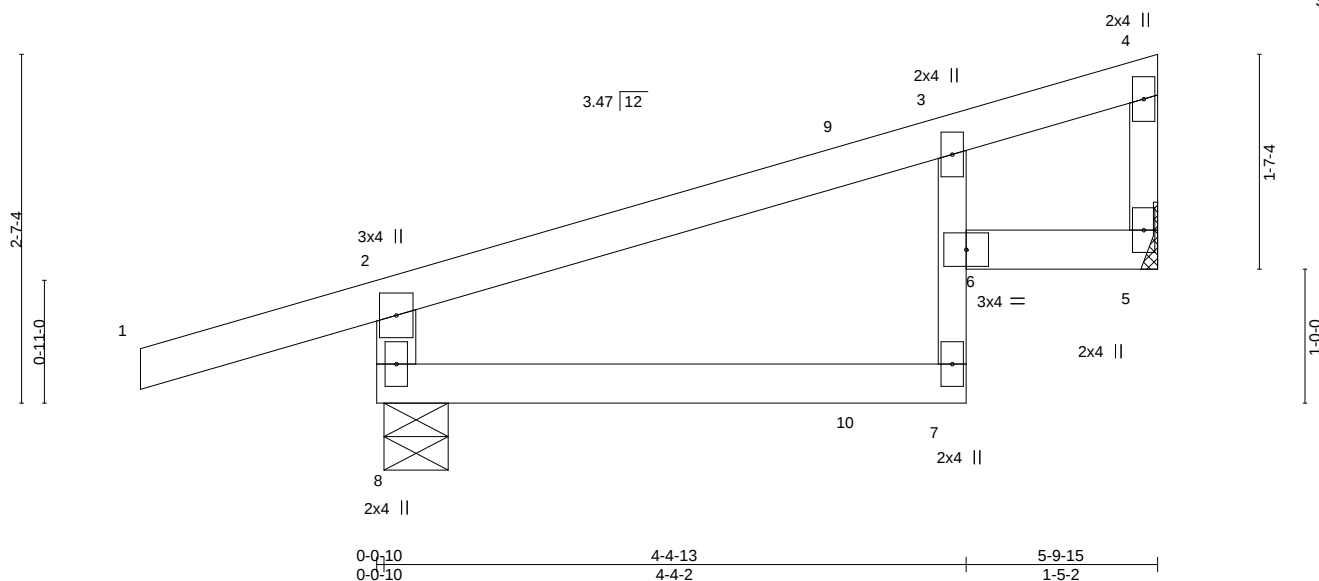

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.36	Vert(LL)	-0.02	7	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.42	Vert(CT)	-0.04	7	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	0.01	5	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.02	7	>999	240	
								Weight: 18 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 3-7: 2x3 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 4-5: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-9-15 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 8=0-5-12, 5=Mechanical
 Max Horz 8=91(LC 5)
 Max Uplift 8=-135(LC 4), 5=-57(LC 8)
 Max Grav 8=410(LC 1), 5=232(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-8=-366/161

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5 except (jt=lb) 8=135.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 36 lb up at 3-7-3, and 110 lb down and 70 lb up at 3-9-12 on top chord, and 7 lb down and 11 lb up at 3-7-3, and 16 lb down at 3-9-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
 Vert: 1-2=-70, 2-4=-70, 7-8=-20, 5-6=-20
- Concentrated Loads (lb)
 Vert: 10=-6(F=2, B=-7)

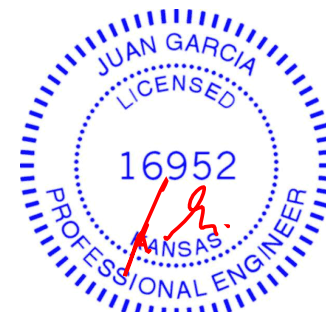

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J2	Jack-Open	1	1	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:04 2021 Page 1


ID: Hn0UoylgMOrZQ4rpild7XzssyG-?iMW_gb_U5kmLzqSak5lak30Nw8HajJmYioZz6d7p

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
46126394

06/03/2021



Scale = 1:12.7

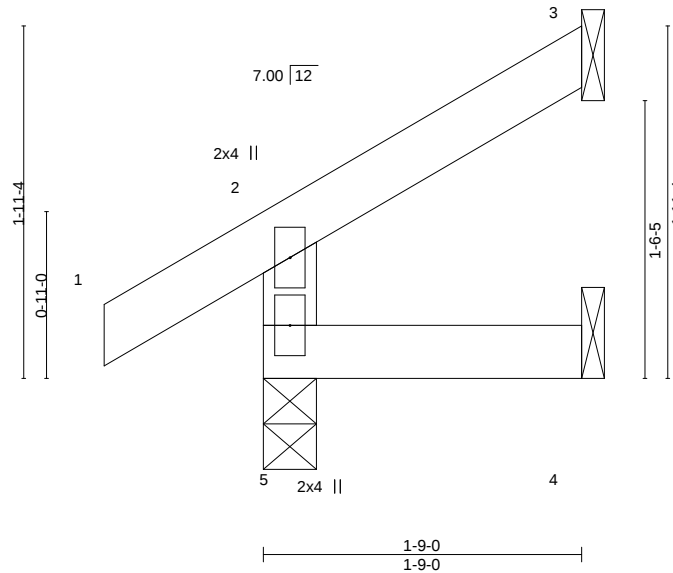

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	-0.00	5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	
									Weight: 6 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-9-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=49(LC 8)
Max Uplift 5=-14(LC 8), 3=-34(LC 8), 4=-2(LC 8)
Max Grav 5=166(LC 1), 3=44(LC 15), 4=29(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3, 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

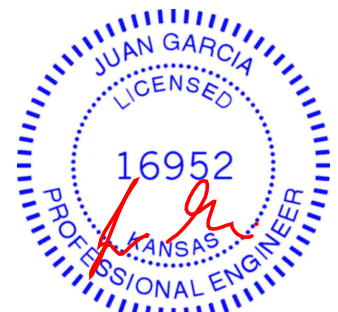

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J3	Jack-Open	3	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:05 2021 Page 1

ID: Hr0UoYlgMOrZQ4rpild7XzssyG-TvwuB0ccFOscz7P8Sc_7xXc4NfjkkcT0y1FL22Cdvm

06/03/2021

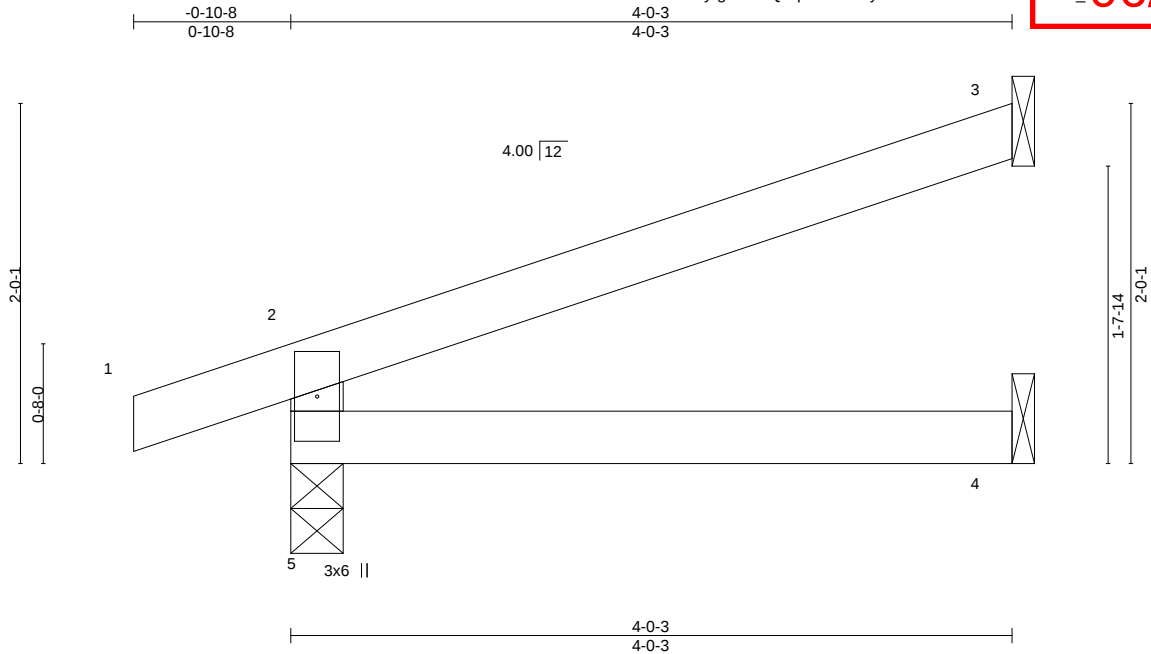

Scale = 1:12.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.21	Vert(LL)	-0.01	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	-0.02	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	
								Weight: 11 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-3 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=63(LC 4)
Max Uplift 5=66(LC 4), 3=55(LC 8)
Max Grav 5=252(LC 1), 3=117(LC 1), 4=71(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J4	Jack-Open	4	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:06 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-x5UGPMdEOi_TaH_r97bf9gim_VBuCsQlptRZGdVl

06/03/2021

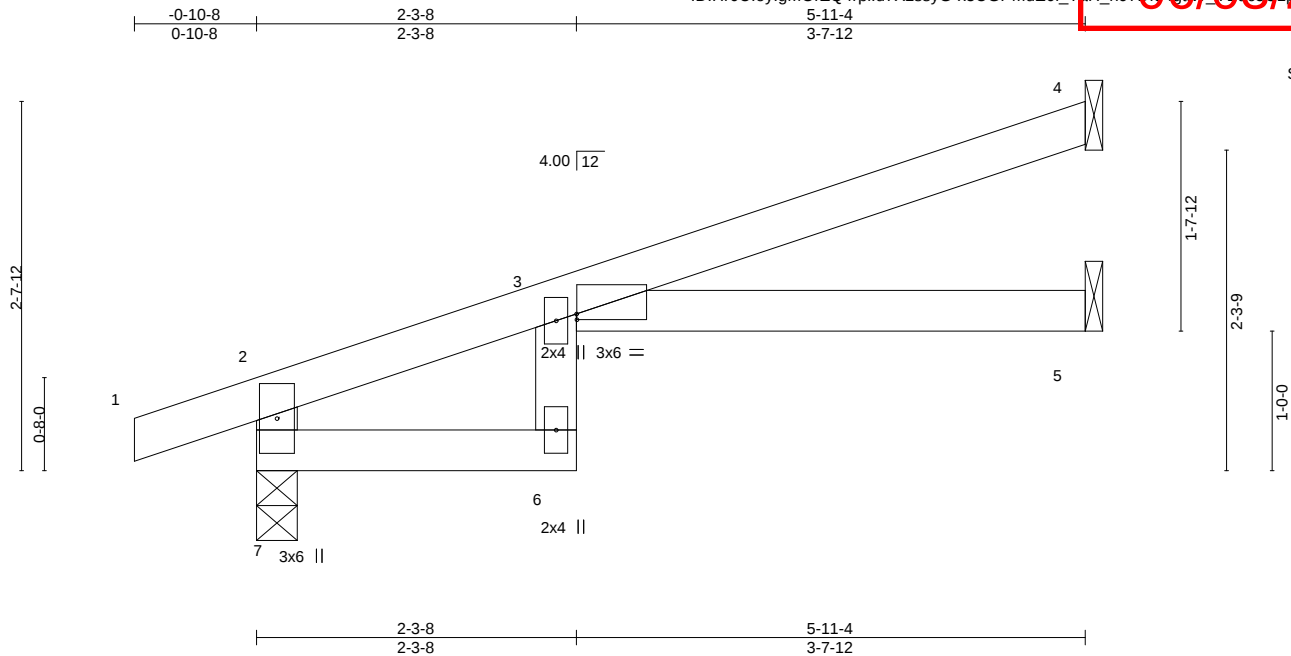


Plate Offsets (X,Y)-- [3:Edge,0-0-8]												
LOADING (psf)		SPACING- 2-0-0		CSI.		DEFL. in (loc) l/defl L/d				PLATES GRIP		
TCLL	25.0	Plate Grip DOL	1.15	TC	0.59	Vert(LL)	-0.09	3-5	>782	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.44	Vert(CT)	-0.16	3-5	>426	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.01	Horz(CT)	0.09	5	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-P		Wind(LL)	0.09	3-5	>751	240	Weight: 16 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


(size) 7=0-3-8, 4=Mechanical, 5=Mechanical
Max Horz 7=89(LC 4)
Max Uplift 7=-76(LC 4), 4=-64(LC 8), 5=-1(LC 8)
Max Grav 7=336(LC 1), 4=159(LC 1), 5=100(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-7=-344/106

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 7, 4, 5.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

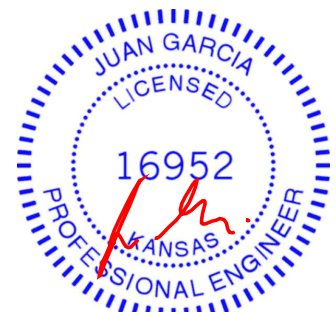

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI
210426	J5	Jack-Open	1	1	Job Reference (optional)	46126397

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:07 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-PH2ecietn06KCRZ1FteSCNcs99UuHkKphHSMPZcdW

06/03/2021

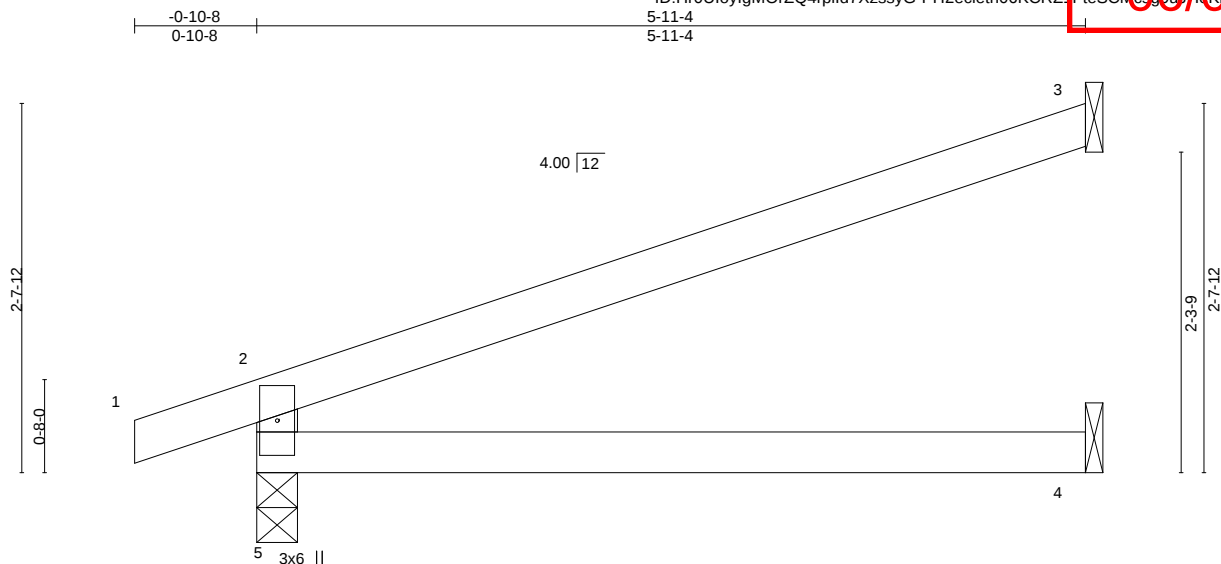

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.52	Vert(LL)	-0.05	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.31	Vert(CT)	-0.11	4-5	>620	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.03	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.03	4-5	>999	240	
								Weight: 15 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=63(LC 4)
Max Uplift 5=32(LC 4), 3=47(LC 8)
Max Grav 5=336(LC 1), 3=180(LC 1), 4=108(LC 3)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-5=-292/78

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

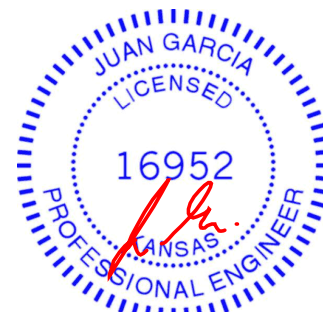

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J6	Jack-Closed	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:07 2021 Page 1

ID: H0U0yIgmOrZQ4rpId7XzssyG-PH2eci2n06KCRZ1FteSCMcu_90J4KphHSMPZcdW

06/03/2021

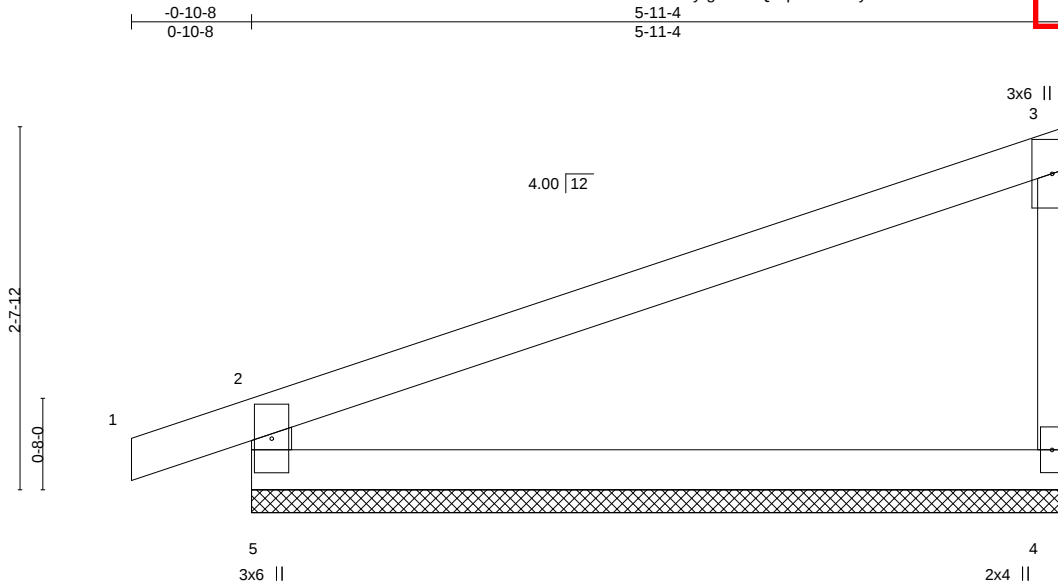

Scale = 1:16.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.44	Vert(LL)	-0.01	1	n/r	120	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.27	Vert(CT)	0.01	1	n/r	120		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.00	4	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						Weight: 17 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2 *Except*
 3-4: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=5-11-4, 4=5-11-4
 Max Horz 5=108(LC 5)
 Max Uplift 5=-86(LC 4), 4=-55(LC 8)
 Max Grav 5=334(LC 1), 4=250(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-293/129

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J7	Diagonal Hip Girder	2	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:08 2021 Page 1

ID: Hr0U0y0lgMOrZQ4rpild7XzssyG-tUc0q1eVYJfBqb7Eha9hka9zVME305aVW0W0W0XZ6d006/03/2021

-1-9-3
1-9-3

7-8-10
7-8-10

Scale = 1:20.4

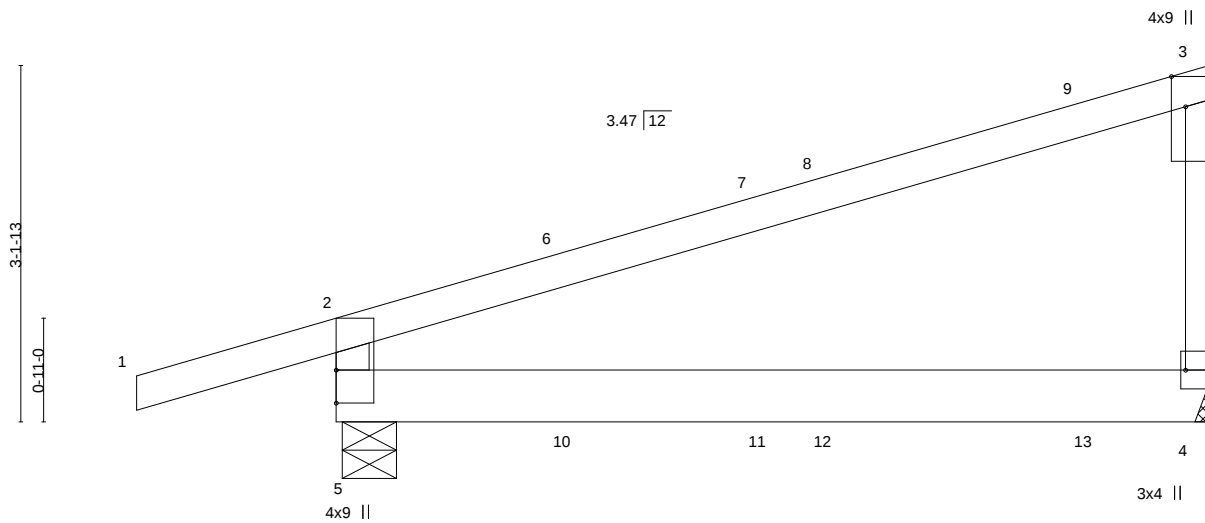


Plate Offsets (X,Y)-- [3:0-3-3,Edge], [4:Edge,0-2-8]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.77	Vert(LL)	-0.04	4-5	>999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.28	Vert(CT)	-0.09	4-5	>999		
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.00	Horz(CT)	-0.00	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.03	4-5	>999	Weight: 27 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x6 SPF No.2
WEBS 2x4 SPF No.2 *Except*
3-4: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-5-12, 4=Mechanical
Max Horz 5=128(LC 5)
Max Uplift 5=173(LC 4), 4=-107(LC 8)
Max Grav 5=477(LC 1), 4=346(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-5=-421/222

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 5=173, 4=107.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 7) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 50 lb down and 84 lb up at 2-1-1, 111 lb down and 70 lb up at 3-9-12, and 72 lb down and 45 lb up at 4-4-11, and 90 lb down and 68 lb up at 6-8-5 on top chord, and 9 lb down and 11 lb up at 2-1-1, 16 lb down at 3-9-12, and 11 lb down and 12 lb up at 4-4-11, and 25 lb down at 6-8-5 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 8) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-3=-70, 4-5=-20
Concentrated Loads (lb)
Vert: 6=23(B) 9=-20(B) 11=-7(F) 12=0(B) 13=-13(B)



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J8	Jack-Open	2	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:09 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-Mg9P1Nf7JdN2RkQNHgwHnKQdNYr3WzSTUzm2GdVf

RELEASE FOR CONSTRUCTION


AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

46126310

06/03/2021

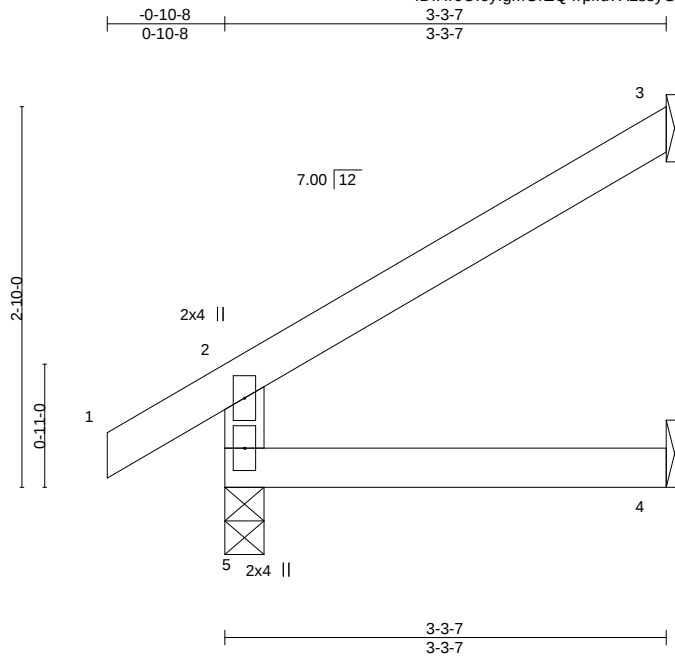

Scale = 1:17.1

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.13	Vert(LL)	-0.00	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.08	Vert(CT)	-0.01	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.01	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	
								Weight: 10 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-3-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=84(LC 8)
Max Uplift 5=14(LC 8), 3=63(LC 8)
Max Grav 5=222(LC 1), 3=99(LC 15), 4=58(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	Job Reference (optional)
210426	J9	Jack-Open	1	1		

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:09 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-Mg9P1Nf7JdN2RkQNHgwHnHBdeYr3WzSTUzm2GdVf

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES


LEE'S SUMMIT, MISSOURI

46126311

06/03/2021

-0-10-8 3-11-4
0-10-8 3-11-4

Scale = 1:19.0

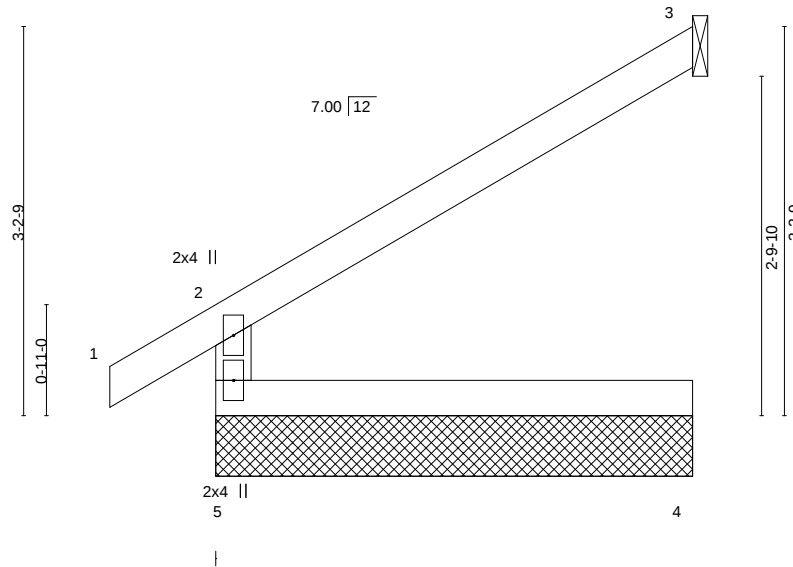

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	-0.01	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	-0.02	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.02	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	
									Weight: 12 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. All bearings 3-11-4 except (jt=length) 3=Mechanical, 3=Mechanical.
(lb) - Max Horz 5=100(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) 5, 3
Max Grav All reactions 250 lb or less at joint(s) 5, 3, 3, 4

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J10	Jack-Open	6	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:57 2021 Page 1

ID:Hr0UioyIgmORZQ4rpild7XzssyG-iMRsWHWb7xsl?uolgmS6oECG7u71Jm428Zcdv


RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

06/03/2021

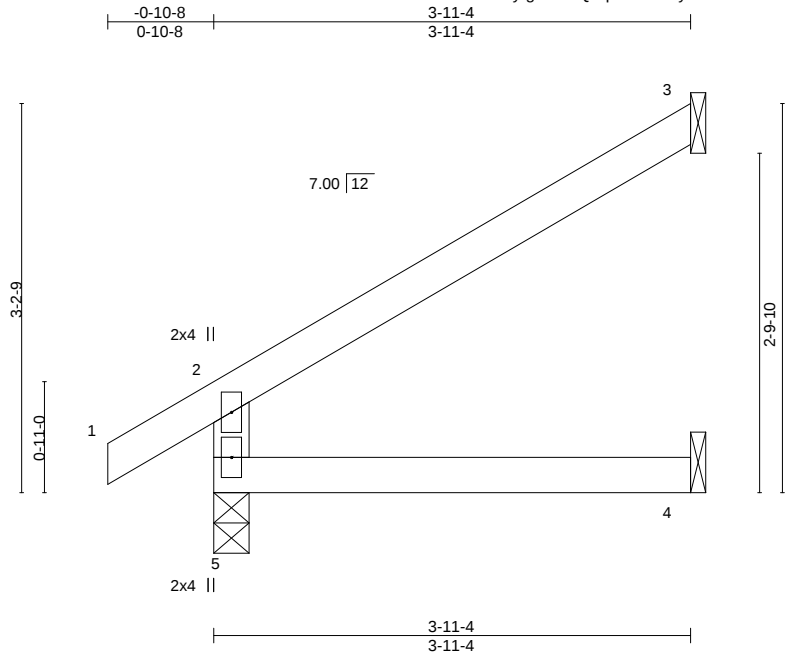

Scale = 1:19.0

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	-0.01	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.12	Vert(CT)	-0.02	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	4-5	>999	240	
									Weight: 12 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=70(LC 8)
Max Uplift 3=-46(LC 8)
Max Grav 5=249(LC 1), 3=118(LC 13), 4=70(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J11	Jack-Open	2	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:58 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-AZ?EjdXDuf_cd2NJEU_LKTIPLXWga5RD9ObvZG6V

06/03/2021

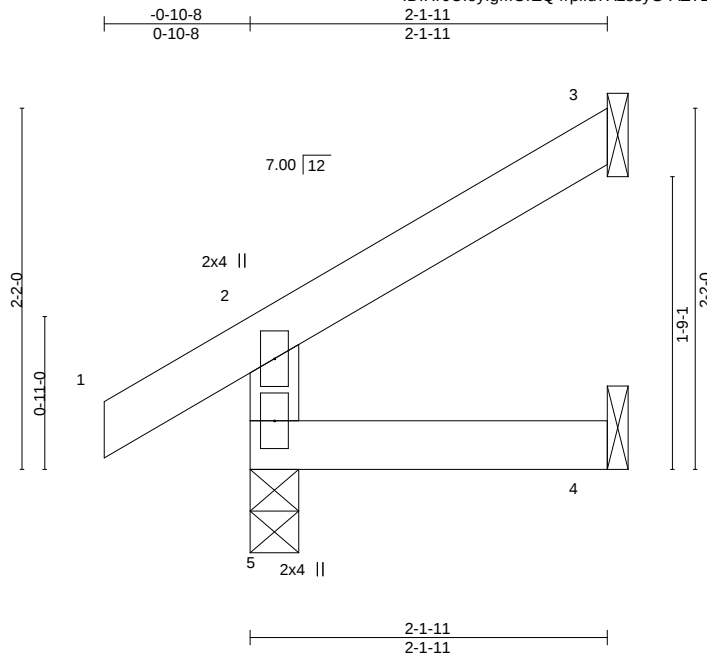

Scale = 1:13.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	-0.00	4-5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	4-5	>999	240	
								Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-1-11 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
 Max Horz 5=57(LC 8)
 Max Uplift 5=-14(LC 8), 3=-41(LC 8), 4=-1(LC 8)
 Max Grav 5=177(LC 1), 3=58(LC 15), 4=35(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3, 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J12	Jack-Open	2	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW
Wheeler Lumber, Waverly, KS - 66871,						DEVELOPMENT SERVICES
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:58 2021 Page 1						LEE'S SUMMIT, MISSOURI

0-10-8 1-0-0
0-10-8 1-0-0

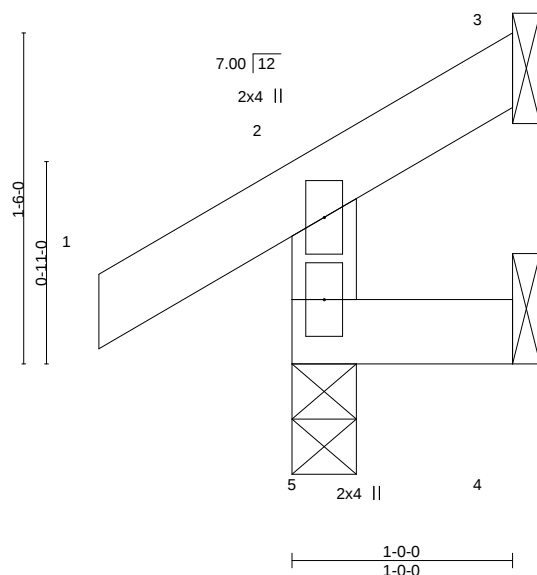

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	0.00	5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	0.00	5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.00	5	>999	240	
								Weight: 4 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=36(LC 5)
Max Uplift 5=-17(LC 8), 3=-15(LC 8), 4=-7(LC 5)
Max Grav 5=153(LC 1), 3=10(LC 6), 4=14(LC 6)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3, 4.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:59 2021 Page 1

ID: Hr0UllpylgMOrZO4rpild7XzssvG-elZdxvYrfY6TECkVnBVatqHlU5x8EP1LaBcx7izGdVs

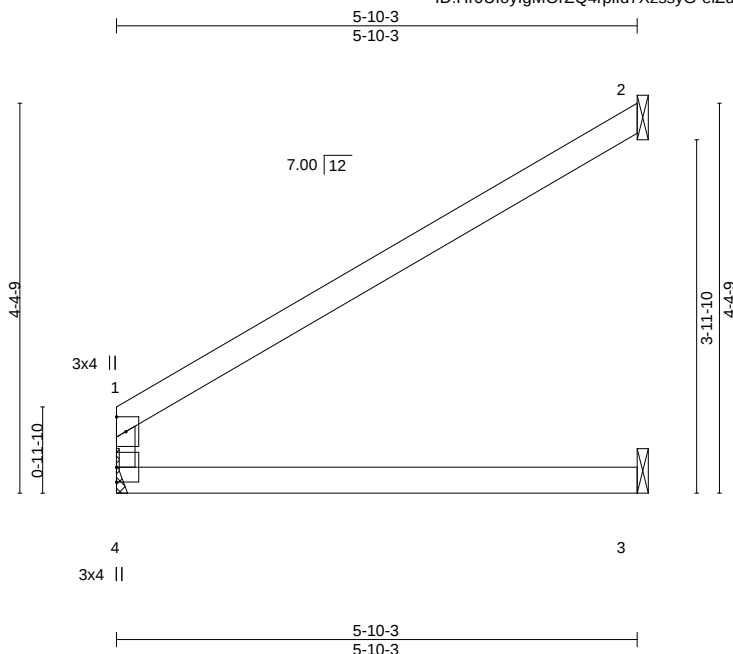

Scale = 1:25.9

LOADING	(psf)	SPACING-	2-0-0	CSI.		DEFL.	in	(loc)	I/defl	L/d	PLATES	GRIP
TCLL	25.0	Plate Grip DOL	1.15	TC	0.56	Vert(LL)	-0.05	3-4	>999	360	MT20	197/144
TCDL	10.0	Lumber DOL	1.15	BC	0.32	Vert(CT)	-0.12	3-4	>592	240		
BCLL	0.0 *	Rep Stress Incr	YES	WB	0.00	Horz(CT)	0.06	2	n/a	n/a		
BCDL	10.0	Code IRC2018/TPI2014		Matrix-R		Wind(LL)	0.04	3-4	>999	240	Weight: 15 lb	FT = 10%

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2


BRACING-	
TOP CHORD	Structural wood sheathing directly applied or 5-10-3 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS. (size) 4=Mechanical, 2=Mechanical, 3=Mechanical
 Max Horz 4=89(LC 8)
 Max Uplift 2=-70(LC 8)
 Max Grav 4=256(LC 1), 2=188(LC 13), 3=110(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TC DL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Refer to girder(s) for truss to truss connections.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 2.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

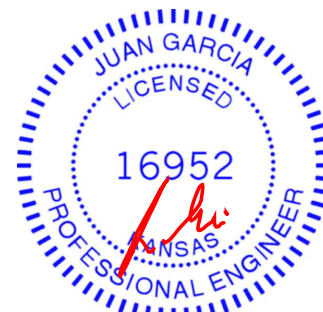

May 14, 2021



WARNING: Velly design parameters are READ NOTES ON THIS AND INCLUDED WITH REFERENCE PAGE MM-1473 (Rev. 3/29/2020) BEFORE USE. Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J14	Jack-Open	8	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:21:59 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-elZdxyYrfY6TFCVnBVatH-LWkP1La6cx7Zz6d/s

RELEASE FOR CONSTRUCTION


AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

146126316

06/03/2021

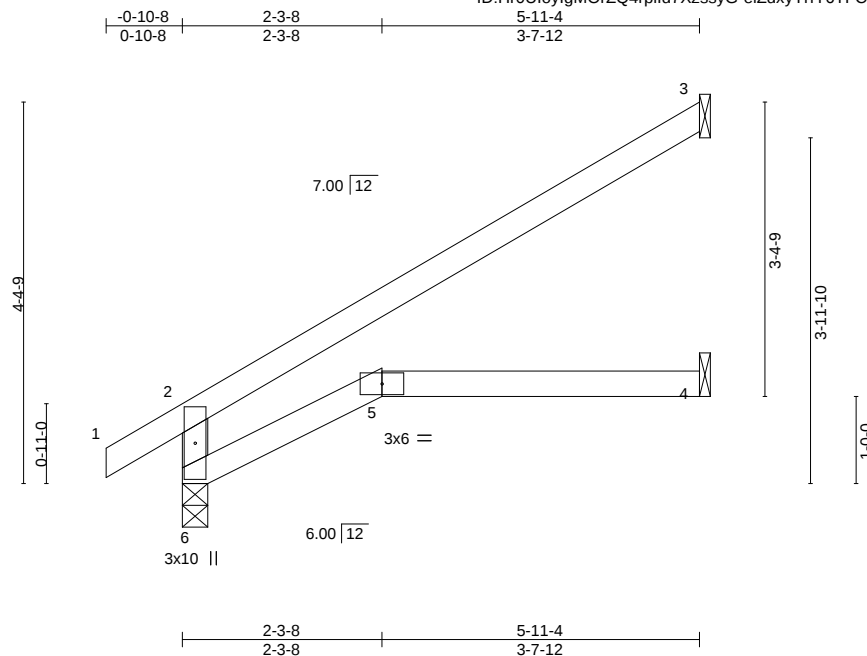

Scale = 1:26.5

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.53	Vert(LL)	-0.05	4-5	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.29	Vert(CT)	-0.12	4-5	>593	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.06	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.05	5	>999	240	
									Weight: 17 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.


(size) 6=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 6=103(LC 8)
Max Uplift 3=69(LC 8)
Max Grav 6=336(LC 1), 3=184(LC 13), 4=109(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-6=-292/36

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 6 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 3.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

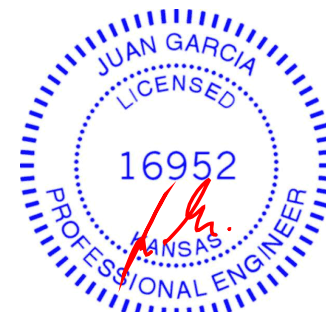

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	Job Reference (optional)
210426	J15	Diagonal Hip Girder	1	1		

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:00 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-6x7?8IYUQsEKsMwLu0pQhglLVQ8UfkgG3Ufz6dV7

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
46126317

06/03/2021

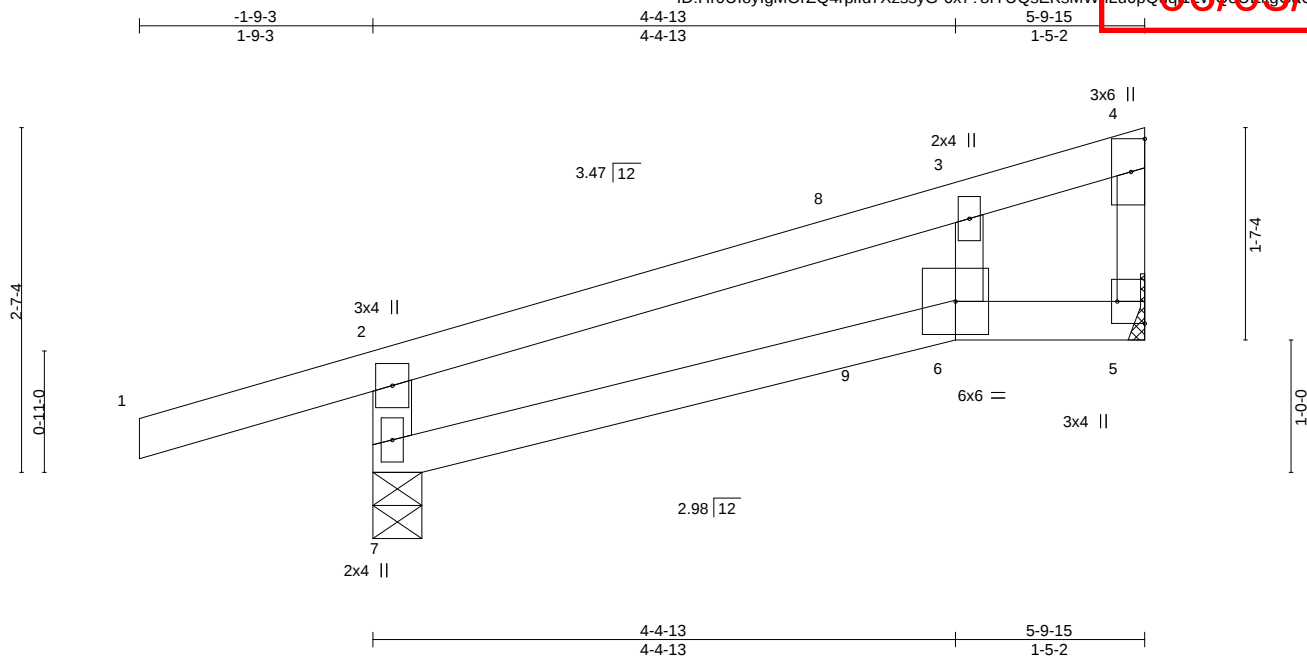


Plate Offsets (X, Y)--		[5:Edge,0-2-8]	
LOADING (psf)	SPACING-	2-0-0	CSI.
TCLL 25.0	Plate Grip DOL	1.15	TC 0.35
TCDL 10.0	Lumber DOL	1.15	BC 0.20
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.02
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R
			DEFL. in (loc) l/defl L/d
			Vert(LL) -0.03 6-7 >999 360
			Vert(CT) -0.06 6-7 >999 240
			Horz(CT) 0.01 5 n/a n/a
			Wind(LL) 0.03 6-7 >999 240
			PLATES MT20
			GRIP 197/144
			Weight: 18 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-7: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-9-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 7=0-4-7, 5=Mechanical
Max Horz 7=92(LC 22)
Max Uplift 7=-135(LC 4), 5=-58(LC 8)
Max Grav 7=410(LC 1), 5=232(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.


TOP CHORD 2-7=-375/160

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5 except (jt=lb) 7=135.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 8) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 68 lb down and 37 lb up at 3-7-3, and 110 lb down and 70 lb up at 3-9-12 on top chord, and 7 lb down and 11 lb up at 3-7-3, and 16 lb down at 3-9-12 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
- 9) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
Uniform Loads (plf)
Vert: 1-2=-70, 2-4=-70, 6-7=-20, 5-6=-20
Concentrated Loads (lb)
Vert: 9=-6(F=-7, B=2)

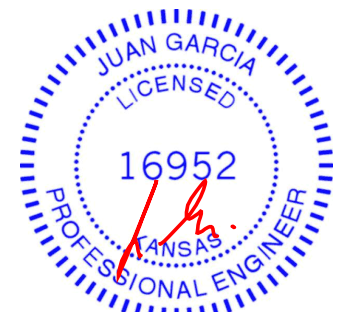

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J16	Jack-Closed	1	1	
Job Reference (optional)					


AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:01 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-b8gNMeZ6BAMBUW5tvcX2y5NrkktNRwKzCFZ6dVn

06/03/2021



Scale = 1:26.0

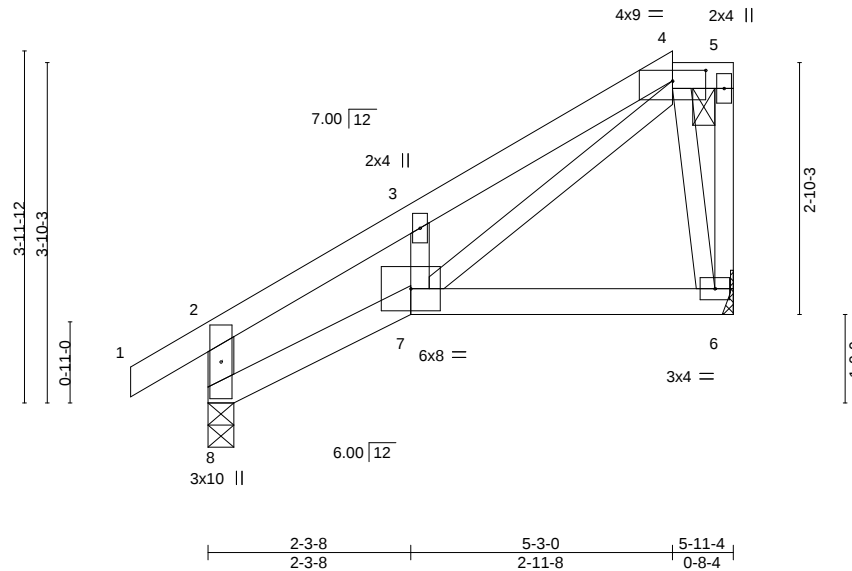


Plate Offsets (X,Y)-- [4:0-4-8,0-1-7]

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.29	Vert(LL)	-0.02	7	>999	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.22	Vert(CT)	-0.04	6-7	>999		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.09	Horz(CT)	0.02	6	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.01	7	>999	Weight: 24 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals, and 2-0-0 oc purlins: 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 8=0-3-8, 6=Mechanical
Max Horz 8=111(LC 5)
Max Uplift 8=-8(LC 8), 6=-29(LC 5)
Max Grav 8=334(LC 1), 6=250(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-8=-385/42, 2-3=-380/35, 3-4=-336/92
BOT CHORD 7-8=-99/314
WEBS 4-7=-86/304, 4-6=-258/60

NOTES-

- 1) Unbalanced roof live loads have been considered for this design.
- 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 3) Provide adequate drainage to prevent water ponding.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Refer to girder(s) for truss to truss connections.
- 7) Bearing at joint(s) 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 6.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

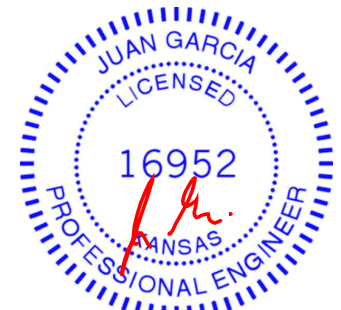

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J17	Jack-Closed	1	1	
Job Reference (optional)					

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:02 2021 Page 1

ID:Hr0UoylgMOrZQ4rpild7XzssyG-3KEIZ_akyTU26gg4TJ2HVJv380wcdN18z3okz26dyP

06/03/2021



Scale = 1:22.1

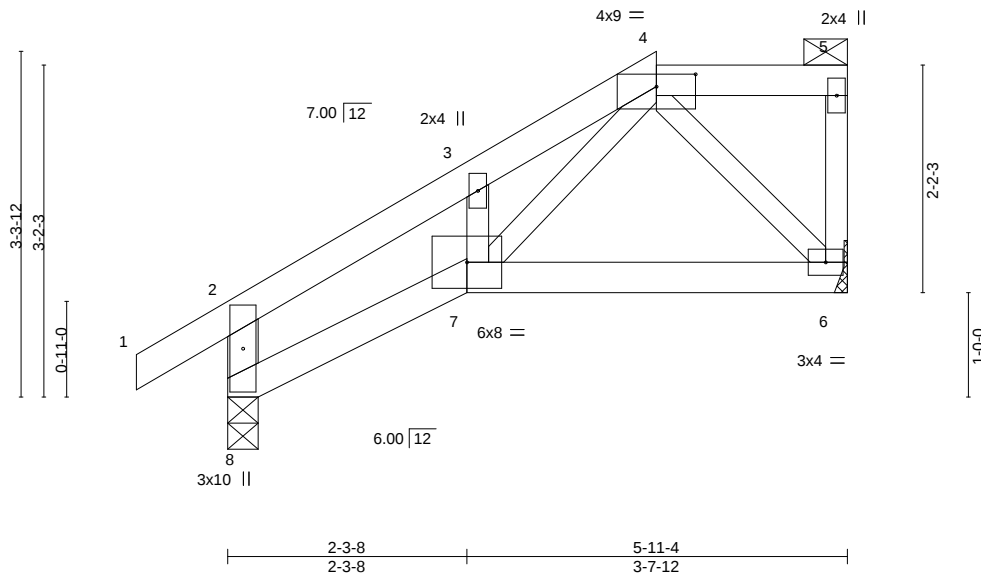


Plate Offsets (X,Y)--		[4:0-4-8,0-1-7]								
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP	
TCLL 25.0	Plate Grip DOL	1.15	TC 0.28	Vert(LL)	-0.02	7	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.20	Vert(CT)	-0.03	6-7	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.05	Horz(CT)	0.02	6	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S	Wind(LL)	0.01	7	>999	240	Weight: 22 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2 *Except*
2-8: 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals, and 2-0-0 oc purlins: 4-5.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 8=0-3-8, 6=Mechanical
Max Horz 8=89(LC 5)
Max Uplift 8=-10(LC 8), 6=-24(LC 5)
Max Grav 8=334(LC 1), 6=250(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-8=-385/40, 2-3=-364/30, 3-4=-278/74
BOT CHORD 7-8=-81/284

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope); cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Provide adequate drainage to prevent water ponding.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Refer to girder(s) for truss to truss connections.
- Bearing at joint(s) 8 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 8, 6.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.

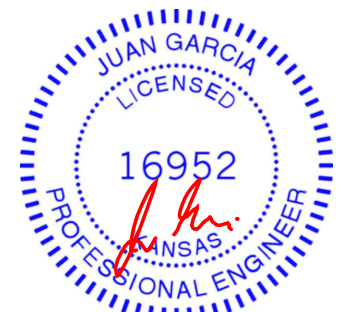

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	J18	Jack-Closed Girder	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:02 2021 Page 1
ID:Hr0UloYlgMOrZQ4rpild7XzssyG-XWo7nKbMjncvpFG0LZW1WSDH7UlnbAME9G6ZCdVg

06/03/2021

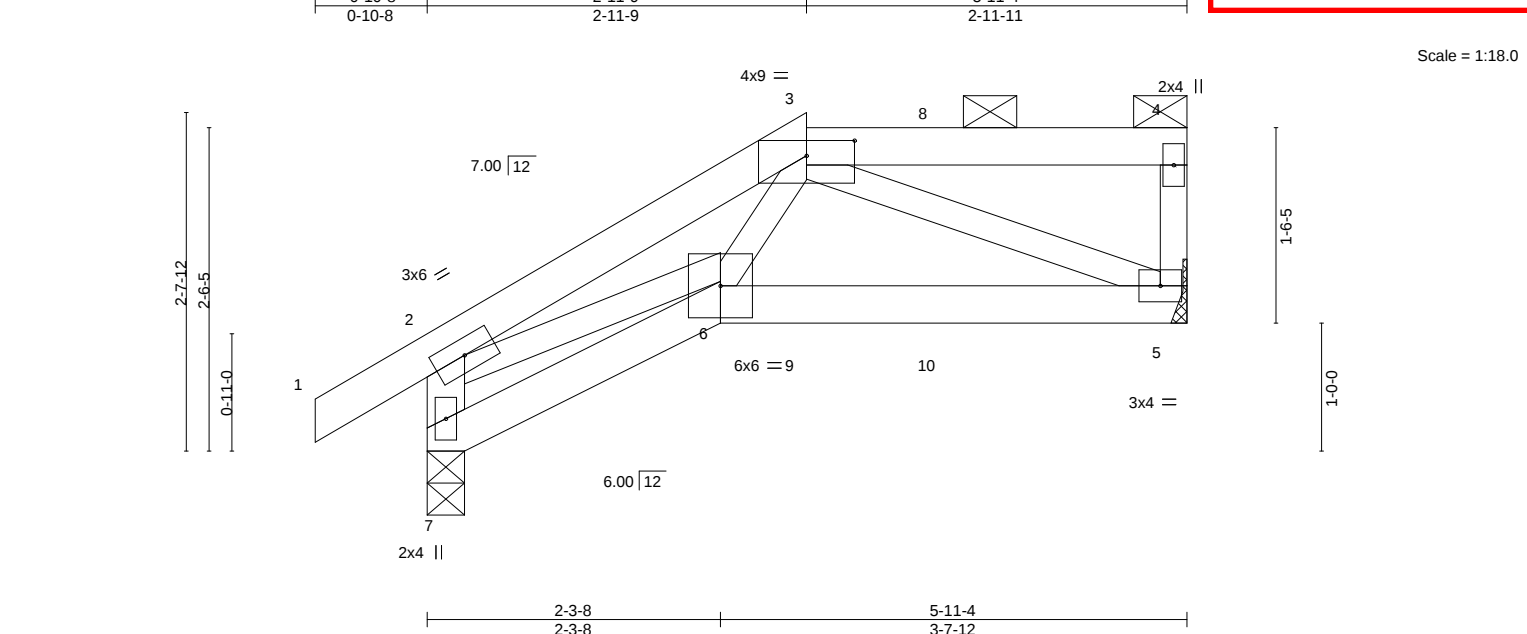


Plate Offsets (X,Y)--		[3:0-4-8,0-1-7]			
LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc) l/defl L/d
TCLL 25.0	Plate Grip DOL	1.15	TC 0.32	Vert(LL)	-0.02 5-6 >999 360
TCDL 10.0	Lumber DOL	1.15	BC 0.48	Vert(CT)	-0.06 5-6 >999 240
BCLL 0.0 *	Rep Stress Incr	NO	WB 0.24	Horz(CT)	0.01 5 n/a n/a
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P	Wind(LL)	0.02 5-6 >999 240
				PLATES	GRIP
				MT20	197/144
				Weight: 22 lb	FT = 10%

LUMBER-	BRACING-
TOP CHORD 2x4 SPF No.2	TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals, and 2-0-0 oc purlins: 3-4.
BOT CHORD 2x4 SPF No.2	BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 2x3 SPF No.2 *Except* 2-7: 2x4 SPF No.2	

REACTIONS. (size) 7=0-3-8, 5=Mechanical
Max Horz 7=82(LC 5)
Max Uplift 7=-102(LC 8), 5=-109(LC 5)
Max Grav 7=491(LC 1), 5=462(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 2-7=-470/142, 2-3=-838/189
BOT CHORD 5-6=-160/497
WEBS 2-6=-122/689, 3-6=-75/397, 3-5=-545/164

- NOTES-**
- 1) Unbalanced roof live loads have been considered for this design.
 - 2) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
 - 3) Provide adequate drainage to prevent water ponding.
 - 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
 - 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
 - 6) Refer to girder(s) for truss to truss connections.
 - 7) Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
 - 8) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 7=102, 5=109.
 - 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
 - 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.
 - 11) Hanger(s) or other connection device(s) shall be provided sufficient to support concentrated load(s) 111 lb down and 91 lb up at 4-0-0 on top chord, and 209 lb down and 81 lb up at 2-11-9, and 68 lb down at 4-0-0 on bottom chord. The design/selection of such connection device(s) is the responsibility of others.
 - 12) In the LOAD CASE(S) section, loads applied to the face of the truss are noted as front (F) or back (B).

LOAD CASE(S) Standard



May 14,2021

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J18	Jack-Closed Girder	1	1	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:02 2021 Page 2

ID:Hr0UloyIgMOrZQ4rpild7XzssyG-XWo7nKbMjncvjpFG0LZW1WSDH7UUnbAME9G6ZCdv9

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

46126320

06/03/2021

LOAD CASE(S) Standard

- 1) Dead + Roof Live (balanced): Lumber Increase=1.15, Plate Increase=1.15
- Uniform Loads (plf)
 - Vert: 1-2=-70, 2-3=-70, 3-4=-70, 6-7=-20, 5-6=-20
- Concentrated Loads (lb)
 - Vert: 8=-111(F) 9=-209(F) 10=-51(F)

 **WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.**

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J19	Jack-Open	1	1	Job Reference (optional)

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:02 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-XWo7nKbMjncvjpFG01ZW1WSHf0DLgKAME9GG6ZCdv0

RELEASE FOR CONSTRUCTION


AS NOTED FOR PLAN REVIEW

DEVELOPMENT SERVICES

LEE'S SUMMIT, MISSOURI

46126321

06/03/2021

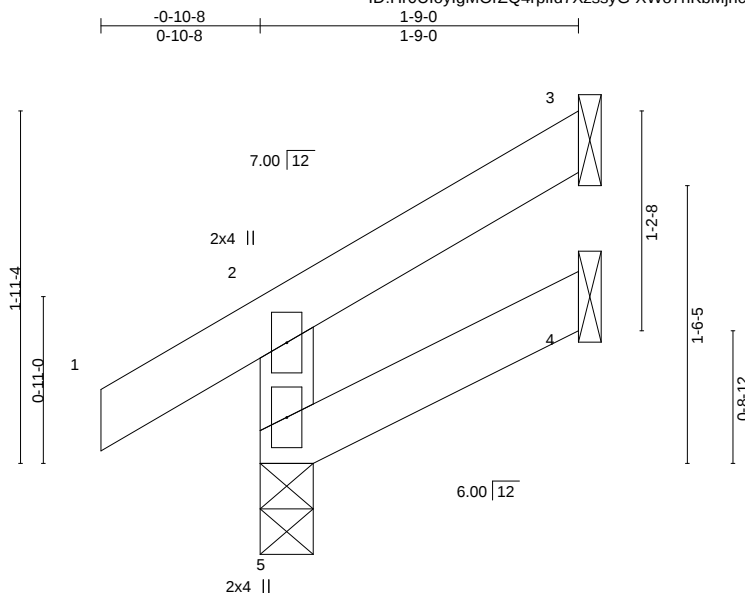

Scale = 1:12.7

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.07	Vert(LL)	-0.00	5	>999	240	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.03	Vert(CT)	-0.00	5	>999	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R						
								Weight: 7 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 1-9-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS. (size) 5=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 5=48(LC 8)
Max Uplift 5=-12(LC 8), 3=-35(LC 8), 4=-3(LC 8)
Max Grav 5=166(LC 1), 3=44(LC 15), 4=29(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 5, 3, 4.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	J20	Jack-Open	1	1	
Job Reference (optional)					


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:04 2021 Page 1

ID: HrOUloylgMOrZQ4rpild7XzssyG-?iMW_gb_U5kmlzqSak5ak_CNyfHhJbWioZz6d/p

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
46126322

06/03/2021

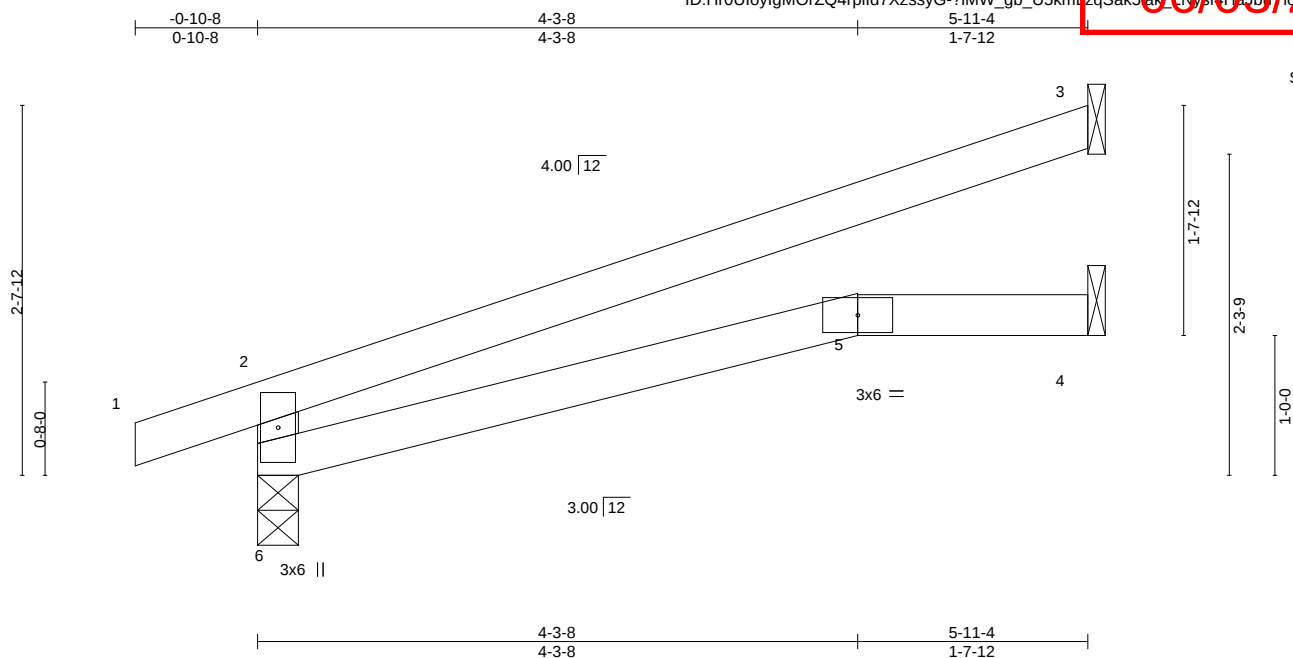

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.52	Vert(LL)	-0.05	5-6	>999	360	MT20
TCDL 10.0	Lumber DOL	1.15	BC 0.31	Vert(CT)	-0.11	5-6	>607	240	197/144
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.03	3	n/a	n/a	
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.05	5-6	>999	240	
								Weight: 16 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 5-11-4 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 6=0-3-8, 3=Mechanical, 4=Mechanical
Max Horz 6=89(LC 4)
Max Uplift 6=-76(LC 4), 3=-83(LC 8)
Max Grav 6=336(LC 1), 3=181(LC 1), 4=108(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-6=-292/126

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 6 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 3.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI
210426	J21	Jack-Open	1	1	Job Reference (optional)	46126323

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:05 2021 Page 1

ID:HrOUloylgMOrZQ4rpild7XzssyG-TvwuB0ccFOscz7f8Sc_7kXhMf-qkkoTdYFL22CdVmp

06/03/2021

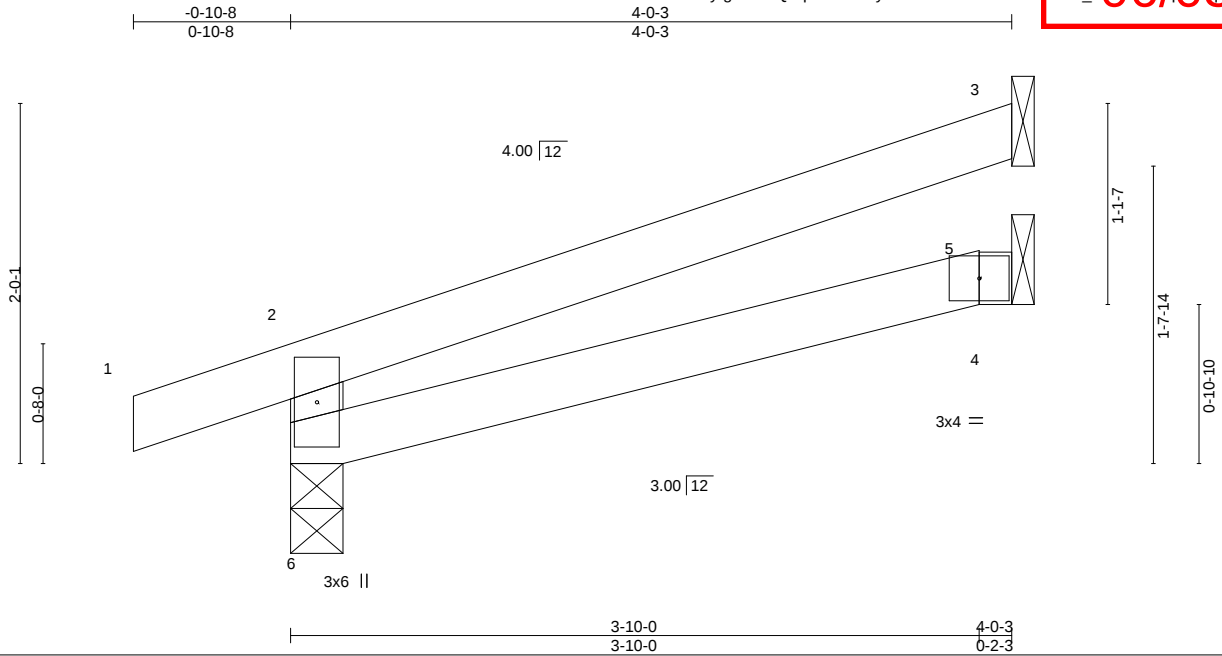

Scale = 1:12.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in	(loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.21	Vert(LL)	-0.01	5-6	>999	360	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.13	Vert(CT)	-0.02	5-6	>999	240		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	0.01	3	n/a	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R	Wind(LL)	0.01	5-6	>999	240	Weight: 11 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2
 WEBS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-0-3 oc purlins, except end verticals.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 6=0-3-8, 3=Mechanical, 4=Mechanical
 Max Horz 6=63(LC 4)
 Max Uplift 6=65(LC 4), 3=56(LC 8)
 Max Grav 6=252(LC 1), 3=117(LC 1), 4=71(LC 3)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 3) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 4) Refer to girder(s) for truss to truss connections.
- 5) Bearing at joint(s) 6 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 6, 3.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
 Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	LAY1	GABLE	1	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:10 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-qsjnFjgl4xVv3uHox?B9q?E1dN1U127C26000226d0p

06/03/2021

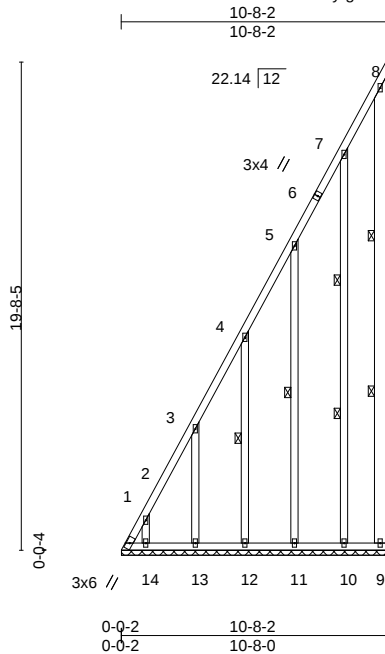

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.16	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.19	Horz(CT)	-0.00	9	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 120 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x6 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-8-5 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 4-12, 5-11
2 Rows at 1/3 pts 8-9, 7-10

REACTIONS.

All bearings 10-8-0.
(lb) - Max Horz 1=768(LC 8)
Max Uplift All uplift 100 lb or less at joint(s) except 9=-103(LC 8), 1=-680(LC 6), 14=-259(LC 8), 13=-320(LC 8), 12=-307(LC 8), 11=-324(LC 8), 10=-267(LC 8)
Max Grav All reactions 250 lb or less at joint(s) 9, 14 except 1=1409(LC 8), 13=294(LC 15), 12=281(LC 15), 11=295(LC 15), 10=253(LC 15)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
TOP CHORD 1-2=-1584/778, 2-3=-1352/667, 3-4=-1026/508, 4-5=-714/358, 5-7=-388/198
WEBS 2-14=-196/255, 3-13=-253/347, 4-12=-242/331, 5-11=-254/347, 7-10=-219/297

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) All plates are 2x4 MT20 unless otherwise indicated.
- 3) Gable requires continuous bottom chord bearing.
- 4) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 5) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 103 lb uplift at joint 9, 680 lb uplift at joint 1, 259 lb uplift at joint 14, 320 lb uplift at joint 13, 307 lb uplift at joint 12, 324 lb uplift at joint 11 and 267 lb uplift at joint 10.
- 7) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14,2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:10 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-qsjnFjgl4xVv3uHcx?B9q1E7NytUkQCzo?00CzGdVh

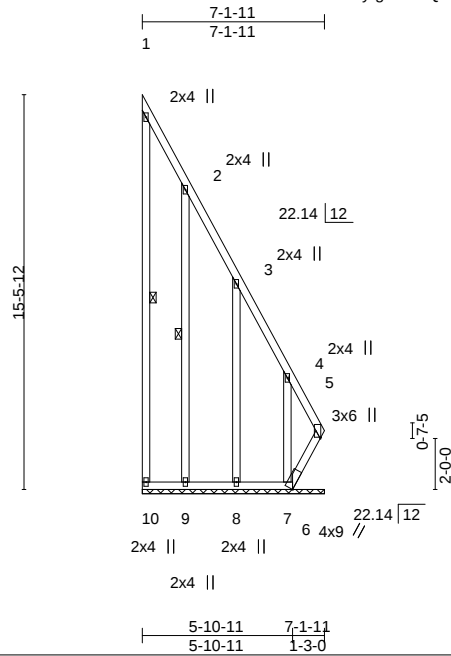

May 14 09:22:10 2021 Page 1
q"ET"NrUkQCZ6?00CzGd/h

LUMBER-		BRACING-	
TOP CHORD	2x4 SPF No.2	TOP CHORD	Structural wood sheathing directly applied or 5-3-3 oc purlins, except end verticals.
BOT CHORD	2x4 SPF No.2	BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing, Except: 7-9-13 oc bracing: 5-6.
WEBS	2x4 SPF No.2	WEBS	1 Row at midpt 1-10, 2-9
OTHERS	2x4 SPF No.2		

REACTIONS. All bearings 7-1-11.

(lb) - Max Horz 10=527(LC 9)

Max Uplift All uplift 100 lb or less at joint(s) 10 except 5=1049(LC 7), 6=1074(LC 9), 9=293(LC 9), 8=333(LC 9), 7=532(LC 9)

Max Grav All reactions 250 lb or less at joint(s) 10 except 5=2213(LC 9), 6=496(LC 7), 9=272(LC 16), 8=301(LC 16), 7=367(LC 7)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 2-3=-404/207, 3-4=-739/371, 4-5=-1258/621

BOT CHORD 9-10=-255/527, 8-9=-255/527, 7-8=-255/527, 6-7=-255/527, 5-6=-580/1190

WEBS 2-9=-233/317, 3-8=-260/357, 4-7=-316/562

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCdL=6.0psf; BCdL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- 6) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 10 except (jt=lb) 5=1049, 6=1074, 9=293, 8=333, 7=532.
- 7) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 5.
- 8) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 9) This truss has large uplift reaction(s) from gravity load case(s). Proper connection is required to secure truss against upward movement at the bearings. Building designer must provide for uplift reactions indicated.



May 14, 2021




WARNING – verify design parameters and READ NOTES ON THIS AND INCLUDED WELDER REFERENCE PAGE MH-1413 (Rev. 3/25/2020) BEFORE USE.
Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for the building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2671 Crain Highway, Suite 203 Waldorf, MD 20601.



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	LAY3	GABLE	1	1		AS NOTED FOR PLAN REVIEW
Job Reference (optional)						DEVELOPMENT SERVICES
Wheeler Lumber, Waverly, KS - 66871,						LEE'S SUMMIT, MISSOURI

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:12 2021 Page 1
ID:HrOUloylgMOrZQ4rpild7XzssyG-l3H9S3hNqEdmh2scUijOMCngnWt0SLCJlayZcdy9

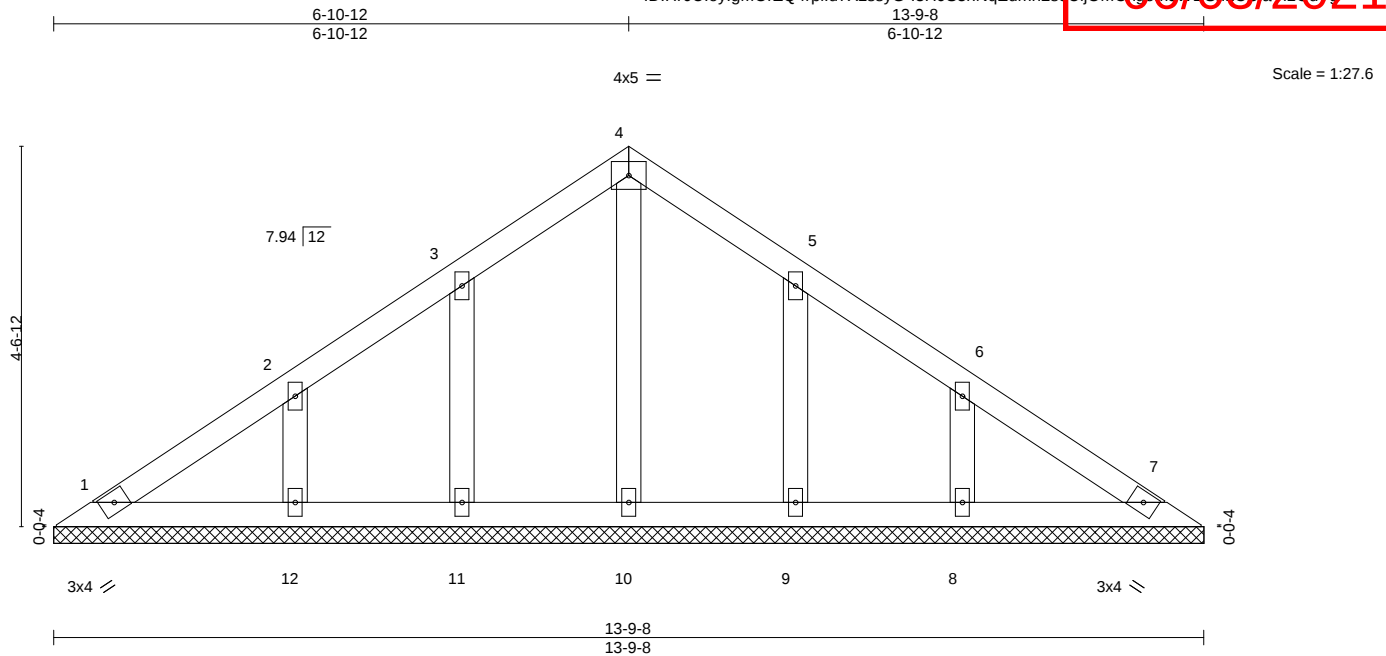

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.06	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.04	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.03	Horz(CT)	0.00	7	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 47 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

All bearings 13-9-8.
(lb) - Max Horz 1=-111(LC 4)
Max Uplift All uplift 100 lb or less at joint(s) 1, 11, 12, 9, 8
Max Grav All reactions 250 lb or less at joint(s) 1, 7, 10, 11, 12, 9, 8

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 11, 12, 9, 8.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job Reference (optional)

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:12 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-mFrXfPi?bYldICR?2QEdvOKq1sAffyymVR3U745zGcVf



Weight: 65 lb FT = 10%

TOP CHORD	Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals, and 2-0-0 oc purlins (6-0-0 max.): 1-7.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.

Max Grav All reactions 250 lb or less at joint(s) 18, 9, 13, 11, 17, 16, 15, 14, 10 except 12=502(LC 9)

BOT CHORD 12-13=-241/301, 11-12=-242/301

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCFL=6.0psf; BCLD=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Provide adequate drainage to prevent water ponding.
- 3) All plates are 2x4 MT20 unless otherwise indicated.
- 4) Gable requires continuous bottom chord bearing.
- 5) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 6) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 7) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 18, 17, 16, 15, 14, 13, 12, 11, 10, 9, 8, 7, 6, 5, 4, 3, 2, 1, except (jt=lb) 9=164, 13=249, 12=303, 11=241, 10=246.
- 8) Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 12.
- 9) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.
- 10) Graphical purlin representation does not depict the size or the orientation of the purlin along the top and/or bottom chord.




 **WARNING** - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, D5B-89 and BCSI Building C**

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	LAY5	GABLE	1	1	
Job Reference (optional)					


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:14 2021 Page 1

ID:HrOUlolygMOrZQ4rpid7XzssyG-iezI45jG79?LYWBNARg5_PbKxKOnpousE9Z6dYd

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
46126328

06/03/2021

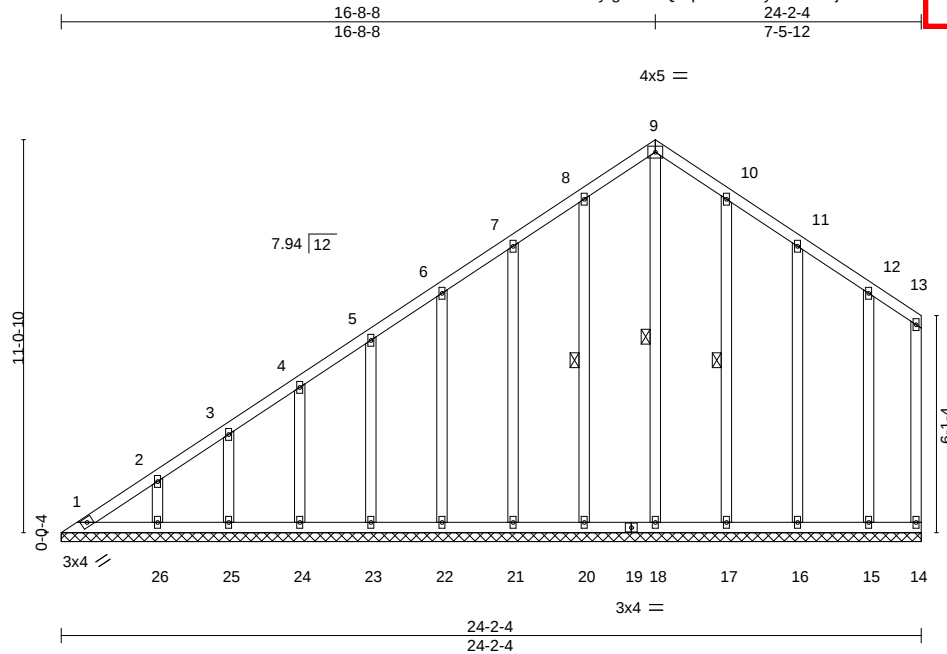

Scale = 1:64.8

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.16	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.18	Horz(CT)	-0.00	14	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S						
									Weight: 147 lb FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.
WEBS 1 Row at midpt 9-18, 8-20, 10-17

REACTIONS.

All bearings 24-2-4.
(lb) - Max Horz 1=361(LC 5)
Max Uplift All uplift 100 lb or less at joint(s) 14, 20, 21, 22, 23, 24, 25, 26, 17, 16, 15 except 1=-111(LC 4), 18=-109(LC 7)
Max Grav All reactions 250 lb or less at joint(s) 1, 14, 18, 20, 21, 22, 23, 24, 25, 26, 17, 16, 15

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-361/292, 2-3=-319/260, 3-4=-294/241, 4-5=-276/237, 5-6=-258/232

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- All plates are 2x4 MT20 unless otherwise indicated.
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 14, 20, 21, 22, 23, 24, 25, 26, 17, 16, 15 except (jt=lb) 1=111, 18=109.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT
210426	LAY6	GABLE	1	1	
Wheeler Lumber, Waverly, KS - 66871,					Job Reference (optional)

RELEASE FOR CONSTRUCTION

AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES


LEE'S SUMMIT, MISSOURI

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:14 2021 Page 1
ID: Hr0UioyIgmOrZQ4rpild7XzssyG-iez145jG79?LYWbNArG5_P9...CpFousZE9Z6dVd

06/03/2021

2-10-14
2-10-14

Scale = 1:30.2

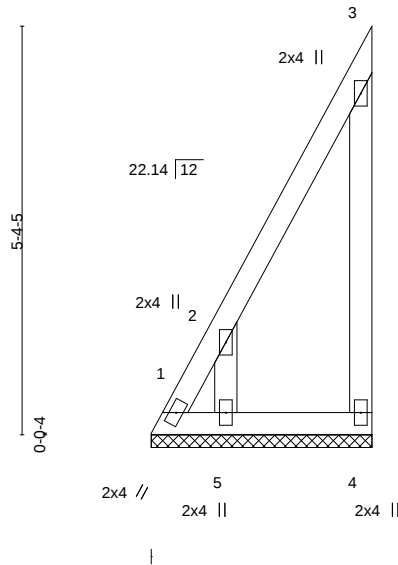

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.16	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.02	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.05	Horz(CT)	-0.00	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 16 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x4 SPF No.2
OTHERS 2x4 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 2-10-14 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.


(size) 1=2-10-12, 4=2-10-12, 5=2-10-12
Max Horz 1=182(LC 5)
Max Uplift 1=-211(LC 6), 4=-127(LC 7), 5=-275(LC 8)
Max Grav 1=265(LC 5), 4=135(LC 15), 5=256(LC 15)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

TOP CHORD 1-2=-300/253
WEBS 2-5=-220/296

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) except (jt=lb) 1=211, 4=127, 5=275.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

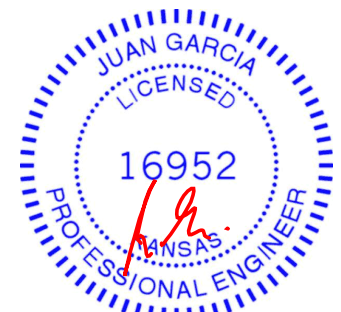

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V1	Valley	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:15 2021 Page 1

ID:Hr0UoylgMOrZQ4rpild7XzssyG-AqXglRkuuT7CAfAajYnKV2U60guGux7GjhQZ6dVc

06/03/2021

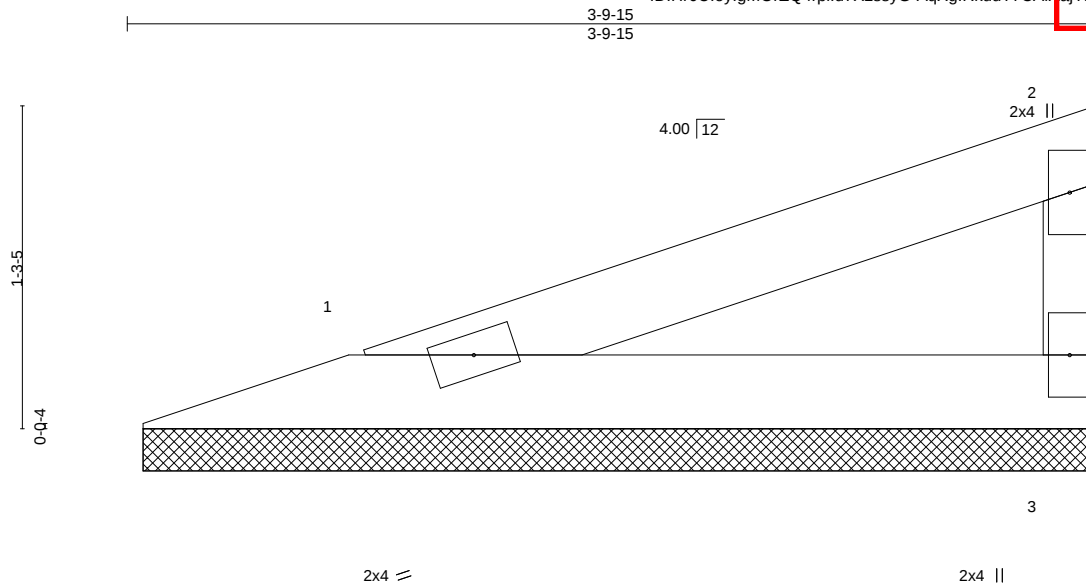

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.13	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=3-9-3, 3=3-9-3
Max Horz 1=42(LC 5)
Max Uplift 1=20(LC 4), 3=27(LC 8)
Max Grav 1=125(LC 1), 3=125(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

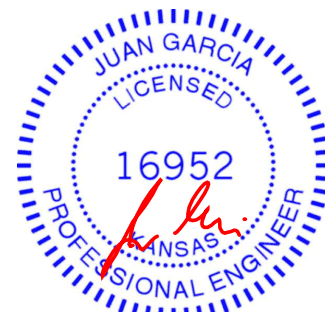

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V2	Valley	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI


Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:17 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-7DeQj6l8Q4NvpZJ/rzpocTVL6GdAofaGumzmdy9

06/03/2021

Scale = 1:15.6

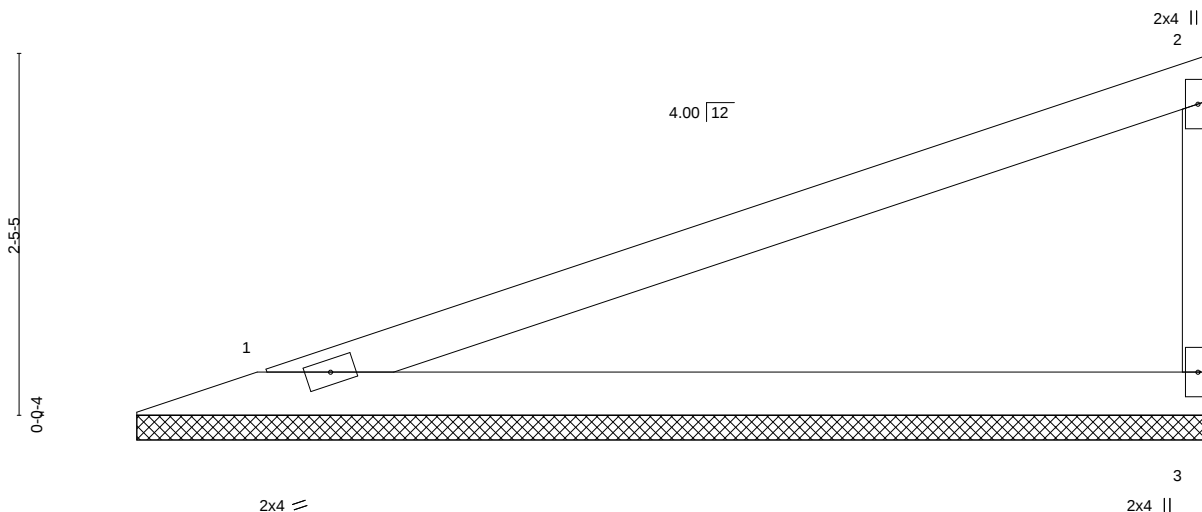

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.79	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.43	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 17 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 7-3-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=7-3-3, 3=7-3-3
Max Horz 1=94(LC 5)
Max Uplift 1=-46(LC 4), 3=-60(LC 8)
Max Grav 1=283(LC 1), 3=283(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

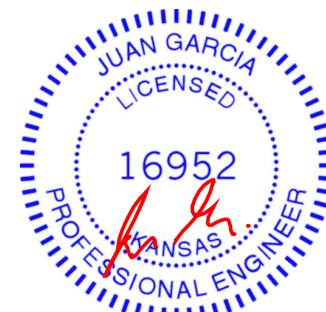

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V3	Valley	1	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW
Wheeler Lumber,	Waverly, KS - 66871,					DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:17 2021 Page 1
ID:Hr0UloylgMorZQ4rpild7XzssyG-7DeQj6l8Q4NvPz3jrzpocTlff06LDAofaCounzmdya

06/03/2021

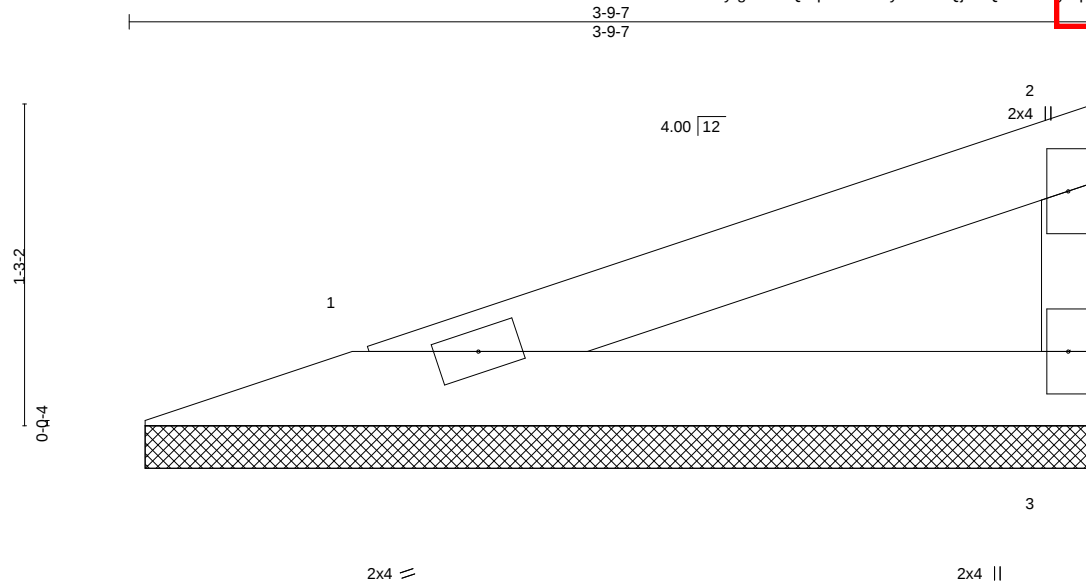

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	L/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.13	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.07	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 8 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 3-9-7 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=3-8-11, 3=3-8-11
Max Horz 1=41(LC 5)
Max Uplift 1=20(LC 4), 3=26(LC 8)
Max Grav 1=123(LC 1), 3=123(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601
ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:18 2021 Page 1

ID: Hr0LJloYlgMOrZQ4rnlD7XzssvG-hPCowSmmBOVm17u9Pql 18harOufhMd?Nm4: BllZGdVZ
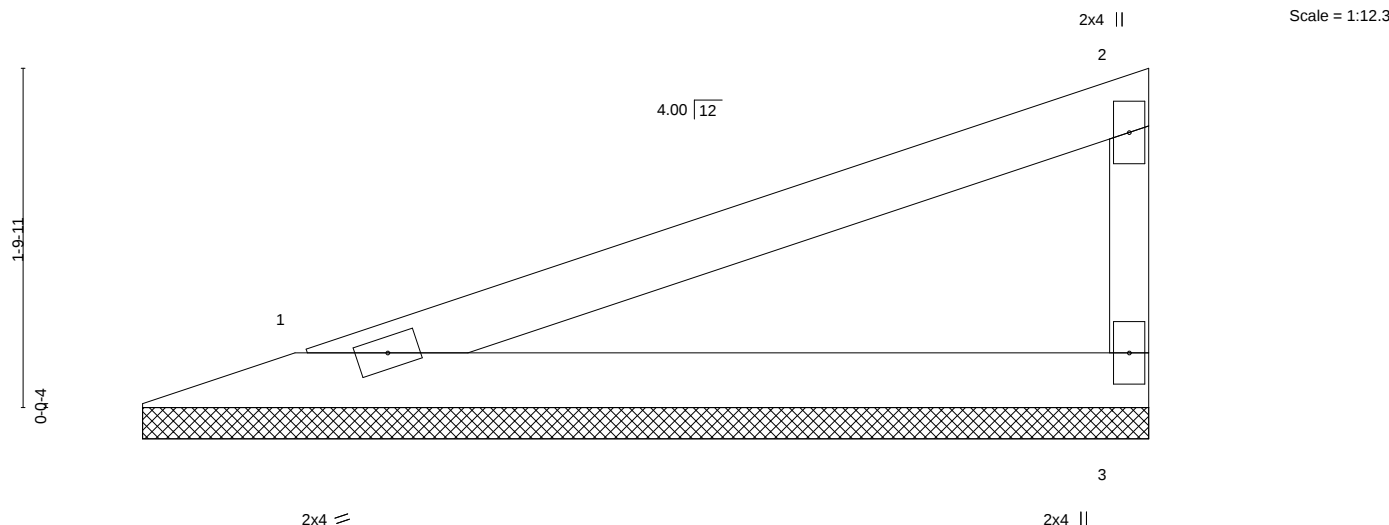
$$\begin{array}{r} 5-5-2 \\ \hline 5-5-2 \end{array}$$
[illegible]

LUMBER-

TOP CHORD	2x4 SPF No.2
BOT CHORD	2x4 SPF No.2
WEBS	2x3 SPF No.2

BRACING-

TOP CHORD	Structural wood sheathing directly applied or 5-5-2 oc purlins, except end verticals.
BOT CHORD	Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=5-4-6, 3=5-4-6
 Max Horz 1=66(LC 5)
 Max Uplift 1=-32(LC 4), 3=-42(LC 8)
 Max Grav 1=197(LC 1), 3=197(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDD=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed ; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

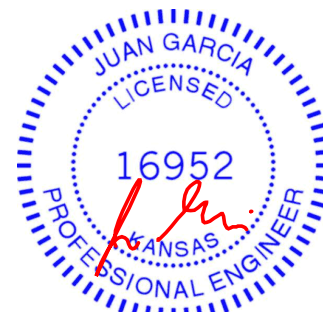

May 14, 2021



WARNING – Velly design parameters are READ-ONLY on this and INCLUDED WITH REFERENCE PAGE MH-1413 (Rev. 3/29/2020) BEFORE USE.
Design valid for use only with MITEK® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V5	Valley	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:18 2021 Page 1

ID: Hr0UloylgMOrZQ4rpild7XzssyG-bPCowSmmBOVm1749Pg18haCDeJMcKNd4RkZCdVZ

06/03/2021

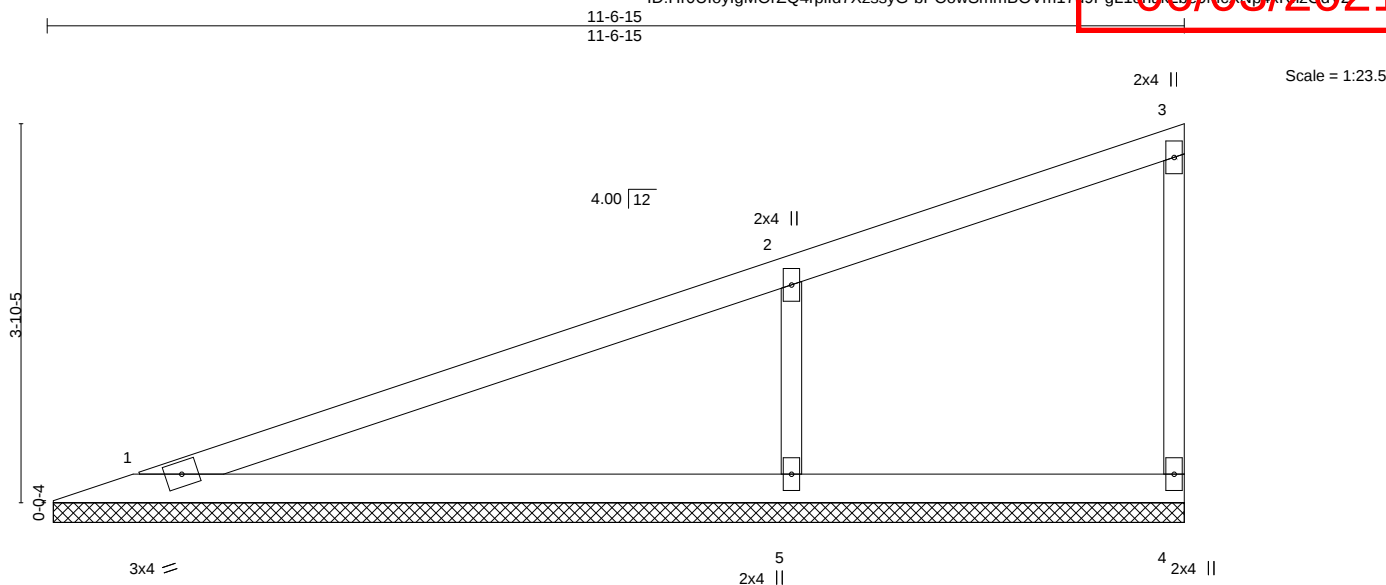

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.55	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.30	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.10	Horz(CT)	-0.00	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 30 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

(size) 1=11-6-3, 4=11-6-3, 5=11-6-3
Max Horz 1=157(LC 5)
Max Uplift 1=-22(LC 4), 4=-16(LC 5), 5=-149(LC 8)
Max Grav 1=242(LC 1), 4=79(LC 1), 5=628(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-5=-472/215

NOTES-

- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 4 except (jt=lb) 5=149.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component Safety Information** available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V6	Valley	1	1		AS NOTED FOR PLAN REVIEW
						DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:19 2021 Page 1

ID: Hr0UtoylgMOrZQ4rpild7XzssyG-3bmB7onOyiddeHTLyOsGhu6L3rL5IRX2k1rqBZCdV

06/03/2021

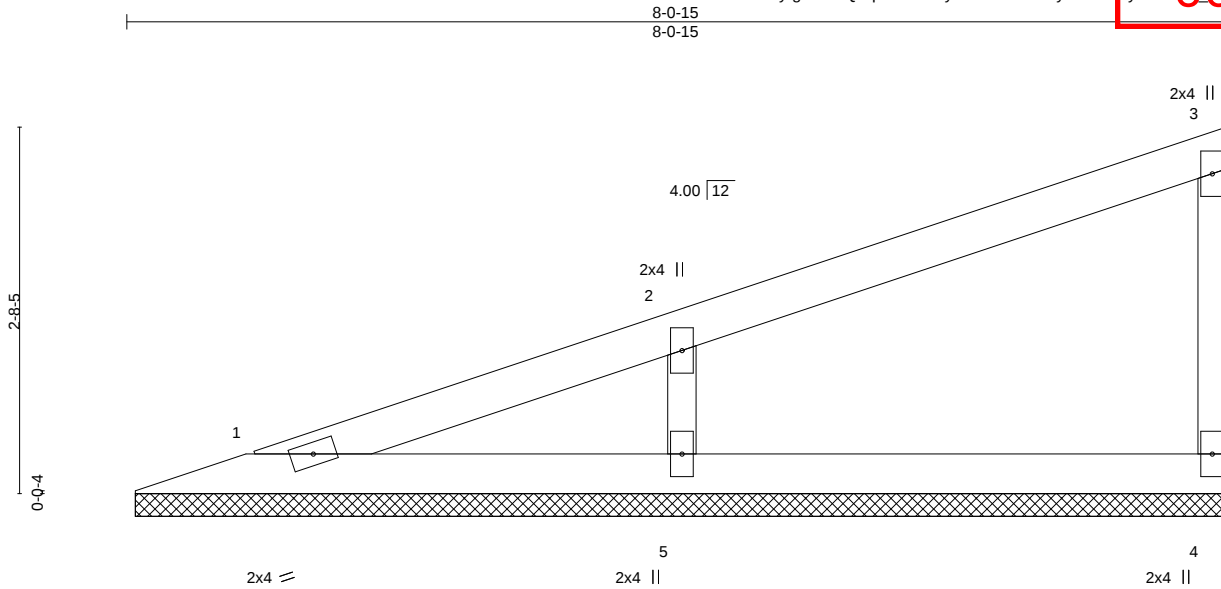

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.20	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.11	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.06	Horz(CT)	-0.00	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 20 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2
OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=8-0-3, 4=8-0-3, 5=8-0-3
Max Horz 1=105(LC 5)
Max Uplift 4=-25(LC 8), 5=-95(LC 8)
Max Grav 1=95(LC 1), 4=138(LC 1), 5=399(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

WEBS 2-5=-310/148

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 4, 5.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V7	Valley	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:19 2021 Page 1

ID: HrOUloylgMOrZQ4rpild7XzssyG-3bmB7onOyiddeHTLyOsGluE_31144X2KnpqBZCdV

06/03/2021

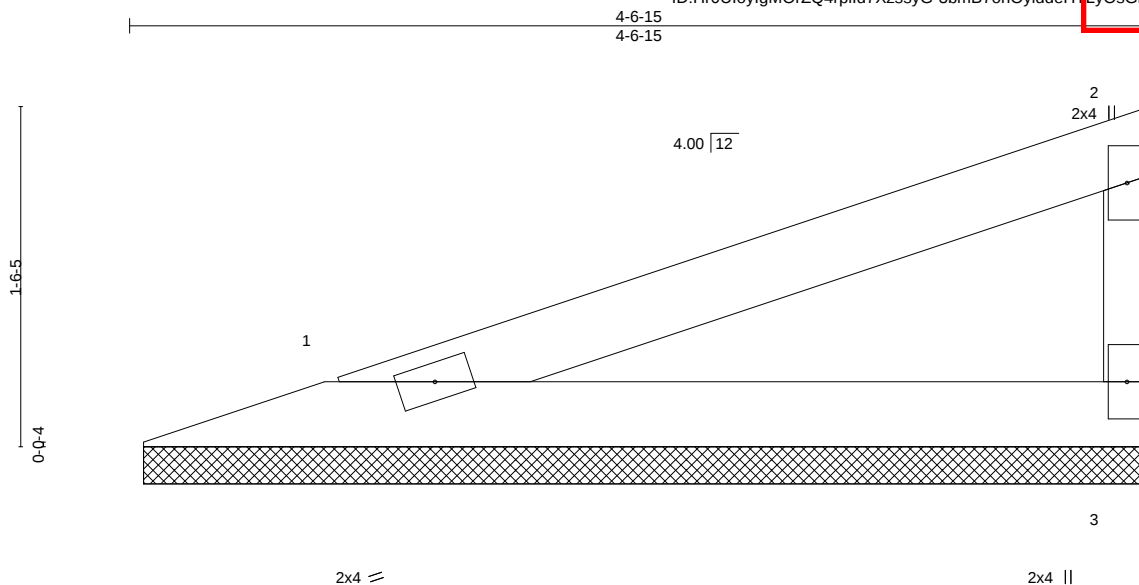

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.23	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.12	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 10 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-6-15 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.

REACTIONS.

(size) 1=4-6-3, 3=4-6-3
Max Horz 1=53(LC 5)
Max Uplift 1=26(LC 4), 3=34(LC 8)
Max Grav 1=159(LC 1), 3=159(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V8	Valley	1	1	Job Reference (optional)	AS NOTED FOR PLAN REVIEW
Wheeler Lumber, Waverly, KS - 66871,						DEVELOPMENT SERVICES
8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:22:20 2021 Page 1						LEE'S SUMMIT, MISSOURI

ID: Hr0UloylgMOrZQ4rpild7XzssyG-XnKZL8o0j?IUGR2XV5NVD6AipNgkKigHOCyMzZedW

06/03/2021

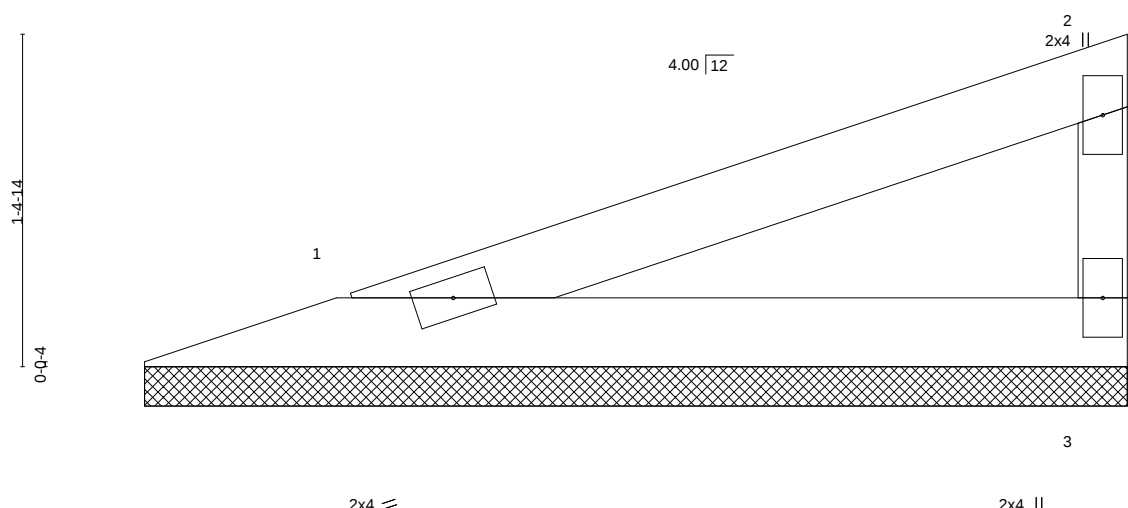

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.18	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.10	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	3	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-P					Weight: 9 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2
WEBS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 4-2-11 oc purlins, except end verticals.
BOT CHORD Rigid ceiling directly applied or 10-0-0 oc bracing.


REACTIONS.

(size) 1=4-1-15, 3=4-1-15
Max Horz 1=48(LC 5)
Max Uplift 1=23(LC 4), 3=30(LC 8)
Max Grav 1=143(LC 1), 3=143(LC 1)

FORCES. (lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.

NOTES-

- 1) Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- 2) Gable requires continuous bottom chord bearing.
- 3) This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- 4) * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- 5) Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3.
- 6) This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.

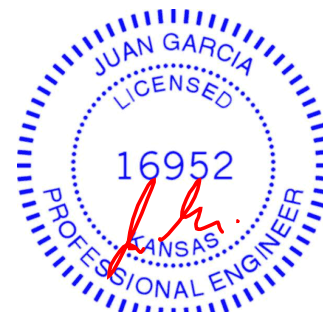

May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see **ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component**
Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017


Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V9	Valley	1	1		AS NOTED FOR PLAN REVIEW
					Job Reference (optional)	DEVELOPMENT SERVICES
						LEE'S SUMMIT, MISSOURI

Wheeler Lumber, Waverly, KS - 66871,

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:26:21 2021 Page 1

ID:Hr0UloylgMOrZQ4rpild7XzssyG-?_uxYUpfUJtLuad4pukmJCG6pB3ydcVZ6v3-GuVW

06/03/2021

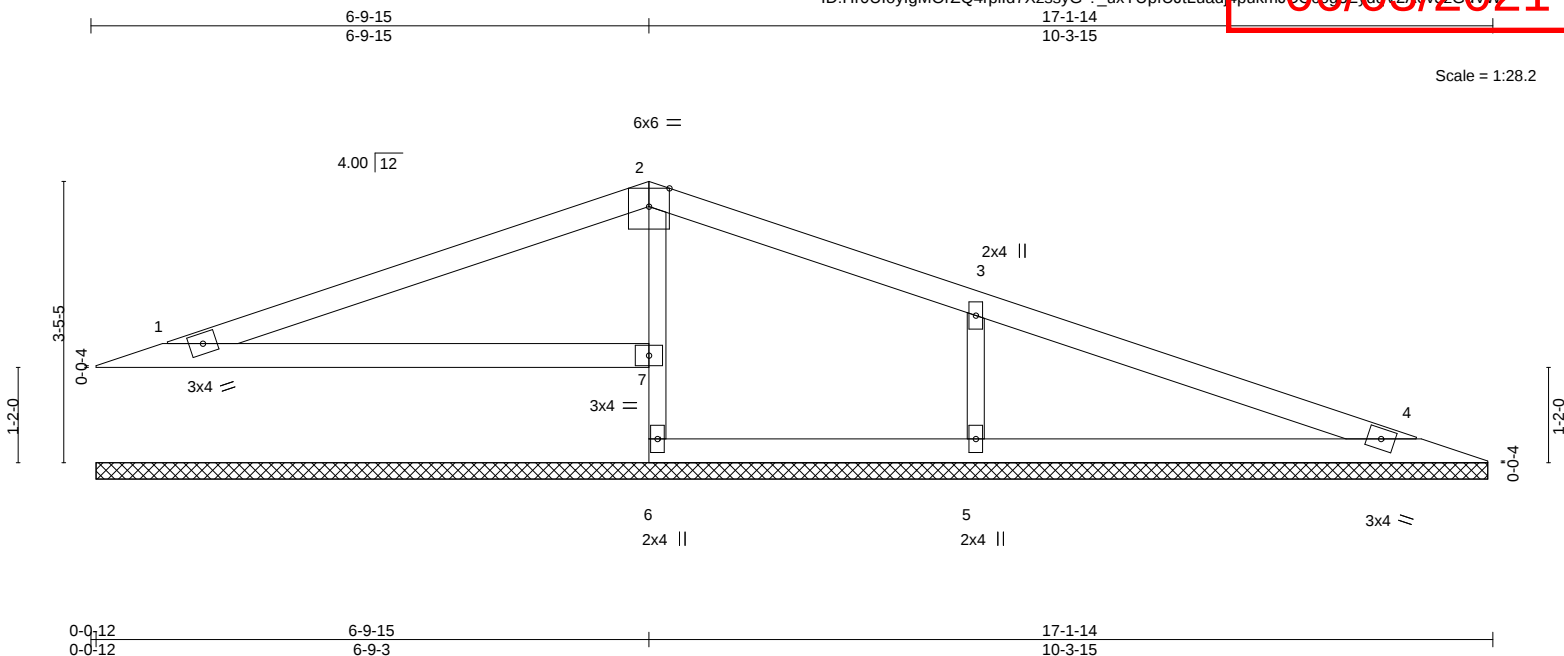

0-0-12	6-9-15	17-1-14
0-0-12	6-9-3	10-3-15

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.49	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.28	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.08	Horz(CT)	0.00	6	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-S					Weight: 41 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
 BOT CHORD 2x4 SPF No.2 *Except*
 2-6: 2x3 SPF No.2
 OTHERS 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
 BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 17-0-6.
 (lb) - Max Horz 1=-82(LC 9)
 Max Uplift All uplift 100 lb or less at joint(s) 1, 4, 7 except 5=-122(LC 9)
 Max Grav All reactions 250 lb or less at joint(s) 4, 6 except 1=251(LC 21), 7=405(LC 1), 5=525(LC 22)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
 BOT CHORD 2-7=-329/71
 WEBS 3-5=-395/182

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 7 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 4, 7 except (jt=lb) 5=122.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 1.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component

Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601




16023 Swingley Ridge Rd
 Chesterfield, MO 63017

Job	Truss	Truss Type	Qty	Ply	Lot 147 HT	RELEASE FOR CONSTRUCTION
210426	V10	Valley	1	1		AS NOTED FOR PLAN REVIEW
Wheeler Lumber, Waverly, KS - 66871,						DEVELOPMENT SERVICES
Job Reference (optional)						LEE'S SUMMIT, MISSOURI

8.430 s Apr 20 2021 MiTek Industries, Inc. Fri May 14 09:26:15 2021 Page 1
ID:Hr0UloylgMOrZQ4rpild7XzssyG-AqXglRkuuT7CAfAajYnKW2yLCOdYfGIX75jnh2Z6dVc

06/03/2021

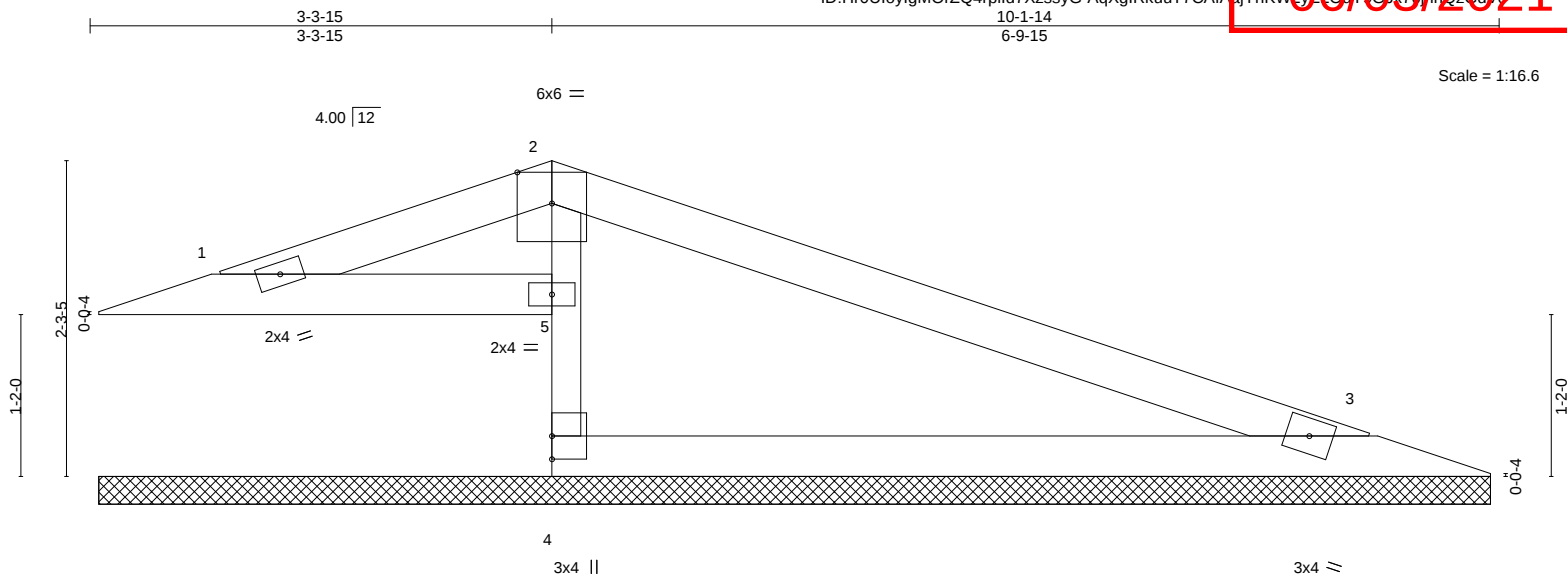

0-0-12	3-3-15	10-1-14
0-0-12	3-3-3	6-9-15

LOADING (psf)	SPACING-	2-0-0	CSI.	DEFL.	in (loc)	l/defl	L/d	PLATES	GRIP
TCLL 25.0	Plate Grip DOL	1.15	TC 0.48	Vert(LL)	n/a	-	n/a	MT20	197/144
TCDL 10.0	Lumber DOL	1.15	BC 0.29	Vert(CT)	n/a	-	n/a		
BCLL 0.0 *	Rep Stress Incr	YES	WB 0.00	Horz(CT)	-0.00	4	n/a		
BCDL 10.0	Code IRC2018/TPI2014		Matrix-R					Weight: 23 lb	FT = 10%

LUMBER-

TOP CHORD 2x4 SPF No.2
BOT CHORD 2x4 SPF No.2 *Except*
2-4: 2x3 SPF No.2

BRACING-

TOP CHORD Structural wood sheathing directly applied or 6-0-0 oc purlins.
BOT CHORD Rigid ceiling directly applied or 6-0-0 oc bracing.

REACTIONS.

All bearings 10-0-6.
(lb) - Max Horz 1=-62(LC 9)
Max Uplift All uplift 100 lb or less at joint(s) 1, 3, 5
Max Grav All reactions 250 lb or less at joint(s) 1, 3, 4 except 5=348(LC 1)

FORCES.

(lb) - Max. Comp./Max. Ten. - All forces 250 (lb) or less except when shown.
BOT CHORD 2-5=-318/98

NOTES-

- Unbalanced roof live loads have been considered for this design.
- Wind: ASCE 7-16; Vult=115mph (3-second gust) Vasd=91mph; TCDL=6.0psf; BCDL=6.0psf; h=25ft; Cat. II; Exp C; Enclosed; MWFRS (envelope) gable end zone; cantilever left and right exposed; end vertical left and right exposed; Lumber DOL=1.60 plate grip DOL=1.60
- Gable requires continuous bottom chord bearing.
- This truss has been designed for a 10.0 psf bottom chord live load nonconcurrent with any other live loads.
- * This truss has been designed for a live load of 20.0psf on the bottom chord in all areas where a rectangle 3-6-0 tall by 2-0-0 wide will fit between the bottom chord and any other members.
- Bearing at joint(s) 5 considers parallel to grain value using ANSI/TPI 1 angle to grain formula. Building designer should verify capacity of bearing surface.
- Provide mechanical connection (by others) of truss to bearing plate capable of withstanding 100 lb uplift at joint(s) 1, 3, 5.
- Beveled plate or shim required to provide full bearing surface with truss chord at joint(s) 1.
- This truss is designed in accordance with the 2018 International Residential Code sections R502.11.1 and R802.10.2 and referenced standard ANSI/TPI 1.



May 14, 2021

WARNING - Verify design parameters and READ NOTES ON THIS AND INCLUDED MITEK REFERENCE PAGE MII-7473 rev. 5/19/2020 BEFORE USE.

Design valid for use only with MiTek® connectors. This design is based only upon parameters shown, and is for an individual building component, not a truss system. Before use, the building designer must verify the applicability of design parameters and properly incorporate this design into the overall building design. Bracing indicated is to prevent buckling of individual truss web and/or chord members only. Additional temporary and permanent bracing is always required for stability and to prevent collapse with possible personal injury and property damage. For general guidance regarding the fabrication, storage, delivery, erection and bracing of trusses and truss systems, see

ANSI/TPI1 Quality Criteria, DSB-89 and BCSI Building Component


Safety Information available from Truss Plate Institute, 2670 Crain Highway, Suite 203 Waldorf, MD 20601



16023 Swingley Ridge Rd
Chesterfield, MO 63017

Wheeler Lumber, Waverly, KS - 66871, 8.430 s Apr 20 2021 MiTek Industries



May 14/09 22:16 2021 Page 1
3C UJ an juj y 5 Mm S D sz Gd y b

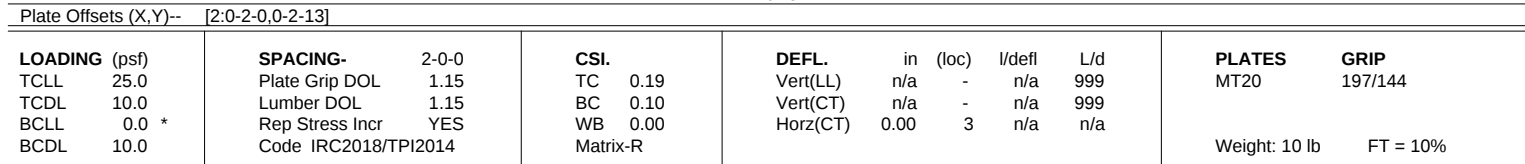

REACTIONS. (size) 4=4-6-3, 3=4-6-3
 Max Horz 4=-36(LC 4)
 Max Uplift 4=-31(LC 5), 3=-28(LC 5)
 Max Grav 4=159(LC 1), 3=159(LC 1)

NOTES-

-
- STATE OF MISSOURI
- JUAN GARCIA
- NUMBER E-2000162101
- PROFESSIONAL ENGINEER

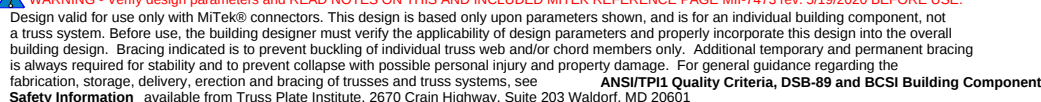


06/03/2021

Symbols

PLATE LOCATION AND ORIENTATION

Center plate on joint unless x, y offsets are indicated. Dimensions are in ft-in-sixteenths. Apply plates to both sides of truss and fully embed teeth.

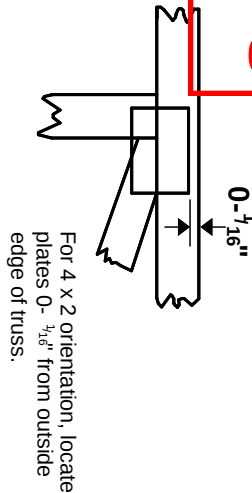

This symbol indicates the required direction of slots in connector plates.

* Plate location details available in **MiTek 20120** software or upon request.

PLATE SIZE

4 X 4


The first dimension is the plate width measured perpendicular to slots. Second dimension is the length parallel to slots.

LATERAL BRACING LOCATION



Indicated by symbol shown and/or by text in the bracing section of the output. Use T or I bracing if indicated.

BEARING




Indicates location where bearings (supports) occur. Icons vary but reaction section indicates joint number where bearings occur. Min size shown is for crushing only.

Industry Standards:

ANSI/TP1.1: National Design Specification for Metal Plate Connected Wood Truss Construction.
DSB-89: Design Standard for Bracing.
BCSI: Building Component Safety Information, Guide to Good Practice for Handling, Installing & Bracing of Metal Plate Connected Wood Trusses.

Numbering System

6-4-8 dimensions shown in ft-in-sixteenths (Drawings not to scale)

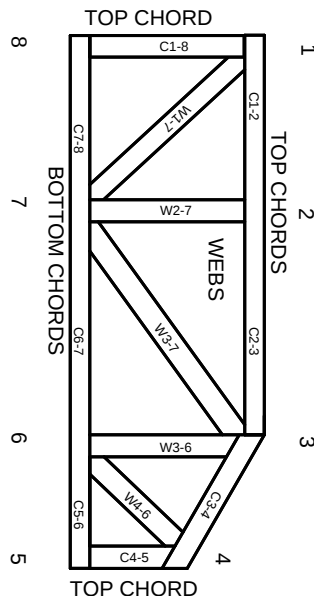

JOINTS ARE GENERALLY NUMBERED/LETTERED CLOCKWISE AROUND THE TRUSS STARTING AT THE JOINT FARTHEST TO THE LEFT.

CHORDS AND WEBS ARE IDENTIFIED BY END JOINT NUMBERS/LETTERS.

PRODUCT CODE APPROVALS

ICC-ES Reports:

ESR-1311, ESR-1352, ESR1988
ER-3907, ESR-2362, ESR-1397, ESR-3282

Trusses are designed for wind loads in the plane of the truss unless otherwise shown.

Lumber design values are in accordance with ANSI/TP1 1 section 6.3 These truss designs rely on lumber values established by others.

© 2012 MiTek® All Rights Reserved



MiTek Engineering Reference Sheet: MII-7473 rev. 5/19/2020



General Safety Notes

Failure to Follow Could Cause Property Damage or Personal Injury

1. Additional stability bracing for truss system, e.g. diagonal or X-bracing, is always required. See BCSI.
2. Truss bracing must be designed by an engineer. For wide truss spacing, individual lateral braces themselves may require bracing, or alternative Tor I bracing should be considered.
3. Never exceed the design loading shown and never stack materials on inadequately braced trusses.
4. Provide copies of this truss design to the building designer, erection supervisor, property owner and all other interested parties.
5. Cut members to bear tightly against each other.
6. Place plates on each face of truss at each joint and embed fully. Knots and wane at joint locations are regulated by ANSI/TP1 1.
7. Design assumes trusses will be suitably protected from the environment in accord with ANSI/TP1 1.
8. Unless otherwise noted, moisture content of lumber shall not exceed 19% at time of fabrication.
9. Unless expressly noted, this design is not applicable for use with fire retardant, preservative treated, or green lumber.
10. Camber is a non-structural consideration and is the responsibility of truss fabricator. General practice is to camber for dead load deflection.
11. Plate type, size, orientation and location dimensions indicated are minimum plating requirements.
12. Lumber used shall be of the species and size, and in all respects, equal to or better than that specified.
13. Top chords must be sheathed or purlins provided at spacing indicated on design.
14. Bottom chords require lateral bracing at 10 ft. spacing, or less, if no ceiling is installed, unless otherwise noted.
15. Connections not shown are the responsibility of others.
16. Do not cut or alter truss member or plate without prior approval of an engineer.
17. Install and load vertically unless indicated otherwise.
18. Use of green or treated lumber may pose unacceptable environmental, health or performance risks. Consult with project engineer before use.
19. Review all portions of this design (front, back, words and pictures) before use. Reviewing pictures alone is not sufficient.
20. Design assumes manufacture in accordance with ANSI/TP1 1 Quality Criteria.
21. The design does not take into account any dynamic or other loads other than those expressly stated.