



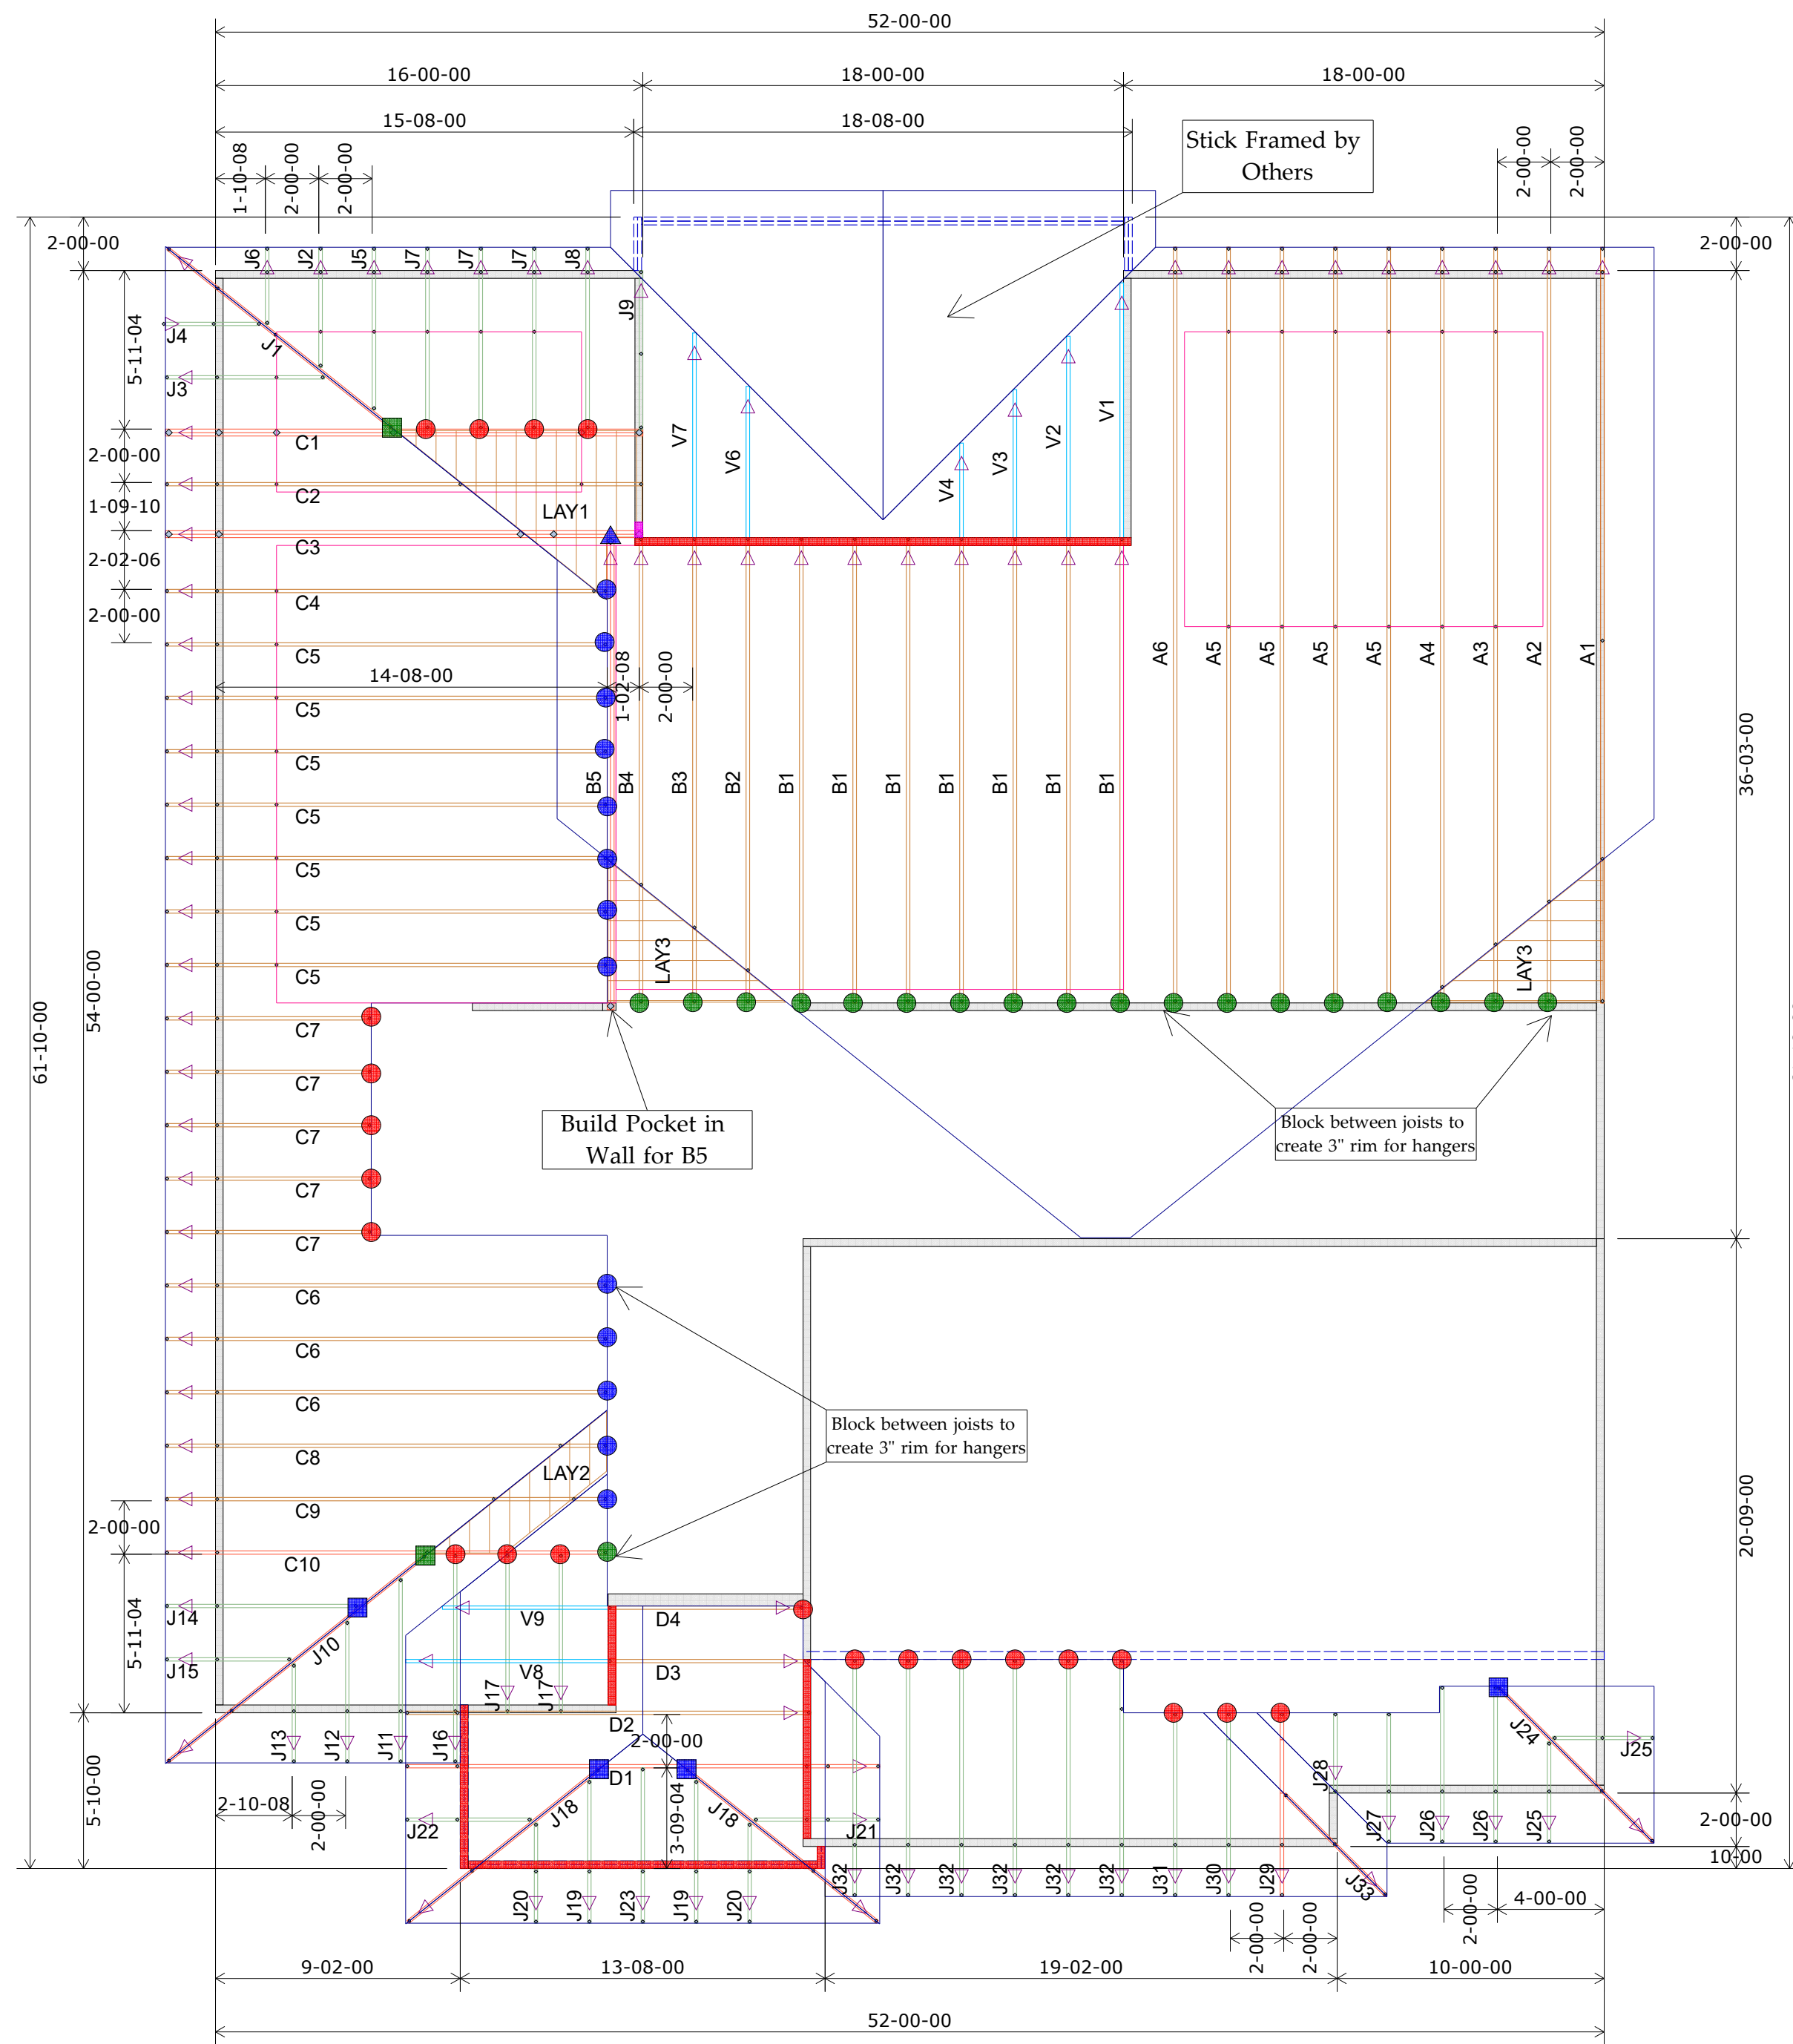

1st Floor Truss Layout
Scale: 3/16" = 1'

	HANGER SCHEDULE	Quantity
●	LUS24	25
●	LUS26	13
●	HUS26	28
▲	HHUS26-2	0
▲	HGUS26-2	1
▲	HGUS28-3	0
■	LTHJA26	0
■	TJC37	5
■	TJC57	8
▲	HTS20	0

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified
by Engineer Of Record,
Wheeler Lumber, LLC
recommends an uplift
connection at each bearing
point per the following:

# of Uplift	Connector
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson
Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Wall Heights 9-01-02 U.N.O.	
10-01-02	
11-01-02	

Customer	Summit Homes	
Job Name	Lot 102 The Reserve at Stoney Creek	
Job Site Address	1705 SW Hightown Dr.	
City,	State	Lee's Summit MO
Designer	Chance Lickteig (785) 746-4240	
10/26/2021	Job # 210331	

[illegible]

*Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871*

