


ROOF PLAN
1/8" = 1'-0"
ROOF PITCHES 6/12 FRONT TO BACK
ROOF PITCHES 10/12 SIDE TO SIDE
RAFTERS 2 X 6 DF NO 2 @ 16" OC TYP.
HIPS AND RIDGES 2 X 8 DF NO 2 TYP.




HILLCREST BEAD & BOARD
FRONT EL.
STONE, STUCCO AND BOARD & BATT
ELEVATION C



LEFT EL.
1/8" = 1'-0"




REAR EL.
1/8" = 1'-0"



RIGHT EL.
1/8" = 1'-0"

3 SIDES LP PANEL SIDING

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
Development Services
LEE'S SUMMIT, MISSOURI



BUILD IN ACCORDANCE WITH
2018 INTERNATIONAL
RESIDENTIAL CODE AND
LOCAL CODES.

TRUMARK CUSTOM HOMES
KYLE IV
LOT 196 WOODSIDE RIDGE
2221 NW KILLARNEY LANE
LEE SUMMIT MO

SCALE
1/4" = 1'-0"

DATE
5-12-22

PLAN NO.
3823

SHEET NO.
1 OF 4

ENERGY CONSERVATION CODE
THE FOLLOWING VALUES ARE NEEDED.

R-15 IN WALLS

R-49 IN ATTICS

R-38 IN VAULTS
R-30 REDUCTION FOR VAULTS IS ONLY FOR 500 SF
PF AREA

R-19 IN FLOORS OVER UNCONDITIONED SPACES



R-10 IN CRAWL SPACE WALLS

BASEMENT WALLS R-13 CAVITY OR R-10 CONTINUOUS

SLABS SHALL BE R-10 FOR A DEPTH OF 2 FOOT

A WINDOW U FACTOR OF .35 OR BETTER

DUCTWORK NEEDS TO HAVE AN R-8 VALUE

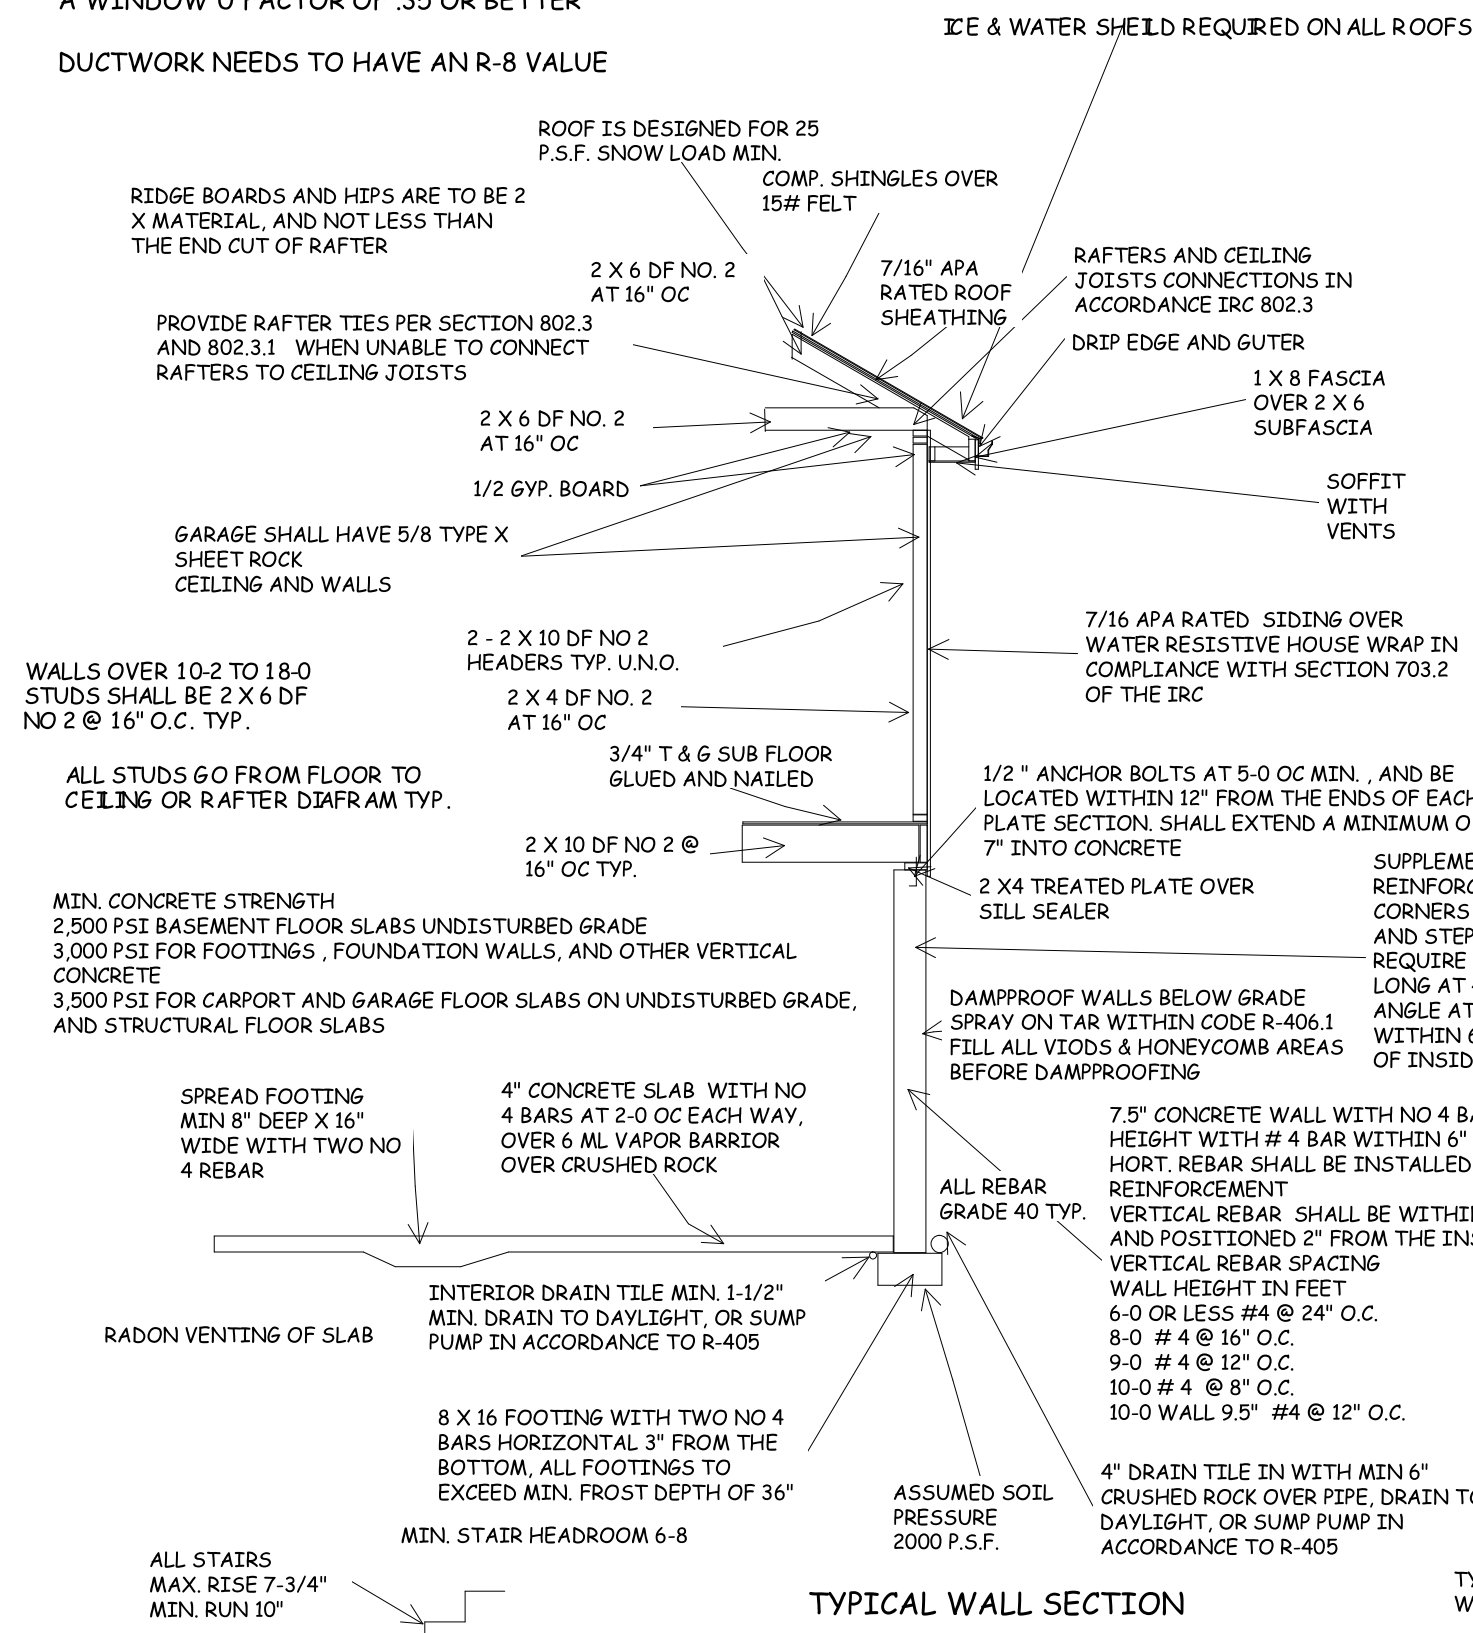

WINDOW SAFETY GLAZING PER 308

SAFETY GLAZING REQUIRED ALONG WALKING SURFACES AND STAIRS LOCATED WITHIN 36 INCHES HORIZONTALLY OF THE STEPS. SAFETY GLAZING REQUIRED IF EXPOSED SINGLE PANEL IS IN EXCESS OF 9 SQUARE FEET OR THE BOTTOM EDGE OF THE GLAZING IS LESS THAN 18 INCHES ABOVE THE FINISHED FLOOR.

SAFETY GLAZING REQUIRED WHERE THE NEAREST EXPOSED EDGE OF THE GLAZING IS WITHIN 24 INCHES OF EITHER VERTICAL EDGE OF THE DOOR IN A CLOSED POSITION AND WHERE THE BOTTOM EXPOSED EDGE OF THE GLAZING IS LESS THAN 60 INCHES ABOVE A WALKING SURFACE. SAFETY OR TEMPERED GLAZING IS REQUIRED.

WINDOWS ARE TO HAVE FALL PROTECTION PER IRC 312.2

WINDOW EGRESS REQUIREMENTS

BEDROOM WINDOW EGRESS MINIMUM FOR A DOUBLE HUNG WINDOW IS 34 INCH CLEAR WIDTH MIN. AND 24 INCH CLEAR HEIGHT MIN. WITH A CLEAR OPENABLE AREA OF 5.7 SQUARE FEET MIN. A CASEMENT OR SLIDER WINDOW MINIMUMS ARE 20 INCH CLEAR WIDTH MINIMUM AND 41 INCH CLEAR HEIGHT MINIMUM. WITH A MINIMUM 5.7 SQUARE FOOT OF OPENABLE AREA. OPENING OF EGRESS WINDOW NOT MORE THAN 42\"/>

ALL POINT LOADS SHALL HAVE A MINIMUM OF 2 STUDS UNLESS NOTED OTHERWISE

1. DWELLING / GARAGE OPENINGS BETWEEN GARAGE AND SLEEPING PURPOSES SHALL NOT BE PERMITTED. OTHER OPENINGS SHALL BE EQUIPPED WITH SOLID WOOD OR STEEL DOORS NOT LESS THAN 1 3/8\"/>

2. WHOLE HOUSE MECHANICAL VENTILATION SYSTEM IS REQUIRED FOR ANY DWELLING IN COMPLIANCE WITH IRC M 1505

3. CARBON MONOXIDE DETECTORS REQUIRED IRC R 315

4. STEEL COLUMNS SHALL BE MINIMUM SCHEDULE 40 R407.3

5. DECK SHALL BE BUILT PER TABLES 507.2, 507.2.1, 507.3, 507.6, 507.5.1(1)(2), 507.5, AND 507.6

6. STUDS SHALL BE CONTINUOUS BETWEEN FLOOR, CEILING AND OR ROOF DIAPHRAGMS R602.3

7. ADDED REQUIREMENTS FOR WINDOW FALL PROTECTION R312.2

8. NEW PROVISIONS FOR ATTACHMENT OF RAFTERS, TRUSSES AND ROOF BEAMS R802.3.1, R802.11

9. INSULATION REQUIRED FOR ALL BASEMENT WALLS (INCLUDING UNFINISHED BASEMENTS) N1102.1

10. EXTERIOR WINDOWS/DOORS SHALL HAVE U-FACTOR 0.35 AND GLAZING SHALL HAVE SOLAR HEIGHT GAIN FACTOR OF 0.40 N1102.1

11. HOUSE LEAKAGE AND DUCT LEAKAGE PERFORMANCE STANDARDS EFFECTIVE JANUARY 1, 2014. A SAMPLE TESTING PROGRAM WILL BE IMPLEMENTED OCTOBER 1, 2012 KCBRC N1102.4.1.2 N1103.2.2

12. LIGHTING FIXTURES PENETRATING THE THERMAL ENVELOPE (E.G. CANT LIGHTS IN ATTIC) SHALL BE IC-RATED, LEAKAGE-RATED AND SEALED TO THE GYP/SUM WALLBOARD N1102.4.4

13. PROGRAMMABLE THERMOSTAT REQUIRED N1103.1.1

14. AIR HANDLERS SHALL BE RATED FOR MAXIMUM 2 % AIR LEAKAGE RATE N1103.2.2.1

15. BUILDING CAVITIES USED AS RETURN AIR PLenums SHALL BE SEALED TO PREVENT LEAKAGE ACROSS THE THERMAL ENVELOPE KCBRC N1103.2.2

16. CERTAIN HOT WATER PIPES SHALL BE INSULATED N1103.4

17. ALL EXHAUST FANS SHALL TERMINATE TO THE BUILDING EXTERIOR M1507.2

18. MAKEUP AIR SYSTEM REQUIRED FOR KITCHEN EXHAUST HOODS THAT EXCEED 400 CFM M1503.4

19. BUILDING CAVITIES IN A THERMAL ENVELOPE WALL (INCLUDING THE WALL BETWEEN THE HOUSE AND GARAGE) SHALL NOT BE USED AS RETURN AIR PLenums

20. AN AIR HANDLING SYSTEM SHALL NOT SERVE BOTH THE LIVING SPACE AND THE GARAGE M1501.6

21. A CONCRETE- ENCASED GROUNDING ELECTRODE (\"/>

22. COMPLIANCE WITH THE REQUIREMENT AND SHOW CONNECTION AS NEEDED FOR ROOF BEAM, TRUS, RAFTER, AND GIBBER CONNECTION FOR UPLIFT PER IRC 802.11. ALL RAFTERS BE IN COMPLIANCE WITH IRC 502.11 AMENDED RAYMORE CODE

23. SUPPLEMENTAL REINFORCEMENT AT CORNERS OF OPENINGS AND STEP DOWNS REQUIRE 1 # 4 BAR 48\"/>

24. 7/16\"/>

25. 1/2\"/>

26. 2 X 4 TREATED PLATE OVER STILL SEALER

27. DAMPROOF WALLS BELOW GRADE SPRAY ON TAR WITHIN CODE R-406.1 STILL ALL Voids & HONEYCOMB AREAS BEFORE DAMPROOFING

28. 7/8\"/>

29. 4\"/>

30. ALL REBAR GRADE 40 TYP.

31. ASSUMED SOIL PRESSURE 2000 P.S.F.

32. MIN. STAIR HEADROOM 6-8

33. 8 X 16 FOOTING WITH TWO NO 4 BARS HORIZONTAL 3\"/>

34. INTERIOR DRAIN TILE MIN. 1-1/2\"/>

35. RADON VENTING OF SLAB

36. 4\"/>

37. 4\"/>

38. 4\"/>

39. 4\"/>

40. 4\"/>

41. 4\"/>

42. 4\"/>

43. 4\"/>

44. 4\"/>

45. 4\"/>

46. 4\"/>

47. 4\"/>


48. 4\"/>

49. 4\"/>


50. 4\"/>

ASK BUILDER GROUND ROD LOCATION

DOUBLE JOISTS UNDER ALL WALLS TYP.

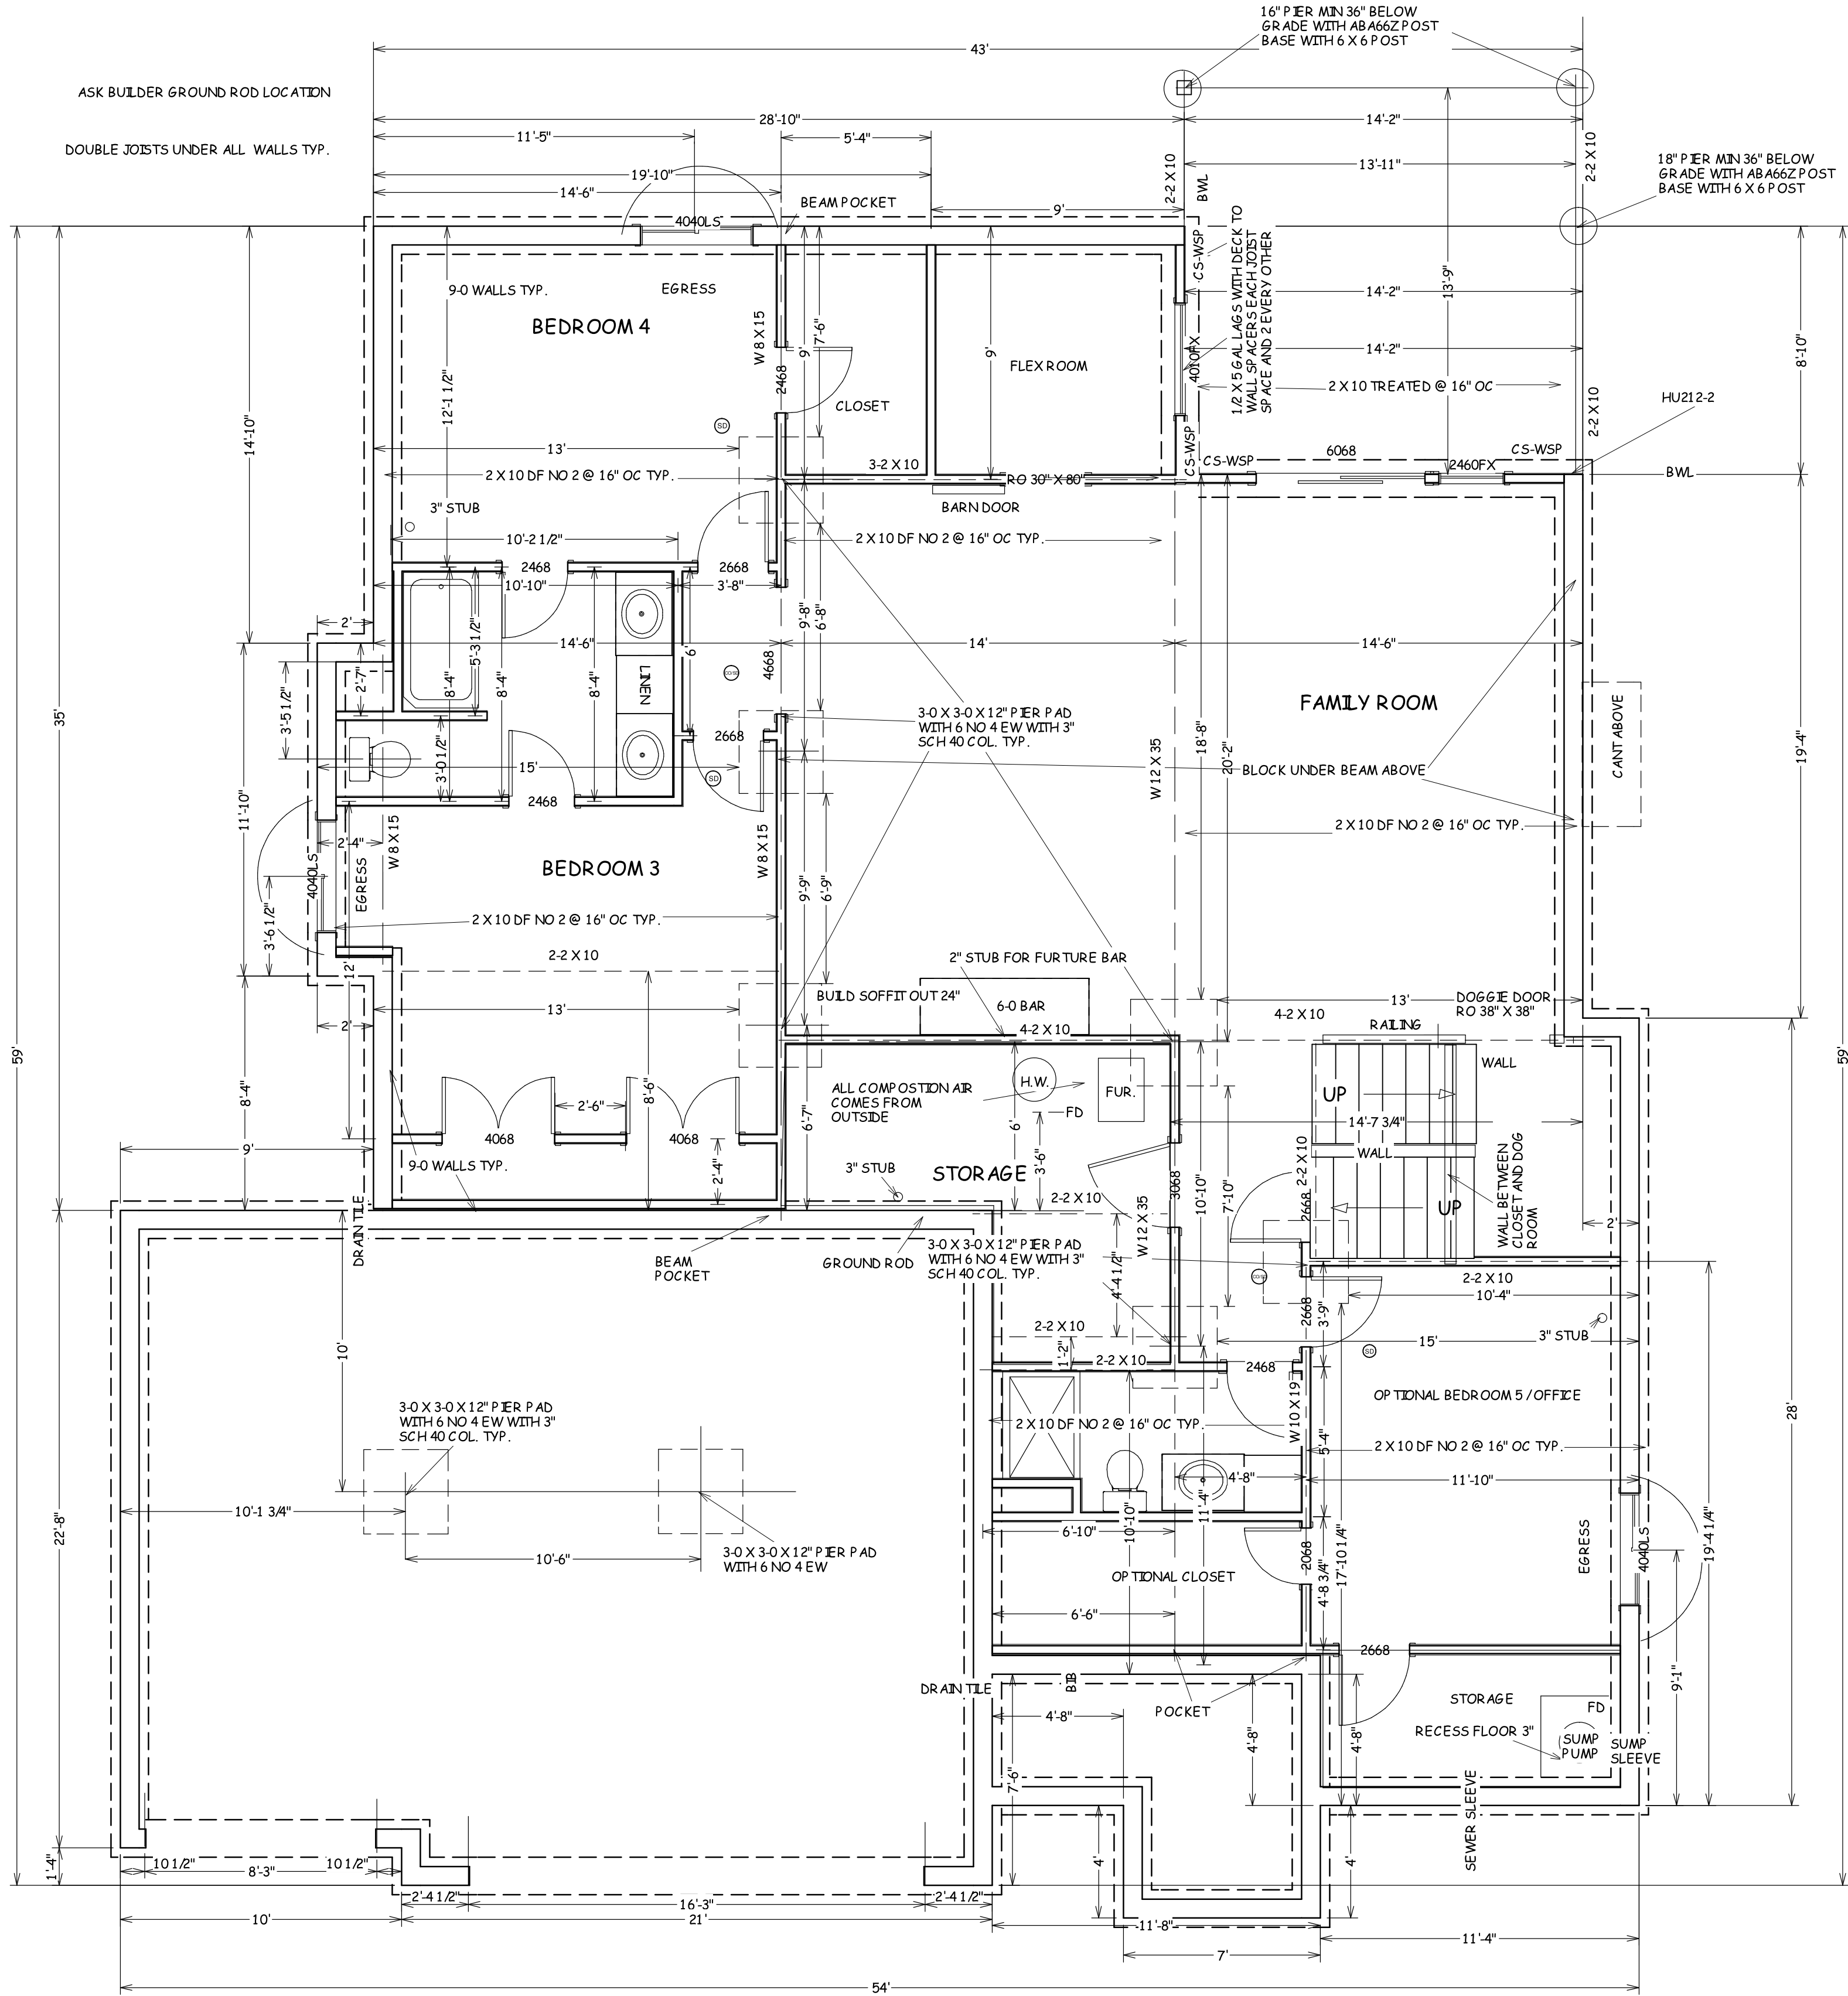

FOUNDATION PLAN
1222 SF FINISHED
198 SF OPTIONAL BEDROOM 5
167 SF STORAGE



BUILD IN ACCORDANCE WITH
2018 INTERNATIONAL
RESIDENTIAL CODE AND
LOCAL CODES.

TRUMARK CUSTOM HOMES
KYLE IV
LOT 196 WOODSIDE RIDGE
2221 NW KILLARNEY LANE
LEE SUMMIT MO

SCALE
1/4" = 1-0


DATE
5-12-22

PLAN NO.

3823


SHEET NO.

RELEASE FOR
CONSTRUCTION
PLANS REVIEW
Lee's Summit, Missouri




PURLIN PLAN


ROOF PITCHES 6/12 FRONT TO BACK
ROOF PITCHES 10/12 SIDE TO SIDE
RAFTERS 2 X 6 DF NO 2 @ 16" OC TYP.
HIPS AND RIDGES 2 X 8 DF NO 2 TYP.

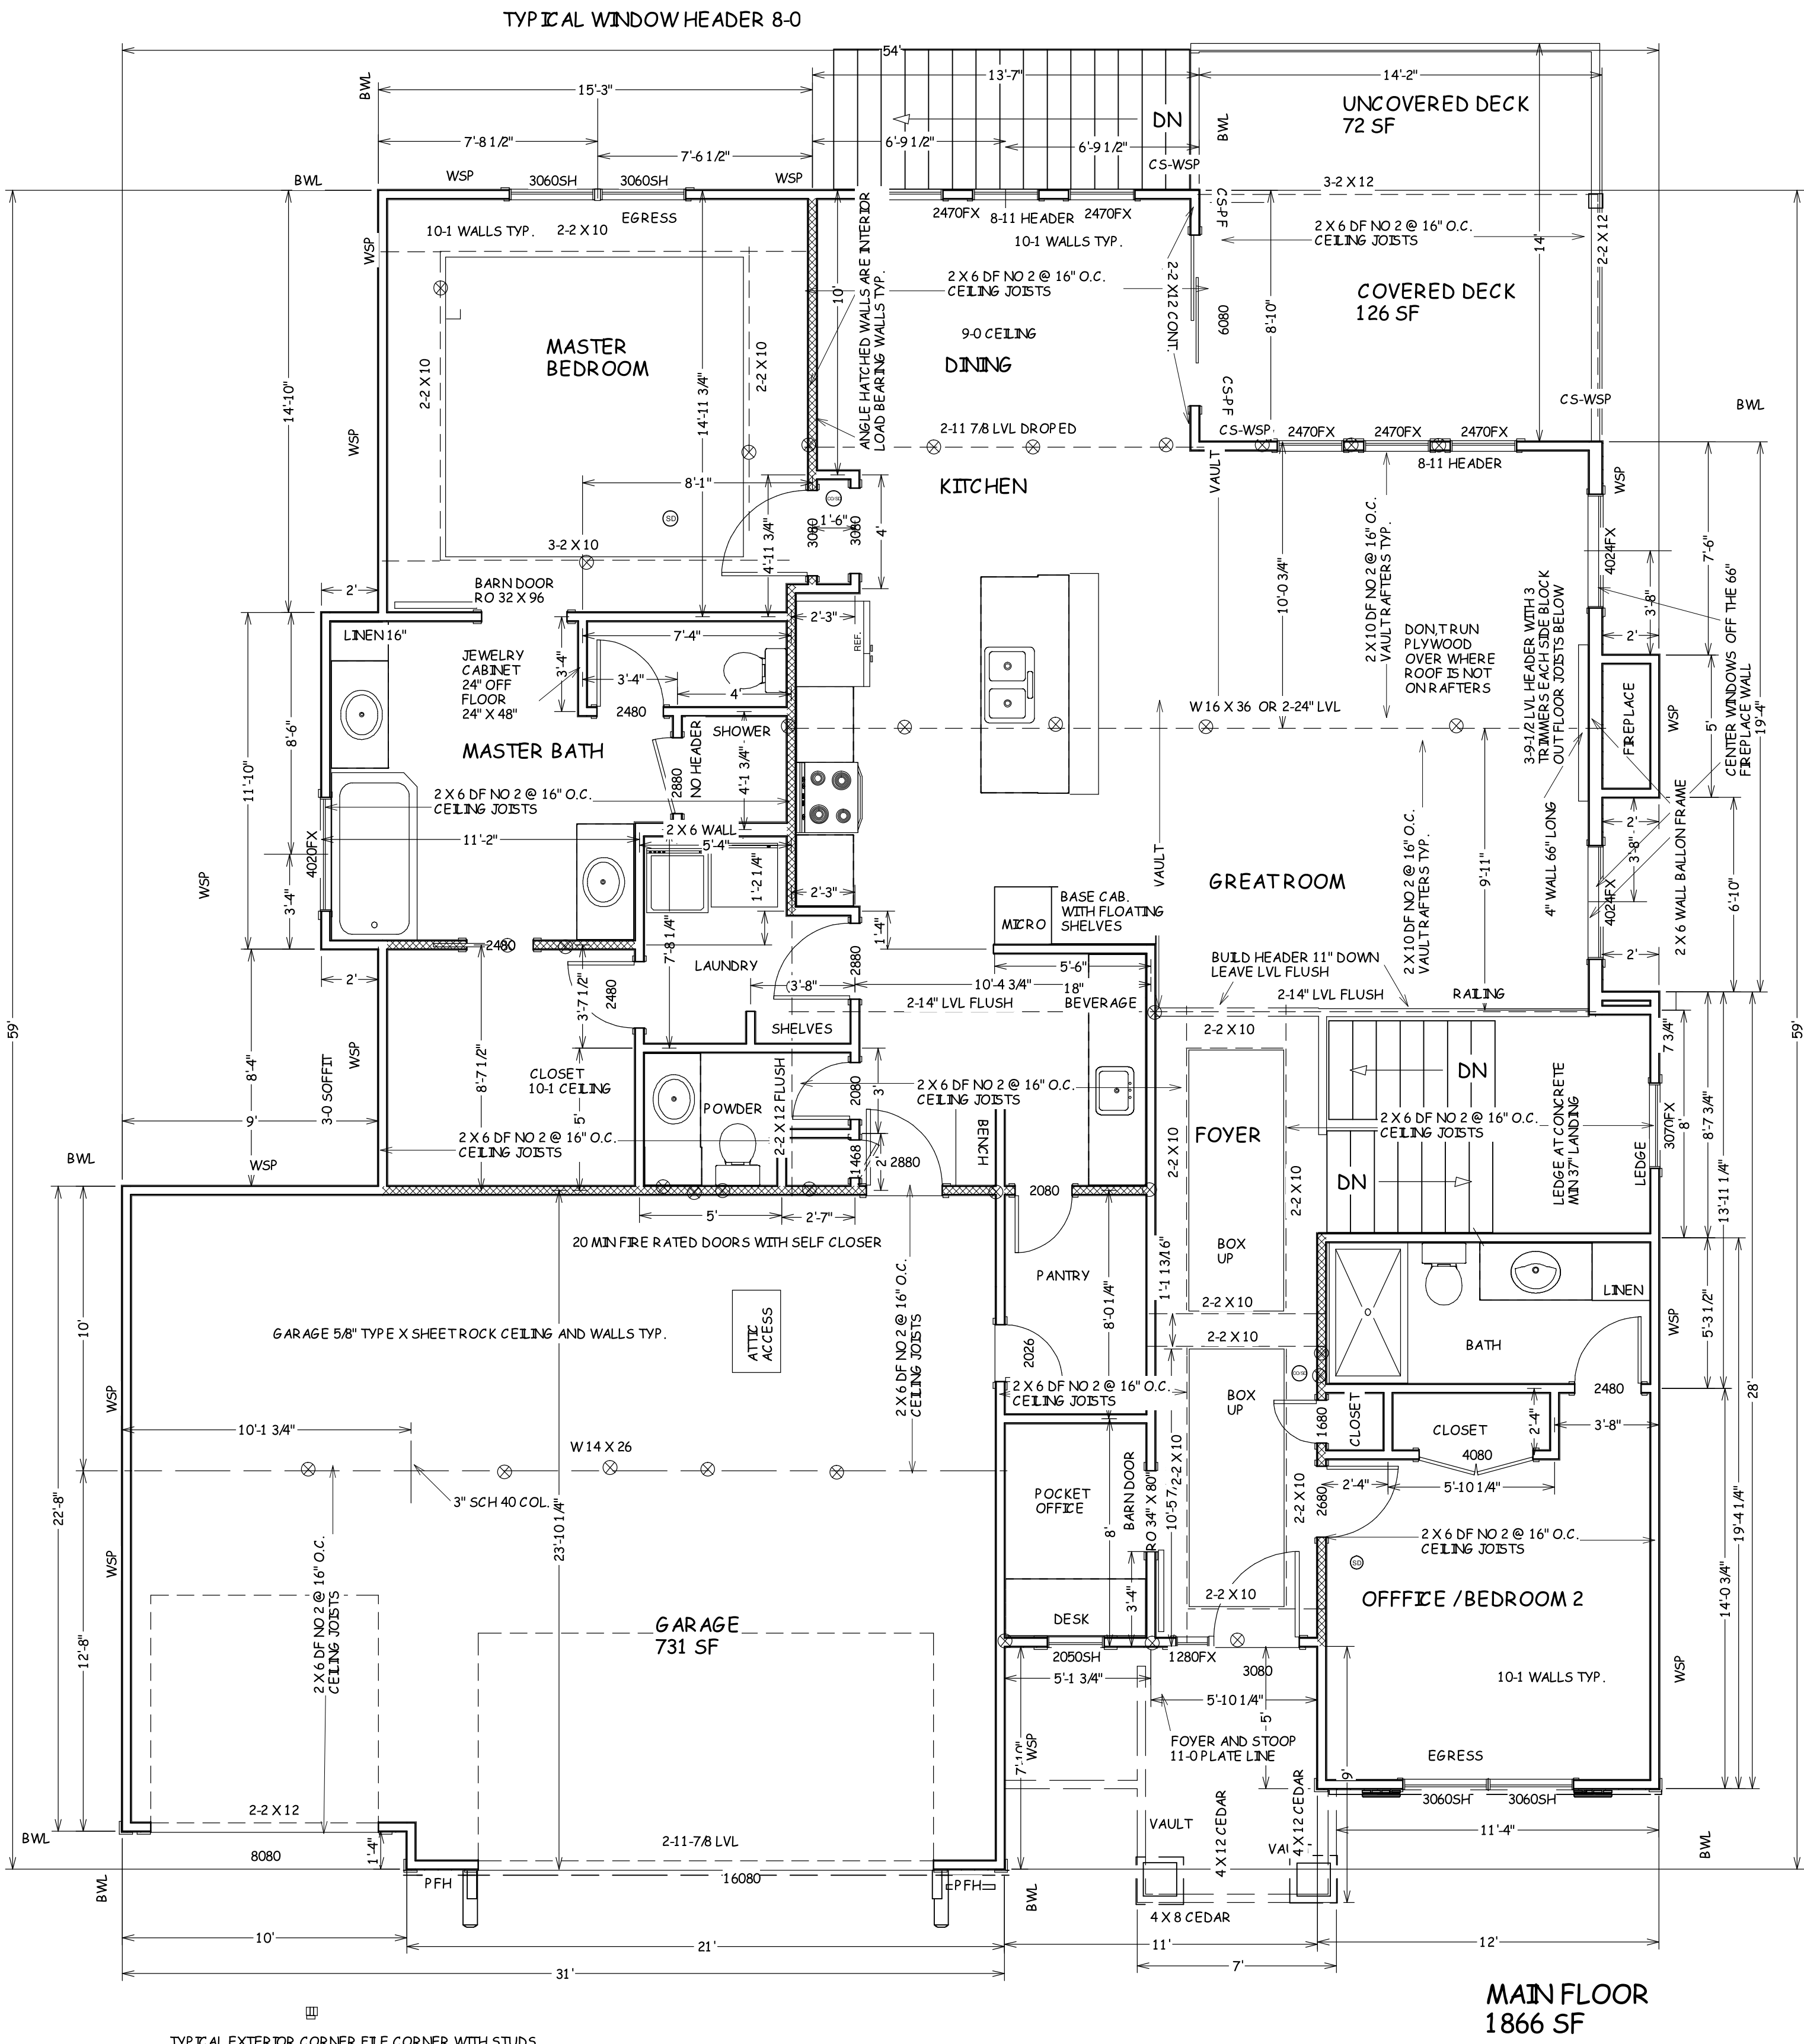

MAIN FLOOR 1866 SF



LADDER BLOCK WHERE INTERIOR WALLS INTERSECT WITH EXTERIOR WALLS



BUILD IN ACCORDANCE WITH
2018 INTERNATIONAL
RESIDENTIAL CODE AND
LOCAL CODES.

TRUMARK CUSTOM HOMES
KYLE IV
LOT 196 WOODSIDE RIDGE
2221 NW KILLARNEY LANE
LEE SUMMIT MO

SCALE
1/4" = 1'-0

DATE
5-12-22

PLAN NO.
3823

SHEET NO.

3 OF 4
PLEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
Development Services
LEE'S SUMMIT, MISSOURI

TABLE R602.10.2(1) BRACING REQUIREMENTS BASED ON WIND SPEED						
EXPOSURE CATEGORY B 35-FOOT MEAN ROOF HEIGHT 10-FOOT WALL HEIGHT 2 BRACED WALL LINES		MINIMUM TOTAL LENGTH (FEET) OF BRACED WALL PANELS REQUIRED ALONG EACH BRACED WALL LINE ^a				
Ultimate Design Wind Speed (mph)	Story Location	Braced Wall Line Spacing ^b (feet)	Method LIP ^c	Method GB	Methods DWB, WSP, SFB, PBS, FCF, HPS, BV-WSP, ABW, PPH, FCF, CS-SFB	Methods CS-WSP, CS-G, CS-PF
≤ 115		10	3.5	3.5	2.0	2.0
		20	6.5	6.5	3.5	3.5
		30	9.5	9.5	5.5	4.5
		40	12.5	12.5	7.0	6.0
		50	15.0	15.0	9.0	7.5
		60	18.0	18.0	10.5	9.0
		10	7.0	7.0	4.0	3.5
		20	12.5	12.5	7.5	6.5
		30	18.0	18.0	10.5	9.0
		40	23.5	23.5	13.5	11.5
		50	29.0	29.0	16.5	14.0
		60	34.5	34.5	20.0	17.0
		10	NP	10.0	6.0	5.0
		20	NP	18.5	11.0	9.0
		30	NP	27.0	15.5	13.0
		40	NP	35.0	20.0	17.0
		50	NP	43.0	24.5	21.0
		60	NP	51.0	29.0	25.0





FIGURE R602.10.6.1
METHOD ABW—ALTERNATE BRACED WALL PANEL

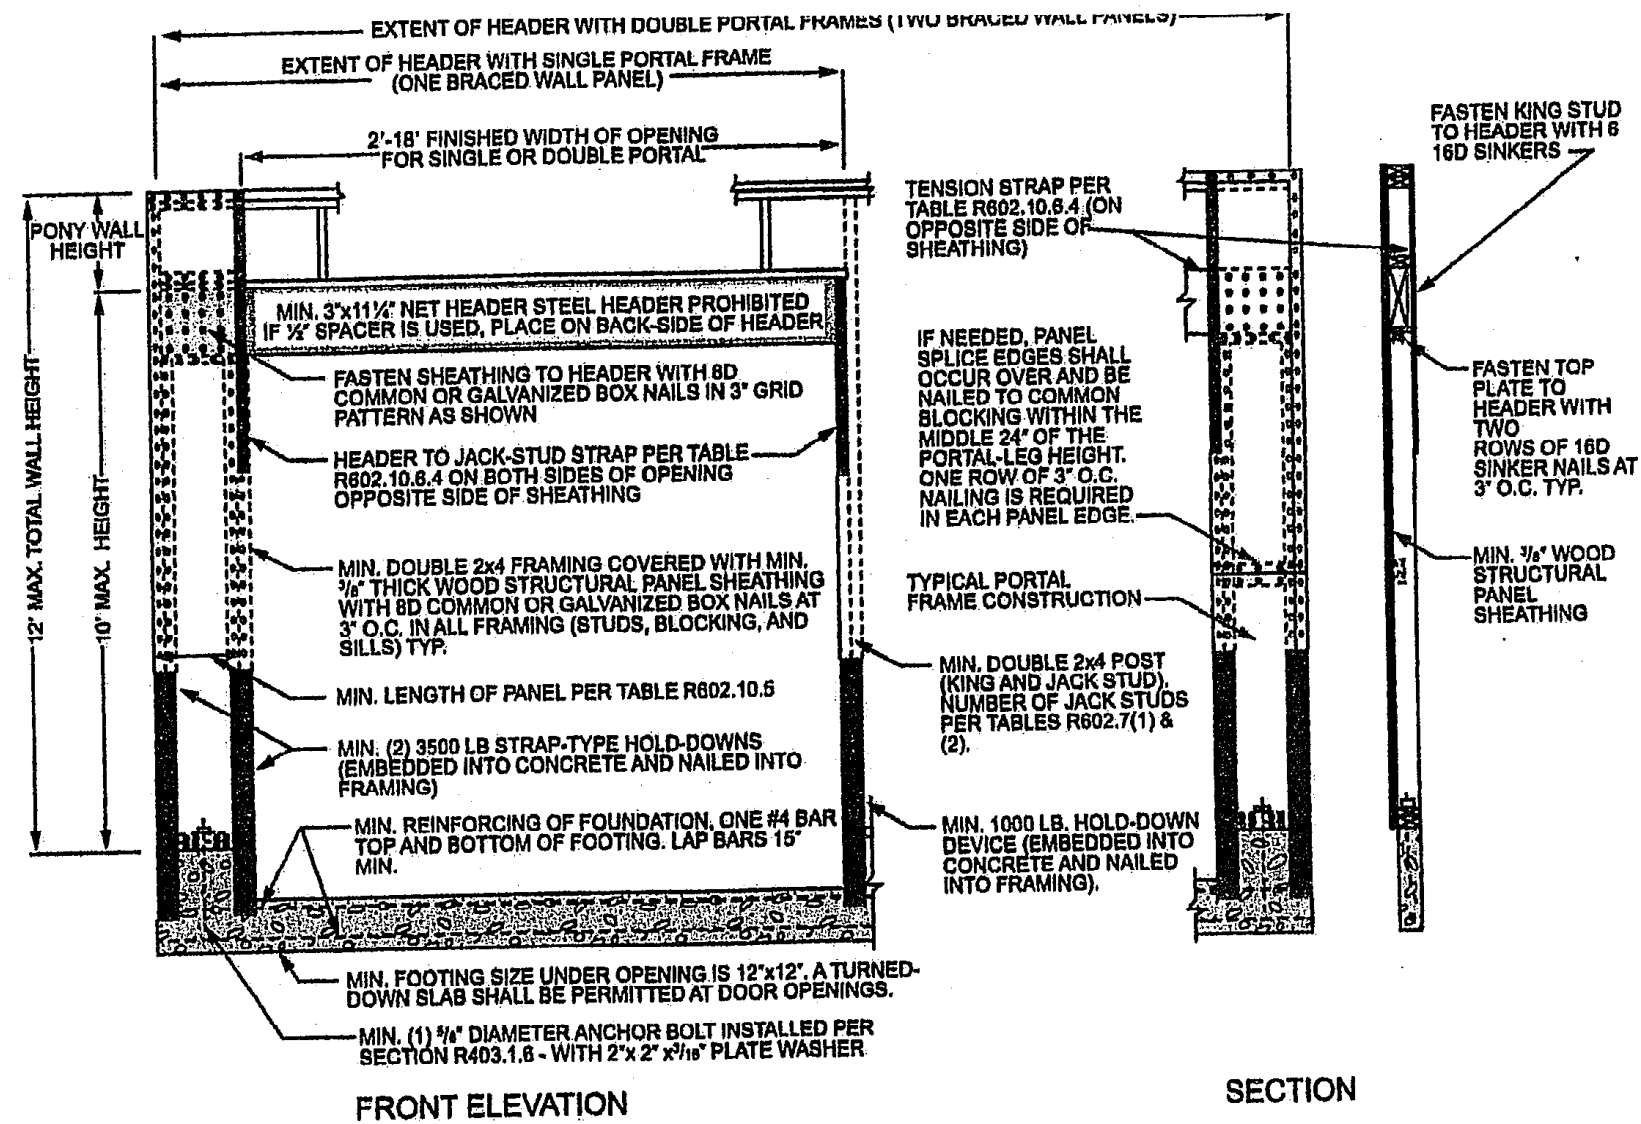

4 mm, 1 foot = 304.8 mm.

FIGURE R602.10.6.2
METHOD PFH—PORTAL FRAME WITH HOLD-DOWNS

TABLE R602.10.4 BRACING METHODS					
METHODS, MATERIAL	MINIMUM THICKNESS	FIGURE	CONNECTION CRITERIA ^a		
			Fasteners	Spacing	
LIP Let-in bracing	1 x 4 wood or approved metal straps at 45° to 60° angles for maximum 24" stud spacing		Wood: 2-8d common nails or 3-8d (2 1/2" long x 0.113" dia.) nails Metal strap: per manufacturer	Wood: per stud and top and bottom plates Metal: per manufacturer	
DWB Diagonal wood boards	1/2" (1" nominal) for maximum 24" stud spacing		2-8d (2 1/2" long x 0.113" dia.) nails or 2 - 1 1/2" long staples	Per stud	
WSP Wood structural panel (See Section R604)	3/4"		Exterior sheathing per Table R602.3(3) Interior sheathing per Table R602.3(1) or R602.3(2)	6" edges 12" field Varies by fastener	
BV-WSP ^b Wood structural panels with stone or masonry veneer (See Section R602.10.6.5)	3/16"	See Figure R602.10.6.5	8d common (2 1/2" x 0.131") nails	4" at panel edges 12" at intermediate supports 4" at braced wall panel end posts	
SFB Structural fiberboard sheathing	1/2" or 3/8" for maximum 16" stud spacing		1 1/2" long x 0.12" dia. (for 1/2" thick sheathing) 1 1/4" long x 0.12" dia. (for 3/8" thick sheathing) galvanized roofing nails	3" edges 6" field	
GB Gypsum board	1/2"		Nails or screws per Table R602.3(1) for exterior locations Nails or screws per Table R702.3.5 for interior locations	For all braced wall panel locations: 7" edges (including top and bottom panels) 7" field	
PBS Particleboard sheathing (See Section R605)	1/4" or 1/2" for maximum 16" stud spacing		For 1/4", 6d common (2" long x 0.113" dia.) nails For 1/2", 8d common (2 1/2" long x 0.131" dia.) nails	3" edges 6" field	
FCF Portland cement plaster	See Section R702.7 for maximum 16" stud spacing		1 1/2" long, 11 gage, 1/4" dia. head nails or 1/4" long, 16 gage staples	6" o.c. on all framing members	
HPS Hardboard panel siding	3/8" for maximum 16" stud spacing		0.092" dia., 0.225" dia. head nails with length to accommodate 1 1/2" penetration into studs	4" edges 8" field	
ABW Alternate braced wall	1/8"		See Section R602.10.6.1	See Section R602.10.6.1	

TABLE R602.10.5 MINIMUM LENGTH OF BRACED WALL PANELS						
METHOD (See Table R602.10.4)	MINIMUM LENGTH ^a (inches)					CONTRIBUTING LENGTH (inches)
	8 feet	9 feet	10 feet	11 feet	12 feet	
DWB, WSP, SFB, PBS, FCF, HPS, BV-WSP	48	48	48	53	58	Actual ^b
GB	48	48	48	53	58	Double sided = Actual Single sided = 0.5 x Actual
LIP	55	62	69	NP	NP	Actual ^b
ABW	SDC A, B and C, ultimate design wind speed < 140 mph	28	32	34	38	42
	SDC D ₁ , D ₂ and D ₃ , ultimate design wind speed < 140 mph	32	32	34	NP	NP
CS-G	Adjacent clear opening height (inches)	24	27	30	33	36
CS-WSP, CS-SFB	≤ 64	24	27	30	33	36
	68	26	27	30	33	36
	72	27	27	30	33	36
	76	30	29	30	33	36
	80	32	30	30	33	36
	84	35	32	32	33	36
	88	38	35	33	33	36
	92	43	37	35	35	36
	96	48	41	38	36	36
	100	—	44	40	38	38
	104	—	49	43	40	39
	108	—	54	46	43	41
	112	—	—	50	45	43
	116	—	—	55	48	45
	120	—	—	60	52	48
	124	—	—	—	61	54
	128	—	—	—	66	58
	132	—	—	—	—	62
	136	—	—	—	—	66
	140	—	—	—	—	72
	144	—	—	—	—	—
PFH	Supporting roof only	16	16	16	Note c	Note c
	Supporting one story and roof	24	24	24	Note c	Note c
PPG		24	27	30	Note d	1.5 x Actual ^b
CS-PF	SDC A, B and C	16	18	20	Note e	Note e
	SDC D ₁ , D ₂ and D ₃	16	18	20	Note e	Note e

For SFI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 mile per hour = 0.447 m/s.
NP = Not Permitted.
a. Linear interpolation shall be permitted.
b. Use the actual length where it is greater than or equal to the minimum length.
c. Maximum header height for PFH is 10 feet in accordance with Figure R602.10.6.2, but wall height shall be permitted to be increased to 12 feet with pony wall.
d. Maximum header height for PPG is 10 feet in accordance with Figure R602.10.6.3, but wall height shall be permitted to be increased to 12 feet with pony wall.
e. Maximum header height for CS-PF is 10 feet in accordance with Figure R602.10.6.4, but wall height shall be permitted to be increased to 12 feet with pony wall.

TABLE R602.10.4—continued BRACING METHODS					
METHODS, MATERIAL	MINIMUM THICKNESS	FIGURE	CONNECTION CRITERIA ^a		
			Fasteners	Spacing	
PFH Portal frame with hold-downs	1/8"		See Section R602.10.6.2	See Section R602.10.6.2	
PPG Portal frame at garage	1/8"		See Section R602.10.6.3	See Section R602.10.6.3	
Continuous Sheathing Methods	CS-WSP Continuously sheathed wood structural panel		Exterior sheathing per Table R602.3(3) Interior sheathing per Table R602.3(1) or R602.3(2)	6" edges 12" field Varies by fastener	
	CS-G ^b Continuously sheathed wood structural panel adjacent to garage openings		See Method CS-WSP	See Method CS-WSP	
	CS-PF Continuously sheathed portal frame		See Section R602.10.6.4	See Section R602.10.6.4	
	CS-SFB ^c Continuously sheathed structural fiberboard		1 1/4" long x 0.12" dia. (for 1/2" thick sheathing) 1 1/4" long x 0.12" dia. (for 3/8" thick sheathing) galvanized roofing nails	3" edges 6" field	

For SFI: 1 inch = 25.4 mm, 1 foot = 304.8 mm, 1 degree = 0.0175 rad, 1 pound per square foot = 47.8 N/m², 1 mile per hour = 0.447 m/s.
a. Additive attachment of wall sheathing, including Method GB, shall not be permitted in Seismic Design Categories C, D₁, D₂, and D₃.
b. Applies to panels next to garage door opening where supporting gable end wall or roof load only. Shall only be used on one wall of the garage. In Seismic Design Categories D₁, D₂ and D₃ roof covering dead load shall not exceed 3 psf.
c. Garage openings adjacent to a Method CS-G panel shall be provided with a header in accordance with Table R602.7(1). A full-height clear opening shall not be permitted adjacent to a Method CS-G panel.
d. Method CS-SFB does not apply in Seismic Design Categories D₁, D₂, and D₃.
e. Method applies to detached one- and two-family dwellings in Seismic Design Categories D₁ through D₃ only.




FIGURE R602.10.6.4
METHOD CS-PF—CONTINUOUSLY SHEATHED PORTAL FRAME PANEL CONSTRUCTION

For SFI: 1 inch = 25.4 mm, 1 foot = 304.8 mm.

BRACE WALL DETAILS
WIND SPEED 115 MPH
WIND EXPOSURE A
SEISMIC DESIGN CATEGORY A

BUILD IN ACCORDANCE WITH
2018 INTERNATIONAL
RESIDENTIAL CODE AND
LOCAL CODES.

TRUMARK CUSTOM HOMES
KYLE IV
LOT 196 WOODSIDE RIDGE
2221 NW KILLARNEY LANE
LEE SUMMIT MO

SCALE
1/4" = 1-0

DATE
5-12-22

PLAN NO.

3823

SHEET NO.

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
Development Services
LEE'S SUMMIT, MISSOURI