LEGEND:

SIDEWALK

CURB & GUTTER

TREELINE

—— P/L —— PROPERTY LINES

U/E

- TOP ELEVATION

UTILITY EASEMENT

WATER SURFACE ELEVATION

ASPHALT PAVEMENT - EXISTING

ASPHALT PAVEMENT - PROPOSED

CONCRETE PAVEMENT - EXISTING

ASPHALT PAVEMENT - EXISTING

CONCRETE SIDEWALK - EXISTING

CONCRETE SIDEWALK - PROPOSED

CURB & GUTTER - EXISTING

EXISTING LOT AND R/W LINES

STORM SEWER - EXISTING

TELEPHONE LINE - EXIST.

WATERLINE - EXISTING

EXISTING SANITARY MANHOLE

PROPOSED SANITARY MANHOLE

CABLE TV - EXISTING

-----FOC_x ----- FIBER OPTIC CABLE - EXISTING

OVERHEAD POWER LINE - EXIST

—— UGE, —— UNDERGROUND ELECTRIC - EX.

LIGHT - EXISTING

CLEANOUT

1 GRADING

2 SEEDING AND SODDING

TYPE "CG-2" CURB AND GUTTER

12 TYPE III SIDEWALK RAMP (MID-BLOCK RAMP)

17 | 18" HDPE END SECTION W/ TOEWALL

18 24" HDPE END SECTION W/ TOEWALL

19 48" HDPE END SECTION W/ TOEWALL

24 D₅₀-15" STONE RIP-RAP W/ FILTER FABRIC

20 STD. 6'X4' CURB INLET

21 STD. 4'X4' AREA INLET

28 | CITY PERMIT FEE

22 6'X6' DETENTION STRUCTURE

23 SCOUR BASIN/PLUNGE POOL

25 | EROSION CONTROL DEVICES 26 AB-3 FOR STREET CROSSING

29 LAND DISTURBANCE CITY FEE

27 | SIGNAGE & PAVEMENT MARKING

4 TYPE "CG-1" CURB AND GUTTER

5 SAWCUT EXISTING PAVEMENT

6 2" SURFACE COURSE - TYPE 3

7 4" BASE COURSE - TYPE 1

10* TYPE I SIDEWALK RAMP

11 TYPE II SIDEWALK RAMP

13 | 15" HDPE

14 | 18" HDPE

15 24" HDPE

16 | 48" HDPE

EXISTING MANHOLE

EXISTING AREA INLET

EXISTING CURB INLET

EXISTING GRATE INLET

EXISTING JUNCTION BOX

EXISTING STORM MANHOLE

8 10" BASE COURSE - MODOT TYPE 5 (WITH GEOGRID) (OPTION B)

9 * 6" BASE COURSE - MODOT TYPE 5 (6" CHEMICAL STABILIZATION) (OPTION A)

GAS LINE - EXISTING

EXISTING PLAT LINES

WATERLINE EASEMENT

STREET, STORMWATER, MASTER DRAINAGE PLAN AND EROSION AND SEDIMENT CONTROL WINTERSET VALLEY, 13TH PLAT

IN THE CITY OF LEE'S SUMMIT JACKSON COUNTY, MISSOURI

UTILITY CONTACTS:

(816) 607-2186

MISSOURI DEPARTMENT OF TRANSPORTATION (MODOT) Steve Holloway 600 NE Colbern Road Lee's Summit, MO 64086

MISSOURI GAS ENERGY (MGE) Brent Jones 3025 SE Clover Drive Lee's Summit, MO 64082 (816) 399-9633 brent.jones@spireenergy.com

KANSAS CITY POWER & LIGHT COMPANY (KCP&L) Ron Dejarnette 1300 SE Hamblin Road Lee's Summit, MO 6408 Office: (816) 347-4316 Cell: (816) 810-5234

ron.dejarnette@kcpl.com

(816) 969-1800

CITY OF LEES SUMMIT PUBLIC WORKS Dena Mezger 220 SE Green Street Lee's Summit, MO 64063

Mark Manion or Marty Loper 500 E. 8th Street, Room 370 Kansas City, MO 64106 (816) 275-2341 or (816) 275-1550

John Meadows 4700 Little Blue Parkway Independence, MO 64057 (816) 795-2257

PUBLIC WATER SUPPLY DISTRICT Mark Schaufler 220 SE Green Street Lee's Summit, MO 64063

QUANTITY | UNITS

1

1,535

151

2,732

2,732

3,210

255

130

160

238

2

5

13

62

LS

LF

LF

LF

SY

SY

SY

SY

EA

EA

EA

LF LF

LF

LF

EA

EA

EA

EA

EA

EA

EA

CY

LS

SY

LS

LS

LS

LS

(816) 969-1900

SUMMARY OF QUANTITIES

GENERAL NOTES

- ALL CONSTRUCTION TO FOLLOW THE CITY OF LEE'S SUMMIT DESIGN AND CONSTRUCTION MANUAL AS
- ALL WORKMANSHIP AND MATERIALS SHALL BE SUBJECT TO THE INSPECTION AND APPROVAL OF THE
- ENGINEERING DEPARTMENT OF THE CITY OF LEE'S SUMMIT, MISSOURI LINEAL FOOT MEASUREMENTS SHOWN ON THE PLANS ARE HORIZONTAL MEASUREMENTS. NOT SLOPE MEASUREMENTS. ALL PAYMENTS SHALL BE MADE ON HORIZONTAL MEASUREMENTS.
- THE UTILITY LOCATIONS SHOWN ON THESE PLANS ARE TAKEN FROM UTILITY COMPANY RECORDS AND

- BY THE CONTRACTOR IN STRICT ACCORDANCE WITH ALL LOCAL CODES AND ORDINANCES.
- THE CONTRACTOR SHALL CONTROL THE EROSION AND SILTATION DURING ALL PHASED OF CONSTRUCTION
- AND SHALL KEEP THE STREETS CLEAN OF MUD AND DEBRIS ALL MANHOLES. CATCH BASINS. UTILITY VALVES AND METER PITS TO BE ADJUSTED OR REBUILT TO GRADE
- THE CONTRACTOR SHALL CONTACT DEVELOPMENT SERVICES INSPECTIONS AT: 816-969-1800 TO OBTAIN A DEVELOPMENT SERVICES CONSTRUCTION PERMIT. A MINIMUM 48 HOUR NOTICE SHALL BE GIVEN PRIOR TO
- THE CONTRACTOR SHALL CONTACT THE CITY'S EROSION CONTROL SPECIALIST AT: 816-969-1800 PRIOR TO
- ANY LAND DISTURBANCE THE CONTRACTOR SHALL CONTACT THE RIGHT OF WAY INSPECTOR AT 816-969-1800 PRIOR TO ANY LAND
- 17. THE CONTRACTOR SHALL PROVIDE AND MAINTAIN ALL TRAFFIC HANDLING MEASURES NECESSARY TO ENSURE THAT THE GENERAL PUBLIC IS PROTECTED AT ALL TIMES. TRAFFIC CONTROL SHALL CONFORM TO THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD-LATEST EDITION).

DISTURBANCE ACTIVITIES WITHIN THE RIGHT OF WAY. THESE ACTIVITIES MAY REQUIRE A PERMIT.

STREET NOTES

- 1. ALL STREET CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST EDITION OF THE CITY OF LEE'S SUMMIT DESIGN AND CONSTRUCTION MANUAL, ALL APPLICABLE AASHTO STANDARDS HAVE BEEN MET. 2. ALL INSPECTION OF STREET CONSTRUCTION TO BE PERFORMED BY THE CITY OF LEE'S SUMMIT PUBLIC
- WORKS DEPARTMENT CURB RETURN RADII SHALL BE 25' AT BACK OF CURB UNLESS OTHERWISE NOTED.
- SUBGRADE TO BE COMPACTED TO 95% STANDARD PROCTOR DENSITY
- ASSUMED DESIGN SPEED = 25 MPH (COLLECTOR). MINIMUM STOPPING SIGHT DISTANCE = 155 FEET.
- MINIMUM K, SAG CURVE = 26 (14 WITH LIGHTING), CREST CURVE = 12.
- GRADE INTERSECTIONS TO DRAIN AS SHOWN. SSD = STOPPING SIGHT DISTANCE.

EARTHWORK:

- IT IS RECOMMENDED THAT A GEOTECHNICAL ENGINEER OBSERVE AND DOCUMENT ALL EARTHWORK
- EXISTING SITE TO THE FINISHED GRADE (OR SUB-GRADE) ELEVATIONS PROVIDED ON THE PLANS AS SPOT GRADES. CONTOURS OR OTHERS MEANS AS INDICATED ON THE PLANS.
- DEFINED BY THE NATIONAL MAP ACCURACY STANDARDS. ANY QUANTITIES PROVIDED FOR EARTHWORK
- THERWISE NOTED, ALL EARTHWORK IS CONSIDERED UNCLASSIFIED. NO ADDITIONAL

- UNLESS OTHERWISE SPECIFIED IN THE GEOTECHNICAL REPORT, ALL FILLS SHALL BE PLACED IN MAXIMUM
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR REDISTRIBUTING THE TOPSOIL OVER PROPOSED TURF AND LANDSCAPED AREAS TO A MINIMUM DEPTH OF 6-INCHES BELOW FINAL GRADE.
- ALL AREAS SHALL BE GRADED FOR POSITIVE DRAINAGE. UNLESS NOTED OTHERWISE THE FOLLOWING
- A. TURF AREAS 2.5% MINIMUM, 4H:1V MAXIMUM B. PAVED AREAS – 1.2% MINIMUM, 5% MAXIMUM
- ALL DISTURBED AREAS SHALL BE FERTILIZED, SEEDED AND MULCHED IMMEDIATELY AFTER EARTHWORK ACTIVITIES HAVE CEASED. SEEDING SHALL BE PER THE EROSION AND SEDIMENT CONTROL PLAN AND/OR LANDSCAPE PLAN. IF NOT SPECIFIED SEEDING SHALL BE PER APWA SECTION 2400, LATEST EDITION. UNLESS OTHERWISE NOTED, SEEDING SHALL BE SUBSIDIARY TO THE CONTRACT PRICE FOR EARTHWORK AND
- 14. ALL DISTURBED AREAS IN THE RIGHT-OF-WAY SHALL BE SODDED.
- 15. UNDERDRAINS ARE RECOMMENDED FOR ALL PAVED AREAS ADJACENT TO IRRIGATED TURF AND LANDSCAPED BEDS.
- 16. CONTRACTOR SHALL ADHERE TO THE REPORTING REQUIREMENTS OUTLINED IN THE STORM WATER POLLUTION PREVENTION PLAN (SWPPP) PREPARED FOR THIS PROJECT. EROSION AND SEDIMENT CONTROL DEVICES SHALL BE PROPERLY MAINTAINED AND KEPT CLEAN OF SILT AND DEBRIS AND IN GOOD WORKING ORDER, ADDITIONAL EROSION AND SEDIMENT CONTROL MEASURES SHALL BE INSTALLED AS REQUIRED.

UTILITIES:

- EXISTING UTILITIES HAVE BEEN SHOWN TO THE GREATEST EXTENT POSSIBLE BASED UPON INFORMATION PROVIDED TO THE ENGINEER. THE CONTRACTOR IS RESPONSIBLE FOR CONTACTING THE RESPECTIVE UTILITY COMPANIES AND FIELD LOCATING UTILITIES PRIOR TO CONSTRUCTION AND IDENTIFYING ANY POTENTIAL CONFLICTS. ALL CONFLICTS SHALL IMMEDIATELY BE BROUGHT TO THE ATTENTION OF THE ENGINEER.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR COORDINATING ANY REQUIRED UTILITY RELOCATIONS. UTILITIES DAMAGED THROUGH THE NEGLIGENCE OF THE CONTRACTOR SHALL BE REPAIRED AT THE CONTRACTOR'S EXPENSE
- CONTRACTOR SHALL VERIFY FLOW-LINES AND STRUCTURE TOPS PRIOR TO CONSTRUCTION, AND SHALL NOTIFY ENGINEER OF ANY DISCREPANCIES. PROVIDE SHOP DRAWINGS FOR ALL PRECAST AND MANUFACTURED UTILITY STRUCTURES FOR REVIEW BY THE ENGINEER PRIOR TO CONSTRUCTION OF THE
- UTILITY SEPARATION: WATERLINES SHALL HAVE A MINIMUM OF 10 FEET HORIZONTAL AND 2 FEET VERTICAL SEPARATION FROM ALL SANITARY AND STORM SEWER LINES. IF MINIMUM SEPARATIONS CAN NOT BE OBTAINED, A CONTINUOUS CASING PIPE MUST BE USED ON THE WATER LINE AND EXTEND NO LESS THAN 10 FEET IN EACH DIRECTION FROM THE CROSSING OF THE SANITARY OR STORM SEWER LINE IN CONFLICT.
- PAYMENT FOR TRENCHING, BACKFILLING, PIPE EMBEDMENT, FLOWABLE FILL, BACKFILL MATERIALS, CLEAN UP, SEEDING, SODDING AND ANY OTHER ITEMS NECESSARY FOR THE CONSTRUCTION OF THE UTILITY LINE SHALL BE INCLUDED IN THE CONTRACT PRICE FOR THE UTILITY INSTALLATION.
- THE CONTRACTOR SHALL BE RESPONSIBLE FOR CONTACTING RESPECTIVE UTILITY COMPANIES 48-HOURS IN ADVANCE FOR THE INSPECTION OF ANY PROPOSED UTILITY MAIN EXTENSION OR SERVICE LINE OR SERVICE CONNECTION TO ANY EXISTING MAIN.
- TRENCH SPOILS SHALL BE NEATLY PLACED ONSITE ADJACENT TO THE TRENCH, AND COMPACTED TO PREVENT SATURATION AND EXCESS SEDIMENT RUNOFF. UNSUITABLE MATERIALS, EXCESS ROCK AND SHALE, ASPHALT, CONCRETE, TREES, BRUSH ETC. SHALL BE PROPERLY DISPOSED OF OFFSITE. MATERIALS MAY BE WASTED ONSITE AT THE DIRECTION OF THE OWNER OR HIS APPOINTED REPRESENTATIVE.

2 PRE-CLEARING PLAN **ECP-CONSTRUCTION** FINAL STABILIZATION PLAN **EROSION CONTROL DETAILS EROSION CONTROL DETAILS GENERAL LAYOUT** MASTER DRAINAGE PLAN - GRADING PLAN MASTER DRAINAGE PLAN - SPOT ELEVATIONS MASTER DRAINAGE PLAN - DRAINAGE MAP 13 NW THOREAU PL AND NW THOREAU LN PLAN AND PROFILE INTERSECTION DETAILS 15 INTERSECTION DETAILS STORM PLAN STORM PROFILES **DETENTION BASIN** 19 STREET AND STORM DETAILS 20 STREET AND STORM DETAILS 21 STREET AND STORM DETAILS 22 STREET AND STORM DETAILS 23 STREET SIGN DETAILS

Sheet List Table

Sheet Title

COVER SHEET

APPROVED BY

CITY ENGINEER APPROVED FOR ONE YEAR FROM THIS DATE

OWNER/DEVELOPER:

GALE COMMUNITIES, INC. DAVID GALE 400 SW LONGVIEW BLVD, STE 109 LEE'S SUMMIT, MO 64081 C: 816.645.2336 O: 816.761.9292 DGALE@GALECOMMUNITIES.COM



DATE

MISSOURI GEOGRAPHIC REFERENCE SYSTEM

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'

PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'

CONSTRUCTION


AS NOTED ON PLANS REVIEW

LEE'S SUMMIT, MISSOURI

BENCH MARK:


30 BONDS QUANTITIES PULLED FOR STREET OPTION A & B FROM CITY OF LEE'S SUMMIT DESIGN CRITERIA, SECTION 5200, TABLE LS-2: MINIMUM ASPHALT PAVEMENT THICKNESSES. EITHER IS ALLOWED AT CONTRACTORS OPTION (SEE TABLE ON DETAIL SHEET 22.)





AU E'S

COVER SHEET

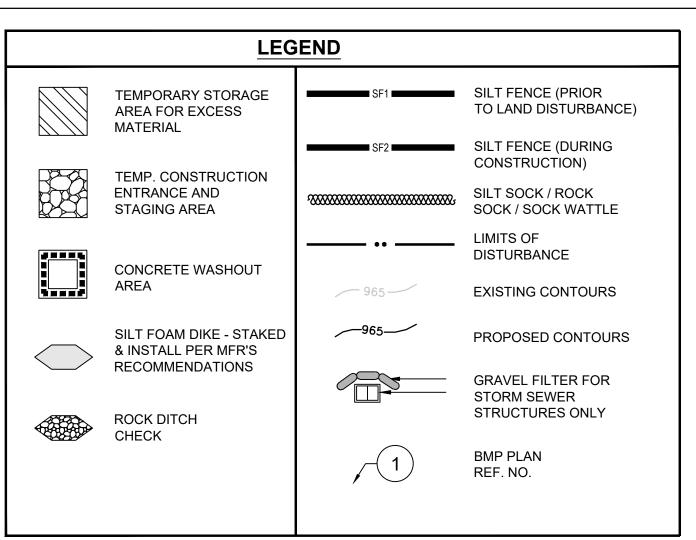

		EROSIC	ON AND SEDIMENT CONT	ROL ST	AGING CHART
ASE	PROJECT STAGE	BMP PLAN REF. NO	BMP DESCRIPTION	REMOVE AFTER STAGE	NOTES:
JE PH		1	CONSTRUCTION ENTRANCE & STAGING AREA	D	MAINTAIN, REPAIR, OR REPLACE AS NECESSARY
PRE-CLEARING PHASE		2	SILT FENCE 1 (PRIOR TO LAND DISTURBANCE)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLISHED
PRE-	A - PRIOR TO LAND DISTURBANCE	3*	EXISTING INLET PROTECTION	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLISHED
		3a	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AT EXISTING SWALES AND DRAINAGE COURSES
IASE	B - MASS GRADING	4 SILT FENCE 2 (DURING CONSTRUCTION)		E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLISHED
CONSTRUCTION PHASE	B - MASS GRADING	5	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AS SOON AS SWALE IS ESTABLISHED, REPAIR OR REPLACE AS NECESSARY
NSTRUC		6	CONCRETE WASHOUT AREA	Е	MAINTAIN, REPAIR, OR REPLACE AS NECESSARY
Ō	C - UTILITY CONSTRUCTION	7	INLET PROTECTION (SILT FENCE)	D/E	PLACE SILT FENCE AROUND ALL STORM SEWER STRUCTURES / YARD AREA STORM STRUCTURES TO HAVE SILT FENCE REMOVED ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLISHED
STABILIZATION PHASE		8	INLET PROTECTION (GRAVEL FILTER BAGS)	E	BOARDS SHALL BE PLACED IN FRONT OF INLET OPENING FROM THE TIME SILT FENCE IS REMOVED UNTIL SUCH TIME THAT THE CURB / THROAT IS POURED. PLACE GRAVEL FILTER BAGS AT THE OPENING OF ALL CURB INLETS IMMEDIATELY AFTER THE INLET THROATS ARE POURED
FINAL STABILIZ PHASE	D - AFTER PAVING OPERATIONS	9	SILT FENCE 2 (AFTER CURB CONSTRUCTION)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLISHED
		10	SEEDING AND MULCHING	Е	ALL DISTURBED AREAS AFTER 14 DAYS OF CONSTRUCTION INACTIVITY
	E - UNTIL CLOSURE OF LAND DISTURBANCE PERMIT				ADDITIONAL SEDIMENT AND EROSION CONTROL MEASURES MAY BE REQUIRED ANY TIME CURRENT MEASURES ARE FOUND TO BE INEFFECTIVE.

MULCH BERMS ARE AN ACCEPTABLE ALTERNATIVE TO SILT FENCE REQUIRED PRIOR TO LAND DISTURBANCE AND ADJACENT


DISTURBED AREA = 6.77 A.C.


TO WOODED/UNDEVELOPED AREAS.

SITE SPECIFIC NOTES:


- 1. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING UTILITY LOCATIONS PRIOR TO EXCAVATION.
- 2. THERE ARE NO WETLANDS, NATURAL OR ARTIFICIAL WATER STORAGE DETENTION AREAS IN THE PROJECT
- 3. NO PART OF THE PROJECT LIES WITHIN THE 100 YEAR FLOOD PLAIN PER FEMA FLOOD INSURANCE RATE MAP NUMBER 29095C0412G DATED JANUARY 20, 2017.
- 4. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE IMPLEMENTED ACCORDING TO THE BMP STAGING CHART.
- ADDITIONAL EROSION CONTROL MAY BE REQUIRED BY THE CITY ENGINEER AT ANY TIME EXISTING MEASURES ARE FOUND TO BE INEFFECTIVE OR PROBLEMATIC AREAS ARE NOTED IN THE FIELD.
- 6. STABILIZATION OF DISTURBED AREAS MUST, AT A MINIMUM, BE INITIATED IMMEDIATELY WHENEVER ANY CLEARING, GRADING, EXCAVATING, OR OTHER SOIL DISTURBING ACTIVITIES HAVE PERMANENTLY CEASED ON ANY PORTION OF THE SITE, OR TEMPORARILY CEASED ON ANY PORTION OF THE SITE AND WILL NOT RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS. THE DISTURBED AREAS SHALL BE PROTECTED FROM EROSION BY STABILIZING THE AREA WITH MULCH OR OTHER SIMILARLY EFFECTIVE SOIL STABILIZING BMPS. INITIAL STABILIZATION ACTIVITIES MUST BE COMPLETED WITHIN 14 DAYS AFTER SOIL DISTURBING ACTIVITIES CEASE.
- ALL PERIMETER SILT FENCE, EARTH DIKES, SEDIMENT BASINS, AND ROCK CONSTRUCTION ENTRANCES WILL BE INSTALLED BEFORE GRADING OPERATIONS BEGIN.
- SILT FENCE AND EARTH DIKES THAT ARE PLACED BEFORE GRADING BEGINS WILL BE MAINTAINED BY THE GRADING CONTRACTOR.
- AREAS WITHIN PUBLIC RIGHT-OF-WAY SHALL BE SODDED IMMEDIATELY AFTER CONSTRUCTION IS COMPLETE.





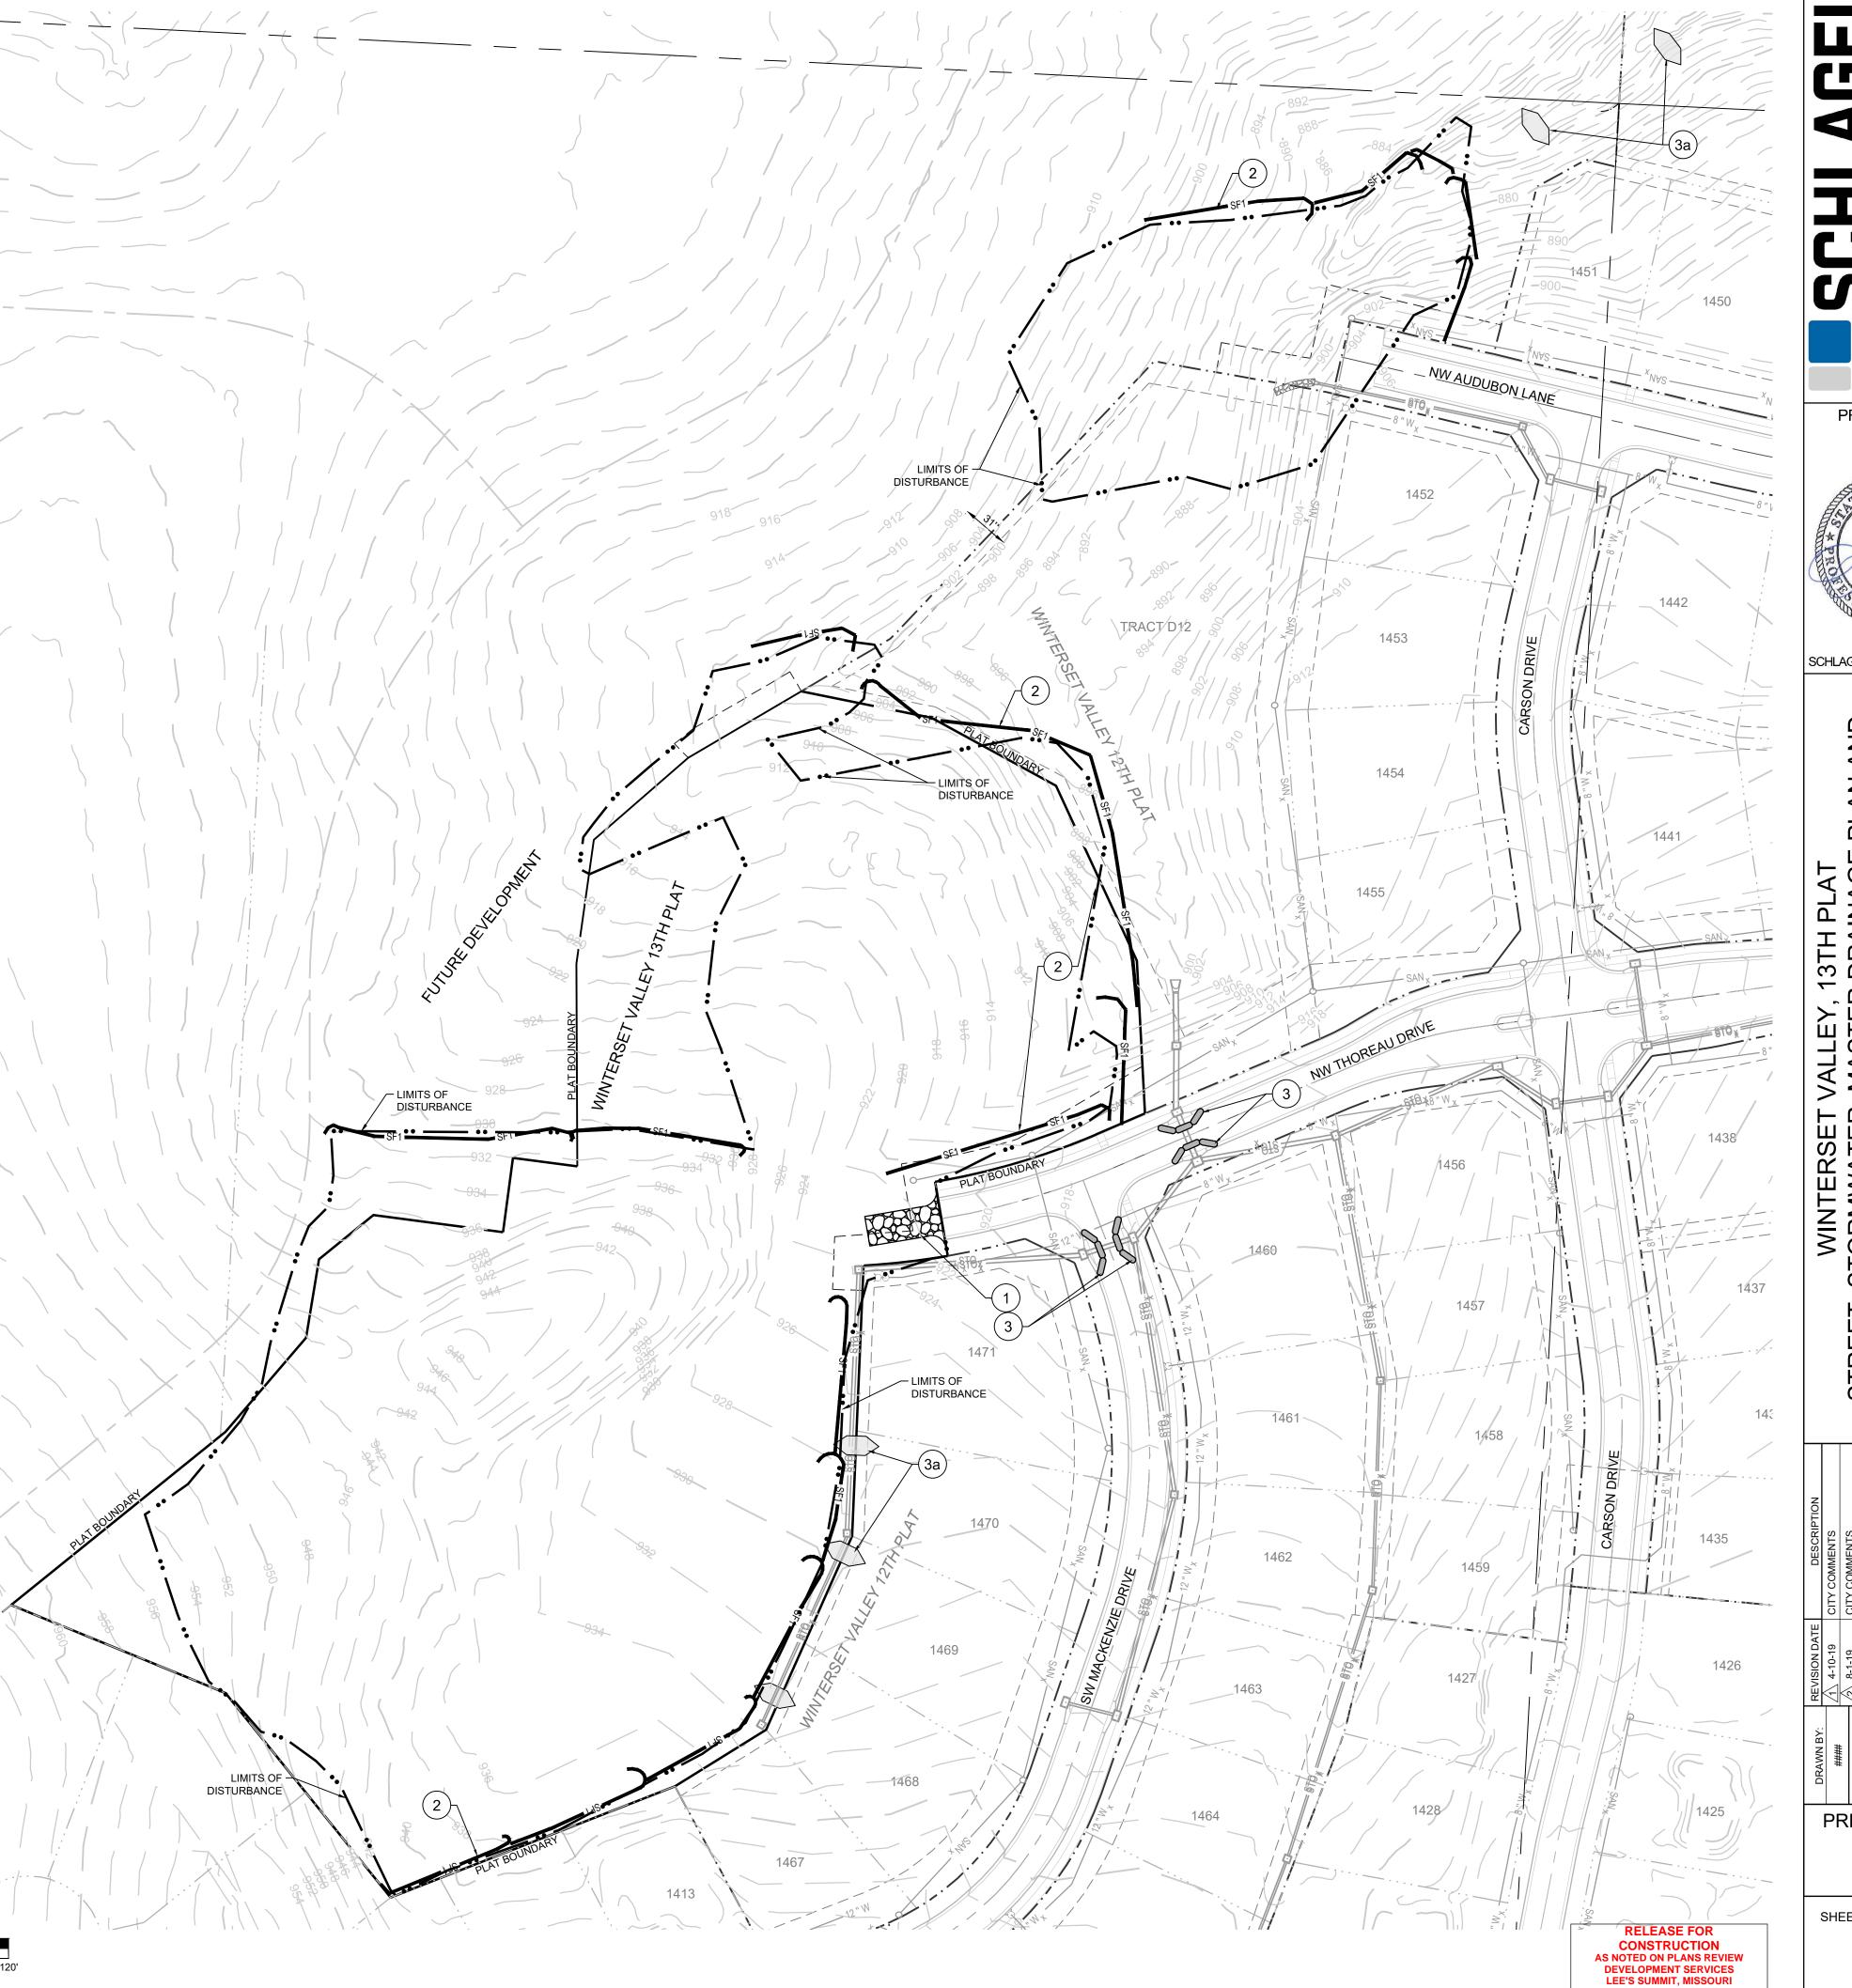

PREPARED BY:




SCHLAGEL & ASSOCIATES, P.A.

AND AUDUBON LA IT, MISSOURI VALLEY, 13TH, MASTER DRA DRIVE SUMMI WINTERSET \
STORMWATER,
EROSION AND \$

PRE-CLEARING PLAN

SHEET

06/03/2020

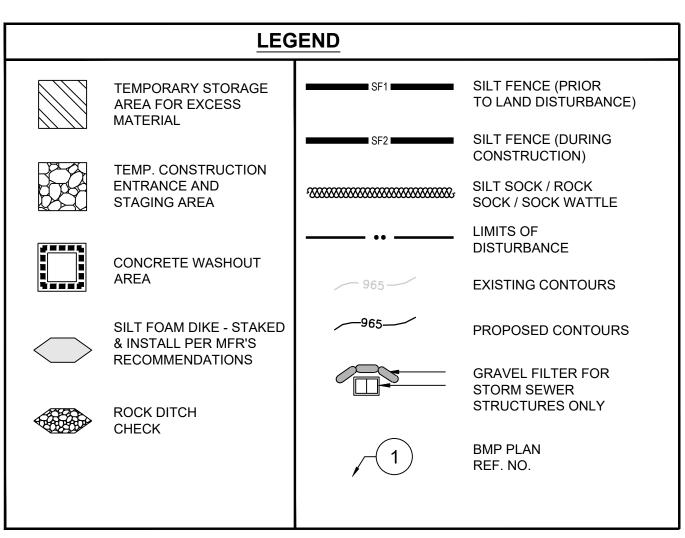



		BMP PLAN	DMD DECODIDATION	REMOVE	NOTEO
	PROJECT STAGE	REF. NO	BMP DESCRIPTION	AFTER STAGE	NOTES:
		1	CONSTRUCTION ENTRANCE & STAGING AREA	D	MAINTAIN, REPAIR, OR REPLACE AS NECESSARY
		2	SILT FENCE 1 (PRIOR TO LAND DISTURBANCE)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE. HAVE SUFFICIENT GROUND COVER ESTABLISHED
	A - PRIOR TO LAND DISTURBANCE	3	EXISTING INLET PROTECTION	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED
>		3a	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AT EXISTING SWALES AND DRAINAGE COURSES
~	B - MASS GRADING	4	SILT FENCE 2 (DURING CONSTRUCTION)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED
	D - MAGG GIVADING	5	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AS SOON AS SWALE IS ESTABLISHED, REPAIR OR REPLACE AS NECESSARY
	C - UTILITY CONSTRUCTION	6	CONCRETE WASHOUT AREA	E	MAINTAIN, REPAIR, OR REPLACE AS NECESSARY
		7	INLET PROTECTION (SILT FENCE)	D/E	PLACE SILT FENCE AROUND ALL STORM SEWER STRUCTURES / YARD AREA STORM STRUCTURES TO HAVE SILT FENCE REMOVED ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLIS
		8	INLET PROTECTION (GRAVEL FILTER BAGS)	E	BOARDS SHALL BE PLACED IN FRONT OF INLET OPEN FROM THE TIME SILT FENCE IS REMOVED UNTIL SUCH TIME THAT THE CURB / THROAT IS POURED. PLACE GRAVEL FILTER BAGS AT THE OPENING OF ALL CURB INLETS IMMEDIATELY AFTER THE INLET THROATS ARI POURED
THAUE E	D - AFTER PAVING OPERATIONS	9	SILT FENCE 2 (AFTER CURB CONSTRUCTION)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED
		10	SEEDING AND MULCHING	E	ALL DISTURBED AREAS AFTER 14 DAYS OF CONSTRUCTION INACTIVITY
	E - UNTIL CLOSURE OF LAND DISTURBANCE PERMIT				ADDITIONAL SEDIMENT AND EROSION CONTROL MEASURES MAY BE REQUIRED ANY TIME CURRENT MEASURES ARE FOUND TO BE INEFFECTIVE.

DISTURBED AREA = 6.77 A.C.

SITE SPECIFIC NOTES:

- THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING UTILITY LOCATIONS PRIOR TO EXCAVATION.
- 2. THERE ARE NO WETLANDS, NATURAL OR ARTIFICIAL WATER STORAGE DETENTION AREAS IN THE PROJECT AREA.
- 3. NO PART OF THE PROJECT LIES WITHIN THE 100 YEAR FLOOD PLAIN PER FEMA FLOOD INSURANCE RATE MAP NUMBER 29095C0412G DATED JANUARY 20, 2017.
- 4. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE IMPLEMENTED ACCORDING TO THE BMP STAGING CHART.
- 5. ADDITIONAL EROSION CONTROL MAY BE REQUIRED BY THE CITY ENGINEER AT ANY TIME EXISTING MEASURES ARE FOUND TO BE INEFFECTIVE OR PROBLEMATIC AREAS ARE NOTED IN THE FIELD.
- STABILIZATION OF DISTURBED AREAS MUST, AT A MINIMUM, BE INITIATED IMMEDIATELY WHENEVER ANY CLEARING, GRADING, EXCAVATING, OR OTHER SOIL DISTURBING ACTIVITIES HAVE PERMANENTLY CEASED ON ANY PORTION OF THE SITE, OR TEMPORARILY CEASED ON ANY PORTION OF THE SITE AND WILL NOT RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS. THE DISTURBED AREAS SHALL BE PROTECTED FROM EROSION BY STABILIZING THE AREA WITH MULCH OR OTHER SIMILARLY EFFECTIVE SOIL STABILIZING BMPS. INITIAL STABILIZATION ACTIVITIES MUST BE COMPLETED WITHIN 14 DAYS AFTER SOIL DISTURBING ACTIVITIES CEASE.
- 7. ALL PERIMETER SILT FENCE, EARTH DIKES, SEDIMENT BASINS, AND ROCK CONSTRUCTION ENTRANCES WILL BE INSTALLED BEFORE GRADING OPERATIONS BEGIN.
- 8. SILT FENCE AND EARTH DIKES THAT ARE PLACED BEFORE GRADING BEGINS WILL BE MAINTAINED BY THE GRADING CONTRACTOR.
- 9. AREAS WITHIN PUBLIC RIGHT-OF-WAY SHALL BE SODDED IMMEDIATELY AFTER CONSTRUCTION IS COMPLETE.

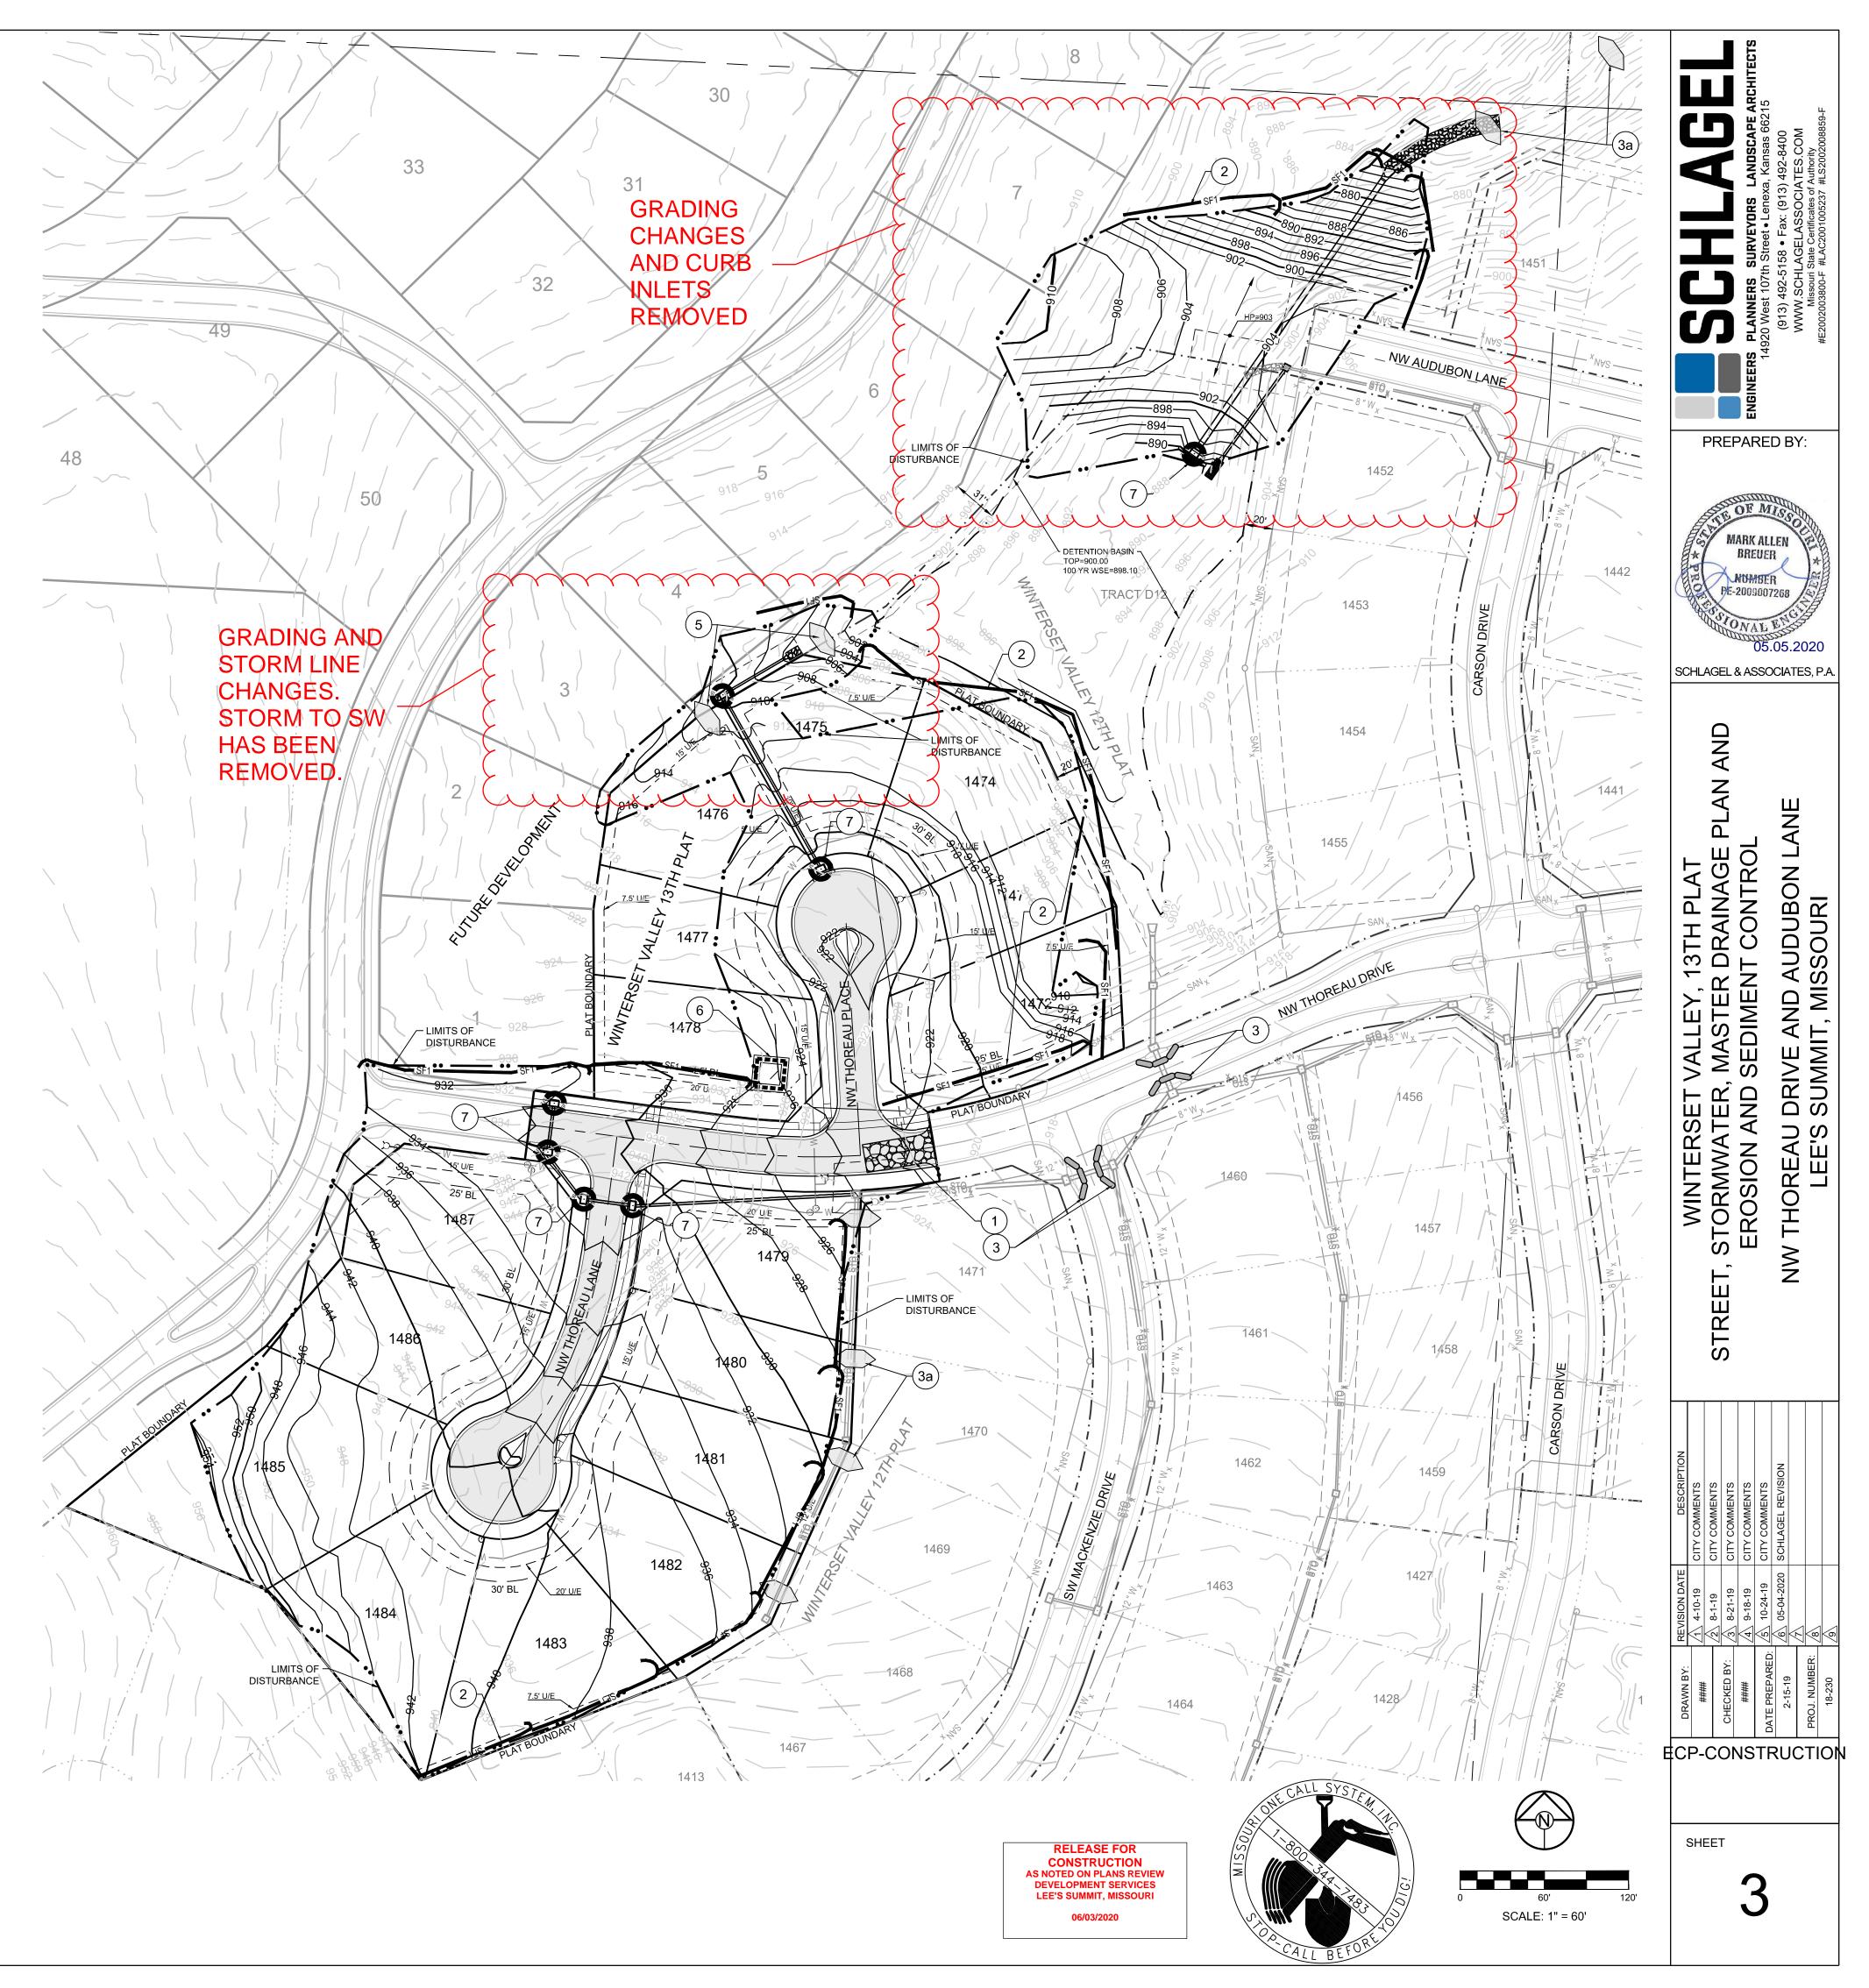

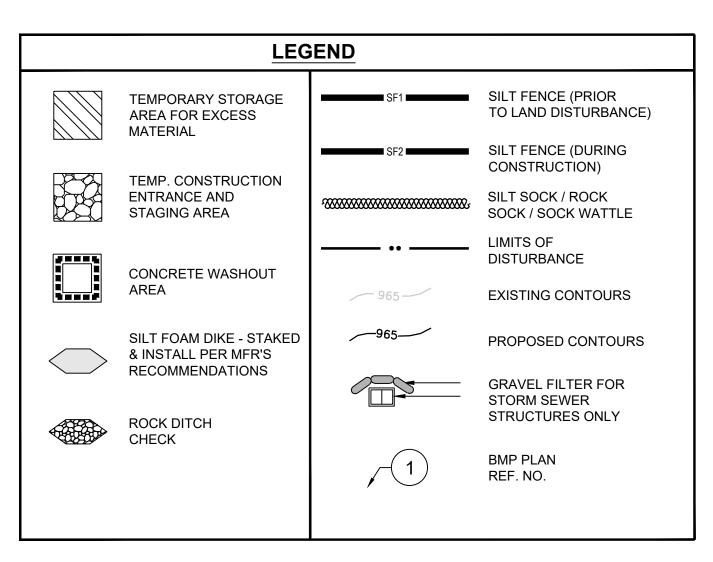



PROJECT STAGE	BMP PLAN REF. NO	BMP DESCRIPTION	REMOVE AFTER		
		2 2220	AFTER STAGE	NOTES:	
	1	CONSTRUCTION ENTRANCE & D		MAINTAIN, REPAIR, OR REPLACE AS NECESSARY	
	2	SILT FENCE 1 (PRIOR TO LAND DISTURBANCE)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED	
- PRIOR TO LAND DISTURBANCE	3	EXISTING INLET PROTECTION	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED	
	3a	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AT EXISTING SWALES AND DRAINAGE COURSES	
- MASS GRADING	4	SILT FENCE 2 (DURING CONSTRUCTION)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED	
B-WAGO GIVADINO	5	FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS	E	PLACE WHERE INDICATED AS SOON AS SWALE IS ESTABLISHED, REPAIR OR REPLACE AS NECESSARY	
C - UTILITY CONSTRUCTION	6	CONCRETE WASHOUT AREA	E	MAINTAIN, REPAIR, OR REPLACE AS NECESSARY	
	7	INLET PROTECTION (SILT FENCE)	D/E	PLACE SILT FENCE AROUND ALL STORM SEWER STRUCTURES / YARD AREA STORM STRUCTURES TO HAVE SILT FENCE REMOVED ONLY WHEN GRADED AREAS HAVE SUFFICIENT GROUND COVER ESTABLIS	
D - AFTER PAVING OPERATIONS	8	INLET PROTECTION (GRAVEL FILTER BAGS)	E	BOARDS SHALL BE PLACED IN FRONT OF INLET OPEN FROM THE TIME SILT FENCE IS REMOVED UNTIL SUCH TIME THAT THE CURB / THROAT IS POURED. PLACE GRAVEL FILTER BAGS AT THE OPENING OF ALL CURB INLETS IMMEDIATELY AFTER THE INLET THROATS AR POURED	
	9	SILT FENCE 2 (AFTER CURB CONSTRUCTION)	E	PLACE WHERE INDICATED, REPAIR OR REPLACE AS NECESSARY AND REMOVE ONLY WHEN GRADED ARE HAVE SUFFICIENT GROUND COVER ESTABLISHED	
	10	SEEDING AND MULCHING	E	ALL DISTURBED AREAS AFTER 14 DAYS OF CONSTRUCTION INACTIVITY	
		3a	3a FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS 4 SILT FENCE 2 (DURING CONSTRUCTION) 5 FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS 6 CONCRETE WASHOUT AREA - UTILITY CONSTRUCTION 7 INLET PROTECTION (SILT FENCE) 8 INLET PROTECTION (GRAVEL FILTER BAGS) - AFTER PAVING OPERATIONS 9 SILT FENCE 2 (AFTER CURB CONSTRUCTION) 10 SEEDING AND MULCHING	3a FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS 4 SILT FENCE 2 (DURING CONSTRUCTION) 5 FOAM SILT DIKE OR ROCK DITCH CHECK AND SEDIMENT TRAPS 6 CONCRETE WASHOUT AREA FUTILITY CONSTRUCTION 7 INLET PROTECTION (SILT FENCE) AFTER PAVING OPERATIONS 9 SILT FENCE 2 (AFTER CURB CONSTRUCTION) E 10 SEEDING AND MULCHING E	


DISTURBED AREA = 6.77 A.C.


SITE SPECIFIC NOTES:


- THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING UTILITY LOCATIONS PRIOR TO EXCAVATION.
- 2. THERE ARE NO WETLANDS, NATURAL OR ARTIFICIAL WATER STORAGE DETENTION AREAS IN THE PROJECT AREA.
- NO PART OF THE PROJECT LIES WITHIN THE 100 YEAR FLOOD PLAIN PER FEMA FLOOD INSURANCE RATE MAP NUMBER 29095C0412G DATED JANUARY 20, 2017.
- 4. ALL EROSION AND SEDIMENTATION CONTROL MEASURES SHALL BE IMPLEMENTED ACCORDING TO THE BMP STAGING CHART.
- 5. ADDITIONAL EROSION CONTROL MAY BE REQUIRED BY THE CITY ENGINEER AT ANY TIME EXISTING MEASURES ARE FOUND TO BE INEFFECTIVE OR PROBLEMATIC AREAS ARE NOTED IN THE FIELD.
- 6. STABILIZATION OF DISTURBED AREAS MUST, AT A MINIMUM, BE INITIATED IMMEDIATELY WHENEVER ANY CLEARING, GRADING, EXCAVATING, OR OTHER SOIL DISTURBING ACTIVITIES HAVE PERMANENTLY CEASED ON ANY PORTION OF THE SITE, OR TEMPORARILY CEASED ON ANY PORTION OF THE SITE AND WILL NOT RESUME FOR A PERIOD EXCEEDING 14 CALENDAR DAYS. THE DISTURBED AREAS SHALL BE PROTECTED FROM EROSION BY STABILIZING THE AREA WITH MULCH OR OTHER SIMILARLY EFFECTIVE SOIL STABILIZING BMPS. INITIAL STABILIZATION ACTIVITIES MUST BE COMPLETED WITHIN 14 DAYS AFTER SOIL DISTURBING ACTIVITIES CEASE.
- 7. ALL PERIMETER SILT FENCE, EARTH DIKES, SEDIMENT BASINS, AND ROCK CONSTRUCTION ENTRANCES WILL BE INSTALLED BEFORE GRADING OPERATIONS BEGIN.
- 8. SILT FENCE AND EARTH DIKES THAT ARE PLACED BEFORE GRADING BEGINS WILL BE MAINTAINED BY THE GRADING CONTRACTOR.
- 9. AREAS WITHIN PUBLIC RIGHT-OF-WAY SHALL BE SODDED IMMEDIATELY AFTER CONSTRUCTION IS COMPLETE.

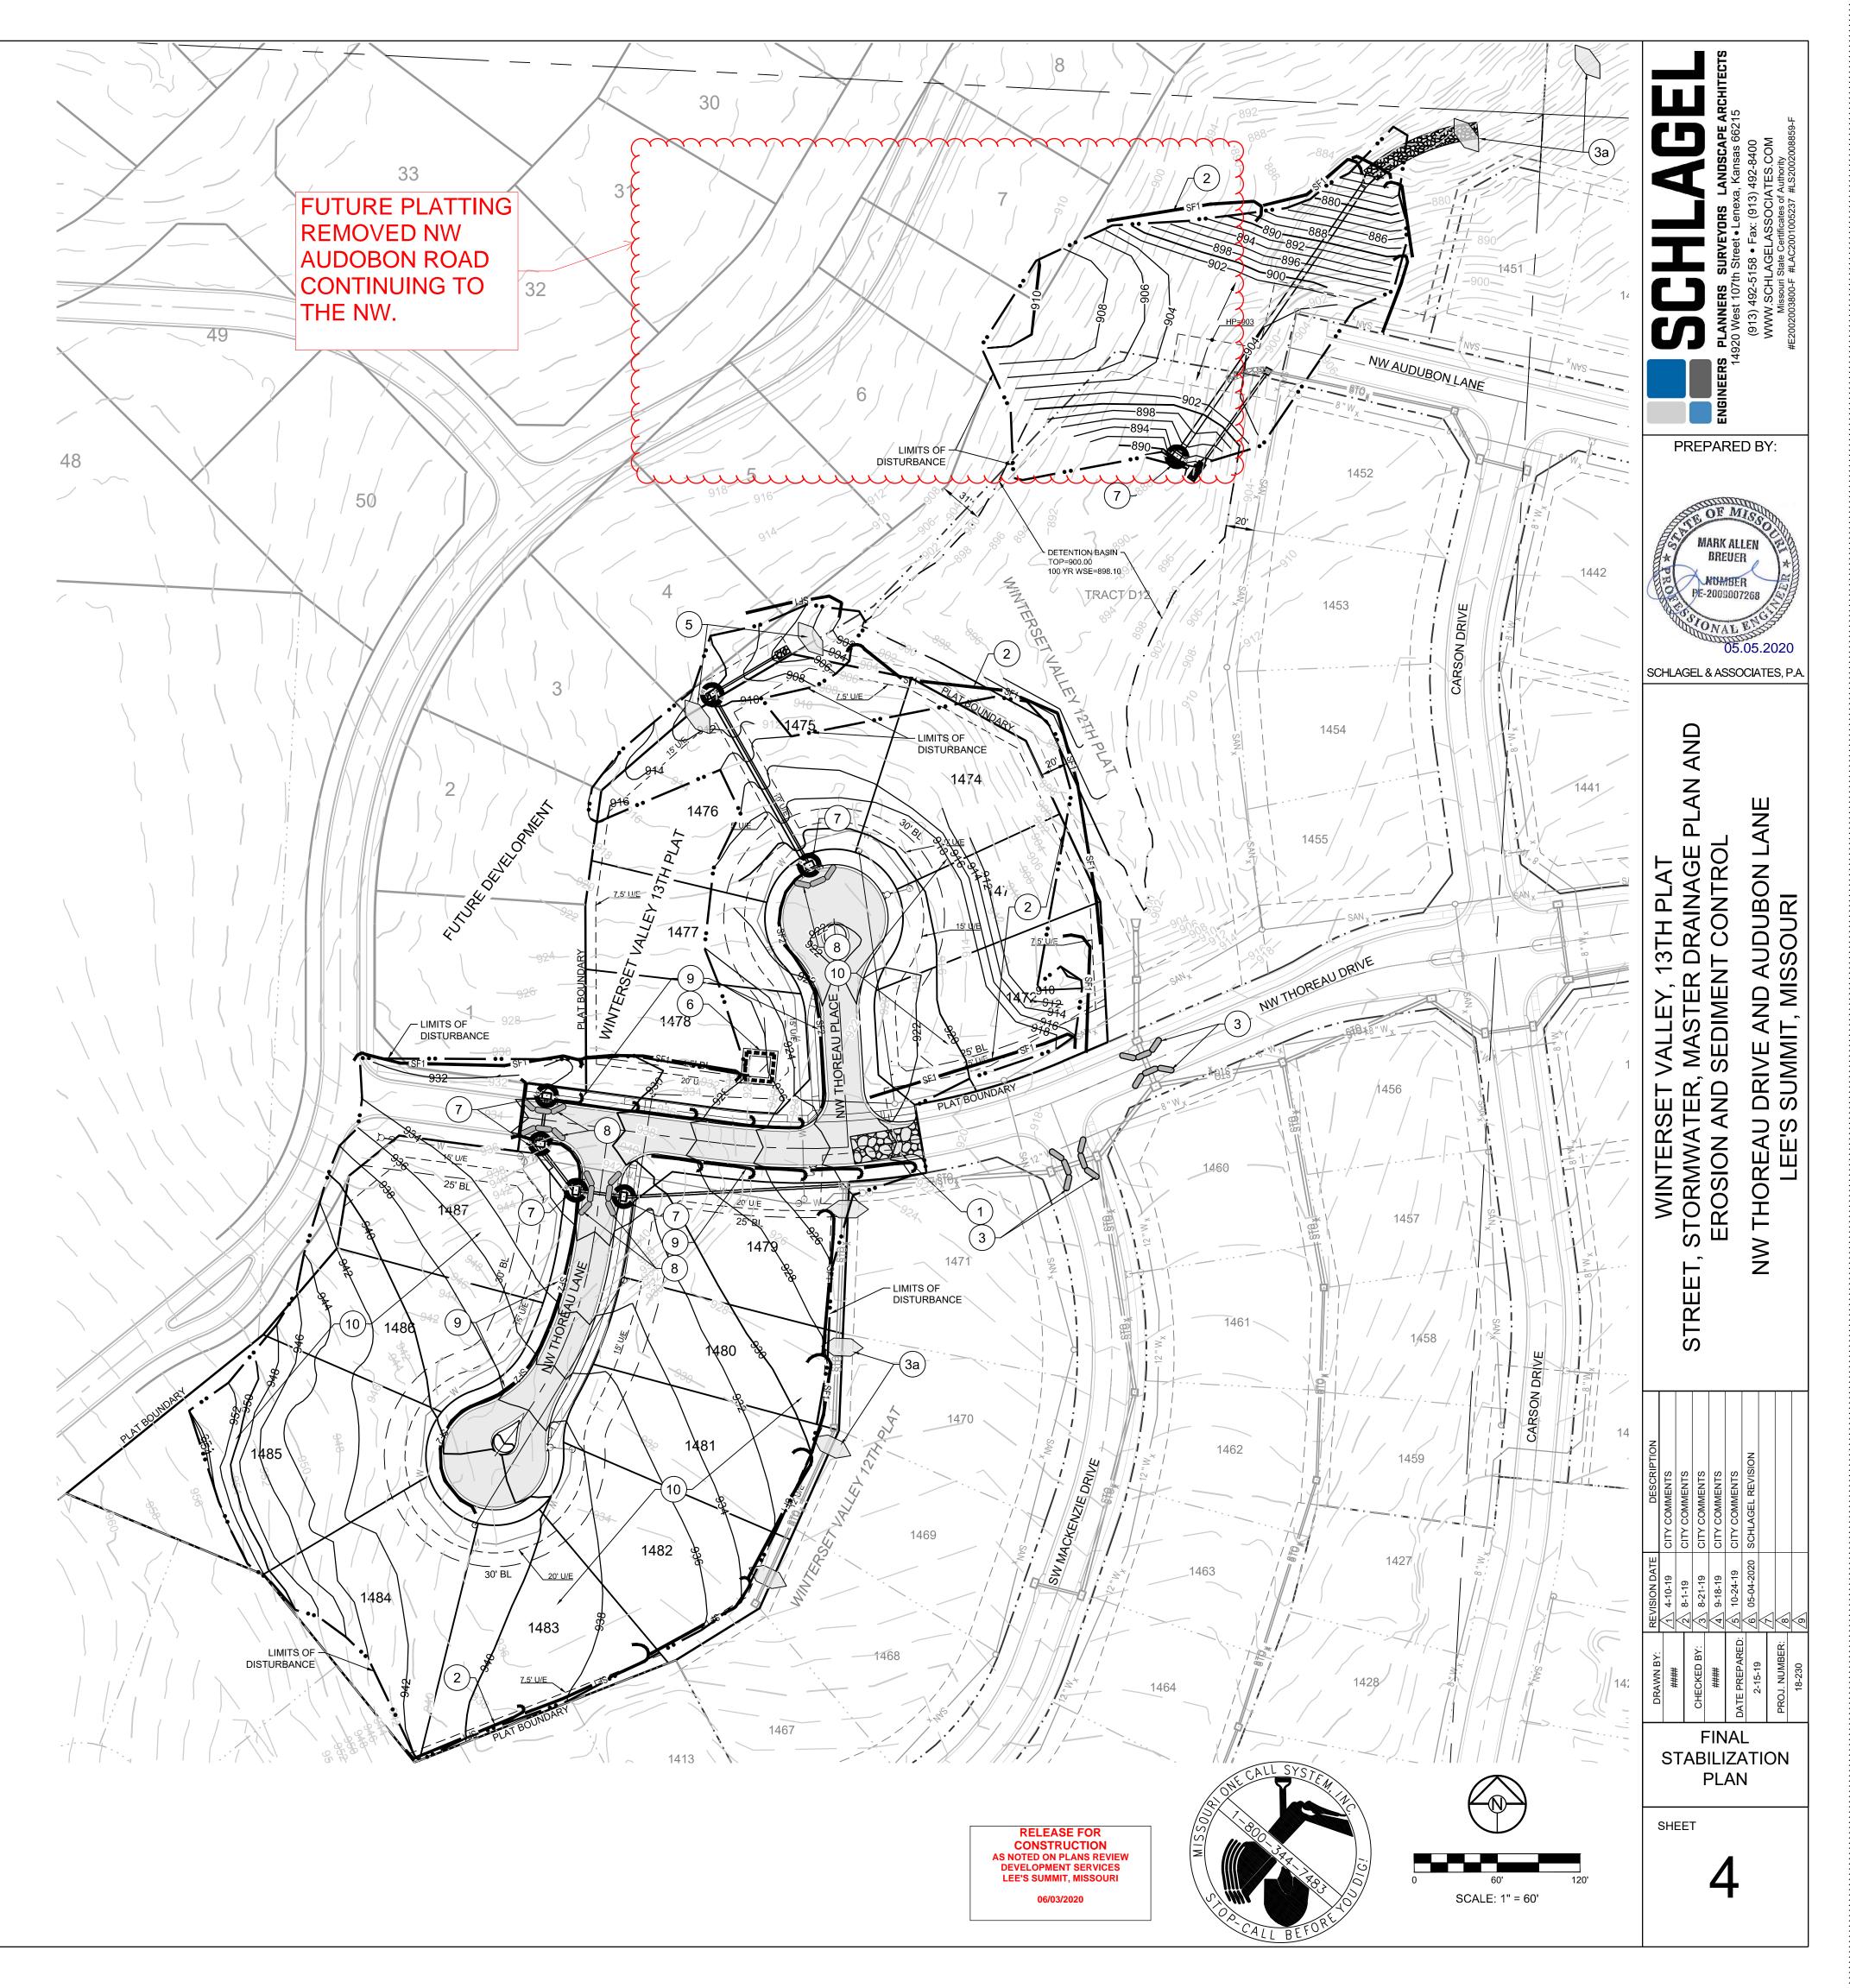

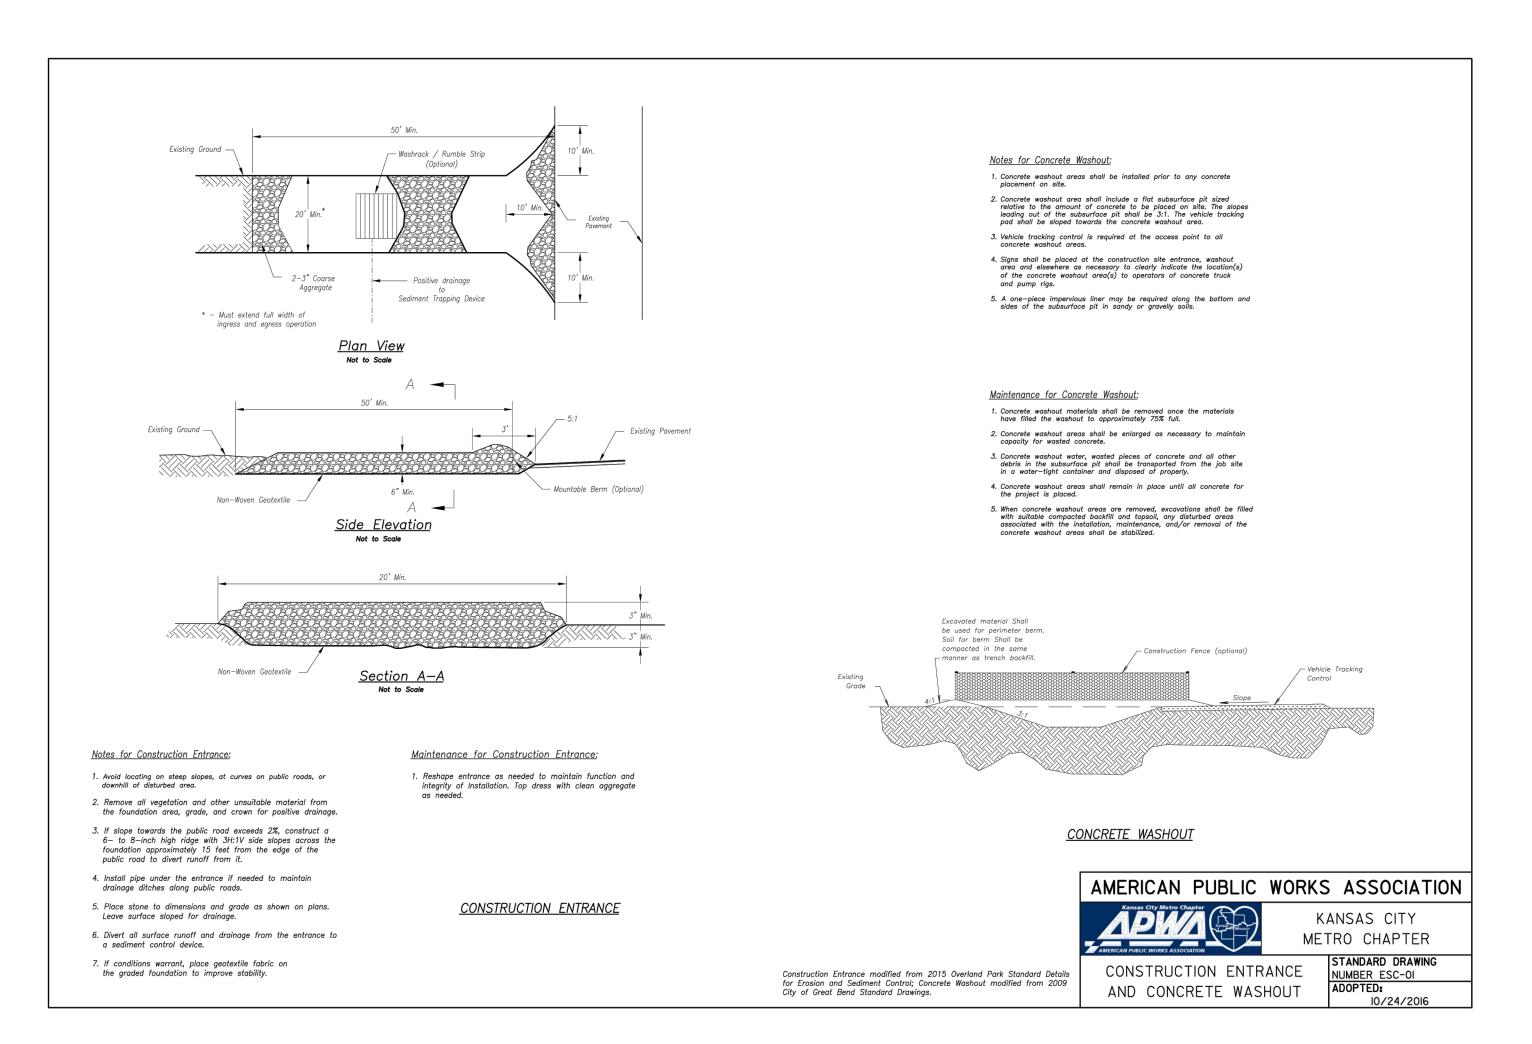

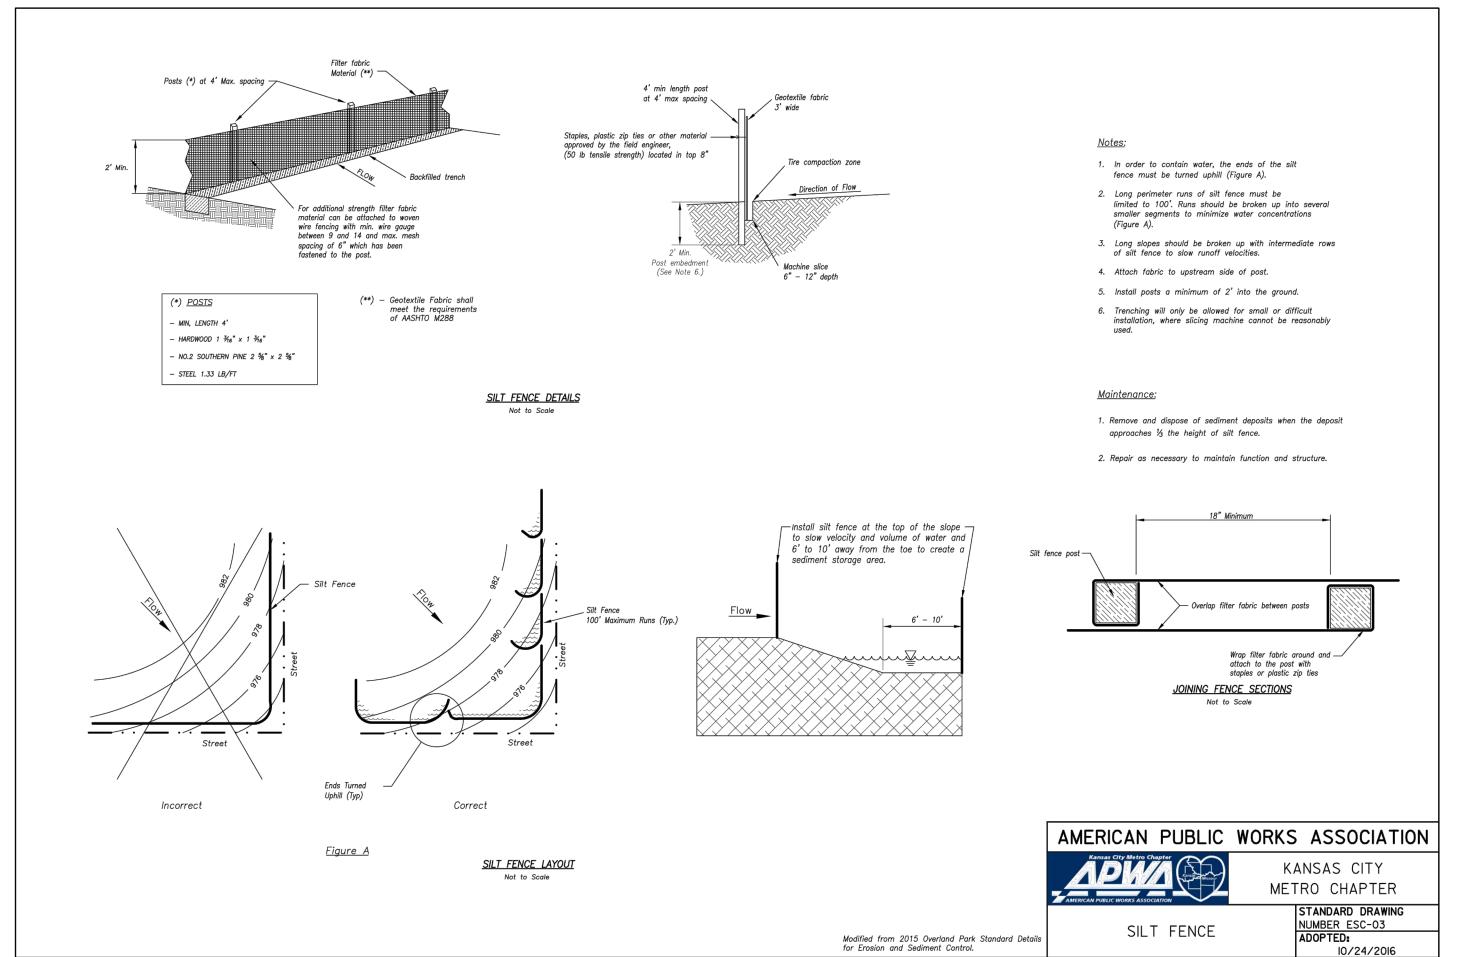

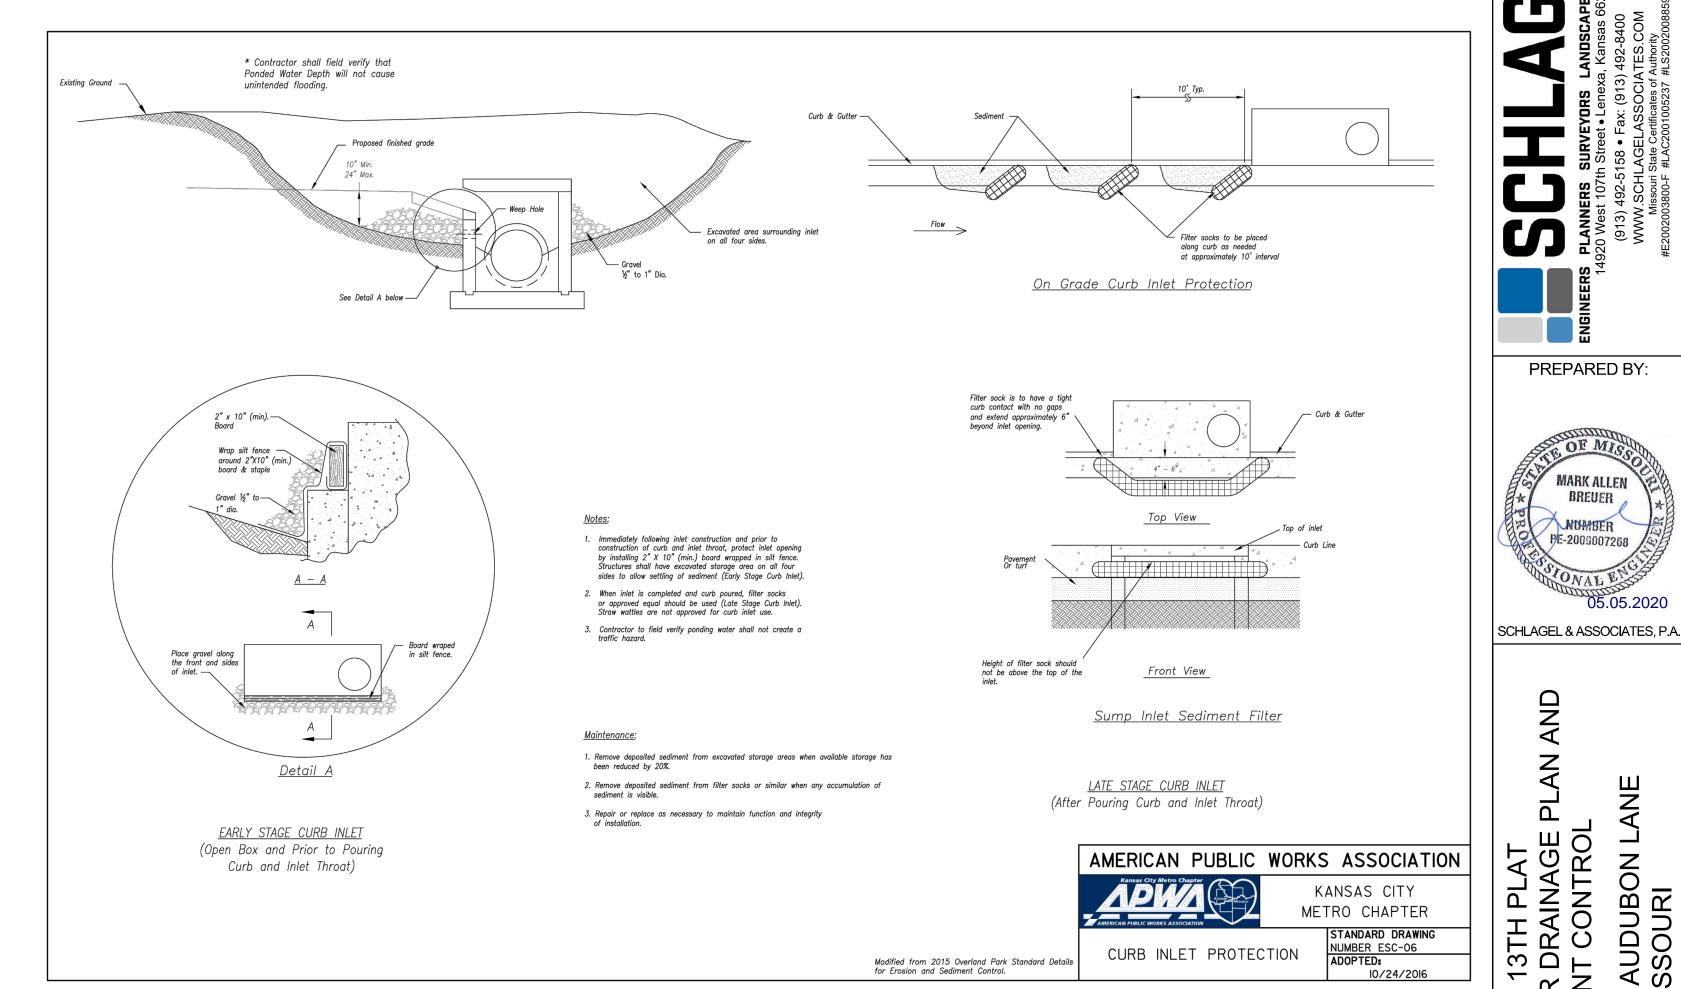

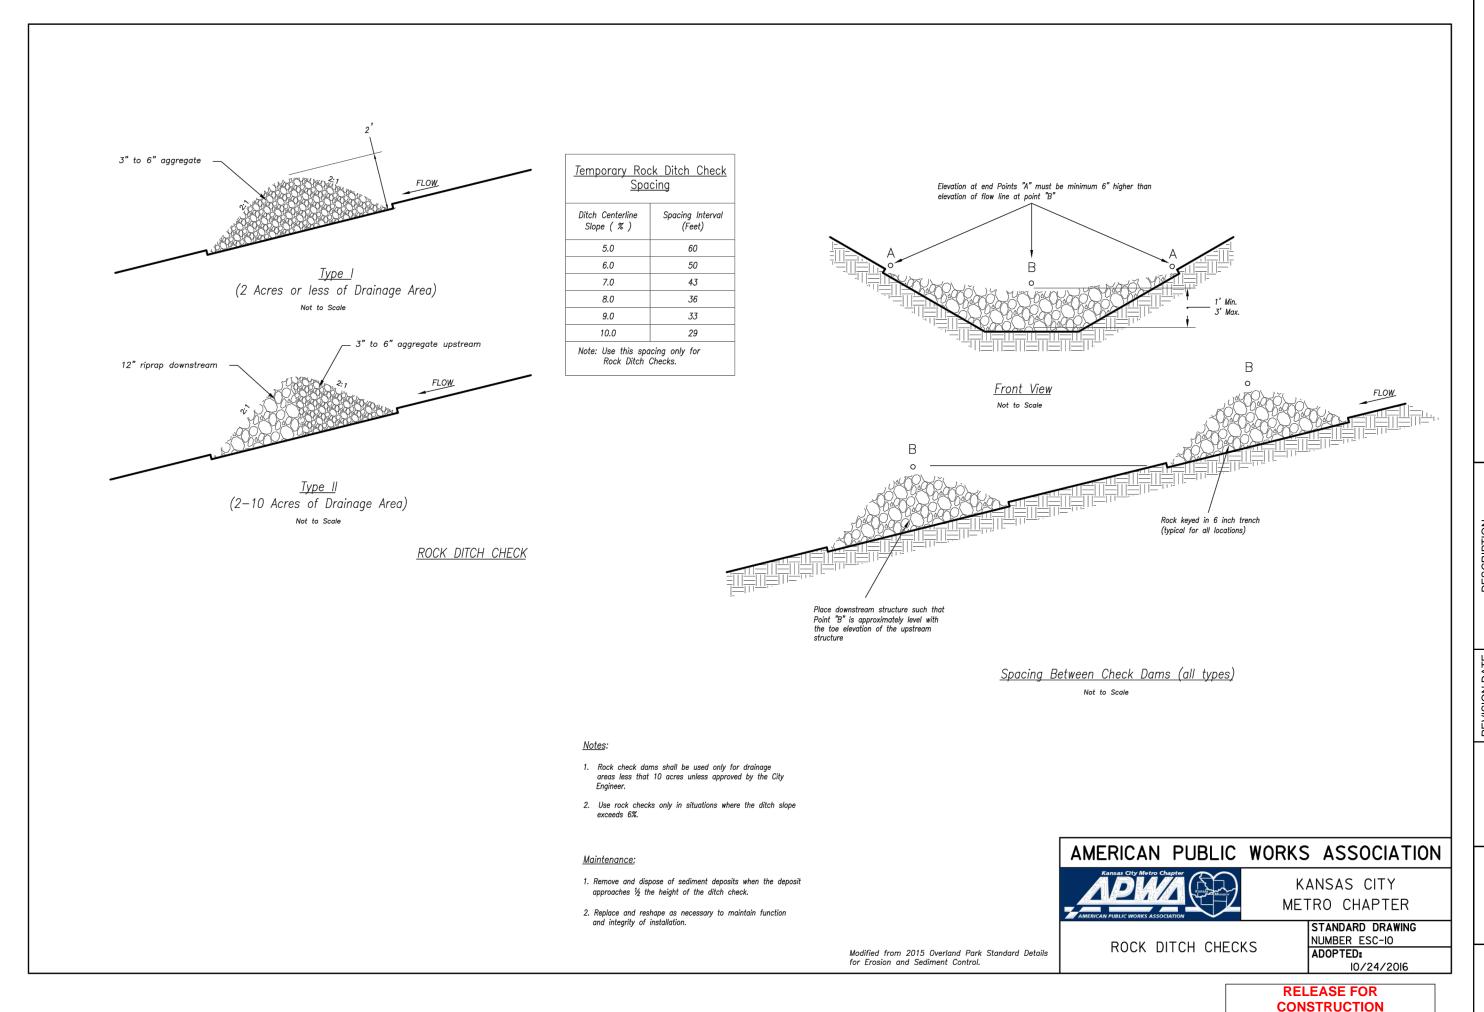





EROSION

CONTROL

DETAILS

SHEET

PREPARED BY:


MARK ALLEN


BREUER


MUMBER


PE-2009007268

05.05.2020

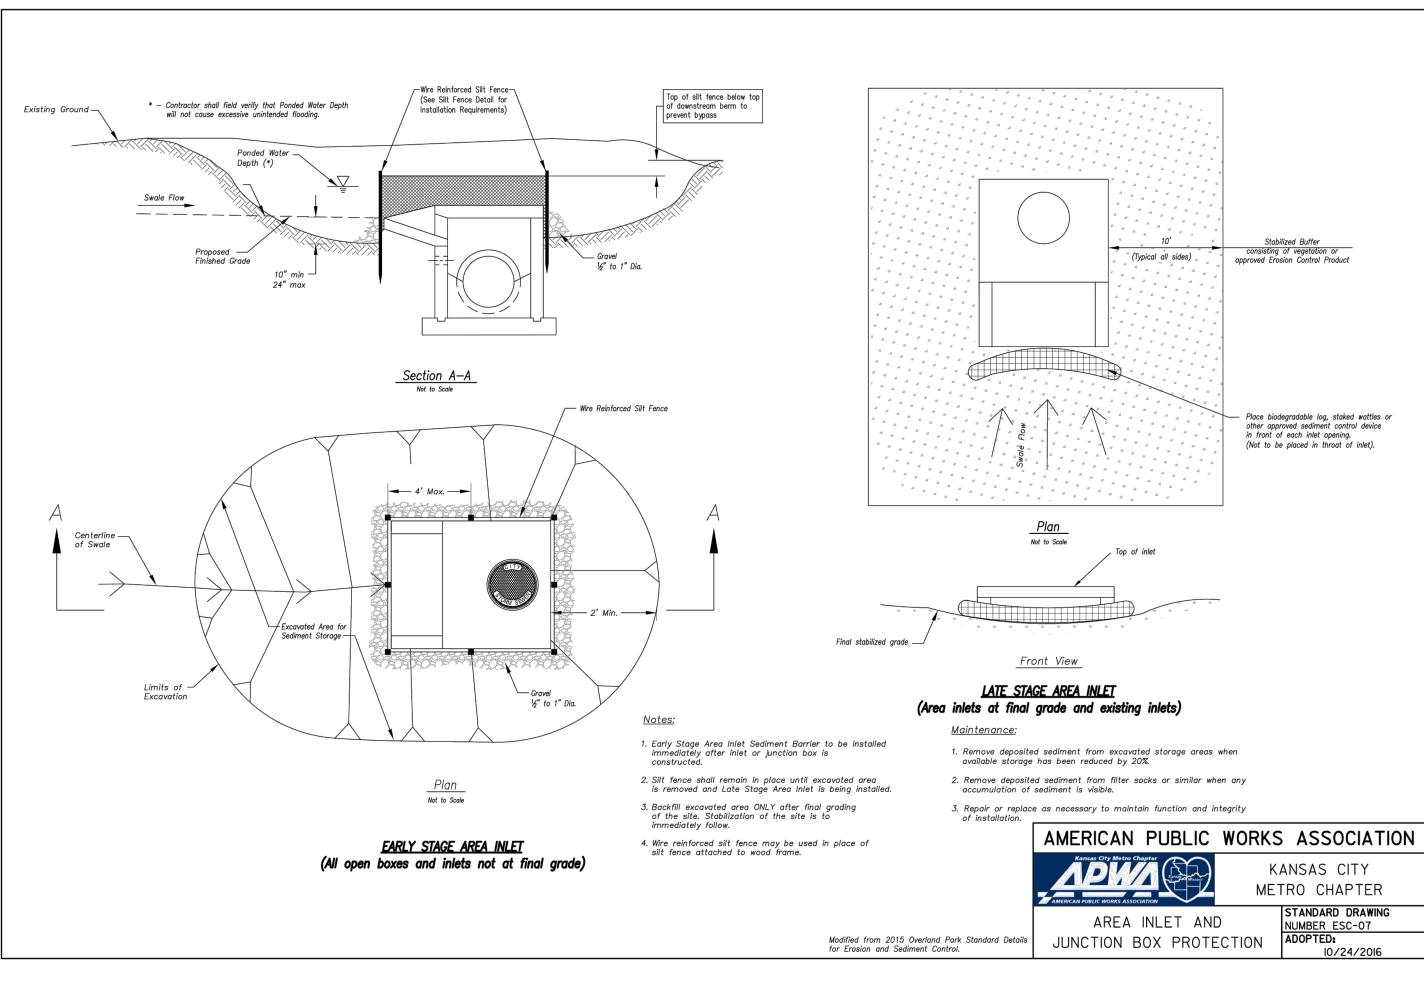

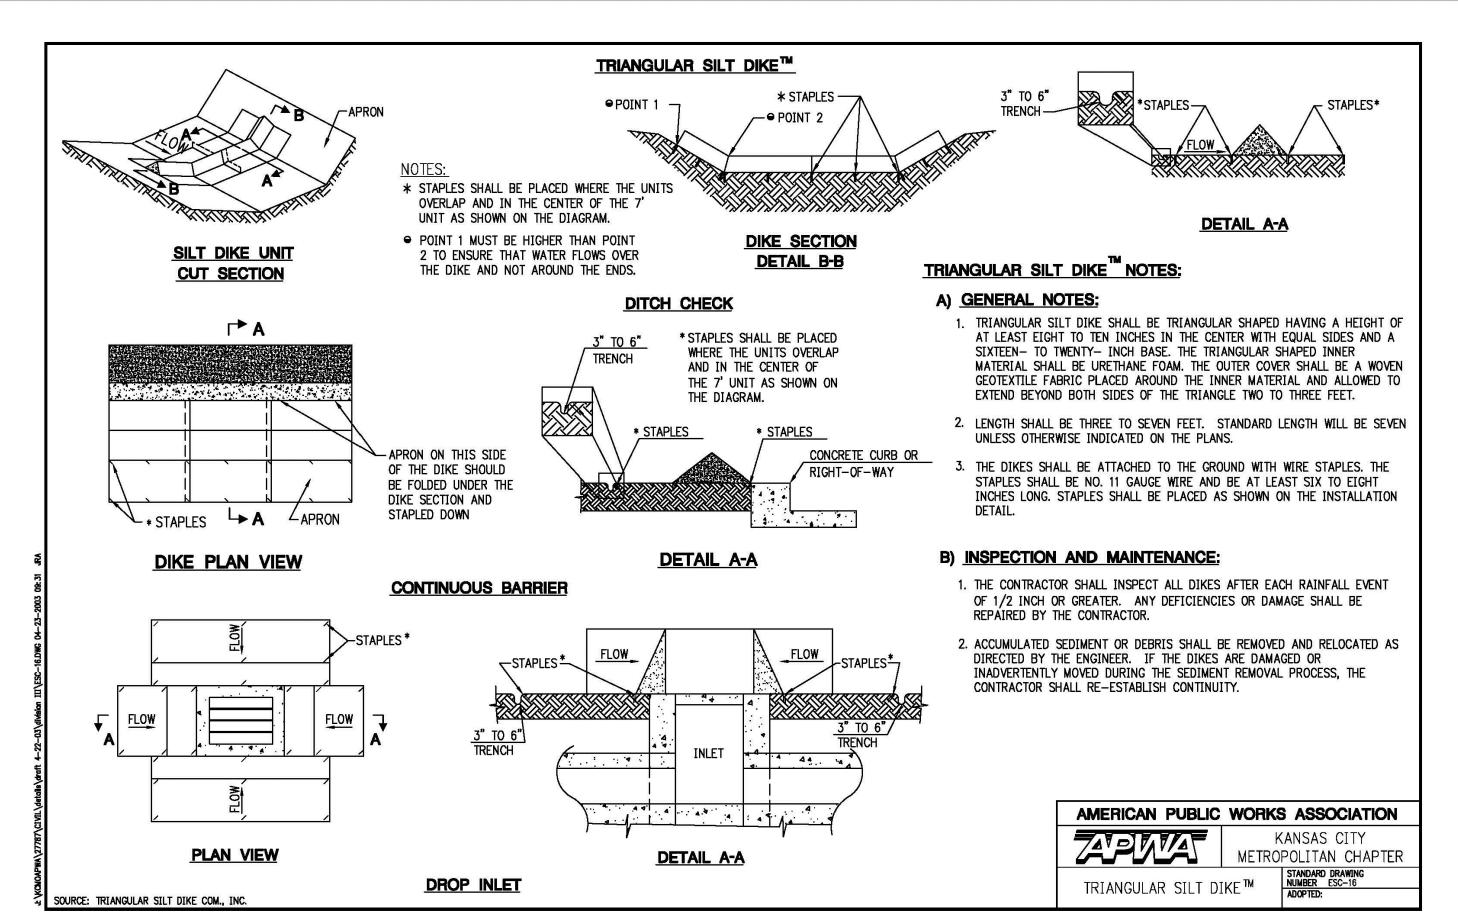


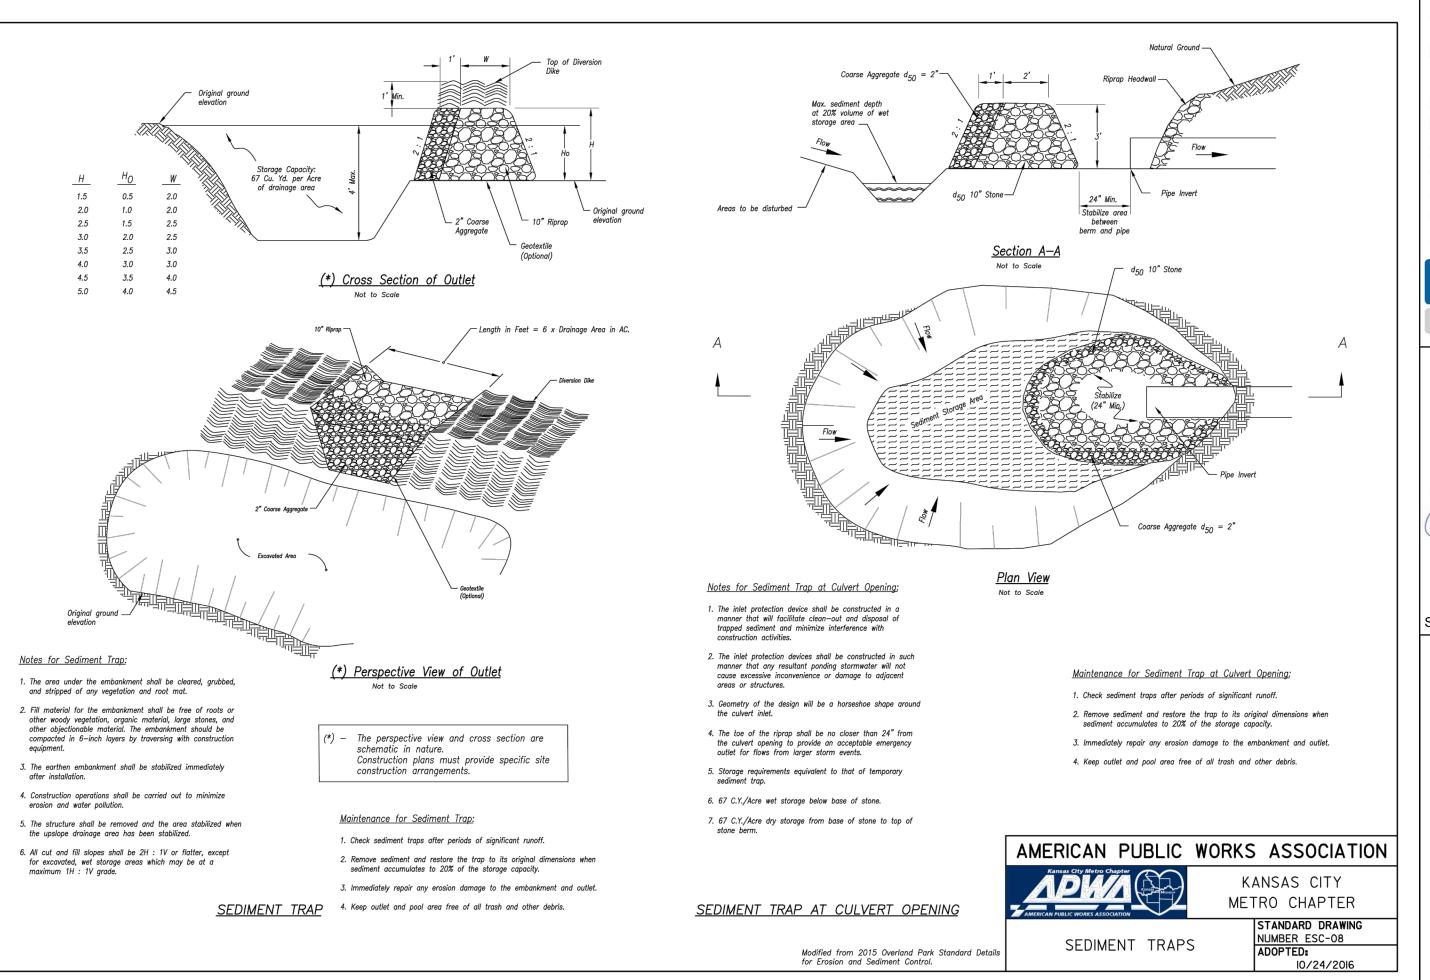

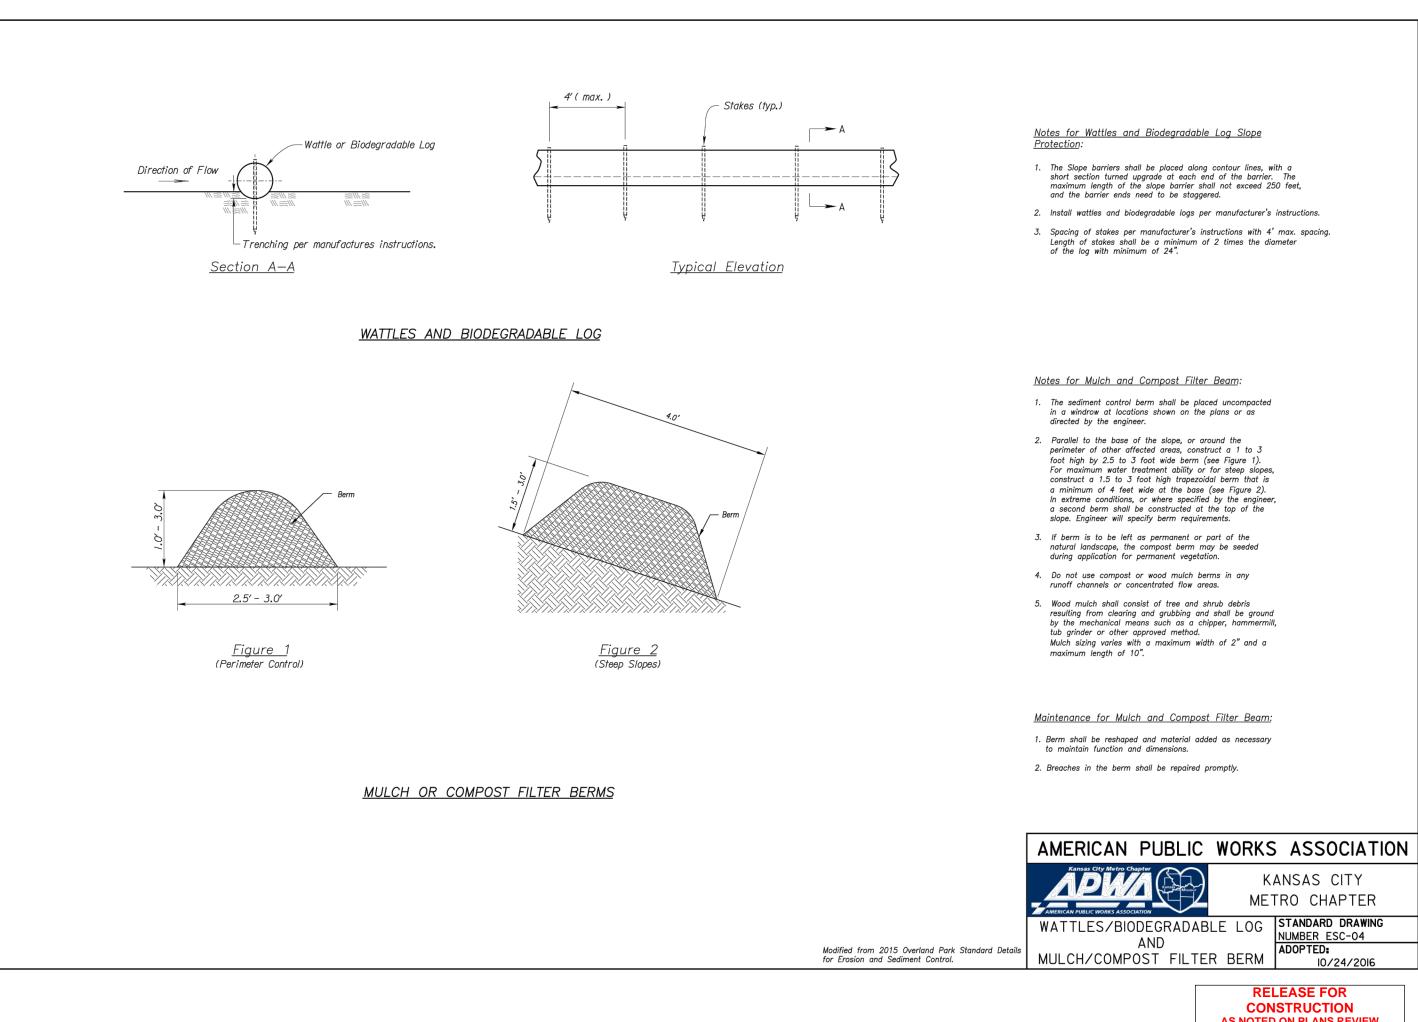



PREPARED BY:




SCHLAGEL & ASSOCIATES, P.A.


O


3TH F DRAII T CON VALI MAS SET TER, ND

EROSION CONTROL DETAILS

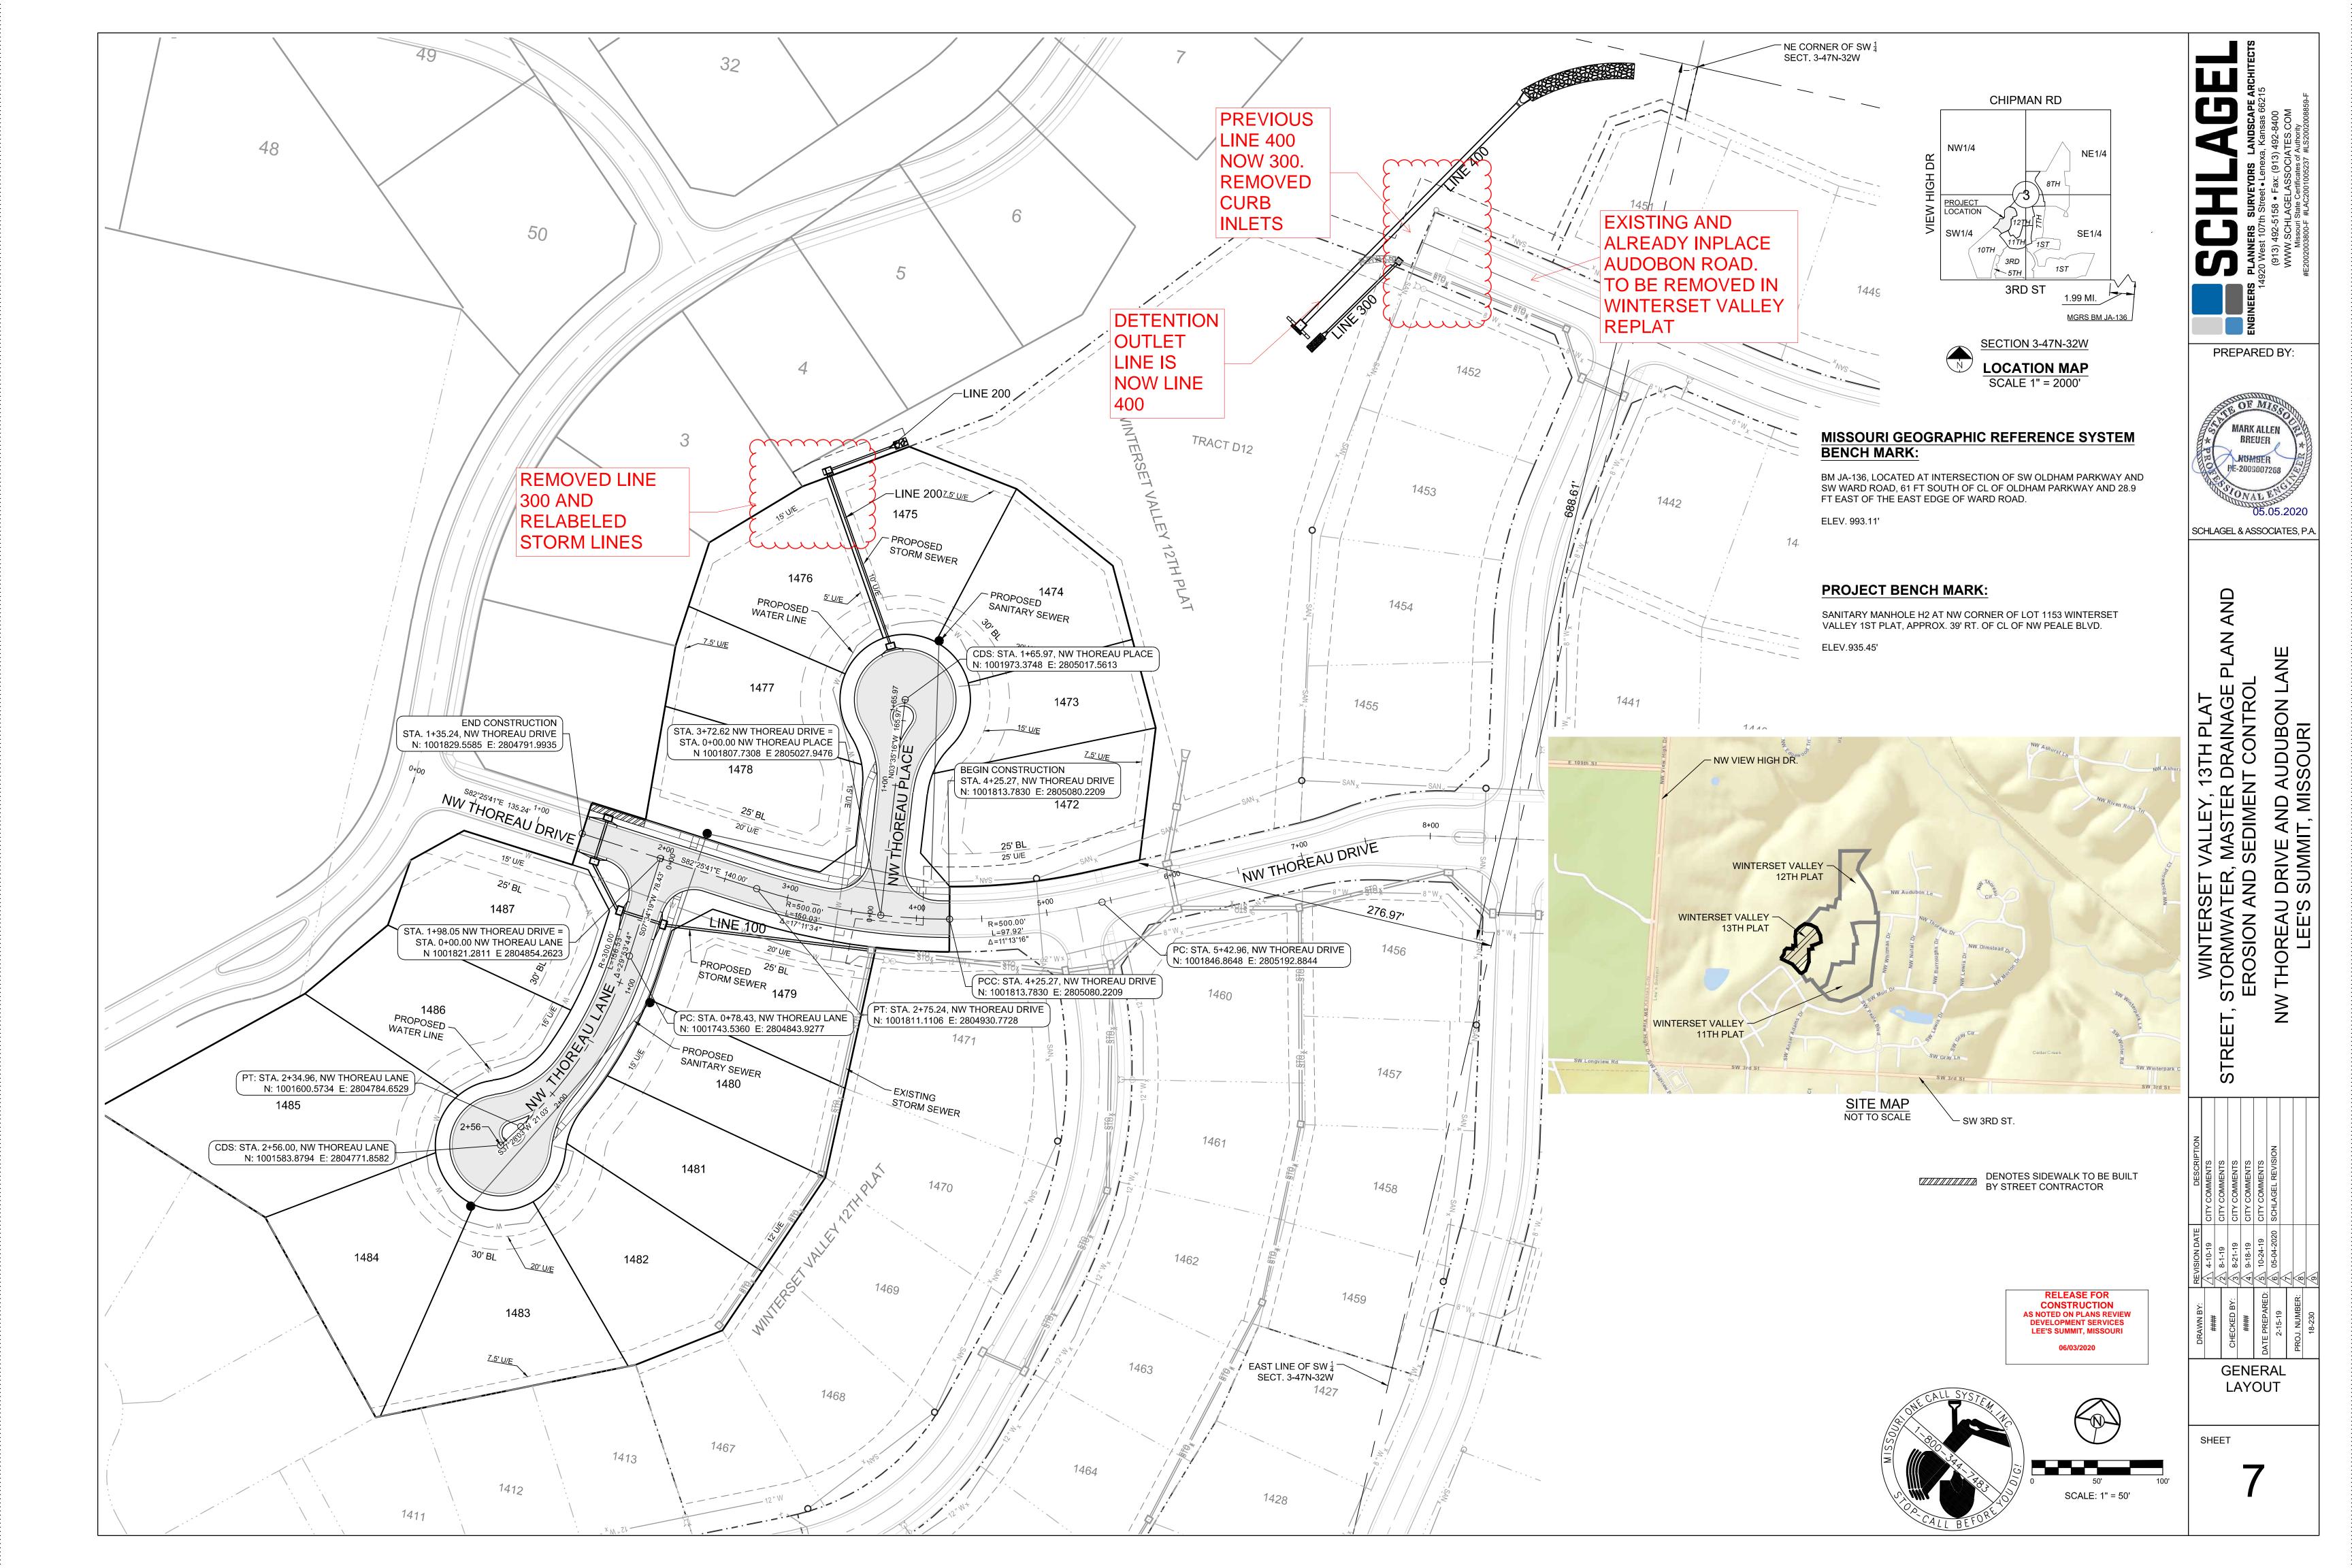



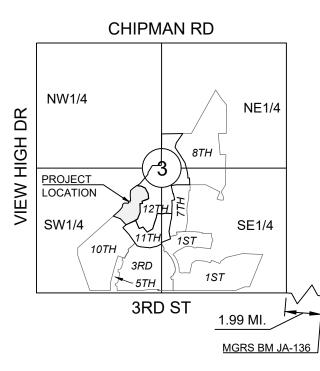



NOTE:

THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL EXISTING UTILITY LOCATIONS PRIOR TO EXCAVATIONS.

 DENOTES LIMITS OF DISTURBANCE
 DENOTES PROPOSED MAJOR CONTOU
 DENOTES PROPOSED MINOR CONTOU
 DENOTES EXISTING MAJOR CONTOUR
 DENOTES EXISTING MINOR CONTOUR

MISSOURI GEOGRAPHIC REFERENCE SYSTEM **BENCH MARK:**

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'

PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'







PREPARED BY:


05.05.2020 SCHLAGEL & ASSOCIATES, P.A.


AND AUDUBON LANE T, MISSOURI WINTERSET VALLEY, 13TH PLAT STORMWATER, MASTER DRAINAGE EROSION AND SEDIMENT CONTRO DRIVE SUMMI

MASTER

DRAINAGE PLAN - GRADING PLAN



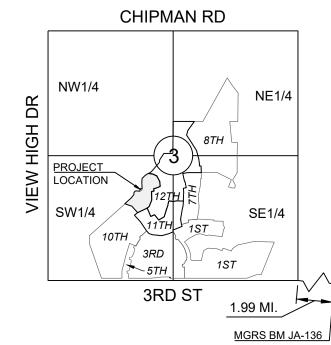



MISSOURI GEOGRAPHIC REFERENCE SYSTEM **BENCH MARK:**

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'

PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'

NOTES:

CORNERS.

- 1. MBOE = MINIMUM BUILDING OPENING ELEVATION FOR HOUSES ADJACENT TO ENGINEERED OVERFLOW SWALES SHALL BE MINIMUM 2 FEET ABOVE THE 100 YR WATER SURFACE ELEVATION.
- EGL = ENERGY GRADE LINE (100 YR) WSE = WATER SURFACE ELEVATION (100 YR)

LOT TYPE TABLE

1472 WALKOUT

1473 WALKOUT

1474 | WALKOUT 1475 | WALKOUT

1476 | WALKOUT

1477 DAYLIGHT

1478 STANDARD

1479 DAYLIGHT

1480 DAYLIGHT

1481 DAYLIGHT

1482 DAYLIGHT

1483 DAYLIGHT

1484 STANDARD

1485 STANDARD

1486 STANDARD

1487 | STANDARD

DAYLIGHT BASED ON ADJACENT GRADE 4 FT BELOW TOP OF FOUNDATION WHILE

MAINTAINING 2.5% (MIN) GRADE TO LOT

MAINTAINING 2.5% (MIN) GRADE TO LOT

2. WALKOUT BASED ON ADJACENT GRADE AT BASEMENT FLOOR ELEVATION WHILE

LOT#

BASEMENT


TYPE

- ENGINEERED SWALES TO BE GRADED TO NORMAL DEPTH OF FLOW (WATER SURFACE ELEVATION) OR 1.0 FT, WHICHEVER IS GREATER. MINIMUM SLOPE OF ENGINEERED SWALES SHALL BE AS NOTED.
- MBOE'S ADJACENT TO SUMPED INLETS SHALL BE A MINIMUM OF 1' ABOVE TOP OF ADJACENT BERM



_EL:933.8 EX _____DENOTES EXISTING GRADE ELEVATION EL:936.48 FG DENOTES FINISHED GRADE ELEVATION

DENOTES CONCEPTUAL BUILDING FOOTPRINT

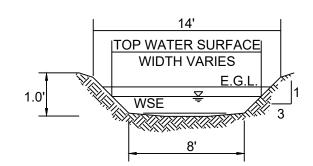

100 YR OVERFLOW SWALE SECTIONS

SECTION A-A, B-B, C-C, D-D, E-E, F-F (SEE ADJACENT CHART)

RUNOFF CALCULATIONS:

Q = K * C * I * A

 $K_{10} = 1.0$ $K_{100} = 1.25$ C = 0.51 I = INTENSITYDESIGN OVERFLOW=Q_{OVERFLOW} = Q₁₀₀ - Q₁₀ MANNINGS "n" = .030 FOR SWALES


CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

	50	J			
SCAL	F٠	1"	=	50'	

				100	YEAR OVE	RFLOW SWA	ALES					
SECTION	DRAINAGE AREA (AC.)	Q100 (CFS)	Q10 (CFS)	DESIGN OVERFLOW (CFS)	BED SLOPE (%)	BASE WIDTH (FT.)	SIDE SLOPE	TOP WATER SURFACE WIDTH (FT.)	NORMAL DEPTH (FT.)	VELOCITY (FPS)	VELOCITY HEAD (FT.)	EGL (FT.)
A-A	1.61	10.59	7.00	3.59	2.60	8	3:1	9.1	0.18	2.36	0.09	0.27
B-B	0.91	5.99	3.96	2.03	2.50	8	3:1	8.8	0.13	1.88	0.05	0.18
C-C	1.14	7.50	4.96	2.54	2.50	8	3:1	8.9	0.15	2.02	0.06	0.21
D-D	0.51	3.36	2.39	3.36	8.34	8	3:1	8.7	0.12	3.35	0.17	0.29
E-E	0.99	6.51	4.31	2.21	5.64	8	3:1	8.7	0.11	2.43	0.09	0.20
F-F	0.52	3.42	2.26	1.16	7.66	8	3:1	8.4	0.07	2.03	0.06	0.13


06/03/2020 SCALE: 1" = 50' 2.38 3:1 8.4 0.07 1.25 0.02 0.09 EMERGENCY OVERFLOW SWALE - ASSUME INLET CLOGGED, QDESIGN=100YR

PREPARED BY:




f, 13TH PLAT ER DRAINAGE ENT CONTROI AND AUDUBON I IT, MISSOURI VALLEY, , MASTEF , SEDIMER DRIVE SUMMI WINTERSET V STORMWATER, EROSION AND S


MASTER DRAINAGE PLAN - SPOT **ELEVATIONS**

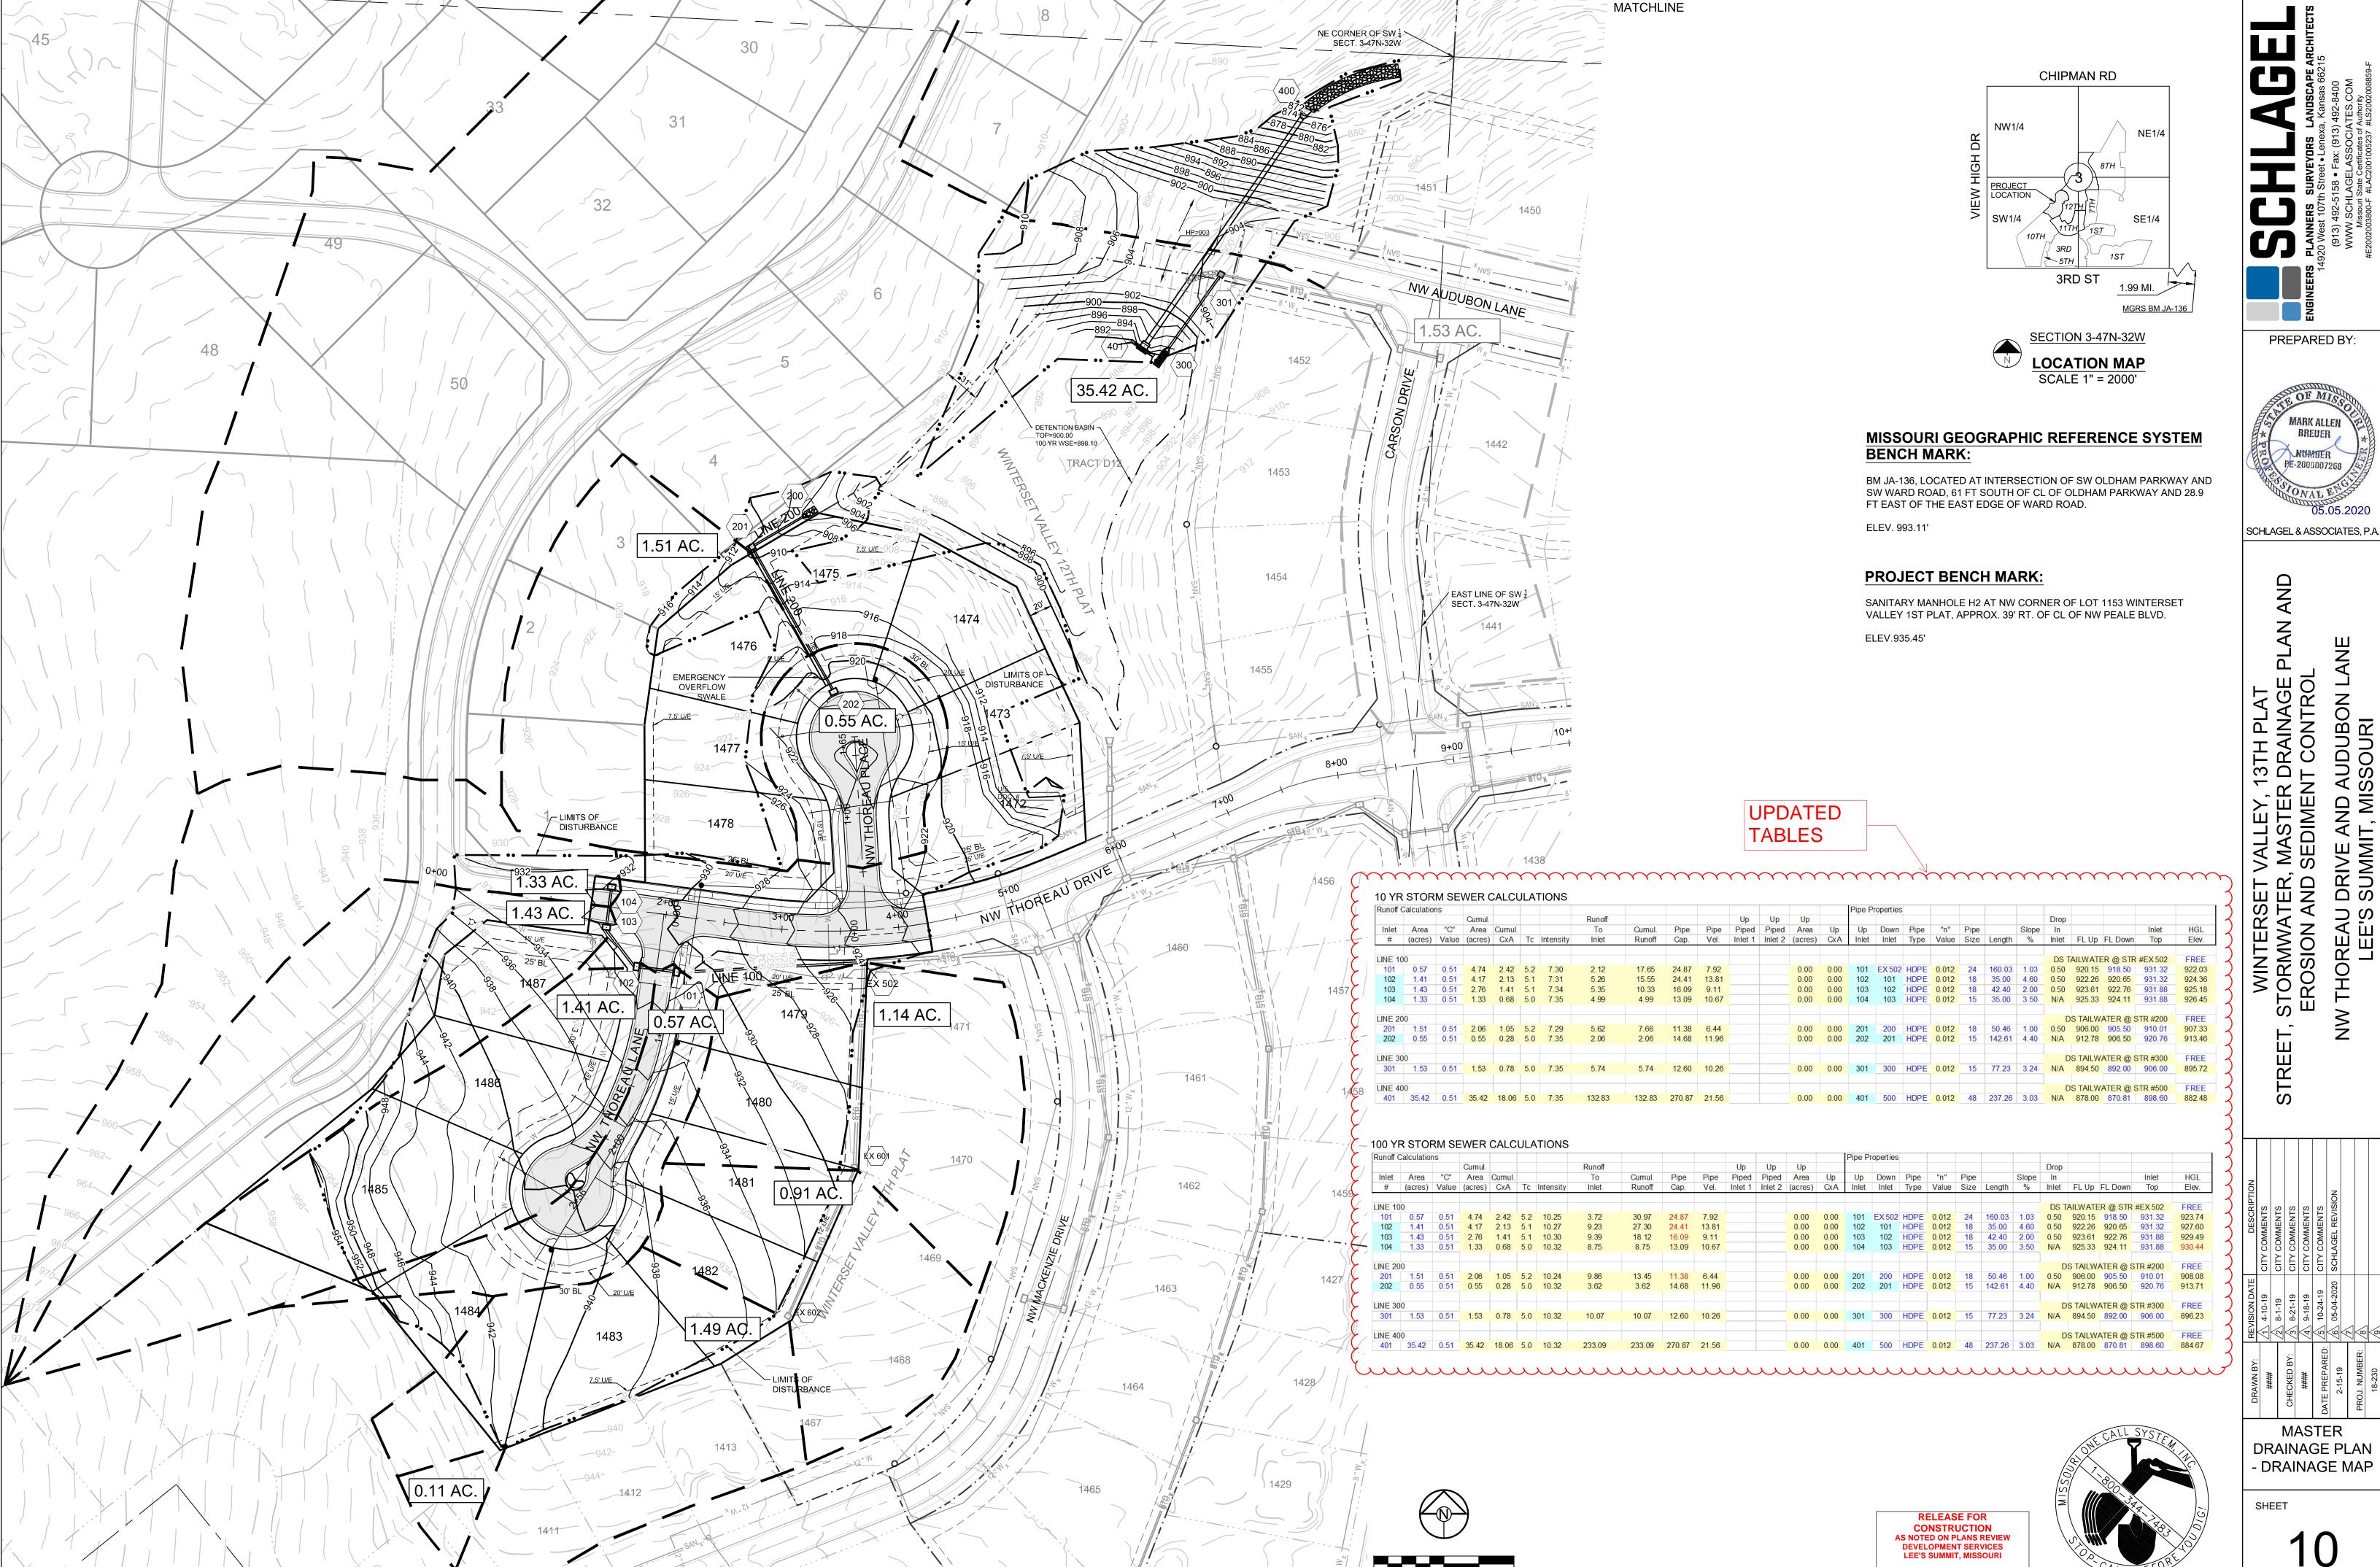

SCALE: 1" = 60'



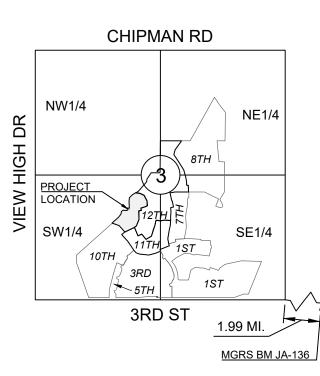



MISSOURI GEOGRAPHIC REFERENCE SYSTEM

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

AND AUDUBON LANE T, MISSOURI WINTERSET VALLEY, 13TH PLAT STORMWATER, MASTER DRAINAGE EROSION AND SEDIMENT CONTRO NW THOREAU DRIVE LEE'S SUMMI

PREPARED BY:

BREUER

05.05.2020

MOMBER PE-2009007268

SCHLAGEL & ASSOCIATES, P.A.

DESCRIPTION	CITY COMMENTS	SCHLAGEL REVISION					
SION DATE	4-10-19	8-1-19	8-21-19	9-18-19	10-24-19	05-04-2020	

	5	迃	Ö	.io	SC			1
× × ×	61-1-9 \77	3 8-21-19	9-18-19	5 10-24-19	6 05-04-2020	$\langle \psi \rangle$		
		CHECKED BY:	####	DATE PREPARED:	2-15-19	2	PROJ. NUMBER:	

MASTER DRAINAGE PLAN-DRAINAGE MAP CONT'D SHEET

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

5' SIDEWALK -(BY STREET CONTRACTOR) STA. 3+72.62 NW THOREAU DRIVE = END CONSTRUCTION STA. 0+00.00 NW THOREAU PLACE STA. 1+35.24, NW THOREAU DRIVE N 1001807.7308 E 2805027.9476 N: 1001829.5585 E: 2804791.9935 (BY OTHERS) NW THOREAU DRIVE FUTURESTREET BEGIN CONSTRUCTION 1460 STA. 4+25.27, NW THOREAU DRIVE N: 1001813.7830 E: 2805080.2209 PC: STA. 4+25.27, NW THOREAU DRIVE N: 1001813.7830 E: 2805080.2209 STA. 1+98.05 NW THOREAU DRIVE = STA. 0+00.00 NW THOREAU LANE N 1001821.2811 E 2804854.2623 PT: STA. 2+75.24, NW THOREAU DRIVE N: 1001811.1106 E: 2804930.7728 –,5' SIDEWALK (BY OTHERS) 1461

MISSOURI GEOGRAPHIC REFERENCE SYSTEM **BENCH MARK:**

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.


ELEV. 993.11'

PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'

DENOTES SIDEWALK TO BE BUILT BY STREET CONTRACTOR



NW THOREAU DRIVE 1" = 50' HORIZ. 1" = 10' VERT. PVI STA:1+79.42
PVI EL:931.43
A.D.=-2.44% K=61.47 SSD=517' 150.00' VC PROPOSED GRADE PVI STA:5+75.55 PVI EL:915.07 A.D.=6.85% EVCS:2+54/42 EVCE:928/33 EXISTING GRADE K=32.87 225.00' VC LP STA.=5+98.80 BVCS:4+63.05 BVCE:919.72 LP EL=916.91 920 STA. 3+72.62, NW THOREAU DRIVE = STA. 0+00.00, NW THOREAU PLACE EL = 923.45 STA, 5+76.54 CL NW THOREAU DRIN STA, 9+15.78 CL MACKENZIE DRIVE ELEV. = 917.81 917.7 0+00 7+00



RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI



PREPARED BY:




SCHLAGEL & ASSOCIATES, P.A.

AND AUDUBON I IT, MISSOURI WINTERSET VALLEY, 'STORMWATER, MASTER EROSION AND SEDIMEN NW THOREAU DRIVE LEE'S SUMMI

NW THOREAU DRIVE PLAN AND

PROFILE

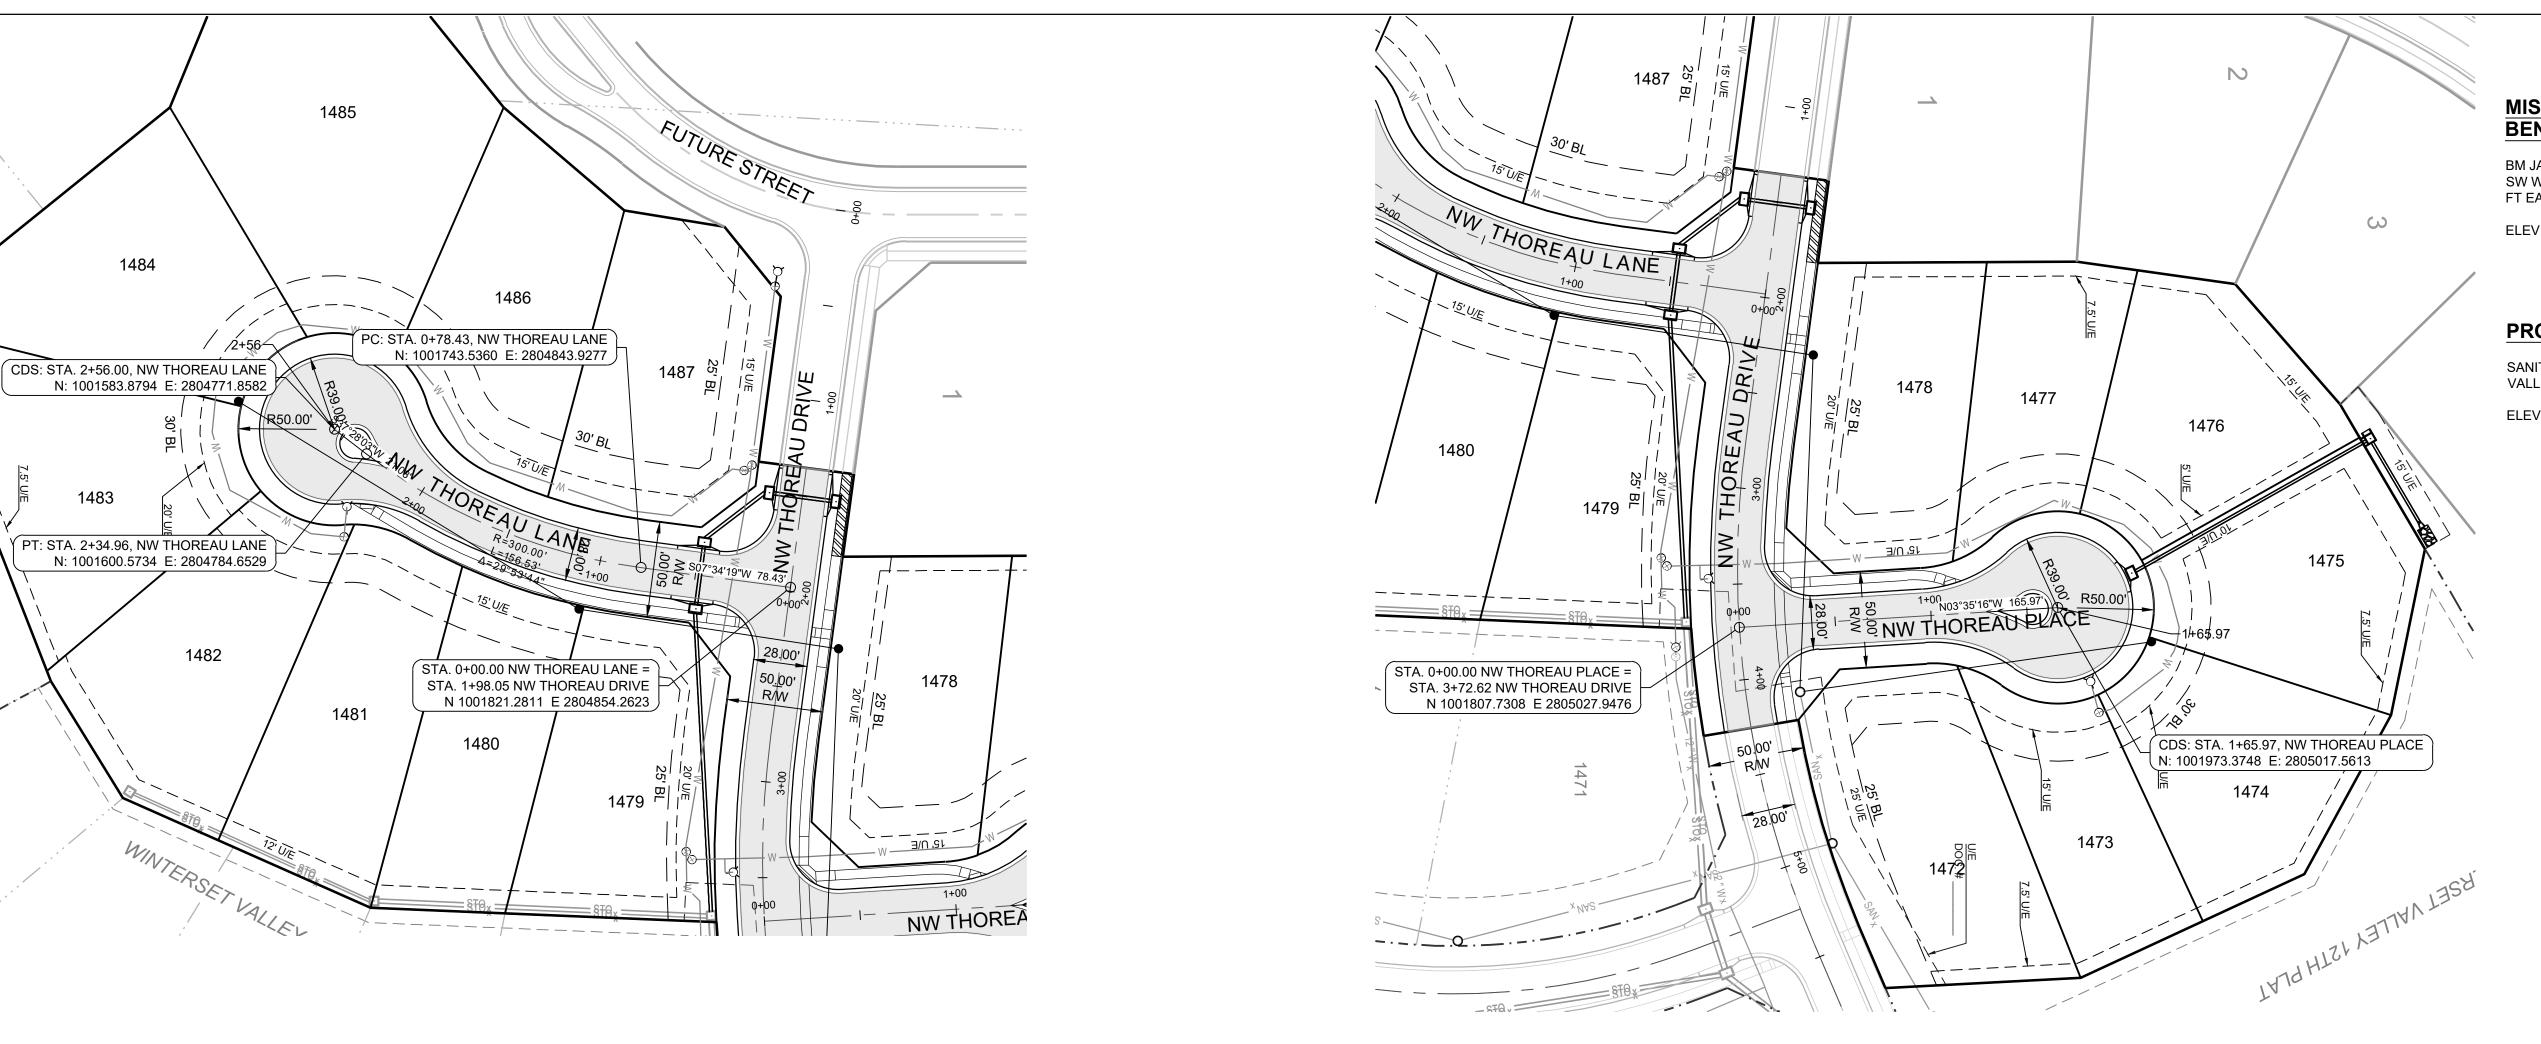

MISSOURI GEOGRAPHIC REFERENCE SYSTEM **BENCH MARK:**

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'


PROJECT BENCH MARK:


SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'

DENOTES SIDEWALK TO BE BUILT BY STREET CONTRACTOR

SCALE: 1" = 50'

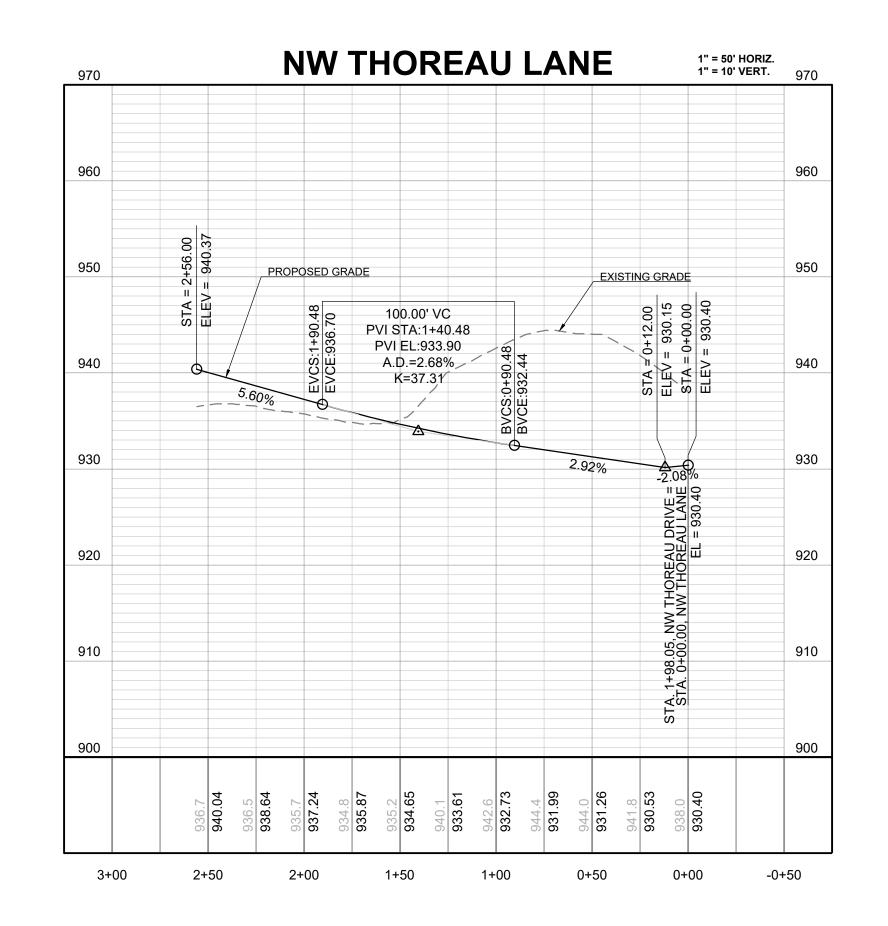

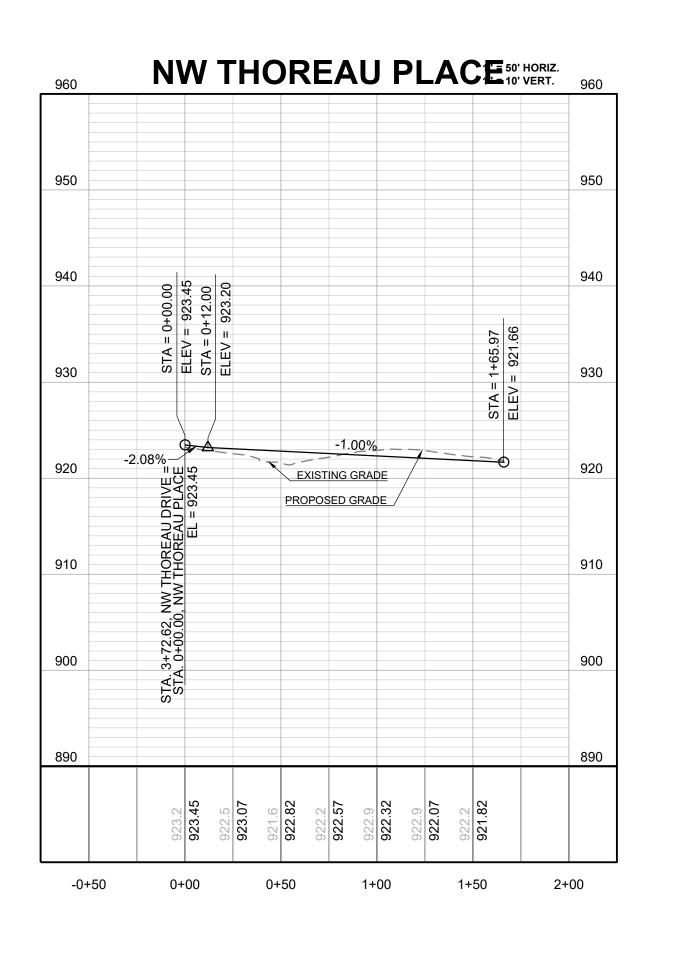

CONSTRUCTION

AS NOTED ON PLANS REVIEW LEE'S SUMMIT, MISSOURI



SCHLAGEL & ASSOCIATES, P.A. AND AUDUBON LIT, MISSOURI WINTERSET VALLEY, 'STORMWATER, MASTER EROSION AND SEDIMEN NW THOREAU DRIVE LEE'S SUMMI


PREPARED BY:


MUMBER


PE-2009007268

NW THOREAU PL AND NW THOREAU LN PLAN AND PROFILE

SHEET

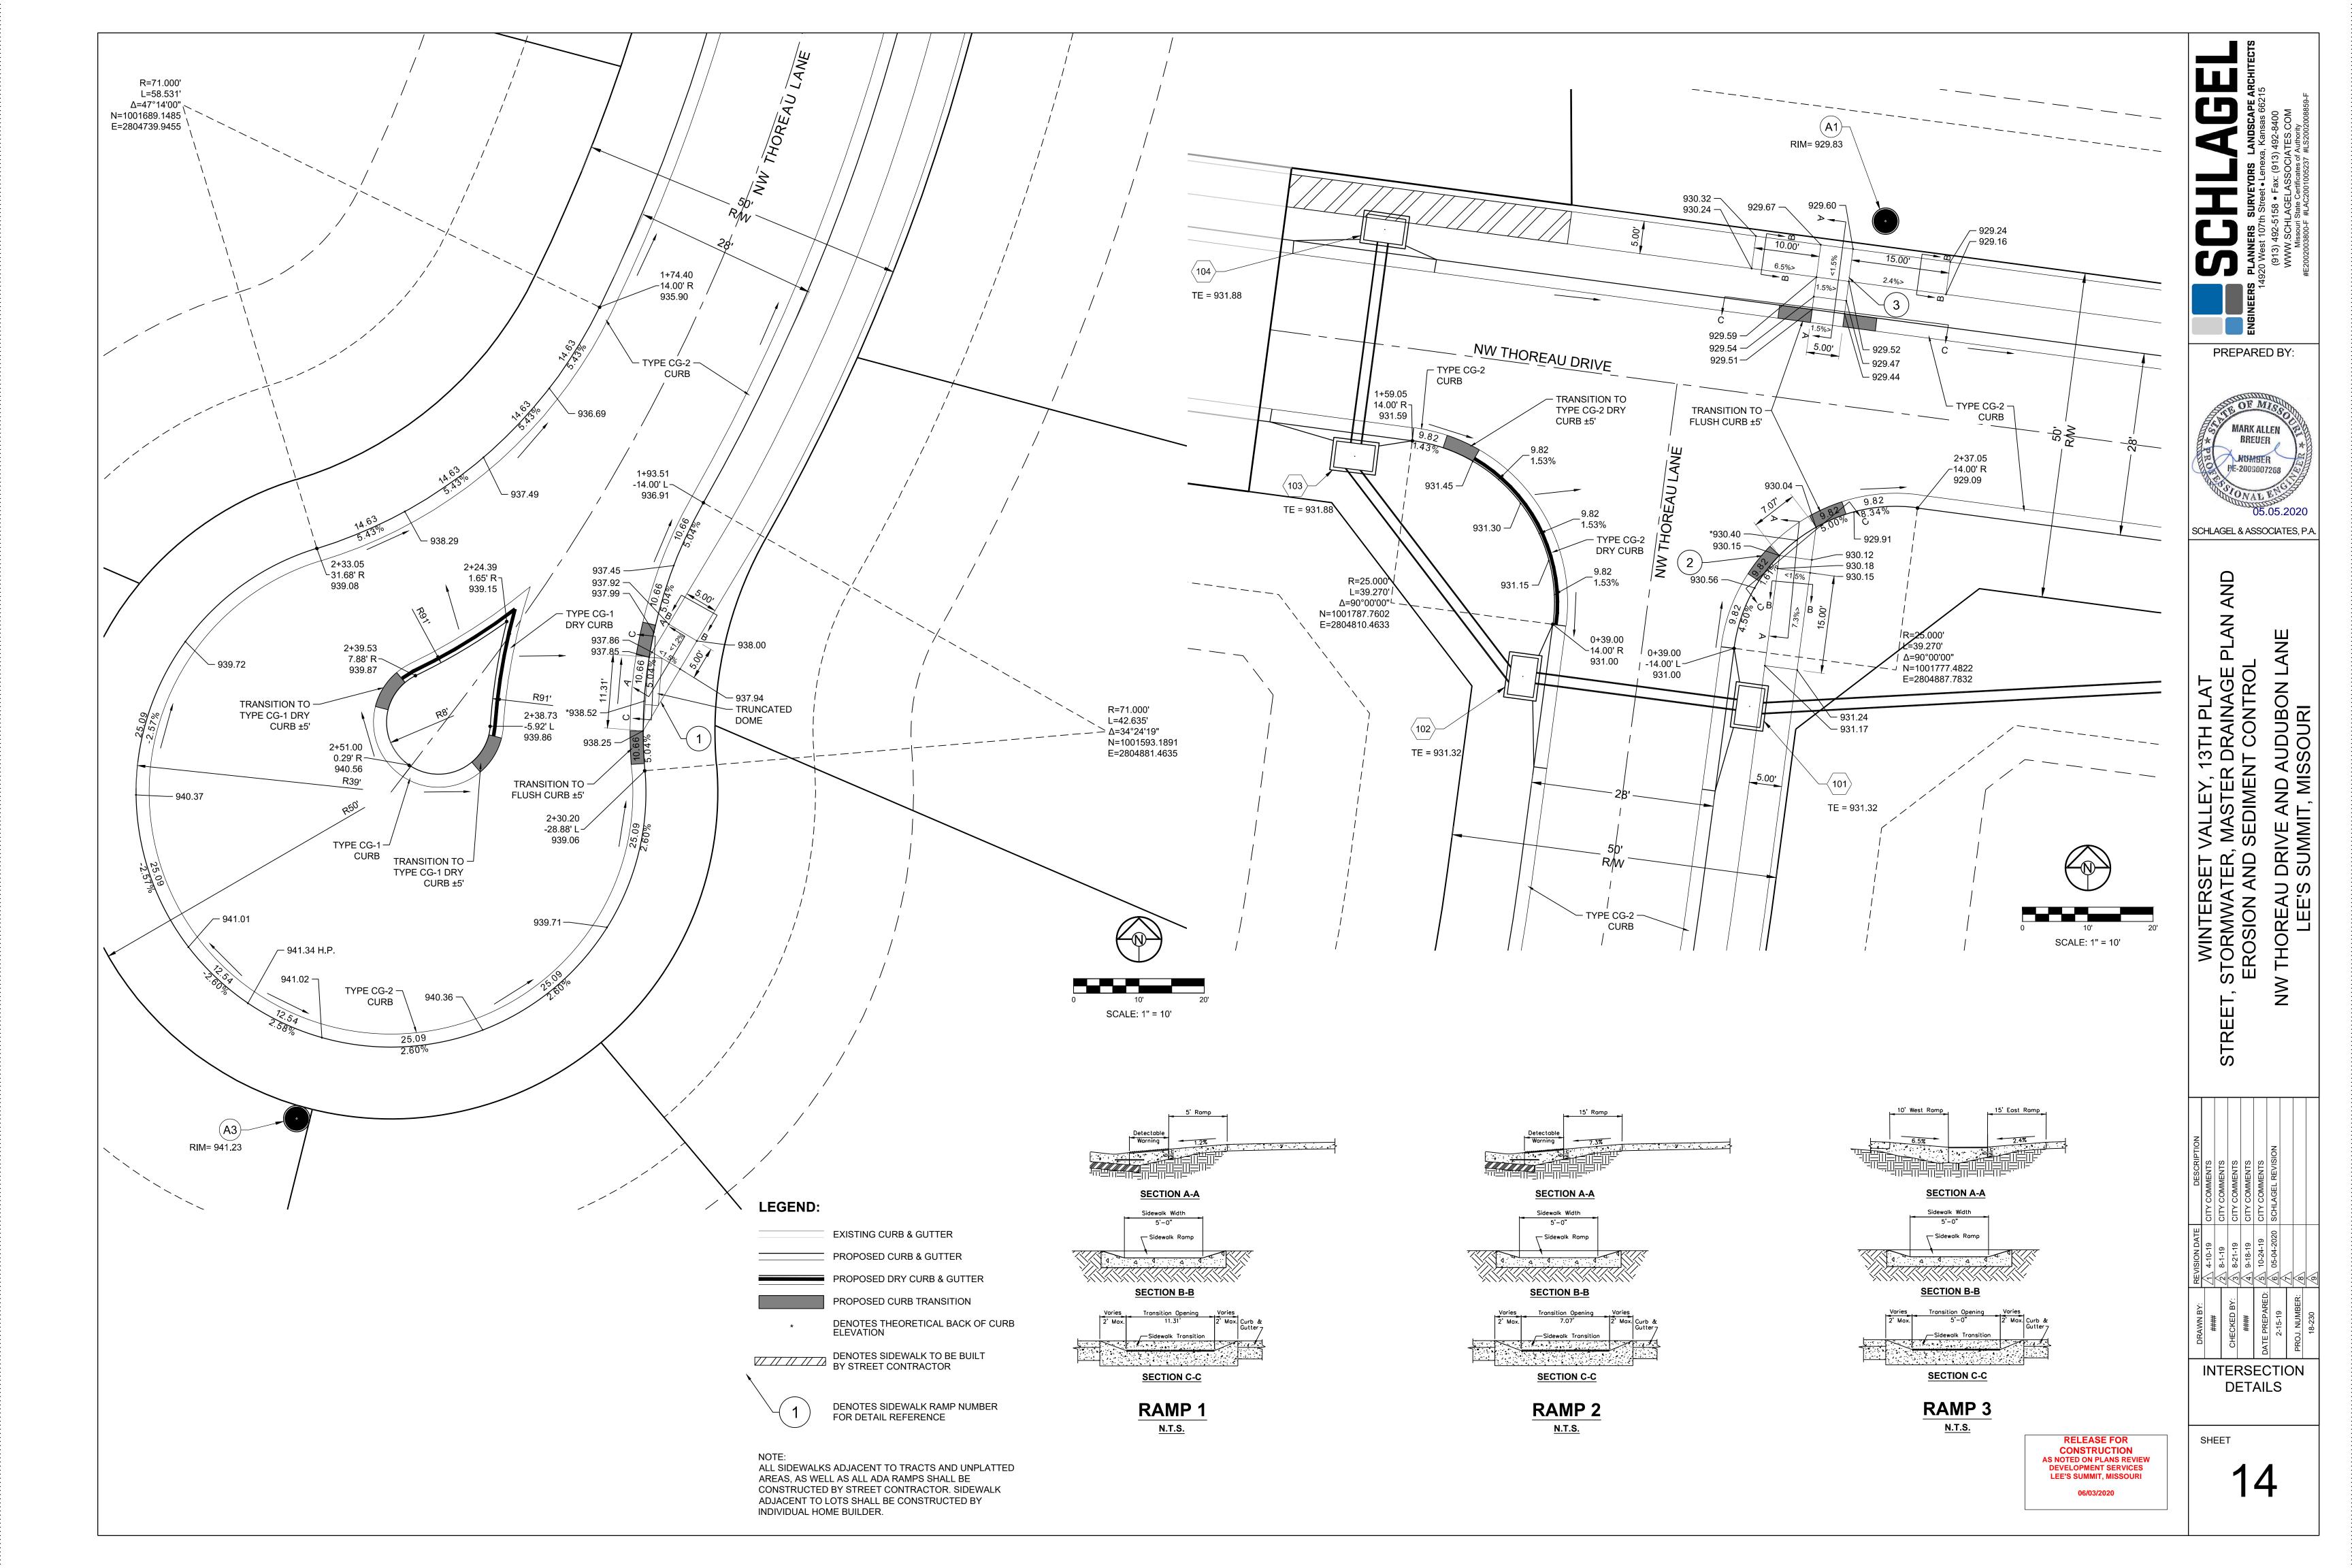

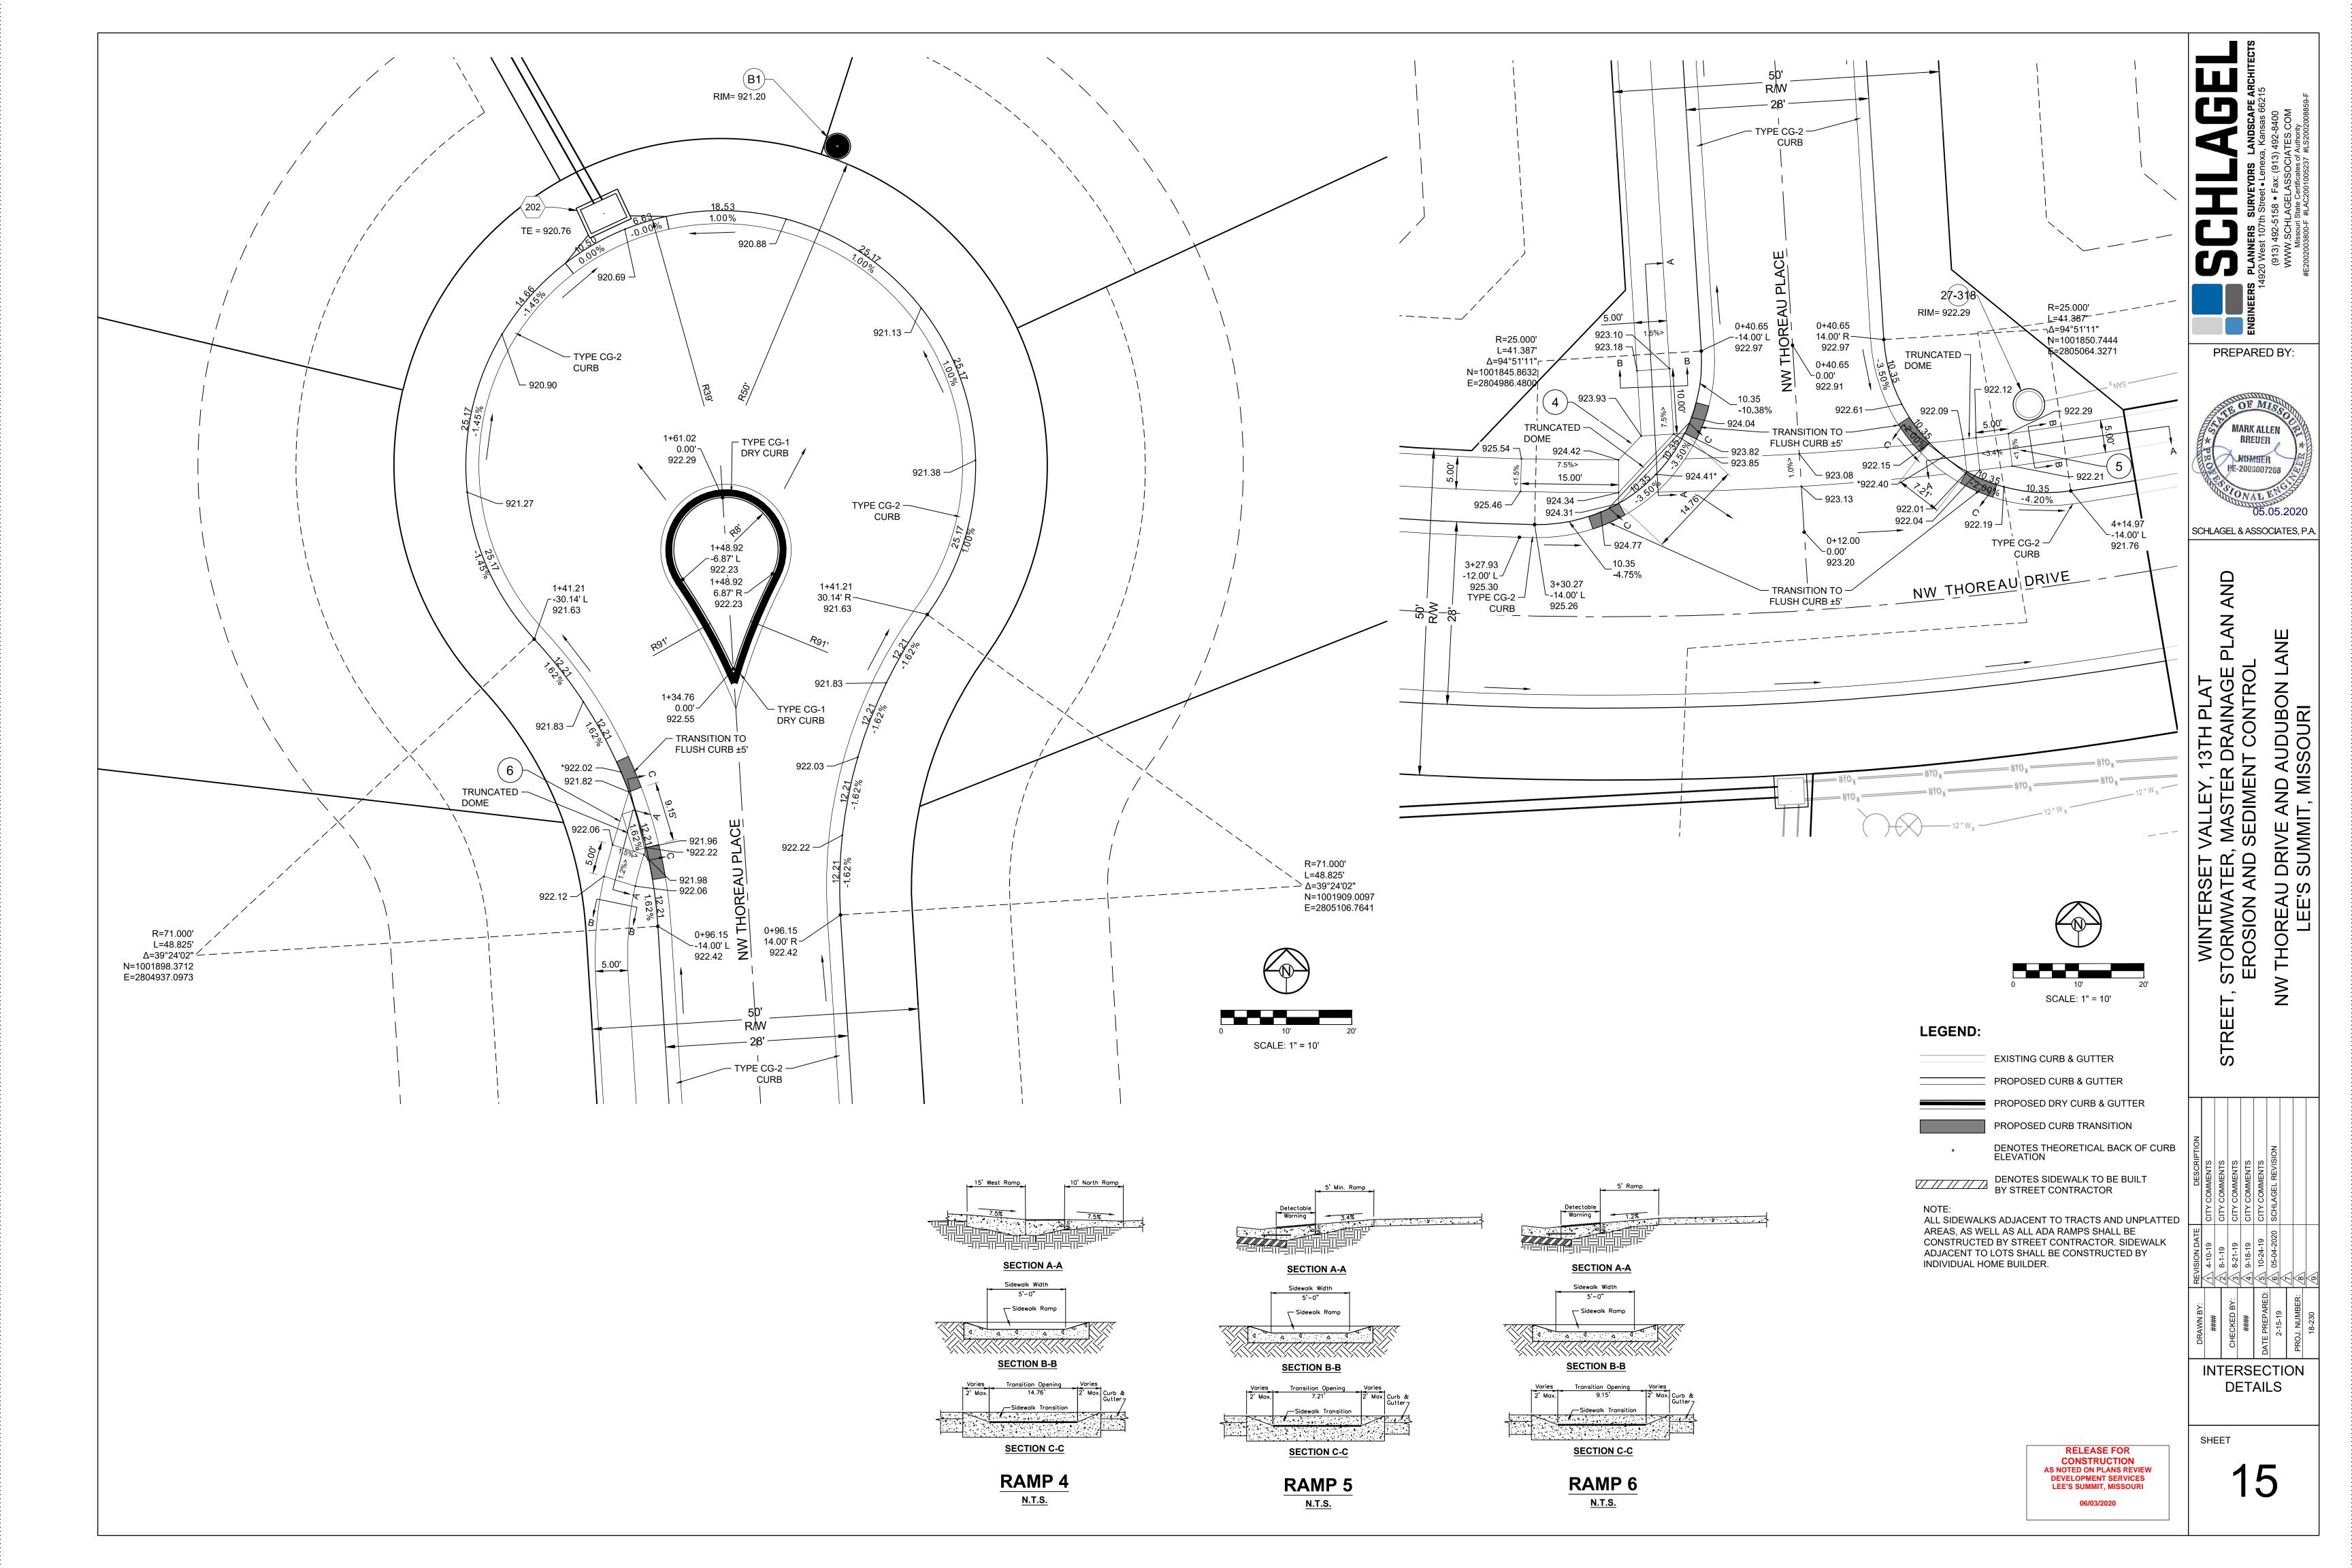

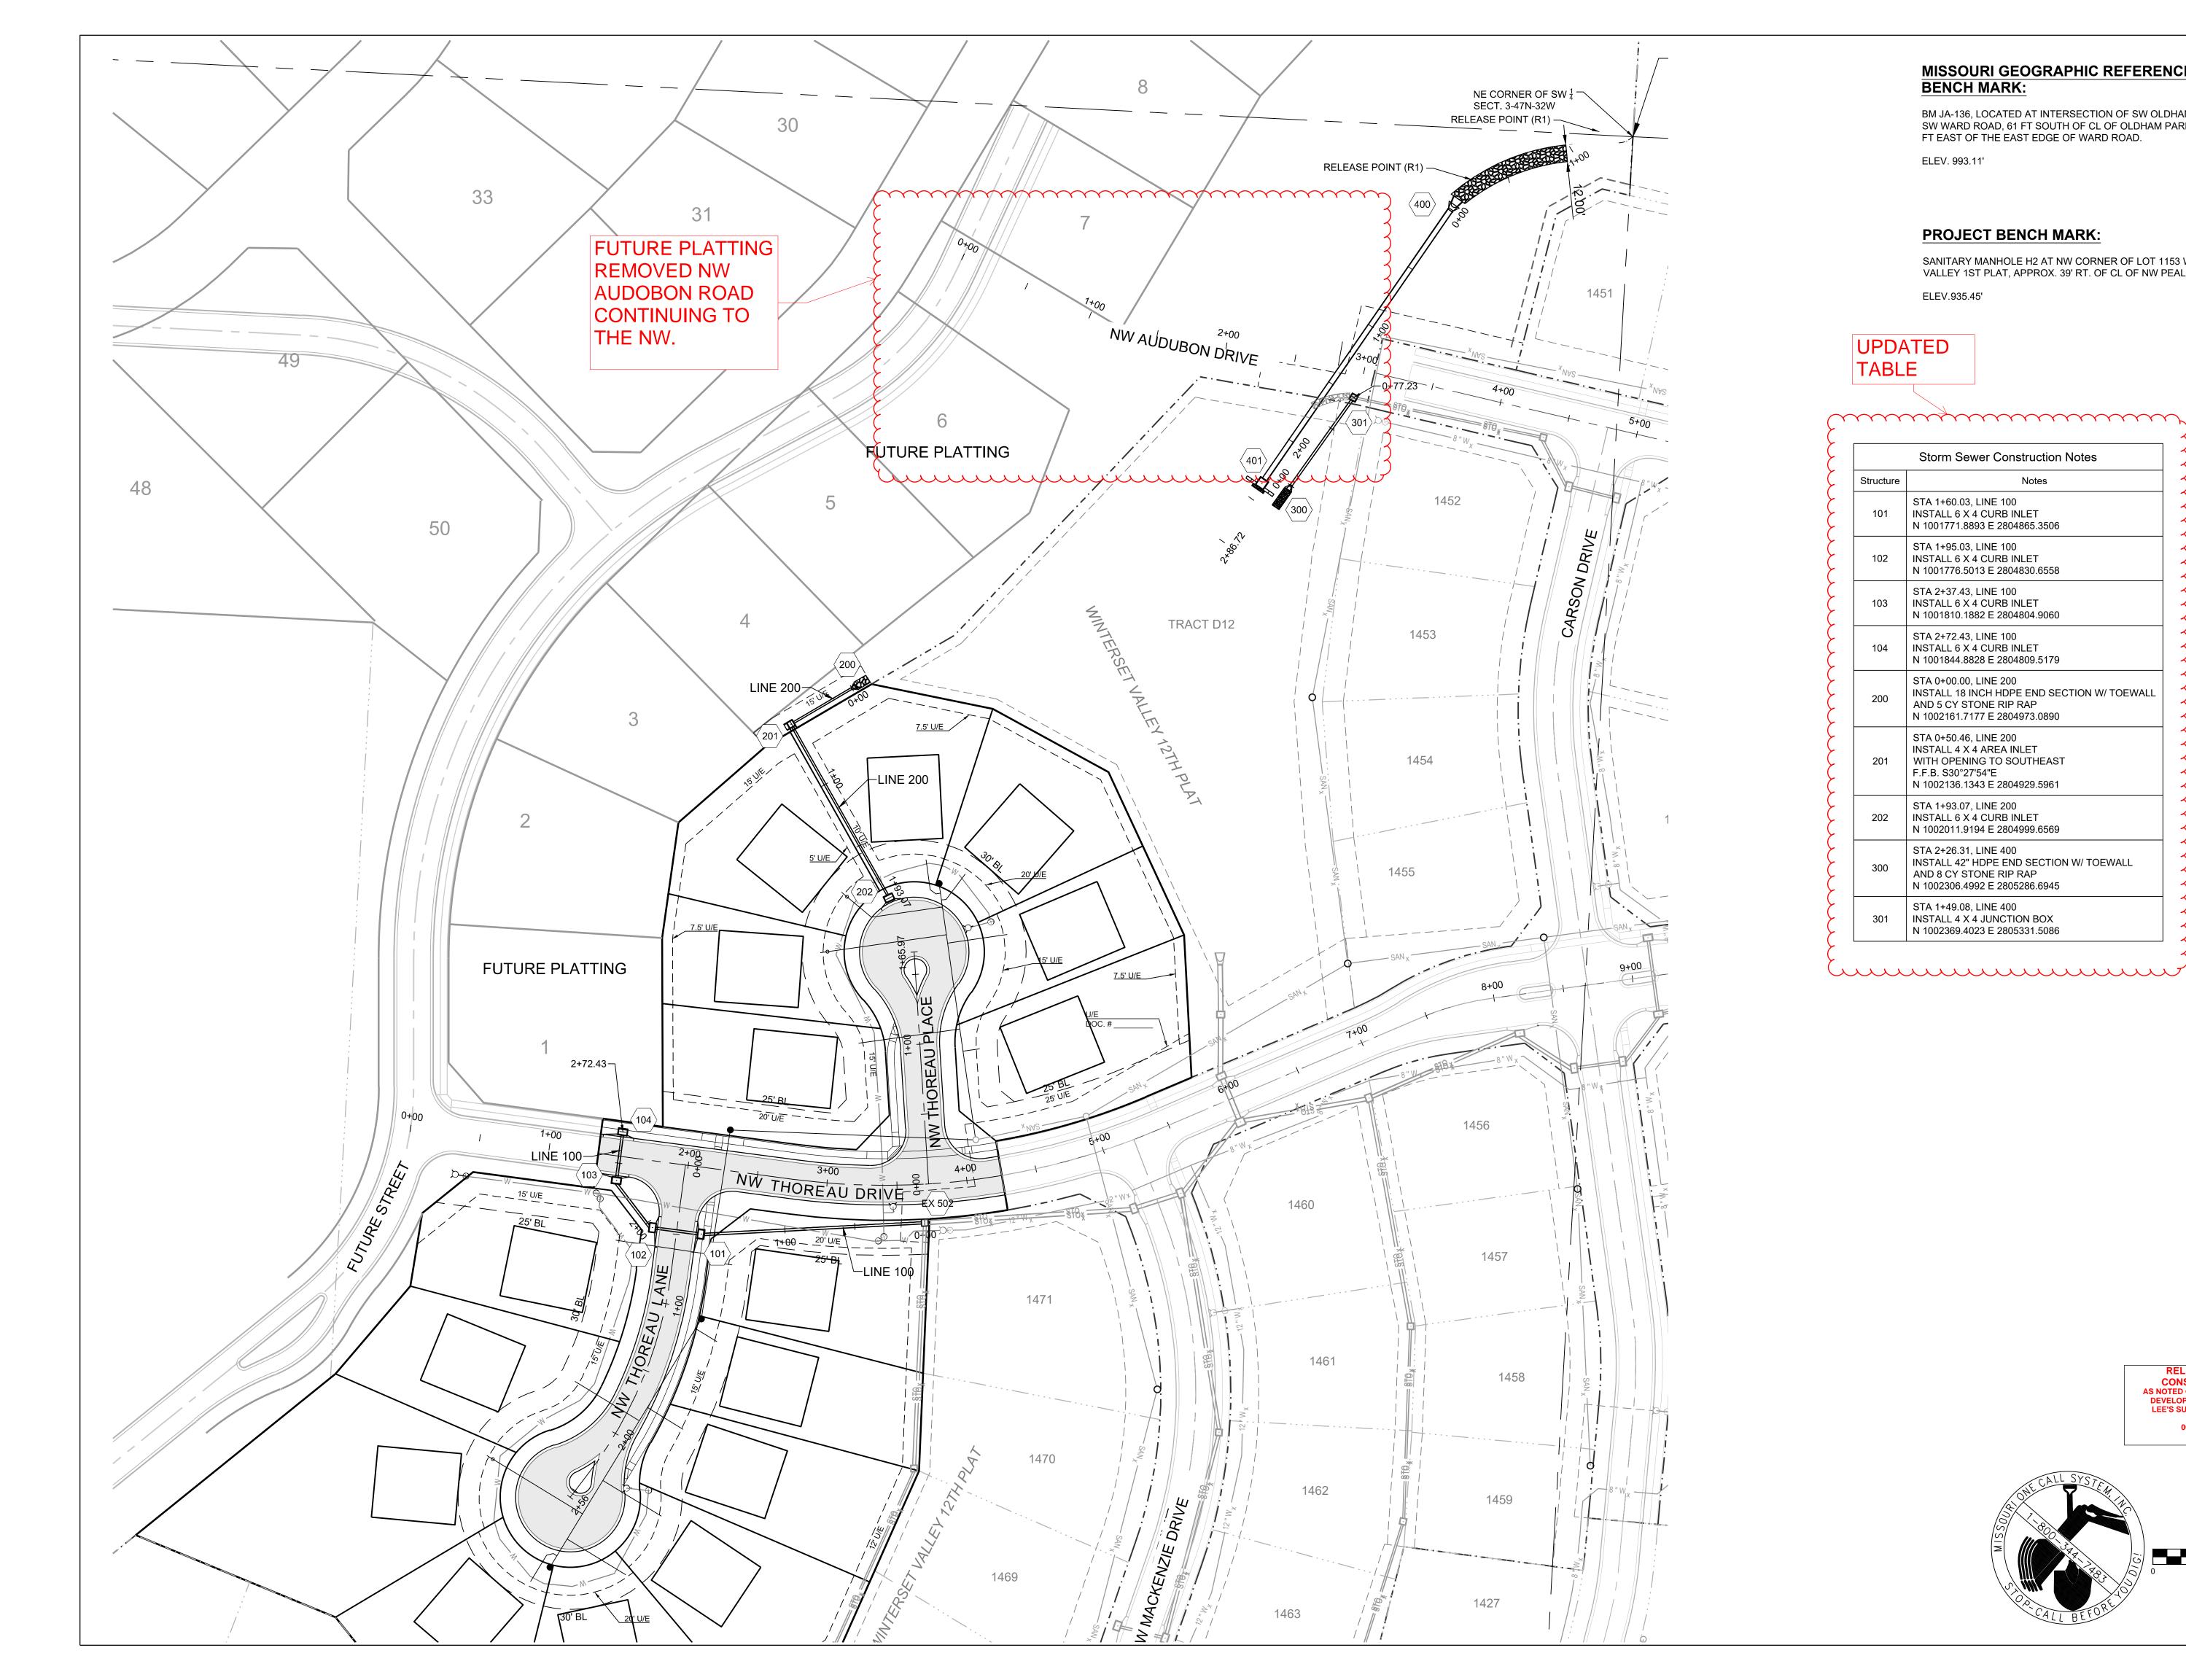

MISSOURI GEOGRAPHIC REFERENCE SYSTEM **BENCH MARK:**

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'

PROJECT BENCH MARK:


SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'


UPDATED TABLE

	Storm Sewer Construction Notes
Structure	Notes
101	STA 1+60.03, LINE 100 INSTALL 6 X 4 CURB INLET N 1001771.8893 E 2804865.3506
102	STA 1+95.03, LINE 100 INSTALL 6 X 4 CURB INLET N 1001776.5013 E 2804830.6558
103	STA 2+37.43, LINE 100 INSTALL 6 X 4 CURB INLET N 1001810.1882 E 2804804.9060
104	STA 2+72.43, LINE 100 INSTALL 6 X 4 CURB INLET N 1001844.8828 E 2804809.5179
200	STA 0+00.00, LINE 200 INSTALL 18 INCH HDPE END SECTION W/ TOEWALL AND 5 CY STONE RIP RAP N 1002161.7177 E 2804973.0890
201	STA 0+50.46, LINE 200 INSTALL 4 X 4 AREA INLET WITH OPENING TO SOUTHEAST F.F.B. S30°27'54"E N 1002136.1343 E 2804929.5961
202	STA 1+93.07, LINE 200 INSTALL 6 X 4 CURB INLET N 1002011.9194 E 2804999.6569
300	STA 2+26.31, LINE 400 INSTALL 42" HDPE END SECTION W/ TOEWALL AND 8 CY STONE RIP RAP N 1002306.4992 E 2805286.6945
301	STA 1+49.08, LINE 400 INSTALL 4 X 4 JUNCTION BOX N 1002369.4023 E 2805331.5086

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

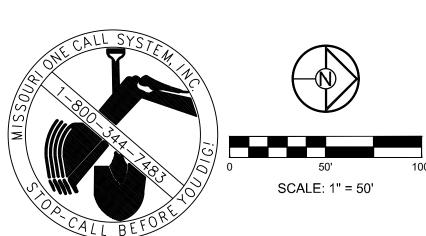

PREPARED BY:





AND AUDUBON LA IT, MISSOURI WINTERSET VALLEY, 13TH PLAT STORMWATER, MASTER DRAINAGE EROSION AND SEDIMENT CONTRO NW THOREAU DRIVE LEE'S SUMMI


	<u> </u>	CITY COMMENTS
	07.70	OF ALMAN OO AH
	61-1-9 \77	CITY COMMENTS
BY:	3 8-21-19	CITY COMMENTS
	4 9-18-19	CITY COMMENTS
ARFD:	<u> </u>	CITY COMMENTS
	6 05-04-2020	5 05-04-2020 SCHLAGEL REVISION
	<₹	
BER:	8	
	<	


STORM PLAN

SHEET

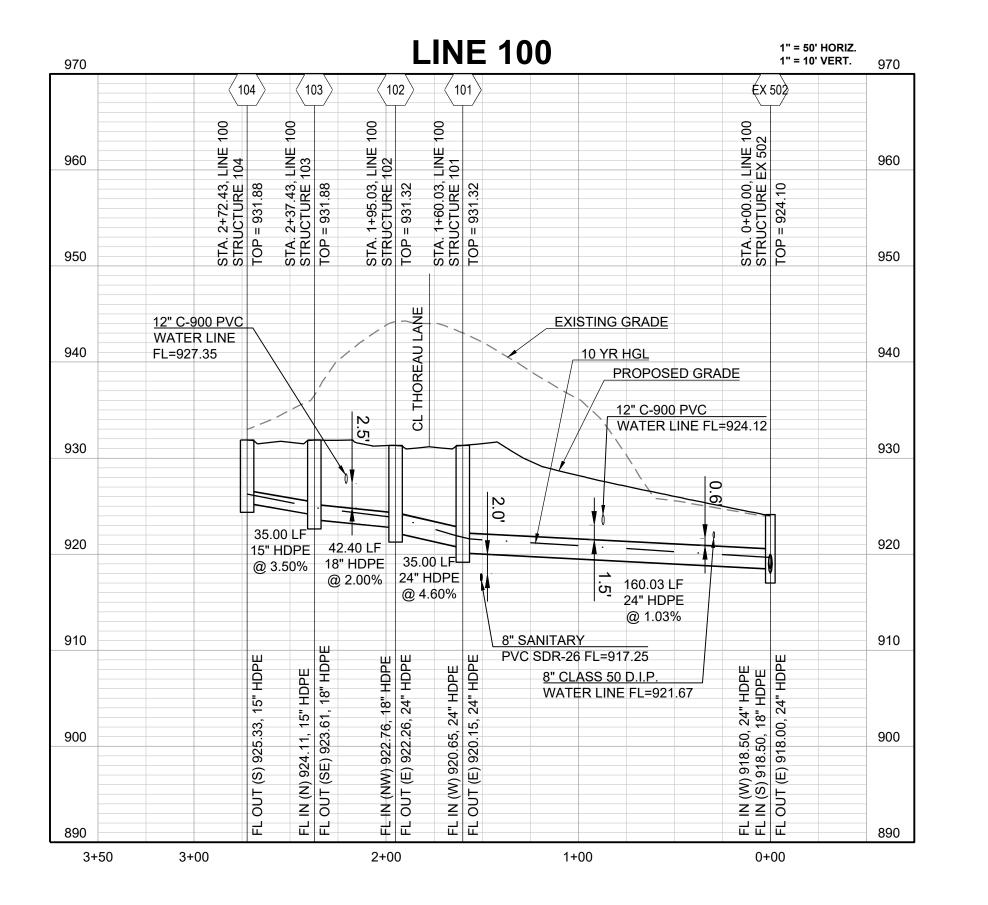


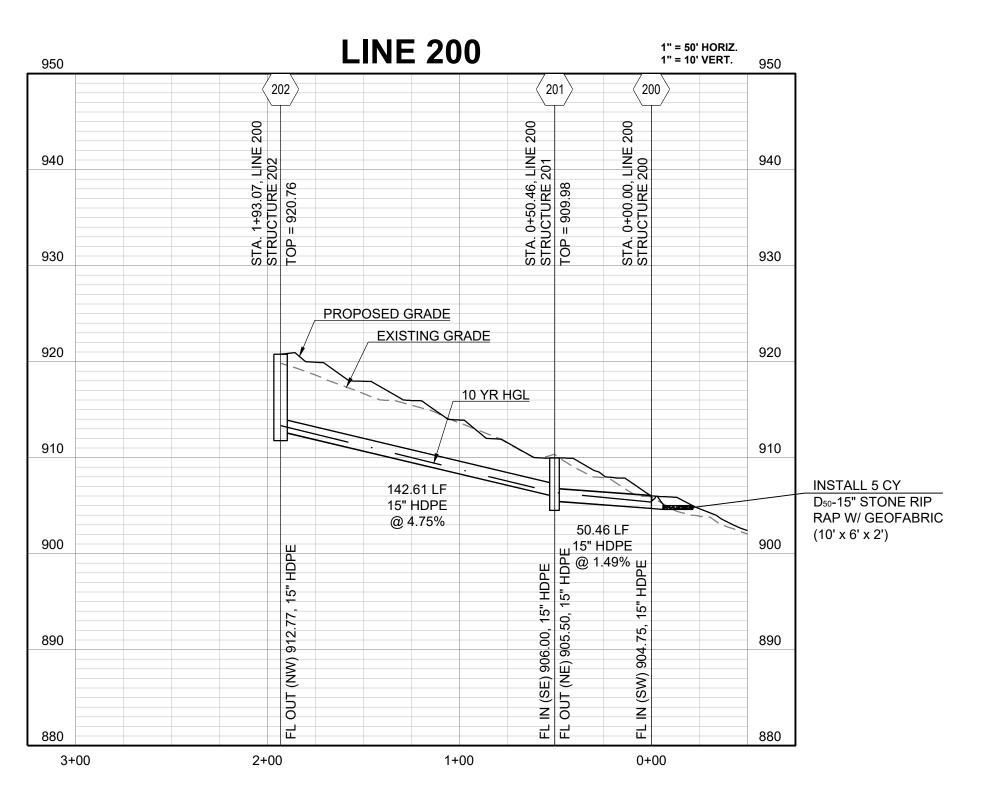

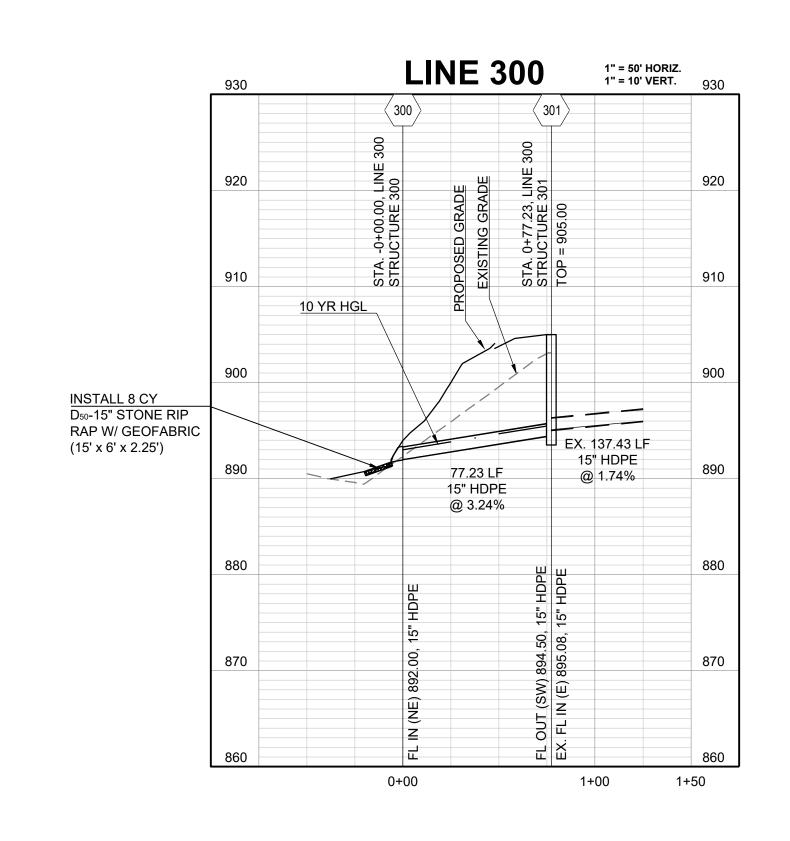

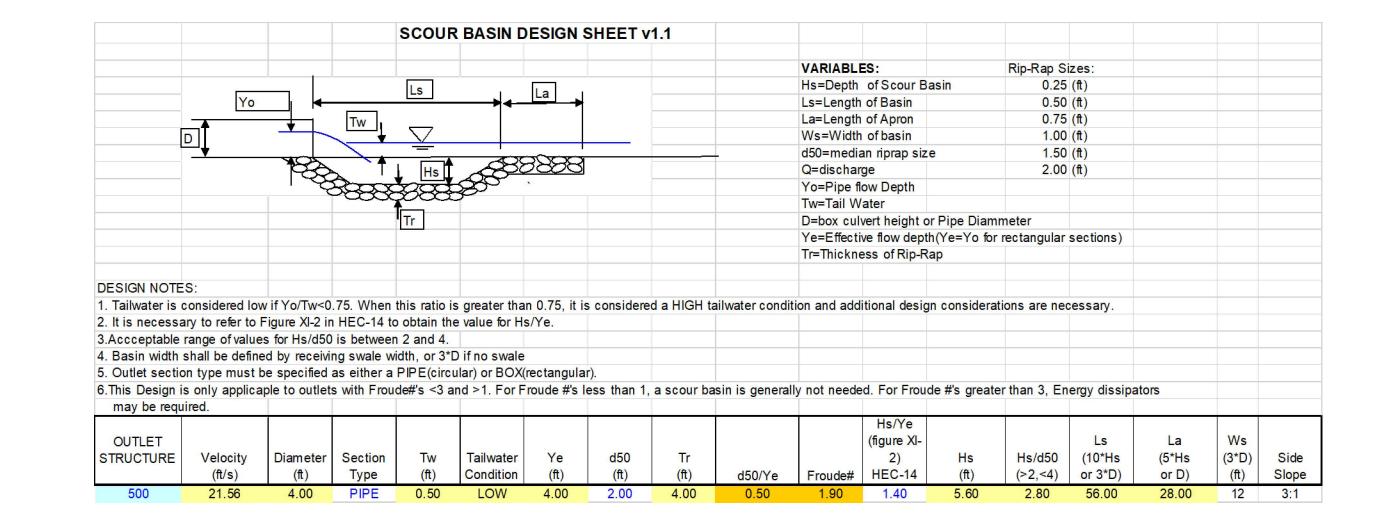

OUTLET RIP-RAP DESIGN WORKSHEET v1.0

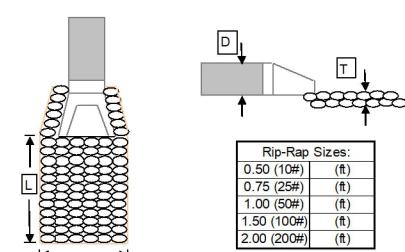

1. Rip-Rap width calculated to be either D+4',3*D, or top width of channel, whichever is greater 2. Rip-Rap length calculated to be 1/(2*tan(e))*(A/Yt-3), where e=20°,A=flow area, and Yt=normal depth

3. D50 calculated using (1/2)(1.384*V²/(s-1)*2g (Eqn.10, pg.32, HEC-11), where V=Outlet Velocity,

s=Specific Gravity of Stone=2.65, and g=32.2

4.Critical Shear Stresses provided by A.P.W.A. 5600 5.Rip-Rap thickness equals 2*D50 for 12" and smaller rip-rap, and 1.5*D50 for larger than 12"

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

Outlet/Channel Properties						Rip-Rap Dimensions									
Outlet Structure	Pipe Size (ft)	Downstream Channel/Swale Section	V Pipe (ft/s)	V Swale (ft/s)	Average Shear Stress (lb/ft^2)	W Calculated (ft)	W USED (ft)	L Calculated (ft)	L (min.) 3*D (ft)	L (max.) 10*D (ft)	L USED (ft)	D50 Calculated (in)	Size (Wt.) USED (d50,in)	Critical Shear Stress (lb/ft^2)	T (ft)
200	1.25	N/A	11.07	N/A	N/A	5.25	6	n/a	3.75	12.50	10	0.80	1.00 (50#)	4.00	2.00
400	2.00	N/A	14.04	N/A	N/A	6.00	6	n/a	6.00	20.00	15	1.28	1.50 (100#)	5.16	2.25

UPDATED **PROFILES**

PREPARED BY:

MARK ALLEN BREUER

MOMBER PE-2009007268

SCHLAGEL & ASSOCIATES, P.A.

AND

VALLEY, 13TH PLAT R, MASTER DRAINAGE F S SEDIMENT CONTROL


WINTERSET V STORMWATER, I EROSION AND S


05.05.2020


AND AUDUBON LANE T, MISSOURI


DRIVE SUMMI


STORM **PROFILES**

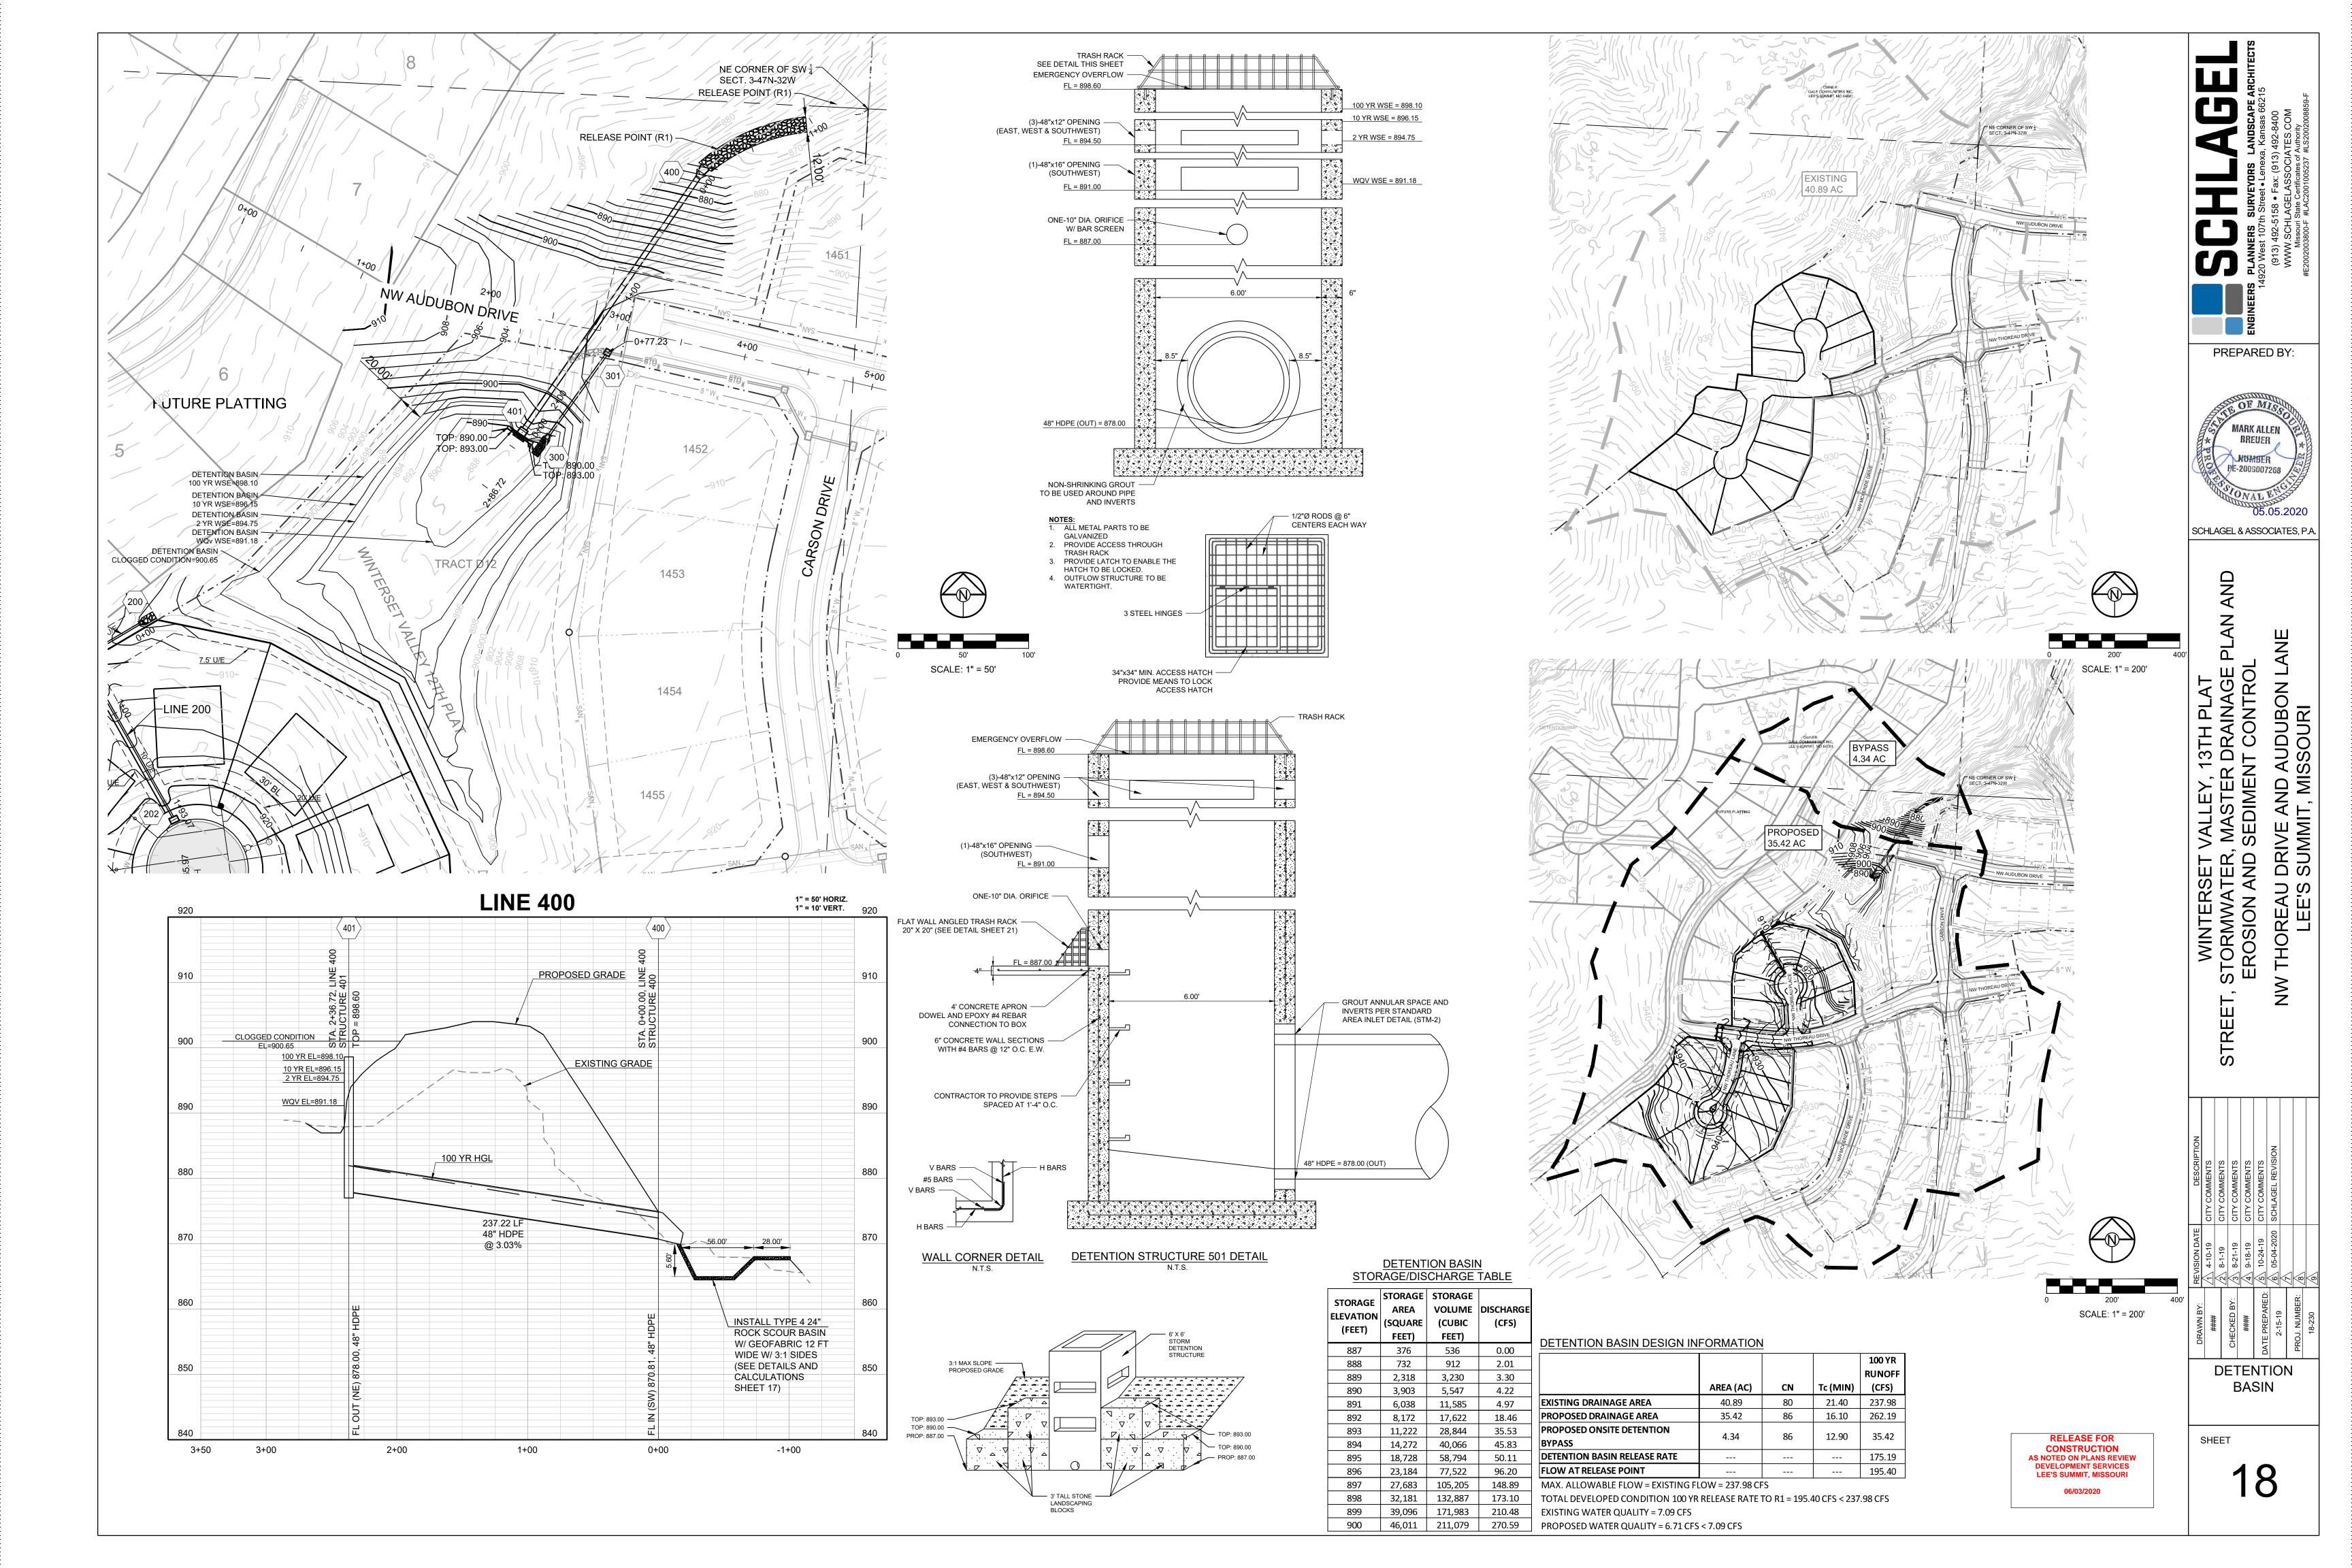

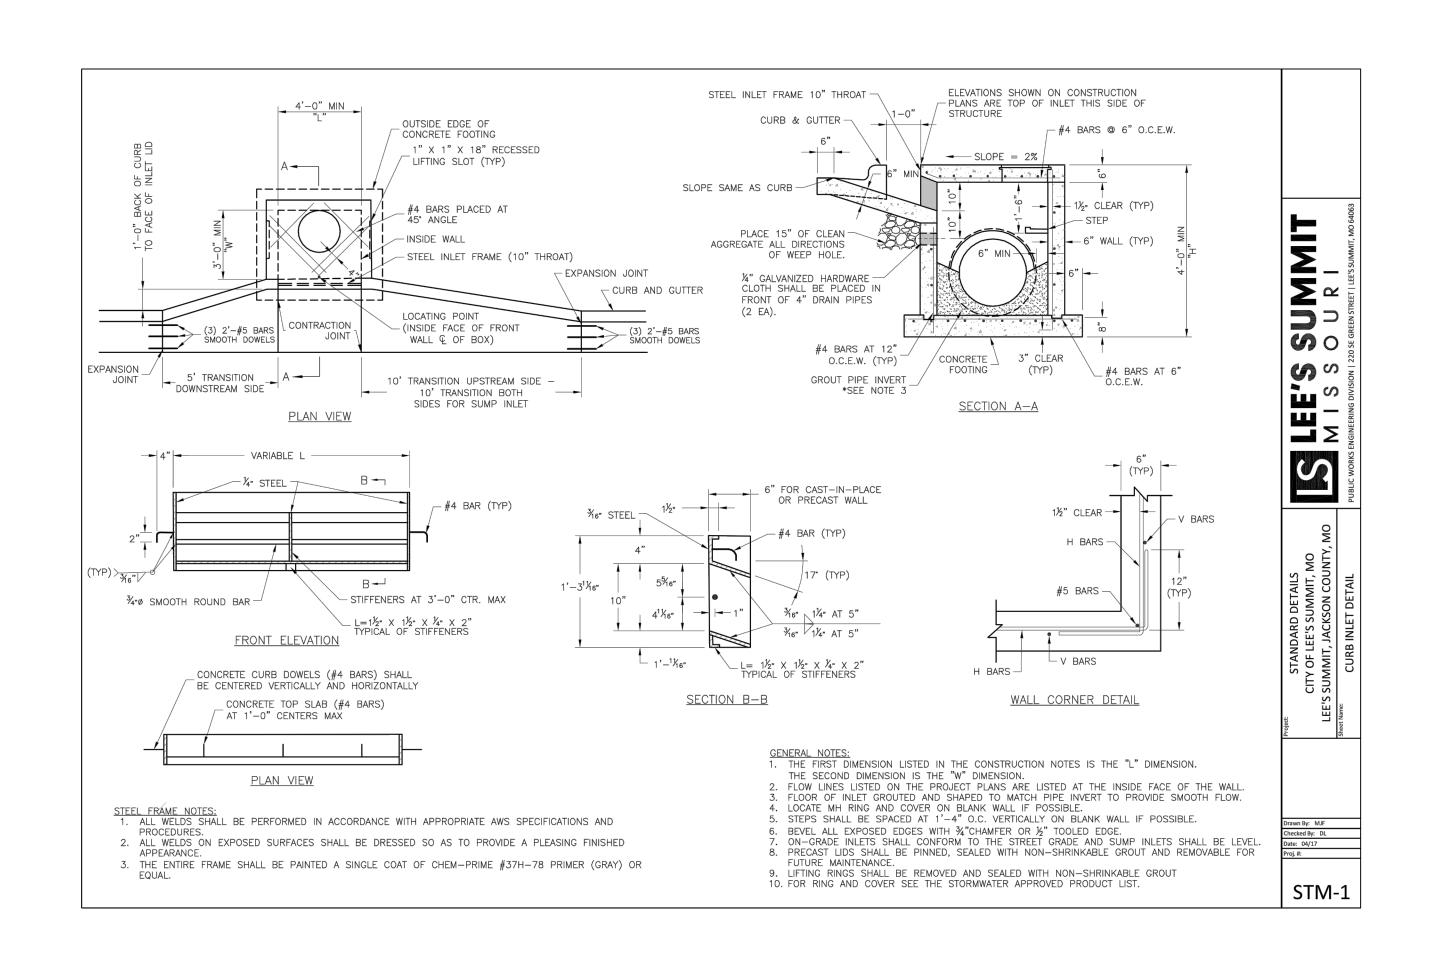

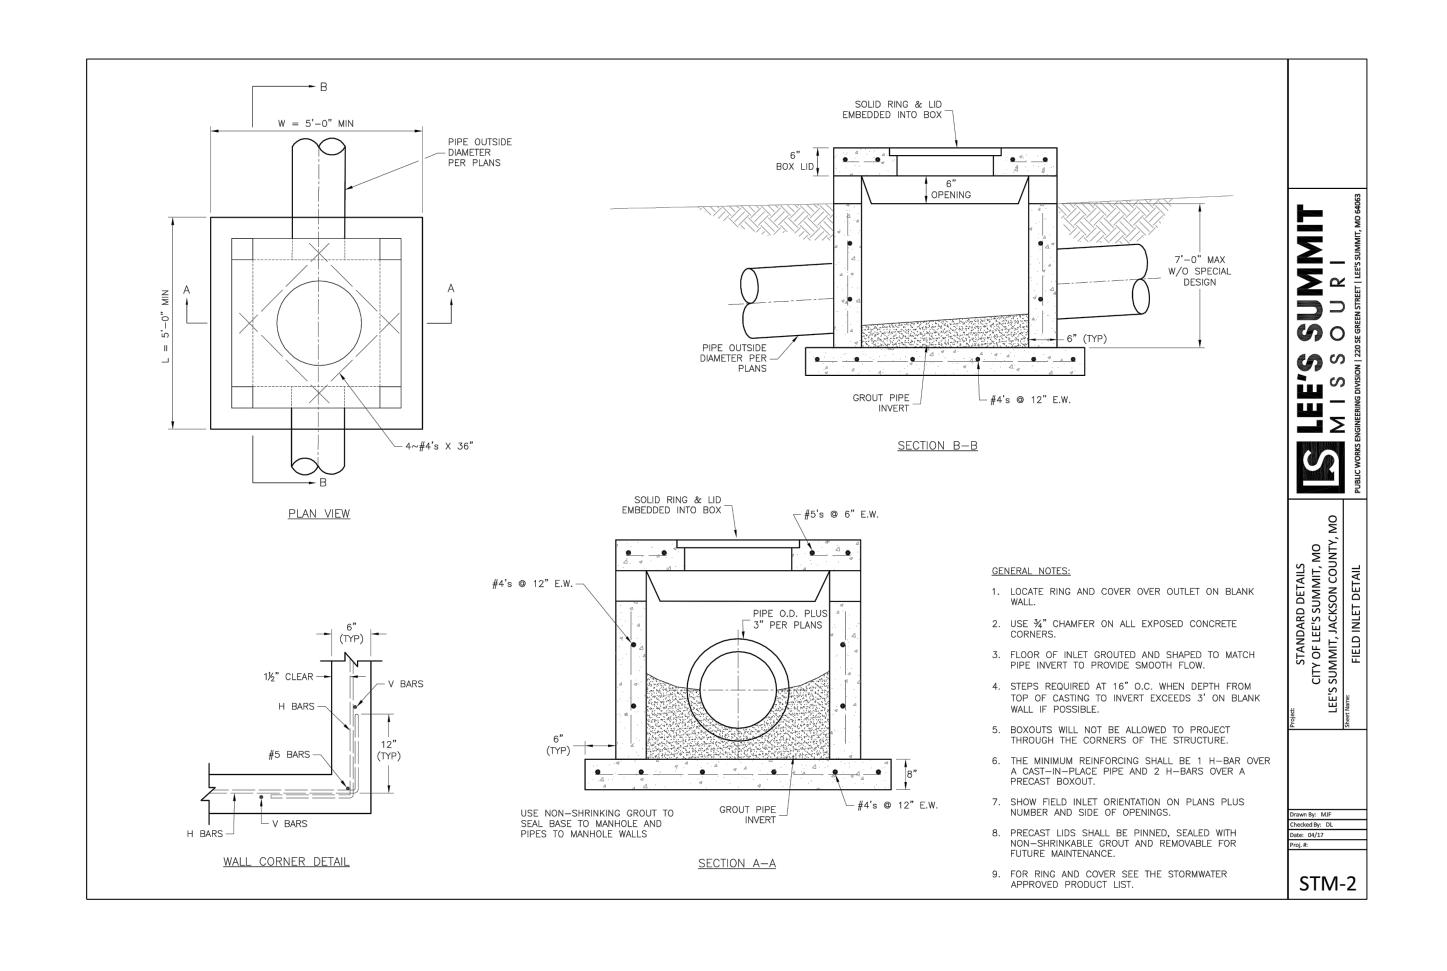

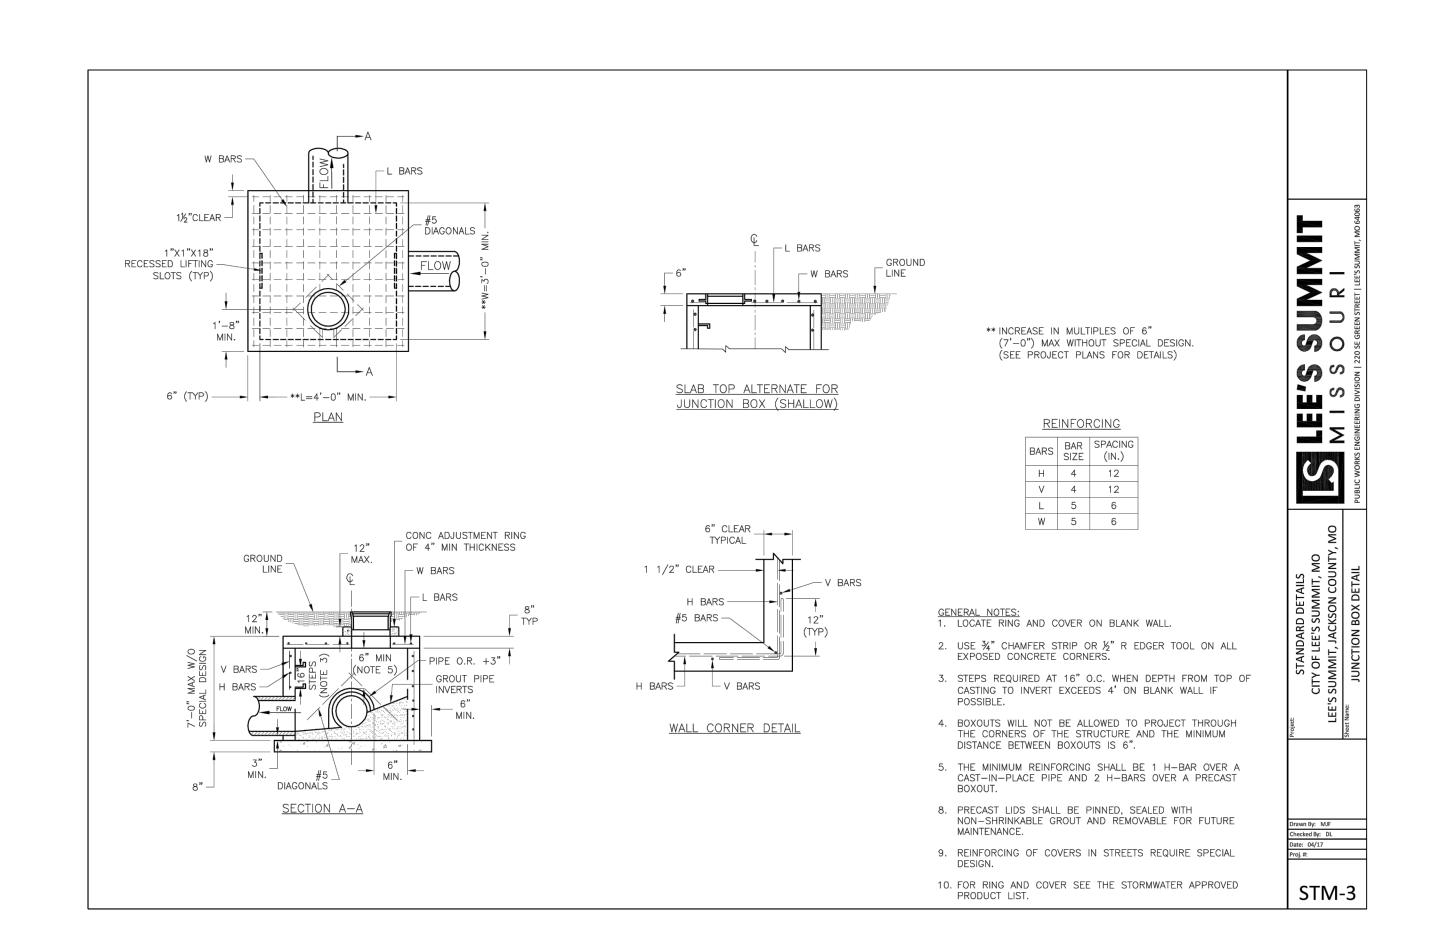

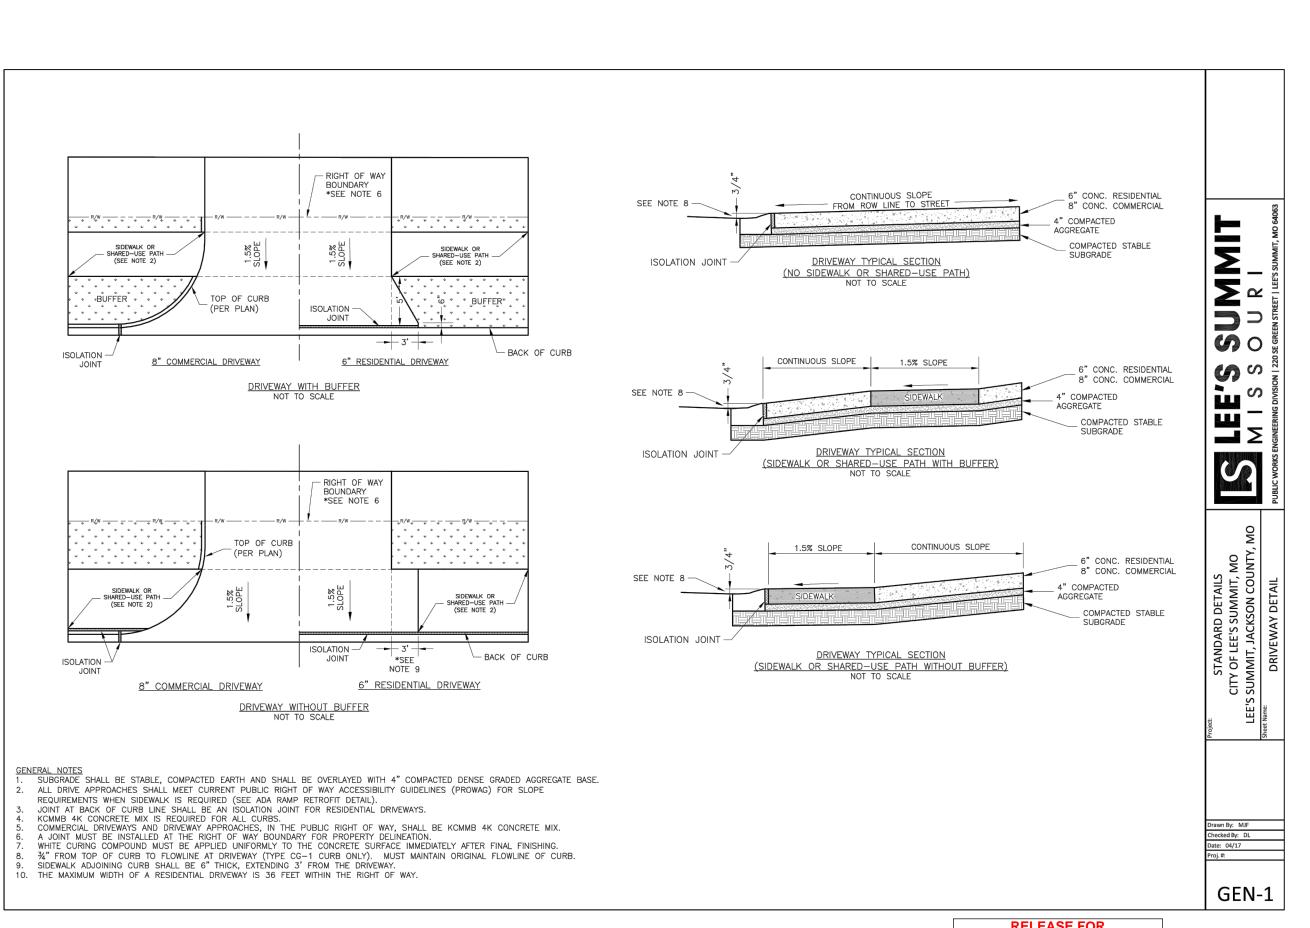

RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 06/03/2020

TH PLAT RAINAGE CONTRO AUDUBON I ISSOURI 13TH PLA R DRAINA(NT CONTF DRIVE AN SUMMIT, WINTERSET \STORMWATER, EROSION AND \$\frac{1}{2}

PREPARED BY:

OF MIS

MARK ALLEN


BREUER


05.05.2020


MUMBER PE-2009007268


SCHLAGEL & ASSOCIATES, P.A.


STREET AND STORM DETAILS

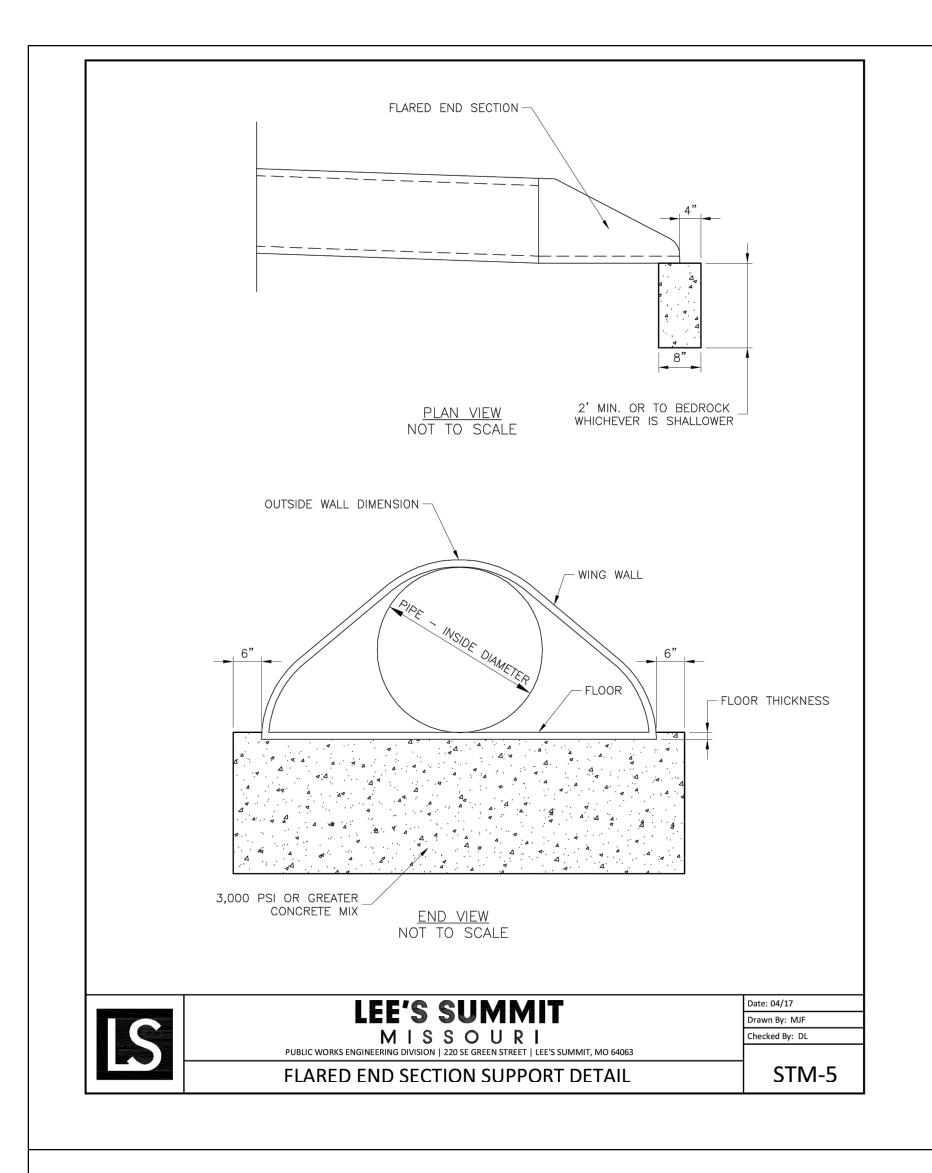


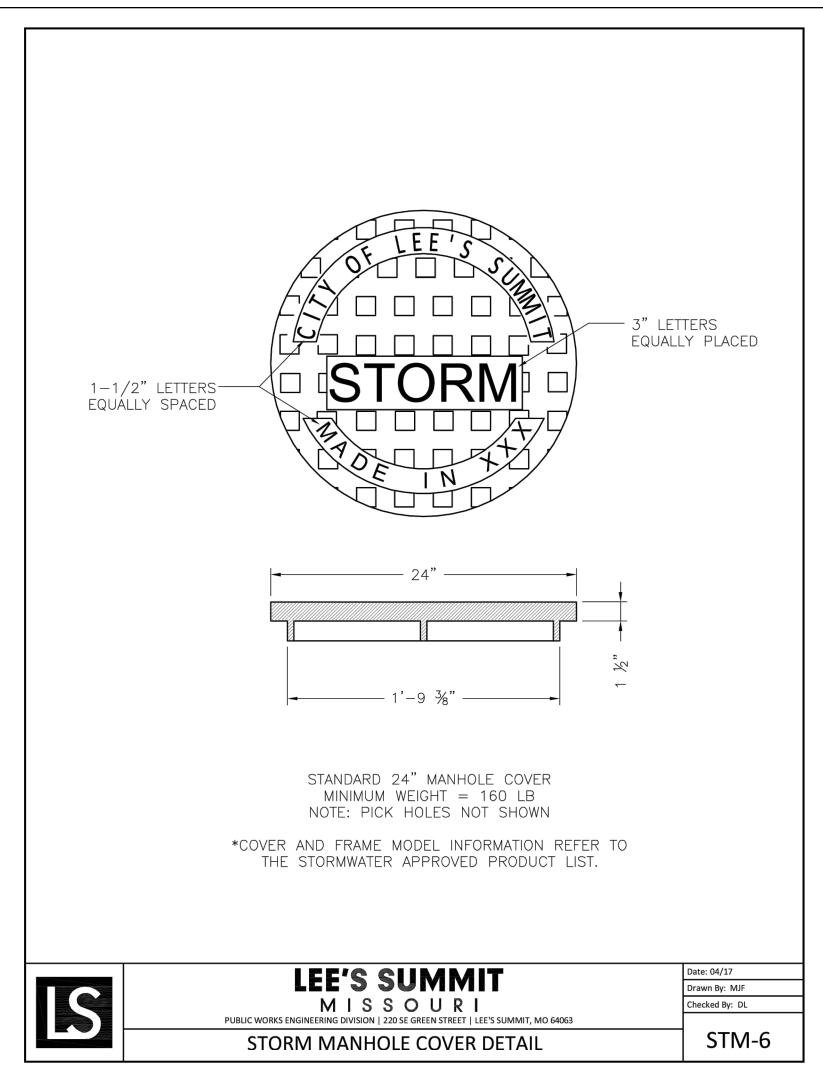

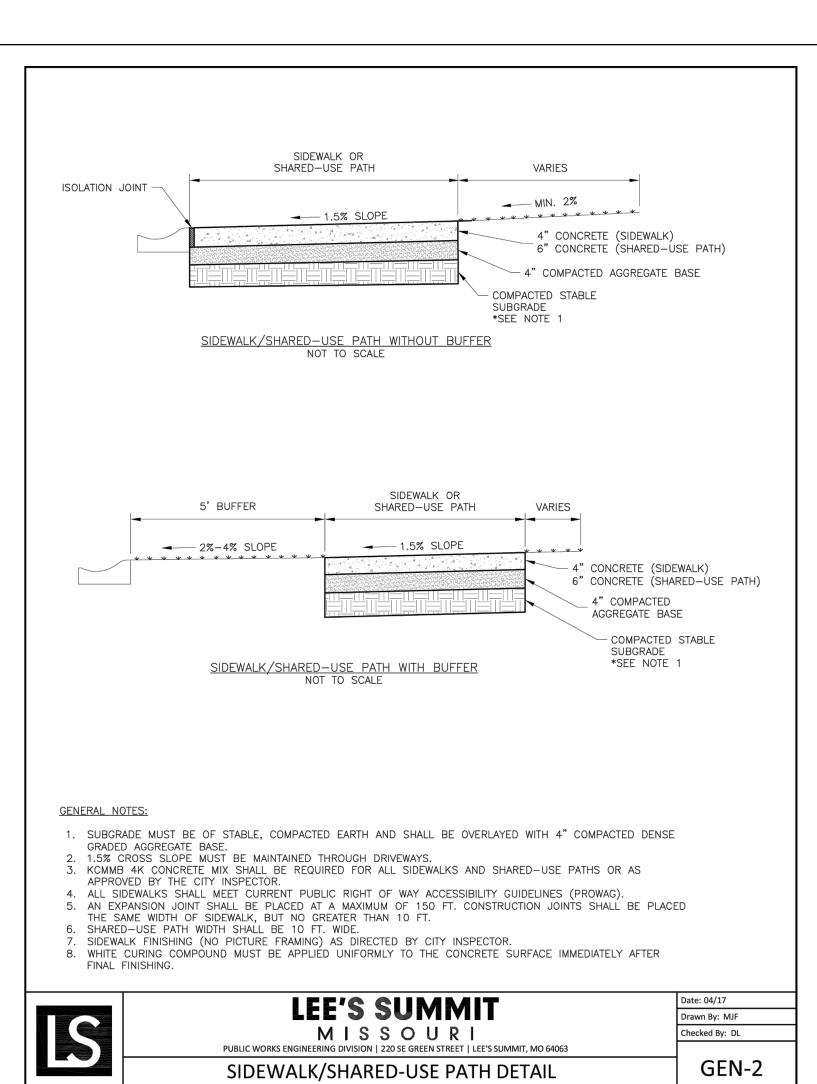

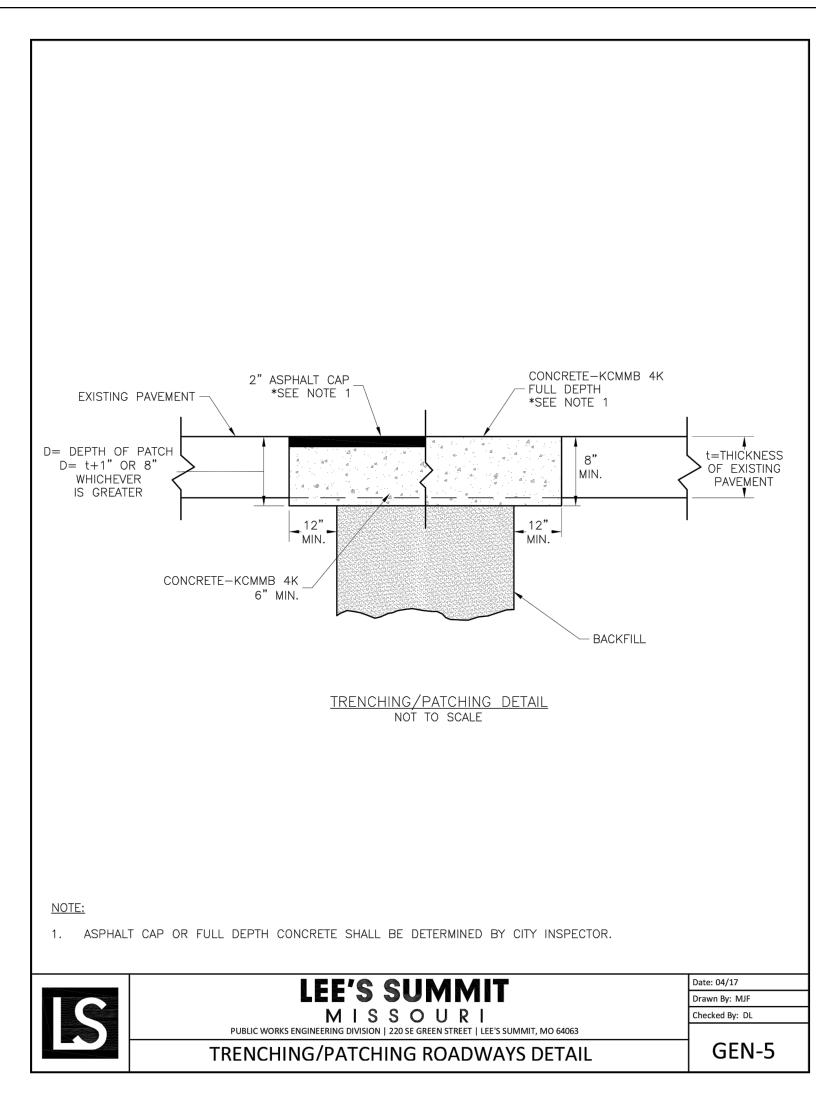

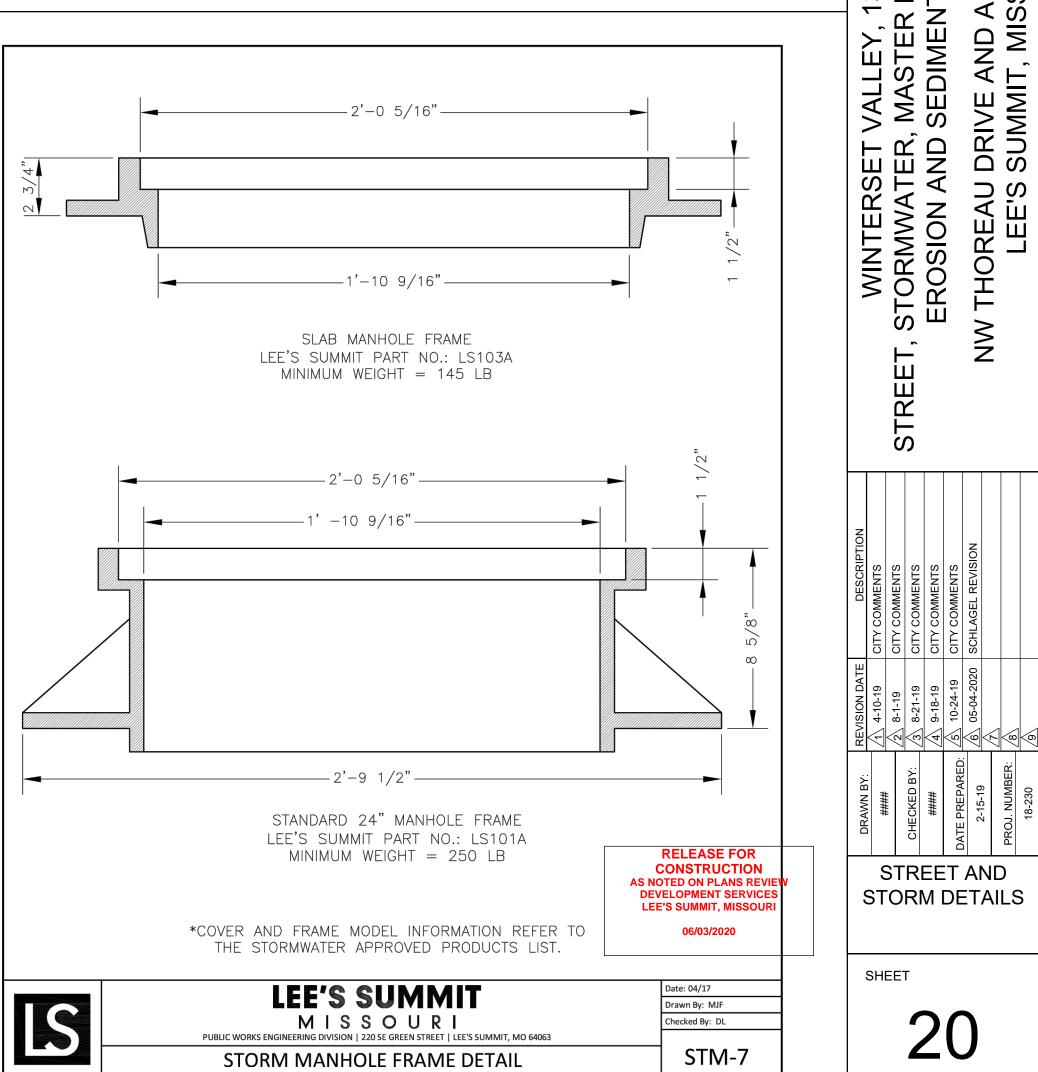

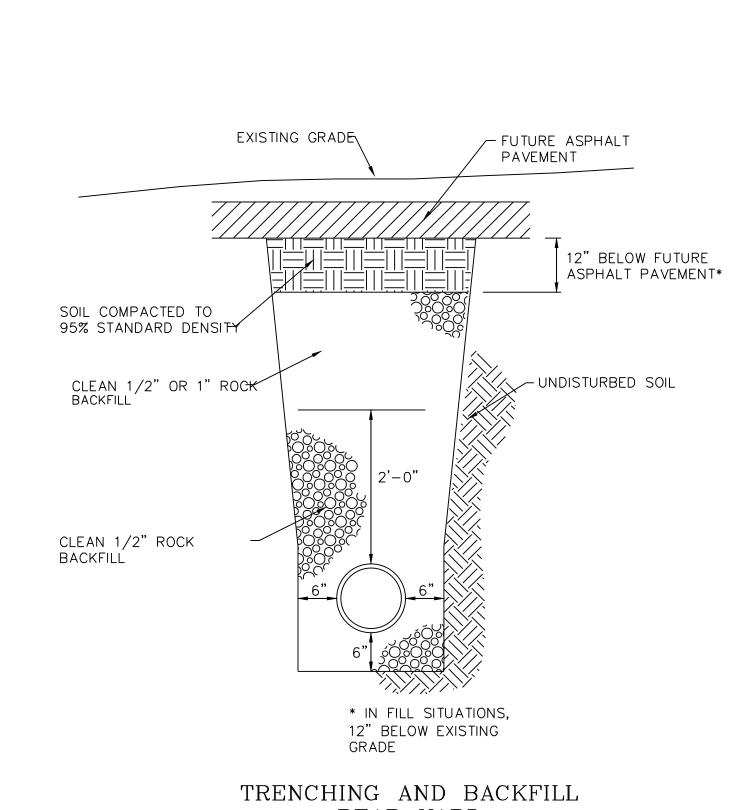



REAR YARD





STREET AND

STORM DETAILS

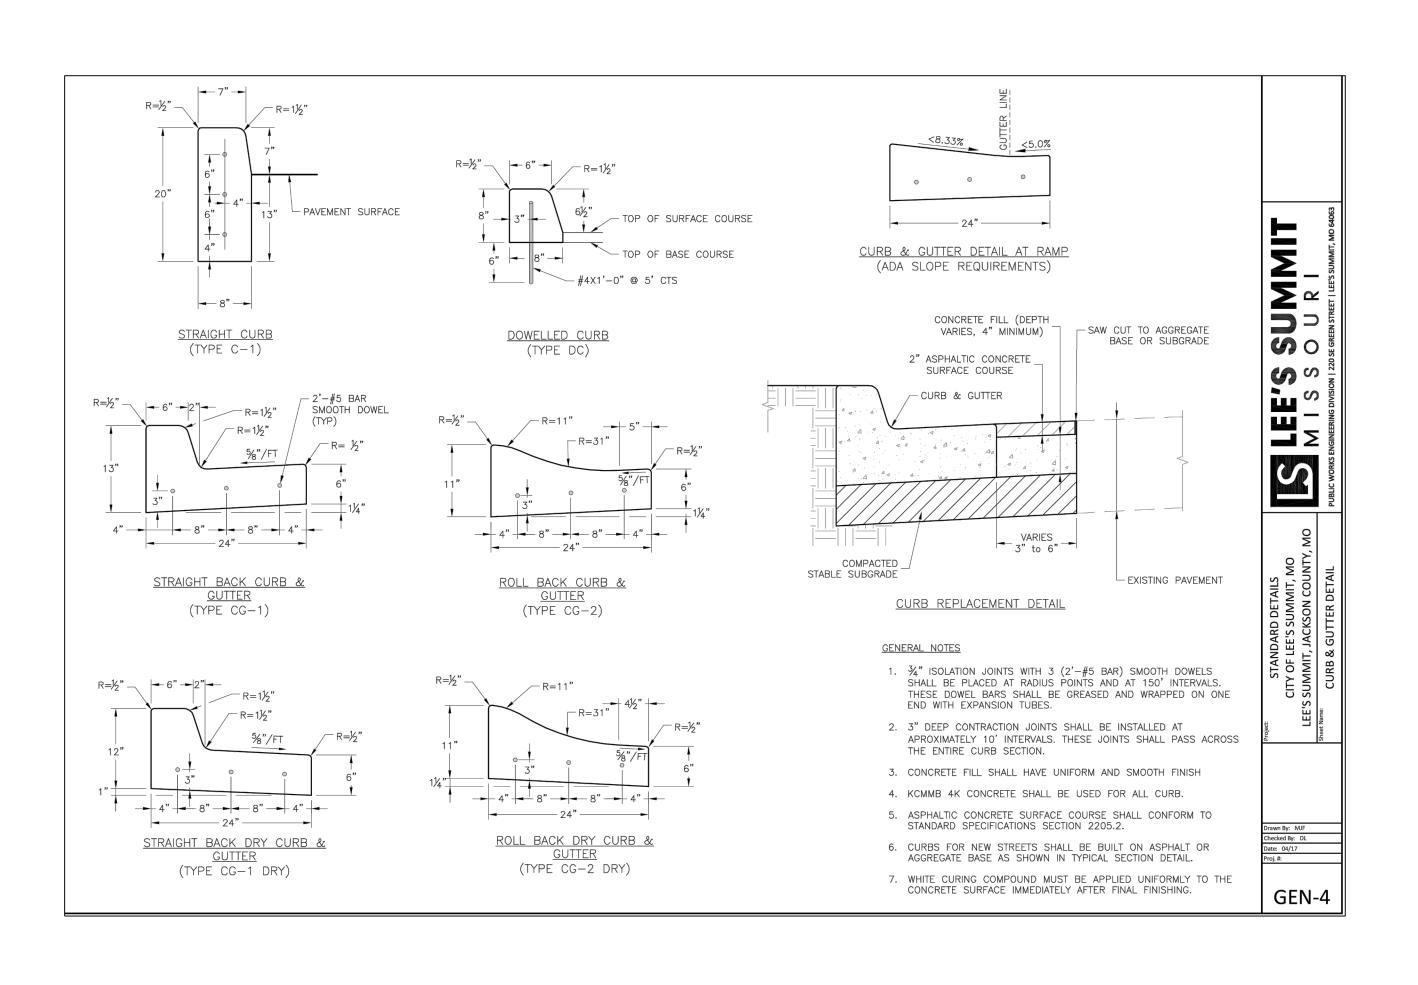

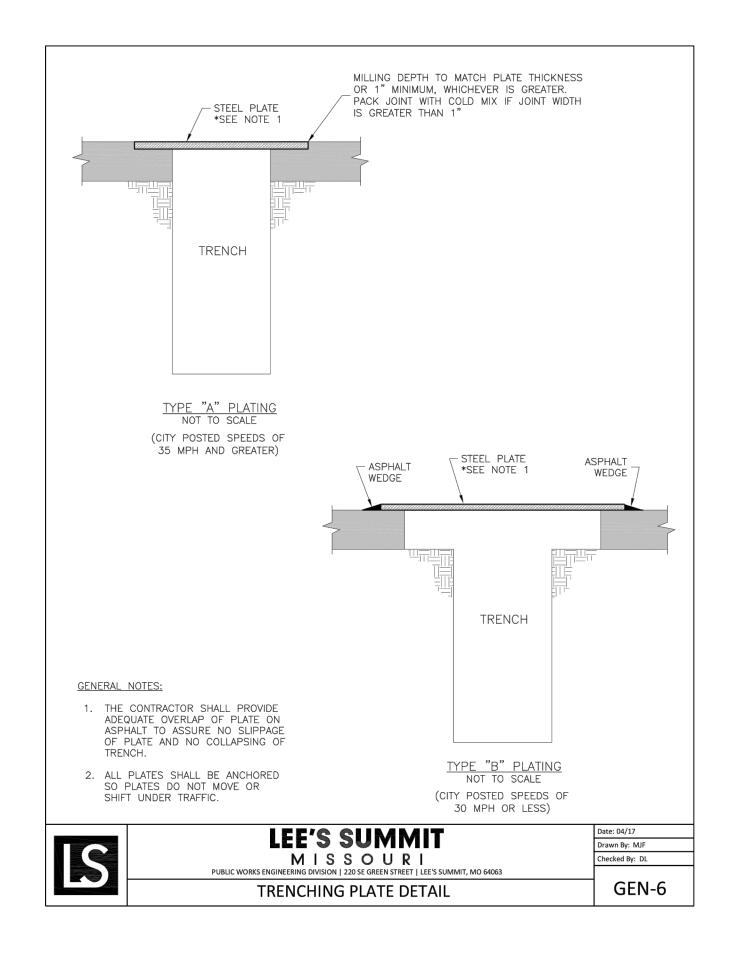

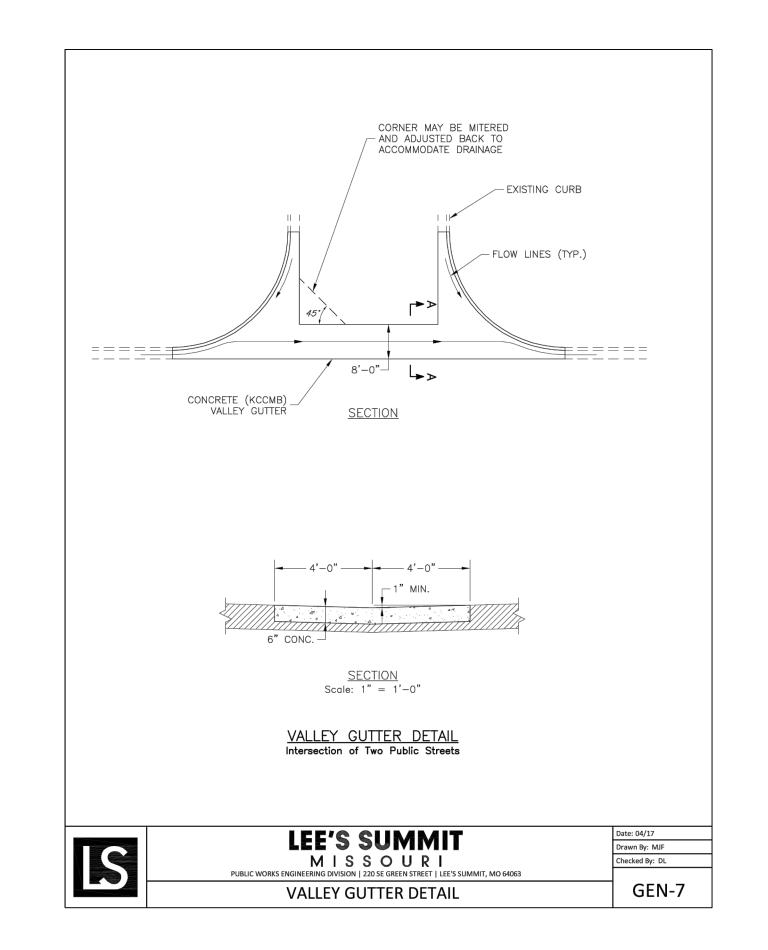

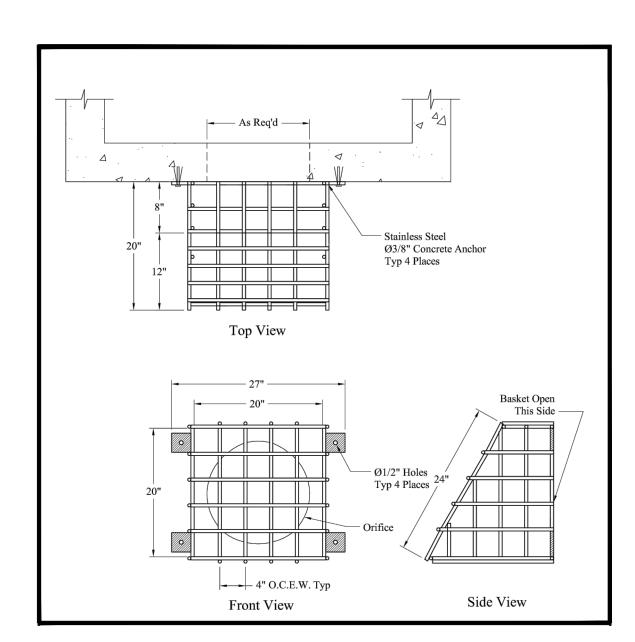

FLAT WALL TRASH RACK ANGLED 20" X 20"

RELEASE FOR
CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
06/03/2020

ENGINEERS PLANNERS SURVEYORS LANDSCAPE ARCHITE

BATTAL A 14920 West 107th Street • Lenexa, Kansas 66215

CONTRIBUTE (913) 492-5158 • Fax: (913) 492-8400

WWW.SCHLAGELASSOCIATES.COM

Missouri State Certificates of Authority

#E2002003800-F #LAC2001005237 #LS2002008859-F



LAGEL & ASSOCIATE

STREET, STORMWATER, MASTER DRAINAGE PLAN
EROSION AND SEDIMENT CONTROL
NW THOREAU DRIVE AND AUDUBON LANE
LEE'S SUMMIT, MISSOURI

STREET AND STORM DETAILS

SHEET

TABLE LS-2: MINIMUM ASPHALT PAVEMENT THICKNESSES


Street Classification	Pavement Option	AC Surface (in.)	AC Base (in.)	MoDOT Type 5 Base (in.)	Geogrid(1)	Chemical Subgrade Stabilization(2) (in.)
Residential Local/Access	A	2	4	6		6
	В	2	4	10	Geogrid	
Residential Collector	A	2	5.5	6		9
	В	2	5.5	12	Geogrid	
Commercial Industrial	A	2	7.5	6		9
Local/Collector	В	2	7.5	12	Geogrid	

TABLE LS-3: MINIMUM PCC PAVEMENT THICKNESSES

Street Classification	PCC (in.)	Aggregate Base (in.)	Subgrade Stabilization ⁽¹⁾ (in.)
Residential Local/Access	6	4	
Residential Collector	6	4	6
Commercial Industrial Local/Collector	8	4	9

(1) Subgrade Stabilization and 4" aggregate base may be replaced by approved geogrid and 6" of aggregate base

LS5200

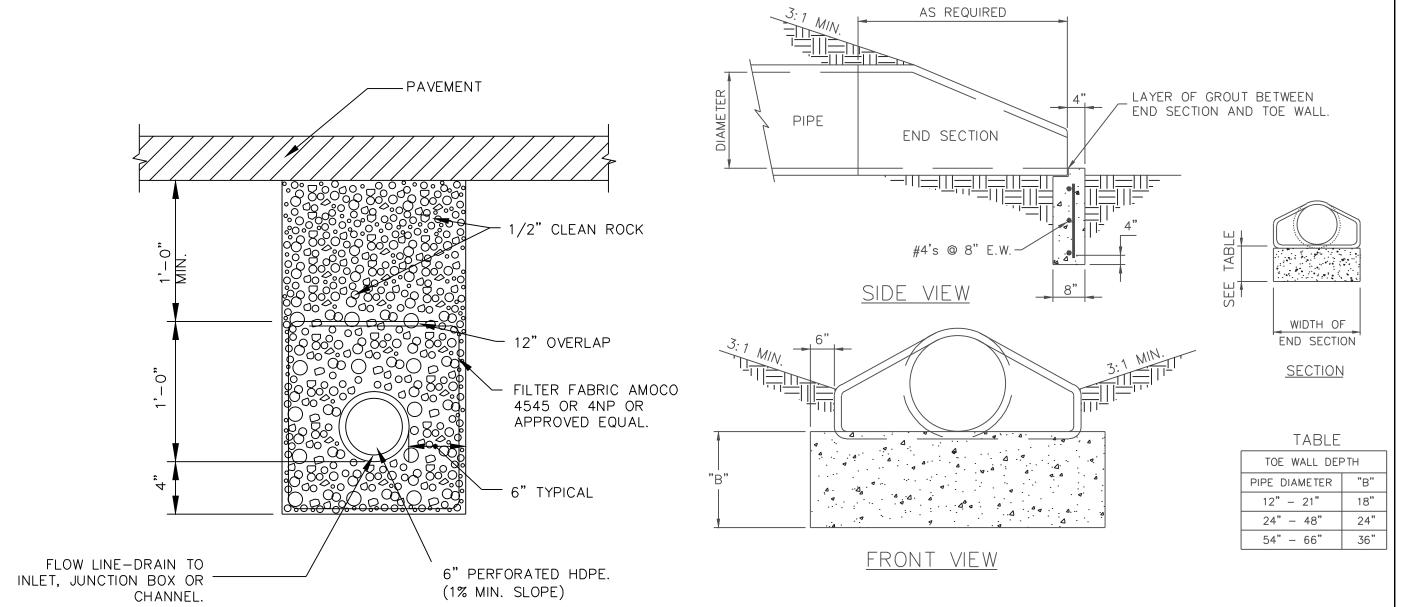


NOTES:

STREET

UNDERDRAIN DETAIL

- THE DEPTH OF THE TOE WALL SHALL BE PER TABLE. IF BEDROCK IS ENCOUNTERED A MINIMUM OF 12" INTO BEDROCK IS REQUIRED.
- 2. ALL CONCRETE SHALL CONFORM TO STANDARD SPECIFICATION SECTION 2205.2.

END SECTION AND TOEWALL DETAIL

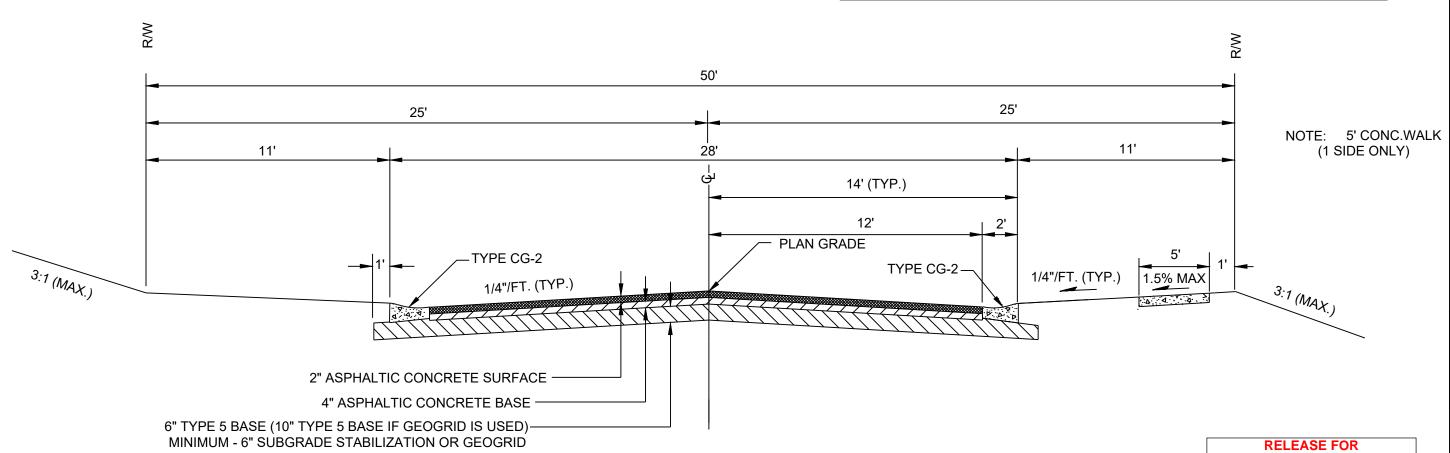

RESIDENTIAL LOCAL/ACCESS


NW THOREAU DR STA. 1+35.24 TO STA. 4+25.27

THOREAU LN STA. 0+00 TO STA. 2+56

THOREAU PL STA. 0+00 TO STA. 1+65.97

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI 06/03/2020


PREPARED BY:



SCHLAGEL & ASSOCIATES, P.A.

DRIVE AN SUMMIT, WINTERSET \
STORMWATER,
EROSION AND

STREET AND STORM DETAILS

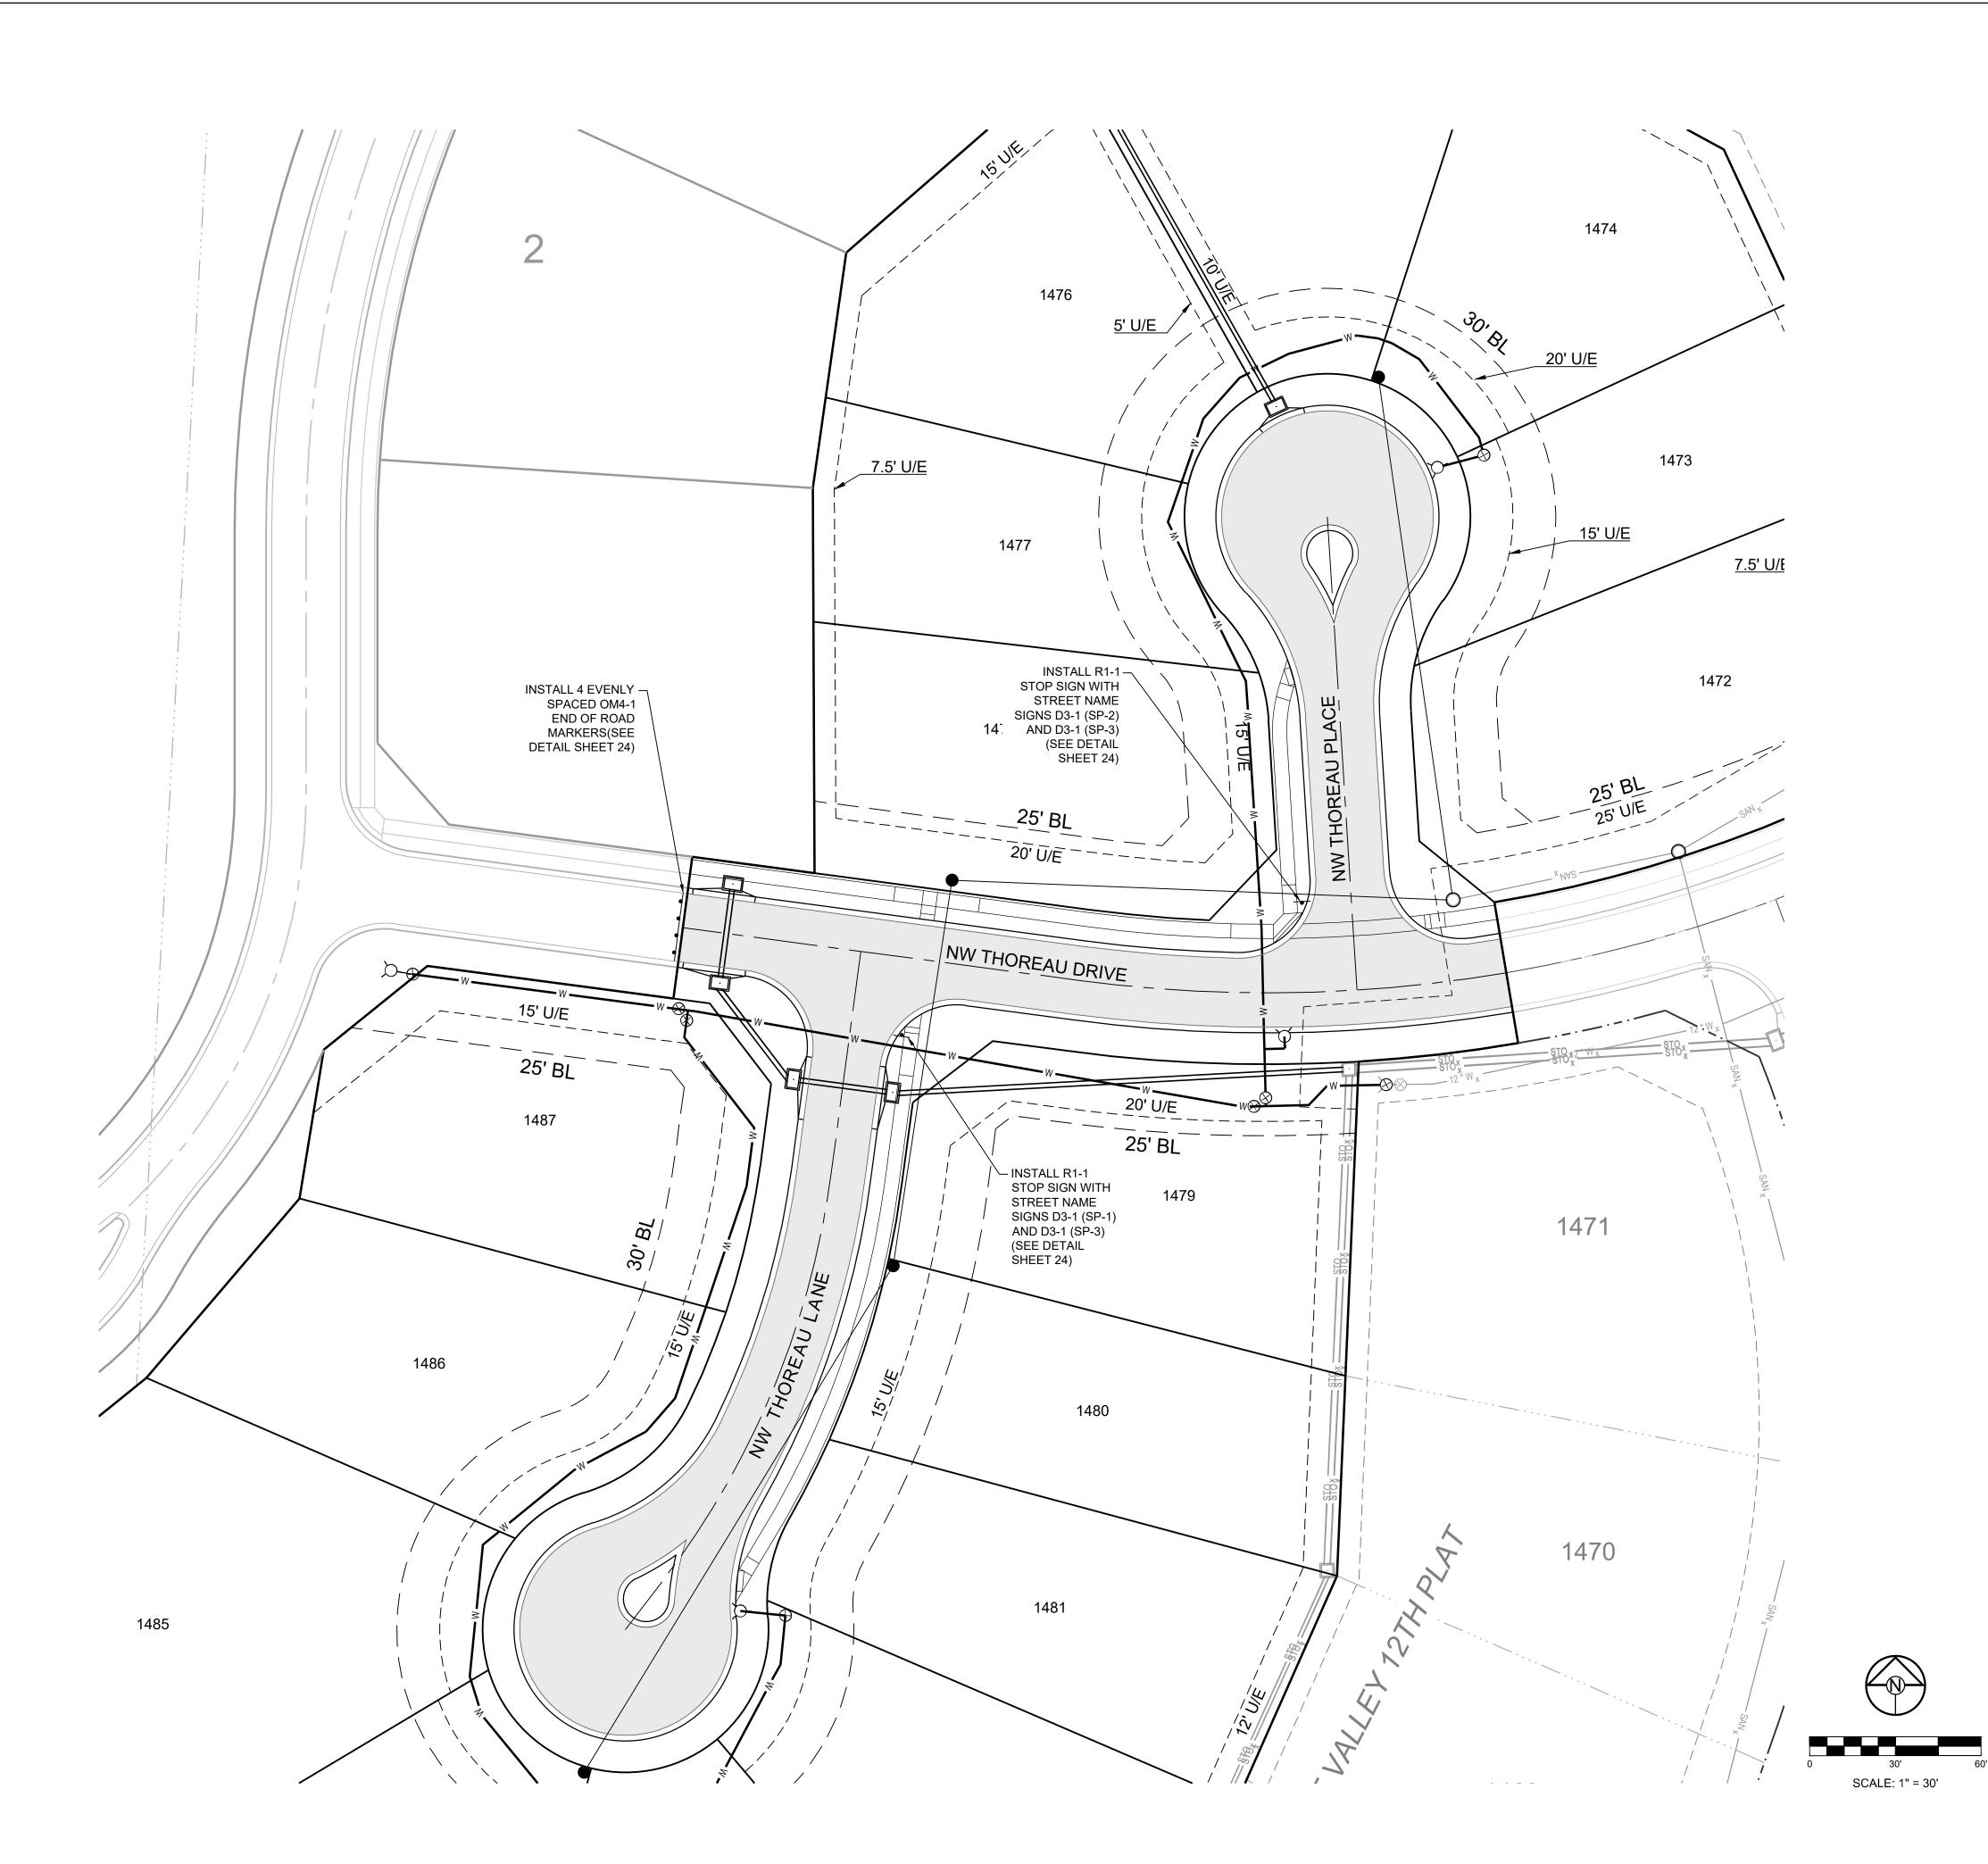

MISSOURI GEOGRAPHIC REFERENCE SYSTEM BENCH MARK:

BM JA-136, LOCATED AT INTERSECTION OF SW OLDHAM PARKWAY AND SW WARD ROAD, 61 FT SOUTH OF CL OF OLDHAM PARKWAY AND 28.9 FT EAST OF THE EAST EDGE OF WARD ROAD.

ELEV. 993.11'


PROJECT BENCH MARK:

SANITARY MANHOLE H2 AT NW CORNER OF LOT 1153 WINTERSET VALLEY 1ST PLAT, APPROX. 39' RT. OF CL OF NW PEALE BLVD.

ELEV.935.45'

ENGINEERS PLANNERS SURVEYORS LANDSCAPE ARCHITECT 14920 West 107th Street • Lenexa, Kansas 66215 (913) 492-5158 • Fax: (913) 492-8400 WWW.SCHLAGELASSOCIATES.COM Missouri State Certificates of Authority #E2002003800-F #LAC2001005237 #LS2002008859-F

PREPARED BY:



SCHLAGEL & ASSOCIATES, P.A.

WINTERSET VALLEY, 13TH PLAT

T, STORMWATER, MASTER DRAINAGE PLAN
EROSION AND SEDIMENT CONTROL

NW THOREAU DRIVE AND AUDUBON LANE
LEE'S SUMMIT, MISSOURI

	REVISION DATE	DESCRIPTION
	4-10-19	CITY COMMENTS
	8-1-19	CITY COMMENTS
·.	3 8-21-19	CITY COMMENTS
	4 9-18-19	CITY COMMENTS
FD.	<u>/5</u> / 10-24-19	CITY COMMENTS
	9	, 05-04-2020 SCHLAGEL REVISION
	<₹	
Я:	\ <u>\</u>	

CHEC

BATE PF


2-1

PROJ. I

SIGNING PLAN

SHEET



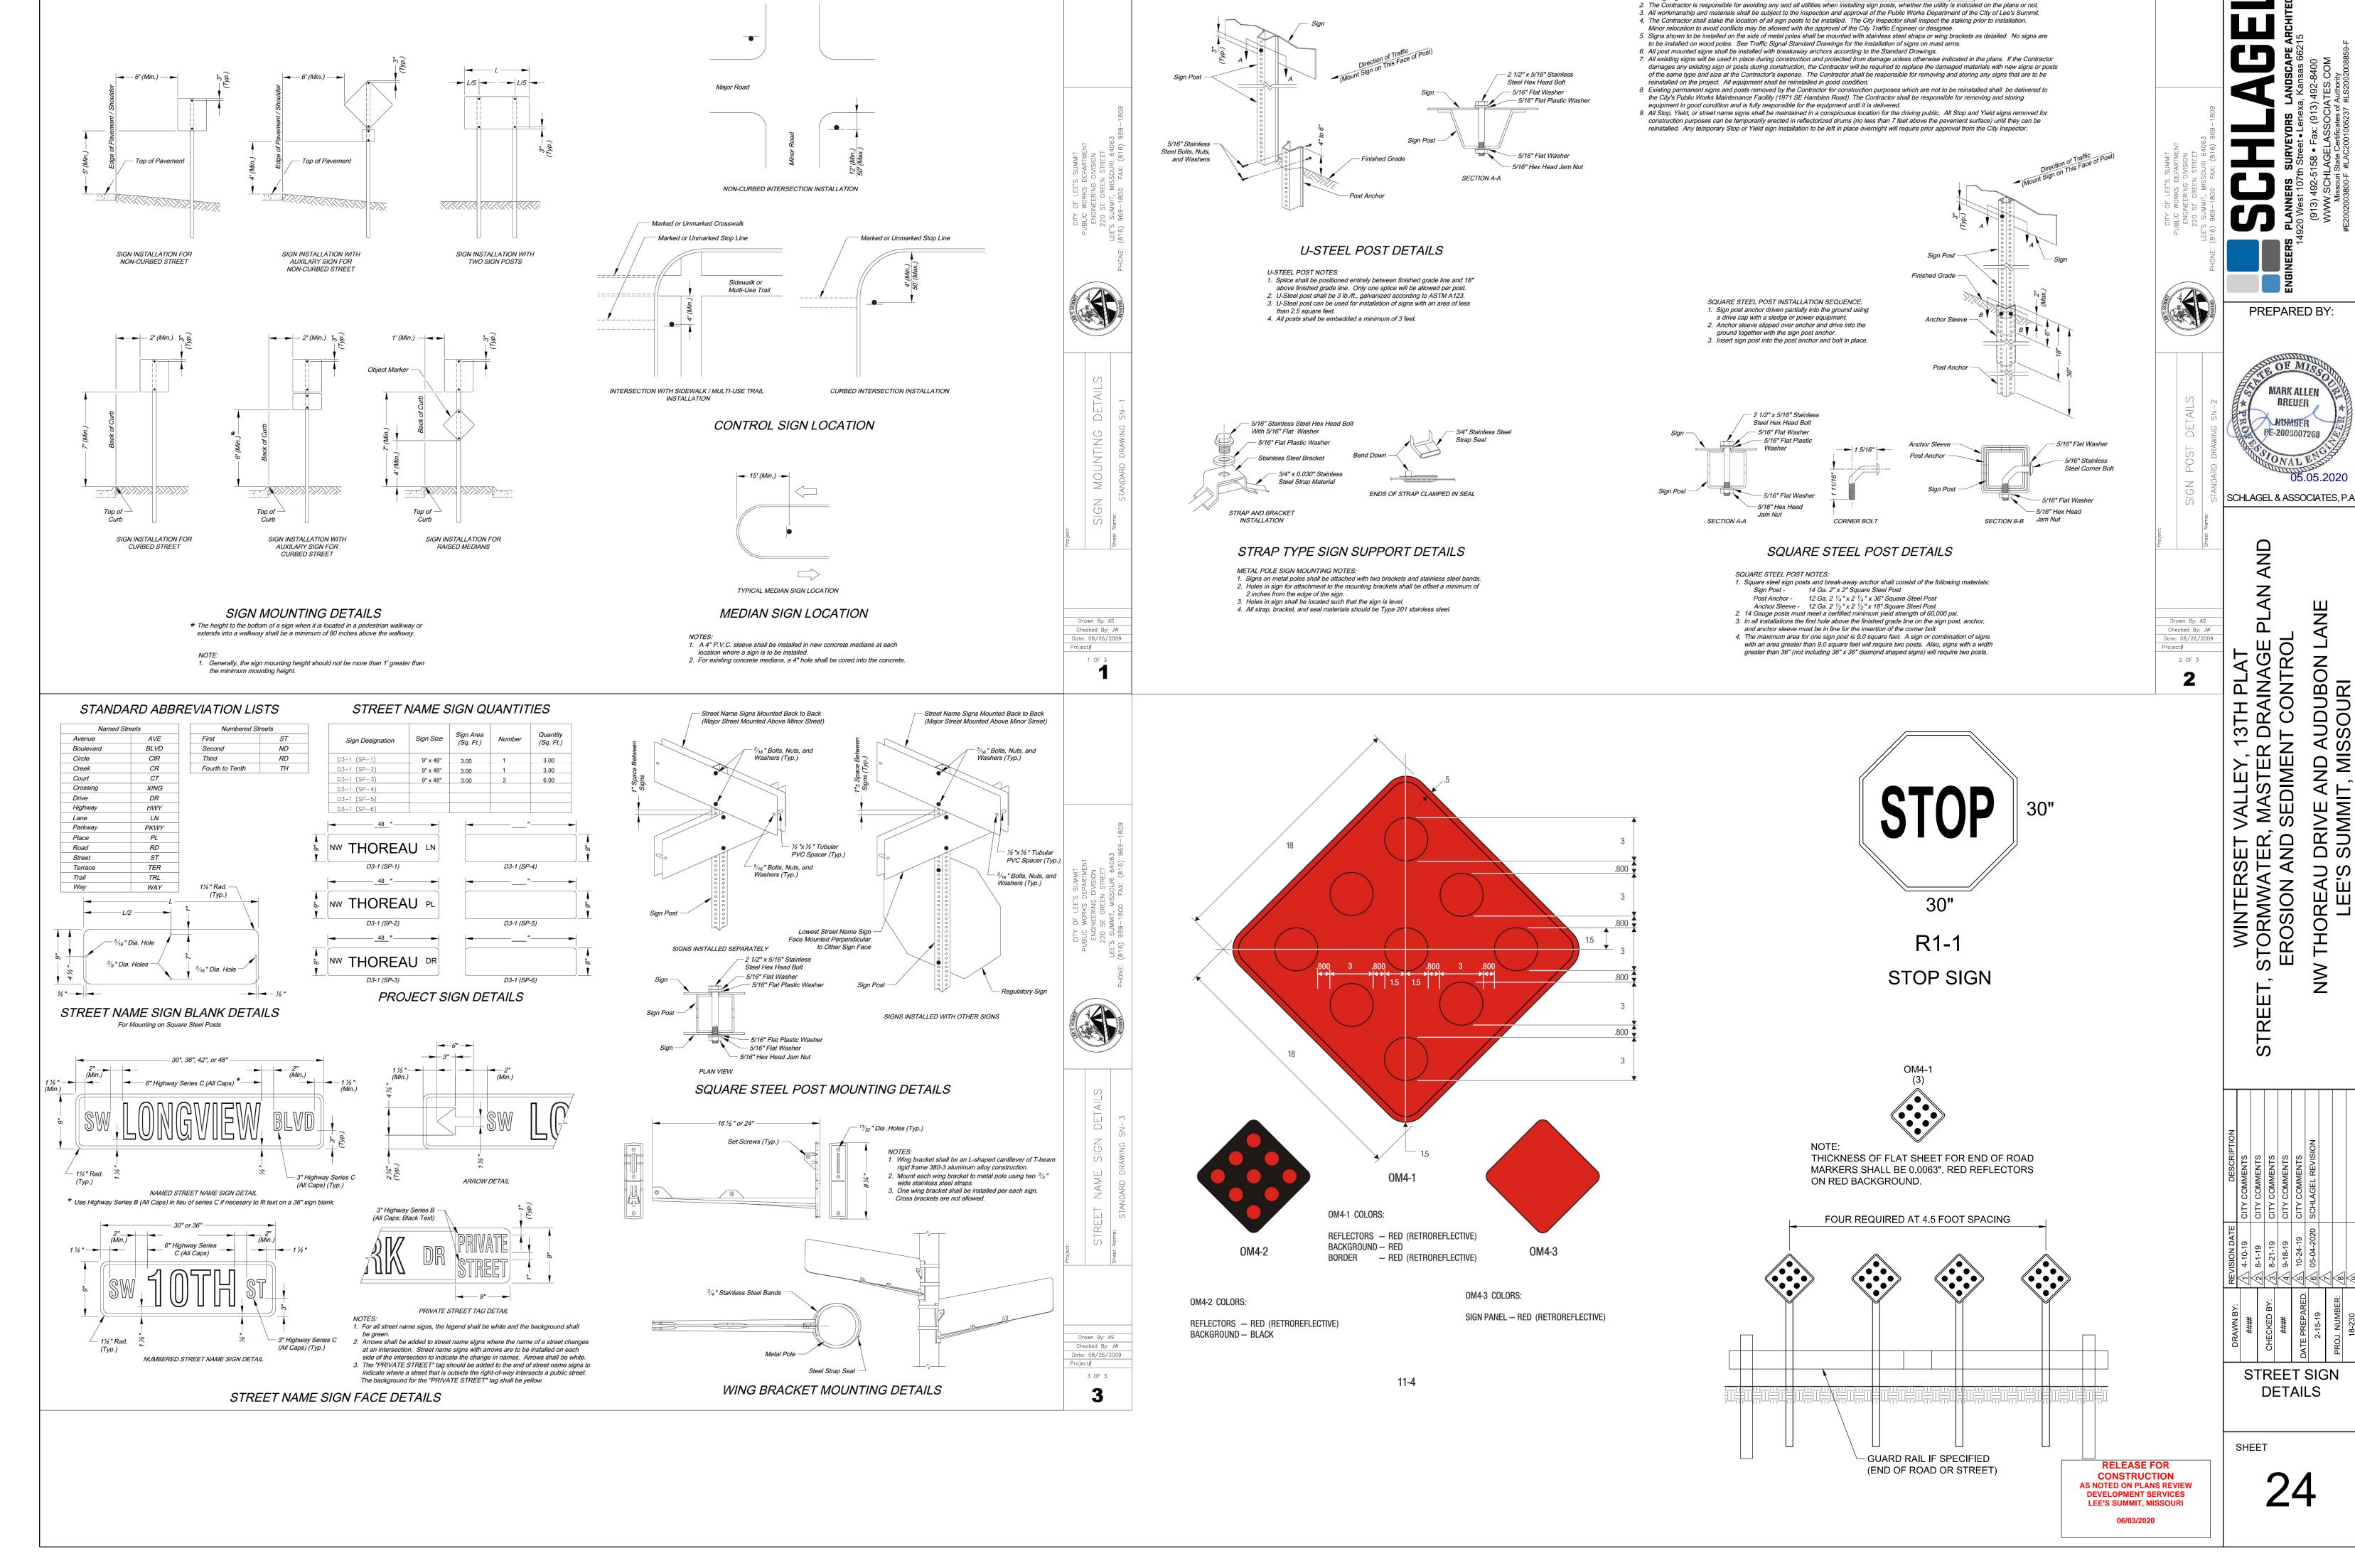

PERMANENT SIGNING GENERAL NOTES:

1. All signing shall be in accordance with the latest edition of the Manual on Uniform Traffic Control Devices (MUTCD).

SCHLAGEL & ASSOCIATES, P.A. AUDUB(SSOURI