


APPROVED

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION PROCESSES AND TECHNIQUES OF CONSTRUCTION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


REVIEWED BY
RESIDENTIAL ENGINEERING SERVICES, LLC

7/7/20

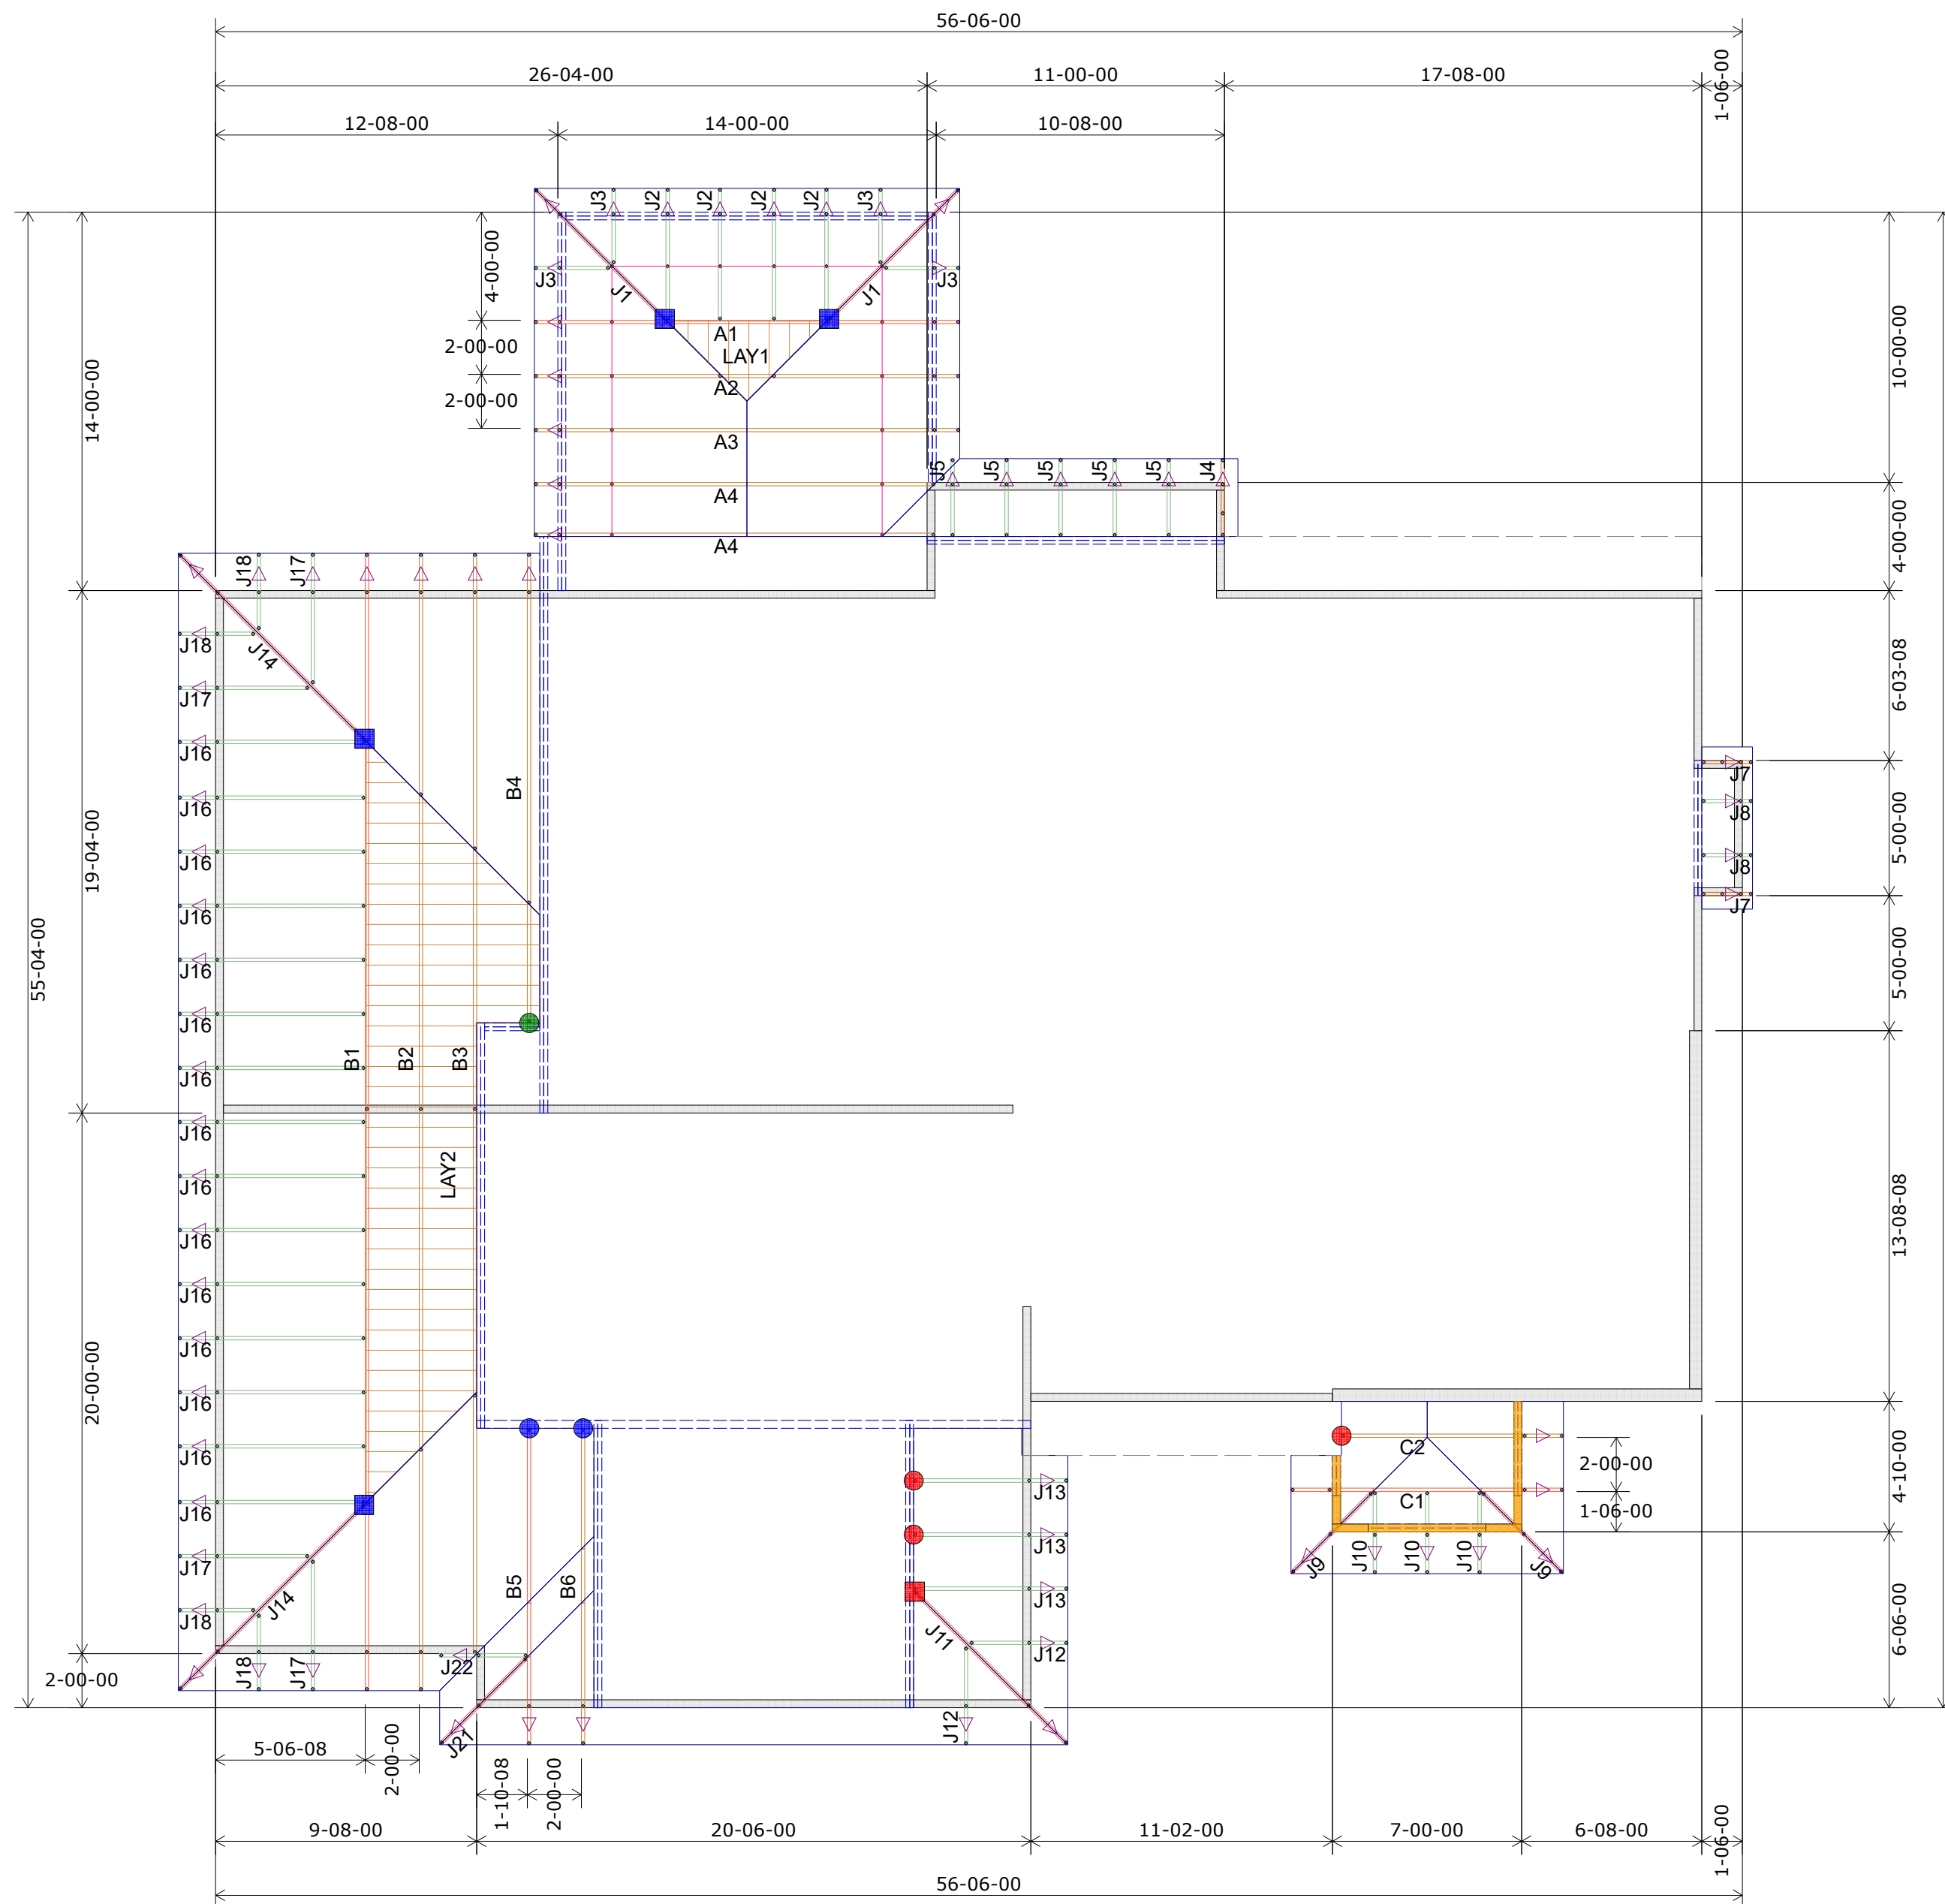

HANGER SCHEDULE	Quantity
LUS24	17
LUS26	7
HUS26	3
HHUS26-2	2
HGUS26-3	1
HGUS28-3	0
LTHJA26	4
TJC37	8
TJC57	0
HTS20	0

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

# of Uplift	Connector
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Wall Heights:
1st Floor = 9-1-2 U.N.O.
2nd Floor = 8-1-2 U.N.O.

Plate Heights
9-01-02
13-07-02

Customer	Job Name	Job Site Address	City, State	Designer
SUMMIT HOMES	Lot 18 Hawthorn Ridge	3012 SW Arboridge Dr.	Lee's Summit, MO	Chance 785-746-4240


THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses during construction. The building designer is responsible for general guidance regarding bearing capacity of walls and columns. The responsibility of the building designer for general guidance regarding bearing capacity of wood trusses is available from the Truss Plate Institute, 583 Doherty Drive, Madison, WI 53179.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Shop Drawing Approval

Approved By: _____ Date: _____

Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871

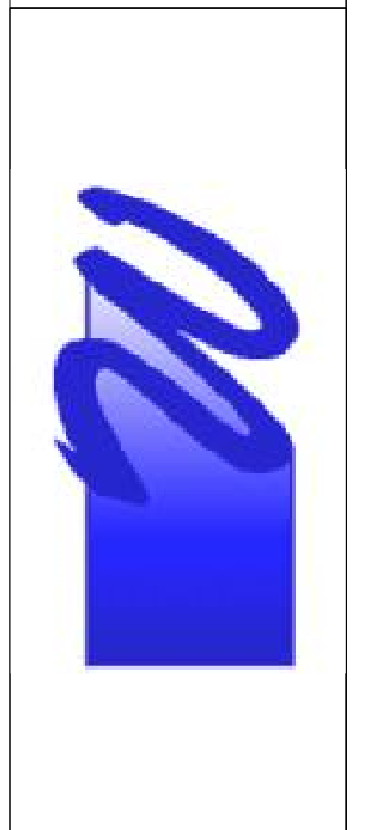

1st Floor Truss Layout
Scale: 3/16" = 1'


RESIDENTIAL ENGINEERING SERVICES, LLC
SHOP DRAWING / SUBMITTAL REVIEW

APPROVED

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION PROCESSES AND TECHNIQUES OF CONSTRUCTION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


REVIEWED BY:
RESIDENTIAL ENGINEERING SERVICES, LLC

Brad A. Huxol
Brad A. Huxol, P.E.

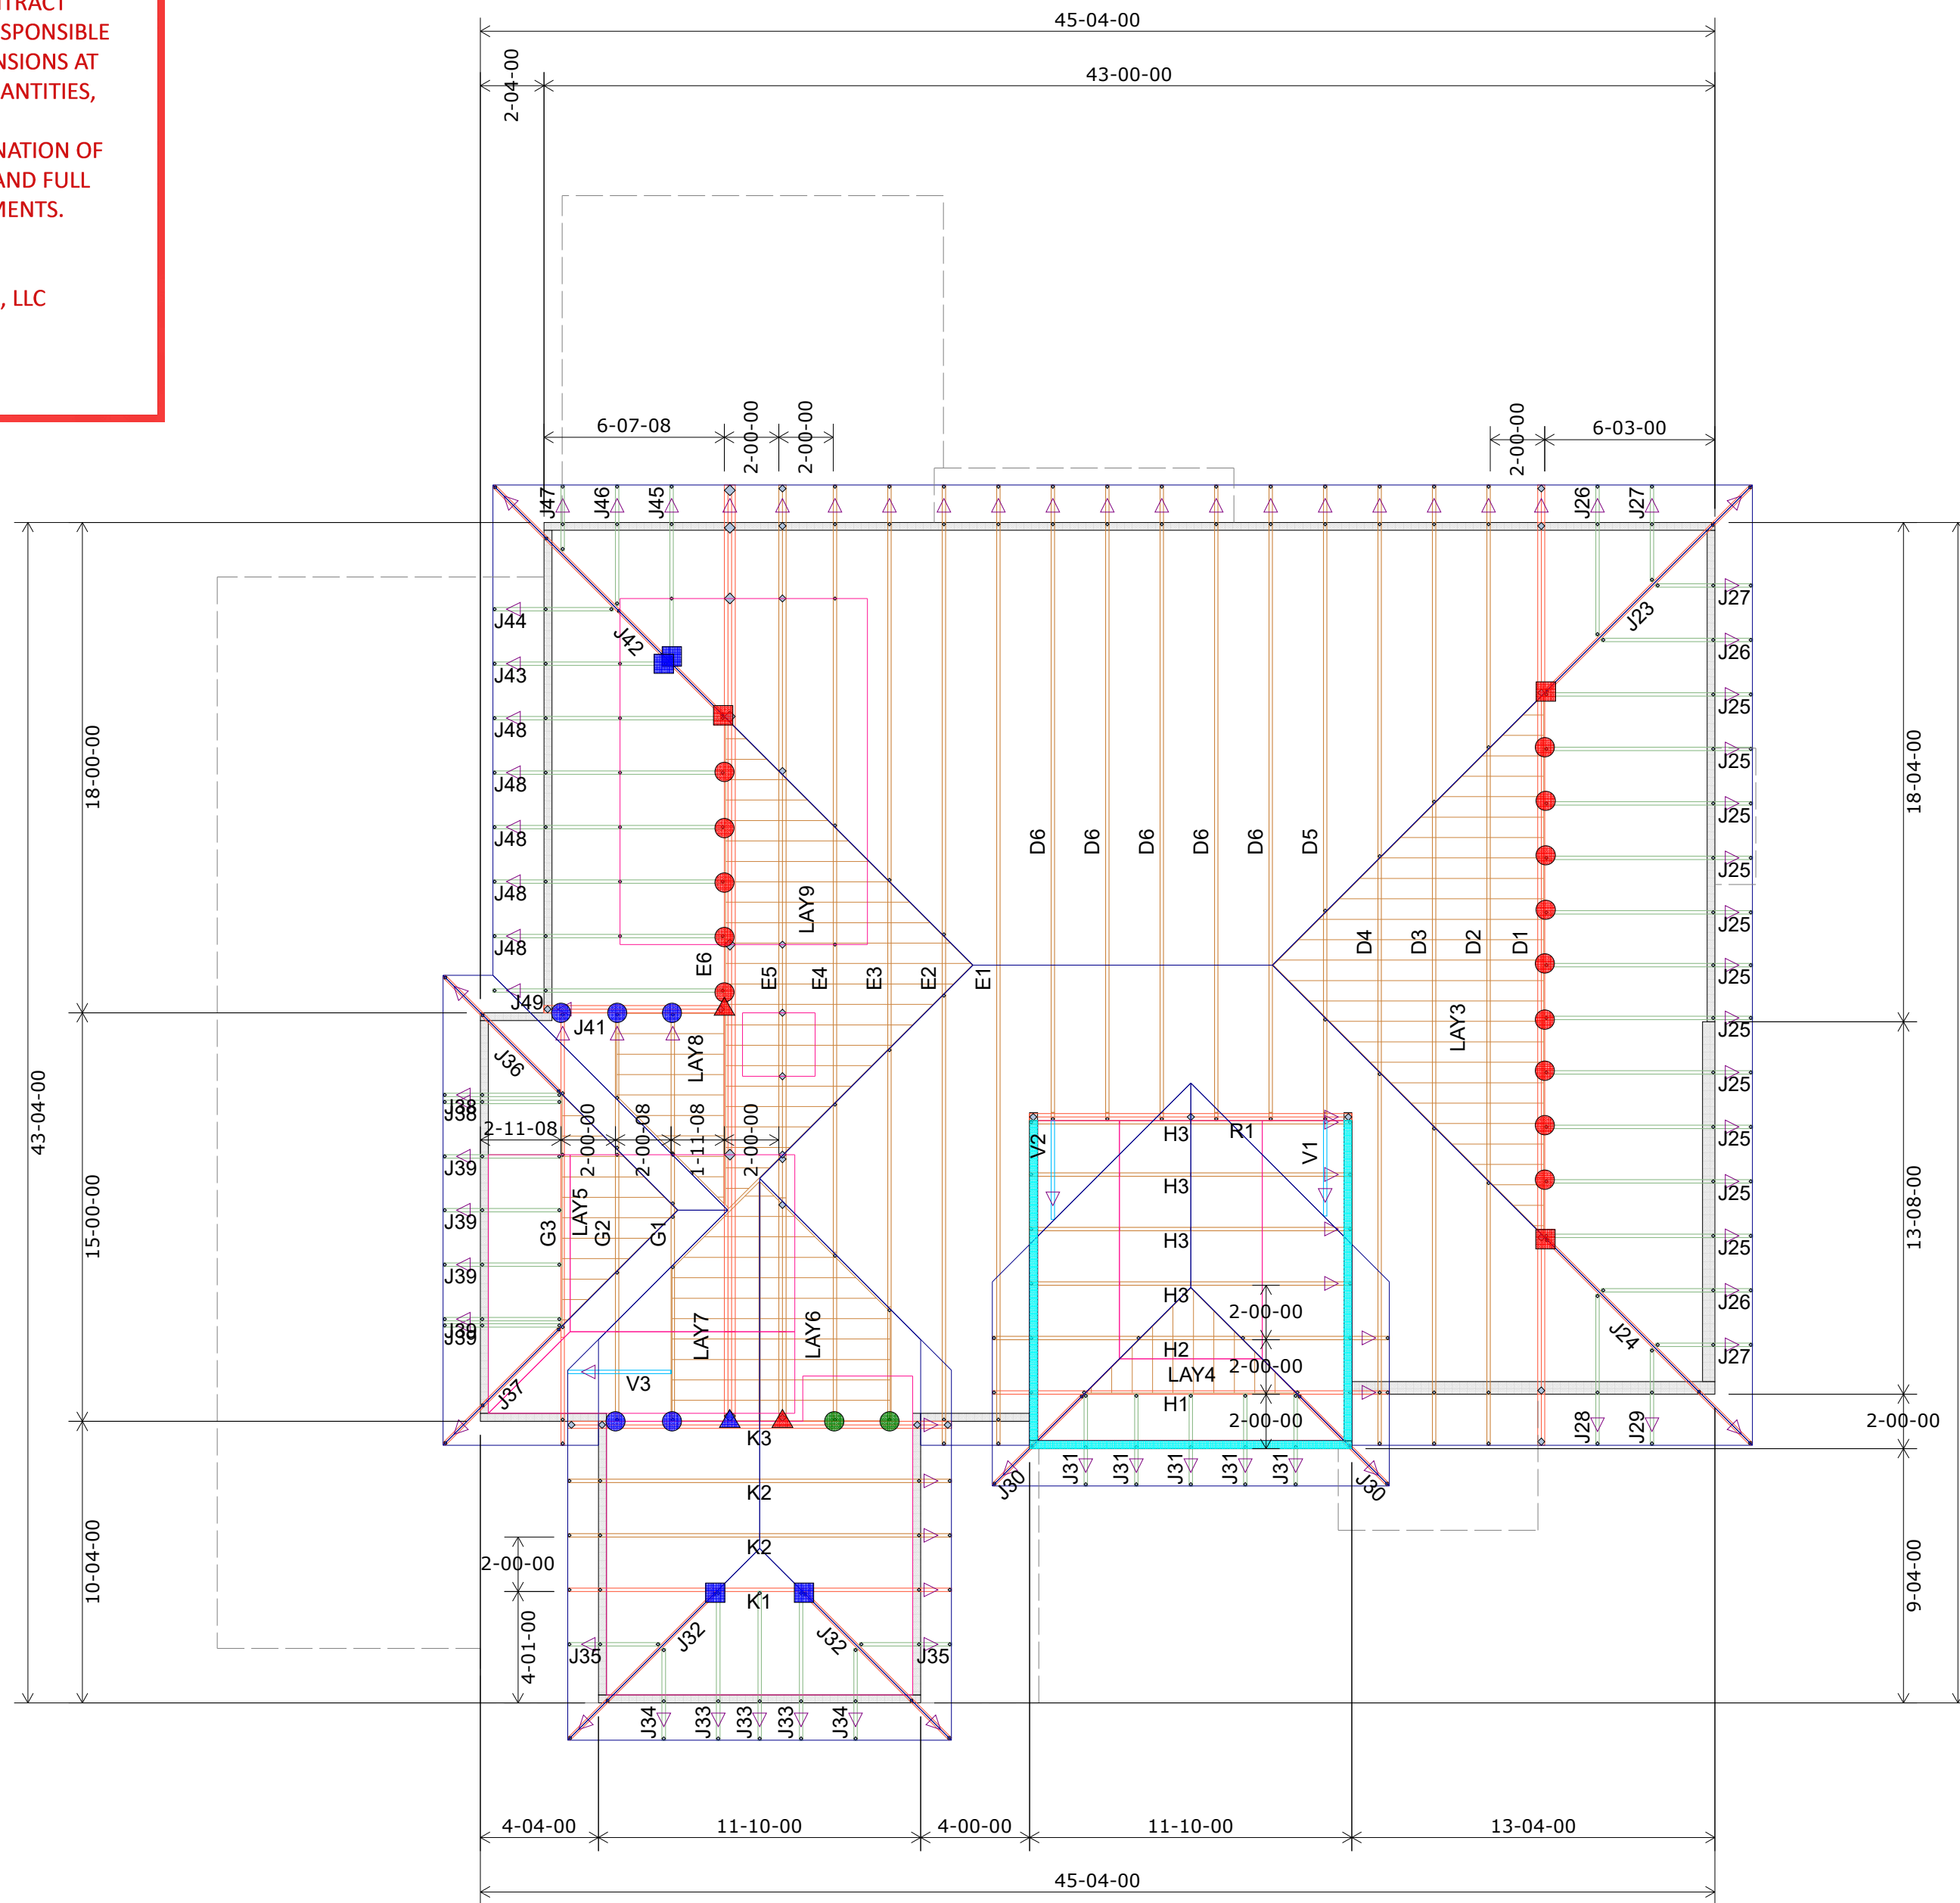

HANGER SCHEDULE	Quantity
● LUS24	17
● LUS26	7
● HUS26	3
▲ HHUS26-2	2
▲ HGUS26-3	1
▲ HGUS28-3	0
■ LTHJA26	4
■ TJC37	8
■ TJC57	0
▲ HTS20	0

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

# of Uplift	Connector
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Wall Heights:
1st Floor = 9-1-2 U.N.O.
2nd Floor = 8-1-2 U.N.O.

Plate Heights	Color
9-01-02	Light Blue
13-07-02	Orange

CUSTOMER	SUMMIT HOMES
JOB NAME	Lot 18 Hawthorn Ridge
JOB SITE ADDRESS	3012 SW Arboridge Dr.
CITY, STATE	Lee's Summit MO
DESIGNER	Chance 785-746-4240
DATE	6/30/2020
JOB #	400393

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. THESE TRUSSES ARE DESIGNED AS INDIVIDUAL BUILDING COMPONENTS TO BE INCORPORATED INTO THE BUILDING DESIGN AT THE SPECIFICATION OF THE BUILDING DESIGNER. SEE INDIVIDUAL DESIGN SHEETS FOR EACH TRUSS DESIGN IDENTIFIED ON THE PLACEMENT DRAWING. THE BUILDING DESIGNER IS RESPONSIBLE FOR TEMPORARY AND PERMANENT BRACING OF THE TRUSSES TO BE INSTALLED. THE BUILDING DESIGNER IS RESPONSIBLE FOR OBTAINING NECESSARY PERMITS AND APPROVALS FOR THE TRUSSES. WHEELER LUMBER, LLC IS NOT RESPONSIBLE FOR THE DESIGN OF THE TRUSSES OR THE BUILDING DESIGNER'S RESPONSIBILITY FOR OBTAINING NECESSARY PERMITS AND APPROVALS FOR THE TRUSSES. WHEELER LUMBER, LLC IS NOT RESPONSIBLE FOR THE DESIGN OF THE TRUSSES OR THE BUILDING DESIGNER'S RESPONSIBILITY FOR OBTAINING NECESSARY PERMITS AND APPROVALS FOR THE TRUSSES. WHEELER LUMBER, LLC IS NOT RESPONSIBLE FOR THE DESIGN OF THE TRUSSES OR THE BUILDING DESIGNER'S RESPONSIBILITY FOR OBTAINING NECESSARY PERMITS AND APPROVALS FOR THE TRUSSES. WHEELER LUMBER, LLC IS NOT RESPONSIBLE FOR THE DESIGN OF THE TRUSSES OR THE BUILDING DESIGNER'S RESPONSIBILITY FOR OBTAINING NECESSARY PERMITS AND APPROVALS FOR THE TRUSSES.

Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871



2nd Floor Truss Layout
Scale: 3/16" = 1'