
RESIDENTIAL ENGINEERING SERVICES, LLC SHOP DRAWING / SUBMITTAL REVIEW

APPROVED


SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY
AND GENERAL CONFORMANCE TO CONTRACT
DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE
FOR CONFIRING AND CORRELATING DIMENSIONS AT
JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES,
FABRICATION PROCESSES AND
TECHNIQUES OF CONSTRUCTION, COORDINATION OF
HIS OR HER WORK WITH OTHER TRADES AND FULL
COMPLIANCE WITH CONTRACT DOCUMENTS.

REVIEWED BY:
RESIDENTIAL ENGINEERING SERVICES, LLC

Brad A. Hukot F.E.

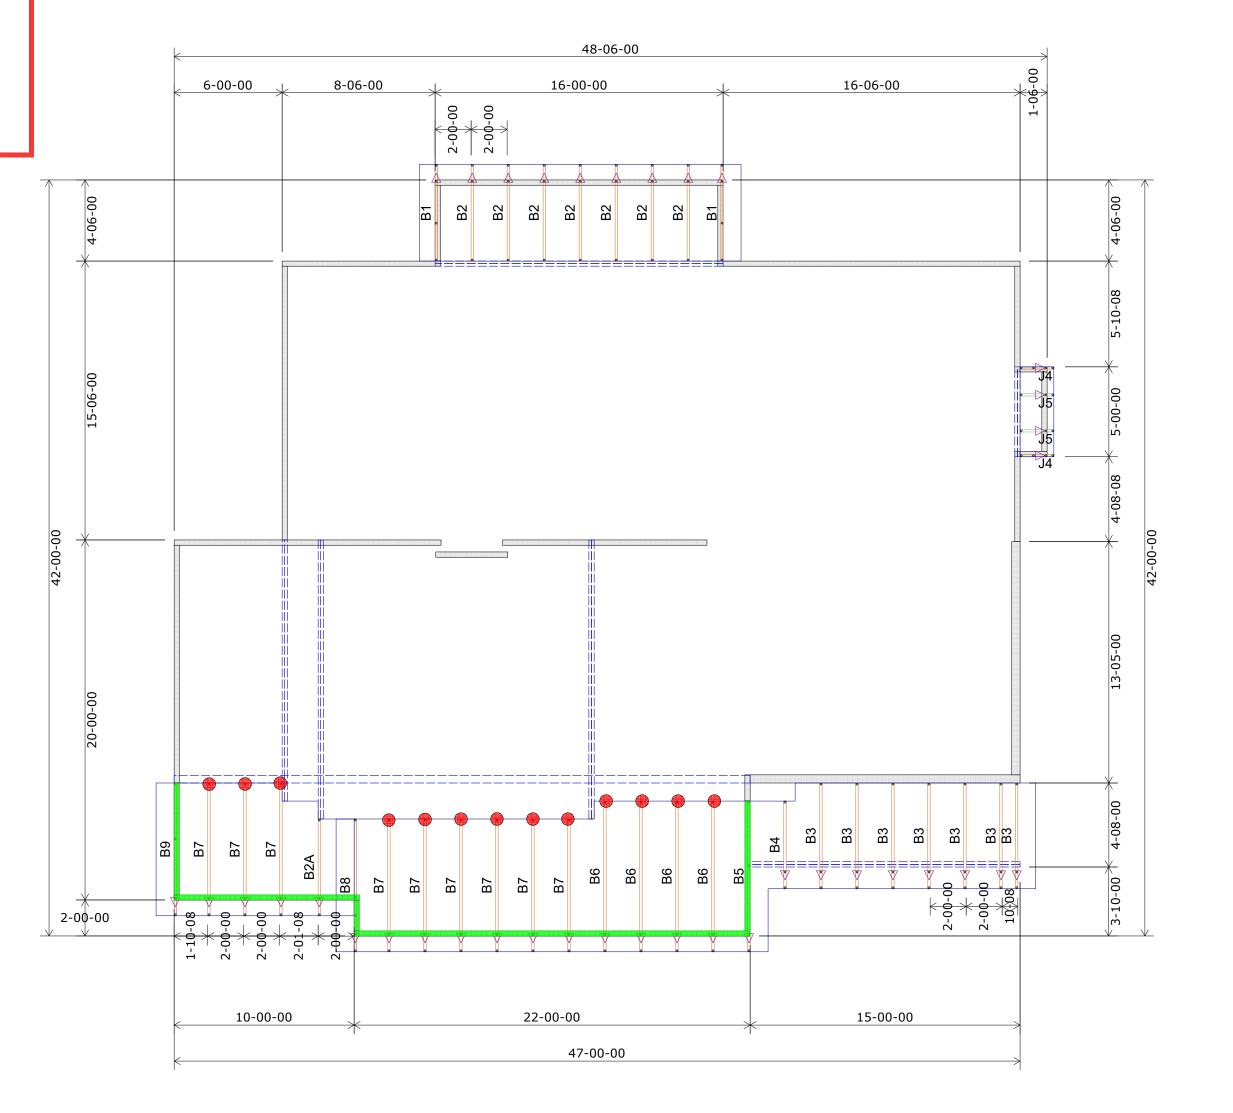

	HANGER SCHEDULE LUS24	Quantity 13		ek				
	LUS26	0		Cre				
	HUS26	7		Lot 105 The Manor at Stoney Creek	l o	МО		
<u> </u>	HHUS26-2	0		t Sto	4412 SW Tanzanite Circle	_	0	
_	HGUS26-2	0	S	or a	ite (Chance 785-746-4240	
A	HGUS28-3	0	SUMMIT HOMES	Man	zan		-94/	
	LTHJA26	0	H)	The 1	Tan	Summit	85-7	Job # 400416
	TJC37	0	MIT)5 T	SW	Sun	se 7	400
	TJC57	0		ot 1(112	ree's	าลท	# q
_	HTS20	0	S	Ľ	4	Le	C	Jo
Triangle denotes the left end of the Truss as it appears on the Engineered Drawings					ldress	State		
provided.		Customer	Job Name	Job Site Address	City,	Designer	7/14/2020	



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

of Uplift Connector 0 - 495: (1) H2.5A 495 - 990: (2) H2.5A 990 - 1245: (1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, 583 DOnifrio Drive; Madison, WI 53179.

Shop Drawing Approval


THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

<u>Wall Heights:</u> 1st Floor = 9-01-02 U.N.O. 2nd Floor = 8-01-02 U.N.O.

> Plate Heights 8-01-02 9-01-02

> > RELEASE FOR
> > CONSTRUCTION
> > AS NOTED ON PLANS REVIEW
> > DEVELOPMENT SERVICES
> > LEE'S SUMMIT, MISSOURI

Wheeler Lumber 1959 Old Hwy 50 NE Waverly, KS 66871

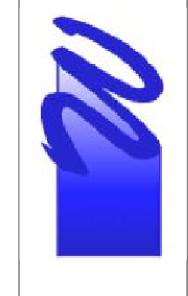

1st Floor Truss Layout

Scale: 3/16'' = 1'


RESIDENTIAL ENGINEERING SERVICES, LLC SHOP DRAWING / SUBMITTAL REVIEW

APPROVED


SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY
AND GENERAL CONFORMANCE TO CONTRACT
DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE
FOR CONFIRING AND CORRELATING DIMENSIONS AT
JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES,
FABRICATION PROCESSES AND
TECHNIQUES OF CONSTRUCTION, COORDINATION OF
HIS OR HER WORK WITH OTHER TRADES AND FULL
COMPLIANCE WITH CONTRACT DOCUMENTS.

REVIEWED BY:
RESIDENTIAL ENGINEERING SERVICES, LLC

Brad A. Huxol, P.E

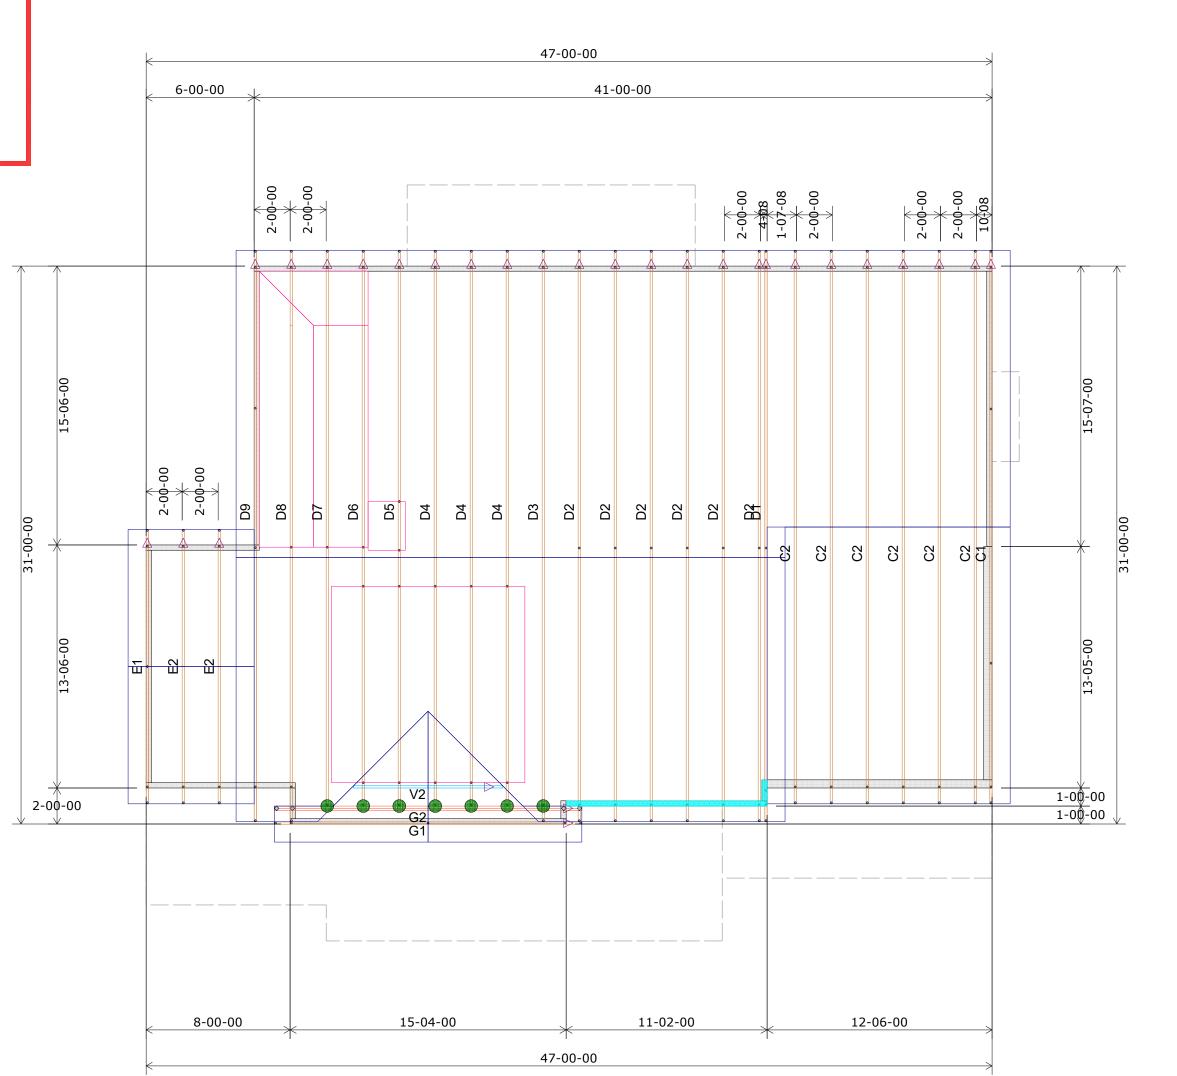

	HANGER SCHEDULE	Quantity						
	LUS24	13		reek				
	LUS26	0		y C				
	HUS26	7		one	le	MO		
_	HHUS26-2	0		ıt St	Circ		0	
	HGUS26-2	0	S	ior 2	ite (424	
	HGUS28-3	0	MI	Mar	zan		746-	
	LTHJA26	0	Щ	he l	Tan	ımi	85-7)416
	TJC37	0	SUMMIT HOMES	Lot 105 The Manor at Stoney Creek	4412 SW Tanzanite Circle	Summit	Chance 785-746-4240	Job # 400416
	TJC57	0	JMI	ot 1(112	ree's	nanc	# q
	HTS20	0	S	Ľ	4	Le	Ü	Jo
Triangle denotes the left end of the Truss as it appears on the Engineered Drawings				ldress	State			
	provided.		er	ne	Ac		i.	20
1		_	Customer	Job Name	Job Site Address	City,	Designer	7/14/2020



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

of Uplift Connector 0 - 495: (1) H2.5A 495 - 990: (2) H2.5A 990 - 1245: (1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trous and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, \$83 D'Onifrio Drive; Madison, WI 53179.

Shop Drawing Approval

HIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

<u>Wall Heights:</u>
1st Floor = 9-01-02 U.N.O.
2nd Floor = 8-01-02 U.N.O.

Plate Heights 8-01-02 9-01-02

RELEASE FOR

CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI

08/03/2020

Wheeler Lumber 1959 Old Hwy 50 NE Waverly, KS 66871

2nd Floor Truss Layout

Scale: 3/16'' = 1'