

City Of Lee's Summit - Fire Headquarters



ASSA ABLOY

ASSA ABLOY Entrance Systems
1900 Airport Road
Monroe, NC 28110
Phone: 1-866-231-2687
specdesk.na.entrance@assaabloy.com

ASSA ABLOY SW200i
SURFACE APPLIED DUAL
SWING DOOR OPERATOR
" PUSH APPLICATION "

x ELECTRICAL SERVICE
120 VAC 50/60 HZ.
10A. BY ELEC. CONTR.

HOLLOW METAL, WOOD
FLUSH OR ALUMINUM
DOOR AND FRAME
BY OTHERS.

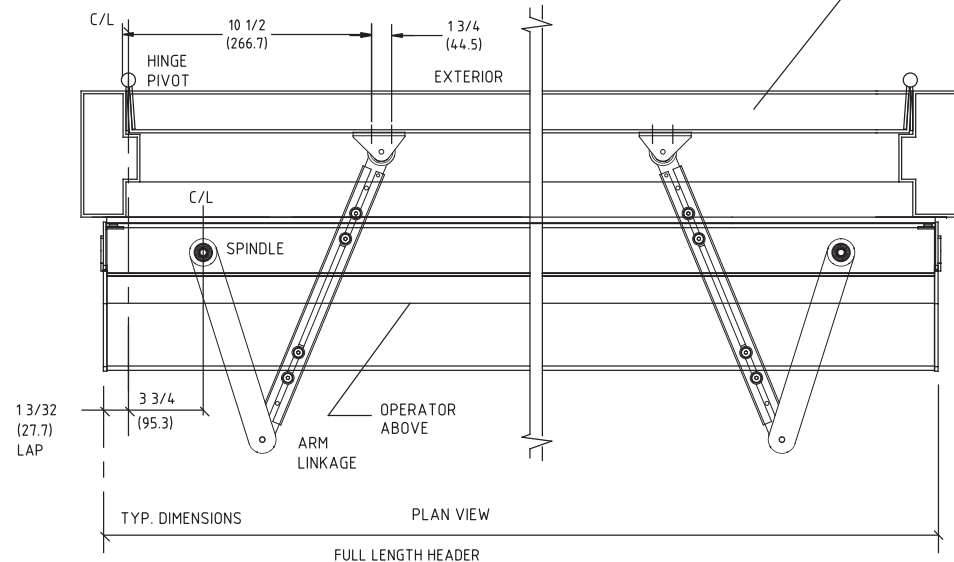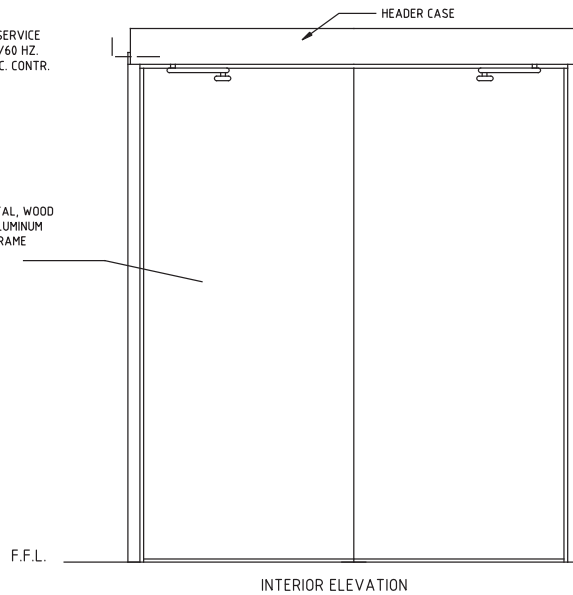

" PUSH ARM "

SHOE SHOULD BE
MOUNTED TO DOOR USING
#1/4-20 BINDING HEAD POST
SCREWS (SEX BOLTS).
ALUMINUM DOORS CAN USE
BLIND RIV-NUTS OR SEX BOLTS.
HARDWARE FOR DOOR
BY INSTALLER.

HOLLOW METAL, WOOD
FLUSH OR ALUMINUM
DOOR AND FRAME
BY OTHERS.

INTERIOR


F.F.L.

FILLER PLATE AS REQUIRED
NON-COMBUSTIBLE MATERIAL
IN FIRE DOOR APPLICATION
BY OTHERS

MOUNTING REQUIRED
BY INSTALLER, 12"
(304.6) ON CENTERS.

DRYWALL
BY OTHERS

WOOD OR STEEL
STUDS BY OTHERS

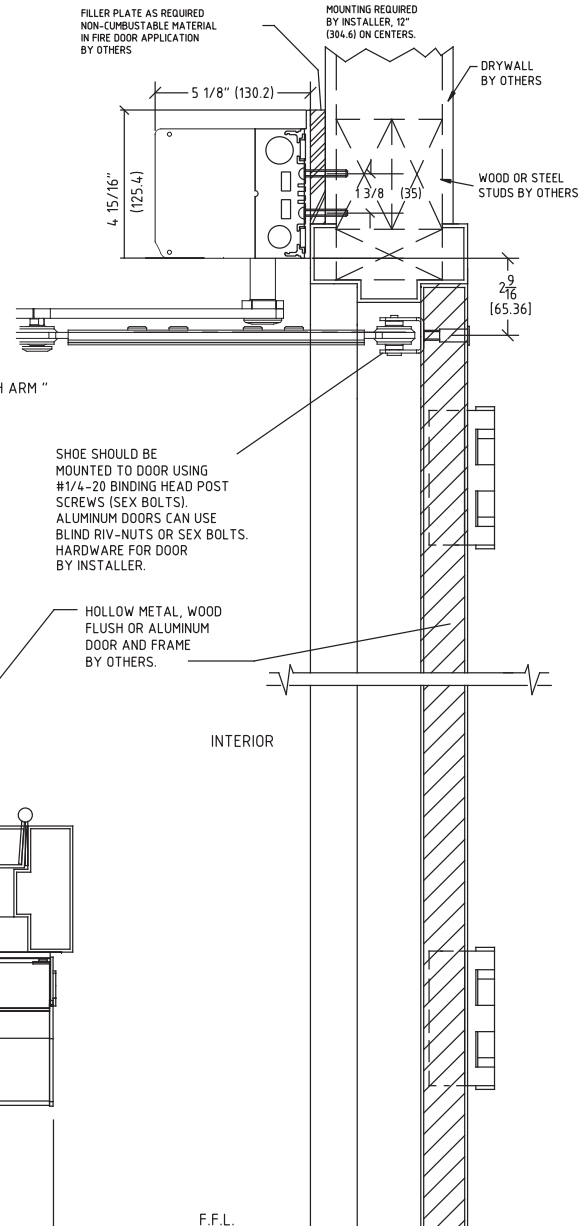


NOTE:


SW200i IS DESIGNED FOR HIGH PERFORMANCE, HEAVY
USAGE PEDESTRIAN APPLICATIONS THAT COMPLY WITH
ANSI A156.10. THE OPERATOR CAN ALSO BE ADJUSTED
FOR LOWER MANUAL PUSH FORCES TO COMPLY WITH
ANSI 156.19 AND FIRE DOOR REGULATIONS.

STANDARD FINISH:
CLEAR - AA-C23-A31.
DARK BRONZE - AA-C23-A44
SPECIAL FINISHES ARE AVAILABLE

NOTE: DRAWING IS DIMENSIONED IN BOTH ENGLISH
AND METRIC. REF. AS FOLLOWS: 1: (25.4).
ALL METRIC SIZES ARE IN MILLIMETERS.

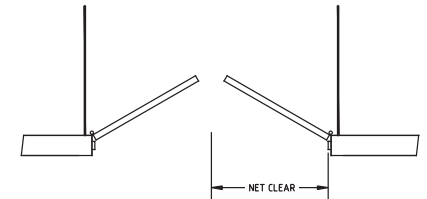

NOTE: x
NET CLEAR (EGRESS MIN 32" (812.8)) SINGLE DOOR

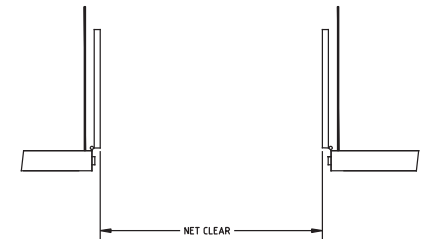

NOTE: x
SINGLE DOOR WIDTH NOT LESS THAN 30".

ENCROACHMENT OF 4" INTO NET CLEAR BY
PANIC HARDWARE IS PERMITTED ABOVE 34".

x GUIDE RAILS (SHOWN) ARE REQUIRED ON THE
SWINGPATH SIDE OF POWER OPERATED PEDESTRIAN
DOORS (ANSI 156.10) BUT NOT ON LOW ENERGY
POWER OPERATED DOORS (ANSI 156.19).

Jimmy Jones, AAADM, Fire Check Certified

Sales

DH Pace Entry Door Systems Group

Office: (816) 221-0072

Mobile: (816) 918-8499

Email: Jimmy.Jones@dhpace.com

DHPACE
Everything Doors Since 1926
www.dhpace.com

DH Pace Company, Inc. - 1901 E. 119th Street - Olathe, KS 66061

Who is DH Pace Company?: [Click Here](#)



CM-330/N

Mode of Operation:

- Exterior: The door will be activated by wave plate from both directions.
- Interior: The door will unlock and open via handheld transmitter only.