

# CARBO-MIZER® 550


HIGH CAPACITY - HIGH FLOW BULK CO<sub>2</sub>

# MVE

Beverage Systems



• FAST FOOD • CONVENIENCE STORES • RESTAURANTS • BARS

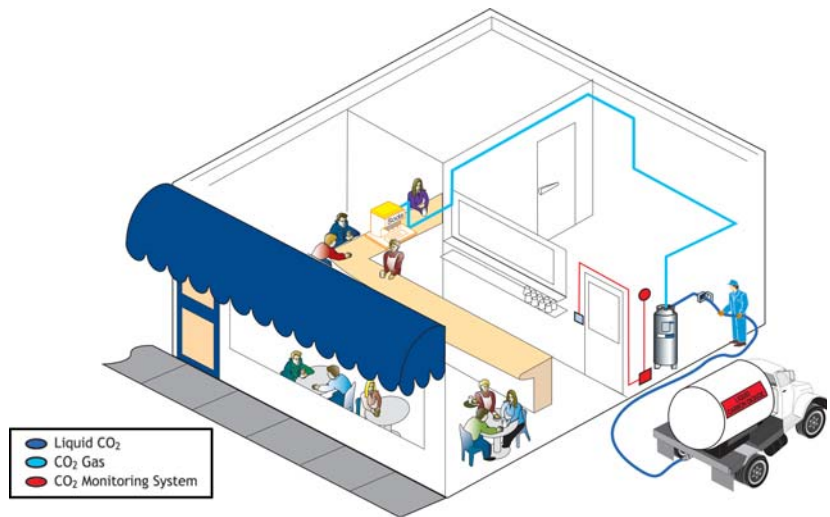

## Carbo-Mizer® 550

The MVE Carbo-Mizer 550 bulk CO<sub>2</sub> system is an affordable alternative to high-pressure cylinders. This system offers flow rates that meet the demands of high-volume applications.


Each MVE Carbo-Series vessel is equipped with a proprietary vacuum maintenance system to ensure optimized long-term performance. Unique to the market, this feature offers greater efficiency over longer periods of time.



Innovation. Experience. Performance.®

# CARBO-MIZER® 550

HIGH CAPACITY - HIGH FLOW BULK CO<sub>2</sub>

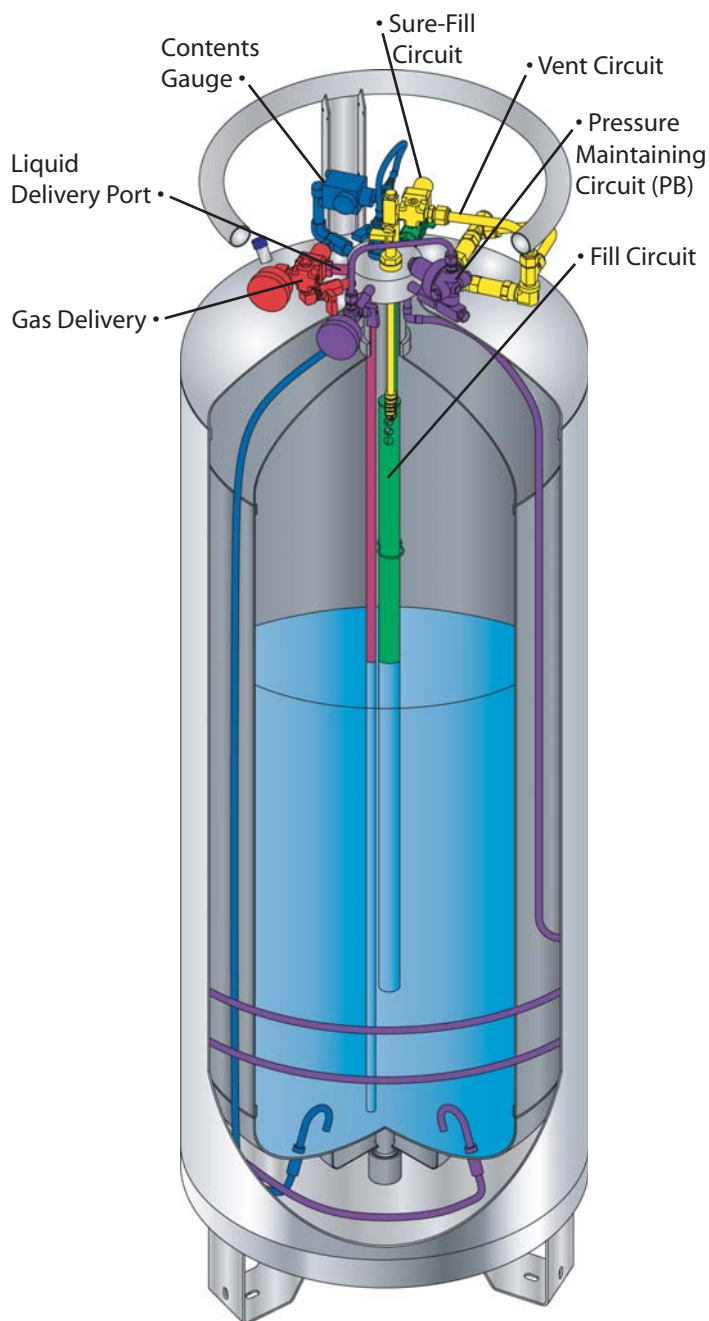

- ⌘ Height without legs, subtract 6 in  
\* ASME Boiler and Pressure Vessel Design Section VIII, Div. I  
† Super Insulation/High Vacuum  
§ No loss in normal applications  
® 12 consecutive hours at room temperature  
‡ Four consecutive hours at room temperature  
° Float gauge available upon request

## Product Advantages:

- Proprietary vacuum regeneration system for convenient, on-site maintenance
- Safe, low operating pressure
- Easy-to-read gauges for contents and tank pressure
- Fully automated system requiring no electricity
- Optional 6" (15.2 cm) welded uni-body legs
- Efficient gas withdrawal system supplies CO<sub>2</sub> gas up to 10 lbs per hour

## SPECIFICATIONS

### Dimensions

Diameter	22 in	55.8 cm
Height (with legs)⌘	72.9 in	185.1 cm
Empty Weight	318 lb	144.3 kg
Full Weight	902 lb	409.1 kg

### Design Criteria

Code	ASME*
MAWP	300 psig 20.7 bar
Insulation Type	SI †

### Capacity

Gross Volume	65.1 gal	246.4 ltr
Net Storage Volume	62 gal	235 ltr
Storage Capacity at 125 psig	584 lb	264.9 kg

### Performance

Evaporation Rate §	2.5 lb/day	1.1 kg/day
CO <sub>2</sub> Gas Delivery (Continuous)®	6.5 lb/hr	2.9 kg/hr
Peak Flow Rate (gas use)‡	10 lb/hr	4.5 kg/hr

### Components

ASME Relief Valve Setting	300 psig	20.7 bar
Secondary RV Setting	450 psig	31.0 bar
Gas Use Connection	1/4 in 45° Flare	
Fill Line Connection	5/8 in Male 45° Flare	
Vent Connection	1/2 in OD Tubing	

### Construction

Inner Vessel Material	Stainless Steel
Outer Vessel Material	Stainless Steel
Liquid Level Gauge°	Differential Pressure

## Distributed by:



Technical Sales (518) 813-4756  
[www.cryopurecorp.com](http://www.cryopurecorp.com)



©2010 Chart Inc.

Chart Inc.  
U.S.: 1-800-400-4683  
Worldwide: 1-952-758-4484  
[www.chartindustries.com](http://www.chartindustries.com)

P/N 14370571