

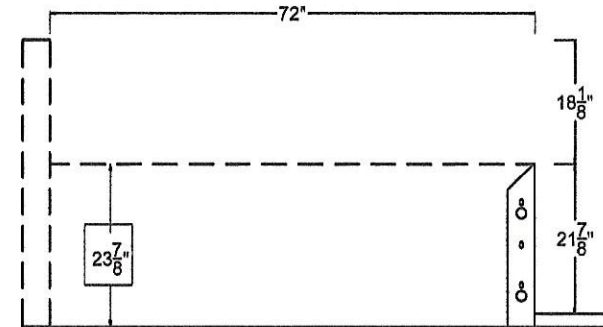
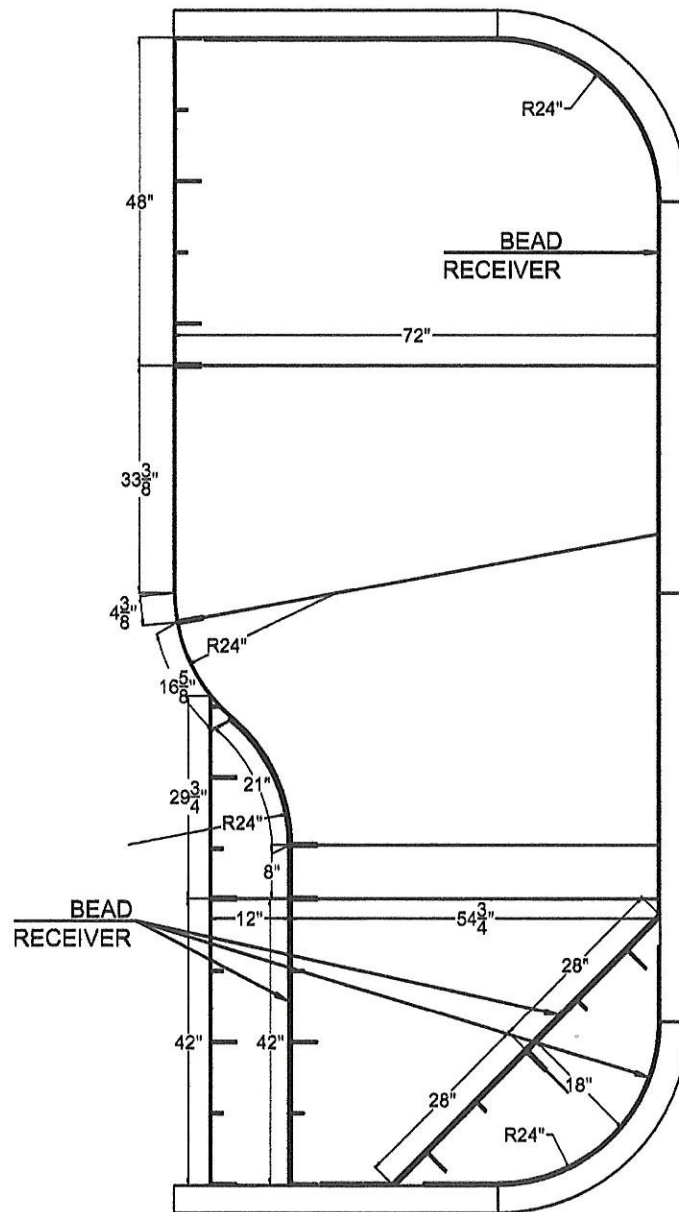




SPNX2950 SPECIAL 14'x2'R NEXUS MATRIX STAIR/SUNDECK

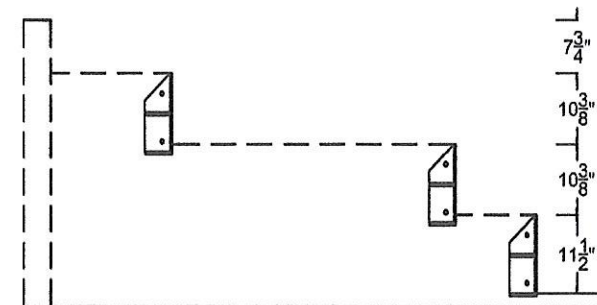

FILE NUMBER : 20072081

Perimeter : 80'-6 3/4"

Surface Area : 388.57 SQ FT

Volume : 12,497 gal

DRAWN BY : thaskell SCALE n/a

NON DIVING

33 Wade Rd.
Latham, NY 12110
phn: 518-786-1200
fax: 518-786-0954

THIS POOL CONFORMS TO CURRENT
APSP/ANSI/ICC-5 2011 & ISPS 2018
STANDARDS FOR RESIDENTIAL
INGROUND SWIMMING POOLS



WARNING: SWIMMING POOLS CAN BE DANGEROUS WHEN USED IMPROPERLY. CONSULT YOUR DEALER FOR SAFETY INFORMATION ON SAFE USE. IT IS THE RESPONSIBILITY OF TOWN OFFICIALS, BUILDERS AND THE HOMEOWNERS TO FOLLOW ALL SAFETY RECOMMENDATIONS OF ANSI/APSP, LOCAL ORDINANCES AND EQUIPMENT MANUFACTURERS.

CUSTOMER SIGNATURE REQUIRED

DEALER NAME : BLUESTONE

CUSTOMER NAME : YORK

DATE

7/21/20

MATRIX

DEPTH AND SHAPE OF POOL MEET MINIMUM STANDARDS OF THE INTERNATIONAL SWIMMING POOL AND SPA CODE 2018 FOR IN-GROUND SWIMMING POOLS. A MEANS ENTRY/EXIT FOR BOTH THE DEEP END AND THE SHALLOW END OF THE POOL MUST BE PROVIDED IN ACCORDANCE WITH THE 2018 INTERNATIONAL SWIMMING POOL AND SPA CODE SECTION 809. EQUIPOTENTIAL BONDING MUST BE PROVIDED IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE NFPA 70. ALL A-FRAME BRACES ARE TO BE MOUNDED WITH MINIMUM 8 INCH DEEP POURED 2500 P.S.I. CONCRETE COLLAR AROUND ENTIRE PERIMETER OF POOL. NO DIVING LABELS ARE TO BE INSTALLED AROUND THE PERIMETER OF POOL AS REQUIRED. SUCTION ENTRAPMENT AVOIDANCE IS TO BE INSTALLED IN ACCORDANCE WITH ANSI/APSP/ICC-7. ALL WORK NOT SPECIFICALLY SHOWN IS TO BE DONE IN ACCORDANCE WITH THE REQUIREMENTS OF THE 2018 INTERNATIONAL SWIMMING POOL AND SPA CODE AND ALL OTHER APPLICABLE CODES.