

# CONSTRUCTION STAKE PLOT PLAN


Ordered by: Elevate Design and Build

Description: Lot 112, HOOK FARMS 2nd Plat, in Lee's Summit, Missouri

Address: 2207 SW Hook Farm Drive  
Lot Area 10010 sf

RELEASE FOR CONSTRUCTION  
AS NOTED ON PLANS REVIEW  
DEVELOPMENT SERVICES  
LEE'S SUMMIT, MISSOURI  
10/09/2023 4:46:03

As-graded plot plan per Sec. 7-160 Code of Ordinances is required prior to occupancy.

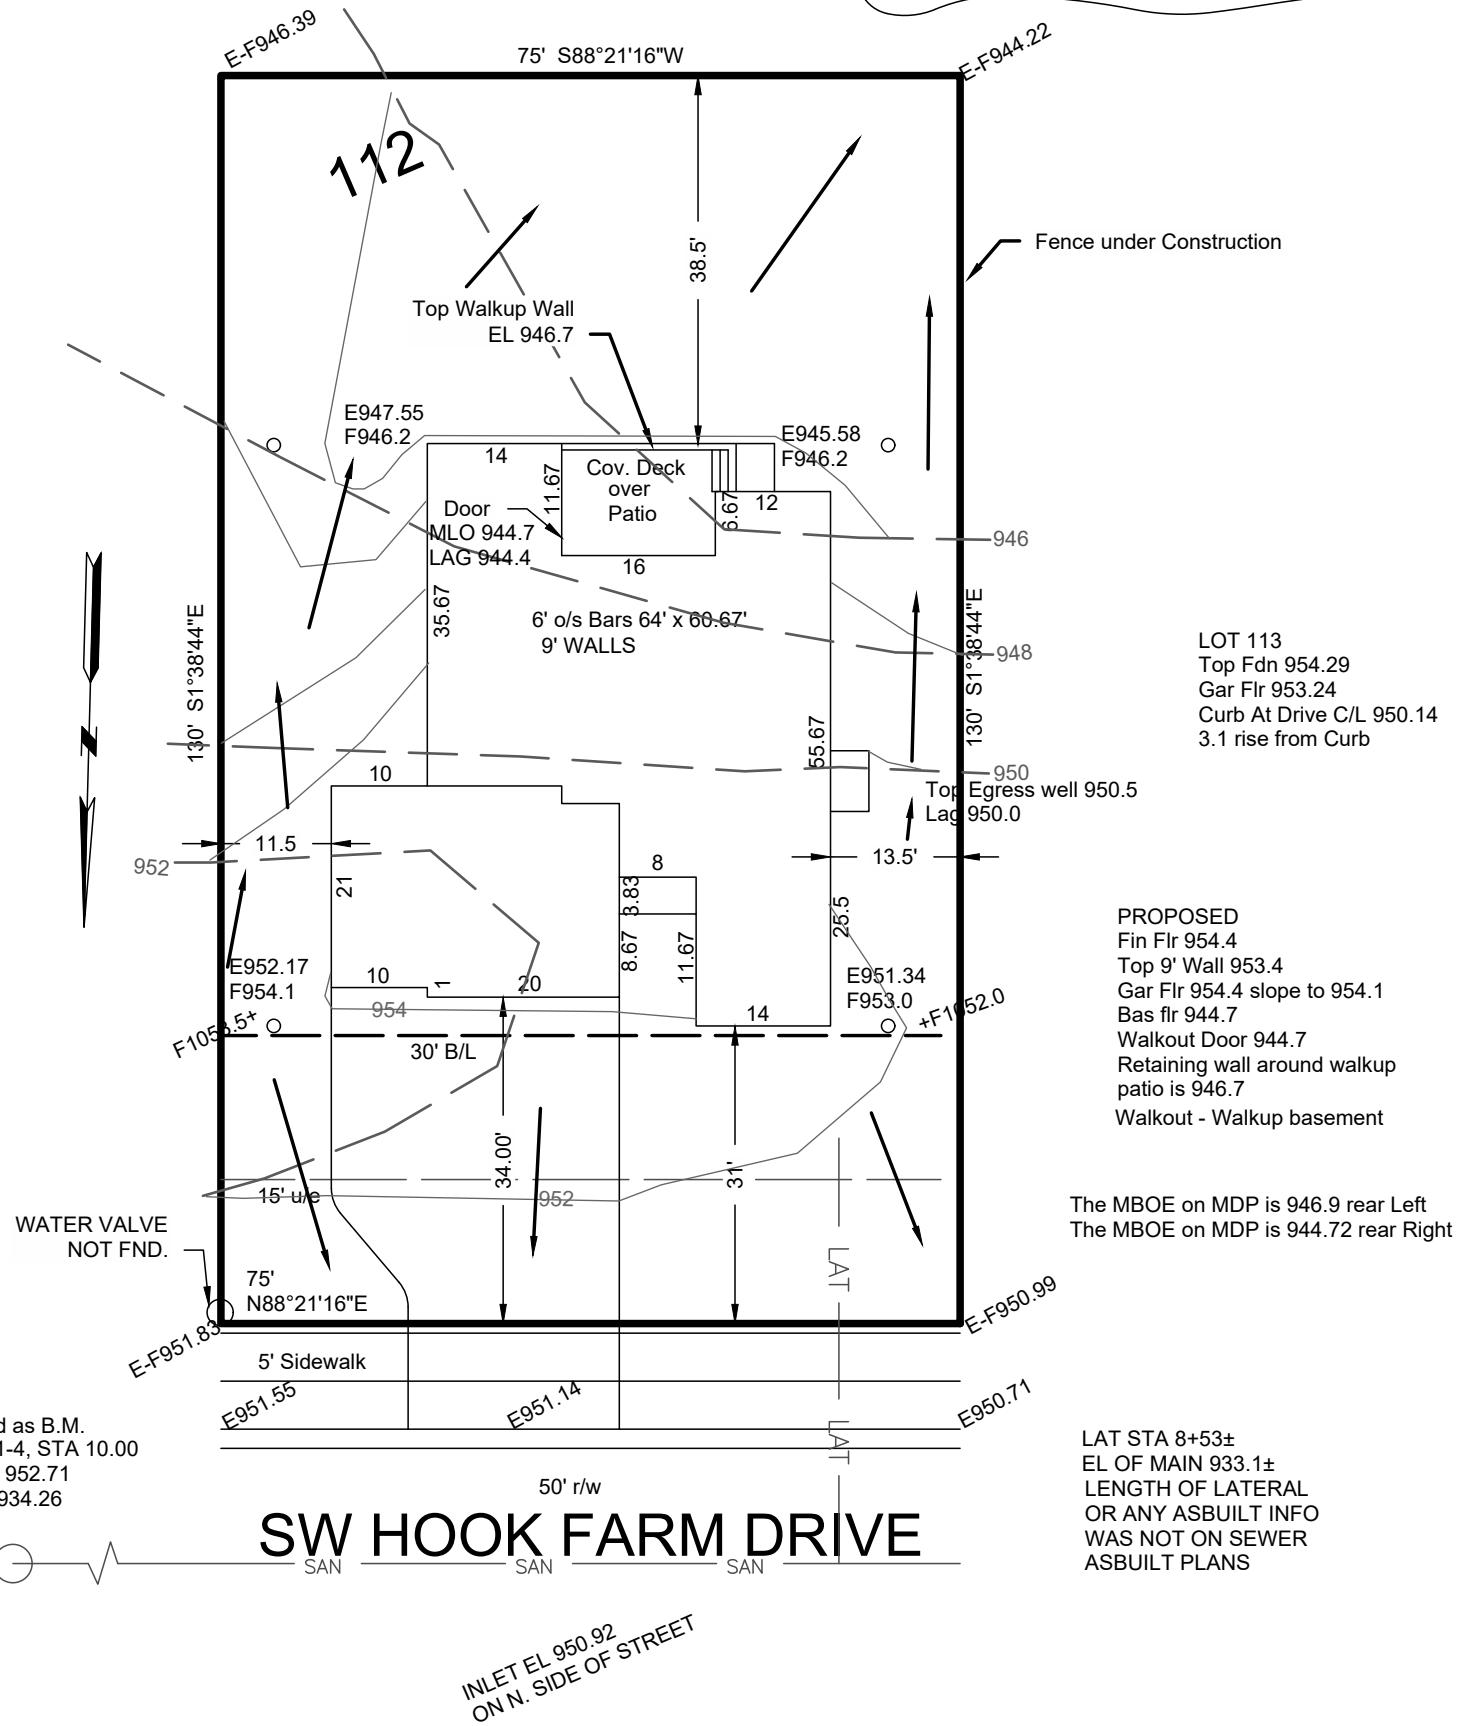


Used as B.M.  
MH 1-4, STA 10.00  
TOP 952.71  
INV 934.26

## SW HOOK FARM DRIVE

This plot plan is not an "as-built" survey as the house was staked prior to being built and cannot be used in place of a "Surveyors Real Property Report". This plot plan was prepared for use before and during foundation construction only and should not be used to establish property lines for fences or other structures. House staked as shown on this plot plan. House dimensions may have been assumed and contractor must check house dimensions shown and compare to the final house plans. Contractor to verify all elevations at job site. Builder must make final decision as to cuts and foundation heights at the job site, any floor elevations shown are shown as a guide only. Sanitary sewer and lateral elevations cannot be verified at time of staking, and it may be necessary to expose sanitary sewer service connection prior to excavation for foundation. Underground utilities and un-platted easements may not be shown. This does not constitute a boundary survey and builder must check to make sure description shown is correct with the deed for the property. It is recommended that no work be done until building permits are obtained and plot plan has been verified by local building codes authorities to comply with all setback and other restrictions.

→ = DRAINAGE PATTERN

CONSTRUCTION ENGINEERING SERVICES, INC.

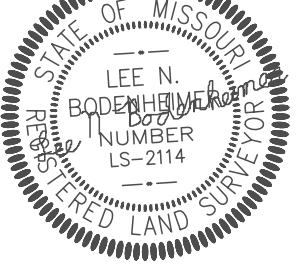

16810-C East 40 Highway  
Independence, MO 64055  
(816)478-2323  
lee@engineeringkc.com  
SCALE: 1" = 20'  
DATE: 08-31-2023  
JOB NO: 18830

LEE BODENHEIMER, L.S.  
Land Surveyor