


© COPYRIGHT S.A.B. CONSTRUCTION, LLC 2021	SQUARE FOOTAGE SUMMARY::		THIS DOCUMENT CONTAINS COPYRIGHTED MATERIAL AND
	MAIN FLOOR FINISH	1,090 SF	COPYRIGHTED MATERIAL AND CONFIDENTIAL INFORMATION BELONGINING TO HD ENGINEERING. UNAUTHORIZED USE, DISCLOSURE,
	UPPER FLOOR FINISH	1,385 SF	LINAU THORIZED USE, DISCLOSURE, DISSEMINATION, OR DUPLICATION OF ANY OF THE INFORMATION CONTAINED HEREIN MAY RESULT IN
	LOWER FLOOR FINISH	O SF	LIABILITY UNDER APPLICABLE LAW.
	LOWER FLOOR UN-FINISH	1,108 SF	NOT NO CONFIDENTIAL INFORMATION BELONGINING TO HD ENGINEERING. UNAUTHORIZED USE, DISCLOSURE, DISSEMINATION, OR DUPLICATION OF ANY OF THE INFORMATION CONTAINED HEREIN MAY RESULT IN LIABILITY UNDER APPLICABLE LAW.
		630 SF	<b>*</b>
		705 SF	NG S.CO
NTS PER CODE	FRONT PORCH REAR PATIO	105 SF 168 SF	EET 14 NEER
			INEE H STRE S 6621 SINEER
CLG./RFTR. BRG.			HD ENGINEERING & 11656 W. 75TH STREET SHAWNEE, KS 66214 WWW.HDENGINEERS.COM 913.631.2222 SERVICE@HDENGINEERS.COM
8, ,0			
-6" FRIEZE BD.			
UPPER FLR.			
-6" SURROUNDS &			
6" CORNER TRIM UNLESS NOTED			CHRIS DE SAATHOFF
MAIN FLR.			AUMBER CONTROL NUMBER 2008001865
			""""""""""""""""""""""""""""""""""""""
,,O -,6			
ά			<b>C</b> 64082
			64 C
TERRACE FLR.			MO
			DN, IMMIT
]6			ID SUMMIT VOTES
			, LEE
			R R S R
E E E E E E E E E E E E E E E E E E E			NSTRUC E721 - REDE DRT RD., LEE' STRUCTURAL DETAILS
SUNKEN GREAT RM.			Ŭ Q
			SAB swol
			SAB 4 SW 0
UNDISTURBED			N 4
			2354
			HD#: 41256
			DATE: 03/16/2021 CHECKED BY: CLS
			NO. ISSUE/REVISION Date
	RELEASE FOR CONSTRUCTION AS NOTED ON PLANS REVI DEVELOPMENT SERVICE	EW	PLANS DRAWN BY OTHERS
	DEVELOPMENT SERVICE LEE'S SUMMIT, MISSOUR 05/17/2021		<b>S-0.1</b>
			3-0.1

© 2020 HD ENGINEERING & DESIGN



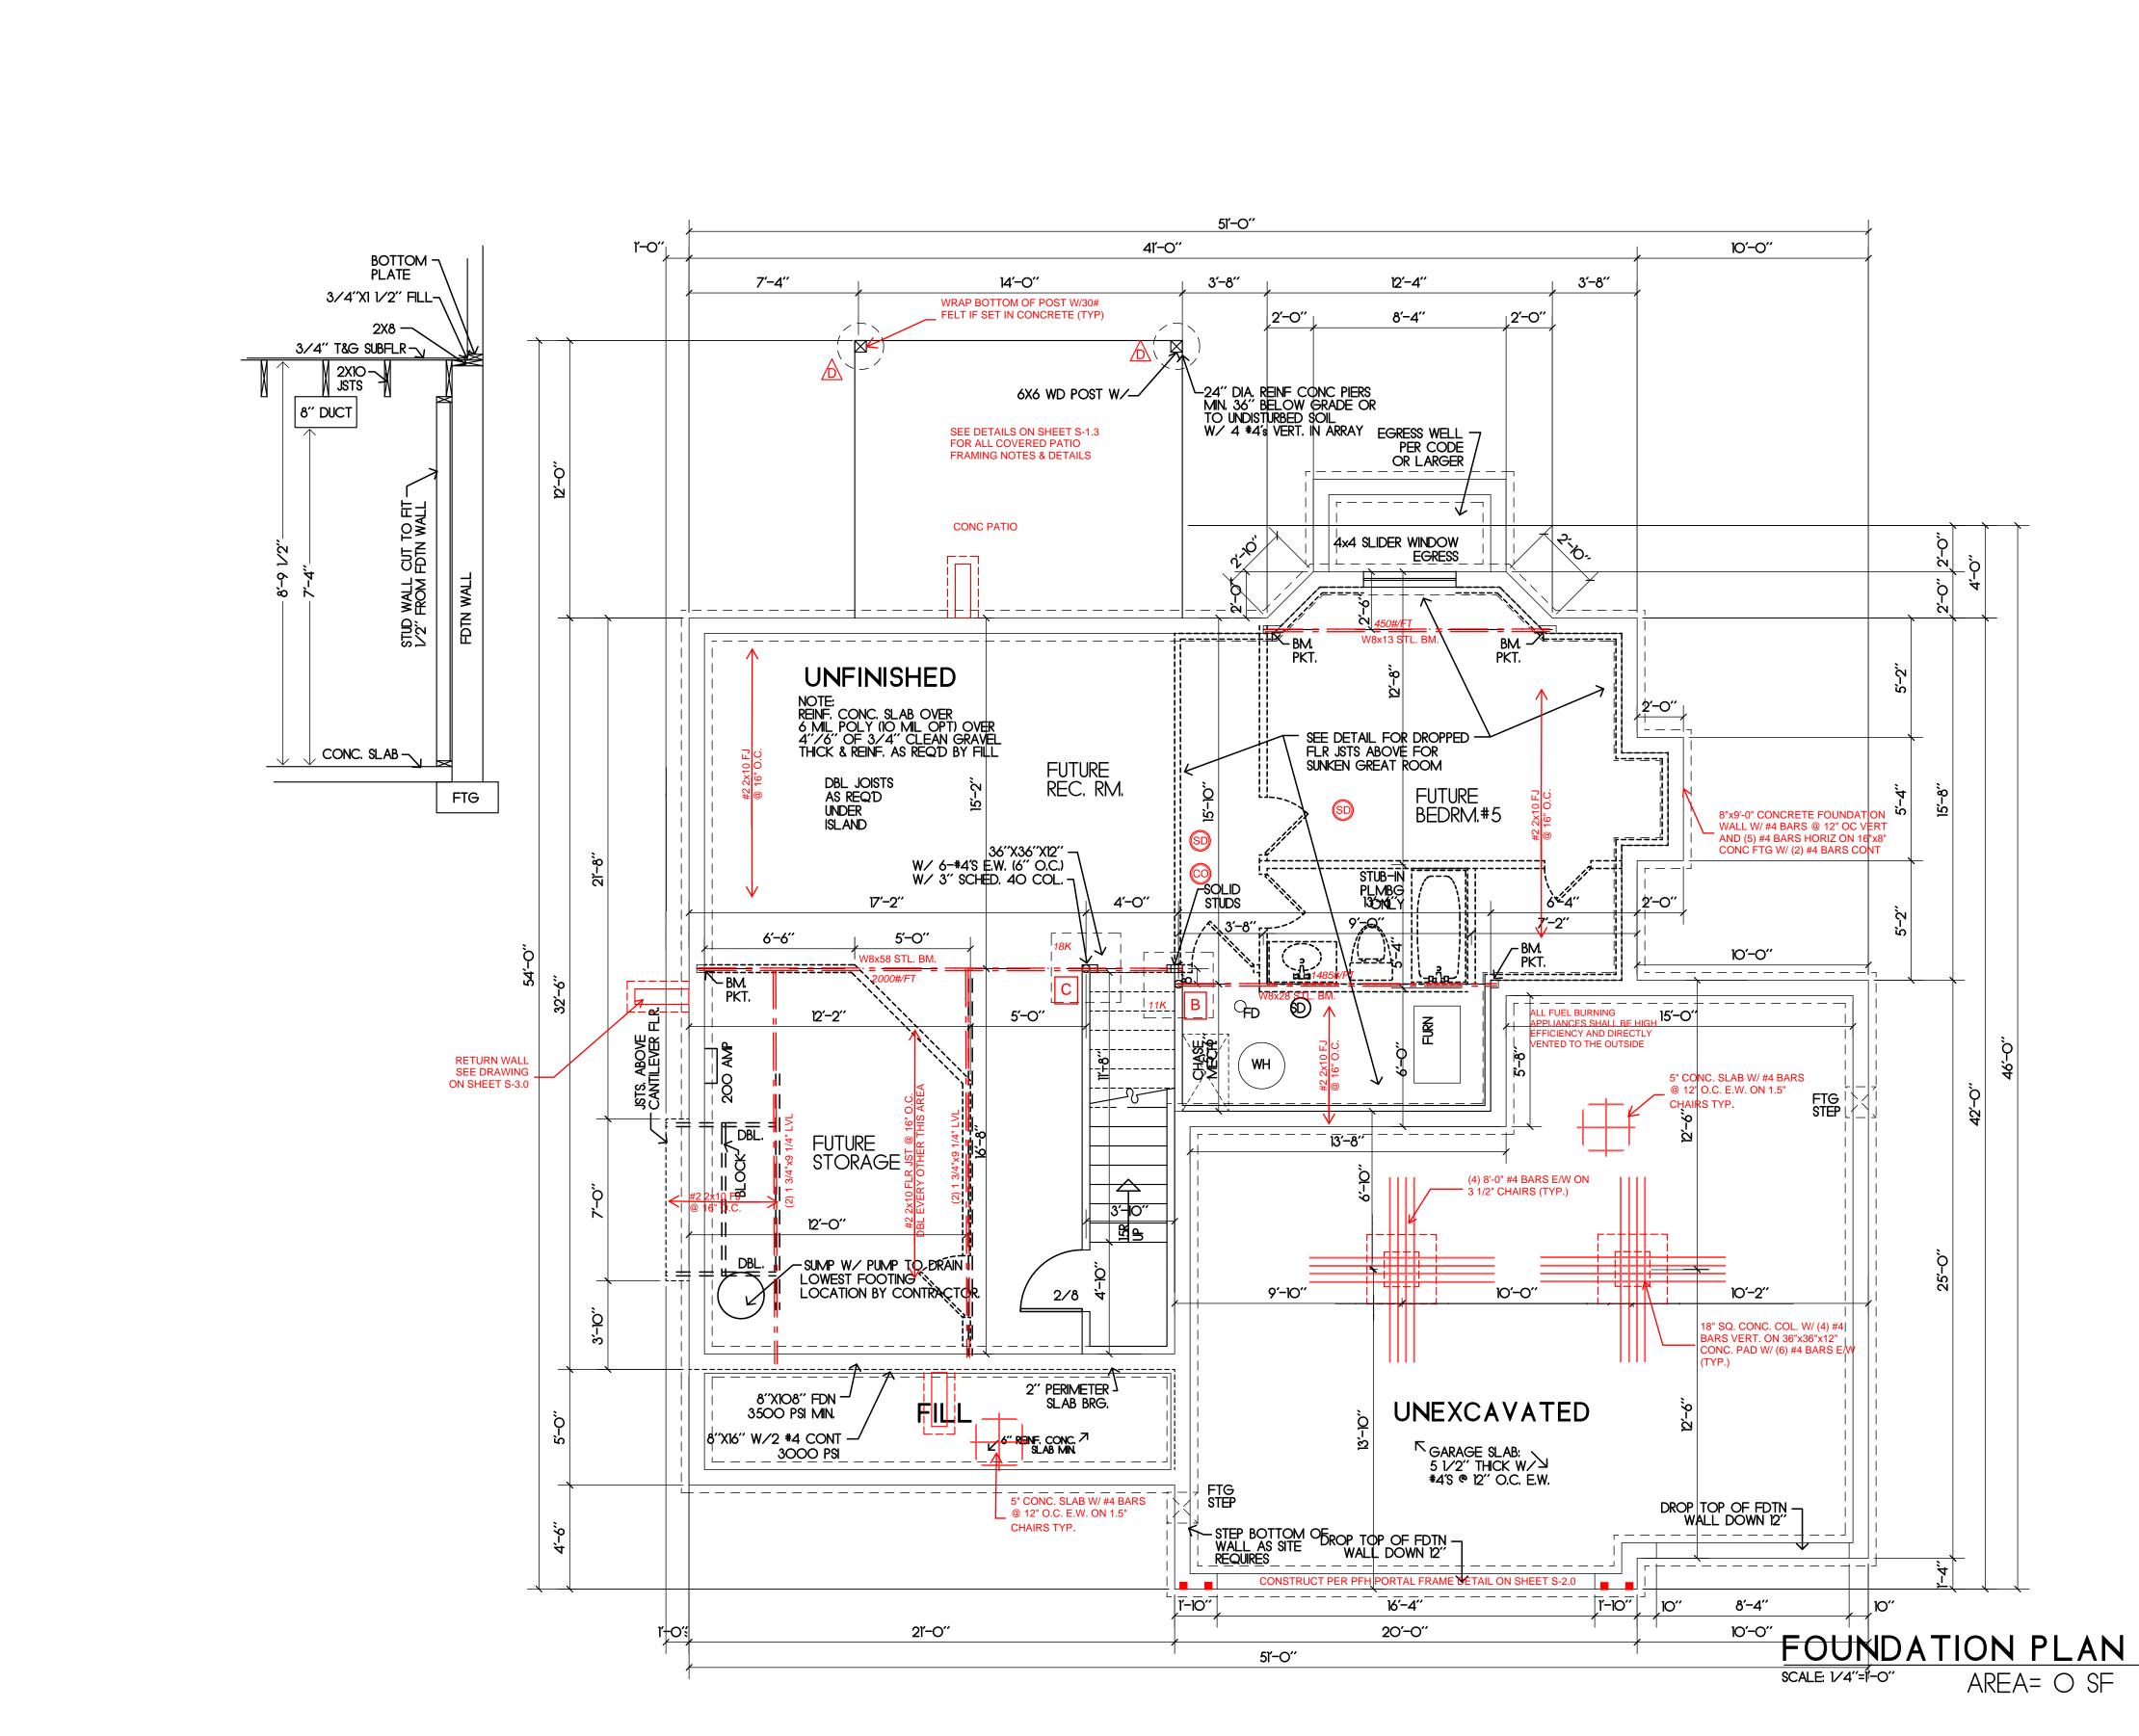


## FOUNDATION PLAN NOTES

FOR SHIPLAP PANEL SHEATHING


RELEASE FOR 2020 HD ENGINEERING TON AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 05/17/2021

**S-0.2** 

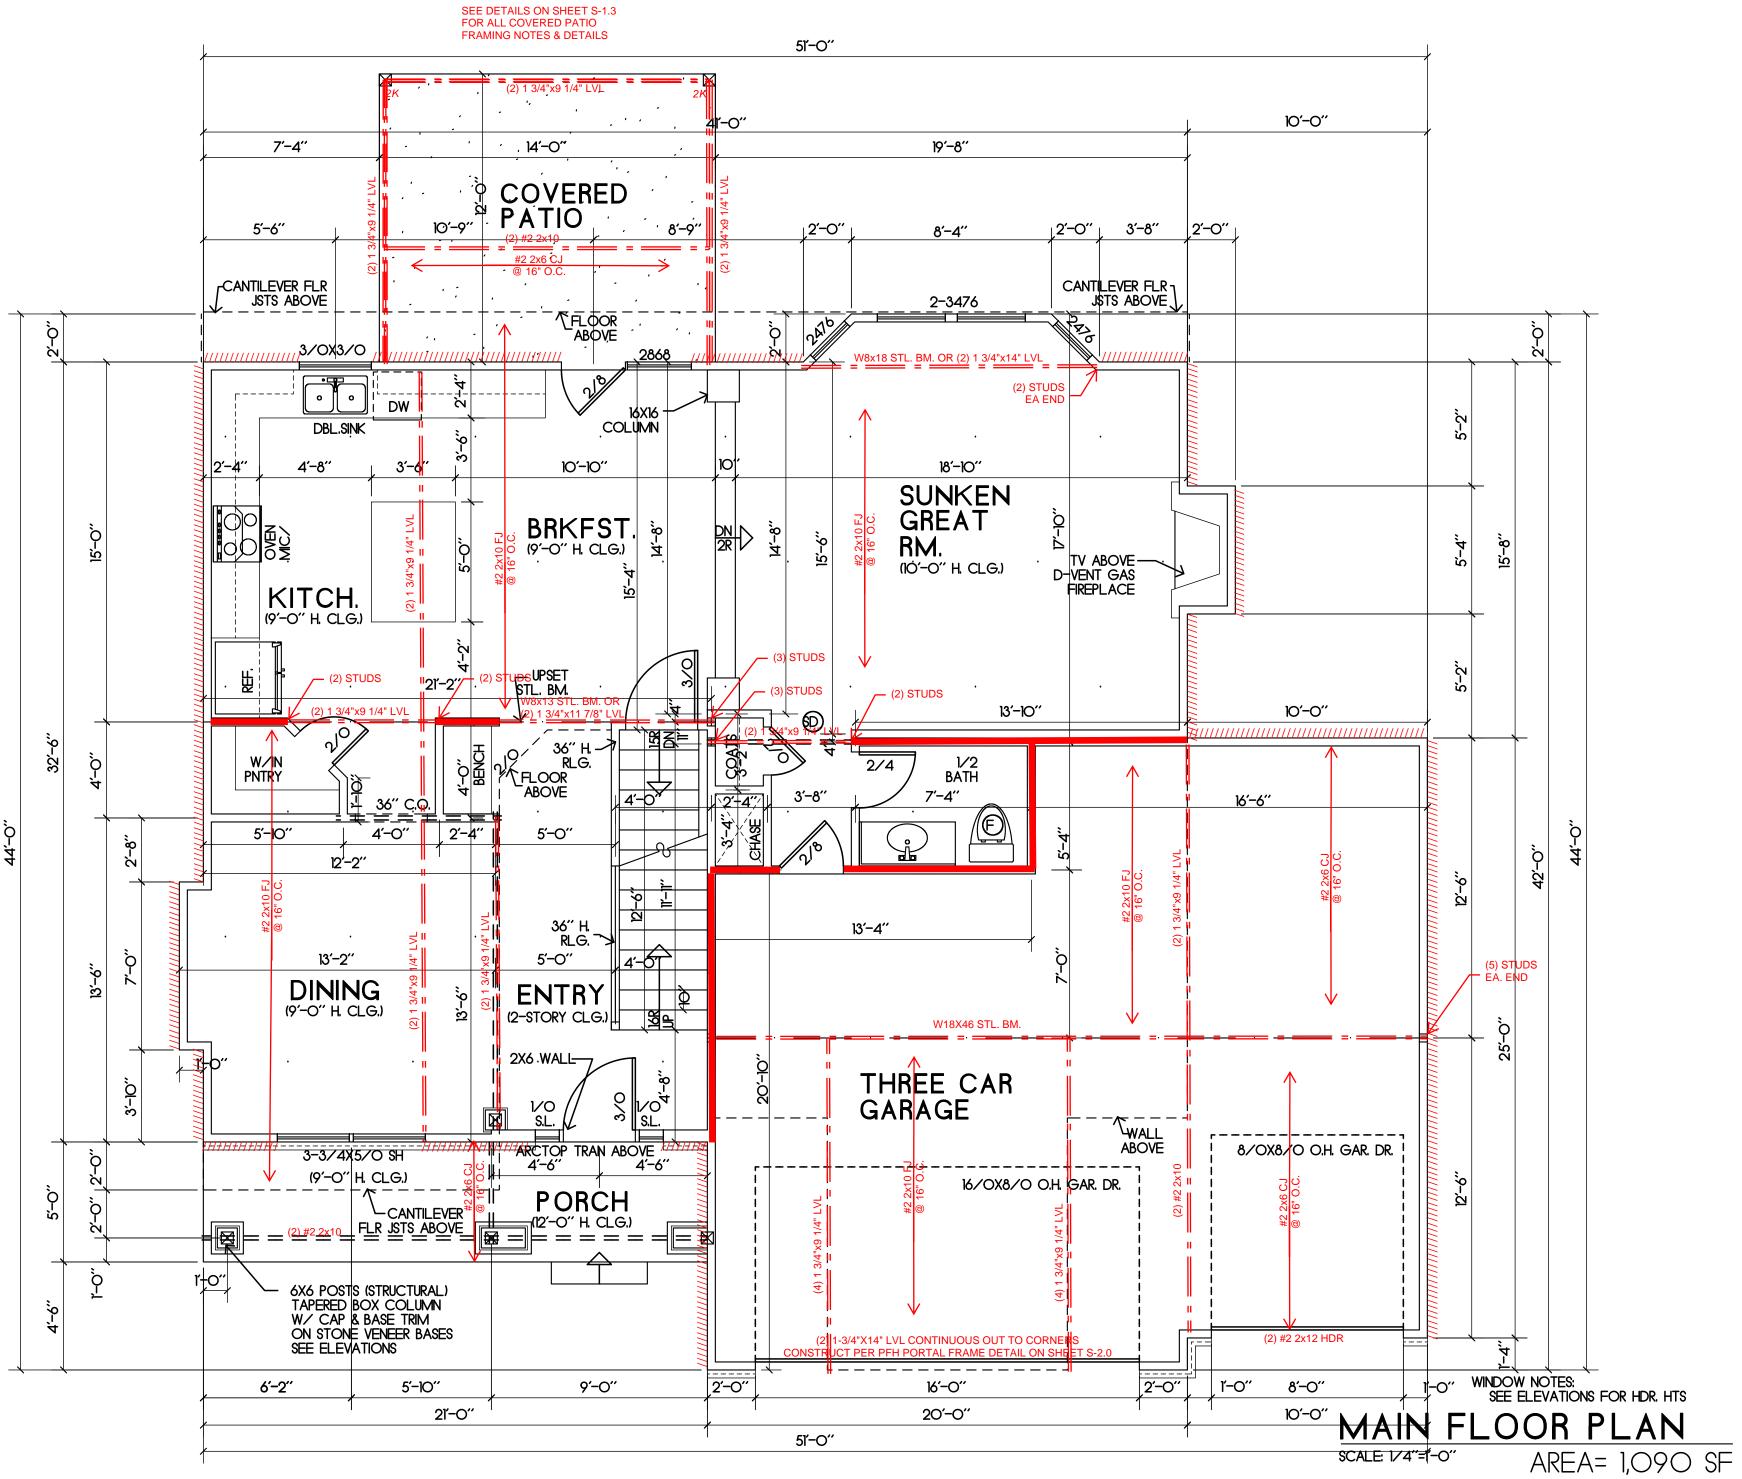




RELEASE FOR 2020 HD ENGINEERNS & BUSICN ION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

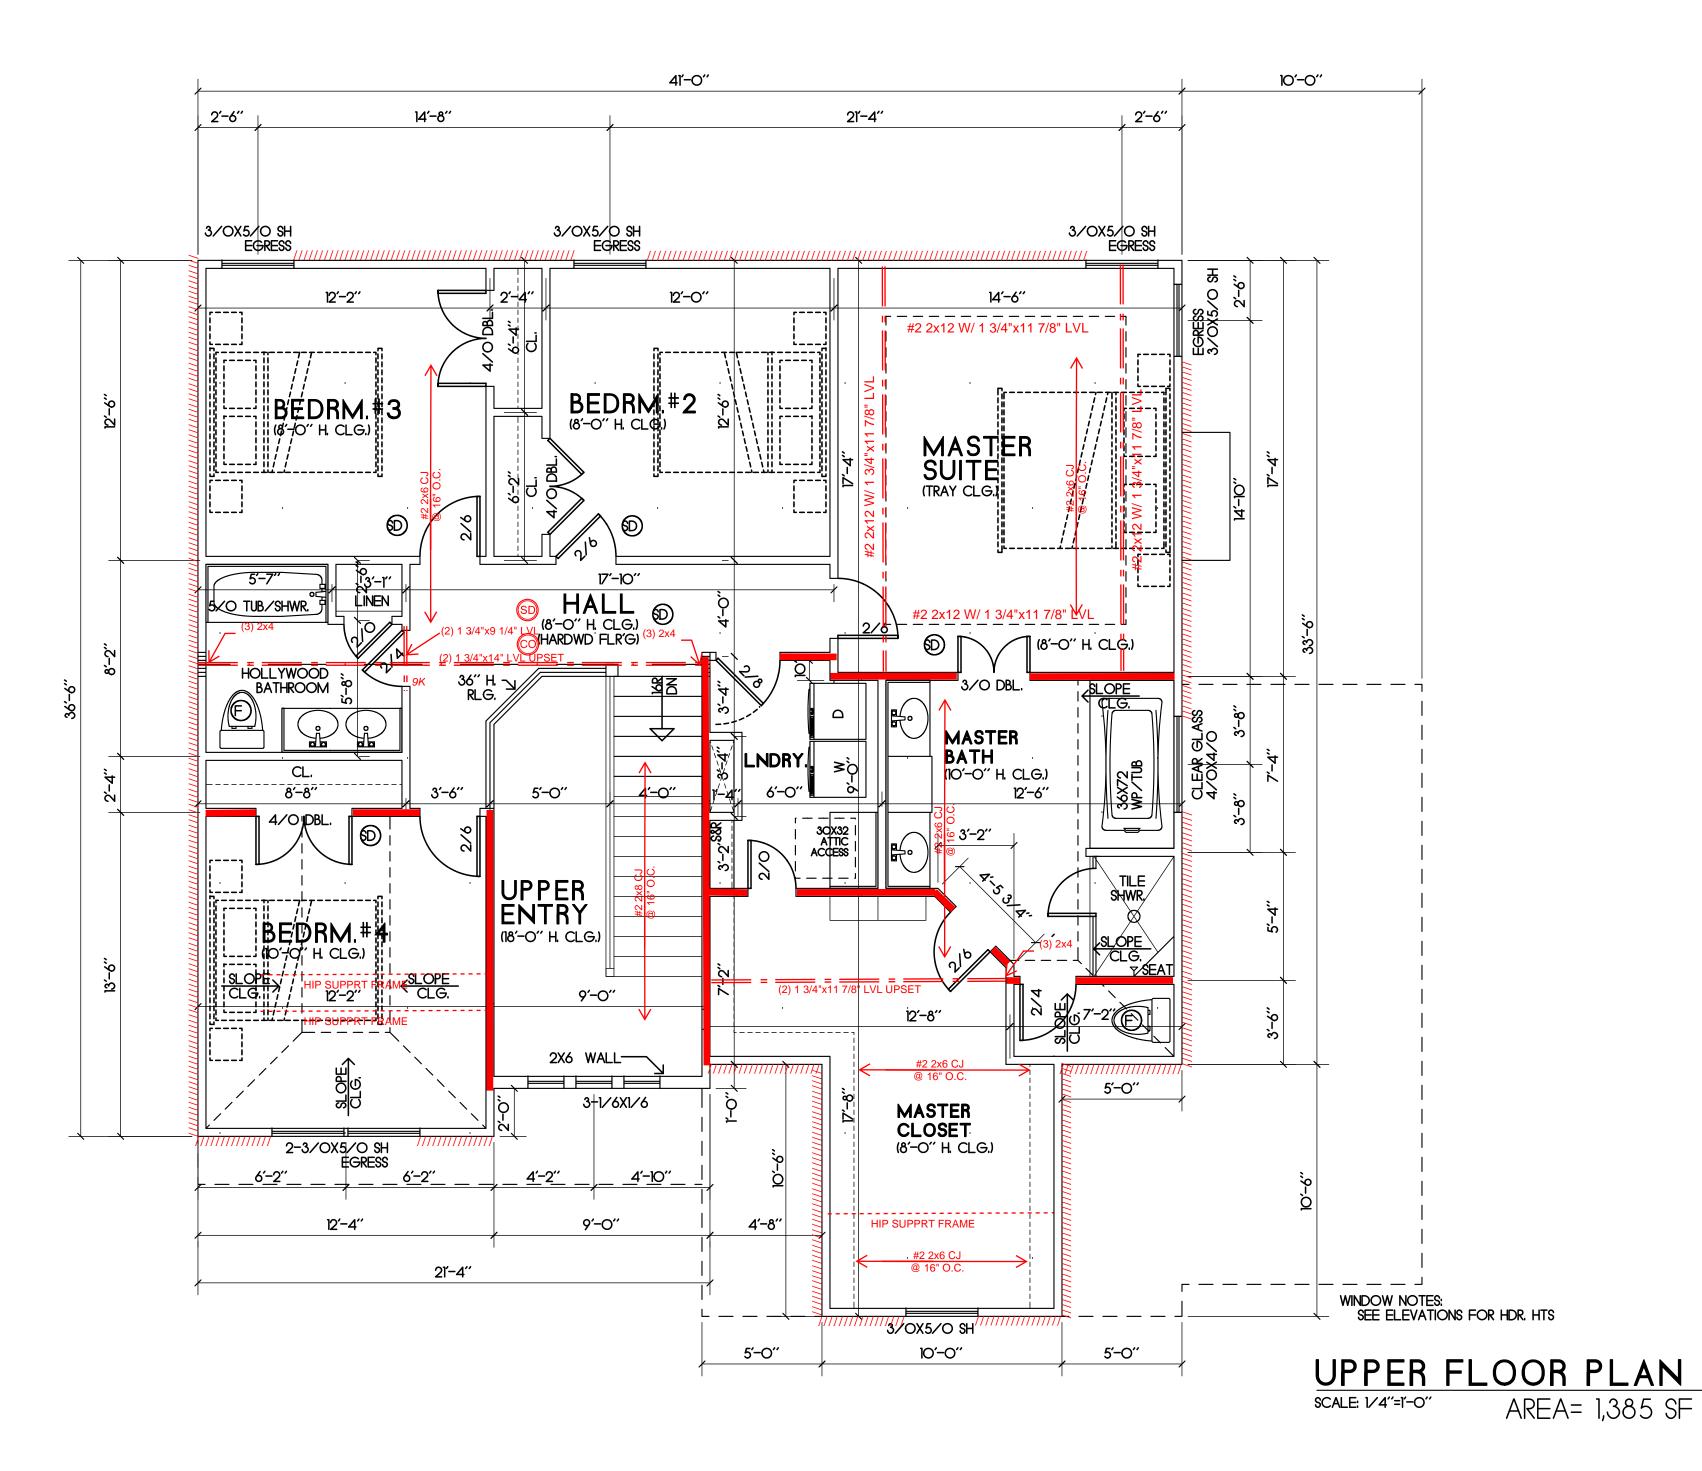



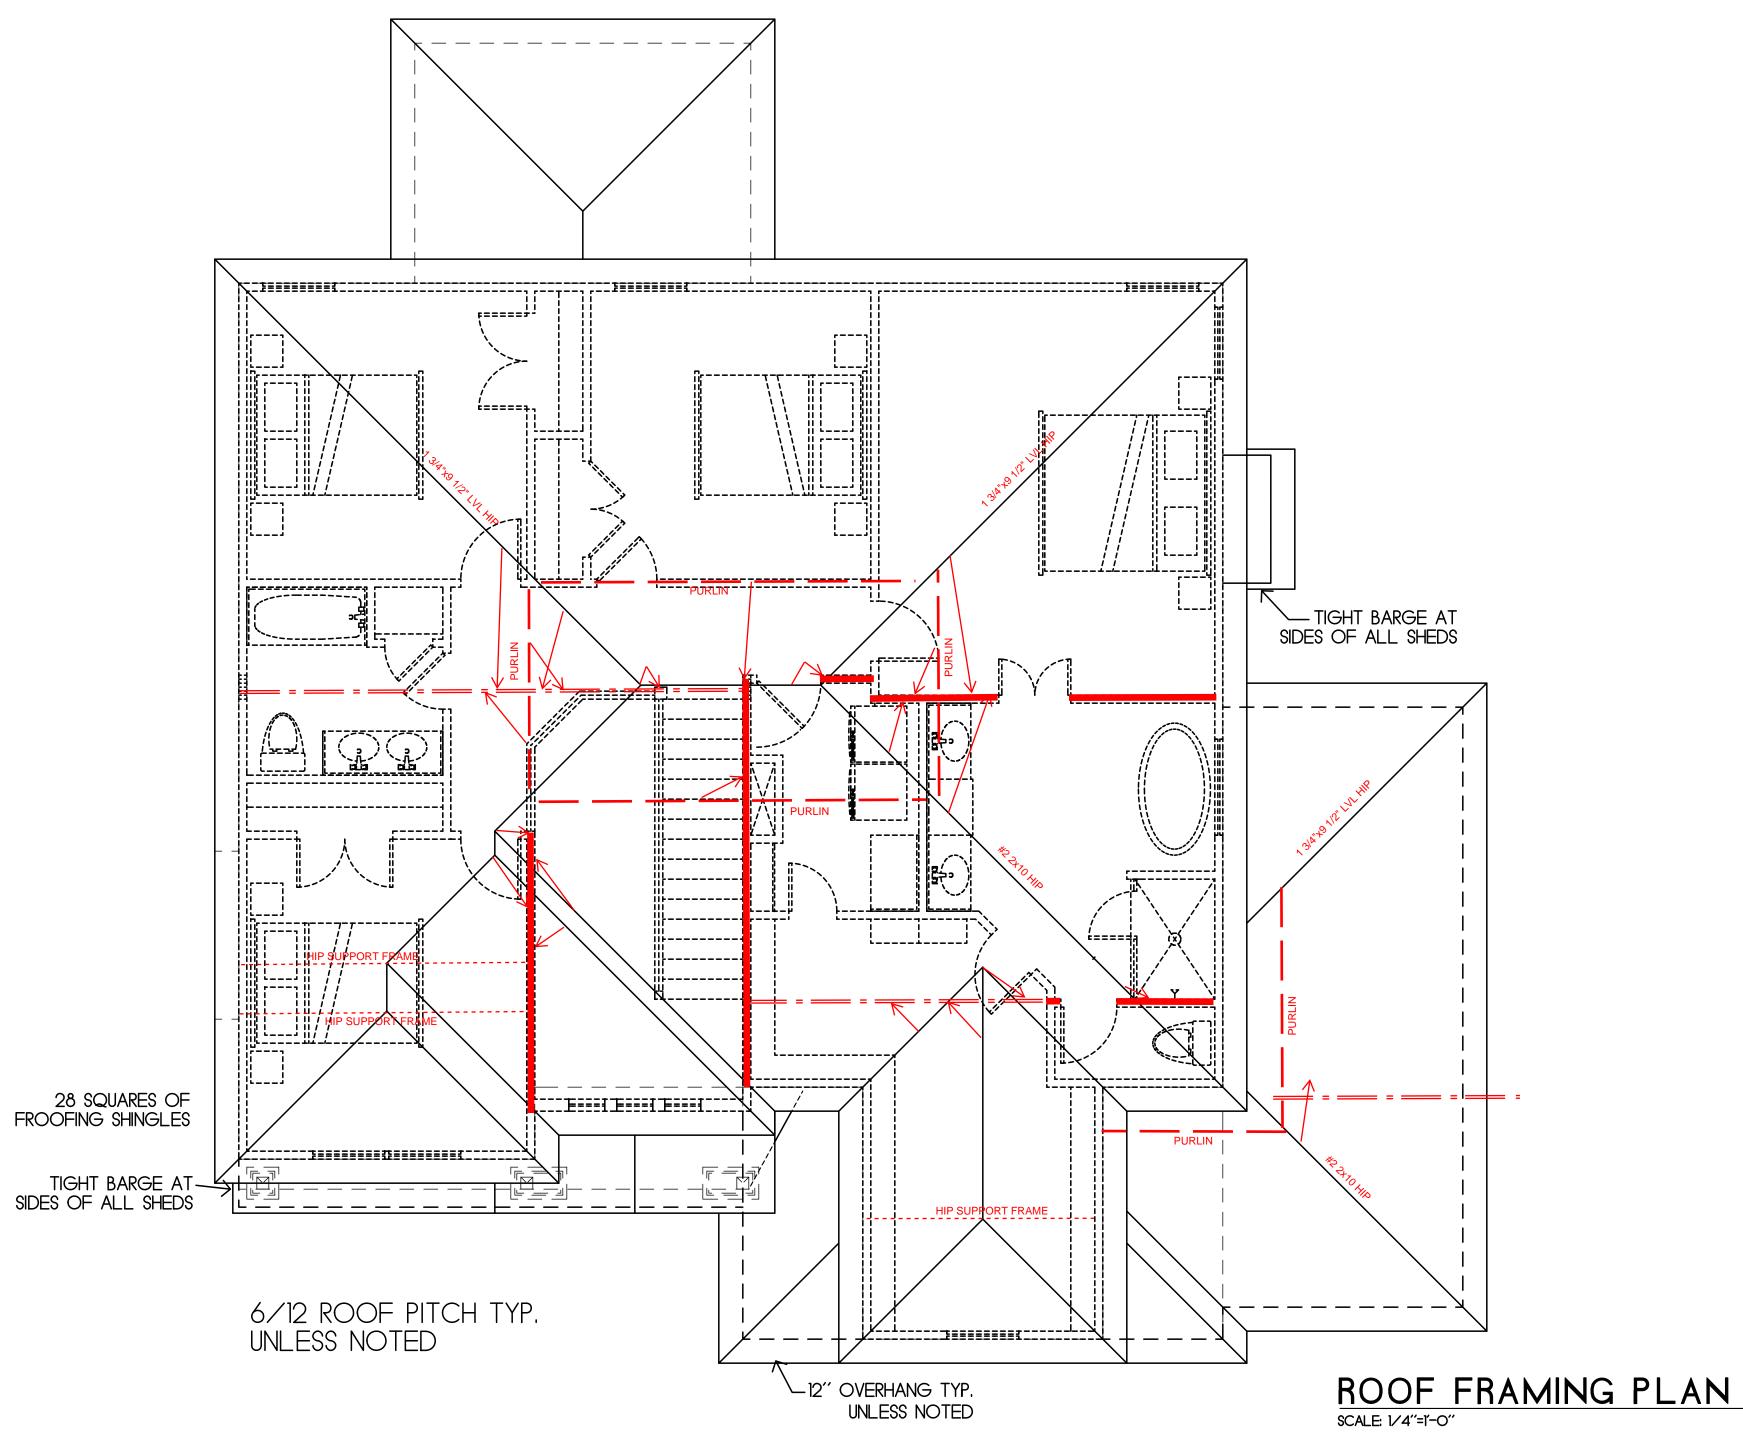

## <u>NOTES</u>

### ROOF DESIGNED FOR LIGHT ROOF COVERING 30PSF TOTAL LOAD [10PSF DL, 20PSF LL (SL)]

RAFTERS (DOUG-FIR, OR EQUAL): SEE SPAN CHARTS BELOW

CODE MINIMUM

RAFTERS #2-2x6

#2-2x6	@16" O.C.	14'-1"
#2 <b>-</b> 2x8	@24" O.C.	15'-1"
#2 <b>-</b> 2x8	@16" O.C.	18'-5"
#2 <b>-</b> 2x10	@24" O.C.	18'-5"
#2-2x10	@16" 0 C	22' 6"

SPACING @24" O.C

 #2-2x10
 @16" O.C.

 NOTE: CODE MINIMUM L/240 DEFLECTION

## GREATER THAN CODE

RAFTERS	SPACING	MAX HORIZONTAL CLEARSPAN
#2-2x6	@24" O.C.	8'-6"
#2-2x6	@16" O.C.	9'-9"
#2-2x8	@24" O.C.	11'-3"
#2-2x8	@16" O.C.	12'-9"
#2-2x10	@24" O.C.	14'-3"
#2-2x10	@16" O.C.	16'-3"

MAX HORIZONTAL CLEARSPAN

11'-11"

DEFLECTION = L/360 LIVE LOAD, L/240 TOTAL LOAD VAULTS TO BE 2x10 DEPTH

### ALL RIDGES, HIPS, AND VALLEYS NOT MARKED SHALL BE (1) NOMINAL SIZE LARGER THAN THE INTERSECTING RAFTERS

PURLINS ARE 2x6 MIN. PURLIN STRUTS ARE AT 4'-0" O.C.

PURLIN STRUTS SHALL BE INSTALLED AT NOT LESS THAN A 45 DEGREE ANGLE WITH THE HORIZONTAL

ALL PURLINS STRUTS SHALL HAVE A MAXIMUM UNBRACED LENGTH OF 8'-0" PURLINS STRUTS SHALL BE CONSTRUCTED IN A "T"

CONFIGURATION AND PER THE FOLLOWING CHART

PURLIN STRUT	MAX PURLIN STRUT LENGTH
(2) 2x4	8'-0"
(1) 2x4 & (1) 2x6	12'-0"
(1) 2x6 & (1) 2x8	20'-0"
(2) 2x6 & (1) 2x8	30'-0"
CONSULT ARCH./ENGR.	>30'-0"

SEE DETAILS 1, 5, 6, 7, 11, 12, 13, & 14 ON S-1.2 FOR ROOF FRAMING AND INSULATION OPTIONS

——— – PURLIN

- LOAD BEARING WALL
 - LOAD BEARING BEAM/

EARING BEAM/ GIRDER PER PLAN

Branch Stankanger Stankager Stankanger Stankanger Stankanger Stankan
C C C C C C C C C C C C C C C C C C C
<b>SAB CONSTRUCTION, LLC</b> E721 - REDBUD 2354 SW OLD PORT RD., LEE'S SUMMIT, MO 64082 RENCITAR DE LEE'S SUMMIT, MO 64082
HD#: 41256 DATE: 03/16/202 CHECKED BY: CLS NO. ISSUE/REVISION Revision Date

PLANS DRAWN BY OTHERS

**S-0.5** RELEASE FOR © 2020 HD ENGINGERNS & REJECTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 05/17/2021

# **ALLOWABLE LOADS FOR PNEUMATIC OR MECHANICALLY DRIVEN NAILS AND STAPLES**

	NAIL GUN		PENETRATION	AL	LOWABLE LO	ADS (IN POUN	DS)	BUILDING COMPONENT	FASTEN TO	FASTEN WITH		
FASTENER DESCRIPTION	NAILS/	WIRE GA.	REQUIRED INTO MAIN MEMBER FOR LATERAL	LATERAL	STRENGTH	WITHDRAW	AL STRENGTH		RIDGE / VALLEY / HIP	TOENAIL W/ (4) 16D, FACENAIL W/ (3) 16D		
	WIRE DIA.	0/1	STRENGTH (IN.)	SP	DF/L	SP	DF/L		PLATE	TOENAIL W/ (3) 10D		
16 GA. STAPLE	.063	16	1	51		36	32	RAFTERS	LEDGER STRIPS SUPPORTING JOISTS OR RAFTERS	FACENAIL W/ (3) 16D		
15 GA. STAPLE	.072	15	1	64		42	37		COLLAR TIE TO RAFTERS	FACENAIL W/ (3) 10D		
14 GA. STAPLE	.080	14	1	75		46	41		TOP PLATE	TOENAIL W/ (3) 8D @ EACH END		
6d COOLER NAIL									WHERE CLG JST RUN PARALLEL TO RAFTERS FAC			
6d SINKER NAIL	.092	13	1	46		27	23	CEILING JOISTS	LAPS OVER PARTITIONS	FACENAIL W/ (3) 10D		
6d BOX NAIL									BLOCKING BETWEEN JOISTS OR RAFTERS TO TOP PLATE	TOENAIL W/ (3) 8D		
6d CASING NAIL	.099	12-1/2	1-1/8	61	55	31	24					
7d COOLER NAIL									BUILT-UP BEAMS, 2" LUMBER LAYERS, FACENAIL OPPOSITE SIDES, (2) @ EACH END PLUS	10D @ 32" OC STAGGERED, TOP & BOTTOM, OPPOSITE SIDES		
6d COMMON NAIL												
8d COOLER NAIL								BEAMS	BUILT-UP BEAMS OF ENGINEERED LUMBER, FACE NAIL OPPOSITE SIDES	(2) ROWS @ 12" OC		
8d SINKER NAIL	.113	11-1/2	1-1/4	79	72	35	28		BUILT-UP HEADER, TWO PIECES W/ 1/2" SPACER	16D @16" OC ALONG EDGES		
8d BOX NAIL									BUILT-UP HEADER, TWO PIECES, NO 1/2" SPACER	3" x 0.131" NAILS @ 12" OC ALONG EDGE		
8d CASING NAIL												
6d RING SHANK NAIL									BEARING	TOENAIL W/ (2) 18D @ EACH END		
d SCREW SHANK NAIL						41 32			RIM JOIST TO SILL OR TOP PLATE	TOENAIL W/ 8D COMMON OR 10D BO> NAILS @ 6" OC		
8d RING SHANK NAIL	.120	11	1-3/8	89	81		32		JOIST TO SILL OR GIRDER	TOENAIL W/ (3) 8D		
d SCREW SHANK NAIL								FLOOR JOISTS				
10d Cooler Nail									JOIST TO RIM JOIST BRIDGING TO JOIST	FACENAIL W/ (3) 16D TOENAIL W/ (2) 8D		
10d Sinker Nail	.128	10-1/2	1-1/2	89	81	36	31					
12d Short										I-JOIST TO BEARING PLATE	TOENAIL W/ (2) 8D - ONE INTO EACH SIDE LEAST 1 1/2" FROM THE END	
10d Box Nails 12d Box Nails	.128	10-1/2	1-1/2	101	93	40	31		RIM JOIST TO I-JOIST	FACENAIL W/ (2) 10D BOX NAILS - ONE IN EACH FLANGE		
10d Casing Nails									SOLE PLATE TO LSL RIM BOARD	16D BOX NAILS @ 12" OC		
8d Common Nails	.131	10-1/4	1-1/2	106	97	41	32		SINGLE JOIST HANGERS *	10D FACENAILS AND TOENAILS		
16d Short			1 1/2	100			02		DOUBLE JOIST HANGERS *	16D FACENAILS AND TOENAILS		
12d Sinkers	.135	10	1-1/2	113	103	42	33		TOP & SOLE PLATE TO STUD	END NAIL W/ (2) 16D		
16d Box Nails	.100	10	1-1/2	115	100	72			STUD TO SOLE AND TOP PLATE	TOENAIL W/ (4) 8D		
10d Ring Shank Nails									DOUBLE TOP PLATES	FACENAIL W/ 16D @ 16" OC		
10d Screw Shank Nails	.135	10	1-5/8	113	103	46	36		DOUBLE TOP PLATE LAP SPLICE	FACENAIL W/ (8) 16D		
12d Ring Shank Nails											TOP PLATE LAPS & INTERSECTIONS	FACENAIL W/ (2) 16D
12d Screw Shank Nails										DOUBLE STUDS	FACENAIL W/ 16D @ 24" OC	
10d Common Nails									BUILT-UP CORNER STUDS	FACENAIL W/ 16D - 2 ROWS @ 24" OC		
12d Common Nails 16d Sinker Nails	.148	9	1-5/8	128	118	46	36		STEEL "X" BRACING	FACENAIL W/ (2) 16D IN EACH TOP & BOTTOM PLATE & (1) 8D PER STUD		
20d Box Nails	. 140	9	1-0/0	120	110	40	30	WALLS	SOLE PLATE TO JOIST OR BLOCKING	FACENAIL W/ 16D @ 16" OC		
30d Box Nails												
16d Ring Shank Nails		- -							SOLE PLATES TO JOIST OR BLOCKING AT BRACED WALL LINES, PERPENDICULAR TO FRAMING	FACENAIL W/ (3) 16D @ 16" OC ALONG BRACED WALL PANEL		
16d Screw Shank Nails	.148	9	1-3/4	128	118	50	40					
16d Common Nails		_		. – .					TOP PLATE TO JOIST OR BLOCKING AT BW LINES, PERPENDICULAR TO FRAMING	TOENAIL W/ 8D @ 6" OC ALONG BRACED WALL PANEL		
40d Box Nails	.162	8	1-3/4	154	141	50	40					
20d Ring Shank Nails		_							SOLE PLATES TO JOIST OR BLOCKING AT BW LINES PARALLEL TO FRAMING, BLOCKING @ 16" OC	FACENAIL W/ (3) 16D @ 16" OC ALONG E PANEL & AT EACH BLOCK		
20d Screw Shank Nails	.177	7	2-1/8	178	163	59	47					
20d Sinker Nails	.177	7	2-1/8	178	163	54	43		TOP PLATE TO JOIST OR BLOCKING AT BW LINES, PARALLEL TO FRAMING, BLOCKING @ 16" OC	TOENAIL W/ 8D @ 6" OC ALONG BW PANEL & AT EACH BLOCK		
20d Common Nails	.148	9	2-1/8	170	166	59	47		NON-STRUCT. SIDING OVER STRUCT. SHEATHING	(1) 6D BOX NAIL IN EACH STUD		
30d Sinker Nails	. 140	9	2-1/0	170	100	29	47		FIBER CEMENT PLANK SIDING	(1) 6D GALVANIZED NAIL IN EACH STU		
		•	I		•		·			· · · · · · · · · · · · · · · · · · ·		

# SHEATHING SCHEDULE

ALL SHEATHING MATERIALS TO BE APPLIED PERPENDICULAR TO JOISTS AND ENDS STAGGERED

BUILDING COMPONENT	MATERIAL	FASTENING				
ROOF SHEATHING	7/16" PLYWOOD	16 GA X 1 3/4" STAPLES @ 6" OC EDGES & 12" OC IN FIELD				
NOOF OHEATTING	1x 4 #3 FURRING	1/2" CROWN STAPLES				
	3/4" T&G YELLOW	14 GA X 1 3/4" STAPLES @ 6" OC EDGES & 12" OC IN FIELD				
FLOOR SHEATHING	PINE PLYWOOD	12.5 GA X 1 1/2" RING OR SCREW SHANK NAILS @ 6" OC EDGES & 12" OC IN FIELD				
WALL COVERING	1/2" GYPSUM SHEATHING	6D COMMON NAILS: 1 5/8" GALVANIZED STAPLES; 1 1/4" SCREWS, TYPE W OR S @ 4" OC EDGES & 8" OC IN FIELD				
CEILING COVERING	1/2" GYPSUM SHEATHING	7" OC NAILED / 12" OC SCREWED W/ 13GA, 1 3/8" LONG, 19/64" HEAD; 0.098 Ø, 1 1/4" LONG, ANG-RINGED; 5D COOLER NAIL, 0.086 Ø, 1 5/8" LONG, 15/64" HEAD; OR GYP BD NAIL, 0.086 Ø, 1 5/8" LONG, 19/64" HEAD				
EXTERIOR WALL	7/16" APA RATED SHEATHING	8D COMMON NAILS @ 6" OC EDGES & 12" OC IN THE FIELD				
SHEATHING	RATED PANEL SIDING, RATED 16" O.C. 7/16" THICK	8D BOX OR SINKER NAILS @ 6" OC EDGES & 12" OC IN THE FIELD				

SEALS.

# FRAME FASTENING SCHEDULE

\* JOIST HANGER NOTES: 1) NO JOIST HANGER NAILS ALLOWED FOR TOENAILS, 2) NO GUN NAILS OR SCREWS ALLOWED IN CONNECTORS, 3) TOENAILS SHALL ALWAYS BE A FULL 3" OR 3.5" NAIL

COLUMN CONNECTION TO STEEL BEAMS SHALL BE WITH A CLIP POST CAP WITH ALL FOUR TAB EARS BENT AROUND THE BOTTOM FLANGE OF THE BEAM. FOR A BEARING PLATE, FOUR HOLES SHALL BE DRILLED IN THE BOTTOM FLANGE OF THE STEEL BEAM TO MATCH THE HOLE PATTERN OF THE PLATE. 1/2"x2" BOLTS SHOULD THEN BE INSTALLED WITH A FLAT WASHER, LOCK WASHER, AND A NUT IN EACH OF THE HOLES. THE POST CAP MAY BE WELDED TO THE STEEL BEAM IN ACCORDANCE WITH AWS D1.1-92 AS AN ALTERNATIVE, AND WOULD NEED TO BE INSPECTED BY AN AWS-CERTIFIED INSPECTOR.

# DUCT SEALING METHOD, PER IRC2018 W1103.3.2

N1103.2.2 (R403.2.2) SEALING (MANDATORY) DUCTS, AIR HANDLERS, AND FILTER BOXES SHALL BE SEALED. JOINTS AND SEAMS SHALL COMPLY WITH SECTION M1601.4.1 OF THIS CODE.

EXCEPTIONS: 1. AIR-IMPERMEABLE SPRAY FOAM PRODUCTS SHALL BE PERMITTED TO BE APPLIED WITHOUT ADDITIONAL JOINT

2. WHERE A DUCT CONNECTION IS MADE THAT IS PARTIALLY INACCESSIBLE, THREE SCREWS OR RIVETS SHALL BE EQUALLY SPACED ON THE EXPOSED PORTION OF THE JOINT SO AS TO PREVENT A HINGE EFFECT. 3. CONTINUOUSLY WELDED AND LOCKING-TYPE LONGITUDINAL JOINTS AND SEAMS IN DUCTS OPERATING AT STATIC PRESSURE LESS THAN 2 INCHES OF WATER COLUMN (500 Pa) PRESSURE CLASSIFICATION SHALL NOT REQUIRE ADDITIONAL CLOSURE SYSTEMS.

DUCT TIGHTNESS SHALL BE VERIFIED BY EITHER OF THE FOLLOWING:

1. POST CONSTRUCTION TEST: TOTAL LEAKAGE SHALL NOT BE LESS THAN OR EQUAL TO 4 CFM (113.3 L/MIN) PER 100FT<sup>2</sup> (9.29m<sup>2</sup>) OF CONDITIONED FLOOR AREA WHEN TESTED AT A PRESSURE DIFFERENTIAL OF 0.1 INCHES W.G. (25 Pa) ACROSS THE ENTIRE SYSTEM, INCLUDING THE MANUFACTURER'S AIR HANDLER ENCLOSURE. ALL REGISTER BOOTS SHALL BE TAPED OR OTHERWISE SEALED DURING THE TEST.

2. ROUGH-IN TEST: TOTAL AIR LEAKAGE SHALL BE LESS THAN OR EQUAL TO 4 CFM (113.3 L/MIN) PER 100FT<sup>2</sup> (9.29m<sup>2</sup>) OF CONDITIONED FLOOR AREA WHEN TESTED AT A PRESSURE DIFFERENTIAL OF 0.1 INCHES W.G. (25 Pa) ACROSS THE ENTIRE SYSTEM, INCLUDING THE MANUFACTURER'S AIR HANDLER ENCLOSURE. ALL REGISTERS SHALL BE TAPED OR OTHERWISE SEALED DURING THE TEST. IF THE AIR HANDLER IS NOT INSTALLED AT THE TIME OF THE TEST, TOTAL AIR LEAKAGE SHALL BE LESS THAN OR EQUAL TO 3 CFM (85 L/MIN) PER 100FT<sup>2</sup> (9.29m<sup>2</sup>) OF CONDITIONED FLOOR AREA. EXCEPTION: THE TOTAL LEAKAGE IS NOT REQUIRED FOR DUCTS AND AIR HANDLERS LOCATED ENTIRELY WITHIN THE BUILDING THERMAL ENVELOPE.

GENERAL NOTES

OR DEVIATIONS ARE MADE FROM THESE PLANS THE CONTRACTOR SHALL NOTIFY THE APPROPRIATE AUTHORITY AND THE ENGINEER TO EVALUATE THE CHANGES AND MAKE ANY APPROPRIATE MODIFICATIONS TO THE PLANS. 2. WHERE DISCREPANCIES EXIST BETWEEN THE STANDARD COMMENTS, NOTES FOR THE DESIGN PROFESSIONAL OR THE CODE, THE MOST RESTRICTIVE SHALL APPLY. 3. THE CONTRACTUAL OBLIGATION OF THESE PLANS IS TO PROVIDE THE OWNER/BUILDER AND THE AHJ WITH A SET OF PLANS THAT MEET AHJ AND CODE REQUIREMENTS FOR A SINGLE SITE CONSTRUCTION PROJECT. UNLESS REQUESTED BY OUR CLIENT, CODE/AHJ MINIMUM DESIGNS WILL BE UTILIZED. ALSO, UNLESS REQUESTED BY THE OWNER, OUR FIRM CAN NOT AND WILL NOT BE AUTHORIZED TO VISIT THE SITE TO EVALUATE THE SITE OR ANY CONSTRUCTION FOR THIS PROJECT. IMPLEMENTATION OF ALTERNATES TO THE DESIGNS INCLUDING BUT NOT LIMITED TO PIER DESIGNS, FOUNDATION ALTERATIONS, OR ANY STRUCTURAL CHANGES NOT PROVIDED BY HD ENGINEERING OR A PROFESSIONAL REFERRED BY HD ENGINEERING SHALL RELEASE HD ENGINEERING FROM ALL LIABILITY ASSOCIATED WITH THIS DESIGN. 4. OUR FIRM HIGHLY RECOMMENDS THAT ANY SITE WITH GREATER THAN A 15% GRADE, ANY SITE WHERE A PREVIOUS STRUCTURE WAS LOCATED, OR ANY SITE WITH POTENTIAL FILL MATERIAL OR A POTENTIAL SOIL BEARING CAPACITY BELOW 1500 PSF SHOULD BE EVALUATED BY OUR FIRM OR AN HD ENGINEERING REFERRED GEOTECHNICAL FIRM PRIOR TO PLACING FOOTINGS. THE ATTACHED PLANS HAVE BEEN DESIGNED WITH THE UNDERSTANDING THAT OUR FIRM HAS NOT AND CAN NOT VISIT OR INSPECT THE SITE WITHOUT WRITTEN CONSENT/REQUEST OF THE OWNER/BUILDER. DUE TO THIS FACT OUR FIRM CAN ONLY DESIGN THE ATTACHED PLANS TO CERTAIN CODE REQUIREMENTS WHICH ARE DETAILED THROUGHOUT THE PLAN AND ATTACHED DETAIL SHEETS, IF THE OWNER DESIRES GREATER THAN CODE DESIGNS THAT REQUEST MUST BE MADE CLEARLY AND IN WRITING PRIOR TO ENGINEERING OF THE PLAN. 5. DUE TO THE WIDE VARIETY OF SOIL CONDITIONS IN OUR AREA AND THE WIDE VARIETY OF PLASTICITY INDEX AND SOIL BEARING CAPACITIES OUR FIRM RECOMMENDS ALL SITES BE EVALUATED BY HD ENGINEERING OR AN HD ENGINEERING REFERRED GEOTECHNICAL FIRM PRIOR TO PLACEMENT OF ANY "STANDARD" FOUNDATIONS .

FOUNDATION NOTES

REQUIREMENTS BASED ON ACTUAL SITE CONDITIONS 2. FOUNDATION WALLS SHALL BE DAMP-PROOFED PER IRC SECTION R406. 3. PROVIDE A MINIMUM 4" PERFORATED DRAIN AROUND USABLE SPACE BELOW GRADE OR OTHER EQUIVALENT MATERIALS PER IRC SECTION 405.1. THE PIPE SHALL BE COVERED WITH NOT LESS THAN 6" OF WASHED GRAVEL OR CRUSHED ROCK. THE DRAIN SHALL DAYLIGHT TO THE EXTERIOR BELOW THE FLOOR LEVEL OR TERMINATE IN A MINIMUM 20 GALLON SUMP PIT.

4. FOUNDATION DESIGN SHALL BE BASED ON A MINIMUM SOIL BEARING CAPACITY OF 1500 PSF. 5. FOOTINGS SHALL BE A MIN. OF 16" WIDE AND 8" DEEP W/ (2) #4 BARS CONTINUOUS, LOCATED A MIN. OF 3" CLEAR FROM BOTTOM. FOOTINGS SHALL BE A MINIMUM OF 36" BELOW GRADE FOR FROST PROTECTION.

6. COLUMN PADS SHALL BE A MINIMUM OF 24"X24"X8" WITH (3) #4 BARS EACH WAY. 7. FOUNDATION WALLS SHALL BE A MINIMUM 8" THICK W/ MINIMUM #4 BARS @ 24" O.C. HORIZONTAL AND VERTICAL W/ THE TOP BAR WITHIN 8" OF THE TOP OF THE WALL UNLESS NOTED OTHERWISE ON PLAN.

8. REINFORCEMENT SHALL LAP A MINIMUM OF 24"

9. INTERIOR BEARING WALLS AND COLUMNS SHALL BE ISOLATED FROM THE BASEMENT FLOOR SLAB. 10. INTERIOR NON-BEARING WALLS, OTHER THAN THOSE RESTING DIRECTLY ON THE FOOTING, SHALL BE ISOLATED FROM THE FLOOR FRAMING ABOVE BY A SEPARATION OF 1/2" 11. CONCRETE FLOOR SLABS ON GRADE, SHALL BE A MINIMUM 4" THICK OVER A MINIMUM 4" BASE OF SAND, GRAVEL, OR CRUSHED STONE. BASEMENT SLABS SHALL HAVE

A MIN. 6 MIL POLYETHYLENE OR APPROVED VAPOR RETARDER WITH JOINTS LAPPED NOT LESS THAN 6" SHALL BE PLACED BETWEEN THE FLOOR SLAB AND THE BASE COURSE

DESIGN.

SPACED NOT MORE THAN 3' ON CENTER AND WITHIN 12" OF EACH END PIECE PER IRC SECTION R403.1.6. 14. FOUNDATION WINDOW WELLS FOR SECONDARY MEANS OF EGRESS SHALL PROVIDE A MINIMUM 3'X3' HORIZONTAL AREA. 15. THE BASE OF ALL FOOTING EXCAVATIONS SHOULD BE FREE OF ALL WATER AND LOOSE MATERIAL PRIOR TO PLACING CONCRETE. CONCRETE SHOULD BE PLACED AS SOON AS POSSIBLE AFTER EXCAVATING SO THAT EXCESSIVE DRYING OR DISTURBANCE OF BEARING MATERIALS DOES NOT OCCUR. SHOULD THE MATERIALS AT BEARING LEVEL BECOME EXCESSIVELY DRY OR SATURATED. WE RECOMMEND THAT THE AFFECTED MATERIAL BE REMOVED PRIOR TO PLACING CONCRETE 16. IT IS RECOMMENDED THAT ALL FOOTING EXCAVATIONS BE EVALUATED AND TESTED BY A GEOTECHNICAL ENGINEER IMMEDIATELY PRIOR TO PLACEMENT OF FOUNDATION CONCRETE. UNSUITABLE AREAS IDENTIFIED AT THIS TIME SHOULD BE CORRECTED. CORRECTIVE PROCEDURES WOULD BE DEPENDENT UPON CONDITIONS ENCOUNTERED AND MAY INCLUDE DEEPENING OF FOUNDATION ELEMENTS, OR UNDERCUTTING OF UNSUITABLE MATERIALS AND REPLACEMENT WITH ENGINEERED FILL.

### STAIRWAY NOTES:

1. STAIRWAYS SHALL PROVIDE A MAXIMUM 7 3/4" RISE AND MIN. 10" RUN. 2. PROVIDE MINIMUM 36" GUARDRAILS ON THE OPEN SIDES OF RAISED FLOORS, PORCHES AND BALCONIES. MINIMUM 34" GUARDRAILS ON THE OPEN SIDES OF STAIRWAYS LOCATED MORE THAN 30" ABOVE THE FLOOR OR GRADE BELOW. GUARDRAIL ENCLOSURES SHALL HAVE INTERMEDIATE RAILS OR ORNAMENTAL PATTERNS THAT DO NOT ALLOW PASSAGE OF A SPHERE 4" IN DIAMETER

3. EACH STAIRWAY OF 3 OR MORE RISERS SHALL PROVIDE A CONTINUOUS HANDRAIL ON AT LEAST ONE SIDE BETWEEN 34" AND 38" ABOVE THE NOSING OF THE THREADS. 4. HANDRAILS SHALL HAVE A CIRCULAR CROSS-SECTION OF 1 1/4" MINIMUM TO 2" MAXIMUM OR OTHER APPROVED GRASPABLE SHAPE PER IRC SECTION R311.7.8.5 5. PROVIDE A MINIMUM 6'-8" OF HEADROOM CLEARANCE IN STAIRWAYS. 6. ENCLOSED ACCESSIBLE SPACE UNDER STAIRWAYS SHALL HAVE WALLS AND THE UNDERSIDE OF THE STAIR AND LANDING PROTECTED WITH 1/2" GYPSUM BOARD ON ENCLOSURE SIDE

IRCR311.7.5.2.1.

<u>GLAZING NOTES:</u> 1. GLAZING IN HAZARDOUS LOCATIONS AS IDENTIFIED IN IRC SECTION R308.4 SHALL BE OF APPROVED SAFETY GLAZING MATERIALS. GLASS IN STORM DOORS, INDIVIDUAL FIXED OR OPERABLE PANELS ADJACENT TO A DOOR WHERE THE NEAREST VERTICAL EDGE IS WITHIN A 24" ARCH OF THE DOOR IN A CLOSED POSITION AND WHOSE BOTTOM EDGE IS WITHIN 60" OF THE FLOOR, WALLS ENCLOSING STAIRWAYS AND LANDINGS WHERE THE GLAZING IS WITHIN 60" OF THE TOP OR BOTTOM OF THE STAIR. ENCLOSURES FOR SPAS, TUBS, SHOWERS AND WHIRLPOOLS, GLAZING IN FIXED OR OPERABLE PANELS EXCEEDING 9 S.F. AND WHOSE BOTTOM EDGE IS LESS THAN 18" ABOVE THE FLOOR OR WALKING SURFACE WITHIN 36" 2. IN DWELLING UNITS, WHERE THE OPENING OF AN OPERABLE WINDOW IS LOCATED MORE THAN 72 INCHES ABOVE THE FINISHED GRADE OR SURFACE BELOW, THE LOWEST PART OF THE CLEAR OPENING OF THE WINDOW SHALL BE A MINIMUM OF 24 INCHES ABOVE THE FINISHED FLOOR OF THE ROOM IN WHICH THE WINDOW IS LOCATED. OPERABLE SECTIONS OF WINDOWS SHALL NOT PERMIT OPENINGS THAT ALLOW PASSAGE OF A 4 INCH DIAMETER SPHERE WHERE SUCH OPENINGS ARE  $\cap$ LOCATED WITHIN 24 INCHES OF THE FINISHED FLOOR. FRAMING NOTES: F 1. ALL LUMBER SIZES ARE FOR DOUGLAS FIR-LARCH UNLESS OTHERWISE NOTED.

2. ALL HEADERS TO BE A MINIMUM OF (2) #2-2X10'S UNLESS OTHERWISE NOTED.

3. BLOCK CANTILEVERS, DOOR JAMBS, AND OVER BEAMS. 4. ALL HEADERS/BEAMS TO BEAR ON A MINIMUM OF (1) 2X4 POSTS UNLESS NOTED OTHERWISE. 5. INTERIOR NON-BEARING WALLS, OTHER THAN THOSE RESTING DIRECTLY ON THE FOOTING SHALL BE ISOLATED FROM THE FLOOR FRAMING ABOVE 6. WHERE JOISTS RUN PARALLEL TO FOUNDATION WALLS, SOLID BLOCKING FOR A MINIMUM OF (2) JOIST SPACES SHALL BE PROVIDED AT A MAXIMUM OF 4' CENTERS TO TRANSFER LATERAL LOADS ON THE WALL TO THE FLOOR DIAPHRAGM. THE BLOCKING SHALL BE SECURELY NAILED TO THE JOISTS AND FLOORING. NAIL JOISTS AND

BLOCKING TO SILL PLATE WITH (4) 10D NAILS. 7. IF DUCTS ARE INSTALLED IN THE FIRST JOIST SPACE(S), NAIL 2X4'S FLAT AT 4' CENTERS WITHIN THE JOIST SPACE(S) AND THEN PROVIDE SOLID BLOCKING, INSTALLED UPRIGHT, IN THE NEXT TWO JOIST SPACES. SECURE THE 2X4'S TO THE SILL PLATE WITH (4) 10D NAILS. 8. ALL SILLS AND SLEEPERS SUPPORTED ON CONCRETE OR MASONRY AND FURRING ATTACHED TO CONCRETE OR MASONRY SHALL BE OF DECAY RESISTANT MATERIALS.

9. JOISTS UNDER BEARING PARTITIONS SHALL BE SIZED TO CARRY THE DESIGN LOAD IN ACCORDANCE WITH IRC SECTION R502.4. 10. JOISTS FRAMING FROM OPPOSITE SIDES OVER BEARING SUPPORTS SHALL LAP A MINIMUM OF 3" AND SHALL BE NAILED TOGETHER WITH A MINIMUM 10D FACE NAILS. 11. JOISTS FRAMING INTO A WOOD GIRDER OR BEAM SHALL BE SUPPORTED BY APPROVED FRAMING ANCHORS OR ON MINIMUM 2"X2" LEDGER STRIPS. 12. HEADER AND TRIMMERS SHALL BE OF SUFFICIENT CROSS SECTION TO SUPPORT THE FLOOR FRAMING. TRIMMER JOISTS SHALL BE DOUBLED WHEN THE HEADER IS

SUPPORTED MORE THAN 3' FROM THE TRIMMER JOIST BEARING. WHEN THE HEADER SPAN EXCEEDS 4', THE HEADER AND TRIMMER SHALL BE DOUBLED. 13. JOISTS AT SUPPORTS SHALL BE SUPPORTED LATERALLY AT THE ENDS BY FULL-DEPTH SOLID BLOCKING NOT LESS THAN 2" NOMINAL THICKNESS OR BY ATTACHMENT TO A HEADER, BAND OR RIM JOIST OR TO AN ADJOINING STUD OR OTHERWISE PROVIDED WITH LATERAL SUPPORT TO PREVENT ROTATION.

14. ALL WALL COVERINGS TO COMPLY WITH IRC SECTION 702 AND 703 15. ALL RAFTER / COLLAR TIES TO COMPLY WITH IRC SECTIONS 804

16. ALL RAFTERS TO HAVE 2x4 COLLAR TIES @ 48" OC IN UPPER 1/3 OF DISTANCE BETWEEN CEILING AND ROOF

17. BLOCKING BETWEEN JOISTS UNDER A PERPENDICULAR LOAD-BEARING WALL IS NOT REQUIRED 18. BOTTOM OF ALL FLOOR ASSEMBLIES SHALL BE PROVIDED WITH A 1/2" GYPSUM WALLBOARD MEMBRANE (IF REQUIRED BY LOCAL CODE)

19. I-JOIST AND FLOOR TRUSS SYSTEMS SHALL BE FIRE PROTECTED PER IRC AS ADOPTED BY AHJ 20. STUDS SHALL BE CONTINUOUS FROM THE FLOOR TO THE ROOF/ CEILING DIAPHRAGM PER IRC 602.3

## CONCRETE NOTES:

. CONCRETE SHALL BE AIR-ENTRAINED (5%-7%) WITH A MINIMUM COMPRESSIVE STRENGTH AT 28 DAYS OF 2500 PSI FOR BASEMENT AND INTERIOR FLOOR SLABS, 3000 PSI FOR BASEMENT AND FOUNDATION WALLS AND 3500 PSI FOR PORCHES, CARPORTS AND GARAGE FLOOR SLABS.

### EMERGENCY EGRESS AND RESCUE NOTES

1. PROVIDE ONE WINDOW FOR EACH BEDROOM THAT HAS A MINIMUM OPENABLE AREA OF 5.7 S.F. WITH A MINIMUM OPENABLE HEIGHT OF 24" AND WIDTH OF 21". IN ADDITION, THE OPENABLE PORTION OF EGRESS WINDOWS SHALL NOT EXCEED 44" ABOVE THE ADJOINING FLOOR OR PERMANENT STEP. 2. PROVIDE SMOKE ALARMS IN EACH SLEEPING ROOM, OUTSIDE OF EACH SLEEPING AREA AND ON EACH FLOOR INCLUDING BASEMENTS. ALARMS SHALL BE INTERCONNECTED IN SUCH A MANNER THAT THE ACTIVATION OF ONE ALARM WILL ACTIVATE ALL OF THE ALARMS IN THE DWELLING. 3. PROVIDE CARBON MONOXIDE ALARMS AS REQUIRED PER IRC. CARBON MONOXIDE ALARMS SHALL BE INSTALLED OUTSIDE OF EACH SEPARATE SLEEPING AREA. WHERE FUEL-BURNING APPLIANCES ARE LOCATED WITHIN A BEDROOM OR ITS ATTACHED BATHROOM, A CARBON MONOXIDE ALARM SHALL BE INSTALLED IN THE BEDROOM.

### GARAGE NOTES:

1. THE GARAGE FLOOR SHALL SLOPE TOWARDS THE GARAGE DOORWAYS OR SLOPE TO A TRENCH OR UNTRAPPED DRAIN THAT DISCHARGES DIRECTLY TO THE EXTERIOR ABOVE GRADE. 2. DOORS BETWEEN THE GARAGE AND DWELLING - MINIMUM 1 3/8" SOLID WOOD, SOLID OR HONEY-COMBED CORE STEEL DOOR NOT LESS THAN 1 3/8" THICK, OR 20 -

MINUTE FIRE - RATED EQUIPPED WITH SELF CLOSING DEVICE PER IRC2018 R302.5.1. 3. GARAGE VEHICLE DOORS AND FRAMES SHALL BE DESIGNED AND INSTALLED TO MEET THE 115-MPH 3-SECOND GUST LOADING PER DASMA 108 AND ASTM E 330-96 PER IRC2018 R301.2.1

4. THE GARAGE SHALL BE SEPARATED FROM THE DWELLING AND ITS ATTIC AREAS BY MINIMUM 5/8" GYPSUM BOARD APPLIED TO THE GARAGE SIDE. WHERE HABITABLE SPACE OCCURS ABOVE THE GARAGE, THE FLOOR CEILING ASSEMBLY SHALL BE PROTECTED WITH MINIMUM 5/8" TYPE X GYPSUM BOARD ON THE GARAGE CEILING. WHERE A FLOOR/CEILING SPACE IS PROVIDED ABOVE THE GARAGE COLUMNS AND BEAMS SUPPORTING THE SEPARATION SHALL ALSO BE PROTECTED WITH 5/8" GYPSUM BOARD OR EQUIVALENT.

5. GARAGE DOOR H-FRAME FOR THE ATTACHMENT OF THE TRACK AND COUNTER BALANCE SHALL CONSIST OF THE FOLLOWING: 2x6 VERTICAL JAMBS RUNNING FROM FLOOR TO CEILING ATTACHED WITH 1 3/4"X.120" NAILS AT 7" CENTERS STAGGERED WITH (7) 3 1/4"X.120" NAILS THRU THE JAMB INTO THE HEADER, MINIMUM 2X8 HEADER

FOR ATTACHMENT OF COUNTER BALANCE SYSTEM. 6. ANY ATTACHED GARAGE TO THE MAIN HOUSE SHALL BE PROVIDED WITH A SINGLE HEAT DETECTOR. HEAT DETECTOR SHALL BE HARDWIRED AND INTERCONNECTED WITH THE HOUSEHOLD SMOKE ALARM SYSTEM. HEAT DETECTOR SHALL BE LISTED FOR THE AMBIENT ENVIRONMENT AND INSTALLED PER MANF. INSTRUCTIONS.

### MECHANICAL/INSULATION: 1. BUILDING ENVELOPE INSULATION SHALL COMPLY WITH IRC TABLE N1102.1.1 OR THE 2018 IECC.

2. BUILDING THERMAL ENVELOPE IS REQUIRED TO BE SEALED PER 2018 IRC N1102.4.1 & TABLE N1102.4.1.1.

**VENTILATION** 1. ENCLOSED ATTICS SHALL HAVE CROSS VENTILATION FOR EACH SEPARATE SPACE BY VENTILATING OPENINGS PROTECTED AGAINST THE ENTRANCE OF RAIN OR SNOW. VENTILATING OPENINGS SHALL BE PROVIDED WITH CORROSION-RESISTANT WIRE MESH, WITH 1/8" TO 1/4" OPENINGS. THE TOTAL FREE VENTILATING AREA SHALL NOT BE LESS THAN 1/150 OF THE AREA OF SPACE VENTILATED, EXCEPT WHERE THE VENTILATORS AREA LOCATED IN THE UPPER PORTION OF THE SPACE TO BE VENTILATED THE REQUIRED AREA MAY BE REDUCED TO 1/300.

1. PLANS SHALL COMPLY WITH THE 2018 INTERNATIONAL RESIDENTIAL CODE, IECC AS ADOPTED BY AHJ, AND ALL AMENDMENTS AS ADOPTED BY THE AHJ, IF ANY CHANGES

1. THE FOUNDATION DESIGN SHALL COMPLY WITH THE ENFORCING JURISDICTION RESIDENTIAL FOUNDATION STANDARD IN LIEU OF ENGINEERING REPORT

12. FLOOR SLABS SUPPORTED BY FILL CONSISTING OF MORE THAN 24" OF GRANULAR FILL OR 8" OF EARTH SHALL BE REINFORCED PER A SEPARATE ENGINEERING

13. BASEMENT FOUNDATION SILL PLATES SHALL BE BOLTED TO THE FOUNDATION W/ A MINIMUM OF 1/2" ANCHOR BOLTS EMBEDDED AT LEAST 7" INTO THE CONCRETE AND

7. WINDERS SHALL PROVIDE A MINIMUM TREAD OF AT LEAST 6" AT ANY POINT WITHIN CLEAR WIDTH OF STAIRS. WINDER TREAD PROPORTION TO COMPLY WITH

ILITY UNDER APPLICABLE LAW. ENGINEERI Ī

THIS DOCUMENT CONTAIN

COPYRIGHTED MATERIAL AND

CONFIDENTIAL INFORMATION

ELONGINING TO HD ENGINEERIN THORIZED USE, DISCLOSUR

ANY OF THE INFORMATION

SEMINATION, OR DUPLICATION OF

ONTAINED HEREIN MAY RESULT IN





N

008

Ō

0

Σ

MIT

Ŷ

0

S S S S S

C m

Ζ

SAB CO	2354 SW OLD PC	
HD#:	4125	56
C	DATE:	03/16/202
СН	ECKED BY:	CLS

		020
NO.	ISSUE/REVISION	Revision Date

GENERAL NOTES

**RELEASE FOR** HD ENGINGERNIS & REJICTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 05/17/2021

## **TABLE R602.3(1)** FASTENER SCHEDULE FOR STRUCTURAL MEMBERS

										THE DWELLING SHALL COMPLY WITH THE FOLLOWIN	IG LOAD CC	NDITIONS		
ITEM	DESCRIPTION OF BUILDING ELEMENTS	NUMBER AND TYPE OF <sup>a,b,c</sup> FASTENER	SPACING OF FASTENERS	ITEM	DESCRIPTION OF B	BUILDING ELEMENTS		NUMBER AND TYPE OF a.b.c FASTENER	EDGE	SPACING OF FASTEN	IERS MEDIATE د, e IS (INCHES)	AREA	MIN DEAD LOAD	MIN LIVE LOAD
		ROOF		WOOD S				L SHEATHING TO FRAMING AND PARTICLEB		IEATHING TO FRAMING		EXTERIOR BALCONIES	10	60
1	BLOCKING BETWEEN JOISTS OR RAFTERS TO TOP PLATE, TOE NAIL	4-8D BOX (2 1/2" X 0.113") 3-8D (2 1/2" X 0.113")	TOE NAIL		[SEE TA	ABLE R602.3(3) FOR WOO	DD STRUCTUR/	AL PANEL EXTERIOR WALL SHEATHING TO W	VALL FRAMING]			DECKS, STAIRS	10	40
2	CEILING JOISTS TO PLATE, TOE NAIL	3-10D (3"X0.128") 3-3"X 0.131" NAILS	PER JOIST, TOE NAIL	30	3/8"	<b>.</b> "- 1/2"		6D COMMON (2"X 0.113" NAIL (SUBFLOOR, W D COMMON (2 1/2" X 0.131 NAIL (ROOF); or RSF		6	12 f	CEILING JOISTS / ATTICS NO STORAGE - SCUTTLE ACCESS ONLY ROOF SLOPE 3:12 OR LESS	10	10
3	CEILING JOISTS NOT ATTACHED TO PARALLEL RAFTER, LAPS OVER PARTITIONS (SEE SECTION R802.5.2 AND TABLE R802.52	4-10D BOX (3"X 0.128") 3-16D COMMON (3 1/2"X 0.162") 4-3"X 0.131"NAILS	FACE NAIL	31		32" - 1"		3/8" X 0.113" NAIL (ROOF) ; D COMMON NAIL (2 1/2" X 0.131; or RSRS-01; 2			12 f	CEILING JOISTS / ATTICS NO STORAGE - SCUTTLE ACCESS ONLY ROOF SLOPE OVER 3:12 CEILING JOISTS / ATTICS WITH STORAGE - DOOR	10	10
4	CEILING JOIST ATTACHED TO PARALLEL RAFTER (HEEL JOINT) SEE SECTION R802.5.2 AND TABLE R802.5.2)	TABLE R802.5.2	FACE NAIL	32	1 1/8"	" - 1 1/4"		0.113) NAIL ROOF 1 10D COMMON NAIL (3" X 0.148) NAIL; or 8D (2	1/2" X	6	12	PULL DOWN LADDER ACCESS ROOMS: NON-SLEEPING	10 10	20 40
5	COLLAR TIE TO RAFTER, FACE NAIL OR 1 1/4" X 20GA. RIDGE STRAP TO RAFTER	4-10D BOX (3" X 0.128") 3-10D COMMON (3" X 0.148") 4-3" X 0.131" NAILS	FACE NAILS EACH RAFTER				OTHEI	0.131") DEFORMED NAIL				ROOMS: SLEEPING ROOF: LIGHT ROOF COVERING	10 10	30 20
6	RAFTER OR ROOF TRUSS TO PLATE	3-16D BOX NAILS (3 1/2" X0.135") 3-10D COMMON NAILS (3" X 0.148" 4-10D BOX (3" X 0.128" 4-3" X0.131" NAILS	2 TOE NAILS ON ONE SIDE AND 1 TOE NAIL ON OPPOSITE SIDE OF EACH RAFTER OR TRUSS <sup>1</sup>	33 1/2" S	STRUCTURAL CELLULO	DSE FIBERBOARD SHEATH	HING	1/2" GALVANIZED ROOF NAIL, 7/16" HEAD DIAI OR 1 1/4" LONG 16GA. STAPLE WITH 7/16" C CROWN	DR 1"	3	6	ROOF: HEAVY ROOF COVERING / CONCRETE / TILE / SLATE GUARDRAILS, HANDRAILS	20 200# LL	20 NORMAL
7	ROOF RAFTERS TO RIDGE, VALLEY OR HIP RAFTERS OR ROOF	4-16D(3 1/2" X 0.135"); OR 3-10D COMMON (3" X 0.148") 4-10D BOX (3" X 0.128"); OR 4-3" X 0.131" NAILS	TOE NAIL	34 25/32"	STRUCTURAL CELLUL	OSE FIBERBOARD SHEAT	THING 1	3/4" GALVANIZED ROOF NAIL, 7/16" HEAD DIAI OR 1/2" LONG 16GA. STAPLE WITH 7/16" OR 1" C	ROWN	3	6	HEAVY ROOF COVERING MATERIAL (TILE, CONCRETE, S BE USED UNLESS 20 PSF DEAD LOAD AND HEAVY ROO ROOF PLAN. IF HEAVY ROOFING IS TO BE USED AND N PLAN NOTIFY ENGINEER PRIOR TO ANY CONSTRUCTIO	F IS NOTED	ON THE ON THE ROOF
1	RAFTER TO MINIMUM 2" RIDGE BEAM	3-16D(3 1/2" X0.135"); OR 2-16D COMMON (3 1/2" X0.162") 3-10D BOX (3" X 0.128"); OR 3-3" X 0.131" NAILS	TOENAL	35	1/2" GYPSUN	M SHEATHING <sup>d</sup>	1	1/2" GALVANIZED ROOF NAIL, STAPLE GALVA 11/2" LONG; 1 1/4" SCREWS, TYPE W or S		7	7	FOUNDATION AND SITE WORK. IF THE PLAN HAS BEEN ROOF LOADS IT WILL BE NOTED IN THE ROOF NOTES C	I DESIGNED	FOR HEAVY
		WALL		36	5/8" GYPSUN	M SHEATHING <sup>d</sup>	1	3/4" GALVANIZED ROOF NAIL; STAPLE GALVA 1 5/8" LONG; 1 5/8" SCREWS, TYPE W or S		7	7			
8	STUD TO STUD (NOT BRACED WALL PANELS)	16D (3 1/2" X 0.162")	24" OC FACE NAIL			WOOD STRUCTURAL P	ANELS. COMB	INATION SUBFLOOR UNDERLAYMENT TO FR	AMING					
		10D BOX (3" X 0.128"); OR 3" X 0.131" NAILS	16" OC FACE NAIL					6D DEFORMED (2" X 0.120") NAIL OR				<u>COLUMN SCHI</u>	<u>EDUI</u>	<u>_E</u>
9	STUD TO STUD AND ABUTTING STUDS AT INTERSECTING WALL CORNERS (AT BRACED WALL PANELS)	16D BOX (3 1/2" X 0.135"); OR 3" X 0.131" NAILS	12" OC FACE NAIL	37	3/4" AN	ND LESS		8D COMMON (2 1/2" X 0.131") NAIL		6	12	BASED ON FOOTING SIZE (ASSUME	1500 PSF S	OIL)
		16D COMMON (3 1/2" X 0.162")			7/0	2		8D COMMON (2 1/2" X 0.131") NAIL OR		0	40	COL.	COL.	MAX.
10	BUILT-UP HEADER (2" TO 2" HEADER WITH 1/2" SPACER)	16D COMMON (3 1/2" X 0.162") 16D BOX (3 1/2" X 0.135")	16" OC EACH EDGE FACE NAIL	38	7/8	8" - 1"		8D DEFORMED (2 1/2" X 0.120") NAIL		6	12	PAD SIZE REINFORCEMENT MIN.	COL.	LOAD
		5-8D BOX (2 1/2" X 0.113") or 4-8D COMMON		39	1 1/8"	" - 1 1/4"		10D COMMON (3" X 0.148") NAIL OR		6	12	24x24x12 (4) #4 BARS E/W 3"	SCH4	ט 6K
11	CONTINUOUS HEADER TO STUD	(2 1/2" X 0.131") 4-10D BOX (3" X 0.128")	TOE NAIL					8D DEFORMED (2 1/2" X 0.120") NAIL		Ĵ		30x30x12 (5) #4 BARS E/W 3"	SCH4	0 9.4K
		16D COMMON (3 1/2" X 0.162")	16" OC FACE NAIL	For SI: 1 inch = 25.4m	mm, 1 foot = 304.8 mm, 1	mile per hour = 0.447 m/s; 1	1 ksi = 6.895 MF	Pa.				36x36x12 (6) #4 BARS E/W 3"	SCH4	
12	TOP PLATE TO TOP PLATE	10D BOX (3" X 0.128") OR 3" X 0.131" NAILS	12" OC FACE NAIL	TAI	TABLE R 602.3(5) SIZE, HEIGHT, AND SPACING OF WOOD STUD						TUDO	42x42x14 (7) #4 BARS E/W 3 1/2"		
13	DOUBLE TOP PLATE SPLICE	8-16D COMMON (3 1/2" X 0.162"); or 12-16D BOX (3 1/2" X 0.135"); or 12-10D BOX (3" X 0.128"); or 12-3" X 0.131" NAILS	FACE NAIL ON EACH SIDE OF END JOINT (MINIMUM 24" LAP SPLICE LENGTH EACH SIDE OF END JOINT)		BLE K 60 BEARING WALLS	2.3(5) SIZI	E, HEI	GHT, AND SPACIN	NG OF	NON-BEARING WALLS		48x48x16         (8) #4 BARS E/W         3 1/2"           54x54x16         (9) #4 BARS E/W         3 1/2"           60x60x18         (10) #4 BARS E/W         3 1/2"	' SCH4	0 30.4K
14	BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST OR BLOCKING	16D COMMON (3 1/2" X 0.162")	16" OC FACE NAIL		LATERALLY		MAXIMUM SPA		JM SPACING	LATERALLY	LATERALLY		3014	) 37.5K
	(NOT AT BRACED WALL PANELS	16D BOX (3 1/2" X 0.135"); OR 3" X 0.131" NAILS	12" OC FACE NAIL	STUD SIZE	UNSUPPORTED WI STUD HEIGHT a	ROOF-CEILING	WHERE SUPPO ONE FLOOR, P	LUS A TWO FLOORS, PLUS A ONE FLO	SUPPORTING OOR HEIGHT a	UNSUPPORTED STUD HEIGHT a	HEIGHT	COLUMN CONNECTION TO STEEL BEAMS SHAL		
15	BOTTOM PLATE TO JOIST, RIM JOIST, BAND JOIST OR BLOCKING (NOT AT BRACED WALL PANELS	3-16D BOX (3 1/2" X 0.135"); or 2-16D COMMON (3 1/2" X0.162"); or 4-3" X 0.131" NAILS	3, 2, OR 4 EACH 16" OC FACE NAIL	(IN)		ASSEMBLY OR A HABITABLE ATTIC ASSEMBLY, ONLY (inches)	ROOF-CEIL ASSEMBLY ( HABITABLE A ASSEMBLY (ir	OR A ASSEMBLY OR A	nches)	(feet)	(feet)	ALL FOUR TAB EARS BENT AROUND THE BOTT BEARING PLATE, FOUR HOLES SHALL BE DRILL STEEL BEAM TO MATCH THE HOLE PATTERN C SHOULD THEN BE INSTALLED WITH A FLAT WA	LED IN THE I OF THE PLAT SHER, LOCI	BOTTOM FLAN( TE. 1/2" X 2" BO K WASHER, AN
16	TOP OR BOTTOM PLATE TO STUD	4-8D BOX (2 1/2" X 0.113"); or 3-16D BOX (3 1/2" X0.135"); or 4-8D COMMON (2 1/2" X0.131");or 4-10D BOX (3" X0.128"); or 3-3" X 0.131" NAILS 3-16D BOX (3 1/2" X 0.135"); or 2-16D COMMON (3 1/2"	TOE NAIL				$\bigtriangleup$					EACH OF THE HOLES. THE POST CAP MAY BE ACCORDANCE WITH AWS D1.1-92 AS AN ALTER INSPECTED BY AN AWS-CERTIFIED INSPECTOR	RNATIVE, AN	
		X0.162"); or 3-10D BOX (3" X0.128");or 3-3" X 0.131" NAILS	END NAIL											
17	TOP PLATES, LAPS AT CORNERS AND INTERSECTIONS	3-10D BOX (3" X 0.128"); or 2-16D COMMON (3 1/2" X0.162"); or 3-3" X 0.131" NAILS	FACE NAIL	2x3 <sup>b</sup>		 24 c	 16 c		24	10	16			
18	1" BRAVE TO EACH STUD AND PLATE	3-8D BOX (2 1/2" X 0.113"); or 2-8D COMMON (2 1/2" X0.131") or 2-10D BOX (3" X 0.128"); or 2 STAPLES 1 3/4"	FACE NAIL	3x4 2x5	10	24	24	16	24	14	24	ENGINEERED LU	MBE	<u>.R</u>
19	1" X 6" SHEATHING TO EACH BEARING	3-8D BOX (2 1/2" X 0.113"); or 2-8D COMMON (2 1/2" X0.131") or 2-10D BOX (3" X 0.128"); or 2 STAPLES 1" CROWN, 16GA., 1 3/4" LONG	FACE NAIL	2x6	10	24	24	16	24	20	24	MIN. DESIGN REQUIREMENTS	s	
20	1" X 8" AND WIDER SHEATHING TO EACH BEARING	3-8D BOX (2 1/2" X 0.113"); or 3-8D COMMON (2 1/2" X0.131") or 3-10D BOX (3" X 0.128"); or 3 STAPLES, 1" CROWN, 16GA., 1 3/4" LONG	FACE NAIL	a. LISTED HEIGHTS ON NOT LESS THAN UNSUPPORTED HEIG	ONE SIDE OR BRIDGING	VEEN POINTS OF LATERA IG SHALL BE INSTALLED N	NOT GREATER	ACED PERPENDICULAR TO THE PLANE OF THAN 4 FEET APART MEASURED VERTICALLYON 2 OF SECTION R602.3.1 OR DESIGNED IN A	Y FROM EITHER	END OF THE STUD. INC	CREASES IN	F <sub>b</sub> (psi)         E (psi)           LVL         2600         1.8x10	<b>F<sub>v</sub>(psi)</b> 285	
		WIDER THAN 1" X 8" 4-8D BOX (2 1/2" X 0.113"); or 3-8D COMMON (2 1/2" X0.131") or 3-10D BOX (3" X 0.128"); or 4 STAPLES, 1" CROWN, 16GA., 1 3/4" LONG		c. A HABITABLE AT		RTED BY 2X4 STUDS IS LI		DOF SPAN OF 32 FEET. WHERE THE ROOF SF	PAN EXCEEDS 3	2 FEET, THE WALL STUE	DS SHALL BE	GLULAM24001.8x10PARALAM26002.0x10	190 290	
		FLOOR		INCREASED TO 2X6 (	OR THE STUDS SHALL I	BE DESIGNED IN ACCORE	DANCE WITH A	CCEPTED ENGINEERING PRACTICE.					200	1.
21	JOIST TO SILL, TOP PLATE OR GIRDER	4-8D BOX (2 1/2" X 0.113"); or 3-8D COMMON (2 1/2" X0.131") or 3-10D BOX (3" X 0.128"); or 3-3" X 0.131: NAILS	TOE NAIL					MENT EFFICIENC				L / VAULTED CEILING		
22	RIM JOIST, BAND JOIST OR BLOCKING TO SILL OR TOP PLATE (ROOF APPLICATIONS ALSO)	8D BOX (2 1/2" X 0.113") 8D COMMON (2 1/2" X 0.131"); or 10D BOX(3" X0.128") or 3-3" X 0.131" NAILS	4" OC TOE NAIL 6" OC TOE NAIL	VALUES	S BY CON			IRC2018 N1103.6.	1	<u>F</u>		<b>SAND INSULATION</b> SULATION REQUIRED, <u>SEE DETAIL 14/S-1.2</u>		
23	1" X 6" SUBFLOOR OR LESS TO EACH JOIST	3-8D BOX (2 1/2" X 0.113"); or 2-8D COMMON (2 1/2" X0.131") or 3-10D BOX (3" X 0.128"); or 2 STAPLES, 1" CROWN, 16GA., 1 3/4" LONG	FACE NAIL		FAN LOCATION	MINIMUM (CFM)	MINIMUM EFFI CFM/WAT	T MAXIMUM (CFM)	BE	TWEEN THE TOP OF TH DTE: RAFTER SIZES SPE	E INSULATION AND	) THE BOTTOM OF THE RAFTERS, A MINIMUM 1" AIR SPACI THE SHEATHING FOR VENTILATION (R806.3) RE THE MINIMUM REQUIRED FOR STRUCTURAL PURPOSE		PROVIDED
24	2" SUBFLOOR TO JOIST OR GIRDER	3-16D BOX (3 1/2" X 0.135"); or 2-16D COMMON (3 1/2" X0.162")	BLIND AND FACE NAIL	F	HRV OR ERV RANGE HOOD	ANY ANY	1.2 CFM/WA 2.8 CFM/WA	ATT ANY	IF Of	R ADEQUATE FURRING S	SHALL BE USED TO C	OR MINIMUM INSULATION VALUE, RAFTER SIZES WILL NEED OBTAIN THE MINIMUM JOIST DEPTH FOR THE REQUIRED IN IT SHALL BE VERIFIED THAT THE RIDGE BE A MINIMUM OF	NSULATION.	. IN
25	2" PLANKS (PLANK & BEAM-FLOOR AND ROOF)	3-16D BOX (3 1/2" X 0.135"); or 2-16D COMMON (3 1/2" X0.162")	AT EACH BEARING, FACE NAIL	BATHI	IN-LINE FAN	ANY 10	2.8 CFM/WA	ATT <90		RGER THAN THE RAFTE	ERS BEING RECEIVED	D. (SEE CHART BELOW)	2x12	
26	BAND OR RIM JOIST TO JOIST	3-16D COMMON (3 1/2" X 0.162"); or 4-10D BOX (3" X0.128") or 4-3" X 0.131" NAILS; or 4-3" X 14GA. STAPLES, 7/16" CROWN	END NAIL		IROOM UTILITY FAN	90	2.8 CFM/WA			1" AIR SPACE (FIBERG	R-13, 3 1/		R-38, 10 1/4	·
27	BUILT-UP GIRDERS AND BEAMS, 2-INCH LUMBER LAYERS	20D COMMON (4" X 0.192"); or 10D BOX (3" X 0.128"); or 3" X 0.131" NAILS	NAIL EACH LAYER AS FOLLOWS: 32" OC AT TIP AND BOTTOM AND STAGGERED 24" OC FACE NAIL AT TOP AND BOTTOM STAGGERED ON OPPOSITE SIDES	VALUES BELOW ARE	PER 2018 IECC, ACTUAL VALUES N	MAY VARY BASED ON ALTERNATE EN	REFENS	PATH CHOSEN (IN JURISDITIONS WHERE ALTERNATIVE PATHS AF	RE AVAILABLE)	COMPON	ENT, PE	<u>R IRC2018 N1102.1.2</u>		
		AND: 2-20D COMMON (4" X 0.192"); or 3-10D BOX (3" X 0.128; or 3-3" X 0.131" NAILS	FACE NAIL AT END AND AT EACH SPLICE					INSULATED WOOD CEILING WOOD		OOR BASEMENT	SLAB R-VALUE	CRAWL SPACE DUCTWORK OVER DUCTWORK (ALL	L	
28	LEDGER STRIP SUPPORTING JOISTS OR RAFTERS	4-16D BOX (3" X 0.128; or 3-3" X 0.131" NAILS 4-16D BOX (3 1/2" X 0.135"): or 3-26D COMMON (3 1/2" X 0.162"); or 4-10D BOX (3" X 0.128"); or 4-3" X 0.131" NAILS	AT EACH JOIST OR RAFTER, FACE NAIL		U-FACTOR         U-FACT           0.32         0.55		DOOR U-VALU			ALUE WALL R-VALUE	E & DEPTH	WALL R-VALUE     OUTSIDE R-VALUE     OTHER) R-VALUE       10 CONTINUOUS OR 13 CAVITY     8     6		
29	BRIDGING OR BLOCKING TO JOIST	2-10D BOX (3" X 0.128"): or 2-8D COMMON (2 1/2" X 0.131" or 2-3" X 0.131") NAILS	EACH END, TOE NAIL	2) RECESSED	LIGHTING SHALL BE SE	EALED TO PREVENT LEAF	KAGE BETWEE	IR BARRIER AS PER N1102.4.1 OF THE 2018 IR IN THE CONDITIONED SPACE AND UNCONDIT ID AS DUCTS SHALL BE SEALED AS PER N110	IONED SPACE		<b>-</b>		_	
		-												

a. ALL NAILS ARE SMOOTH-COMMON, BOX OR DEFORMED SHANKS EXCEPT WHERE OTHERWISE STATED. NAILS USED FOR FRAMING AND SHEATHING CONNECTIONS SHALL HAVE MINIMUM AVERAGE BENDING YIELD STRENGTHS AS SHOWN: 80 KSI FOR SHANK DIAMETER OF 0.192 INCH (20D COMMON), NAILS FOR SHANK DIAMETERS LARGER THANK 0.142 INCH BUT NOT LARGER THANK 0.177 INCH, AND 100 KSI FOR SHANK DIAMETER OF 0.142 INCH OR LESS. b. STAPLES ARE 16 GAGE WIRE AND HAVE A MINIMUM 7/16 - INCH ON DIAMETER CROWN WIDTH.

C. NAILS SHALL BE SPACED AT NOT MORE THAN 6 INCHES ON CENTER AT ALL SUPPORTS WHERE SPANS ARE 48 INCHES OR GREATER. d. FOUR-FOOT BY 8-FOOT OR 4-FOOT BY 9-FOOT PANELS SHALL BE APPLIED VERTICALLY.

e. SPACING OF FASTENERS NOT INCLUDED IN THIS TABLE SHALL BE BASED ON TABLE R602.3(2). f. FOR REGIONS HAVING BASIC WIND SPEED OF 110 MPH OR GREATER, 8D DEFORMED (2 1/2" X 0.120) NAILS SHALL BE USED FOR ATTACHING PLYWOOD AND WOOD STRUCTURAL PANEL ROOF SHEATHING TO FRAMING WITHIN MINIMUM 48-INCHES DISTANCE FROM GABLE END WALLS, IF MEAN ROOF

HEIGHT IS MORE THAN 25 FEET, UP TO 35 FEET MAXIMUM. g. FOR REGIONS HAVING BASIC WIND SPEED OF 100 MPH OR LESS, NAILS FOR ATTACHING WOOD STRUCTURAL PANEL ROOF SHEATHING TO GABLE END WALL FRAMING SHALL BE SPACED 6 INCHES ON CENTER. WHEN BASIC WIND SPEED IS GREATER THAN 100 MPH, NAILS FOR ATTACHING PANEL ROOF Generating of intermediate supports shall be speed in other for an intermediate best intermediate best intermediate supports shall be speed in other for an intermediate support shall be speed in other for an intermediate best intermediate supports shall be speed in other for an intermediate best intermediate supports shall be speed in other for an intermediate best intermediate supports shall be speed in other for an intermediate best intermediate best intermediate best intermediate supports shall be speed in other for an intermediate best intermediat J. WHERE A RAFTER IS FASTENED TO AN ADJACENT PARALLEL CEILING JOIST IN ACCORDANCE WITH THIS SCHEDULE, PROVIDE TWO TOE NAILS ON ONE SIDE OF THE RAFTER AND TOE NAILS FROM CEILING JOIST TO TOP PLATE IN ACCORDANCE WITH THIS SCHEDULE. THE TOE NAIL ON THE OPPOSITE SIDE OF THE RAFTER SHALL NOT BE REQUIRED.

# CONTINUED TABLE R602.3(1) FASTENER SCHEDULE FOR STRUCTURAL MEMBERS

BUILDER'S PLANS: THE TERM "BUILDER'S PLANS" REFERS TO A CERTAIN LEVEL OF DEVELOPMENT OF THE DRAWINGS. AS THE NAME IMPLIES, THESE PLANS REQUIRE THAT THE CONTRACTOR POSSESSES COMPETENCE IN RESIDENTIAL CONSTRUCTION AND A THOROUGH UNDERSTANDING OF THE INTERNATIONAL RESIDENTIAL CODE (IRC). THE CONTRACTOR WARRANTS TO HD ENGINEERING & DESIGN THAT HE POSSESSES THE PARTICULAR COMPETENCE AND SKILL IN CONSTRUCTION NECESSARY TO BUILD THIS PROJECT WITHOUT FULL ENGINEERING AND DESIGN SERVICES, AND FOR THAT REASON THE CONTRACTOR OR HOME OWNER HAS RESTRICTED THE SCOPE OF PROFESSIONAL SERVICES. THE CONSTRUCTION DOCUMENTS PROVIDED BY THE LIMITED SERVICES SHALL BE TERMED "BUILDER'S PLANS" IN RECOGNITION OF THE CONTRACTOR'S SOPHISTICATION. ALTHOUGH HD ENGINEERING & DESIGN HAVE PERFORMED THEIR SERVICES WITH DUE CARE AND DILIGENCE, WE CANNOT GUARANTEE PERFECTION. ANY AMBIGUITY OR DISCREPANCY DISCOVERED BY THE USE OF THESE PLANS SHALL BE REPORTED IMMEDIATELY TO HD ENGINEERING. CONSTRUCTION MAY REQUIRE THAT THE CONTRACTOR ADAPT THE "BUILDER'S PLANS" TO THE FIELD CONDITIONS ENCOUNTERED AND MAKE LOGICAL ADJUSTMENTS IN FIT, FORM, DIMENSION AND QUANTITY. CHANGES MADE FROM THE PLANS WITHOUT THE CONSENT OF HD ENGINEERING & DESIGN ARE UNAUTHORIZED. IT IS ALSO UNDERSTOOD THAT THE CONTRACTOR WILL BE RESPONSIBLE FOR MEETING ALL APPLICABLE BUILDING CODES INCLUDING BUT NOT LIMITED TO MECHANICAL, ELECTRICAL, AND PLUMBING CODE REQUIREMENTS (WHICH IS EXCLUDED FROM THESE PLANS). IN THE EVENT ADDITIONAL DETAIL OR GUIDANCE IS NEEDED BY THE CONTRACTOR OR HOMEOWNER FOR CONSTRUCTION OF ANY ASPECT OF THE PROJECT, HD ENGINEERING & DESIGN OR A QUALIFIED ENGINEER SHALL IMMEDIATELY BE RETAINED. FAILURE TO NOTIFY US OF THESE NEEDS OR OF CHANGES TO THE PLANS SHALL RELIEVE HD ENGINEERING & DESIGN OF ALL RESPONSIBILITIES OF THE CONSEQUENCES.

THE DWELLING SHALL COMPLY WITH THE FOLLOWING LOAD CONDITIONS

AREA	MIN DEAD LOAD	MIN LIVE LOAD
EXTERIOR BALCONIES	10	60
DECKS, STAIRS	10	40
CEILING JOISTS / ATTICS NO STORAGE - SCUTTLE ACCESS ONLY ROOF SLOPE 3:12 OR LESS	10	10
CEILING JOISTS / ATTICS NO STORAGE - SCUTTLE ACCESS ONLY ROOF SLOPE OVER 3:12	10	10
CEILING JOISTS / ATTICS WITH STORAGE - DOOR PULL DOWN LADDER ACCESS	10	20
ROOMS: NON-SLEEPING	10	40
ROOMS: SLEEPING	10	30
ROOF: LIGHT ROOF COVERING	10	20
ROOF: HEAVY ROOF COVERING / CONCRETE / TILE / SLATE	20	20
GUARDRAILS, HANDRAILS	200# LL	NORMAL

	•			
PAD SIZE	REINFORCEMENT	COL. MIN.	COL. TYPE	MAX. LOAD
24x24x12	(4) #4 BARS E/W	3"	SCH40	6K
30x30x12	(5) #4 BARS E/W	3"	SCH40	9.4K
36x36x12	(6) #4 BARS E/W	3"	SCH40	13.5K
42x42x14	(7) #4 BARS E/W	3 1/2"	SCH40	18.4K
48x48x16	(8) #4 BARS E/W	3 1/2"	SCH40	24.0K
54x54x16	(9) #4 BARS E/W	3 1/2"	SCH40	30.4K
60x60x18	(10) #4 BARS E/W	3 1/2"	SCH40	37.5K

POST CAP WITH E BEAM. FOR A I FLANGE OF THE X 2" BOLTS HER, AND A NUT IN STEEL BEAM IN JLD NEED TO BE

	F <sub>b</sub> (psi)	E (psi)	F <sub>∨</sub> (psi)
LVL	2600	1.8x10	285
GLULAM	2400	1.8x10	190
PARALAM	2600	2.0x10	290








64082 C OW **MMIT N** ŝ JT Sur S S S UC UC ш RD S Ζ Ŷ 0 0 Ω C Γ Ο m SW 4 5 4 35 N 41256 HD#: 03/16/2021 DATE: CHECKED BY: CLS Revision **ISSUE/REVISION** Date

GENERAL NOTES


**S-1** RELEASE FOR 2020 HD ENGINEERNS & BUSICN ION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

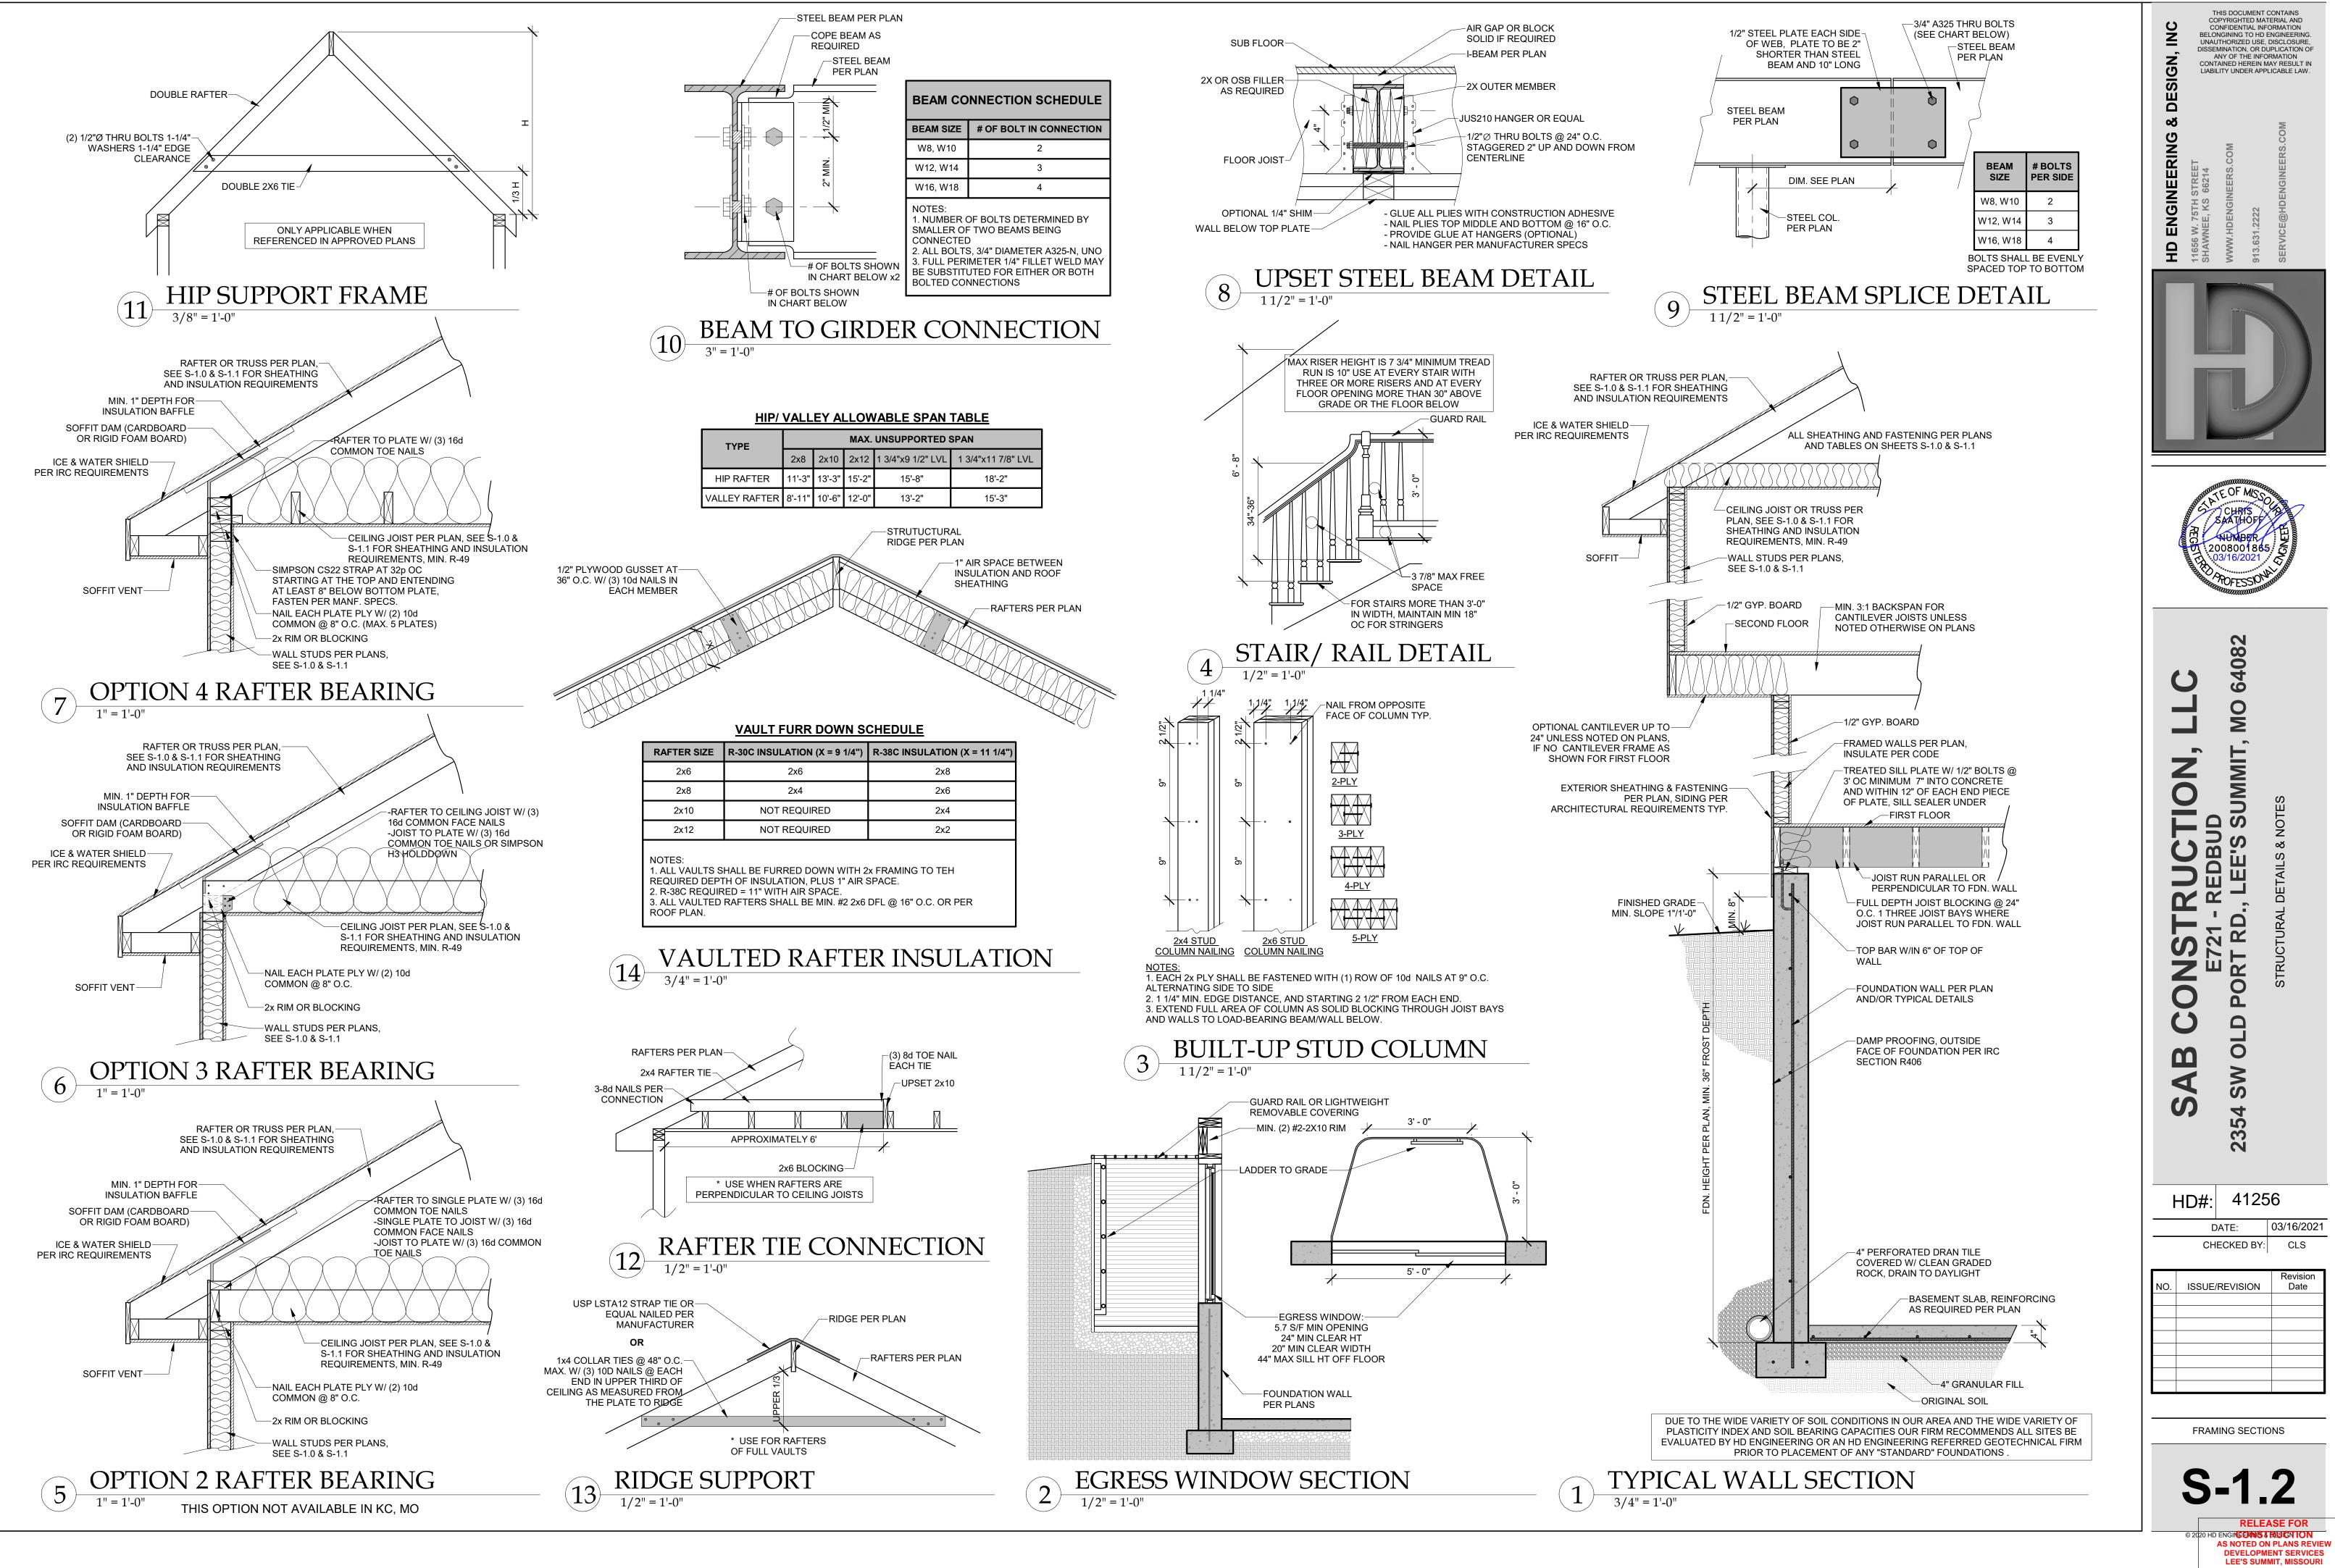

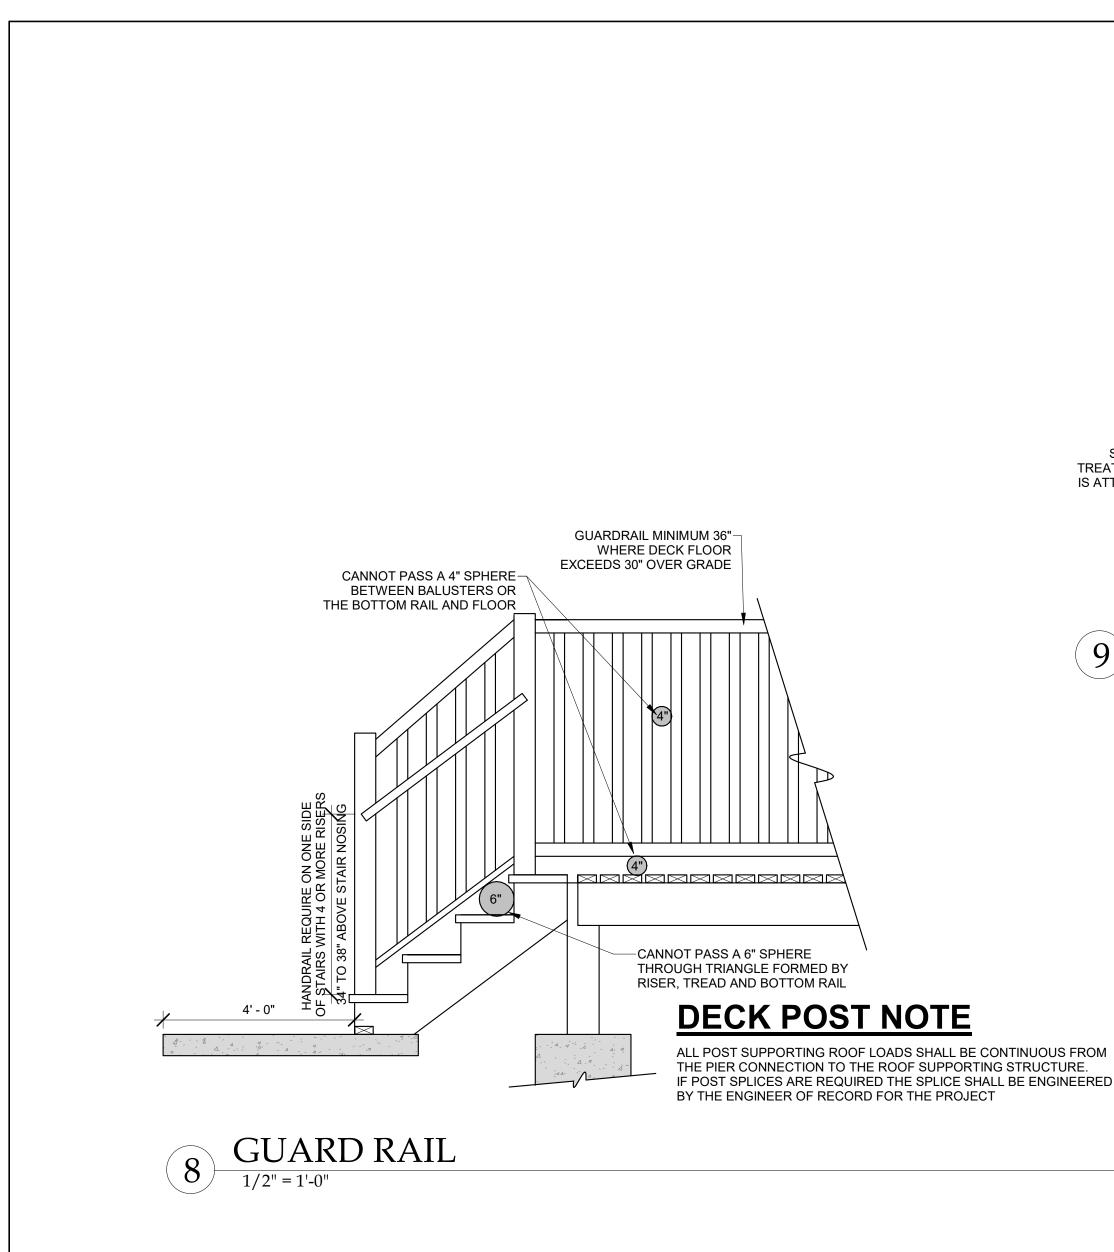

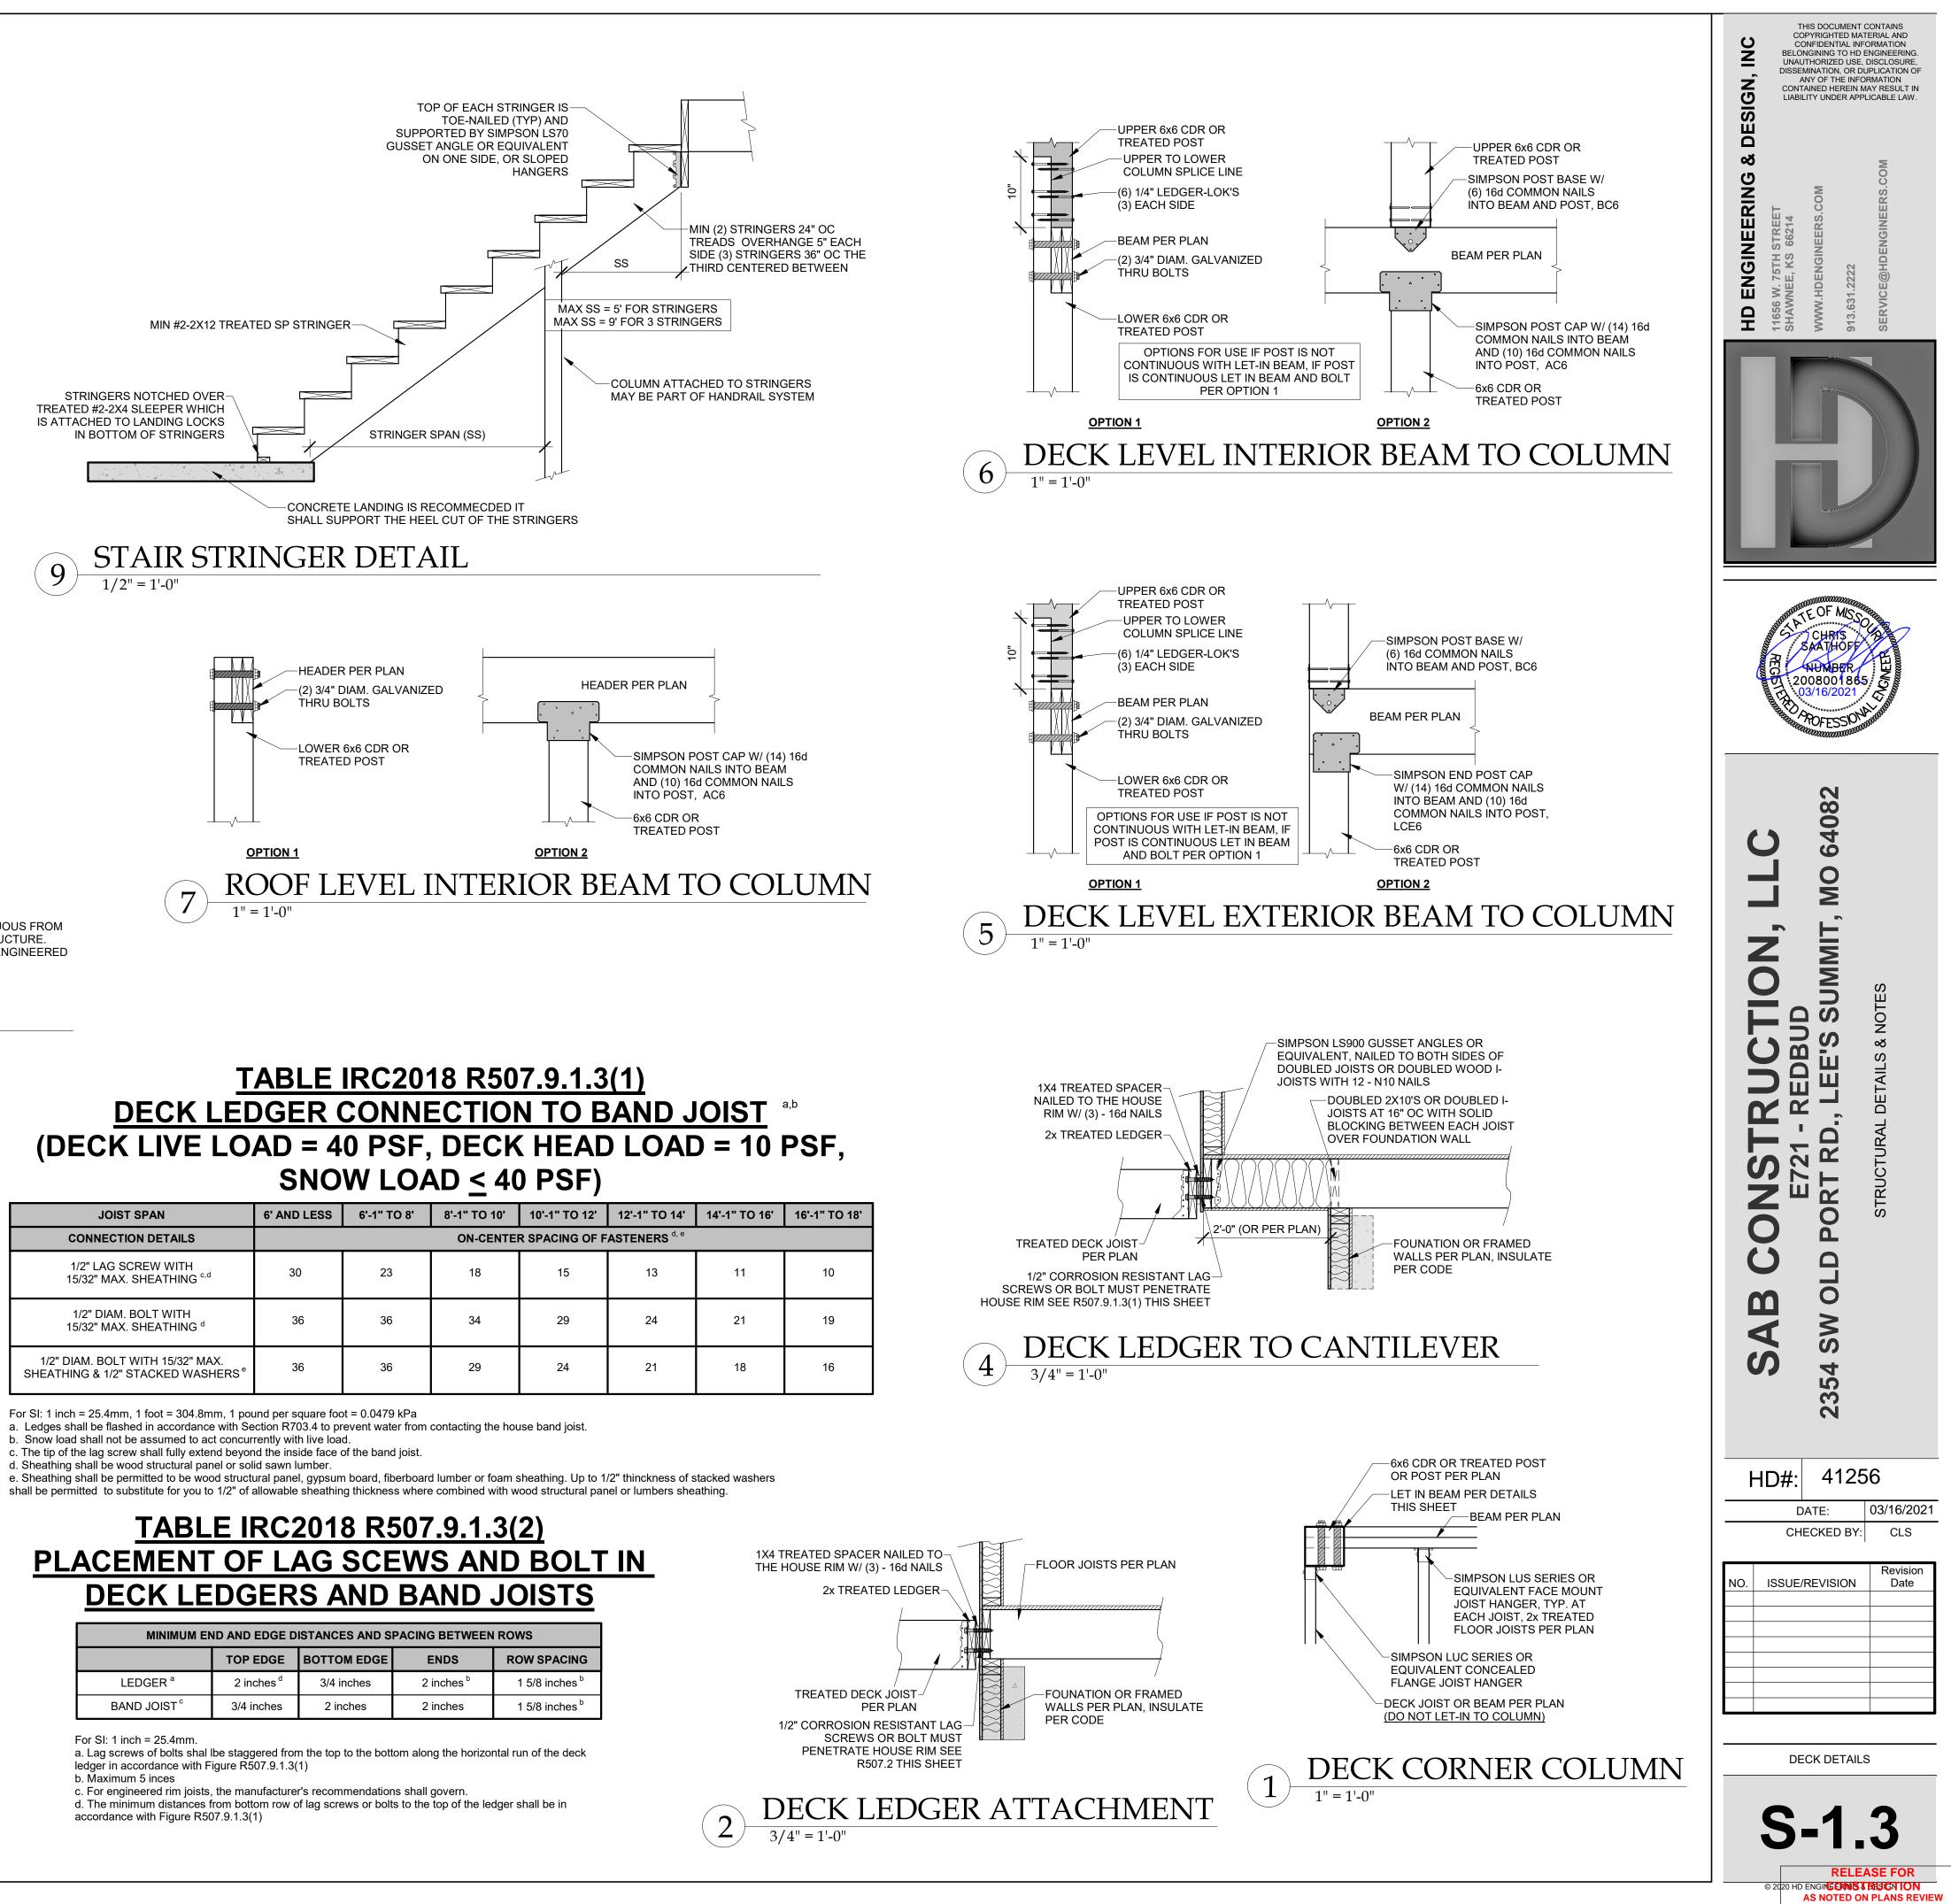

JOIST SPAN	6' AND LESS	6'-1" TO 8'	8'-1" TO 10'	10'-1" TO 12'	12'-1" TO 14'	14'-1" TO 16'	16'-1" TO 18'	
CONNECTION DETAILS	ON-CENTER SPACING OF FASTENERS <sup>d, e</sup>							
1/2" LAG SCREW WITH 15/32" MAX. SHEATHING <sup>c,d</sup>	30	23	18	15	13	11	10	
1/2" DIAM. BOLT WITH 15/32" MAX. SHEATHING <sup>d</sup>	36	36	34	29	24	21	19	
1/2" DIAM. BOLT WITH 15/32" MAX. SHEATHING & 1/2" STACKED WASHERS <sup>®</sup>	36	36	29	24	21	18	16	

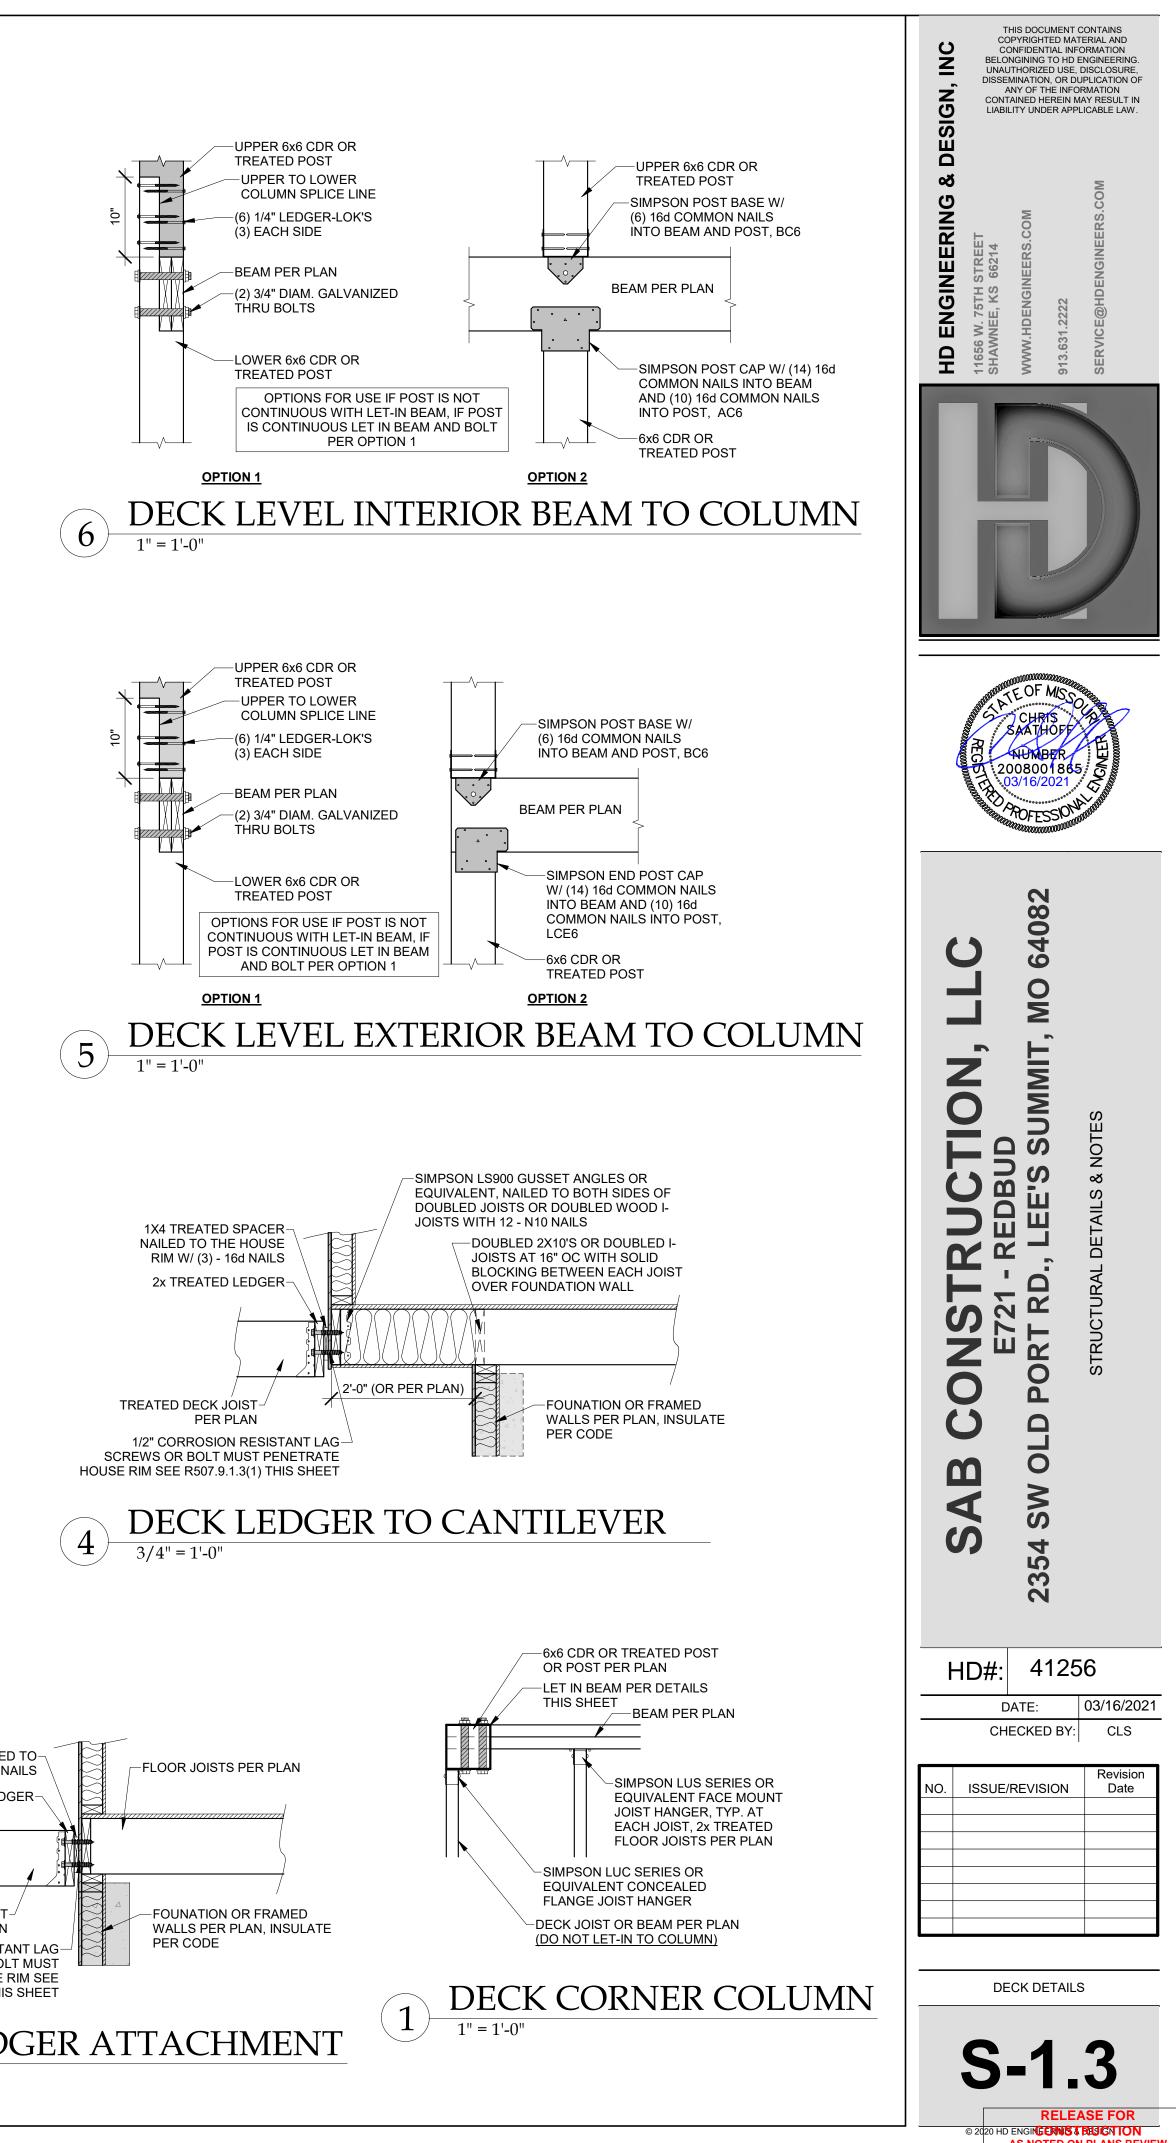


DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI


05/17/2021

d. Sheathing shall be wood structural panel or solid sawn lumber.

MINIMUM END AND EDGE DISTANCES AND SPACING BETWEEN ROWS							
	TOP EDGE	BOTTOM EDGE	ENDS	ROW SPACING			
LEDGER <sup>a</sup>	2 inches <sup>d</sup>	3/4 inches	2 inches <sup>b</sup>	1 5/8 inches <sup>b</sup>			
BAND JOIST <sup>°</sup>	3/4 inches	2 inches	2 inches	1 5/8 inches <sup>b</sup>			

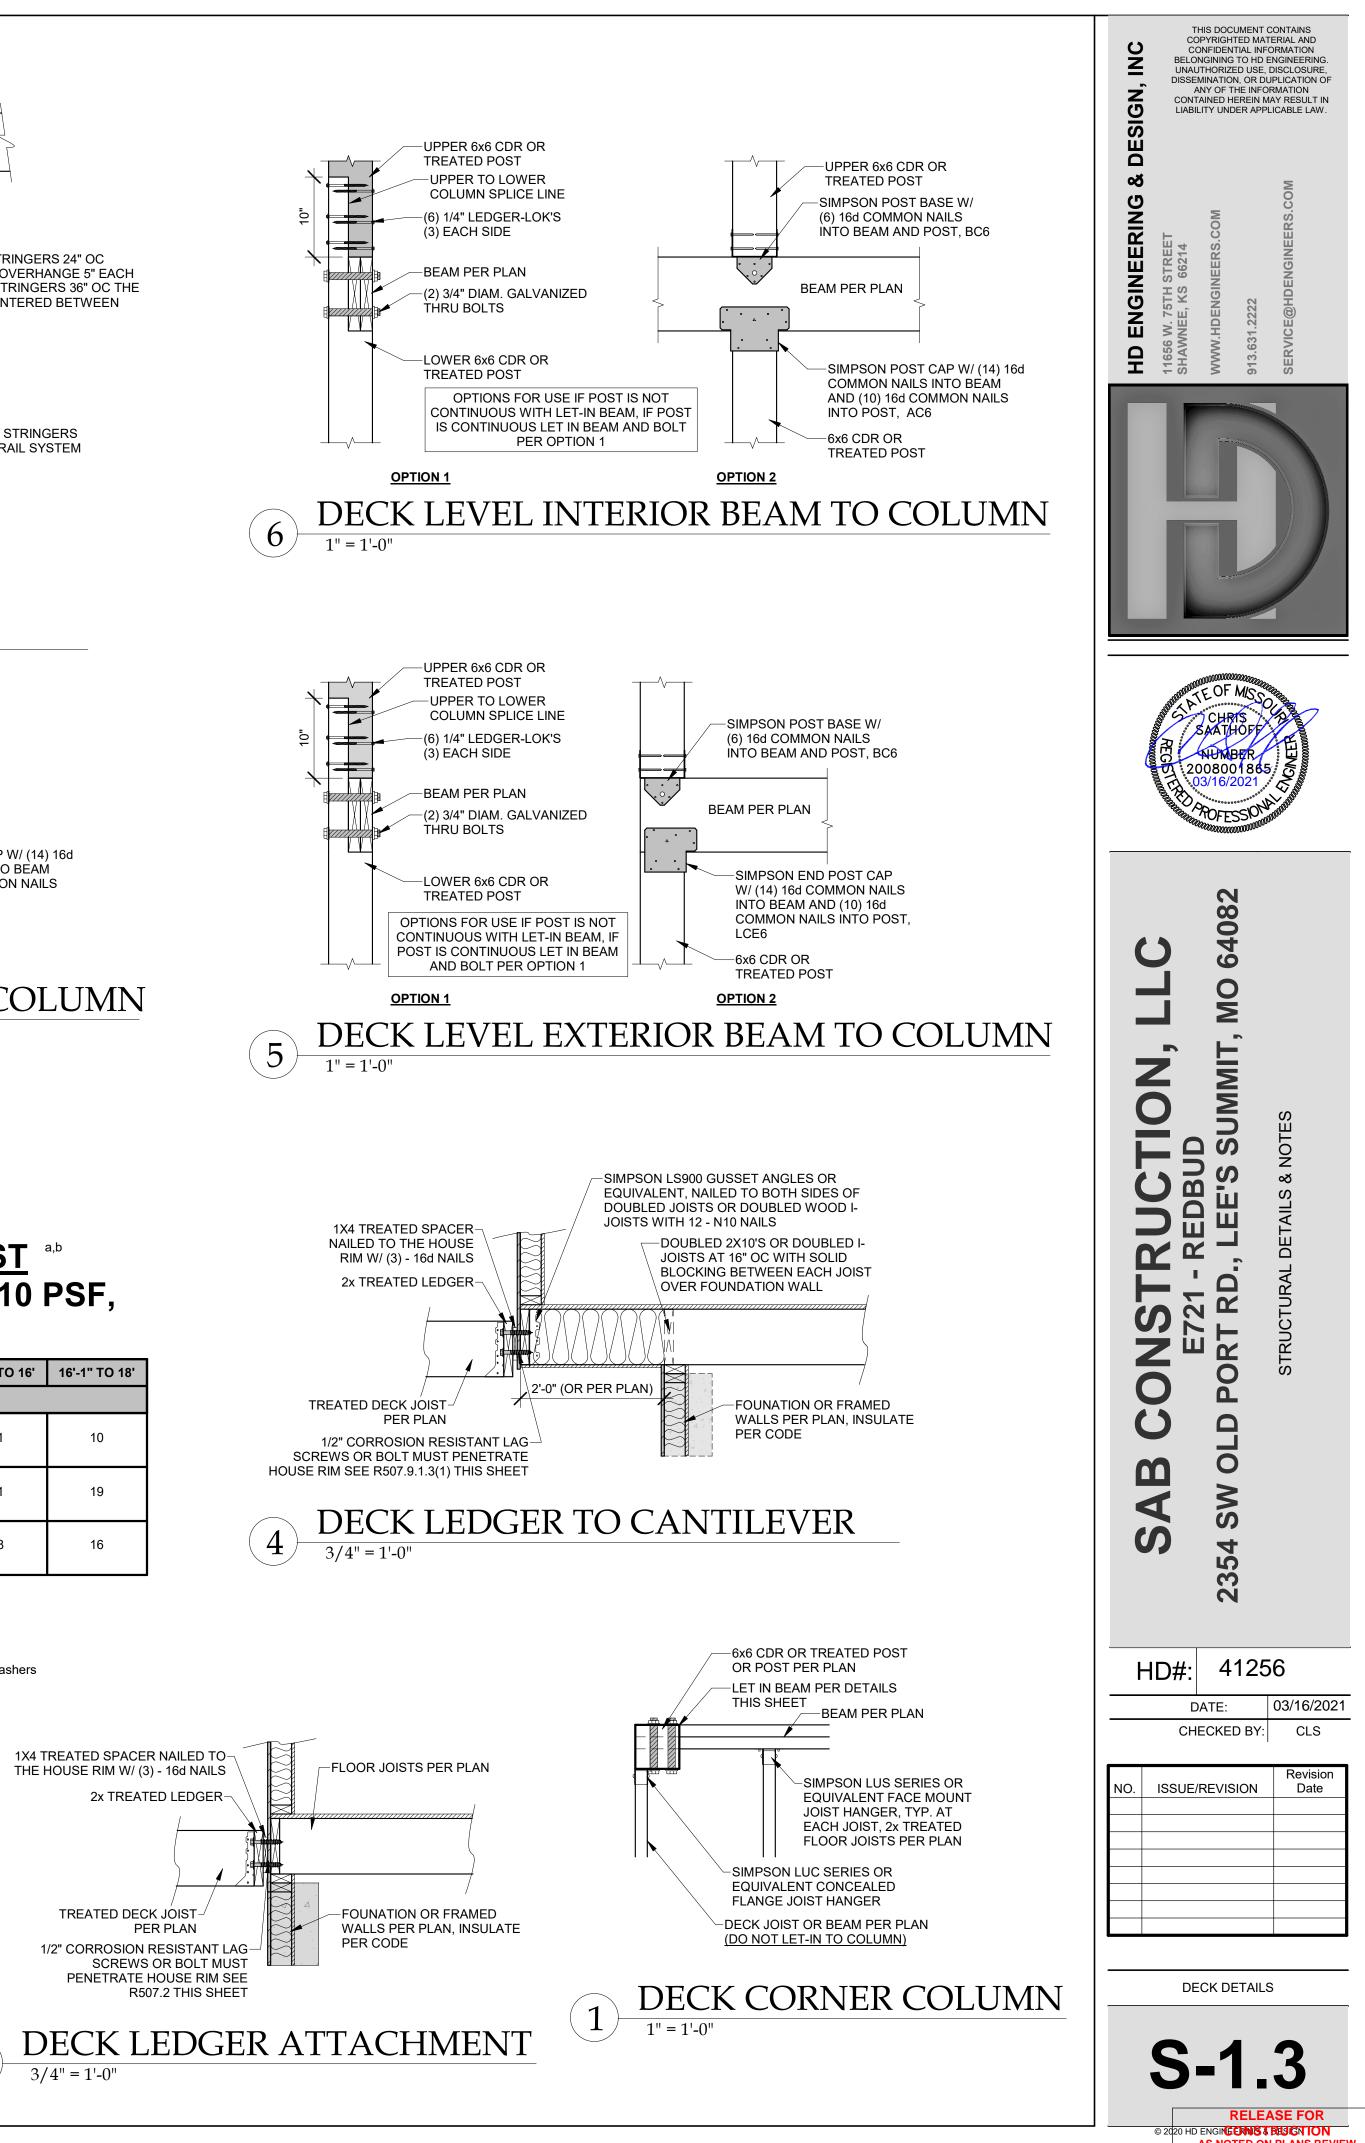

OF			·····		DEAD LOAD (pst)	AREA (17)	CALCULATED VALUE WEIGHT (bs.)	
LING COND FLOOR				· · · · · · · · · · · · · · · · · · ·	10 10	3955 3855	39550 38550	
ST FLOOR				WALL LENGTH (ft)	10 10 WALL HEIGHT (#)	0 3015 WALL UNIT WT. (psf)	0 30150 WEIGHT (ibs)	
OND FLOOR EXT ST FLOOR EXT, W				256	10	0 10	0 25600	
	PARTITION WALL D	L		······································	DEAD LOAD (pst) 6 6	AREA (82) 0 3015	WEIGHT (lbs) 0 18090	
······································	PRO	JECTED AREAS (WIND	DESIGN PER 115 MPH	3-SECOND GUST, EXPOS	URE C AND MEAN ROOF HEIGHT	30 FT ASSUMED)		
SLOPED ROOF	FRON AREA 536	T-TO-BACK LOAD 2361	****	SLOPED ROOF	SIDE-TO-S AREA	LOAD		•••••
VERT, ROOF 2ND	0 1	0 165	CUMULATIVE 2525	VERT. ROOF	615 0	2647 0 165	CUMULATIVE 2812	
IST BSMT <sup>e</sup>	731.5	10200 0	12725 0	1ST BSMT <sup>a</sup>	814 100	11160 1740	13972 15712	
· · · · · ·	SLOPED ROOF WALL/VERT, ROOF	ZONE B ZONE A	· ·	F) - PER ASCE CH 6 5.9 17.4	ZONE C ZONE D	11.6	28 (FIG. 28.6-1, ASCE7) 13.3	
f there is a walkout	MEAN ROOF HT., h wall to be sheathed (ASCE7-10 Velocity	determine tributary wind		o walkoul, enter O for area.	· · · · · · · · · · · · · · · · · · ·	· · · · · · · · · · · · · · · · · · ·		
FLOOR TRIBUTA FLOOR TRIBUTAI BEMENT TRIBUTAI	RY WEIGHT RY WEIGHT RY WEIGHT DTION - %g - FROM A 11.4-1)	SCE7 SEISMIC MAP)	4210_ASD *0.04216 (DBS		SD enalysis under ASCE7-10 and IRC/I		78100 50900 90800 12.0% 1.6 0.128 .6.5	
ATION FLOOR				SEISMIC		n ASCE7 (Eq. 12.8-1).	V (= 1,2 * S <sub>05</sub> * V	V / R) (ibs.)
FLOOR		1999 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1996 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 - 1997 -		**************************************		New constant of the constant of	1846 2148 2148	
Sheathing	Location	Min. Sheath	ping Schedule	the second se	tening Schedule	Allows	able Shear (#LF)	Code Reference
Exterior <u>(C</u>			ed Plywood/OSB	Field For 24" stud spacin	1" penetration@ 6" OC Edges, 6" OC 19, 12" OC Field For 15" stud spacing 1" penetration@ 4" OC Edges, 6" OC		155	per IBC, Table 2306,3(1)
Exterior (0 Exterior (0			ed Plywood/OSB	Field For 24" stud spacin 1-1/2" 16ga, Staples w/	ng. 12" OC Field For 16" stud spacing 1" penetration@ 3" OC Edges, 6" OC		230	per IBC, Table 2306.3(1) per IBC, Table
rvieilo:		· ····································	ed Plywood/OSB	Field For 24" stud spacin 8d Common Nails w/ 1-3	ng, 12" OC Field For 16" stud spacing /8" penetration (2) 6" O.C. Edges, 12"		310	2306.3(1)
Extenor (C	<u>)pťon #4)</u>	panel sheathing, o	ywood/OS8 or shiplap or 3/8" shiplap panel ighter nail spacing	O.C. Field for 7/16" APA sheathing DR @ 4" O.C. P	A-rated plywood/OSB or shiplap panel Edges, 12" O.C. Field for 3/6" shiplap and sheathing		220	AF&PA SDPWS Table 4.3A
Exterior (0	) <u>ption #5)</u>	panel sheathing, o	ywood/OSB or shiplap x 3/8" shiplop panel ighter nail spacing	O.C. Field for 7/15" APA sheathing OR @ 3" O.C.	/8" penetration @ 4" O.C. Edges, 12" -rated plywood/OSB or shiptap panel Edges, 12" O.C. Field for 3/8" shiptap anel sheathing		320	AF&PA SDPW Table 4.3A
Exterior (Option #6)		pend sheathing, o sheathing with tighter	ywood/OSB or shiplap or 3/8" shiplap panel nail spacing and double ch panel edge		/8" penetration @ 3" O.C. Edges, 12" O.C. Field	410		AF&PA SOPWS Table 4.3A
inte	101	1/2* Gyps	sum Board	No. 6- 11/4" Type W or S	Screws @ 8" O.C. Edges, 12" O.C. Field	· · · · · · · · · · · · · · · · · · ·	60	per IBC, Table 2306.4.4
inte	nor	1 .	Type W8 Steel X-Brace equal)	(3) 16d @ end studs ( manufacturer specifi	\$ (1) 8d @ intermediate studs (per callons - see detail on sheet S3)		325	
				CD CTD ICT CI	Chicthic (A) a second	2		
61000	FRONT-TO-BACK	RESISTANCE (Ibs.)	EISMIC SIDE-TO-SIDE	RESISTANCE (Ibs.)	ENGTHS (IL.) & RESISTANCES FRONT-TO-BACK	WIND RESISTANCE (bs.)	SIDE-TO-SIDE	RESISTANCE
FLOOR	FRONT-TO-BACK 12 92 0	1	EISMIC			WIND	12 60	RESISTANCE 4704 23520 16460
FLOOR	12 92	RESISTANCE (lbs.) 3360 25760 0 ADDITIONAL RESIS	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED	RESISTANCE (Ibs.) 3360 16800	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing	WIND RESISTANCE (Ibs.) 4704 36064 0	12 60 25 16d Nail Spacing regid at	4704 23520 16450
FLOOR EMENT FLOOR FRONT-TO	12 92 0	RESISTANCE (lbs.) 3360 25760 0	EISMIC SIDE-TO-SIDE 12 60 25	RESISTANCE (Ibs.) 3360 16800	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS)	WIND RESISTANCE (bs.) 4704 36064 0 (in.) 0.5 944	12 60 25 16d Nail Spacing req'd at 2nd Floor F-8 2nd Floor S-S	4704 23520 16450
FLOOR EMENT FLOOR FRONT-TO FLOOR SIDE-TO-5 FLOOR FRONT-TO FLOOR SIDE-TO-5	12 92 0 D-BACK SIDE D-BACK SIDE	RESISTANCE (lbs.)           3360           25760           0           ADDITIONAL RESIS           SEISMIC           0           0           0	EISMIC \$IDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800	FRONT-TO-BACK 12 92 0 Anchor Bott Spacing diameter (in.)	WIND RESISTANCE (bs.) 4704 36064 0 (in.) 0.5	12 60 25 16d Nail Spacing req'd at 2nd Floor F-8	4704 23520 16450
FLOOR EMENT FLOOR FRONT-TO FLOOR SIDE-TO-5 FLOOR SIDE-TO-5 EMENT FRONT-TO	12 92 0 D-BACK SIDE D-BACK SIDE D-BACK	RESISTANCE (lbs.)           3360           25760           0           ADDITIONAL RESIS           SEISMIC           0           0           0	EISMIC \$IDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0	RESISTANCE (Ibs.) 3360 16800	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches)	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0.5 944 210.8	12 60 25 16d Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor F-8	4704 23520 16450
FLOOR EMENT FLOOR FRONT-TO FLOOR SIDE-TO-5 FLOOR SIDE-TO-5 EMENT FRONT-TO	12 92 0 D-BACK SIDE D-BACK SIDE D-BACK	RESISTANCE (lbs.)           3360           25760           0           ADDITIONAL RESIS           SEISMIC           0 </td <td>EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0</td> <td>RESISTANCE (tbs.) 3360 16800 11750 RED IN ADDITION TO RES</td> <td>FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2*</td> <td>WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB</td> <td>12 60 25 160 Nail Spacing req'd at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S</td> <td>4704 23520 16450</td>	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (tbs.) 3360 16800 11750 RED IN ADDITION TO RES	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2*	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB	12 60 25 160 Nail Spacing req'd at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S	4704 23520 16450
FLOOR FLOOR FRONT-TO FLOOR SIDE-TO-4 FLOOR FRONT-TO EMENT FRONT-TO EMENT SIDE-TO-4 FLOOR FRONT-TO	12 92 0 0 D-BACK SIDE D-BACK SIDE D-BACK SIDE	RESISTANCE (lbs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (bs.) 3360 16800 11750 RED IN ADDITION TO RESI	FRONT-TO-BACK 12 92 0 Arichor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) spacing S-S (inches) Spacing S-S (inches)	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB	12 60 25 160 Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POUNDS)	4704 23520 16450 bottom plate (in
FLOOR EMENT FLOOR FRONT-TC FLOOR SIDE-TO-3 EMENT FRONT-TC EMENT SIDE-TO-3 FLOOR FRONT-TC FLOOR SIDE-TO-3 FLOOR FRONT-TC	12 92 0 0-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE	RESISTANCE (lbs.)           3360           25760           0           ADDITIONAL RESIS           SEISMIC           0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (tbs.) 3360 16800 11750 RED IN ADDITION TO RES	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2*	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE	12 60 25 160 Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POLINDS) 0 0	4704 23520 16450 bottom plate (in 0K? YES YES YES
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR FRONT-TO FLOOR FRONT-TO LOOR FRONT-TO MENT SIDE-TO- MENT SIDE-TO- MENT SIDE-TO- EMENT SIDE-TO-	12 92 0 0 D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE	RESISTANCE (lbs.)           3360           25760           0	EISMIC \$IDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (ibs.) 3360 16800 1750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE)	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) Stance PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH WI 1/2" GYPSUM BOARD PER TABLE (FT.)	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE	12 60 25 16d Nail Spacing req'd at 2nd Floor F-8 2nd Floor S-S 1st Floor F-8 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POLINDS) 0	4704 23520 16450 bottom plate (in OK? YES YES YES YES YES
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- COOR FRONT-TO FLOOR FRONT-TO MENT FRONT-TO MENT SIDE-TO- TOOR FRONT-TO LOOR SIDE-TO- MENT FRONT-TO MENT FRONT-TO MENT FRONT-TO TES: 1) SEE ATTA E SHEET S1 FOR	12 92 0 0 0-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE C-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (lbs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC \$IDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 1750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) Stance PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE), ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0,5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE, FT.) 21 E/MAH ING	12 60 25 16d Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POLINDS) 0 0 0 0	4704 23520 16450 bottom plete (in 0K? YES YES YES YES
FLOOR EMENT FLOOR FRONT-TC FLOOR SIDE-TO- LOOR FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT SIDE-TO-3 LOOR FRONT-TC LOOR SIDE-TO-3 MENT FRONT-TC EMENT FROMT-TC EMENT FROMT	12 92 0 0 0-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE D-BACK SIDE C-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (lbs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (bs.) 3360 16800 1750 RED IN ADDITION TO RES INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE BMEATHED WITH OSB SHJ PPUICABLE FOR FULL-HE WIND UPLIFT	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) Stance PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE), ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0,5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE, FT.) 21 E/MAH ING	12 60 25 16d Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POLINDS) 0 0 0 0	4704 23520 16450 bottom plate (in VES YES YES YES YES
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR FRONT-TO FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR FRONT-TO TOOR SIDE-TO- TOOR SIDE-TO- TOOR SIDE-TO- TOOR SIDE-TO- TES: 1) SEE ATT/ TES: 1) SEE ATT/	12 92 0 0-BACK SIDE D-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 1750 RED IN ADDITION TO RES INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS)	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) Stance PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE), ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0,5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE, FT.) 21 E/MAH ING	12 60 25 16d Nail Spacing regid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S RESISTANCE PROVIDED BY ADDITIONAL METHODS (POLINDS) 0 0 0 0	4704 23520 16450 bottom plate (in
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO-3 FLOOR FRONT-TO EMENT FRONT-TO EMENT FRONT-TO EMENT SIDE-TO-3 FLOOR FRONT-TO FLOOR SIDE-TO-3 MENT FRONT-TO MENT FRONT-TO TES: 1) SEE ATTA- E SHEET S1 FOF ERN AS EXTERIO	12 92 0 0 D-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 1750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2] UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF)	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-B" OR LONGEF ANALYSIS PRESSURE ZN. G (PSF)	WIND RESISTANCE (Ibs.) 4704 36064 0 (In.) 0 (In.) 0.5 944 210.8 172.5 (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.) 2 LE/NAILING 3 TOTAL FORCE (LES)	12         60         25         160 Nail Spacing regid at         2nd Floor F-8         2nd Floor S-S         1st Floor F-8         1st Floor S-S         1st Floor S-S         Quite PROVIDED BY         ADDITIONAL METHODS         (POUNDS)         0	4704 23520 16450 bottom plate (in OK? YES YES YES YES YES YES YES YES
FLOOR EMENT FLOOR FRONT-TC FLOOR SIDE-TO- LOOR FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT SIDE-TO-S MENT FRONT-TC EMENT SIDE-TO-S MENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FRONT-TC EMENT FROM TO FROM ERIT FROM FLOOR FROM ERIT FROM FLOOR FROM ERIT FROM FLOOR FROM ERIT FROM FLOOR FLOOR FROM FLOOR FLOOR FLOOR FLOOR FLOOR FROM FLOOR FLOOR	12 92 0 0 D-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 1750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE SMEATHED WITH OSB SHJ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2] UPLIFT PER FT* (LBS) 16.36 PRESSURE ZN E (PSF) 16.12 POUNDS)	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALYSIS	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0.5 944 210.8 172.5 (ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE. FT.) PLE/NAILING 3	12       60       25       16d Nail Spacing reqd at       2nd Floor F-8       2nd Floor S-S       1st Floor S-S       1st Floor S-S       Quert Sector       ADDITIONAL METHODS       (POUNDS)       0       0       0       0       0       0       0	4704 23520 16450 bottom plate (in OK? YES YES YES YES YES YES YES YES
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO MENT SIDE-TO- FLOOR SIDE-TO- MENT SIDE-TO- TOOR SIDE-TO- MENT SIDE-TO- MENT SIDE-TO- MENT SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO- MENT SIDE-TO- SIDE-TO- MENT SIDE-TO-	12 92 0 0 D-BACK SIDE SIDE SIDE D-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 1750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE SMEATHED WITH OSB SHJ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2] UPLIFT PER FT* (LBS) 16.36 PRESSURE ZN E (PSF) 16.12 POUNDS)	FRONT-TO-BACK 12 92 0 Arichor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALYSIS PRESSURE ZN. G (PSF) 10.5	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE. FT.) 2 LE/NAILING 3 TOTAL FORCE (LBS) 48647	12         60         25         160 Nail Spacing regid at         2nd Floor F-8         2nd Floor S-S         1st Floor F-8         1st Floor S-S         1st Floor S-S         Quite PROVIDED BY         ADDITIONAL METHODS         (POUNDS)         0	4704 23520 16450 bottom plate (in CK? YES YES YES YES YES YES YES YES
LOOR FRONT-TO LOOR FRONT-TO LOOR SIDE-TO- LOOR FRONT-TO LOOR SIDE-TO- MENT FRONT-TO MENT FRONT-TO MENT SIDE-TO- LOOR SIDE-TO- LOOR SIDE-TO- ES: 1) SEE ATTA E SHEET S1 FOR ERN AS EXTERIO F PITCH (MAX) WERHANG AIN ROOF SIDE TO SIDE	12 92 0 0 D-BACK SIDE SIDE D-BACK SIDE SIDE SIDE SIDE SIDE SIDE SIDE SIDE	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) 	FRONT-TO-BACK 12 92 0 Arichor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) Stance PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2" GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALLYSIS PRESSURE ZN. G (PSF) 10.5 189,7	WIND RESISTANCE (Ibs.) 4704 36064 0 (in.) 0 (in.) 0.5 944 210.8 172.5 /ALLS** INT. WALL LENGTH SHEATHED W/ OSB (TOTAL LENGTH, ONE SIDE. FT.) 2 LE/NAILING 2 TOTAL FORCE (LBS) 48647 UPLIFT OK	12 60 25 160 Nail Spacing reqid at 2nd Floor F-8 2nd Floor S-S 1st Floor S-S 1st Floor S-S 1st Floor S-S (POLINDS) 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	4704 23520 16450 bottom plete (in OK? YES YES YES YES YES YES YES YES
FLOOR FRONT-TC FLOOR FRONT-TC FLOOR SIDE-TO-3 FLOOR FRONT-TC FLOOR SIDE-TO-3 EMENT FRONT-TC EMENT FRONT-TC EMENT SIDE-TO-3 FLOOR FRONT-TC FLOOR SIDE-TO-3 ENT FRONT-TC TCOR FRONT-TC TC TCOR FRONT-TC TC TC TCOR FRONT-TC TC TC TC TC TC TC TC TC TC TC TC TC T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO-3 FLOOR SIDE-TO-3 FLOOR SIDE-TO-3 EMENT FRONT-TO EMENT SIDE-TO-3 FLOOR SIDE-TO-3 F	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Spacing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALYSIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plate (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plate (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
EE SHEET ST FOR TERN AS EXTERIO OF PITCH (MAX) OVERHANG MAIN ROOF** DNG PERIMETER SIDE EXTERIOR W E FOR CONSTRUC CONTINUOUS STI UNBLOCKED, A E FOR DESIGN: WALLS USED IN T IEASED BY 40% F ND SHEAR VALUE E: SOIL SITE CLA	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO-5 FLOOR SIDE-TO-5 FLOOR SIDE-TO-5 EMENT FRONT-TO EMENT SIDE-TO-5 FLOOR FRONT-TO FLOOR SIDE-TO-5 FLOOR SIDE-TO-5 FL	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y
FLOOR FRONT-TO FLOOR FRONT-TO FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- FLOOR SIDE-TO- EMENT FRONT-TO EMENT SIDE-TO- FLOOR SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-TO- SIDE-TO- SIDE-TO- FLOOR SIDE-TO- SIDE-T	12 92 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 25760 0 ADDITIONAL RESIS SEISMIC 0 0 0 0 0 0 0 0 0 0 0 0 0	EISMIC SIDE-TO-SIDE 12 60 25 STANCE REQUIRED WIND 0 0 0 0 0 0 0 0 0 0 0 0 0	RESISTANCE (Ibs.) 3360 16800 11750 RED IN ADDITION TO RESI INTERIOR X-BRACES (325#/BRACE) HEAR WALL RESISTANCE MEATHED WITH OSB SH/ PPLICABLE FOR FULL-HE WIND UPLIFT EOH -13.3, E -7.2, G -5.2 UPLIFT PER FT* (LBS) 16.56 PRESSURE ZN E (PSF) 16.12 POUNDS) S E OF THE ABOVE TABLE I HALL HAVE A MINIMUM U	FRONT-TO-BACK 12 92 0 Anchor Bolt Spacing diameter (in.) Shear value (per NDS) Specing F-B (inches) Spacing S-S (inches) STANCE PROVIDED BY EXTERIOR W INTERIOR WALL LENGTH W/ 1/2* GYPSUM BOARD PER TABLE (FT.) CAPACITIES (IF APPLICABLE). ALL BE ATTACHED WITH SAME STAF IGHT SECTIONS OF 2'-8" OR LONGEF ANALY SIS PRESSURE ZN. G (PSF) 10.5 189,7 251.6 FOR SHEATHING OF THE ENTIRE STI	WIND           RESISTANCE (Ibs.)           4704           36064           0           (In.)           0.5           944           210.8           172.5   (ALLS** INT. WALL LENGTH SHEATHED W/ OSE (TOTAL LENGTH, ONE SIDE. FT.)  PLE/MAILING  TOTAL FORCE (LES) 48647 UPLIFT OK RUCTURE. IN ADDITION DUE NOTH OF 2.95	12         60         25         16d Nail Spacing reqid at         2nd Floor F-8         2nd Floor S-S         1st Floor S-S         1st Floor S-S         Quitter floor S-S         1st Floor S-S         0         173.1	4704 23520 16450 bottom plete (in VES YES YES YES YES YES YES YES YES YES Y

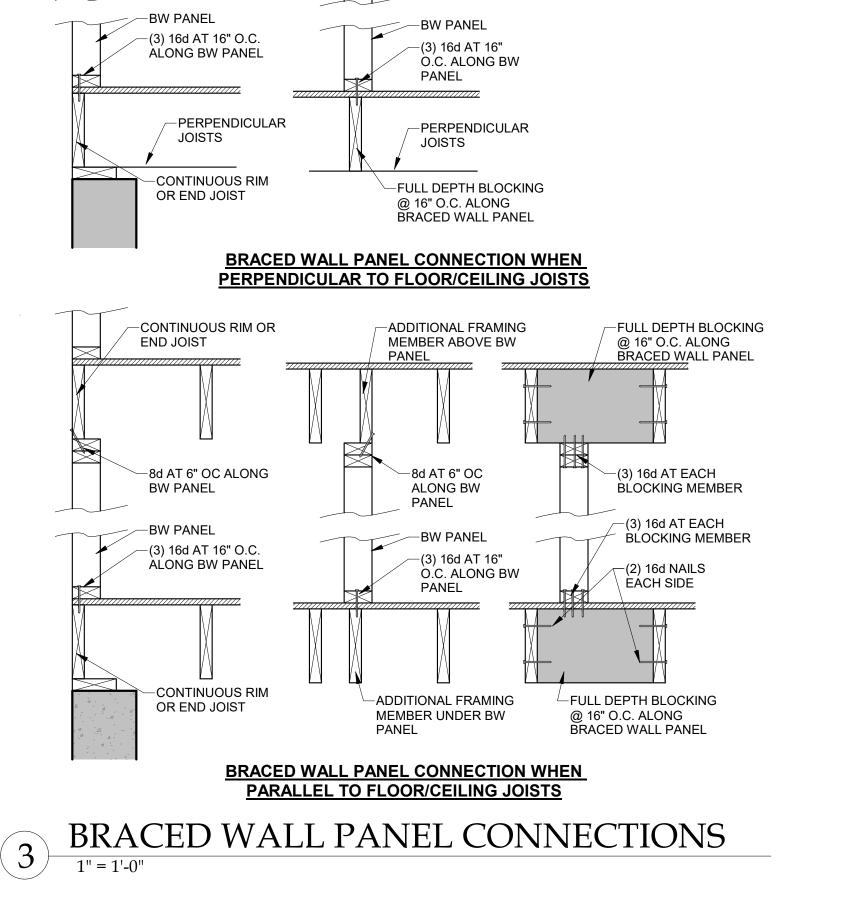

-PERPENDICULAR

-FULL DEPTH BLOCKING @ 16" O.C. ALONG BRACED WALL PANEL

-8d AT 6" OC

ALONG BW PANEL


JOISTS


-CONTINUOUS RIM OR

-8d AT 6" OC ALONG

**BW PANEL** 

END JOIST

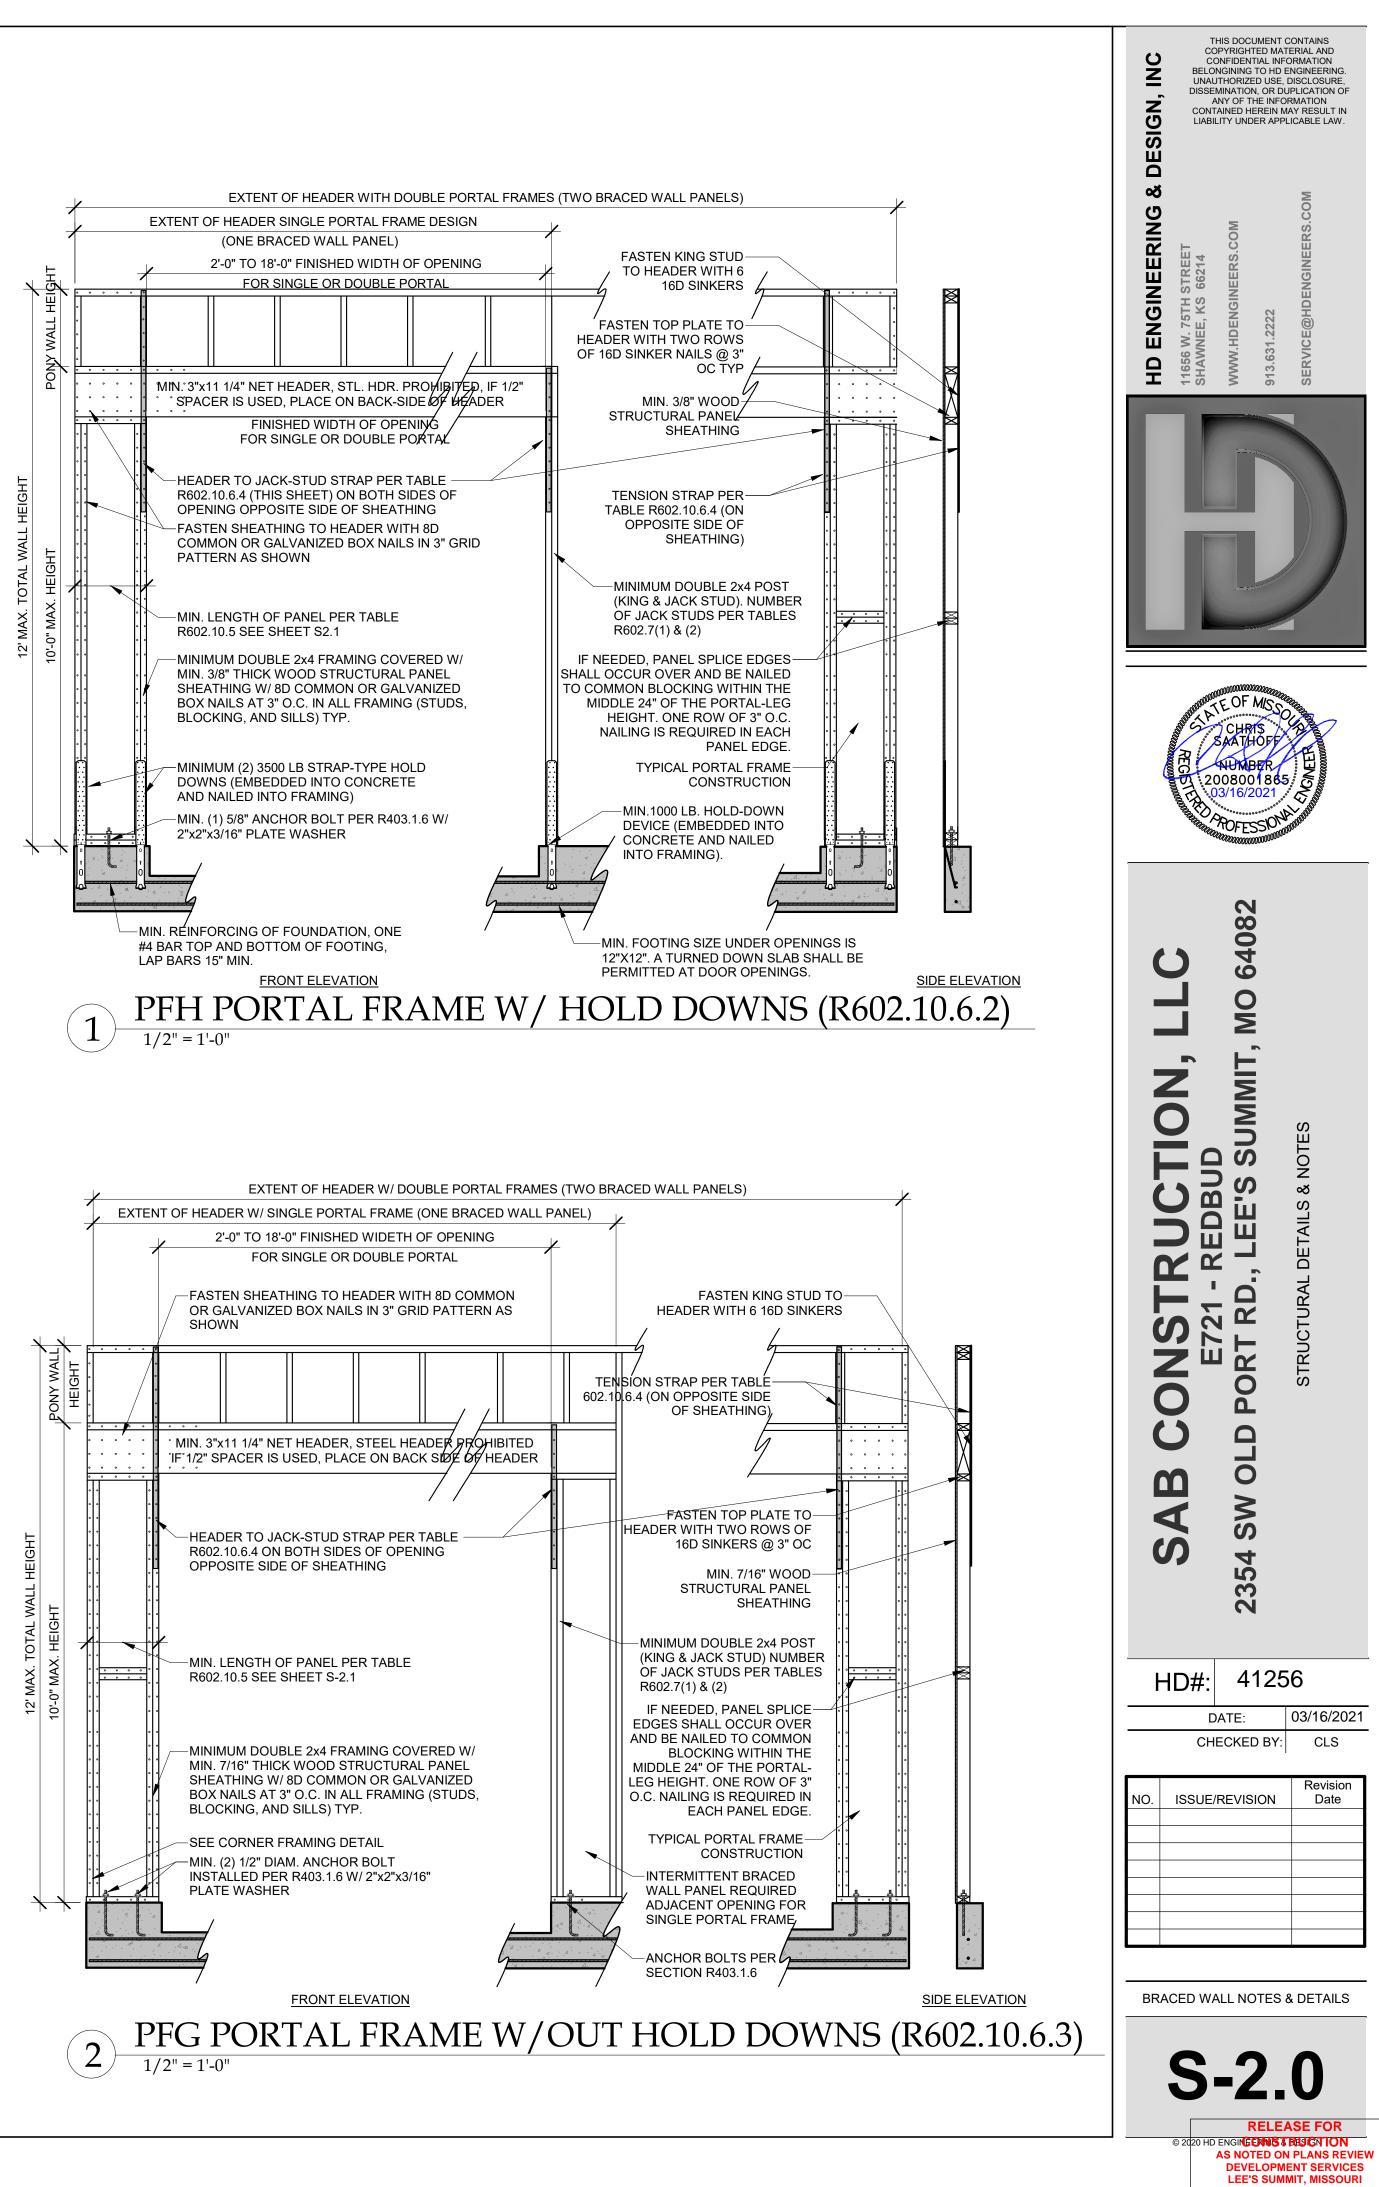

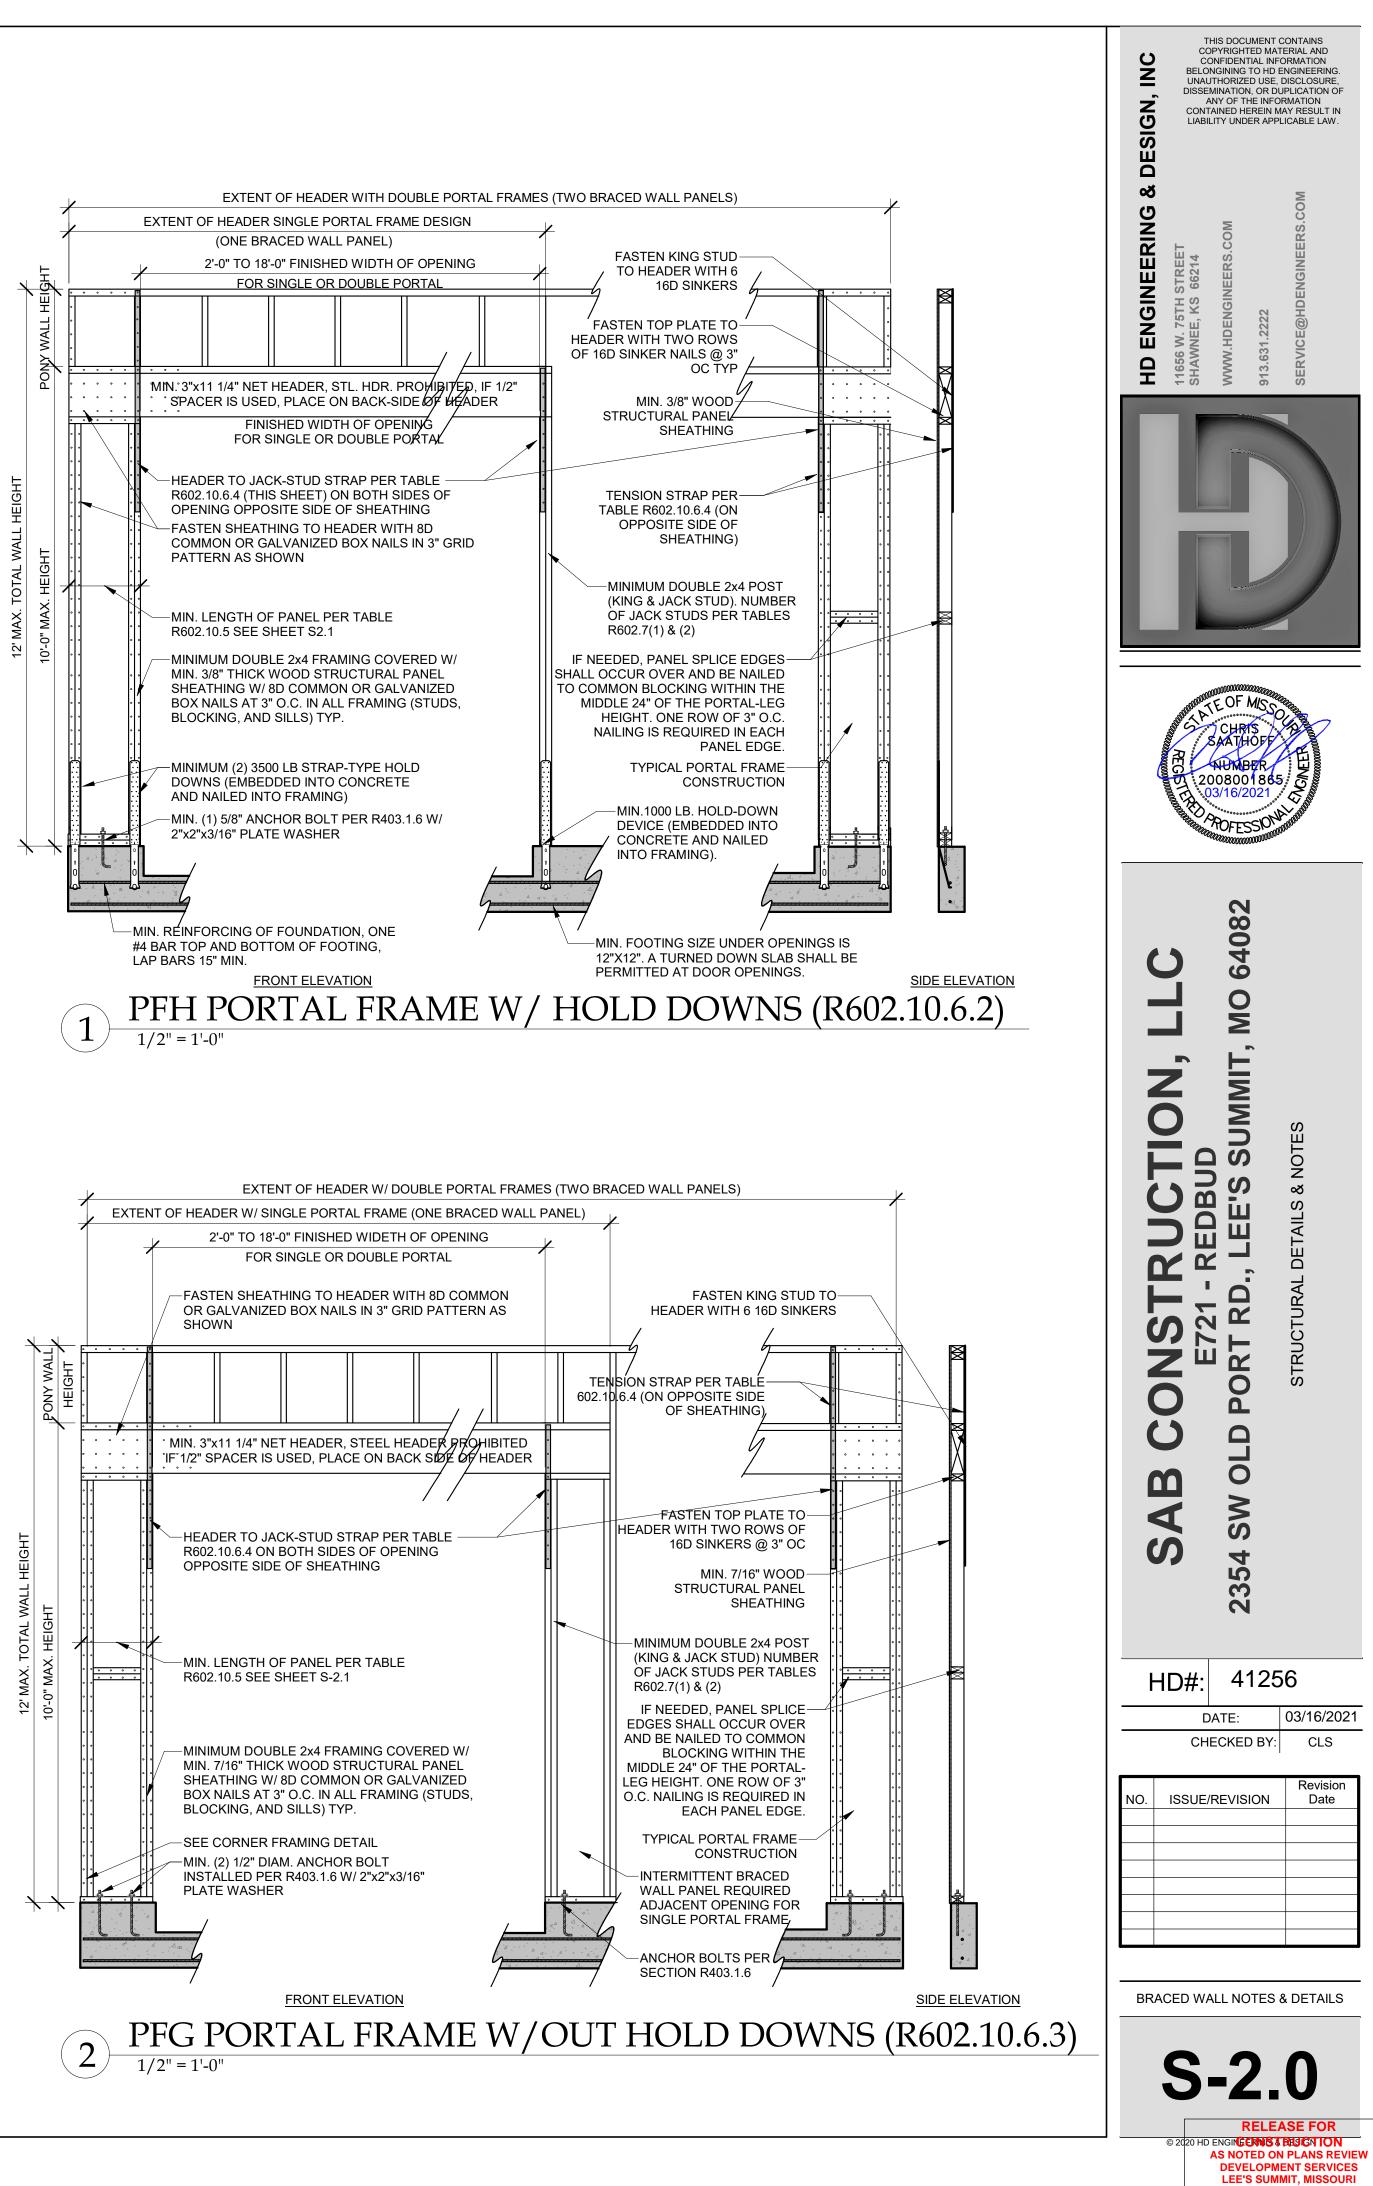

LIB BRACING			H D		<u>N 2</u>	9'-0"     5'-2"     9'-       10'-0"     5'-9"     10'-       11'-0"     NP        12'-0"     NP
TABLE R602.10.5	<u>MIN</u> WAL				<b>FH</b>	OF BRACED
-				(INCHES)	a	
METHOD (SEE TABLE R602.10.4)			ALL HEIGI			CONTRIBUTING LENGTH (INCHES)
	8 FEET	9 FEET		11 FEET		• • • • • • •
DWB,WSP,SFB,PBS,PCP,HPS,BV-WSP	48	48	48	53	58	ACTUAL <sup>b</sup> DOUBLE SIDED = ACTUAL
GB	48	48	48	53	58	SINGLE SIDED=.5xACTUAL
LIB SDC A, B, AND C ULTIMATE DESIGN	55 28	62 32	69 34	NP 38	NP 42	ACTUAL <sup>b</sup>
ABW SDC D <sub>0</sub> ,D <sub>1</sub> ,D <sub>2</sub> ULTIMATE DESIGN	32	32	34 34	38 NP	42 NP	48
WIND SPEED<140           SUPPORTING ROOF ONLY	16	16	16	NOTE C		48
PFH SPTNG. ONE STORY & ROOF	24	24	24	NOTE C	NOTE C	48
PFG	24	27	30	NOTE D	NOTE D	1.5 x ACTUAL <sup>b</sup>
CS-G	24	27	30	33	36	
	16	18	20	NOTE E	NOTE E	ACTUAL <sup>b</sup>
ADJACENT CLEAR OPENING HEIGHT (INCHES)						
≤64	24	27	30	33	36	
68	26	27	30	33	36	
72	27	27	30	33	36	
76	30	29	30	33	36	
80	32 35	30 32	30 32	33 33	36 36	
88	35	32	32	33	36	
1	43	37	35	35	36	
92		_				
S-WSP, 96	48	41	38	36	36	ACTUAL b
	48	41 44	38 40	36 38	36 38	ACTUAL <sup>b</sup>
S-WSP, 96 S-SFB 100 104		44 49	40 43	38 40	38 39	ACTUAL <sup>b</sup>
S-WSP, S-SFB 100 104 108	- - -	44 49 54	40 43 46	38 40 43	38 39 41	ACTUAL <sup>b</sup>
S-WSP, S-SFB 100 104 108 112	- - - -	44 49	40 43 46 50	38 40 43 45	38 39 41 43	ACTUAL <sup>b</sup>
S-WSP, S-SFB 100 104 108	- - -	44 49 54	40 43 46	38 40 43	38 39 41	ACTUAL <sup>b</sup>
S-WSP, S-SFB 96 100 104 108 112 116	- - - - -	44 49 54 - -	40 43 46 50 55	38 40 43 45 48	38 39 41 43 45	ACTUAL <sup>b</sup>
S-WSP, S-SFB 96 100 104 108 112 116 120	- - - - - -	44 49 54 - - -	40 43 46 50 55 60	38 40 43 45 48 52	38 39 41 43 45 48	ACTUAL <sup>b</sup>
S-WSP, S-SFB 96 100 104 108 112 116 120 124	- - - - - - - -	44 49 54 - - - -	40 43 46 50 55 60 -	38 40 43 45 48 52 56	38 39 41 43 45 48 51	ACTUAL <sup>b</sup>
S-WSP, S-SFB 96 100 104 108 112 116 120 124 128	- - - - - - - - - - -	44 49 54 - - - -	40 43 46 50 55 60 - -	38 40 43 45 48 52 56 61	38 39 41 43 45 48 51 54	ACTUAL <sup>b</sup>
S-WSP, S-SFB 96 100 104 108 112 116 120 124 128 132	- - - - - - - - - - - - -	44 49 54 - - - -	40 43 46 50 55 60 - -	38 40 43 45 48 52 56 61 66	38 39 41 43 45 48 51 54 54 58	ACTUAL <sup>b</sup>

RATING OF 24/0 FOR 16" O.C. STUD SPACING WITH 6d NAILS COMMON NAILS @ 6" O.C. EDGES AND 12" O.C. FIELD OR SHEATHING THICKNESS NOT LESS THANK 7/16" WITH MINIMUM SPAN RATING OF 24/16 FOR 24" O.C. SPACING WITH 8d COMMON NAILS @ 6" O.C. EDGES AND 12" O.C. IN FIELD (NOTE: FRAMING MEMBERS 16" O.C. MAX, UNBLOCKED, AND W/ SHEATHING APPLIED DIRECTLY TO FRAMING MEMBERS).

### INTERIOR BRACED WALLS (SEE ON THIS SHEET)

GB METHOD: 1/2" MINIMUM GYPSUM BOARD OVER STUDS SPACED @ 24" MAXIMUM FASTENED W/ #6- 1 1/4" TYPE "W" OR "S" DRYWALL SCREWS @ 7" O.C. EDGES AND FIELD (MIN. 4'-0" SECTION FOR BOTH SIDES) OR


. <u>LIB METHOD:</u> 1X4 WOOD FASTENED W/ (3) 8d COMMON NAILS OR SIMPSON / USP 16 GA. TYPE WB (OR EQUIVALENT) STL. X-BRACE(S) @ 45° TO 60° ANGLES, MAXIMUM 16" O.C. STUDS FASTENED PER MANUF. SPECS.





		MAX. TOTAL WALL HEIGHT (FEET)		TENSION STRAP CAPACI	TY REQUIRED (POUNDS) <sup>a</sup>		
MINIMUM WALL STUD FRAMING	MAX. PONY		MAX. OPENING	ULTIMATE DESIGN WIND SPEED V (MPH)			
NOMINAL SIZE & GRADE	WALL HEIGHT (FEET)		WIDTH (FEET)	115	115		
				EXPOSURE B	EXPOSURE C		
	0	10	18	1,000	1,000		
		10	9	1,000	1,000		
2X4 NO. 2 GRADE	1		16	1,025	2,500		
			18	1,275	2,850		
	2		9	1,000	1,875		
		10	16	2,175	4,125		
			18	2,500	DR		
			9	1,500	3,175		
	2	12	16	3,375	DR		
			18	3,975	DR		
		12	9	2,750	DR		
	4	12	12	3,775	DR		
			9	1,000	2,025		
	2	12	16	2,150	3,675		
			18	2,550	DR		
2X6 STUD GRADE			9	1,750	3,125		
	4	12	16	2,400	DR		
			18	3,800	DR		


a. DR = DESIGN REQUIRED b. STRAP SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.


3/8" = 1'-0"

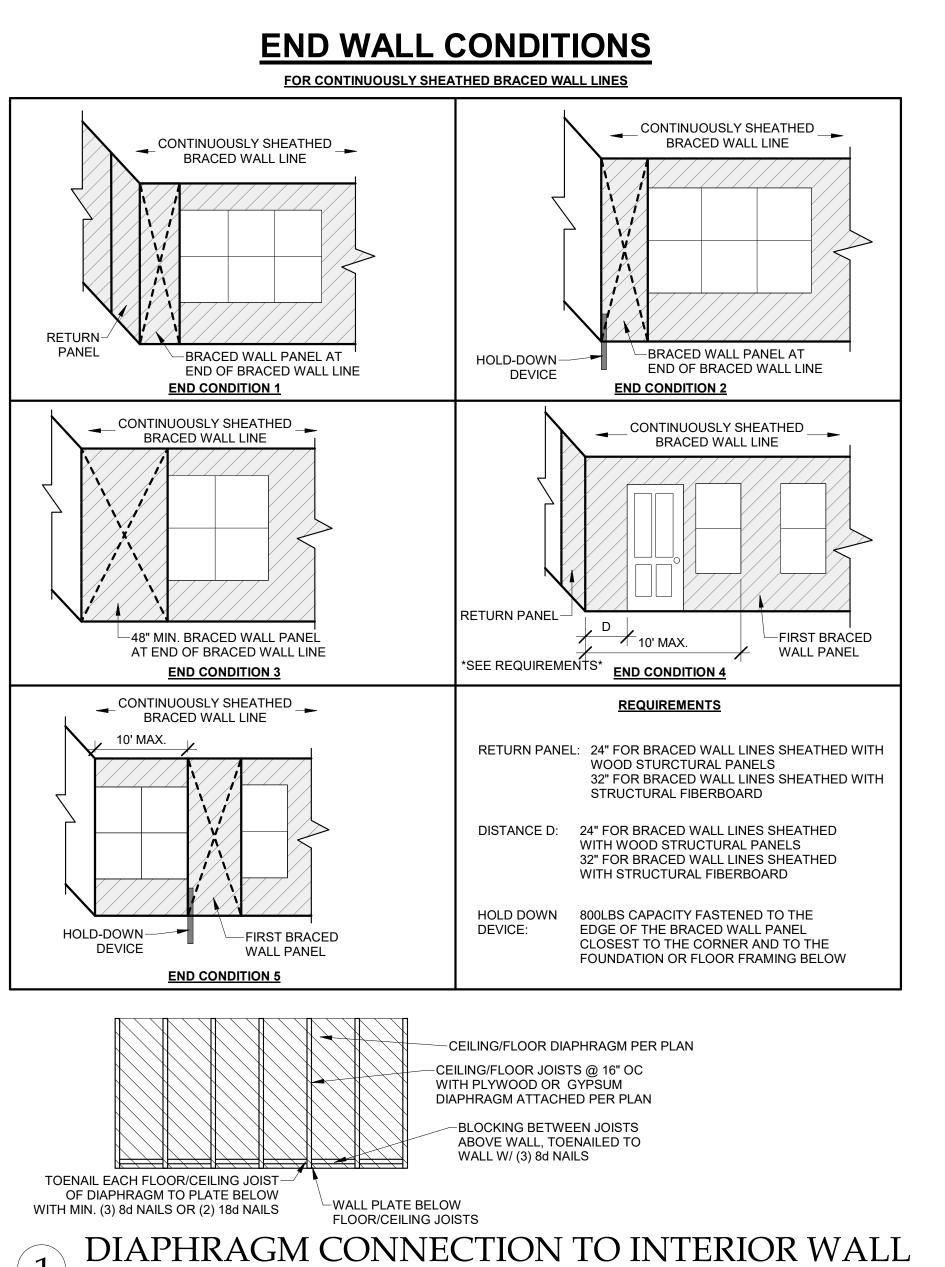


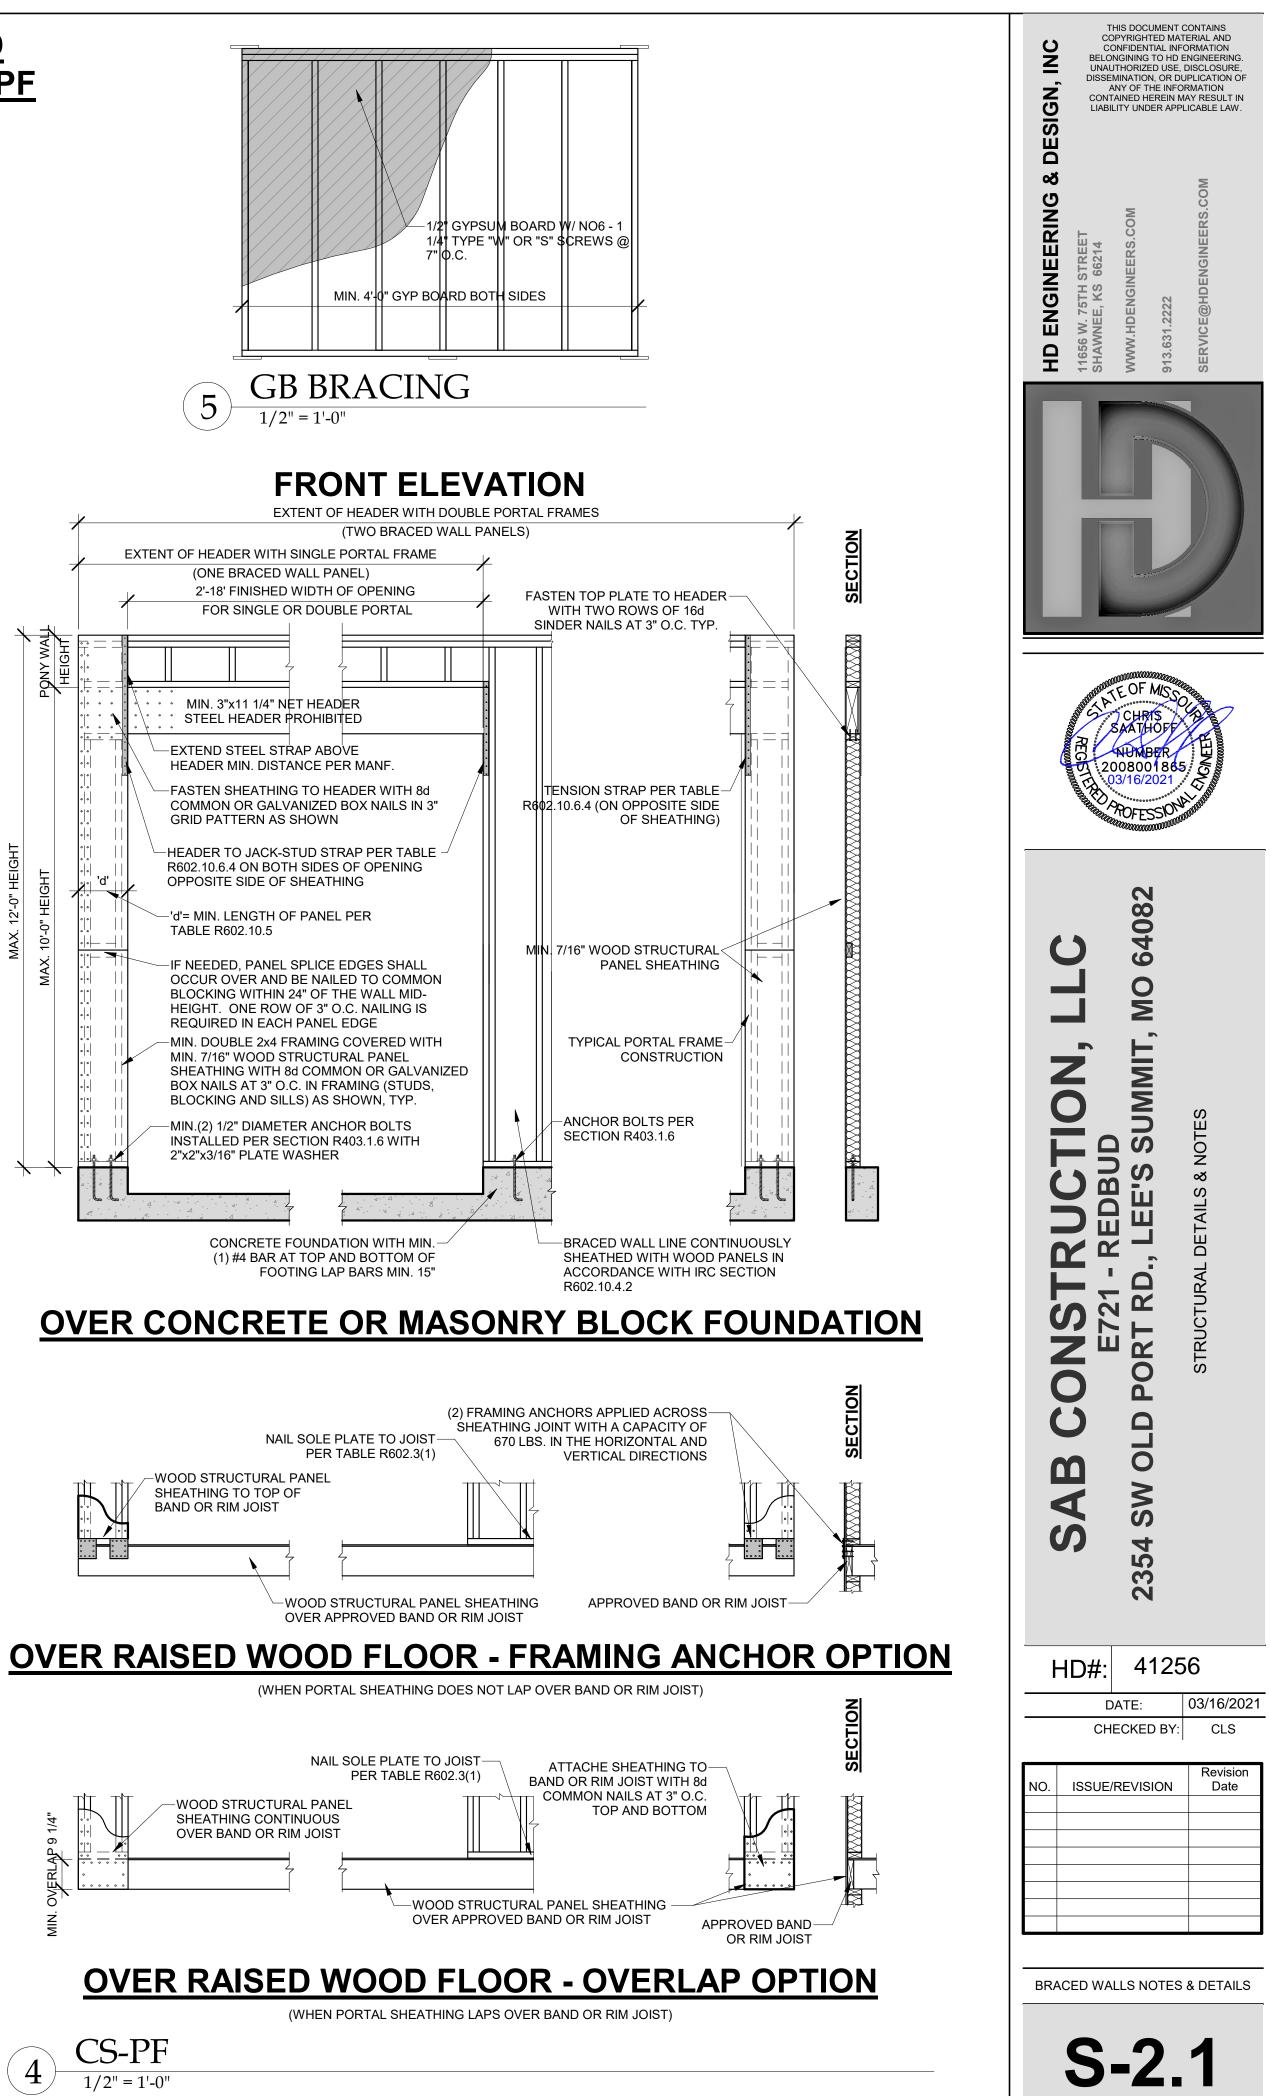


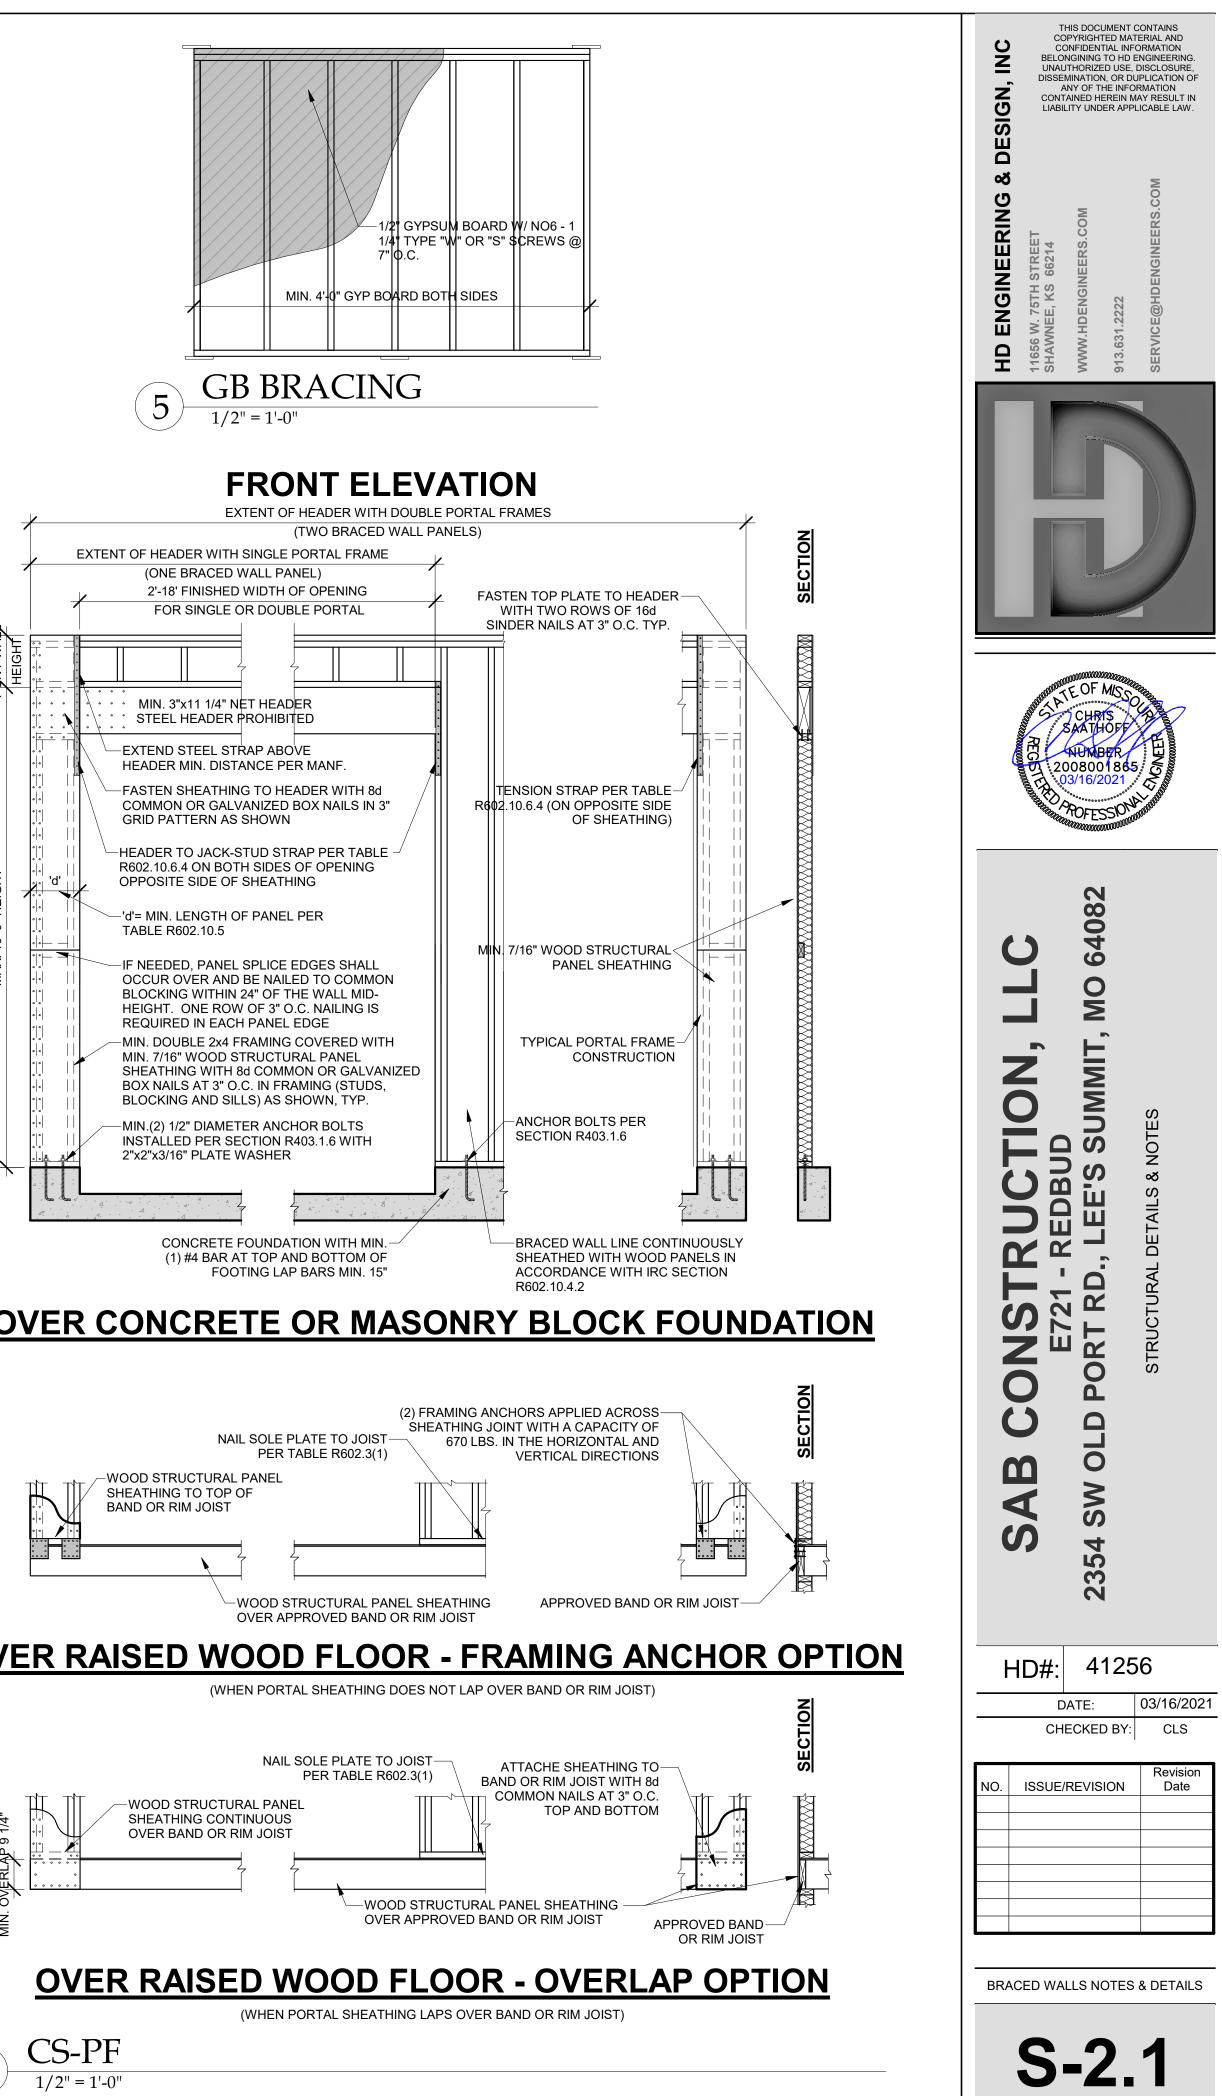

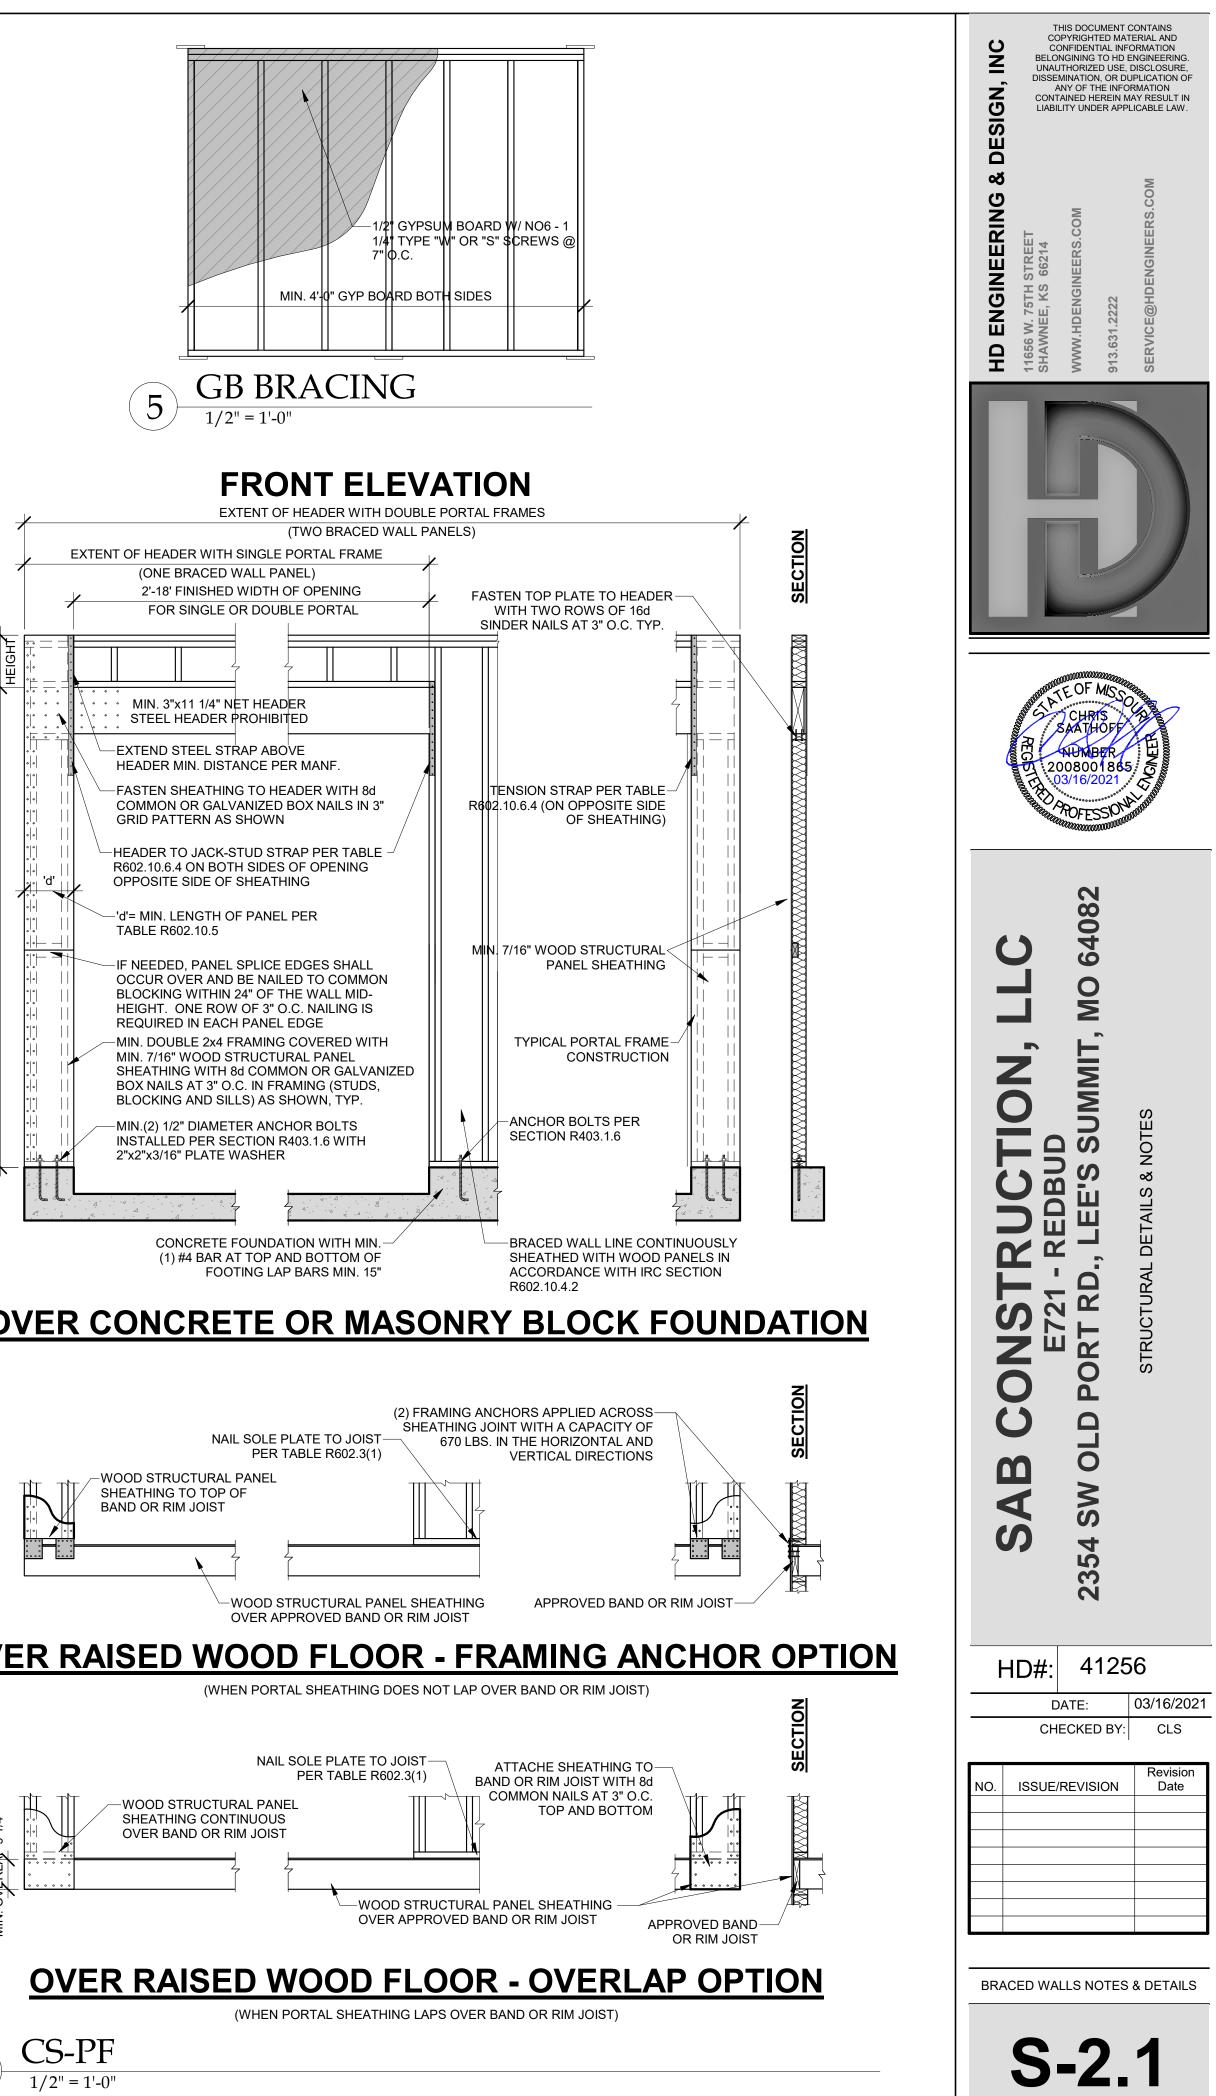


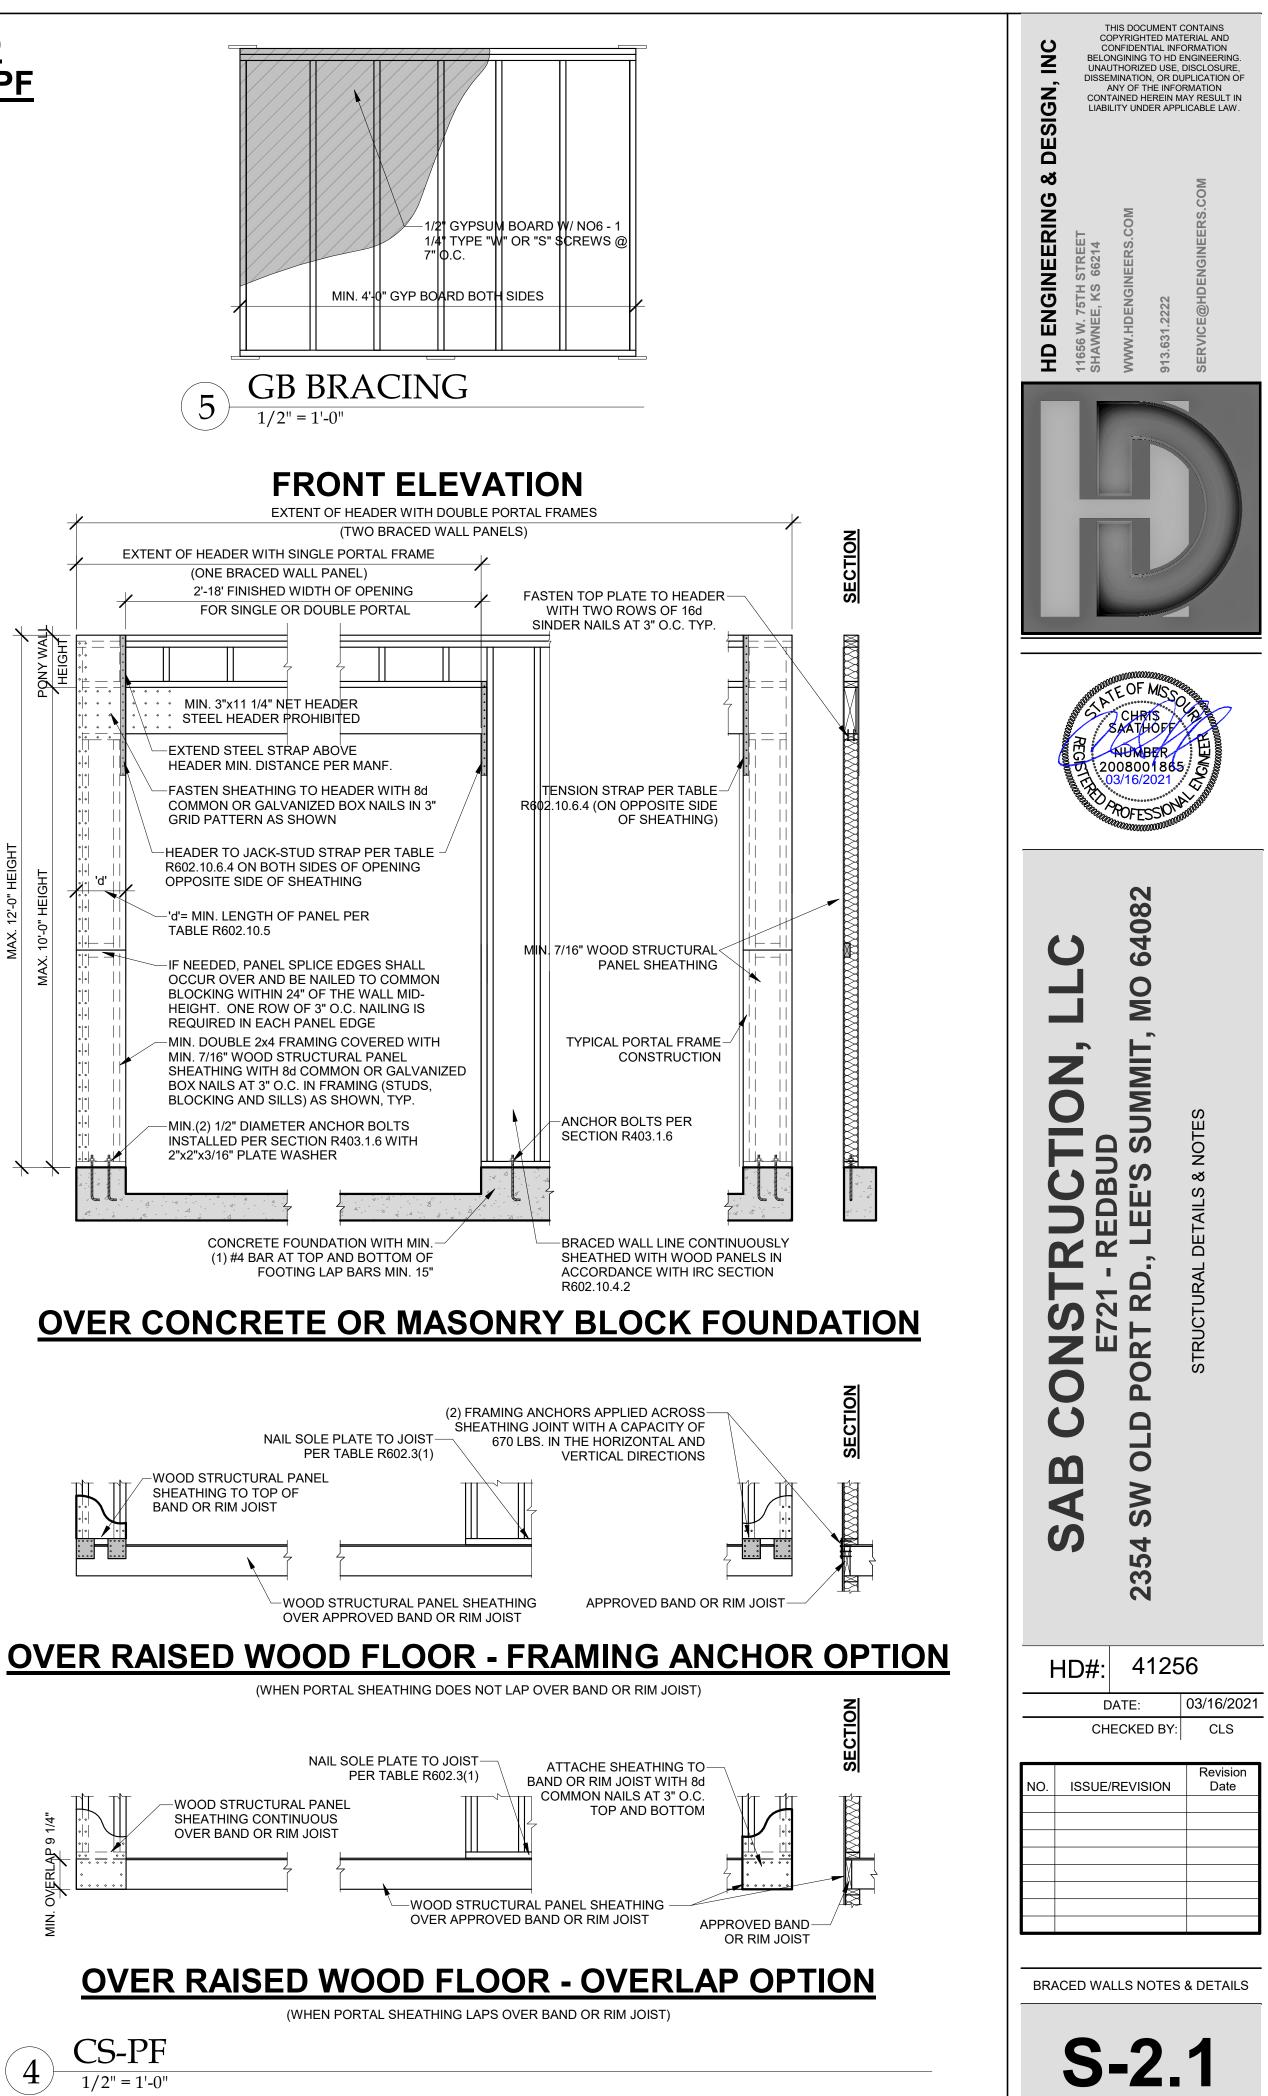

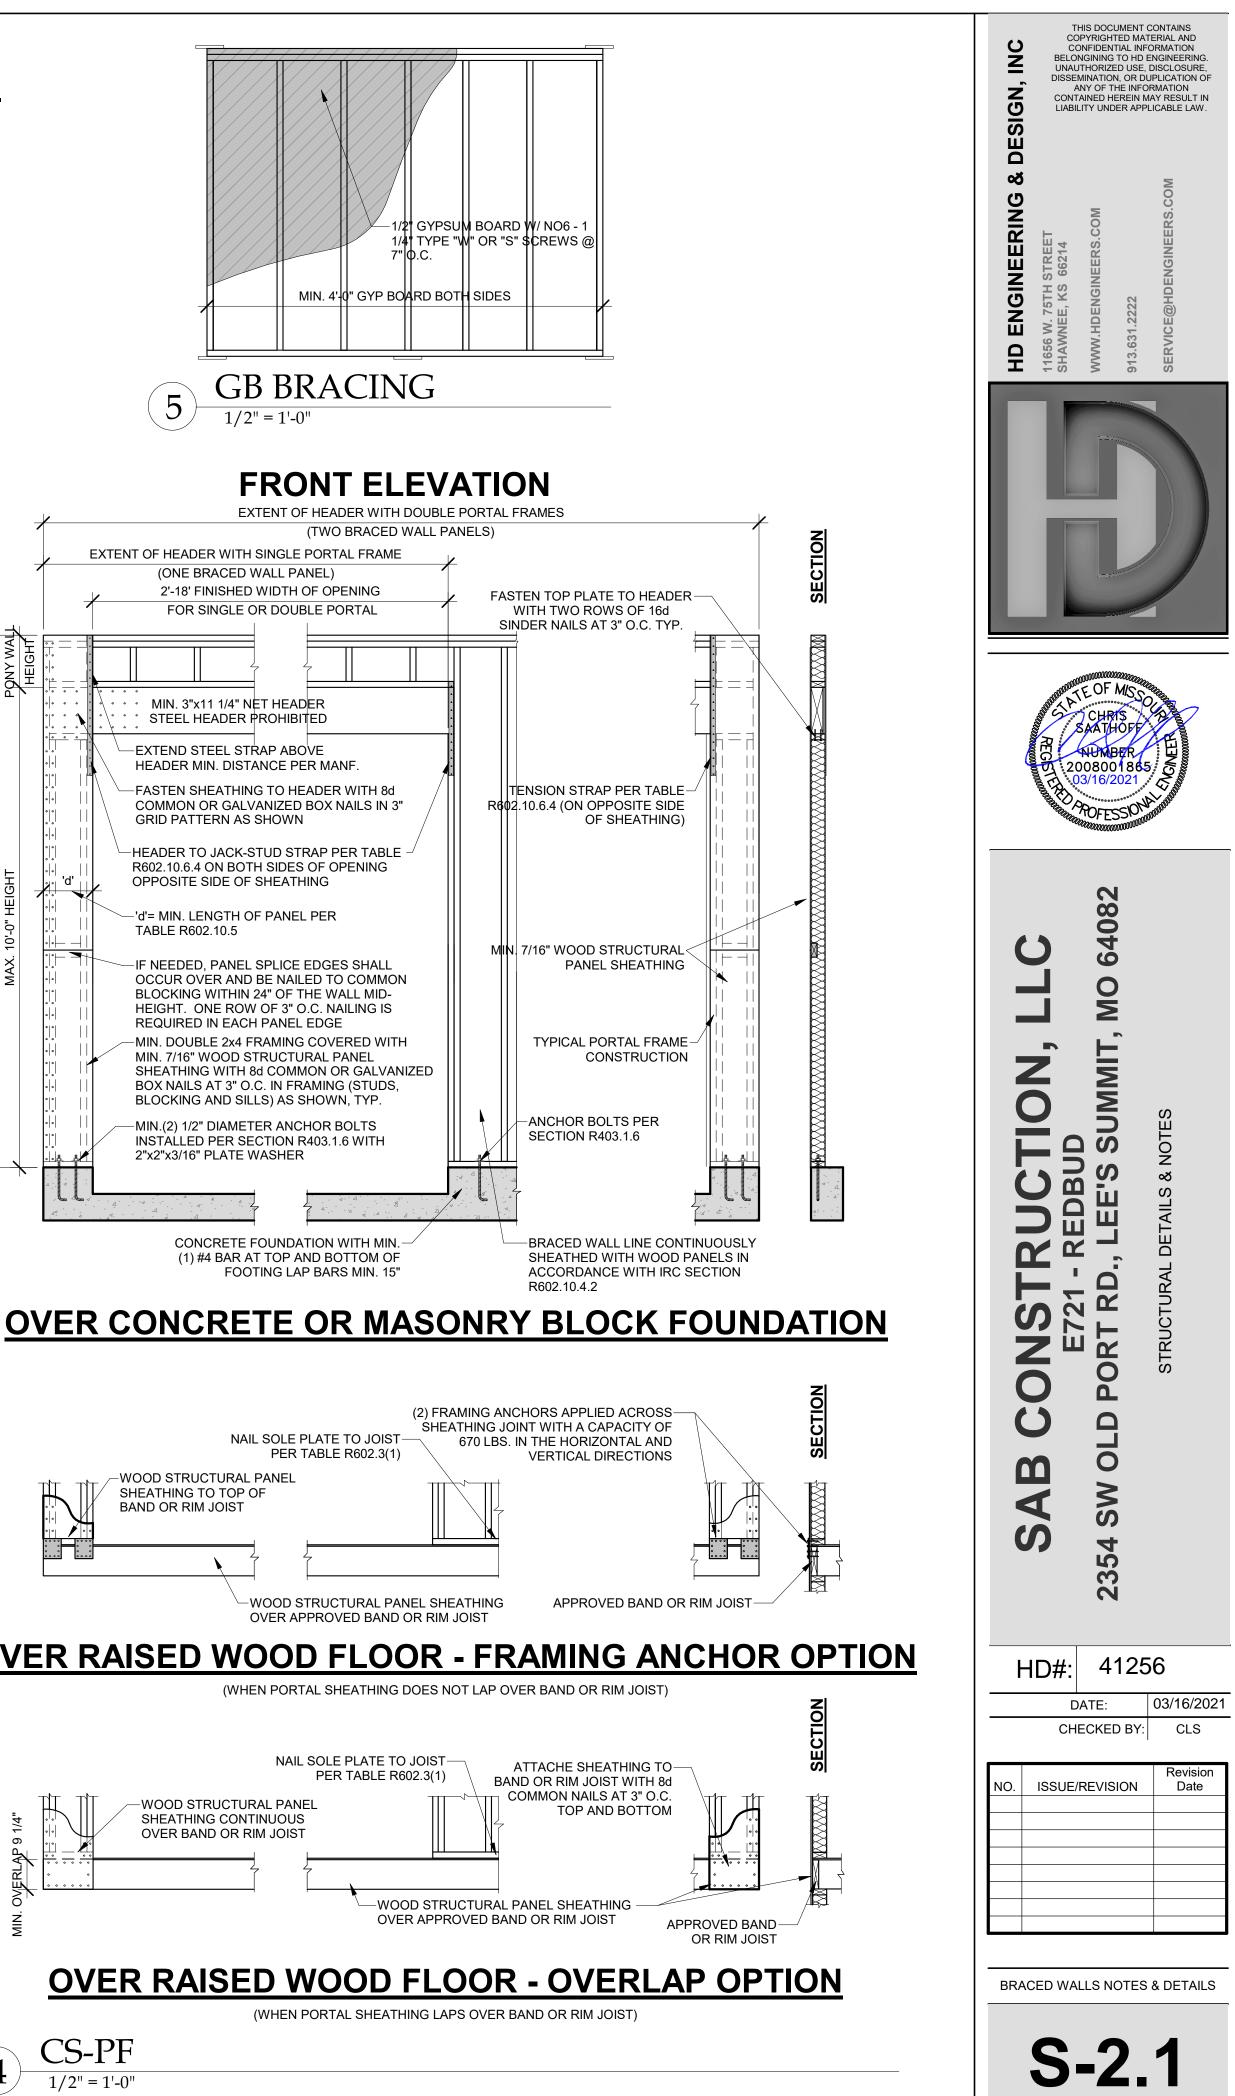

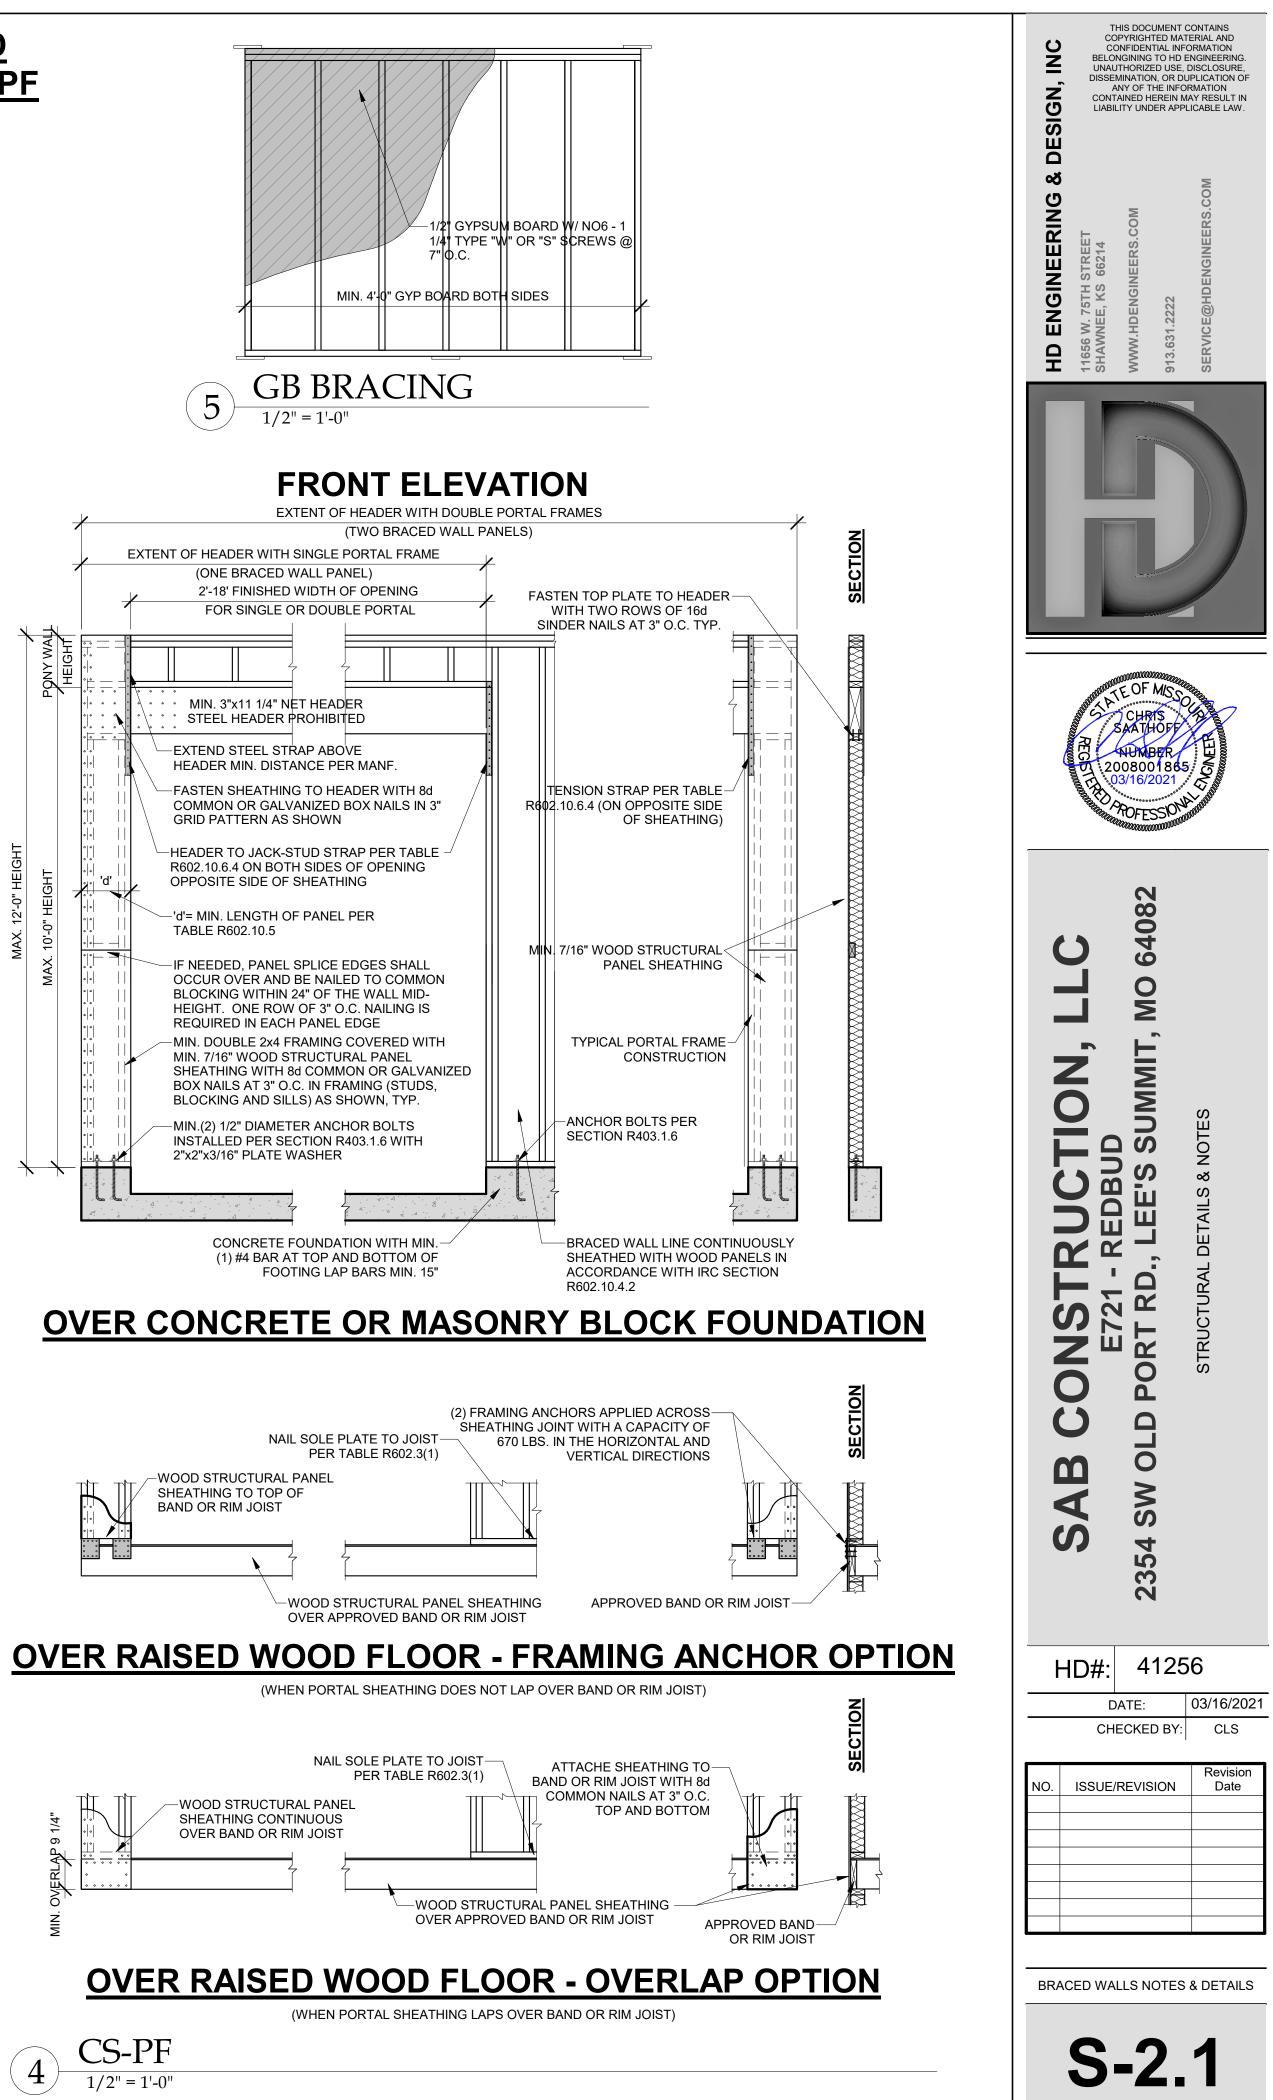

**RELEASE FOR** 20 HD ENGINEERNS & REJENION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

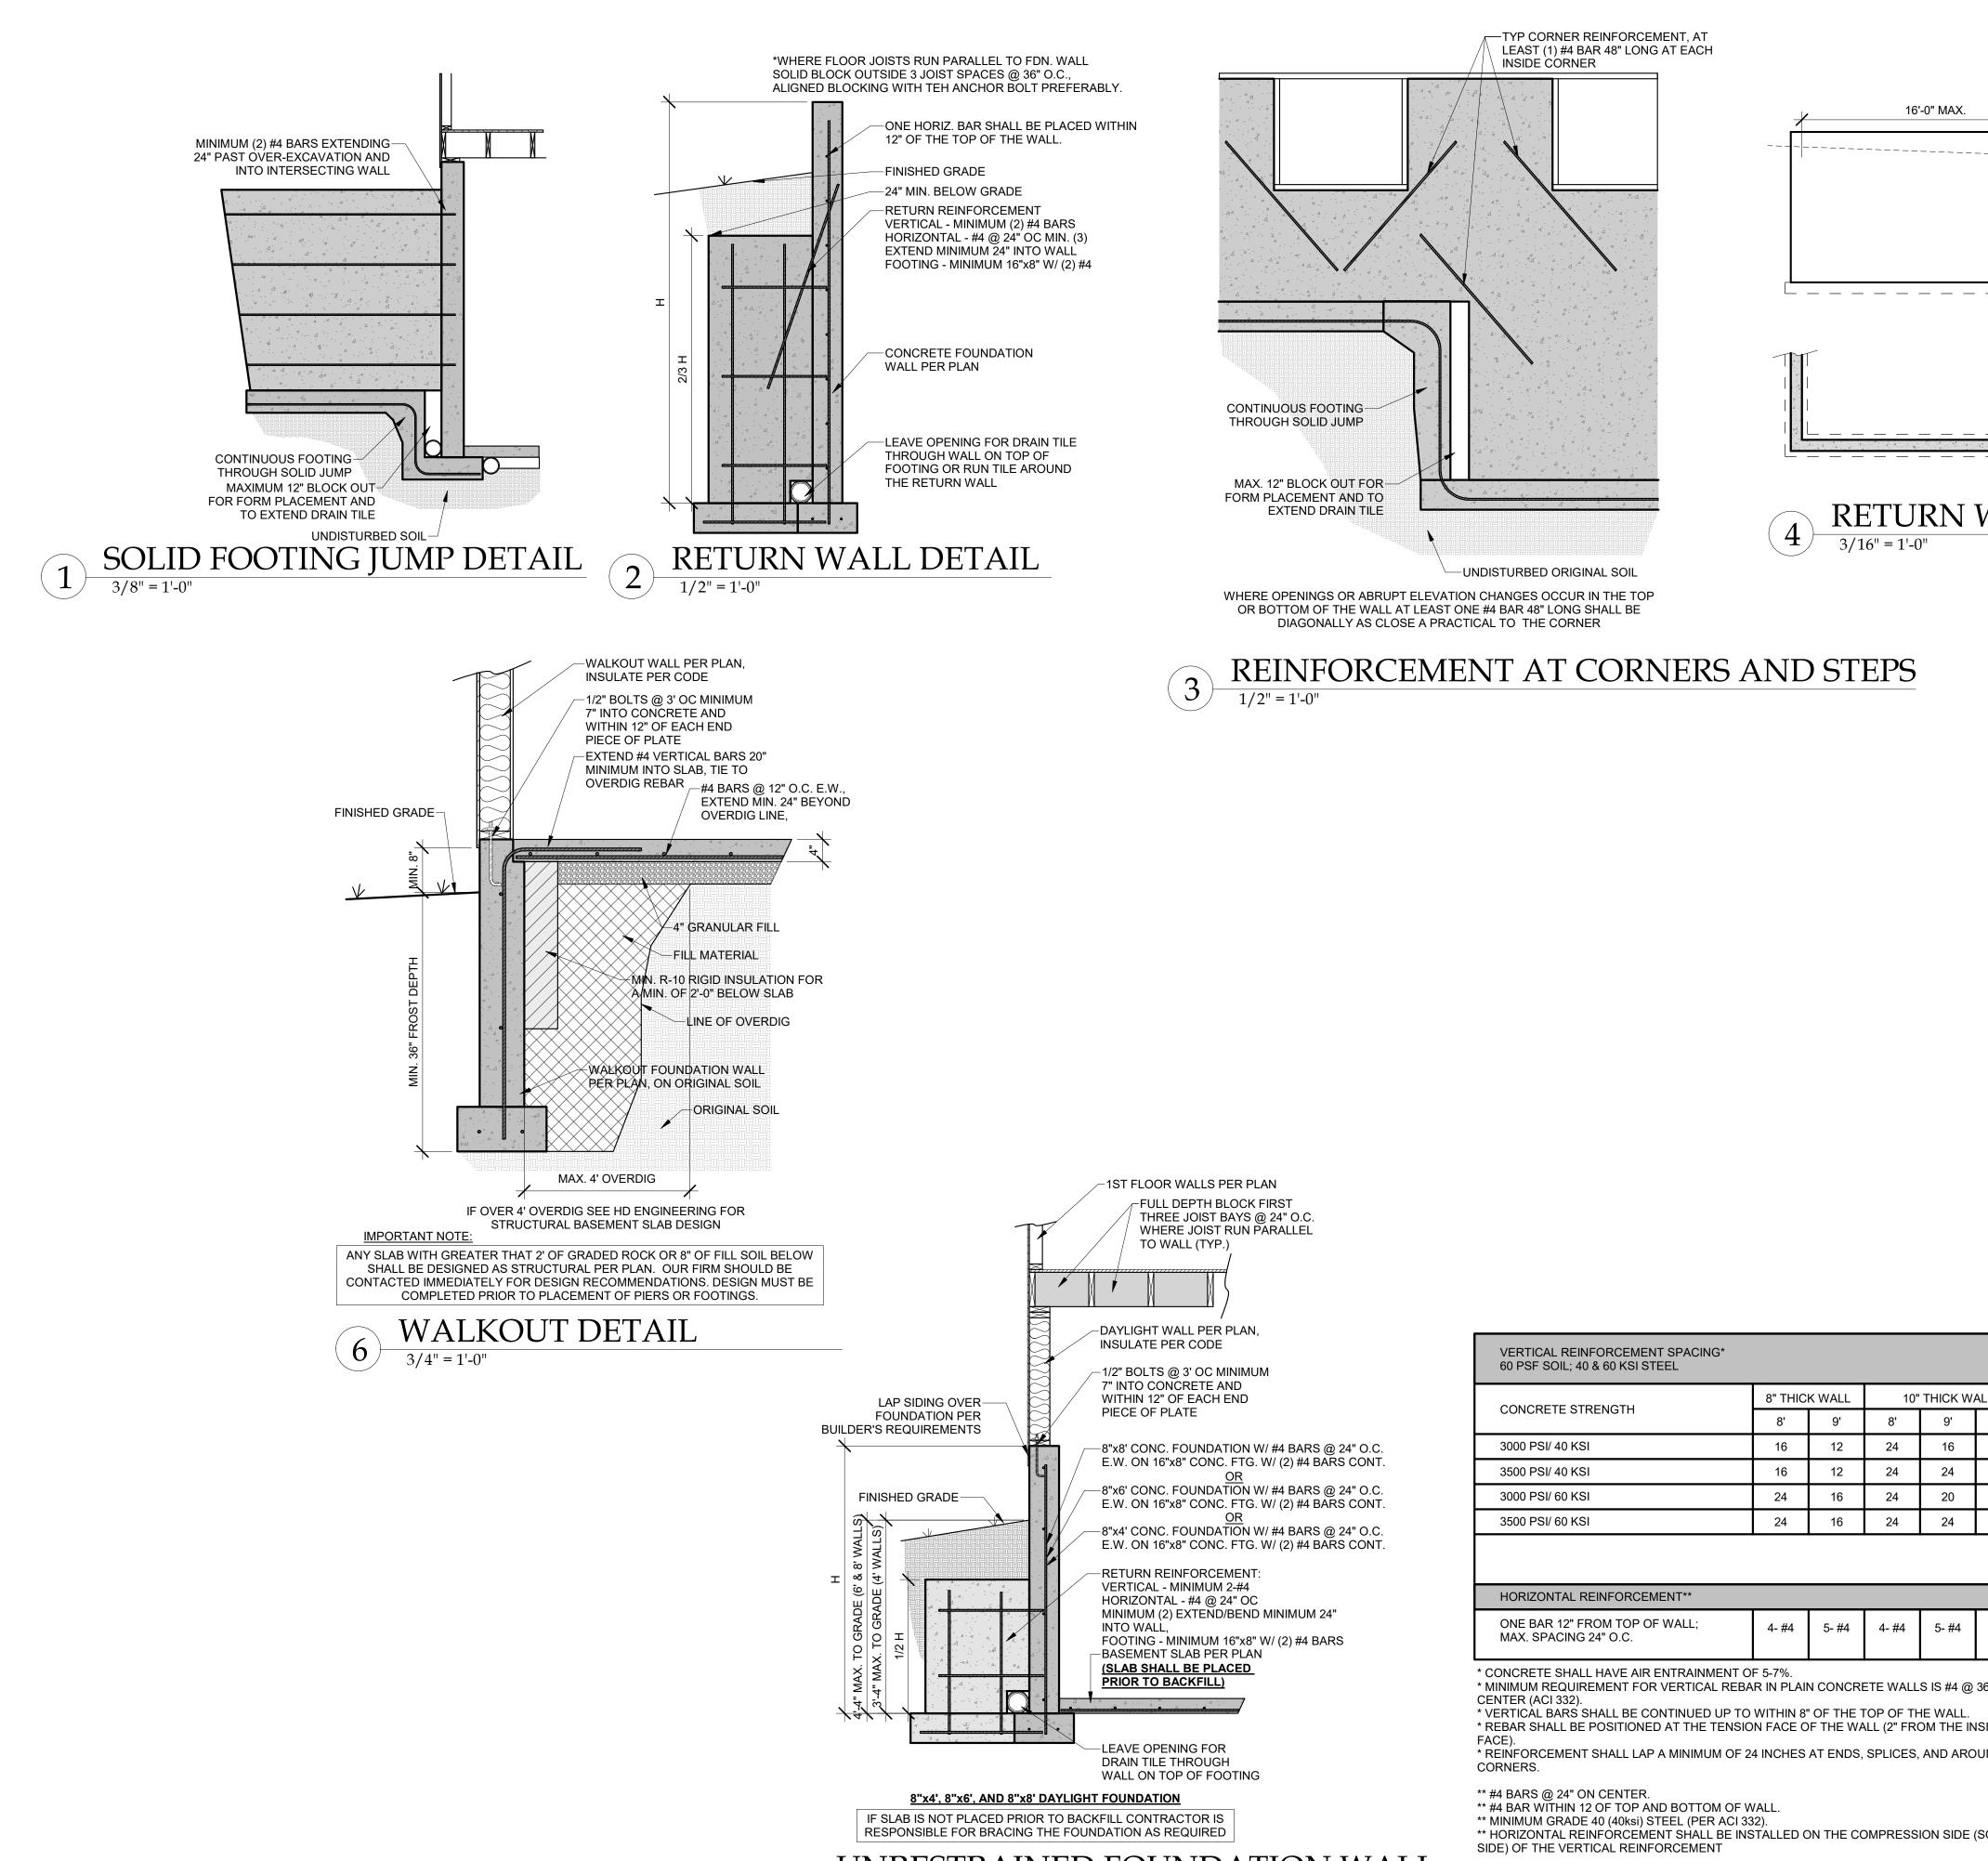

## UNRESTRAINED FOUNDATION WALL 1/2" = 1'-0"

5


CONCRETE STRENGTH	8" THIC	K WALL	10"	THICK W	AL
CONCRETE STRENGTH	8'	9'	8'	9'	
3000 PSI/ 40 KSI	16	12	24	16	
3500 PSI/ 40 KSI	16	12	24	24	
3000 PSI/ 60 KSI	24	16	24	20	
3500 PSI/ 60 KSI	24	16	24	24	

THIS DOCUMENT CONTAINS COPYRIGHTED MATERIAL AND CONFIDENTIAL INFORMATION BELONGINING TO HD ENGINEERIN INAUTHORIZED USE, DISCLOSURE ISSEMINATION. OR DUPLICATION OF ANY OF THE INFORMATION CONTAINED HEREIN MAY RESULT IN IABILITY UNDER APPLICABLE LAW. 16'-0" MAX. 8'-0" MAX.  $+\!\!\!/$ -RETURN WALL NOT ----ŏ **REQUIRED FOR 5'** TALL OR LESS C `<u>`</u> GINEERI ЙШ HD -IF THE WALL IS NOT SUPPORTED AT THE TOP, PLACE THE FIRST RETURN NOT MORE THAN 8' FROM THE LOW END OF THE STEP. **RETURN WALL PLACEMENT** -<u>MIN.</u> FOOTING SIZE: -16"x8" STANDARD FOOTING -20"x10" FOOTING WALL SUPPORTING CONCRETE BASEMENT WALL PLUS BRICK OR STONE EXCEEDING 5' IN HEIGHT -OVERLAP JOINT AT LEAST 6" AT SEAM AND EDGES. BLATTER LAYER BETWEEN BARRIER AND SLAB NOT PERMITTED 082 -SEAL/BOND BREAK FILTER FABRIC--TO MINIMIZE CURING TIME AND CONTROL BLEED WATER USE APPROVED ADDITIVES TO REDUCE SLUMP INSTEAD OF ADDING Ö WATER DURING POURS. OM -MIN. 4" WASH CRUSHED STONE BASE **MMIT** OR CLEAN GRAVEL Ζ 6 MIL VAPOR RETARDER DIRECTLY UNDER SLAB — MIN. (2) #4 BARS CONTINUOUS UNIFORMLY SPACED WITH 3" CLEAR AT THE BOTTOM DS PERFORATED DRAIN PIPE F FOUNDATION FOOTINGS **U** M D Ш RD S ZO 0 Δ C 0 0 m SW 4 ALL 10' 12 12 16 16 S S 3 N 41256 HD#: 03/16/2021 DATE: CHECKED BY: CLS 6- #4 Revisio **ISSUE/REVISION** Date CONCRETE DETAILS **S-3.0** DETAILS PROVIDED ARE DERIVED FROM JOHNSON COUNTY RESIDENTIAL FOUNDATION GUIDELINE **RELEASE FOR** 

\* MINIMUM REQUIREMENT FOR VERTICAL REBAR IN PLAIN CONCRETE WALLS IS #4 @ 36" ON \* REBAR SHALL BE POSITIONED AT THE TENSION FACE OF THE WALL (2" FROM THE INSIDE \* REINFORCEMENT SHALL LAP A MINIMUM OF 24 INCHES AT ENDS, SPLICES, AND AROUND \*\* HORIZONTAL REINFORCEMENT SHALL BE INSTALLED ON THE COMPRESSION SIDE (SOIL

> AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI

2020 HD ENGINGERNS & RESIGN TON

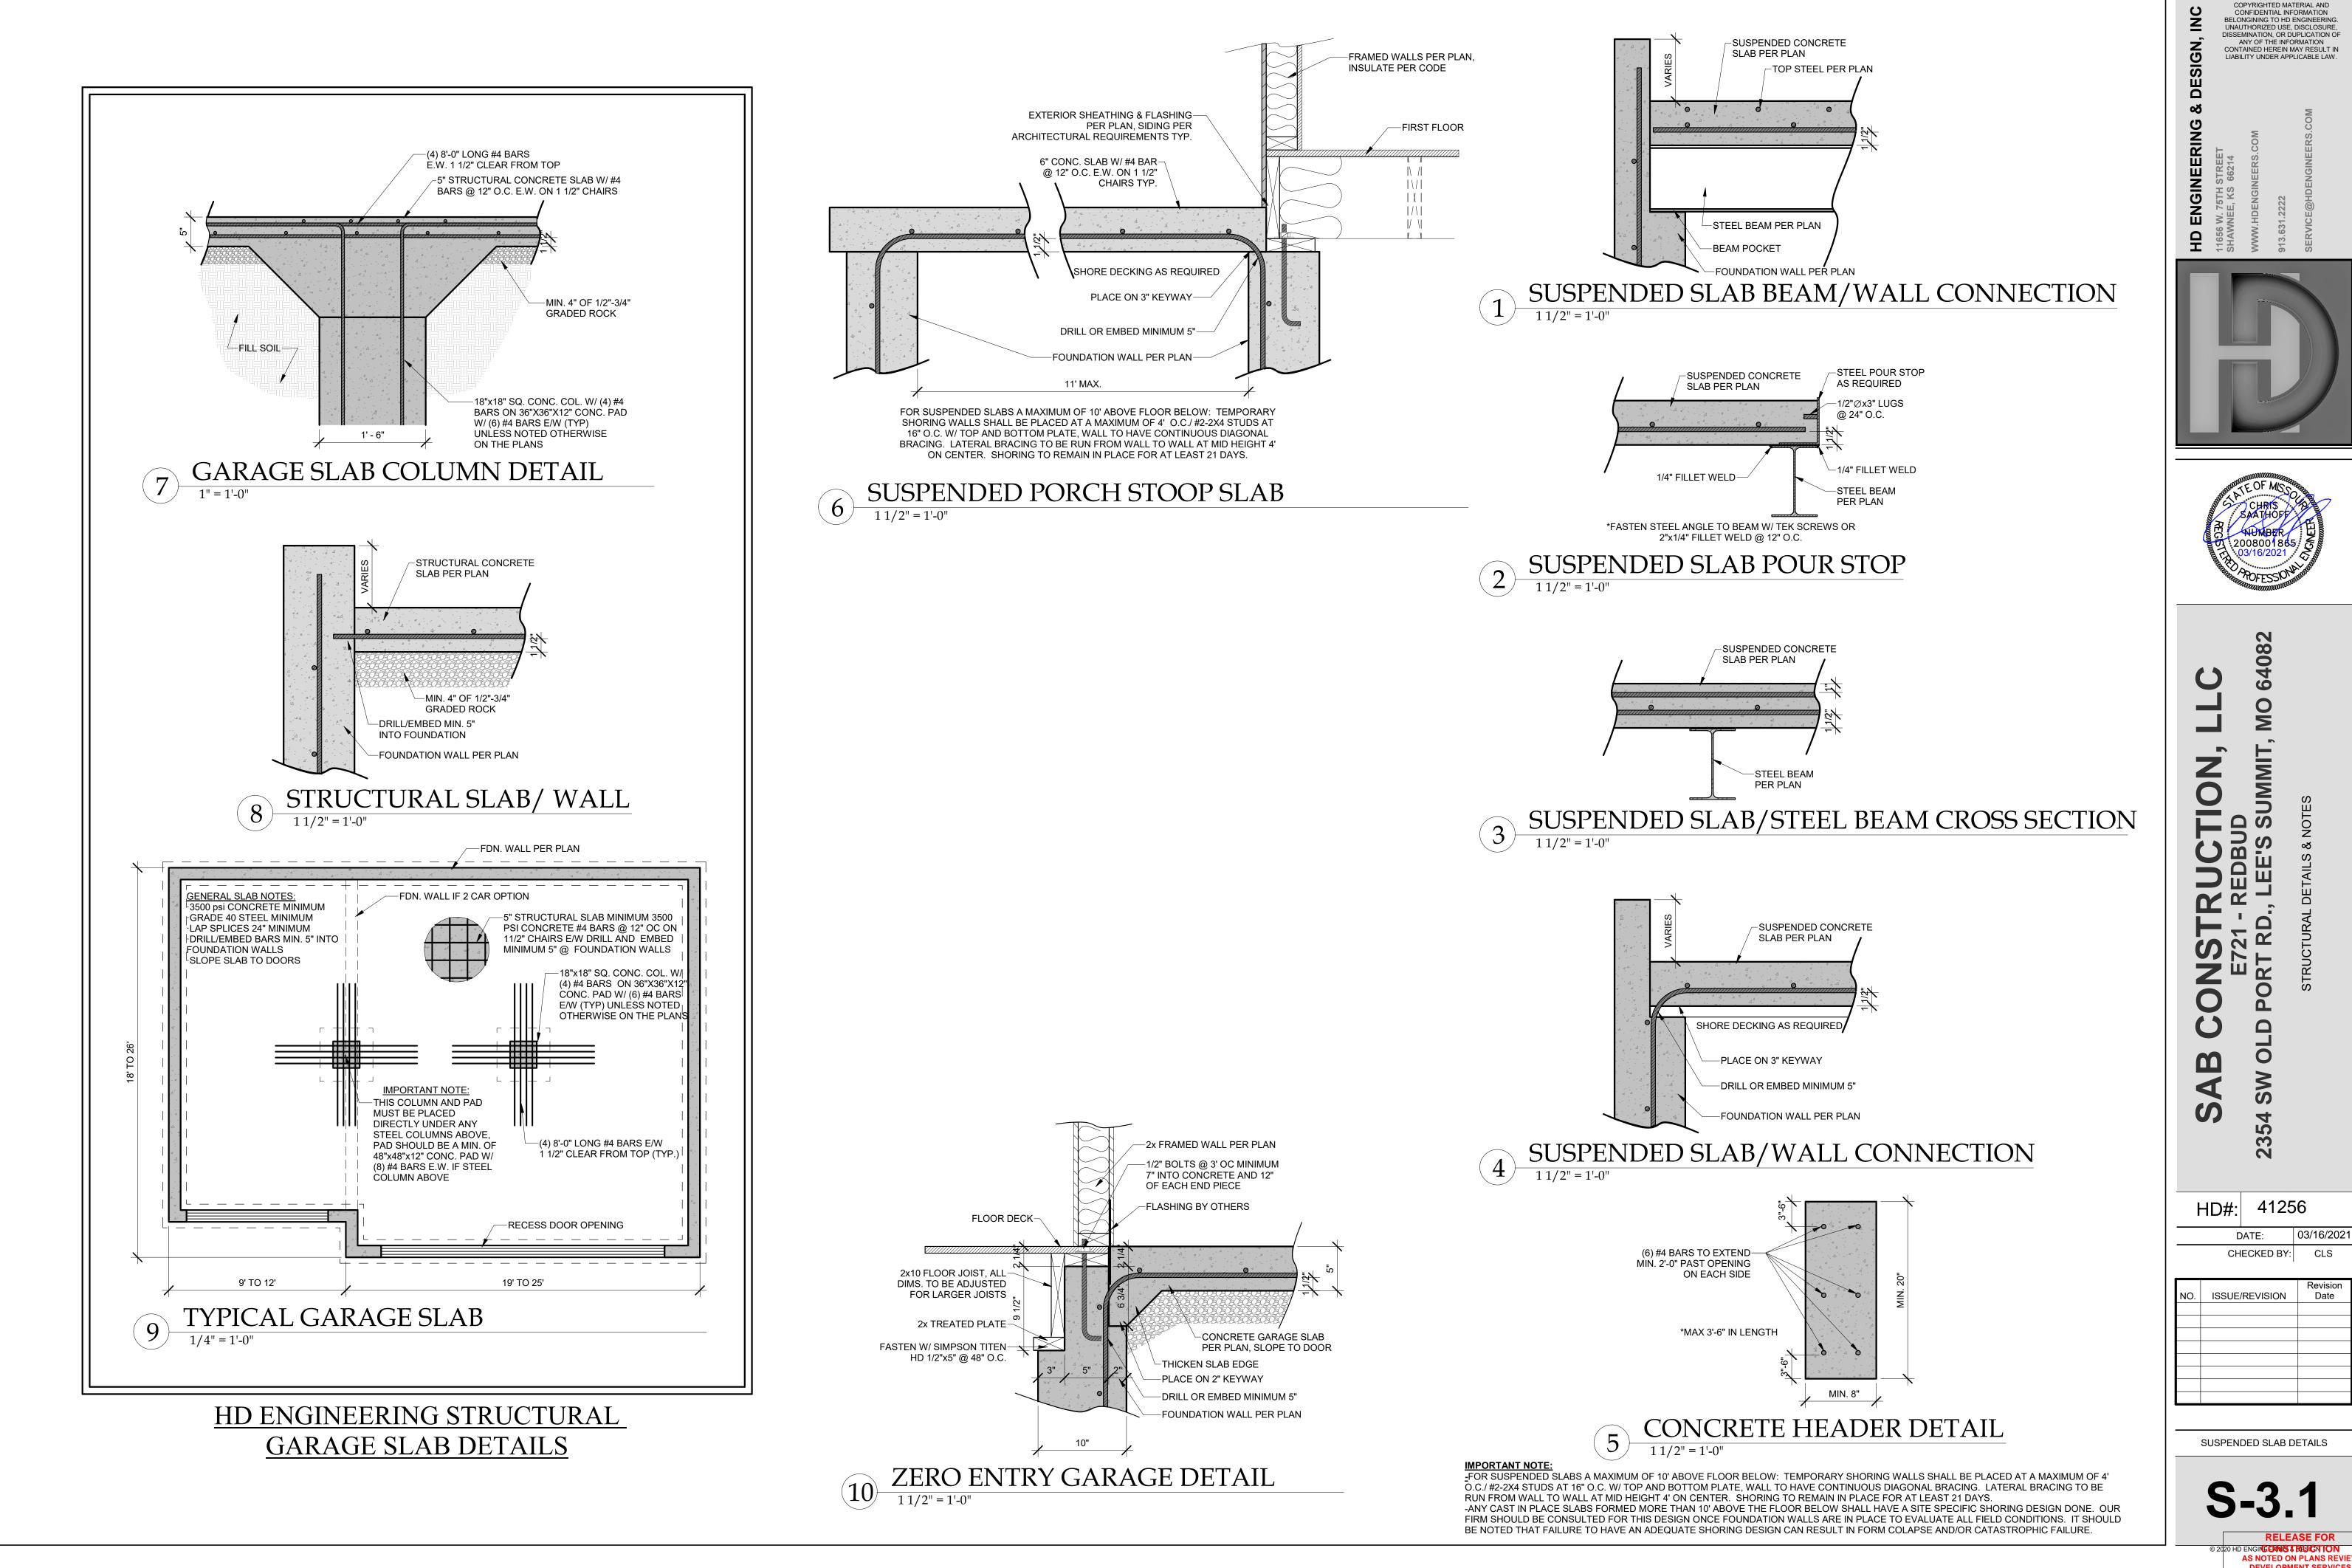

20 HD ENGINGENNS & RESCTION AS NOTED ON PLANS REVIEW DEVELOPMENT SERVICES LEE'S SUMMIT, MISSOURI 05/17/2021

THIS DOCUMENT CONTAINS



