

Gayle Doherty, @ sbcglobal.net

THURS
emailed
9/15
8:30 AM
THURS

HOLLIDAY CONCRETE, LLC

DRIVEWAY SPECIALIST

- QUALITY WORKMANSHIP

THURS

(816) 427-5747


CUSTOMER Gayle Doherty 816-223-3543

JOB LOCATION 521 SE Granada St Lees Summit

JOB DESCRIPTION 1063 sq ft driveway, remove & replace 4" concrete (4500 psi), 6" approach, compacted rock base, rebar reinforcement 2' oc, microfiber hand tooled control joints, cure applied day of pour

TOTAL COST \$13,869 New Driveway, Landings and steps + Perm +

digrite
232922902

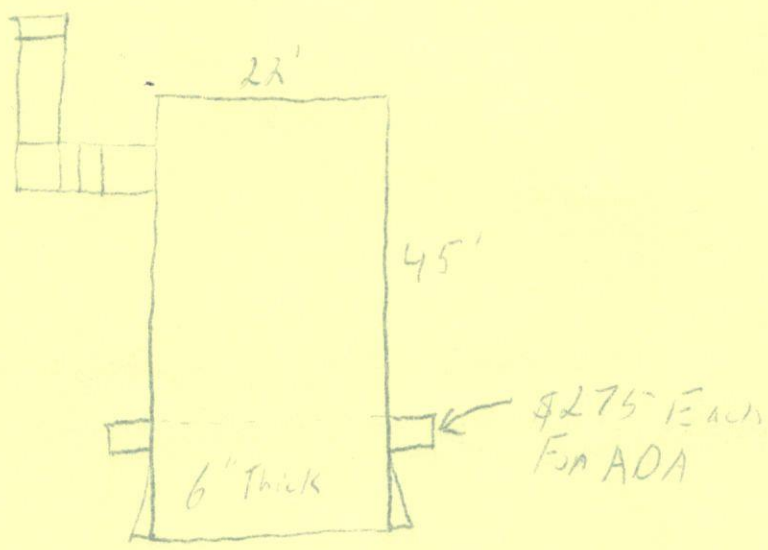

LOCAL REFERENCES:

<u>801 SE 10th ter</u>	<u>Mr Brown</u>
ADDRESS	NAME
<u>629 NE Pilgrim Way</u>	<u>Mr Delaney</u>
ADDRESS	NAME

Holliday Concrete will contact Dig Rite to mark utilities and obtain necessary permits from the City before commencement of work. All concrete to be finished with standard broom finish unless otherwise discussed. All concrete will have sawed/tooled control joints as needed for stress relief. Expansion joint to be installed as needed. Cure/Seal to be properly applied day of pour. Job site will be broom cleaned daily and construction debris picked up at completion of job.

All material is guaranteed to be as specified. All work to be completed in a workmanlike manner according to standard practices. We do not guarantee concrete from cracking or scaling due to extreme temperature variations experienced in this area (includes cracking outside of control joints). We are not responsible for any damage to underground pipes, cables or wires which are not visible. We take great care but cannot be responsible for damage to sprinkler systems. If concrete thickness is beyond normal or excessive layers there will be an additional charge according to loads hauled and filled.

Authorized Signature [Signature]

NOTE: This proposal may be withdrawn by us if not accepted within 90 days.

Notice: 3.5% fee for credit cards 