

NEW PHOTOVOLTAIC ROOF MOUNTED SYSTEM - 17.600 KW DC/12.760 KW AC
118 NW AMBERSHAM DR, LEES SUMMIT, MO 64081

MODULE:	(44) REC SOLAR REC400NP3 BLACK
INVERTER:	(44) ENPHASE IQ8PLUS-72-2-US (240V)

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2023 4:12:55

2018 INTERNATIONAL BUILDING CODE
2018 INTERNATIONAL RESIDENTIAL CODE
2018 INTERNATIONAL EXISTING BUILDING CODE
2018 INTERNATIONAL FIRE CODE
2017 NATIONAL ELECTRICAL CODE
AS ADOPTED BY CITY OF LEES SUMMIT

ROOF SURFACE TYPE: COMPOSITE SHINGLE
ROOF FRAMING: 2"X6" RAFTER @ 24" OC
BUILDING STORY: TWO STORY
GROUND SNOW LOAD: 30 PSF
WIND SPEED: 109 MPH
WIND EXPOSURE: B
RISK CATEGORY: II


1.1.1 THIS PHOTOVOLTAIC (PV) SYSTEM SHALL COMPLY WITH THE RELEVANT YEAR OF THE NATIONAL ELECTRIC CODE (NEC), ALL MANUFACTURER'S LISTING AND INSTALLATION INSTRUCTIONS, AND THE RELEVANT CODES AS SPECIFIED BY THE AUTHORITY HAVING JURISDICTION'S (AHJ) APPLICABLE CODES.

1.1.2 THE UTILITY INTERCONNECTION APPLICATION MUST BE APPROVED AND THE PV SYSTEM MUST BE INSPECTED PRIOR TO OPERATION

1.1.3 ALL PV SYSTEM COMPONENTS; MODULES, UTILITY-INTERACTIVE INVERTERS, AND SOURCE CIRCUIT COMBINER BOXES ARE IDENTIFIED AND LISTED FOR USE IN PHOTOVOLTAIC SYSTEMS AS REQUIRED BY NEC AND OTHER GOVERNING CODES

1.1.4 ALL SIGNAGE TO BE PLACED IN ACCORDANCE WITH LOCAL BUILDING CODE. IF EXPOSED TO SUNLIGHT, IT SHALL BE UV RESISTANT. ALL PLAQUES AND SIGNAGE WILL BE INSTALLED AS REQUIRED BY THE NEC AND AHJ.


1.2.1 CONTRACTOR IS RESPONSIBLE FOR THE DESIGN AND SPECIFICATIONS OF THE GRID-TIED PHOTOVOLTAIC SYSTEM. THE CONTRACTOR WILL BE RESPONSIBLE FOR COLLECTION OF EXISTING ONSITE CONDITIONS TO DESIGN, SPECIFY, AND INSTALL THE ROOF-MOUNTED PHOTOVOLTAIC SYSTEM DETAILED IN THIS DOCUMENT




SHEET INDEX

PV-01	COVER PAGE
PV-02	SITE PLAN
PV-03	ATTACHMENT PLAN & DETAILS
PV-04	ELECTRICAL DIAGRAM
PV-05	NOTES
PV-06	WARNING LABELS
PV-07	INSTALLATION RESOURCE
PV-08	EQUIPMENT ELEVATION
EQUIPMENT DATASHEETS ATTACHED	


LEGEND

 - PROPERTY LINE
 - FENCE LINE

VICINITY MAP



SATELLITE MAP



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

WILLIAM DRAISEY

WILLIAM DRAISEY

18 NW AMBERSHAM DR
EES SUMMIT, MO 64081

PN #: 6224023080000000
 HJ: CITY OF LEES SUMMIT
 UTILITY: EVERGY - MO METRO
 (KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
44) REC SOLAR REC400NP3 BLACK
44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE	
-------------	--

COVER PAGE

DRAWN DATE	9/15/2023
DRAWN BY	AM

SHEET NUMBER



PV-01

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/26/2023 4:12:55

ROOF ACCESS POINTS SHALL NOT BE LOCATED IN AREAS THAT REQUIRE THE PLACEMENT OF GROUND LADDERS OVER OPENINGS SUCH AS WINDOWS OR DOORS, AND LOCATED AT STRONG POINTS OF BUILDING CONSTRUCTION IN LOCATIONS WHERE THE ACCESS POINT DOES NOT CONFLICT WITH OVERHEAD OBSTRUCTIONS SUCH AS TREE LIMBS, WIRES OR SIGNS.

2. STRUCTURES, PATIO COVERS, AND/OR ADDITIONS BUILT WITHOUT PERMITS TO BE RESOLVED BY A SEPARATE PERMIT.

PLAN VIEW TOTAL ROOF AREA: 3400.56 FT²
TOTAL PV ARRAY AREA: 934.79 FT²
TOTAL % OF ROOF COVERED BY PV: 27.49%



LEGEND

- 36" 18" FIRE SETBACKS
- = MECHANICAL VENT
- = FLUE / PLUMBING VENT
- = FENCE LINE
- 1 MICROINVERTER (1 PER MODULE)
- 2 (44) REC SOLAR REC400NP3 BLACK MODULES WITH ENPHASE IQ8PLUS-72-2-US (240V) UNDER EACH MODULE
- 3 (N) JUNCTION BOX (NEMA 3R)
- 4 CONDUIT RUN; SURFACE MOUNTED (ACTUAL CONDUIT RUNS TO BE DETERMINED IN FIELD)
- 5 (E) UTILITY METER (UNDERGROUND SERVICE)
- 6 MAIN SERVICE PANEL (INSIDE HOUSE)
- 7 (N) VISIBLE-OPEN, LOCKABLE, LABELED AND NON-FUSED AC DISCONNECT (UTILITY BLADE HANDLE)
- 8 (N) ENPHASE IQ COMBINER BOX 4

ROOF 1	SLOPE	- 40°
	AZIMUTH	- 220°
	MODULE QTY	- 16
	RAFTER	- 2"X6" @ 24" O.C.
	SURFACE TYPE	- COMPOSITE SHINGLE
ROOF 2	SLOPE	- 40°
	AZIMUTH	- 130°
	MODULE QTY	- 17
	RAFTER	- 2"X6" @ 24" O.C.
	SURFACE TYPE	- COMPOSITE SHINGLE
ROOF 3	SLOPE	- 40°
	AZIMUTH	- 310°
	MODULE QTY	- 07
	RAFTER	- 2"X6" @ 24" O.C.
	SURFACE TYPE	- COMPOSITE SHINGLE
ROOF 4	SLOPE	- 40°
	AZIMUTH	- 220°
	MODULE QTY	- 04
	RAFTER	- 2"X6" @ 24" O.C.
	SURFACE TYPE	- COMPOSITE SHINGLE

CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 6224023080000000
AHJ: CITY OF LEES SUMMIT
UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE

SITE PLAN

DRAWN DATE	9/15/2023
DRAWN BY	AM

SHEET NUMBER

PV-02



1
PV-02

SITE PLAN

SCALE:3/32" = 1'-0"

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEWED
DEVELOPMENT SERVICES
LEES SUMMIT, MISSOURI
10/20/2023 4:12:55

LOAD CALCULATIONS	
REC SOLAR REC400NP3 BLACK	
48.00 LBS	
74.80" x 40.90"	
44	
2112.00 LBS	
IRONRIDGE XR-10 RAIL	
SUNMODO NANOMOUNT (DECKING)	
0.5 PSF	
2579.40 LBS	
21.25 SQFT.	
934.79 SQFT.	
2.76 PSF	

- NOTE:**
- CONTRACTOR/INSTALLER TO VERIFY COMPATIBILITY OF ANY BRANDS OR PRODUCTS SUBSTITUTED OR USED AS ALTERNATES WITHIN ANY BRAND-SPECIFIC SYSTEMS. CONTRACTOR SHALL SUPPLY AND PRESENT CERTIFICATES OF COMPATIBILITY TO THE BUILDING OFFICIAL UPON INSPECTION AS NEEDED.
 - REFER TO PV MODULE MANUFACTURER'S INSTALLATION INSTRUCTIONS FOR RAIL SPACING SPECIFICATIONS

LEGEND

- ATTACHMENT POINTS
- RAIL
- STRUCTURAL MEMBER


CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556



ROOF 1

SLOPE	- 40°
AZIMUTH	- 220°
MODULE QTY	- 16
RAFTER	- 2"X6" @ 24" O.C.
SURFACE TYPE	- COMPOSITE SHINGLE

ROOF 2

SLOPE	- 40°
AZIMUTH	- 130°
MODULE QTY	- 17
RAFTER	- 2"X6" @ 24" O.C.
SURFACE TYPE	- COMPOSITE SHINGLE

ROOF 3

SLOPE	- 40°
AZIMUTH	- 310°
MODULE QTY	- 07
RAFTER	- 2"X6" @ 24" O.C.
SURFACE TYPE	- COMPOSITE SHINGLE

ROOF 4


SLOPE	- 40°
AZIMUTH	- 220°
MODULE QTY	- 04
RAFTER	- 2"X6" @ 24" O.C.
SURFACE TYPE	- COMPOSITE SHINGLE

1.0

TYPICAL ATTACHMENT PLAN (PORTRAIT)

PV-03

SCALE: NTS



2

ATTACHMENT DETAIL

PV-03

Scale: NTS

NANO DECK MOUNT ASSEMBLY

DECKING SCREW
ASSEMBLY

ROOF DECKING

3

ENLARGED VIEW

PV-03

Scale: NTS

(E) COMPOSITE SHINGLE

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 62240230800000000

AHJ: CITY OF LEES SUMMIT

UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE ATTACHMENT PLAN & DETAILS

DRAWN DATE 9/15/2023

DRAWN BY AM

SHEET NUMBER

PV-03

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS & REVIEW
MAINTENANCE / MODIFY /
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2023 4:12:55

INVERTER SPECIFICATIONS		SOLAR MODULE SPECIFICATIONS	
MANUFACTURER / MODEL #	ENPHASE IQ8PLUS-72-2-US (240V)	MANUFACTURER / MODEL #	REC SOLAR REC400NP3 BLACK
MAX CONT. POWER	235W-440W	VMP	37.6V
MIN/MAX START VOLTAGE	22V/58V	IMP	10.64A
NOMINAL AC VOLTAGE	210V	VOC	45.0V
MAX CONT. OUTPUT CURRENT	1.21A	ISC	11.39A
MAX CONT. OUTPUT POWER	290W	TEMP. COEFF. VOC	-0.26%/°C
MAX MODULES PER STRING	13 (13 MICROINVERTERS)		

AMBIENT TEMPERATURE SPECIFICATIONS	
RECORD LOW TEMP	-20°C
AMBIENT TEMP (HIGH TEMP 2% AVG.)	35°C
MINIMUM CONDUIT HEIGHT ABOVE ROOF SURFACE	7/8"

CONTRACTOR




THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

ROMEX CAN BE USED IN LIEU OF CONDUIT FOR INTERIOR BUILDING AND ATTIC
RUNS ONLY. DO NOT USE ROMEX IN CONDUIT OR OUTDOOR ENVIRONMENTS.

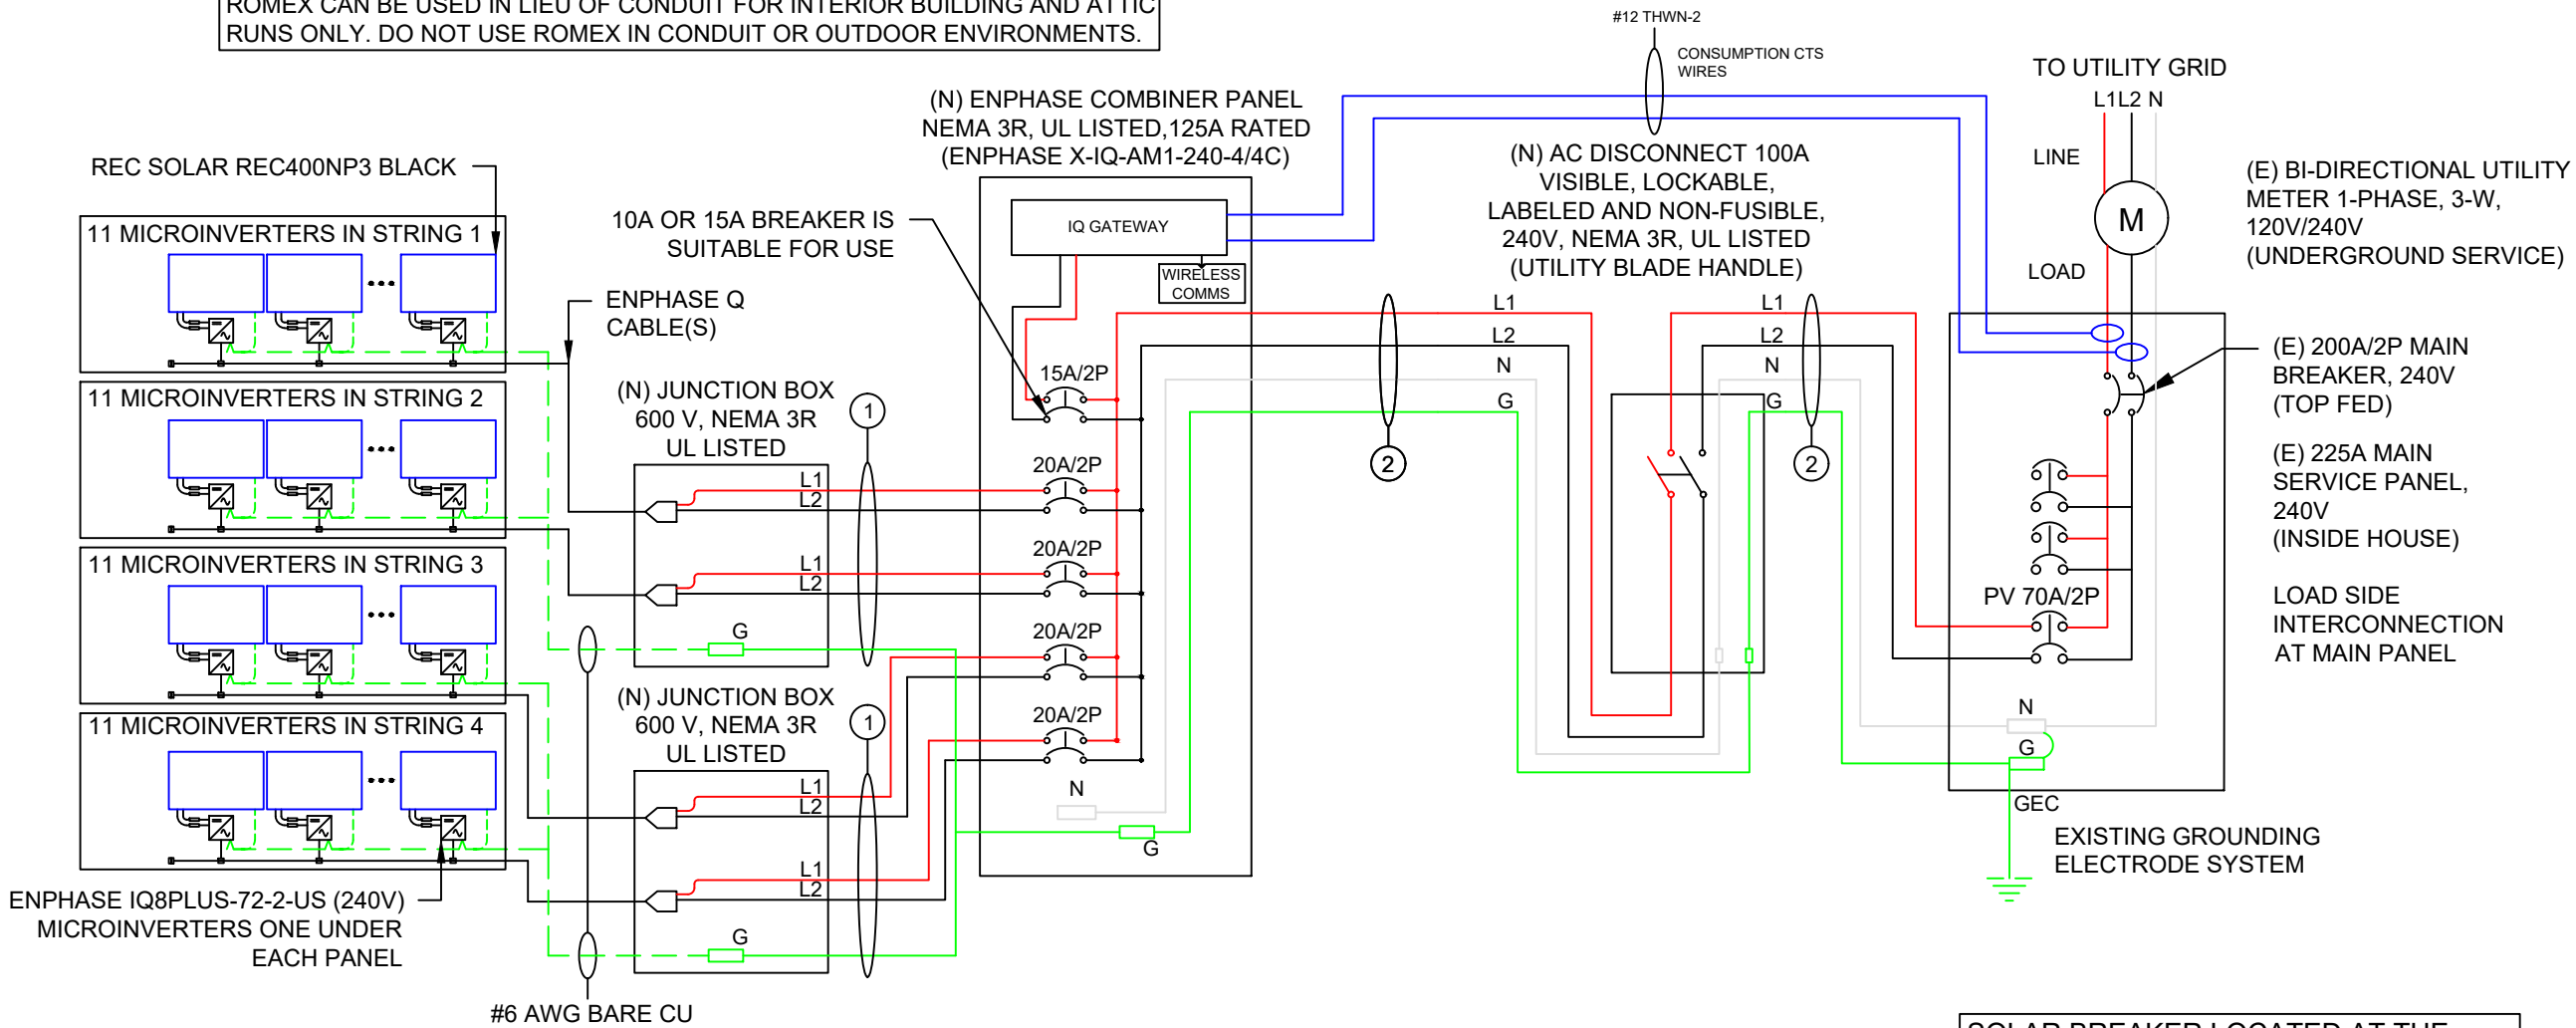

SOLAR BREAKER LOCATED AT THE
FURTHEST END OF BUSBAR FROM THE
MAIN BREAKER OR FEEDER UNIT

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 6224023080000000
AHJ: CITY OF LEES SUMMIT
UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE
ELECTRICAL
DIAGRAM

DRAWN DATE 9/15/2023

DRAWN BY AM

SHEET NUMBER

PV-04

DESCRIPTION					FORMULA					RESULT		
PV OVERCURRENT PROTECTION NEC 690.9(B)					TOTAL INVERTER OUTPUT CURRENT x 1.25 = (44 x 1.21)A x 1.25					66.55A (SELECTED PV BREAKER = 70A)		
120% RULE FOR BACKFEED BREAKER NEC 705.12					BUS BAR RATING x 1.2 - MCB RATING = MAX ALLOWABLE PV BREAKER 225A x 1.2 - 200A = 70A					SELECTED PV BREAKER <= MAX ALLOWABLE PV BREAKER 70A <= 70A		
WIRE ID	EXPECTED WIRE TEMP (°C)	TEMP DERATE (90 °C)	QTY OF CURRENT CARRYING CONDUCTORS	CONDUIT FILL DERATE	MINIMUM CONDUIT SIZE (TBD ON SITE)	WIRE GAUGE & TYPE	CONDUCTOR AMPACITY @ 90°C (A)	CONDUCTOR AMPACITY @ 75°C (A)	REQUIRED CIRCUIT CONDUCTOR AMPACITY (A)	ADJUSTED CONDUCTOR AMPACITY @ 90 °C (A)	NEUTRAL CONDUCTOR SIZE & TYPE	GROUND WIRE SIZE & TYPE
1	35	0.96	4	0.8	3/4" METAL	#10 USE-2	35	30	16.64	26.88	NONE	#10 USE-2
2	35	0.96	2	1	1" METAL	#3 USE-2	85	75	66.55	81.60	#3 USE-2	#8 USE-2

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2023 4:12:55

GENERAL NOTES

- 2.1.1 A LADDER WILL BE IN PLACE FOR INSPECTION IN ACCORDANCE WITH OSHA REGULATIONS.
- 2.1.2 THE PV MODULES ARE CONSIDERED NON-COMBUSTIBLE AND THIS SYSTEM IS A UTILITY INTERACTIVE SYSTEM WITH NO STORAGE BATTERIES.
- 2.1.3 THE SOLAR PV INSTALLATION WILL NOT OBSTRUCT ANY PLUMBING, MECHANICAL, OR BUILDING ROOF VENTS.
- 2.1.4 PROPER ACCESS AND WORKING CLEARANCE AROUND EXISTING AND PROPOSED ELECTRICAL EQUIPMENT WILL BE PROVIDED IN ACCORDANCE WITH SECTION NEC 110.26.
- 2.1.5 ROOF COVERINGS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH THIS CODE AND THE APPROVED MANUFACTURER'S INSTRUCTIONS SUCH THAT THE ROOF COVERING SERVES TO PROTECT THE BUILDING OR STRUCTURE.

EQUIPMENT LOCATIONS

- 2.2.1 ALL EQUIPMENT SHALL MEET MINIMUM SETBACKS IN ACCORDANCE WITH NEC 110.26.
- 2.2.2 WIRING SYSTEMS INSTALLED IN DIRECT SUNLIGHT MUST BE RATED FOR EXPECTED OPERATING TEMPERATURE AS SPECIFIED BY NEC 690.31 (A),(C) AND NEC TABLES 310.15 (B)(2)(A) AND 310.15 (B)(3)(C).
- 2.2.3 JUNCTION AND PULL BOXES PERMITTED INSTALLED UNDER PV MODULES IN ACCORDANCE WITH NEC 690.34.
- 2.2.4 ADDITIONAL AC DISCONNECT(S) SHALL BE PROVIDED WHERE THE INVERTER IS NOT WITHIN SIGHT OF THE AC SERVICING DISCONNECT.
- 2.2.5 ALL EQUIPMENT SHALL BE INSTALLED ACCESSIBLE TO QUALIFIED PERSONNEL IN ACCORDANCE WITH NEC APPLICABLE CODES.
- 2.2.6 ALL COMPONENTS ARE LISTED FOR THEIR PURPOSE AND RATED FOR OUTDOOR USAGE WHEN APPROPRIATE.

STRUCTURAL NOTES

- 2.3.1 RACKING SYSTEM & PV ARRAY WILL BE INSTALLED IN ACCORDANCE WITH THE CODE-COMPLIANT INSTALLATION MANUAL. TOP CLAMPS REQUIRE A DESIGNATED SPACE BETWEEN MODULES, AND RAILS MUST ALSO EXTEND A MINIMUM DISTANCE BEYOND EITHER EDGE OF THE ARRAY/SUBARRAY, IN ACCORDANCE WITH RAIL MANUFACTURER'S INSTALLATION PRACTICES.
- 2.3.2 JUNCTION BOX WILL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS. IF ROOF-PENETRATING TYPE, IT SHALL BE FLASHED & SEALED PER LOCAL REQUIREMENTS.
- 2.3.3 ROOFTOP PENETRATIONS FOR PV RACEWAY WILL BE COMPLETED AND SEALED W/ APPROVED CHEMICAL SEALANT PER CODE BY A LICENSED CONTRACTOR.
- 2.3.4 ALL PV RELATED ROOF ATTACHMENTS TO BE SPACED NO GREATER THAN THE SPAN DISTANCE SPECIFIED BY THE RACKING MANUFACTURER OR PROFESSIONAL ENGINEERING GUIDANCE.
- 2.3.5 WHEN POSSIBLE, ALL PV RELATED RACKING ATTACHMENTS WILL BE STAGGERED AMONGST THE ROOF FRAMING MEMBERS.

WIRING & CONDUIT NOTES

- 2.4.1 ALL CONDUIT AND WIRE WILL BE LISTED AND APPROVED FOR THEIR PURPOSE. CONDUIT AND WIRE SPECIFICATIONS ARE BASED ON MINIMUM CODE REQUIREMENTS AND ARE NOT MEANT TO LIMIT UP-SIZING.
- 2.4.2 CONDUCTORS SIZED IN ACCORDANCE WITH THE NEC
- 2.4.3 AC CONDUCTORS TO BE COLORED OR MARKED PER NEC
- 2.4.4 LISTED OR LABELED EQUIPMENT SHALL BE INSTALLED AND USED IN ACCORDANCE WITH ANY INSTRUCTIONS INCLUDED IN THE LISTING OR LABELING PER NEC

GROUNDING NOTES

- 2.5.1 GROUNDING SYSTEM COMPONENTS SHALL BE LISTED FOR THEIR PURPOSE, AND GROUNDING DEVICES EXPOSED TO THE ELEMENTS SHALL BE RATED FOR SUCH USE.
- 2.5.2 PV EQUIPMENT SHALL BE GROUNDED IN ACCORDANCE WITH NEC 690.43 AND NEC TABLE 250.122.
- 2.5.3 METAL PARTS OF MODULE FRAMES, MODULE RACKING, AND ENCLOSURES CONSIDERED GROUNDED IN ACCORDANCE WITH NEC 250.134 AND 250.136(A).
- 2.5.4 EQUIPMENT GROUNDING CONDUCTORS SHALL BE SIZED IN ACCORDANCE WITH NEC 690.45 AND INVERTER MANUFACTURER'S INSTALLATION PRACTICES
- 2.5.5 EACH MODULE WILL BE GROUNDED AS SHOWN IN MANUFACTURER DOCUMENTATION AND APPROVED BY THE AHJ.
- 2.5.6 THE GROUNDING CONNECTION TO A MODULE SHALL BE ARRANGED SUCH THAT THE REMOVAL OF A MODULE DOES NOT INTERRUPT A GROUNDING CONDUCTOR TO ANOTHER MODULE.
- 2.5.7 GROUNDING AND BONDING CONDUCTORS, IF INSULATED, SHALL BE COLORED GREEN OR MARKED GREEN IF #4 AWG OR LARGER PER NEC 250.119
- 2.5.8 THE GROUNDING ELECTRODE SYSTEM COMPLIES WITH NEC 690.47 AND NEC 250.50 THROUGH 250.106. IF EXISTING SYSTEM IS INACCESSIBLE, OR INADEQUATE, A GROUNDING ELECTRODE SYSTEM PROVIDED IN ACCORDANCE WITH NEC 250, NEC 690.47 AND THE AHJ.
- 2.5.9 GROUND-FAULT DETECTION SHALL COMPLY WITH NEC 690.41(B)(1) AND (2) TO REDUCE FIRE HAZARDS

DISCONNECTION AND OVERCURRENT PROTECTION NOTES

- 2.6.1 DISCONNECTING SWITCHES SHALL BE WIRED SUCH THAT WHEN THE SWITCH IS OPENED THE CONDUCTORS REMAINING ENERGIZED ARE CONNECTED TO THE TERMINALS MARKED "LINE SIDE" (TYPICALLY THE UPPER TERMINALS).
- 2.6.2 DISCONNECTS TO BE ACCESSIBLE TO QUALIFIED UTILITY PERSONNEL, BE LOCKABLE, AND BE A VISIBLE-BREAK SWITCH
- 2.6.3 PV SYSTEM CIRCUITS INSTALLED ON OR IN HABITABLE BUILDINGS SHALL INCLUDE A RAPID SHUTDOWN FUNCTION TO REDUCE SHOCK HAZARD FOR EMERGENCY RESPONDERS IN ACCORDANCE WITH 690.12
- 2.6.4 ALL OCPD RATINGS AND TYPES SPECIFIED ACCORDING TO NEC 690.8, 690.9, AND 240.
- 2.6.5 INVERTER ON-GRID BRANCHES SHALL BE CONNECTED TO A SINGLE BREAKER OR GROUPED FUSE DISCONNECT(S) IN ACCORDANCE WITH NEC 110.3(B).
- 2.6.6 IF REQUIRED BY THE AHJ, SYSTEM WILL INCLUDE ARC-FAULT CIRCUIT PROTECTION IN ACCORDANCE WITH NEC 690.11 AND UL1699B.

INTERCONNECTION NOTES

- 2.7.1 LOAD SIDE INTERCONNECTION SHALL BE IN ACCORDANCE WITH NEC 705.12.
- 2.7.2 THE SUM OF THE UTILITY OCPD AND INVERTER CONTINUOUS OUTPUT MAY NOT EXCEED 120 PERCENT OF BUSBAR RATING PER NEC 705.12.
- 2.7.3 THE SUM OF 125 PERCENT OF THE POWER SOURCE(S) OUTPUT CIRCUIT CURRENT AND THE RATING OF THE OVERCURRENT DEVICE PROTECTING THE BUSBAR SHALL NOT EXCEED 120 PERCENT OF THE AMPACITY OF THE BUSBAR, PV DEDICATED BACKFEED BREAKERS MUST BE LOCATED OPPOSITE END OF THE BUS FROM THE UTILITY SOURCE OCPD IN ACCORDANCE WITH NEC 705.12.
- 2.7.4 AT MULTIPLE ELECTRIC POWER SOURCES OUTPUT COMBINER PANEL, TOTAL RATING OF ALL OVERCURRENT PROTECTION DEVICES SHALL NOT EXCEED AMPACITY OF BUSBAR. HOWEVER, THE MAIN OVERCURRENT PROTECTION DEVICE MAY BE EXCLUDED IN ACCORDANCE WITH NEC 705.12.
- 2.7.5 FEEDER TAP INTERCONNECTION (LOAD SIDE) IN ACCORDANCE WITH NEC 705.12.
- 2.7.6 SUPPLY SIDE TAP INTERCONNECTION IN ACCORDANCE WITH TO NEC 705.12 WITH SERVICE ENTRANCE CONDUCTORS IN ACCORDANCE WITH NEC 230.42.
- 2.7.7 BACKFEEDING BREAKER FOR ELECTRIC POWER SOURCES OUTPUT IS EXEMPT FROM ADDITIONAL FASTENING PER NEC 705.12.

CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 62240230800000000
AHJ: CITY OF LEES SUMMIT
UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE

NOTES

DRAWN DATE	9/15/2023
DRAWN BY	AM

SHEET NUMBER

PV-05

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2023 4:12:55

⚠️WARNING

ELECTRICAL SHOCK HAZARD

TERMINALS ON THE LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION

LABEL LOCATION: COMBINER PANEL, AC
DISCONNECT, POINT OF INTERCONNECTION
PER CODE: NEC 706.15(C)(4), NEC 690.13(B)

⚠️WARNING

TURN OFF PHOTOVOLTAIC AC
DISCONNECT PRIOR TO
WORKING INSIDE PANEL

LABEL LOCATION: COMBINER PANEL(S), MAIN SERVICE DISCONNECT
PER CODE: NEC 110.27(C), OSHA 1910.145(f)(7)

PHOTOVOLTAIC POWER SOURCE

LABEL LOCATION: DC CONDUIT/RACEWAYS
PER CODE: NEC 690.31(D)(2)

SOLAR PV DC CIRCUIT

LABEL LOCATION: DC CONDUIT/RACEWAYS
PER CODE: NEC 690.31(D)(2)

PHOTOVOLTAIC SYSTEM AC DISCONNECT

RATED AC OUTPUT CURRENT: 53.24 A

NOMINAL OPERATING AC VOLTAGE: 240 V

LABEL LOCATION: AC DISCONNECT/POINT OF INTERCONNECTION
PER CODE: NEC 690.54

⚠️WARNING

DUAL POWER SOURCE

SECOND SOURCE IS PHOTOVOLTAIC SYSTEM

LABEL LOCATION: MAIN SERVICE DISCONNECT, PRODUCTION/NET METER
PER CODE: NEC 690.59, 705.12(C)

PV SYSTEM

DISCONNECT

LABEL LOCATION: AC DISCONNECT
PER CODE: NEC 690.13(B)

⚠️WARNING

THIS EQUIPMENT FED BY MULTIPLE
SOURCES:
TOTAL RATING OF ALL OVERCURRENT
DEVICES EXCLUDING MAIN POWER
SUPPLY SHALL NOT EXCEED
AMPACITY OF BUSBAR

LABEL LOCATION: AC DISCONNECT
PER CODE: NEC 705.12(B)(3)(3)


⚠️WARNING

POWER SOURCE OUTPUT
CONNECTION. DO NOT RELOCATE
THIS OVERCURRENT DEVICE.

LABEL LOCATION: POINT OF INTERCONNECTION
PER CODE: NEC 705.12(B)(3)(2)

SOLAR PV SYSTEM EQUIPPED
WITH RAPID SHUTDOWN

TURN RAPID SHUTDOWN
SWITCH TO THE
"OFF" POSITION TO
SHUT DOWN PV SYSTEM
AND REDUCE
SHOCK HAZARD
IN THE ARRAY



LABEL LOCATION: MAIN SERVICE DISCONNECT
PER CODE: NEC 690.56(C)

MAIN PHOTOVOLTAIC
SYSTEM DISCONNECT

LABEL LOCATION: MAIN SERVICE DISCONNECT, UTILITY METER
PER CODE: NEC 690.13(B)

RAPID SHUTDOWN FOR
SOLAR PV SYSTEM

LABEL LOCATION: RSD INITIATION DEVICE, AC DISCONNECT
PER CODE: NEC 690.56(C)(2)

⚠️CAUTION

PHOTOVOLTAIC SYSTEM CIRCUIT IS BACKFED

LABEL LOCATION: MAIN SERVICE DISCONNECT
PER CODE: NEC 705.12(D), NEC 690.59

DO NOT DISCONNECT
UNDER LOAD

LABEL LOCATION: MAIN SERVICE DISCONNECT
PER CODE: NEC 690.15(B) & NEC 690.33(D)(2)

MAXIMUM DC VOLTAGE

OF PV SYSTEM

LABEL LOCATION: DC DISCONNECT/INVERTER/PV DIST.
EQUIPMENT
PER CODE: NEC 690.53


⚠️WARNING

ELECTRICAL SHOCK HAZARD


TERMINALS ON BOTH LINE AND
LOAD SIDES MAY BE ENERGIZED
IN THE OPEN POSITION

DC VOLTAGE IS ALWAYS PRESENT WHEN
SOLAR MODULES ARE EXPOSED TO SUNLIGHT

LABEL LOCATION: DC DISCONNECT
PER CODE: NEC 690.13(B)

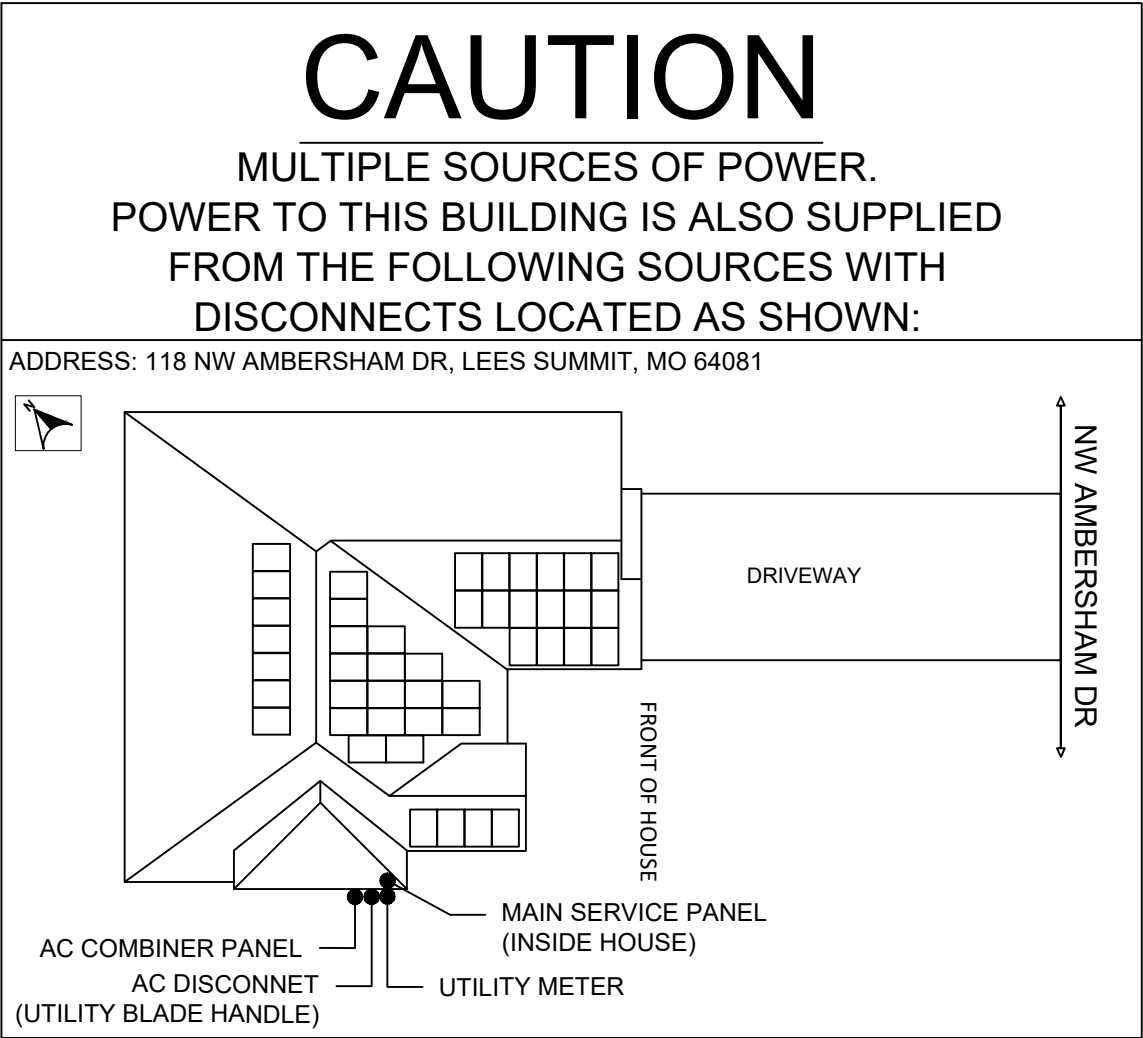

CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 62240230800000000
AHJ: CITY OF LEES SUMMIT
UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE

WARNING LABELS

DRAWN DATE

9/15/2023

DRAWN BY

AM


SHEET NUMBER

PV-06

RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
10/20/2023 4:12:55

	A	B	C	D	E	F
1						
2						
3						
4						
5						
6						
7						
8						
9						
10						

REFERENCE ONLY



**DIMENSIONS ARE 2D (FLAT)

CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 62240230800000000

AHJ: CITY OF LEES SUMMIT
UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS


REV	DESCRIPTION	DATE

SHEET TITLE
INSTALLATION
RESOURCE

DRAWN DATE	9/15/2023
DRAWN BY	AM

SHEET NUMBER

PV-07

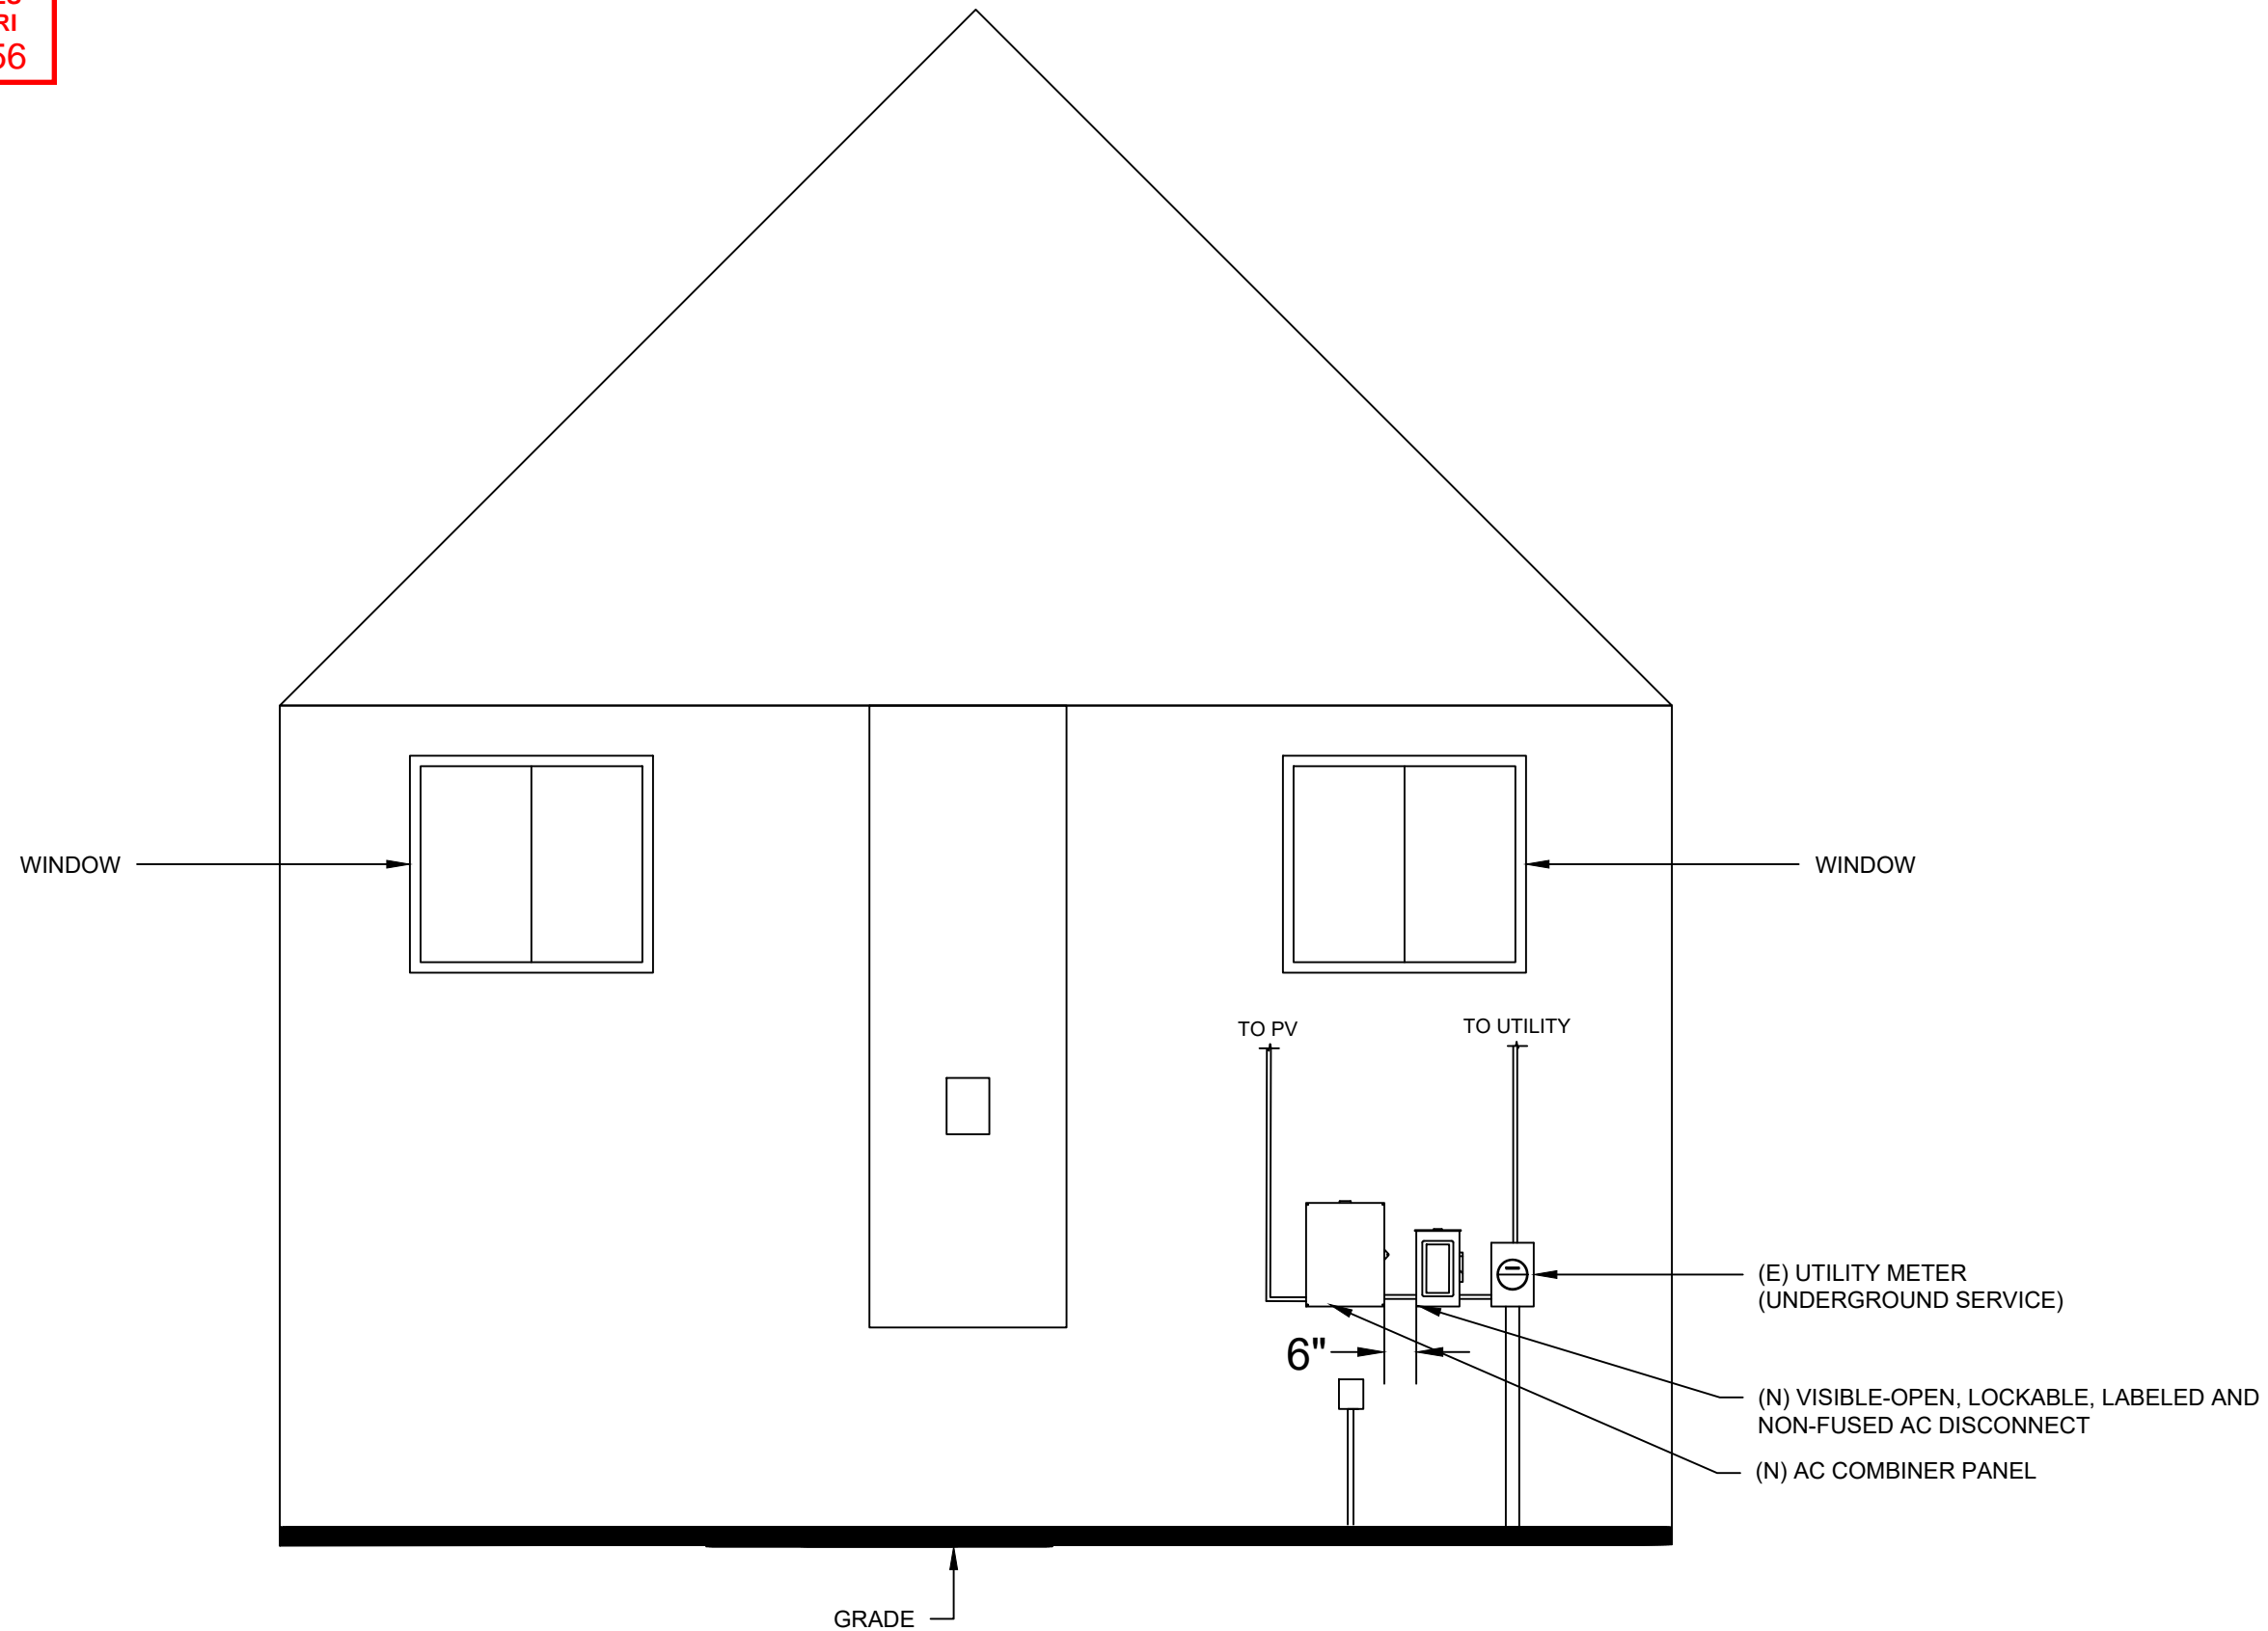

CONTRACTOR



THE SOLAR GUYS

6114 MO-9, PARKVILLE,
MISSOURI 64152

PHONE - (816) 708-5556

PROJECT NAME & ADDRESS

WILLIAM DRAISEY

118 NW AMBERSHAM DR,
LEES SUMMIT, MO 64081

APN #: 62240230800000000

AHJ: CITY OF LEES SUMMIT

UTILITY: EVERGY - MO METRO
(KCPLC)

SYSTEM DETAILS

DC SIZE: 17.600 KW DC-(STC)
AC SIZE: 12.760 KW AC
(44) REC SOLAR REC400NP3 BLACK
(44) ENPHASE IQ8PLUS-72-2-US (240V)

REVISIONS

REV	DESCRIPTION	DATE

SHEET TITLE

ELECTRICAL EQUIPMENT
ELEVATION

DRAWN DATE 9/15/2023

DRAWN BY AM

SHEET NUMBER

PV-08



1
PV-01

ELECTRICAL EQUIPMENT ELEVATION

SCALE:NTS

SOLAR'S MOST TRUSTED



REC N-PEAK 3 BLACK SERIES

PREMIUM FULL BLACK MONO
N-TYPE SOLAR PANELS



MONO N-TYPE: THE
MOST EFFICIENT C-SI
TECHNOLOGY



NO LIGHT INDUCED
DEGRADATION



SUPER-STRONG
FRAME UP TO 7000 PA
SNOW LOAD



FLEXIBLE
INSTALLATION
OPTIONS




FEATURING REC'S
PIONEERING
TWIN DESIGN



BIFACIAL CELLS CAN
PRODUCE ENERGY FROM
BOTH SIDES

400
WP
POWER




SOLAR'S MOST TRUSTED

REC N-PEAK 3 BLACK SERIES PRODUCT SPECIFICATIONS

GENERAL DATA

Cell type:	132 half-cut mono c-Si n-type cells 6 strings of 22 cells in series
Glass:	0.13 in solar glass with anti-reflective surface treatment in accordance with EN12150
Backsheet:	Highly resistant polymer (black)
Frame:	Anodized aluminum (black) with silver support bars
Junction box:	3-part, 3 bypass diodes, lead-free IP68 rated, in accordance with IEC 62790
Connectors:	Stäubli MC4 PV-KBT4/KST4 (12 AWG) in accordance with IEC 62852, IP68 only when connected
Cable:	12 AWG PV wire, 47.2 + 47.2 in in accordance with EN 50618
Dimensions:	74.8 x 40.9 x 1.2 in (19.7 sq-ft)
Weight:	48.0 lbs
Origin:	Made in Singapore



ELECTRICAL DATA

Product Code*: RECxxxNP3 Black

Power Output - P _{MAX} (Wp)	390	400
Watt Class Sorting - (W)	0/+10	0/+10
Nominal Power Voltage - V _{MPP} (V)	36.8	37.6
Nominal Power Current - I _{MPP} (A)	10.60	10.64
Open Circuit Voltage - V _{OC} (V)	44.8	45.0
Short Circuit Current - I _{SC} (A)	11.31	11.39
Panel Efficiency (%)	19.5	20.3
Power Output - P _{MAX} (Wp)	295	302
Nominal Power Voltage - V _{MPP} (V)	34.4	35.2
Nominal Power Current - I _{MPP} (A)	8.56	8.59
Open Circuit Voltage - V _{OC} (V)	41.9	42.1
Short Circuit Current - I _{SC} (A)	9.13	9.20

Values at standard test conditions (STC: air mass AM1.5, irradiance 1000 W/m², temperature 25°C), based on a production spread with a tolerance of P_{MAX}, V_{OC} & I_{SC} ±3% within one watt class. Nominal module operating temperature (NMOT: air mass AM1.5, irradiance 800 W/m², temperature 20°C, windspeed 1 m/s). * Where xxx indicates the nominal power class (P_{MAX}) at STC above.

MAXIMUM RATINGS

Operational temperature:	-40 ... +185°F
Maximum system voltage:	1000 V
Maximum test load (front):	+ 7000 Pa (146 lbs/sq-ft)*
Maximum test load (rear):	- 4000 Pa (83.5 lbs/sq-ft)*
Max series fuse rating:	25 A
Max reverse current:	25 A

* See installation manual for mounting instructions.
Design load = Test load / 1.5 (safety factor)

WARRANTY

	Standard	REC ProTrust
Installed by an REC Certified Solar Professional	No	Yes
System Size	All	≤25 kW 25-500 kW
Product Warranty (yrs)	20	25
Power Warranty (yrs)	25	25
Labor Warranty (yrs)	0	25
Power in Year 1	98%	98%
Annual Degradation	0.25%	0.25%
Power in Year 25	92%	92%

The REC ProTrust Warranty is only available on panels purchased
through an REC Certified Solar Professional installer. Warranty
conditions apply. See www.recgroup.com for more details.

CERTIFICATIONS

IEC 61215:2016, IEC 61730:2016, UL 61730
IEC 62804 PID
IEC 61701 Salt Mist
IEC 62716 Ammonia Resistance
UL 61730 Fire Type Class 2
UL 790 Fire Class Type C
IEC 62782 Dynamic Mechanical Load
IEC 61215-2:2016 Hailstone (1.37in)
ISO 14001, ISO 9001, IEC 45001, IEC 62941



TEMPERATURE RATINGS*

Nominal Module Operating Temperature:	44.3°C (±2°C)
Temperature coefficient of P _{MAX} :	-0.34 %/°C
Temperature coefficient of V _{OC} :	-0.26 %/°C
Temperature coefficient of I _{SC} :	0.04 %/°C


*The temperature coefficients stated are linear values

DELIVERY INFORMATION

Panels per pallet:	33
Panels per 40 ft GP/high cube container:	792 (24 pallets)
Panels per 53 ft truck:	TBD

LOW LIGHT BEHAVIOUR

Typical low irradiance performance of module at STC:



Available from:

Founded in 1996, REC Group is an international pioneering solar energy company dedicated to empowering consumers with clean, affordable solar power. As Solar's Most Trusted, REC is committed to high quality, innovation, and a low carbon footprint in the solar materials and solar panels it manufactures. Headquartered in Norway with operational headquarters in Singapore, REC also has regional hubs in North America, Europe, and Asia-Pacific.

REC Solar PTE. LTD.
20 Tuas South Ave. 14
Singapore 637312
post@recgroup.com





IQ8 and IQ8+ Microinverters

Our newest IQ8 Microinverters are the industry’s first microgrid-forming, software defined microinverters with split-phase power conversion capability to convert DC power to AC power efficiently. The brain of the semiconductor-based microinverter is our proprietary application specific integrated circuit (ASIC) which enables the microinverter to operate in grid-tied or off-grid modes. This chip is built in advanced 55nm technology with high speed digital logic and has superfast response times to changing loads and grid events, alleviating constraints on battery sizing for home energy systems.



Part of the Enphase Energy System, IQ8 Series Microinverters integrate with the IQ Battery, IQ Gateway, and the Enphase App monitoring and analysis software.



IQ8 Series Microinverters redefine reliability standards with more than one million cumulative hours of power-on testing, enabling an industry-leading limited warranty of up to 25 years.



Connect PV modules quickly and easily to IQ8 Series Microinverters using the included Q-DCC-2 adapter cable with plug-n-play MC4 connectors.



IQ8 Series Microinverters are UL listed as PV Rapid Shutdown Equipment and conform with various regulations, when installed according to manufacturer’s instructions.

*Only when installed with IQ System Controller 2, meets UL 1741.
**IQ8 and IQ8Plus support split-phase, 240V installations only.

Easy to install

- Lightweight and compact with plug-n-play connectors
- Power Line Communication (PLC) between components
- Faster installation with simple two-wire cabling

High productivity and reliability

- Produce power even when the grid is down*
- More than one million cumulative hours of testing
- Class II double-insulated enclosure
- Optimized for the latest high-powered PV modules

Microgrid-forming

- Complies with the latest advanced grid support**
- Remote automatic updates for the latest grid requirements
- Configurable to support a wide range of grid profiles
- Meets CA Rule 21 (UL 1741-SA) and IEEE 1547:2018 (UL 1741-SB 3rd Ed.)

Note:

IQ8 Microinverters cannot be mixed together with previous generations of Enphase microinverters (IQ7 Series, IQ6 Series, etc) in the same system.

IQ8 and IQ8+ Microinverters

INPUT DATA (DC)		IQ8-60-2-US	IQ8PLUS-72-2-US
Commonly used module pairings ¹	W	235 – 350	235 – 440
Module compatibility		60-cell / 120 half-cell	54-cell / 108 half-cell, 60-cell / 120 half-cell, 66-cell / 132 half-cell and 72-cell / 144 half-cell
MPPT voltage range	V	27 – 37	27 – 45
Operating range	V	16 – 48	16 – 58
Min. / Max. start voltage	V	22 / 48	22 / 58
Max. input DC voltage	V	50	60
Max. continuous input DC current	A	10	12
Max. input DC short-circuit current	A	25	
Max. module I _{sc}	A	20	
Overvoltage class DC port		II	
DC port backfeed current	mA	0	
PV array configuration		1 x 1 Ungrounded array; No additional DC side protection required; AC side protection requires max 20A per branch circuit	
OUTPUT DATA (AC)		IQ8-60-2-US	IQ8PLUS-72-2-US
Peak output power	VA	245	300
Max. continuous output power	VA	240	290
Nominal (L-L) voltage / range ²	V	240 / 211 – 264	
Max. continuous output current	A	1.0	1.21
Nominal frequency	Hz	60	
Extended frequency range	Hz	47 – 68	
AC short circuit fault current over 3 cycles	Arms	2	
Max. units per 20 A (L-L) branch circuit ³		16	13
Total harmonic distortion		<5%	
Overvoltage class AC port		III	
AC port backfeed current	mA	30	
Power factor setting		1.0	
Grid-tied power factor (adjustable)		0.85 leading – 0.85 lagging	
Peak efficiency	%	97.7	
CEC weighted efficiency	%	97	
Night-time power consumption	mW	60	
MECHANICAL DATA			
Ambient temperature range		-40°C to +60°C (-40°F to +140°F)	
Relative humidity range		4% to 100% (condensing)	
DC Connector type		MC4	
Dimensions (H x W x D)		212 mm (8.3") x 175 mm (6.9") x 30.2 mm (1.2")	
Weight		1.08 kg (2.38 lbs)	
Cooling		Natural convection – no fans	
Approved for wet locations		Yes	
Pollution degree		PD3	
Enclosure		Class II double-insulated, corrosion resistant polymeric enclosure	
Environ. category / UV exposure rating		NEMA Type 6 / outdoor	
COMPLIANCE			
Certifications	CA Rule 21 (UL 1741-SA), UL 62109-1, IEEE 1547:2018 (UL 1741-SB 3 rd Ed.), FCC Part 15 Class B, ICES-0003 Class B, CAN / CSA-C22.2 NO. 107.1-01 This product is UL Listed as PV Rapid Shutdown Equipment and conforms with NEC 2014, NEC 2017, and NEC 2020 section 690.12 and C22.1-2018 Rule 64-218 Rapid Shutdown of PV Systems, for AC and DC conductors, when installed according to manufacturer's instructions.		

(1) Pairing PV modules with wattage above the limit may result in additional clipping losses. See the compatibility calculator at <https://link.enphase.com/module-compatibility>.
(2) Nominal voltage range can be extended beyond nominal if required by the utility. (3) Limits may vary. Refer to local requirements to define the number of microinverters per branch in your area.

Enphase IQ Combiner 4/4C

X-IQ-AM1-240-4
X-IQ-AM1-240-4C



To learn more about Enphase offerings, visit enphase.com

The **Enphase IQ Combiner 4/4C** with Enphase IQ Gateway and integrated LTE-M1 cell modem (included only with IQ Combiner 4C) consolidates interconnection equipment into a single enclosure and streamlines IQ microinverters and storage installations by providing a consistent, pre-wired solution for residential applications. It offers up to four 2-pole input circuits and Eaton BR series busbar assembly.

Smart

- Includes IQ Gateway for communication and control
- Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), included only with IQ Combiner 4C
- Includes solar shield to match Enphase IQ Battery aesthetics and deflect heat
- Flexible networking supports Wi-Fi, Ethernet, or cellular
- Optional AC receptacle available for PLC bridge
- Provides production metering and consumption monitoring

Simple

- Centered mounting brackets support single stud mounting
- Supports bottom, back and side conduit entry
- Up to four 2-pole branch circuits for 240 VAC plug-in breakers (not included)
- 80A total PV or storage branch circuits

Reliable

- Durable NRTL-certified NEMA type 3R enclosure
- Five-year limited warranty
- Two years labor reimbursement program coverage included for both the IQ Combiner SKU's
- UL listed



Enphase IQ Combiner 4/4C

MODEL NUMBER	
IQ Combiner 4 (X-IQ-AM1-240-4)	IQ Combiner 4 with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes a silver solar shield to match the IQ Battery system and IQ System Controller 2 and to deflect heat.
IQ Combiner 4C (X-IQ-AM1-240-4C)	IQ Combiner 4C with Enphase IQ Gateway printed circuit board for integrated revenue grade PV production metering (ANSI C12.20 +/- 0.5%) and consumption monitoring (+/- 2.5%). Includes Enphase Mobile Connect cellular modem (CELLMODEM-M1-06-SP-05), a plug-and-play industrial-grade cell modem for systems up to 60 microinverters. (Available in the US, Canada, Mexico, Puerto Rico, and the US Virgin Islands, where there is adequate cellular service in the installation area.) Includes a silver solar shield to match the IQ Battery and IQ System Controller and to deflect heat.
ACCESSORIES AND REPLACEMENT PARTS (not included, order separately)	
Ensemble Communications Kit COMMS-CELLMODEM-M1-06 CELLMODEM-M1-06-SP-05 CELLMODEM-M1-06-AT-05	- Includes COMMS-KIT-01 and CELLMODEM-M1-06-SP-05 with 5-year Sprint data plan for Ensemble sites - 4G based LTE-M1 cellular modem with 5-year Sprint data plan - 4G based LTE-M1 cellular modem with 5-year AT&T data plan
Circuit Breakers BRK-10A-2-240V BRK-15A-2-240V BRK-20A-2P-240V BRK-15A-2P-240V-B BRK-20A-2P-240V-B	Supports Eaton BR210, BR215, BR220, BR230, BR240, BR250, and BR260 circuit breakers. Circuit breaker, 2 pole, 10A, Eaton BR210 Circuit breaker, 2 pole, 15A, Eaton BR215 Circuit breaker, 2 pole, 20A, Eaton BR220 Circuit breaker, 2 pole, 15A, Eaton BR215B with hold down kit support Circuit breaker, 2 pole, 20A, Eaton BR220B with hold down kit support
EPLC-01	Power line carrier (communication bridge pair), quantity - one pair
XA-SOLARSHIELD-ES	Replacement solar shield for IQ Combiner 4/4C
XA-PLUG-120-3	Accessory receptacle for Power Line Carrier in IQ Combiner 4/4C (required for EPLC-01)
XA-ENV-PCBA-3	Replacement IQ Gateway printed circuit board (PCB) for Combiner 4/4C
X-IQ-NA-HD-125A	Hold down kit for Eaton circuit breaker with screws.
ELECTRICAL SPECIFICATIONS	
Rating	Continuous duty
System voltage	120/240 VAC, 60 Hz
Eaton BR series busbar rating	125 A
Max. continuous current rating	65 A
Max. continuous current rating (input from PV/storage)	64 A
Max. fuse/circuit rating (output)	90 A
Branch circuits (solar and/or storage)	Up to four 2-pole Eaton BR series Distributed Generation (DG) breakers only (not included)
Max. total branch circuit breaker rating (input)	80A of distributed generation / 95A with IQ Gateway breaker included
Envoy breaker	10A or 15A rating GE/Siemens/Eaton included
Production metering CT	200 A solid core pre-installed and wired to IQ Gateway
Consumption monitoring CT (CT-200-SPLIT)	A pair of 200 A split core current transformers
MECHANICAL DATA	
Dimensions (WxHxD)	37.5 x 49.5 x 16.8 cm (14.75" x 19.5" x 6.63"). Height is 21.06" (53.5 cm) with mounting brackets.
Weight	7.5 kg (16.5 lbs)
Ambient temperature range	-40° C to +46° C (-40° to 115° F)
Cooling	Natural convection, plus heat shield
Enclosure environmental rating	Outdoor, NRTL-certified, NEMA type 3R, polycarbonate construction
Wire sizes	• 20 A to 50 A breaker inputs: 14 to 4 AWG copper conductors • 60 A breaker branch input: 4 to 1/0 AWG copper conductors • Main lug combined output: 10 to 2/0 AWG copper conductors • Neutral and ground: 14 to 1/0 copper conductors Always follow local code requirements for conductor sizing.
Altitude	To 2000 meters (6,560 feet)
INTERNET CONNECTION OPTIONS	
Integrated Wi-Fi	802.11b/g/n
Cellular	CELLMODEM-M1-06-SP-05, CELLMODEM-M1-06-AT-05 (4G based LTE-M1 cellular modem). Note that an Enphase Mobile Connect cellular modem is required for all Ensemble installations.
Ethernet	Optional, 802.3, Cat5E (or Cat 6) UTP Ethernet cable (not included)
COMPLIANCE	
Compliance, IQ Combiner	UL 1741, CAN/CSA C22.2 No. 107.1, 47 CFR, Part 15, Class B, ICES 003 Production metering: ANSI C12.20 accuracy class 0.5 (PV production) Consumption metering: accuracy class 2.5
Compliance, IQ Gateway	UL 60601-1/CANCSA 22.2 No. 61010-1


To learn more about Enphase offerings, visit enphase.com

© 2022 Enphase Energy. All rights reserved. Enphase, the Enphase logo, IQ Combiner 4/4C, and other names are trademarks of Enphase Energy, Inc. Data subject to change. 02-14-2022




Enphase Q Cable Accessories

The **Enphase Q Cable™** and accessories are part of the latest generation Enphase IQ System™. These accessories provide simplicity, reliability, and faster installation times.



Enphase Q Cable

- Two-wire, double-insulated Enphase Q Cable is 50% lighter than the previous generation Enphase cable
- New cable numbering and plug and play connectors speed up installation and simplify wire management
- Link connectors eliminate cable waste



Field-Wireable Connectors

- Easily connect Q cables on the roof without complex wiring
- Make connections from any open connector and center feed any section of cable within branch limits
- Available in male and female connector types





To learn more about Enphase offerings, visit enphase.com



Enphase Q Cable Accessories

CONDUCTOR SPECIFICATIONS				
Certification	UL3003 (raw cable), UL 9703 (cable assemblies), DG cable			
Flame test rating	FT4			
Compliance	RoHS, OIL RES I, CE, UV Resistant, combined UL for Canada and United States			
Conductor type	THHN/THWN-2 dry/wet			
Disconnecting means	The AC and DC bulkhead connectors have been evaluated and approved by UL for use as the load-break disconnect required by NEC 690.			
Q CABLE TYPES / ORDERING OPTIONS				
Connectorized Models	Size / Max Nominal Voltage	Connector Spacing	PV Module Orientation	Connector Count per Box
Q-12-10-240	12 AWG / 277 VAC	1.3 m (4.2 ft)	Portrait	240
Q-12-17-240	12 AWG / 277 VAC	2.0 m (6.5 ft)	Landscape (60-cell)	240
Q-12-20-200	12 AWG / 277 VAC	2.3 m (7.5 ft)	Landscape (72-cell)	200
ENPHASE Q CABLE ACCESSORIES				
Name	Model Number	Description		
Raw Q Cable	Q-12-RAW-300	300 meters of 12 AWG cable with no connectors		
Field-wireable connector (male)	Q-CONN-10M	Make connections from any open connector		
Field-wireable connector (female)	Q-CONN-10F	Make connections from any Q Cable open connector		
Cable Clip	Q-CLIP-100	Used to fasten cabling to the racking or to secure looped cabling		
Disconnect tool	Q-DISC-10	Disconnect tool for Q Cable connectors, DC connectors, and AC module mount		
Q Cable sealing caps (female)	Q-SEAL-10	One needed to cover each unused connector on the cabling		
Terminator	Q-TERM-10	Terminator cap for unused cable ends		
Enphase EN4 to MC4 adaptor ¹	ECA-EN4-S22	Connect PV module using MC4 connectors to IQ micros with EN4 (TE PV4-S SOLARLOK). 150mm/5.9" to MC4.		
Enphase EN4 non-terminated adaptor ¹	ECA-EN4-FW	For field wiring of UL certified DC connectors. EN4 (TE PV4-S SOLARLOK) to non-terminated cable. 150mm/5.9"		
Enphase EN4 to MC4 adaptor (long) ¹	ECA-EN4-S22-L	Longer adapter cable for EN4 (TE PV4-S SOLARLOK) to MC4. Use with split cell modules or PV modules with short DC cable. 600mm/23.6"		
Replacement DC Adaptor (MC4)	Q-DCC-2	DC adaptor to MC4 (max voltage 100 VDC)		
Replacement DC Adaptor (UTX)	Q-DCC-5	DC adaptor to UTX (max voltage 100 VDC)		

1. Qualified per UL subject 9703.

	TERMINATOR Terminator cap for unused cable ends, sold in packs of ten (Q-TERM-10)		SEALING CAPS Sealing caps for unused aggregator and cable connections (Q-BA-CAP-10 and Q-SEAL-10)
	DISCONNECT TOOL Plan to use at least one per installation, sold in packs of ten (Q-DISC-10)		CABLE CLIP Used to fasten cabling to the racking or to secure looped cabling, sold in packs of one hundred (Q-CLIP-100)

To learn more about Enphase offerings, visit enphase.com


© 2020 Enphase Energy. All rights reserved. Enphase, the Enphase logo, Enphase IQ 7A, Enphase IQ Battery, Enphase Enlighten, Enphase IQ Envoy, and other trademarks or service names are the trademarks of Enphase Energy, Inc. Data subject to change.
2020-06-26



Solar Is Not Always Sunny

Over their lifetime, solar panels experience countless extreme weather events. Not just the worst storms in years, but the worst storms in 40 years. High winds capable of ripping panels from a roof, and snowfalls weighing enough to buckle a panel frame.

XR Rails are the structural backbone preventing these results. They resist uplift, protect against buckling and safely and efficiently transfer loads into the building structure. Their superior spanning capability requires fewer roof attachments, reducing the number of roof penetrations and the amount of installation time.



Force-Stabilizing Curve

Sloped roofs generate both vertical and lateral forces on mounting rails which can cause them to bend and twist. The curved shape of XR Rails is specially designed to increase strength in both directions while resisting the twisting. This unique feature ensures greater security during extreme weather and a longer system lifetime.

Compatible with Flat & Pitched Roofs



XR Rails are compatible with FlashFoot and other pitched roof attachments.



IronRidge offers a range of tilt leg options for flat roof mounting applications.

Corrosion-Resistant Materials

All XR Rails are made of marine-grade aluminum alloy, then protected with an anodized finish. Anodizing prevents surface and structural corrosion, while also providing a more attractive appearance.



XR Rail Family

The XR Rail Family offers the strength of a curved rail in three targeted sizes. Each size supports specific design loads, while minimizing material costs. Depending on your location, there is an XR Rail to match.



XR10

XR10 is a sleek, low-profile mounting rail, designed for regions with light or no snow. It achieves 6 foot spans, while remaining light and economical.


- 6' spanning capability
- Moderate load capability
- Clear anodized finish
- Internal splices available



XR100

XR100 is the ultimate residential mounting rail. It supports a range of wind and snow conditions, while also maximizing spans up to 8 feet.

- 8' spanning capability
- Heavy load capability
- Clear & black anodized finish
- Internal splices available



XR1000

XR1000 is a heavyweight among solar mounting rails. It's built to handle extreme climates and spans 12 feet or more for commercial applications.

- 12' spanning capability
- Extreme load capability
- Clear anodized finish
- Internal splices available

Rail Selection

The following table was prepared in compliance with applicable engineering codes and standards. Values are based on the following criteria: ASCE 7-10, Roof Zone 1, Exposure B, Roof Slope of 7 to 27 degrees and Mean Building Height of 30 ft. Visit IronRidge.com for detailed span tables and certifications.

Load		Rail Span					
Snow (PSF)	Wind (MPH)	4'	5' 4"	6'	8'	10'	12'
None	100	XR10		XR100		XR1000	
	120						
	140						
	160						
10-20	100						
	120						
	140						
	160						
30	100						
	160						
40	100						
	160						
50-70	160						
80-90	160						


NanoMount




Part Number	Description
K50058-BK1	NanoMount <ul style="list-style-type: none">NanoMountUSWR Gasket

Cut Sheet


NanoMount



Material: Aluminum
Finish: Black Powder Coating



NanoMount Gasket



Material: USWR Gasket with Adhesive

D10214-V003

Dimensions shown are inches (and millimeters)

Details are subject to change without notice

NanoMount Lag Bolt



NanoMount Decking Screw




Part Number	Description
K50049-BK1	Lag Bolt Assembly <ul style="list-style-type: none">Hex Lag Bolt M8X1 15, DIN 571, 304SSealing Washer .33 ID X .75 X .157
K50055-BK1	Decking Screw Assembly <ul style="list-style-type: none">Self-Tapping Screw, #6.3 X 76Sealing Washer .26ID X .50X .125

Cut Sheet


Lag Bolt Assembly

1. Hex Lag Bolt M8X1 15, DIN 571, 304



Material: Stainless Steel
Finish: Clear


2 Sealing Washer .33ID X.75X.157



Material: EPDM + Stainless Steel


Decking Screw Assembly

1. Self-Tapping Screw, #6.3 X 76



Material: Stain
Finish: Clear

2. Sealing Washer .26ID X .50X .125



Material: EPDM + Stainless Steel

D10214-V003

Dimensions shown are inches (and millimeters)

Details are subject to change without notice