


GENERAL NOTES


1. **MAINTAIN ACCESS TO EXISTING WALKWAYS, CORRIDORS, AND OTHER ADJACENT OCCUPIED OR USED FACILITIES. DO NOT CLOSE OR OBSTRUCT WALKWAYS, CORRIDORS, OR OTHER OCCUPIED OR USED FACILITIES WITHOUT PERMISSION FROM OWNER.**
2. **DEFINITIONS:**
 - 2.1. **REMOVE AND DISCARD:** DETACH ITEMS FROM EXISTING CONSTRUCTION AND LEGALLY DISPOSE OF THEM OFF-SITE.
 - 2.2. **REMOVE AND SALVAGE:** DETACH ITEMS FROM EXISTING CONSTRUCTION AND TURN OVER TO OWNER UNDAMAGED.
 - 2.3. **RELOCATE:** DETACH ITEMS FROM EXISTING CONSTRUCTION, MOVE ITEMS INTACT AND UNDAMAGED, AND REINSTALL THEM WHERE INDICATED.
 - 2.4. **EXISTING TO REMAIN:** EXISTING ITEMS OF CONSTRUCTION THAT ARE NOT TO BE REMOVED, BUT ARE TO REMAIN IN PLACE AND BE UNDAMAGED.
 - 2.5. **REMOVE AND RECLAIM:** DETACH ITEMS FROM EXISTING CONSTRUCTION. AT THE CONTRACTORS OPTION, ITEM MAY BE REUSED AS PART OF NEW WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO INVENTORY ITEMS TO DETERMINE IF ITEMS WILL FUNCTION AND APPEAR LIKE THE NEW ITEMS SPECIFIED AND CALLED OUT ON THESE DOCUMENTS. IF ITEMS ARE REUSED, CONTRACTOR IS TO CLEAN, REPAIR, OR OTHERWISE REBERG ITEMS TO LIKE NEW CONDITION. MODIFY REUSED ITEMS AS REQUIRED TO COMPLY WITH ALL SPECIFICATIONS AND REQUIREMENTS NECESSARY TO EXECUTE A COMPLETE WORKMANLIKE JOB. IF THE CONTRACTOR CHOOSES TO NOT REUSE ITEM, LEGALLY DISPOSE OF ITEM OFF-SITE AND REPLACE WITH NEW TO MATCH EXISTING.
 - 2.6. **PROVIDE:** THE MEANING OF THE WORD "PROVIDED" INCLUDES, BUT IS NOT LIMITED TO, FURNISHED, DELIVERED, INSTALLED, FINISHED, MADE FULLY OPERABLE AND COMPLETE, UNLESS SPECIFICALLY NOTED OTHERWISE. ALL WORK DESCRIBED IN THESE DOCUMENTS IS TO BE PROVIDED BY THE CONTRACTOR.
3. **CONTRACTOR IS TO INCLUDE AS PART OF HIS SCOPE ALL CUTTING AND PATCHING REQUIRED THROUGH CAREFUL EVALUATION OF THE EXISTING SITE AND THE CONSTRUCTION DOCUMENTS. CONTRACTOR SHALL COORDINATE THE CUTTING AND PATCHING OF EXISTING CONSTRUCTION NECESSARY TO PERMIT INSTALLATION OR PERFORMANCE OF THE WORK INDICATED IN THESE CONSTRUCTION DOCUMENTS. SINK-OUT CONC. SLAB AS REQUIRED FOR UTILITIES, FOR EQUIPMENT AND BAYS, VENT, FLOOR AND TRENCH DEPTH IN FLOOR, PATCH BACK TO MATCH EXISTING. PATCH AND REPAIR SURFACE MATERIAL, COMPACT UNDERLYING MATERIALS TO MEET BEST PRACTICES. DOWEL NAIL TO EXISTING WITH #4 REBAR AT 30" OC.**
4. **WHERE WALLS, CASEWORK, FINISHES, EQUIPMENT OR OTHER ITEMS AND CONSTRUCTIONS HAVE BEEN REMOVED EXPOSING UNDERLYING WALL AND/OR FLOOR FINISHES, OTHER CONSTRUCTION DOCUMENTS MAKE AVAILABLE TO THE DESIGNER BY THE BUILDING MANAGEMENT, ALL AS-BUILT ARCHITECTURAL, COMPACT UNDERLYING MATERIALS TO MEET BEST PRACTICES. DOWEL NAIL TO EXISTING WITH #4 REBAR AT 30" OC.**
5. **EXISTING CONDITIONS SHOWN ON THESE DRAWINGS ARE BASED UPON BASE BUILDING AND OTHER CONSTRUCTION DOCUMENTS MAKE AVAILABLE TO THE DESIGNER BY THE BUILDING MANAGEMENT, ALL AS-BUILT ARCHITECTURAL, COMPACT UNDERLYING MATERIALS TO MEET BEST PRACTICES. DOWEL NAIL TO EXISTING WITH #4 REBAR AT 30" OC.**
6. **PRIOR TO BID: BID VERIFY ALL EXISTING CONSTRUCTION TO REMAIN AND INCLUDING COSTS FOR REPAIR AND REINFORCEMENT OF EXISTING CONSTRUCTION TO REMAIN SO THAT IT MEETS THE AESTHETIC AND FUNCTIONAL STANDARD OF QUALITY FOR NEW CONSTRUCTION. BLEND AND**

- MATCH EXISTING CONSTRUCTION WITH NEW CONSTRUCTION. PRIOR TO BID, ADVISE TENANT OF ANY CONDITIONS WHICH CANNOT BE REPAIRED OR RECONDITIONED, BLENDED AND MATCHED. NOTE CONTRACT DOCUMENT REQUIREMENTS FOR EXISTING CONSTRUCTION AND INCLUDE COSTS FOR THIS WORK IN BID PROPOSAL.
7. THE GENERAL CONTRACTOR SHALL, IN THE BIDDING PROCESS, REQUIRE THAT MECHANICAL AND ELECTRICAL SUBCONTRACTORS MAKE A THOROUGH FIELD INSPECTION OF AS-BUILT CONDITIONS OF EXISTING SYSTEMS. AFTER SUCH INSPECTION HAS BEEN COMPLETED, THE GENERAL CONTRACTOR AND SUBCONTRACTORS SHALL PROVIDE IN THEIR BIDS, ANY MODIFICATIONS TO THE EXISTING SYSTEMS WHICH MAY BE REQUIRED TO ACCOMMODATE THE PROPOSED REQUIREMENTS FOR THIS TENANT. IF A DETERMINATION OF SUCH MODIFICATIONS CANNOT BE MADE, THE GENERAL CONTRACTOR SHALL NOTIFY THE TENANT, AND AT THE DIRECTION OF THE TENANT, PROVIDE AN AGREED UPON ALLOWANCE TO COVER SUCH WORK.
8. COMMENCEMENT WORK BY A CONTRACTOR OR SUBCONTRACTOR CONSTITUTES ACCEPTANCE OF THE UNDERLYING CONDITIONS AND SURFACES. PRIOR TO PROCEEDING WITH THE WORK, PREPARE EXISTING AND NEW UNDERLYING CONDITIONS AND SUBSTRATE TO COMPLY WITH THE CONTRACT DOCUMENTS, INDUSTRY STANDARDS AND MANUFACTURER'S RECOMMENDATION.
9. FIELD VERIFY ALL ROUGH OPENINGS AND HALL WIDTHS PRIOR TO ORDERING OR FABRICATION OF MATERIALS.
10. DIMENSIONS ARE NOMINAL AND TO THE FACE OF PARTITIONS
11. CLEAN-UP OF RUBBISH AND DEBRIS RESULTING FROM DEMOLITION AND NEW WORK SHALL BE COLLECTED REGULARLY FROM PROJECT SITE AND LEGALLY DISPOSED
12. ALL WEATHER EXPOSED SURFACES SHALL HAVE A WEATHER RESISTIVE BARRIER TO PROTECT THE INTERIOR WALL COVERING AND EXTERIOR OPENINGS SHALL BE FLASHED IN SUCH A MANNER AS TO MAKE THEM WEATHERPROOF
13. BUILDING ADDRESS NUMBERS TO BE PROVIDED ON THE FRONT AND STREET SIDE OF THE BUILDING, SAID NUMBERS SHALL BE A MIN. OF 1" HIGH WITH 1" WIDE STROKES CONTRASTING WITH THEIR BACKGROUND
14. CONTRACTORS ARE RESPONSIBLE FOR ALL MATERIALS AND QUANTITIES SHOWN IN THESE DRAWINGS GRAPHICALLY AS WELL AS THOSE CALLED FOR BY NOTE
15. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS TO COMPLETE THE PROPOSED WORK AND SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS
16. THE TENANT OR THE TENANT'S DESIGNATED REPRESENTATIVE WILL PROVIDE SERVICES IN CONNECTION WITH ADMINISTRATION OF THE CONTRACT
17. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL LOCAL LAWS, ORDINANCES, RULES AND REGULATIONS OF THE GOVERNING AGENCIES HAVING JURISDICTION
18. THE CONTRACTOR MUST TAKE ADEQUATE CARE TO PROTECT ALL AREAS OF THE BUILDING WHERE THE WORK OF THIS PROJECT IS LOCATED AS WELL AS

- THE AREAS ADJACENT TO THE AREA OF THE WORK OF THIS PROJECT SO AS TO PREVENT DAMAGE TO LIFE OR PROPERTY AS A RESULT OF THIS CONSTRUCTION PROJECT
19. ONLY MATERIALS THAT ARE NEW, UNUSED, FREE FROM DEFECTS, AND THE BEST OF THEIR RESPECTIVE KINDS SHALL BE USED. THE BASIS OF QUALITY SHALL BE THE LATEST STANDARDS OF ASTM, ASA OR ASHRA
20. THE CONTRACTOR SHALL COORDINATE HIS WORK WITH ALL OTHER TRADES INCLUDING THOSE OF THE TENANT WHO MAY BE ENGAGED UNDER A SEPARATE CONTRACT
21. INSTALL ALL WORK IN SUCH A MANNER AS TO BE READILY ACCESSIBLE FOR OPERATION, MAINTENANCE AND/OR REPAIRS
22. ALL WORK AND EQUIPMENT SHALL BE CLEANED TO THE SATISFACTION OF THE TENANT BEFORE BEING TURNED OVER FOR USE
23. A COPY OF THE LATEST SET OF CONSTRUCTION DOCUMENTS SHALL BE KEPT AT THE JOB SITE AT ALL TIMES
24. THE CONTRACTOR AND EACH SUBCONTRACTOR SHALL KEEP ACCURATE RECORDS OF ANY MODIFICATION OR DEVIATIONS FROM THE CONTRACT DRAWINGS
25. PROJECT CLOSE OUT DOCUMENTS SHALL BE PROVIDED TO THE TENANT. INCLUDING AS-BUILT DRAWINGS, WARRANTY/MAINTENANCE MANUALS AND TESTING AND SUPERVISION AS REQUIRED. PRESERVE ALL PRINTED INSTRUCTIONS AND WARRANTIES THAT ARE PROVIDED WITH EQUIPMENT OR MATERIALS USED, AND DELIVER SAID PRINTED MATTER TO THE TENANT AT THE TIME OF SUBSTANTIAL COMPLETION. IF REQUESTED BY THE TENANT, INSTRUCT THE MANAGEMENT IN THE PROPER USE AND MAINTENANCE OF ALL ITEMS OF WORK PROVIDED.
26. PROVIDE WORK IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION, EXCEPT IN THE CASE WHERE THE CONTRACT DOCUMENTS ARE MORE STRINGENT. PROVIDE ANY MISCELLANEOUS ITEMS OR MATERIALS NOT SPECIFICALLY NOTED, BUT REQUIRED FOR PROPER INSTALLATION OF THE WORK.
27. ALL WORK SHALL BE WARRANTED BY THE CONTRACTOR TO BE SATISFACTORY, IN MATERIALS AND WORKMANSHIP, FOR A MINIMUM PERIOD OF ON (1) YEAR, OR FOR THE PERIOD OF WARRANTY CUSTOMARY, SPECIFIED FOR, THE TRADE, CRAFT OR PRODUCT, WHICHEVER IS LONGER.
28. SUBMIT REQUESTS FOR SUBSTITUTIONS OF SPECIFIED ITEMS IN WRITING, ACCOMPANIED BY THE ALTERNATIVE PRODUCT INFORMATION, TO THE TENANT. SUBSTITUTIONS MAY BE CONSIDERED ONLY IF THEY DO NOT SACRIFICE QUALITY, APPEARANCE AND FUNCTION. ACCEPTANCE OF SUBSTITUTIONS IS AT THE SOLE DISCRETION OF THE TENANT.

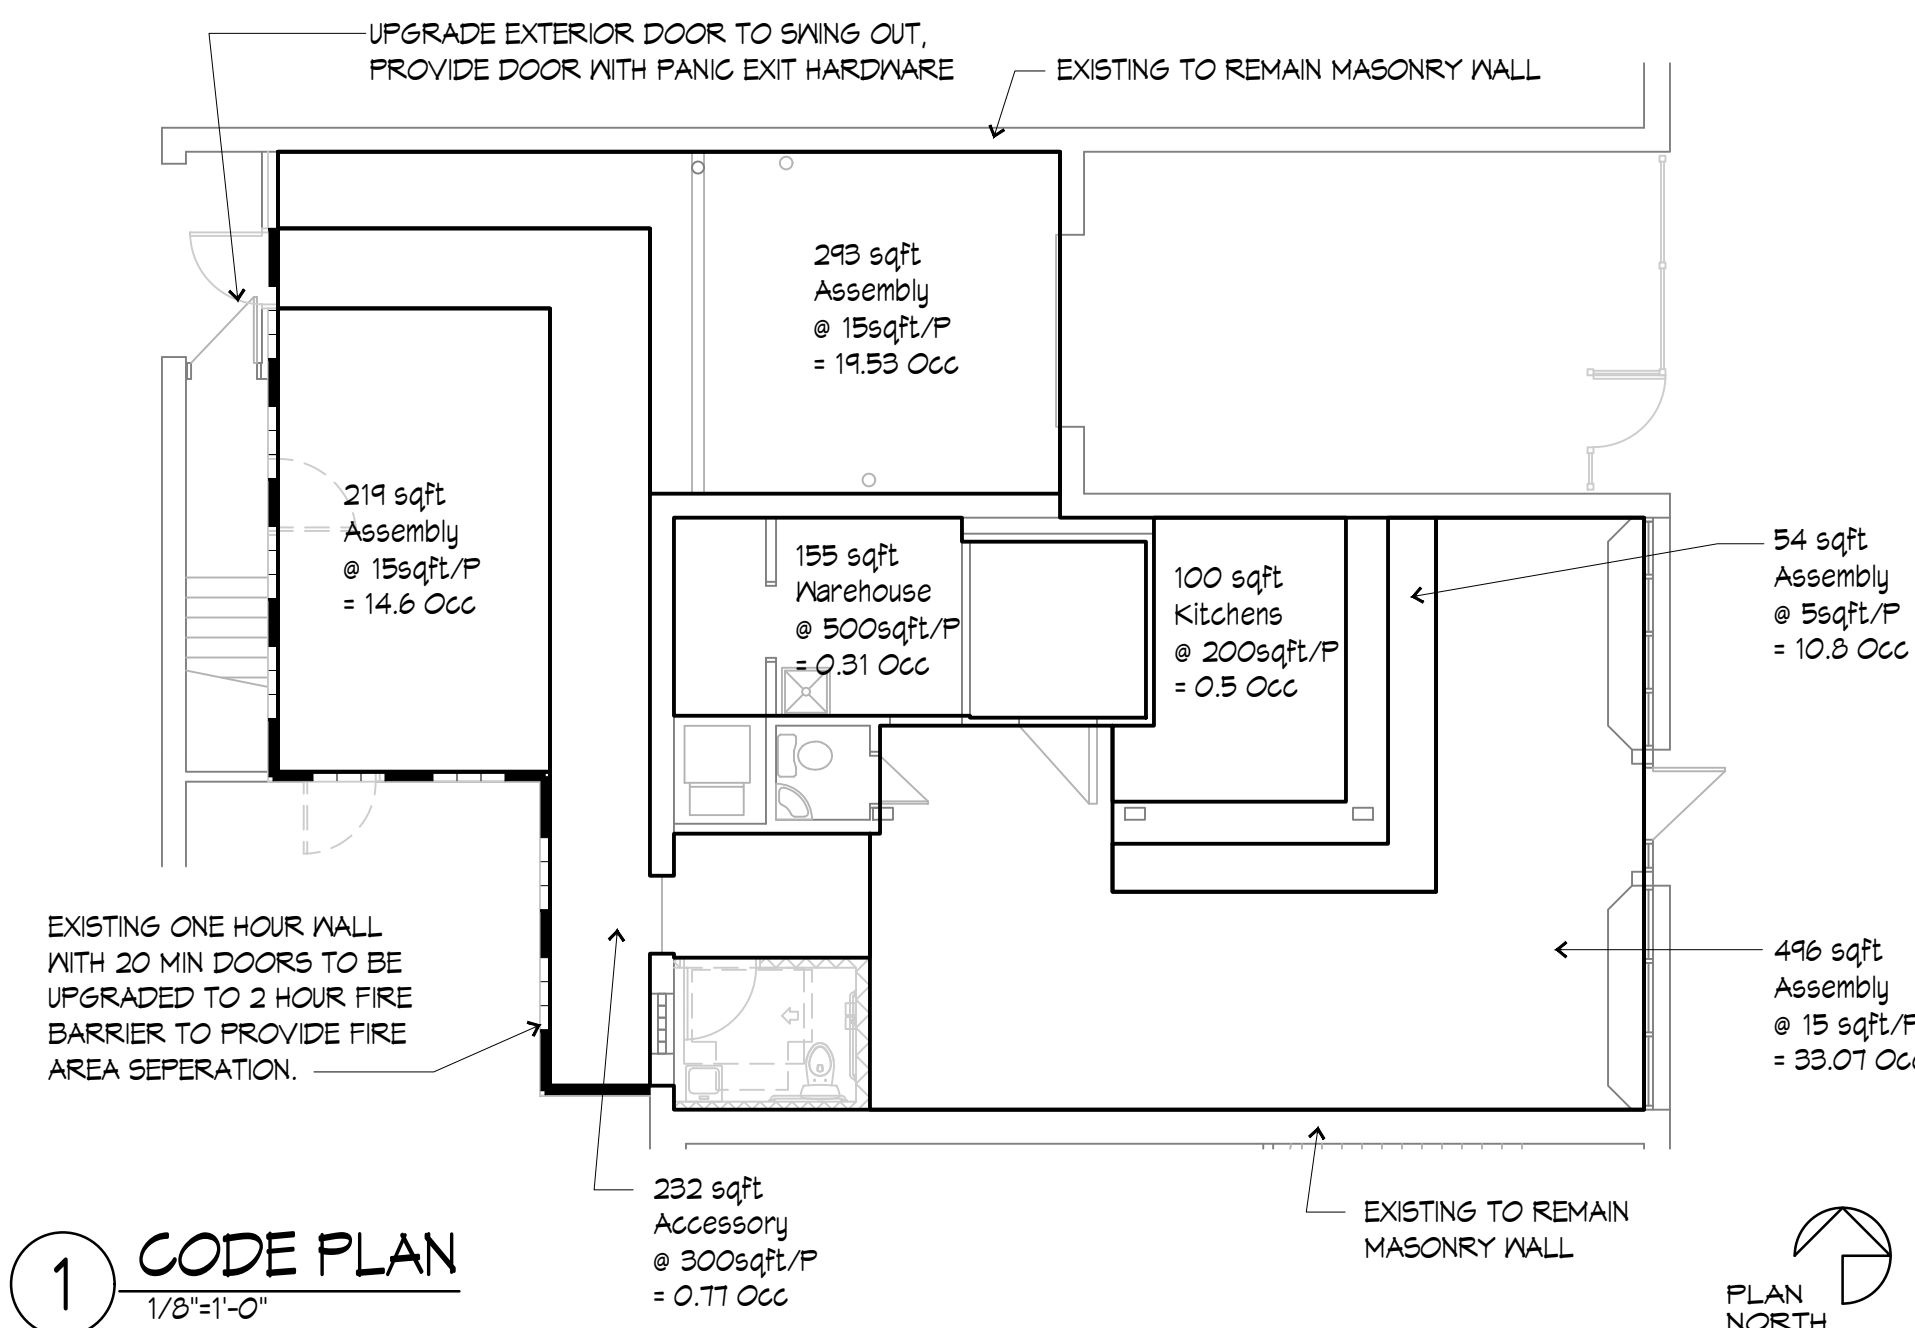


1 CODE PLAN
1/8"=1'-0"

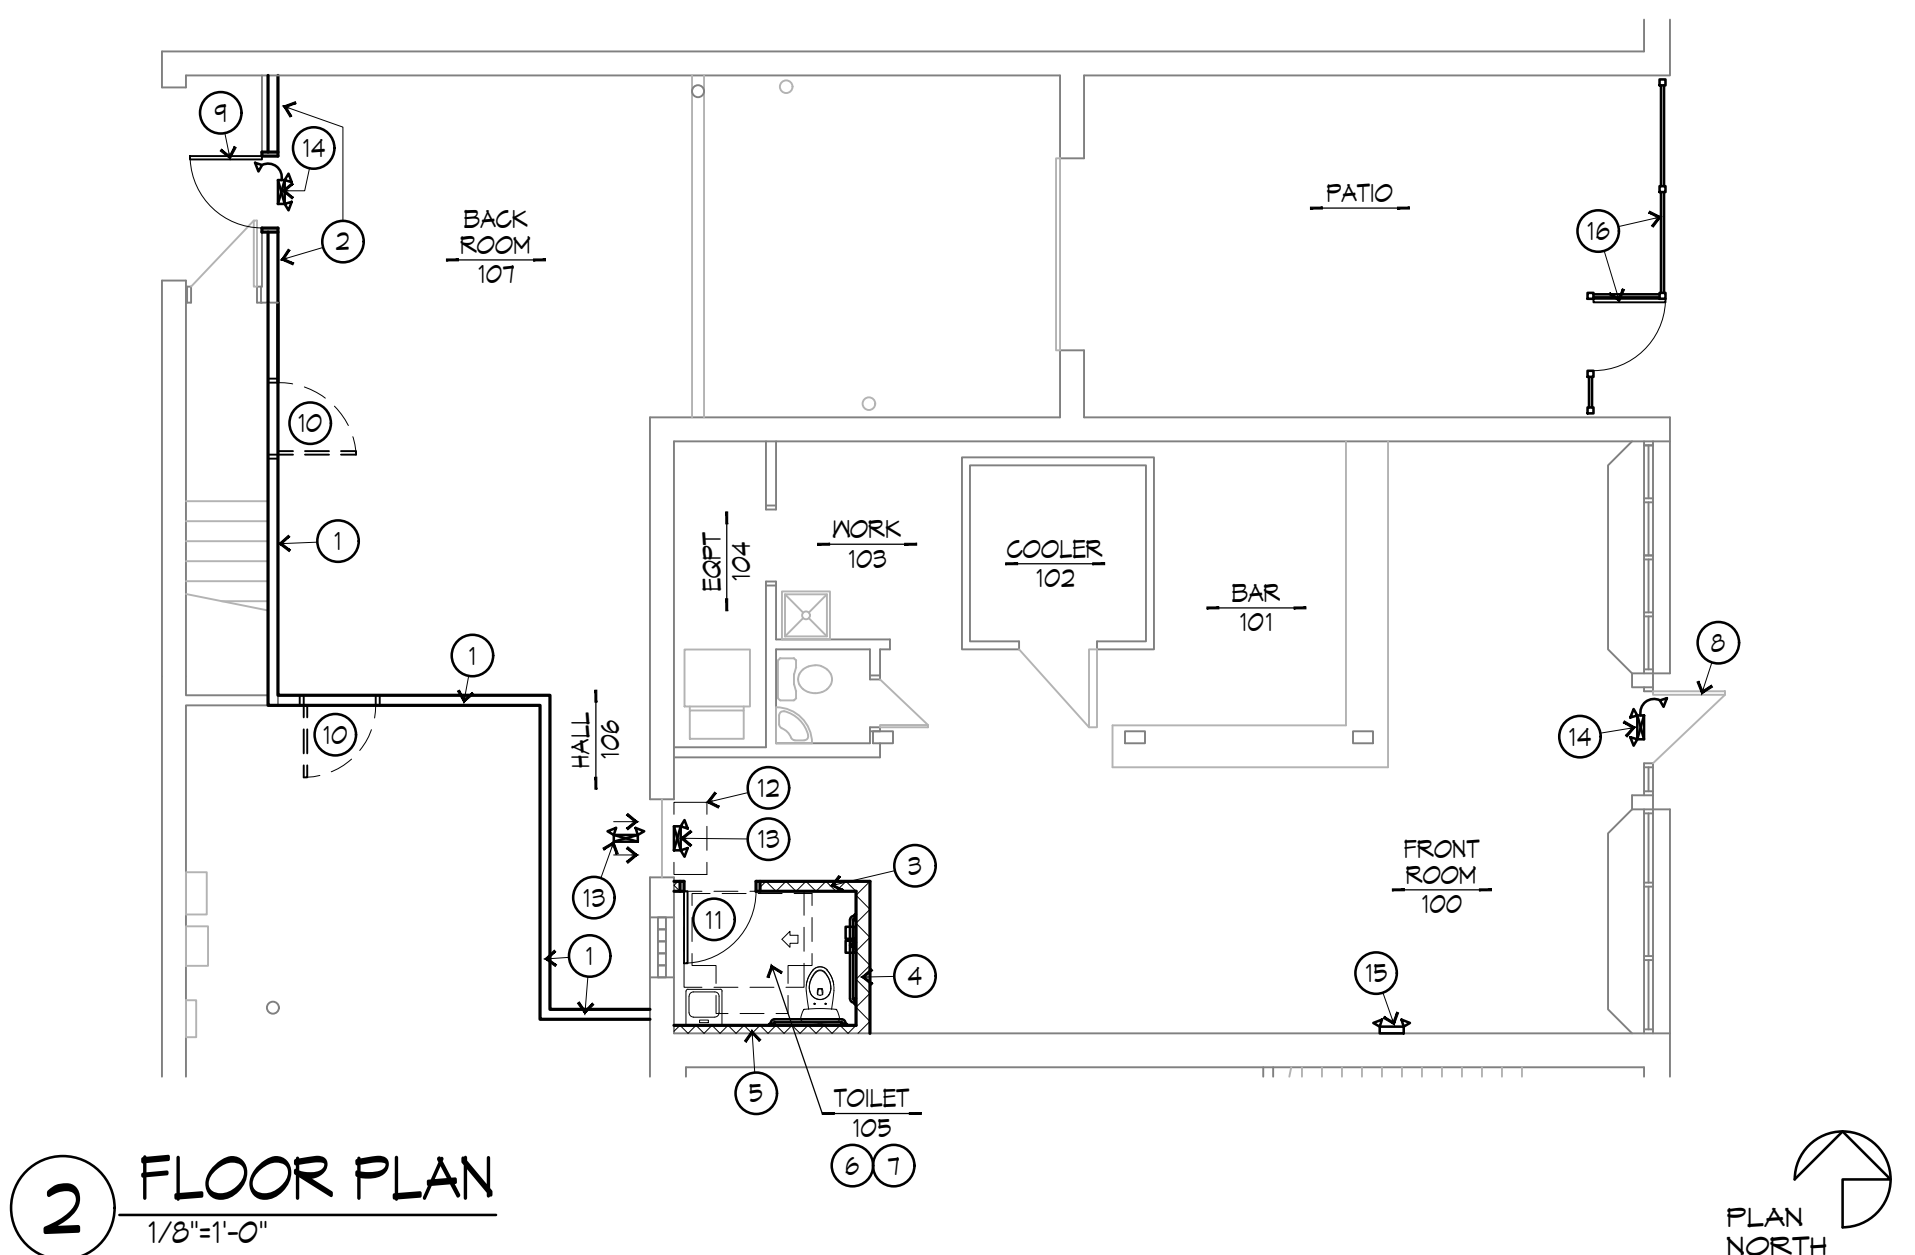

2 FLOOR PLAN
1/8"=1'-0"

TOILET ROOM TYPICAL NOTES

1. PROVIDE WATER CLOSET WITH SEAT HEIGHT BETWEEN 17 AND 19 INCHES MEASURED TO TOP OF THE SEAT. FLUSH CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET. CENTERLINE OF WATER CLOSET SHALL BE 16" TO 18" FROM THE SIDE WALL.
2. PROVIDE LAVATORY WITH RIM MOUNTED AT 34 INCHES MAXIMUM ABOVE THE FINISH FLOOR OR GROUND. BOTTOM OF APRON TO BE 29 INCHES MINIMUM ABOVE THE FINISH FLOOR OR GROUND. WATER SUPPLY AND DRAIN PIPES UNDER LAVATORY SHALL BE INSULATED OR OTHERWISE CONFIGURED TO PROTECT AGAINST CONTACT. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER LAVATORY. THE CENTERLINE OF THE LAVATORY SHALL BE A MINIMUM OF 15" FROM THE SIDE WALL.
3. PROVIDE 20"x40" POLISHED EDGE MIRROR. TO BE 40" MAXIMUM TO REFLECTIVE SURFACE.
4. PROVIDE TOILET PAPER DISPENSER. TOILET PAPER DISPENSER TO BE 7 INCHES FROM RIM OF TOILET TO CENTERLINE OF TOILET PAPER ROLL-IN-PLAN (HORIZONTAL) TOILET PAPER TO BE 19" MINIMUM ABOVE FINISH FLOOR.
5. PROVIDE GRAB BARS. SIDE HORIZONTAL GRAB BAR TO BE 42" MIN LONG, 12" FROM BACK WALL, AND 33"-36" AFF. SIDE VERTICAL GRAB BAR TO BE 18" MIN LONG, 40" FROM BACK WALL, AND 40" AFF TO BOTTOM OF BAR. REAR HORIZONTAL GRAB BAR TO BE 36" MIN LONG, 8" MAX FROM BACK WALL, AND 25"-36" AFF. ALL GRAB BARS TO HAVE 1/2" MAX DIA. AND 1/2" OFFSET FROM WALL.
6. SOAP AND PAPER TOWEL DISPENSERS TO BE TENANT PROVIDED CONTRACTOR INSTALLED. TO BE INSTALLED AT 34" AFF TO SOAP SPOUT OR TOWEL DISPENSING LOCATION.
7. PROVIDE ON EXTERIOR LATCH SIDE OF DOOR MATTE FINISH TOILET ROOM SIGN.

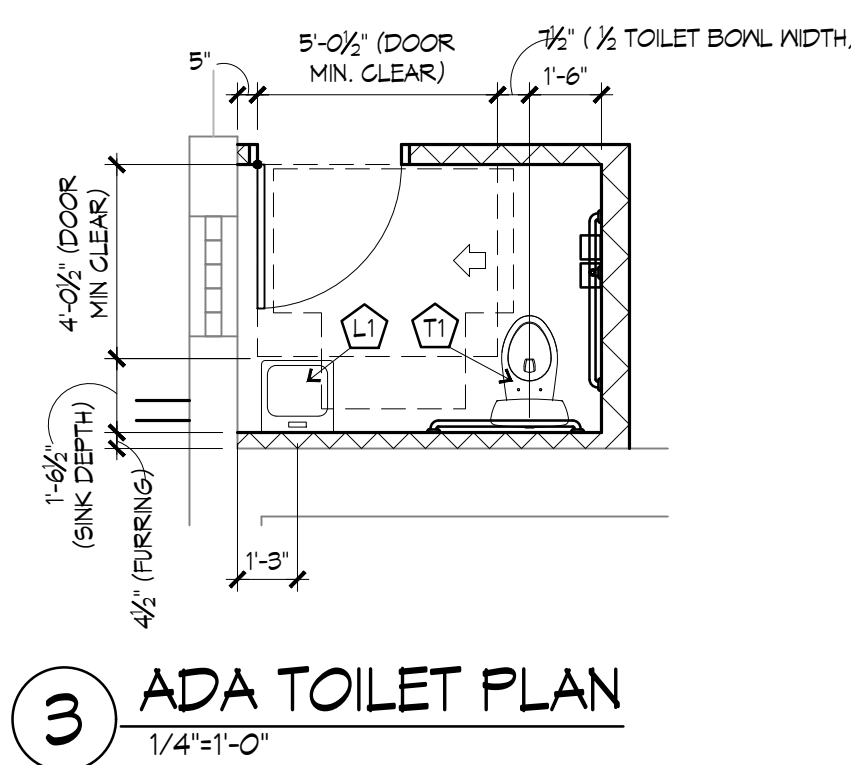

3 ADA TOILET PLAN
1/4"=1'-0"

FLOOR PLAN NOTES (CONTINUED)


- 16 AT TENANT OPTION PROVIDE FENCE TO ENCLOSE PATIO. IF FENCE IS PROVIDED THERE SHALL BE EITHER NO GATE OR A GATE THAT IS PROVIDED WITH HARDWARE AS FOLLOWS: HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES SHALL NOT REQUIRED TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE. THE UNLATCHING OF GATE SHALL NOT REQUIRE MORE THAN ONE OPERATION. GATE SHALL BE READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL REQUIREMENTS. CONFIRM HARDWARE SELECTIONS WITH FIRE OFFICIAL.

CODE NOTES

- A. TENANT FINISH
- B. ALL CONSTRUCTION FOR THIS PROJECT SHALL CONFORM TO THE FOLLOWING BUILDING CODES AS ADOPTED AS AMENDED BY LEES SUMMIT, MISSOURI:
- B.A. 2018 International Building Code
 - B.B. 2018 International Plumbing Code
 - B.C. 2018 International Mechanical Code
 - B.D. 2018 International Fuel Gas Code
 - B.E. 2018 International Residential Code
 - B.F. 2018 International Fire Code
 - B.G. 2017 National Electrical Code
 - B.H. ICC/ANSI A117.1-2009, Accessible and Usable Buildings and Facilities
- C. OCCUPANCY GROUP: BAR / TAVERN = A-2
- D. CONSTRUCTION TYPE: COMBUSTIBLE = VB (UNCHANGED)
- E. SQUARE FOOTAGE = 1,736 SF
- F. OCCUPANT LOAD = 79.58 (SEE PLAN) = 80 OCCUPANTS
- G. FIRE PROTECTION: NON-SPRINKLERED.
- G.A. SPACE IS LESSER THAN 100 OCCUPANTS.
 - G.B. FIRE AREA IS LESSER THAN 3000SF
- H. PLUMBING REQUIREMENTS (TABLE 2902.1):
- H.A. USE GROUP A-2
 - H.B. 75/94 (≥ 40 LOAD) / ≥ 40
 - H.C. WATER CLOSETS (MEN) = 40 / 40 ± 1
 - H.D. WATER CLOSETS (WOMEN) = 40 / 40 ± 1
 - H.E. LAVATORIES (MEN) = 40 / 75 → 0.53 → 1
 - H.F. LAVATORIES (WOMEN) = 40 / 75 → 0.53 → 1
 - H.G. SERVICE SINK = 1 REQUIRED / PROVIDED
 - H.H. NO DRINKING FOUNTAIN PROVIDE PER EXCEPTIONS OF SECTION 7-405 OF THE CODE OF ORDINANCE WHICH ALLOWS WATER TO BE TERVED IN A-2 OCCUPANCIES.

FLOOR PLAN NOTES

- (1) EXISTING ONE HOUR WALL TO BE CONVERTED TO 2 HOUR WALL TO CONFORM TO THE REQUIREMENTS OF UL DESIGN (U419 (METAL STUDS) OR UL DESIGN U301 (WOOD STUDS)
- (2) EXTEND TWO HOUR WALL INDICATED IN NOTE #1 ABOVE OVER FROM TOP OF EXISTING TO REMAIN MASONRY WALL TO UNDERSIDE OF ROOF DECK.
- (3) CONSTRUCT WALL 3/8" METAL STUDS (OR 2X4s) AT 16" O.C. FROM FLOOR TO UNDERSIDE OF STRUCTURE ABOVE. TOILET ROOM SIDE OF WALL TO HAVE 3/8" MOISTURE RESISTANT GYPSUM BOARD TO 8'-0". OUTSIDE OF WALL TO 3/8" GYPSUM BOARD FULL HEIGHT.
- (4) CONSTRUCT WALL 6" METAL STUDS (OR 2X6s) AT 16" O.C. FROM FLOOR TO UNDERSIDE OF STRUCTURE ABOVE. TOILET ROOM SIDE OF WALL TO HAVE 3/8" MOISTURE RESISTANT GYPSUM BOARD TO 8'-0". OUTSIDE OF WALL TO 3/8" GYPSUM BOARD FULL HEIGHT.
- (5) FURR OUT WALL WITH 3/8" MOISTURE RESISTANT GYPSUM BOARD ON ONE SIDE OF 3/8" METAL STUDS AT 16" O.C. EXTEND FROM FLOOR TO 8'-0" A.F.F.
- (6) INSTALL GYPSUM BOARD CEILING OF 3/8" GYPSUM BOARD ON 6" METAL STUD FRAMING AT 16" O.C. BOTTOM OF GYPSUM BOARD TO BE AT 8'-0" AFF. PRIME AND PAINT CEILING WHITE. PROVIDE LED CAN LIGHTS. PROVIDE COFF. GC-142 (OR EQUIV.) 15 CFM CEILING EXHAUST FAN WITH CEILING GRILL, INTEGRAL BLACK DRAFT DAMPER VARI-SPEED CONTROLLER. CONNECT TO SWITCH CONTROLLING LIGHTS IN ROOM. ROUTE 6 DIA DUCT TO EXISTING TO AD EXTERIOR WEATHERHEAD.
- (7) TOILET ROOM WALLS TO BE PAINTED WITH PRIMER AND TWO COATS OF EPOXY PAINT. PROVIDE 4" RUBBER BASE. PROVIDE FIXTURES AND ACCESSORIES AS INDICATED IN TYPICAL TOILET ROOM NOTES THIS SHEET.
- (8) AS PART OF WORK PROVIDE CORRECTIONS TO HARDWARE AS NECESSARY TO MAKE EXISTING HARDWARE COMPLY WITH THE FOLLOWING REQUIREMENTS: DOOR HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES SHALL NOT REQUIRED TIGHT GRASPING, TIGHT PINCHING OR TWISTING OF THE WRIST TO OPERATE. THE UNLATCHING OF DOOR SHALL NOT REQUIRE MORE THAN ONE OPERATION. DOOR SHALL BE READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL REQUIREMENTS EXCEPT THIS SIGN ENTRY DOOR MAY HAVE LOCKING DEVICE FROM THE EGRESS SIDE PROVIDED THAT A SIGN STATING THIS DOOR TO REMAIN UNLOCKED WHEN THIS SPACE IS OCCUPIED: IS POSTED ABOVE THE DOOR ON THE EGRESS SIDE. CONFIRM REQUIREMENTS WITH FIRE OFFICIAL.
- (9) PROVIDE NEW UL LABELED 90MIN RATED GALVANIZED EXTERIOR HOLLOW METAL FRAME AND DOOR. PAINT. PROVIDE THE FOLLOWING HARDWARE OR EQUIV:
 - 3 EA HINGE BBB1 4.5 X 4.5 652 IVE
 - 1 EA EXIT DEVICE 4800L U526D VON
 - 1 EA CLOSER 403IEDA 694 LCN
 - 1 SET GASKETS 24BDFK PEMKO
 - 1 EA THRESHOLD 200D7PK PEMKO
 - 1 EA DOOR SWEEP 624DK NSP
 - 1 EA FLOOR STOP FS19S IVEs
- (10) REMOVE AND DISCARD DOOR FRAME AND HARDWARE. INFILL OPENING WITH CONSTRUCTION TO MATCH EXISTING AND AS REQUIRED TO PROVIDE 2-HOUR RATING AS INDICATED IN PLAN NOTE #1 ABOVE. AT BUILDING OWNER OPTION, IF UL OF UL PROVIDE NEW UL LABELED 90MIN RATED HOLLOW METAL FRAME AND DOOR PROVIDED WITH THE FOLLOWING HARDWARE OR EQUIV.:
 - 3 EA HINGE BBB1 4.5 X 4.5 652 IVE
 - 1 EA STOREROOM ALX30P SAT 626 SCH
 - 1 EA CLOSER 403IEDA 694 LCN
 - 1 SET GASKETS 24BDFK PEMKO
- (11) PROVIDE KD METAL FRAME AND WOOD DOOR TO MATCH EXISTING. DO NOT PROVIDE CLOSURE ON DOOR. PROVIDE THE FOLLOWING HARDWARE OR EQUIV.:
 - 3 EA HINGE BBB1 4.5 X 4.5 652 IVE
 - 1 EA PRIVACY ALX30P SAT 626 SCH
 - 1 SET GASKETS 24BDFK PEMKO
- (12) REMOVE AND SALVAGE COILING OVERHEAD DOOR AT OPENING.
- (13) PROVIDE COMBINATION EXIT SIGN AND EMERGENCY LIGHT.
- (14) PROVIDE COMBINATION EXIT SIGN AND INTERIOR EMERGENCY LIGHT WITH ADDITIONAL EXTERIOR EMERGENCY LIGHT REMOTE HEAD.
- (15) EXISTING TO REMAIN EMERGENCY LIGHT.

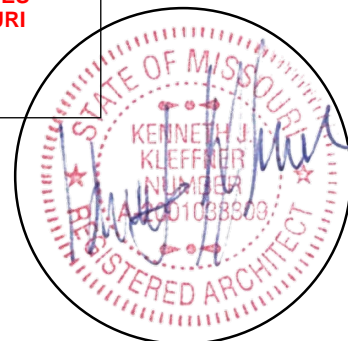

05-24-202

**GUY GRONBERG
ARCHITECTS, P.C.**



224 Southeast
Douglas St.
Lee's Summit
Missouri 64063



This drawing has been provided as an instrument of service by the architect, or under its supervision and is intended for use solely for the project specifically identified herein. It shall not be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or otherwise, without prior written consent of the architect.

© COPYRIGHT 2020 GUY
GRONBERG ARCHITECTS P.C.

[illegible]

A1