S1 — Face-Lit - Remote Wired Letterset - Black Faces

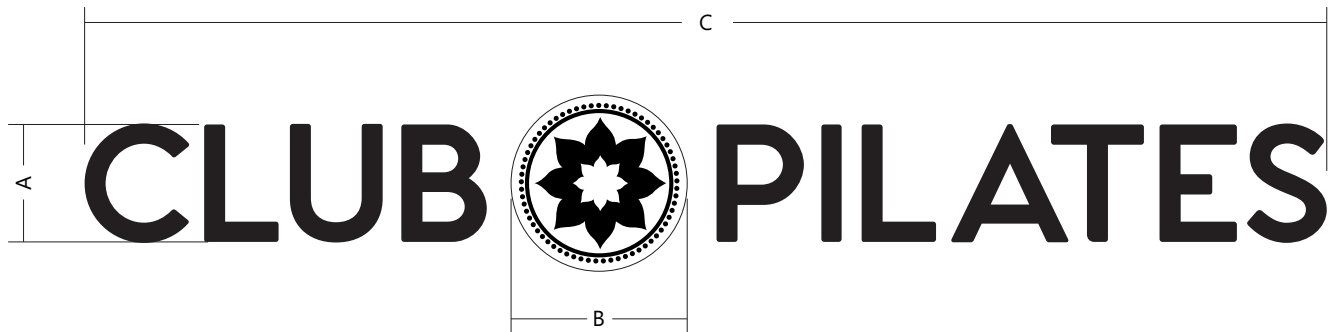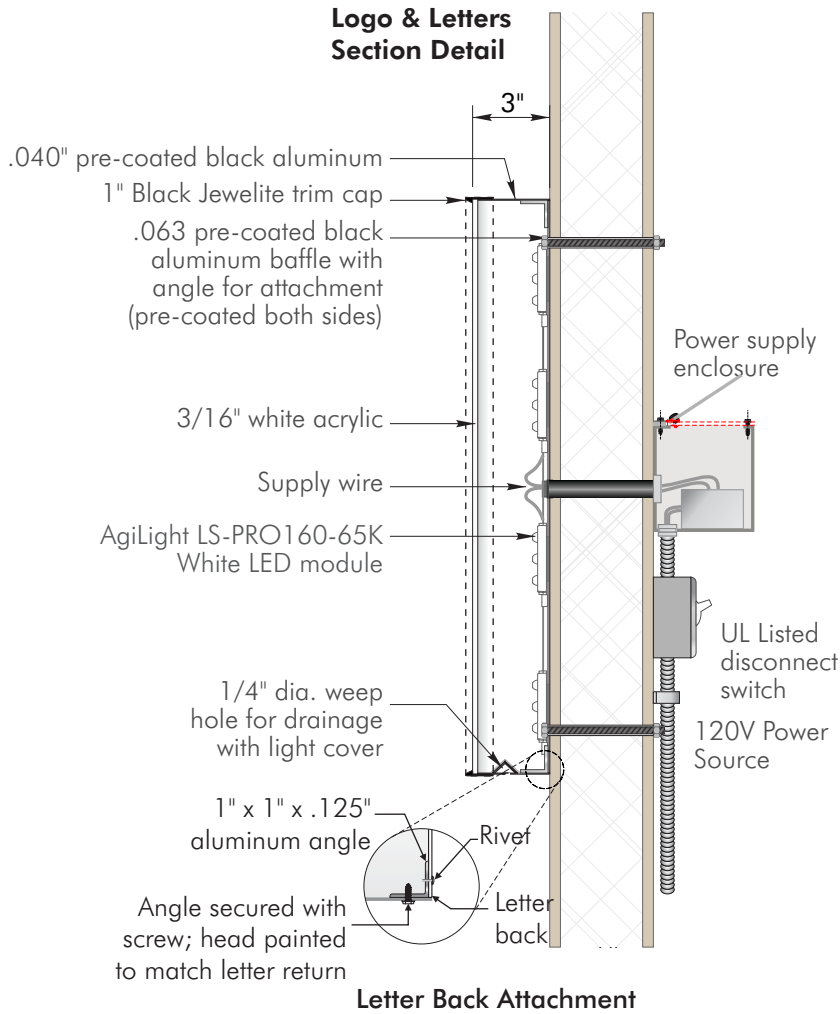### Installation Guidelines
• Install new remote wired letterset as shown

Logo Only:
3M #7725-12
Black Opaque Vinyl
(1st surface)

Letters Only:
3M #3635-222 Dual
Color Black (1st surface)

Color Specifications

Letter Face:	3/16" #2447 white acrylic 3M #3635-222 Dual color Black (1st surface)
Logo Face:	3/16" #7328 white acrylic 3M #7725-12 Black Opaque Vinyl (1st surface)
Returns:	.040" pre-coated black aluminum coil
Trim Cap:	1" Jewelite Black
Backs:	.063" pre-coated black aluminum
Illumination:	AgiLight LS-PRO160-65K White LED module All internal surfaces to be high reflective white.

Logo & Letters Section Detail

3"

.040" pre-coated black aluminum
1" Black Jewelite trim cap
.063 pre-coated black aluminum baffle with angle for attachment (pre-coated both sides)

3/16" white acrylic

Supply wire

AgiLight LS-PRO160-65K White LED module

Power supply enclosure

UL Listed disconnect switch

120V Power Source

1/4" dia. weep hole for drainage with light cover

1" x 1" x .125" aluminum angle

Rivet

Letter back

Angle secured with screw; head painted to match letter return

Letter Back Attachment

AFTER

Night View

BEFORE

4'-3"   21'-0"

CLUB ⊛ PILATES

	A	B	C	Sq. Ft. (B x C)
CP-F-B-18	1'-6"	2'-3"	15'-10 3/8"	35.7