



11011 Cody St Suite 150
Overland Park, KS 66210

Phone: 913.780.4605

A CRH COMPANY

Customer Signature X _____

CONDITION OF SALE: All accounts payable C.O.D. There will be a \$25.00 service charge on returned checks.

CUSTOMER # 251350	CUSTOMER Heartland Contractors Inc			PROJECT # 022521	PROJECT 2021 PRICING		
PLANT 372	DATE 7/13/21 7:37	TIME 7:33	ORDER 311	TRUCK 284	DRIVER 653	REQUESTED TIME 7/13/21 7:58	PREVIOUS TRUCK
DELIVERY ADDRESS 1317 SW MARKET- LEES SUMMIT MO				DIRECTIONS 291 AND BAILEY W TO MARKET ST			
SLUMP 3.00		USAGE DESCRIPTION					
PO NUMBER		JOB NUMBER					

LOAD QUANTITY	CUMULATIVE QUANTITY	ORDERED QUANTITY	PROD ID	PRODUCT DESCRIPTION	UNIT	\$/UNIT	EXTENDED
9.00	9.00	9.00	340D4E04	KCMMB GR 4K F 4	yd		
9.00		0.00	998201	ENVIRONMENTAL FEE - NON TAX	/l		
9.00		0.00	NONTAXDE	NON TAXABLE DELIVERY CHARGE	/y		

TICKET NUMBER
37216415

WATER ADDED:

_____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____

Sub-Total
Sales Tax
Total \$

Balance Due

LEAVE PLANT	ARRIVE JOB	START POUR	FINISH POUR	LEAVE JOB	ARRIVE PLANT	QUALITY / TESTING	Balance Due
						SLUMP AIR CYLINDERS TAKEN	

DRIVER COMMENTS:

WARNING: INJURIES TO EYES, CAUSES SKIN IRRITATION READ THIS WARNING BEFORE USING. Contains Portland Cement.

Contact with wet (unhardened) concrete, mortar, cement, or cement mixture can cause skin irritation, severe chemical burns, or serious eye damage. Avoid contact with eyes and skin. Wear waterproof gloves, a fully buttoned long-sleeved shirt, full length trousers, and tight fitting eye protection when working with these materials. If you have to stand in wet concrete, use waterproof boots that are tight at tops and high enough to keep concrete from flowing into them. If you are finishing concrete, wear knee pads to protect knees. Wash wet concrete, mortar, cement or cement mixtures from your skin with fresh, clean water immediately after contact. Indirect contact through clothing can be as serious as direct contact, so promptly rinse out wet concrete, mortar, cement or cement mixtures from clothing. Seek immediate medical attention if you have persistent or severe discomfort. In case of eye contact, flush with plenty of water for at least 15 minutes. Consult a physician immediately.

KEEP OUT OF REACH OF CHILDREN

USER AGREES TO CONVEY THIS WARNING TO ALL PERSONS WHO MAY PURCHASE. USE OR COME IN CONTACT WITH WET (UNHARDENED) CONCRETE, MORTAR, CEMENT OR CEMENT MIXTURES. Concrete contains crystalline silica in concentrations greater than 0.1%. Respirable silica is considered by IARC and NTP to be a human carcinogen. Crystalline silica in wet concrete is not respirable and does not pose a hazard when the concrete is in its unhardened state. However, respirable dust can be generated by grinding, sawing, drilling, breaking, etc. hardened concrete. Wear and appropriate NIOSH approved respirator during these activities.

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
AG-I/II	510 lb	4590 lb	4590 lb	0.00%			
DURAPOZF	90.0 lb	810.0 lb	810.0 lb	0.00%			
3/4GRANITE	1699 lb	15444 lb	15380 lb	-0.41%	1.00% M	18 gl	
SAND-9	1267 lb	11802 lb	11780 lb	-0.19%	3.50% M	48 gl	
H2OGL	30.50 gl	188.35 gl	188.00 gl	-0.19%		188.00 gl	-2.00 gl
AEA-92S	1.30 /C	70.20 oz	70.00 oz	-0.28%			
P-6420	1.5 /C	81.0 oz	80.0 oz	-1.23%			

Actual Load 34138 lb Num Batches: 1 Design W/C: 0.424 Water/Cement: 0.393 A Design 274.5 gl Actual 254.0 gl To Add: 20.5 gl
 Slump: 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYL



11011 Cody St Suite 150
Overland Park, KS 66210

Phone: 913.780.4605

A CRH COMPANY

Customer Signature X _____

CONDITION OF SALE: All accounts payable C.O.D. There will be a \$25.00 service charge on returned checks.

CUSTOMER # 251350		CUSTOMER Heartland Contractors Inc			PROJECT # 022521		PROJECT 2021 PRICING	
PLANT 372	DATE 7/13/21 7:37	TIME 7:33	ORDER 311	TRUCK 284	DRIVER 653	REQUESTED TIME 7/13/21 7:58	PREVIOUS TRUCK	
DELIVERY ADDRESS 1317 SW MARKET- LEES SUMMIT MO				DIRECTIONS 291 AND BAILEY W TO MARKET ST				
SLUMP 3.00		USAGE DESCRIPTION						
PO NUMBER		JOB NUMBER						

LOAD QUANTITY	CUMULATIVE QUANTITY	ORDERED QUANTITY	PROD ID	PRODUCT DESCRIPTION	UNIT	\$/UNIT	EXTENDED
9.00	9.00	9.00	340D4E04	KCMMB GR 4K F 4	yd		
9.00		0.00	998201	ENVIRONMENTAL FEE - NON TAX	/l		
9.00		0.00	NONTAXDE	NON TAXABLE DELIVERY CHARGE	/y		

TICKET NUMBER

 37216415

WATER ADDED:

_____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____

Sub-Total
Sales Tax
Total \$
Balance Due

LEAVE PLANT	ARRIVE JOB	START POUR	FINISH POUR	LEAVE JOB	ARRIVE PLANT	QUALITY / TESTING	Balance Due
						SLUMP AIR CYLINDERS TAKEN	

DRIVER COMMENTS:

WARNING: INJURIES TO EYES, CAUSES SKIN IRRITATION READ THIS WARNING BEFORE USING. Contains Portland Cement.

Contact with wet (unhardened) concrete, mortar, cement, or cement mixture can cause skin irritation, severe chemical burns, or serious eye damage. Avoid contact with eyes and skin. Wear waterproof gloves, a fully buttoned long-sleeved shirt, full length trousers, and tight fitting eye protection when working with these materials. If you have to stand in wet concrete, use waterproof boots that are tight at tops and high enough to keep concrete from flowing into them. If you are finishing concrete, wear knee pads to protect knees. Wash wet concrete, mortar, cement or cement mixtures from your skin with fresh, clean water immediately after contact. Indirect contact through clothing can be as serious as direct contact, so promptly rinse out wet concrete, mortar, cement or cement mixtures from clothing. Seek immediate medical attention if you have persistent or severe discomfort. In case of eye contact, flush with plenty of water for at least 15 minutes. Consult a physician immediately.

KEEP OUT OF REACH OF CHILDREN

USER AGREES TO CONVEY THIS WARNING TO ALL PERSONS WHO MAY PURCHASE, USE OR COME IN CONTACT WITH WET (UNHARDENED) CONCRETE, MORTAR, CEMENT OR CEMENT MIXTURES. Concrete contains crystalline silica in concentrations greater than 0.1%. Respirable silica is considered by IARC and NTP to be a human carcinogen. Crystalline silica in wet concrete is not respirable and does not pose a hazard when the concrete is in its unhardened state. However, respirable dust can be generated by grinding, sawing, drilling, breaking, etc. hardened concrete. Wear and appropriate NIOSH approved respirator during these activities.

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
AG-I/II	510 lb	4590 lb	4590 lb	0.00%			
DURAPOZF	90.0 lb	810.0 lb	810.0 lb	0.00%			
3/4GRANITE	1699 lb	15444 lb	15380 lb	-0.41%	1.00% M	18 gl	
SAND-9	1267 lb	11802 lb	11780 lb	-0.19%	3.50% M	48 gl	
H2OGL	30.50 gl	188.35 gl	188.00 gl	-0.19%		188.00 gl	-2.00 gl
AEA-92S	1.30 /C	70.20 oz	70.00 oz	-0.28%			
P-6420	1.5 /C	81.0 oz	80.0 oz	-1.23%			

Actual Load 34138 lb Design W/C: 0.424 Water/Cement: 0.393 A Design 274.5 gl Actual 254.0 gl To Add: 20.5 gl
 Slump: 3.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -2.0 gl / CYC



11011 Cody St Suite 150
Overland Park, KS 66210

Phone: 913.780.4605

A CRH COMPANY

Customer Signature X _____

CONDITION OF SALE: All accounts payable C.O.D. There will be a \$25.00 service charge on returned checks.

CUSTOMER # 251350		CUSTOMER Heartland Contractors Inc			PROJECT # 022521		PROJECT 2021 PRICING	
PLANT 372	DATE 7/13/21 8:07	TIME 8:01	ORDER 311	TRUCK 301	DRIVER 835	REQUESTED TIME 7/13/21 8:28	PREVIOUS TRUCK 284	
DELIVERY ADDRESS 1317 SW MARKET- LEES SUMMIT MO				DIRECTIONS 291 AND BAILEY W TO MARKET ST				
SLUMP 5.00		USAGE DESCRIPTION PAVING						
PO NUMBER		JOB NUMBER						

LOAD QUANTITY	CUMULATIVE QUANTITY	ORDERED QUANTITY	PROD ID	PRODUCT DESCRIPTION	UNIT	\$/UNIT	EXTENDED
10.00	10.00	10.00	340D4E04	KCMMB GR 4K F 4	yd		
10.00		0.00	998201	ENVIRONMENTAL FEE - NON TAX	/l		
10.00		0.00	NONTAXDE	NON TAXABLE DELIVERY CHARGE	/y		

TICKET NUMBER

37216416

WATER ADDED:

_____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____
 _____ GALLONS TO _____ YARDS X _____

Sub-Total
Sales Tax
Total \$
Balance Due

LEAVE PLANT	ARRIVE JOB	START POUR	FINISH POUR	LEAVE JOB	ARRIVE PLANT	QUALITY / TESTING	
						SLUMP	AIR
							CYLINDERS TAKEN

DRIVER COMMENTS:

WARNING: INJURIES TO EYES, CAUSES SKIN IRRITATION READ THIS WARNING BEFORE USING. Contains Portland Cement.


Contact with wet (unhardened) concrete, mortar, cement, or cement mixture can cause skin irritation, severe chemical burns, or serious eye damage. Avoid contact with eyes and skin. Wear waterproof gloves, a fully buttoned long-sleeved shirt, full length trousers, and tight fitting eye protection when working with these materials. If you have to stand in wet concrete, use waterproof boots that are tight at tops and high enough to keep concrete from flowing into them. If you are finishing concrete, wear knee pads to protect knees. Wash wet concrete, mortar, cement or cement mixtures from your skin with fresh, clean water immediately after contact. Indirect contact through clothing can be as serious as direct contact, so promptly rinse out wet concrete, mortar, cement or cement mixtures from clothing. Seek immediate medical attention if you have persistent or severe discomfort. In case of eye contact, flush with plenty of water for at least 15 minutes. Consult a physician immediately.

KEEP OUT OF REACH OF CHILDREN

USER AGREES TO CONVEY THIS WARNING TO ALL PERSONS WHO MAY PURCHASE, USE OR COME IN CONTACT WITH WET (UNHARDENED) CONCRETE, MORTAR, CEMENT OR CEMENT MIXTURES. Concrete contains crystalline silica in concentrations greater than 0.1%. Respirable silica is considered by IARC and NTP to be a human carcinogen. Crystalline silica in wet concrete is not respirable and does not pose a hazard when the concrete is in its unhardened state. However, respirable dust can be generated by grinding, sawing, drilling, breaking, etc. hardened concrete. Wear and appropriate NIOSH approved respirator during these activities.

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
AG-I/II	510 lb	5100 lb	5100 lb	0.00%			
DURAPOZF	90.0 lb	900.0 lb	900.0 lb	0.00%			
3/4GRANITE	1699 lb	17160 lb	17100 lb	-0.35%	1.00% M	20 gl	
SAND-9	1267 lb	13113 lb	13120 lb	0.05%	3.50% M	53 gl	
H2OGL	30.50 gl	226.00 gl	226.00 gl	0.00%		226.00 gl	-50 gl
AEA-92S	.90 /C	54.00 oz	54.00 oz	0.00%			
P-6420	5.5 /C	330.0 oz	330.0 oz	0.00%			

Actual Load: 38130 lb Num Batches: 1 Design W/C: 0.424 Water/Cement: 0.417 A Design: 305.0 gl Actual: 299.5 gl To Add: 5.5 gl
 Slump: 5.00 in # Water in Truck: 0.0 gl Adjust Water: 0.0 gl / Load Trim Water: -0.5 gl / CYL

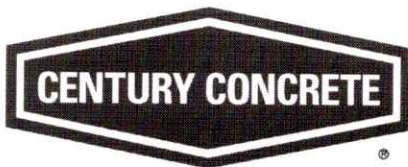

11011 Cody St Suite 150
Overland Park, KS 66210

Phone: 913.780.4605

A CRH COMPANY

Customer Signature X _____

CONDITION OF SALE: All accounts payable C.O.D. There will be a \$25.00 service charge on returned checks.

CUSTOMER # 251350		CUSTOMER Heartland Contractors Inc			PROJECT # 022521		PROJECT 2021 PRICING	
PLANT 372	DATE 7/13/21 8:07	TIME 8:01	ORDER 311	TRUCK 301	DRIVER 835	REQUESTED TIME 7/13/21 8:28	PREVIOUS TRUCK 284	
DELIVERY ADDRESS 1317 SW MARKET- LEES SUMMIT MO				DIRECTIONS 291 AND BAILEY W TO MARKET ST				
SLUMP 5.00		USAGE DESCRIPTION PAVING						
PO NUMBER		JOB NUMBER						

LOAD QUANTITY	CUMULATIVE QUANTITY	ORDERED QUANTITY	PROD ID	PRODUCT DESCRIPTION	UNIT	\$/UNIT	EXTENDED
10.00	10.00	10.00	340D4E04	KCMMB GR 4K F 4	yd		
10.00		0.00	998201	ENVIRONMENTAL FEE - NON TAX	/l		
10.00		0.00	NONTAXDE	NON TAXABLE DELIVERY CHARGE	/y		

TICKET NUMBER 37216416

WATER ADDED:

_____ GALLONS TO _____ YARDS X _____
_____ GALLONS TO _____ YARDS X _____
_____ GALLONS TO _____ YARDS X _____

Sub-Total
Sales Tax
Total \$

Balance Due

LEAVE PLANT	ARRIVE JOB	START POUR	FINISH POUR	LEAVE JOB	ARRIVE PLANT	QUALITY / TESTING	
						SLUMP	AIR
							CYLINDERS TAKEN

DRIVER COMMENTS:

WARNING: INJURIES TO EYES, CAUSES SKIN IRRITATION READ THIS WARNING BEFORE USING. Contains Portland Cement.

Contact with wet (unhardened) concrete, mortar, cement, or cement mixture can cause skin irritation, severe chemical burns, or serious eye damage. Avoid contact with eyes and skin. Wear waterproof gloves, a fully buttoned long-sleeved shirt, full length trousers, and tight fitting eye protection when working with these materials. If you have to stand in wet concrete, use waterproof boots that are tight at tops and high enough to keep concrete from flowing into them. If you are finishing concrete, wear knee pads to protect knees. Wash wet concrete, mortar, cement or cement mixtures from your skin with fresh, clean water immediately after contact. Indirect contact through clothing can be as serious as direct contact, so promptly rinse out wet concrete, mortar, cement or cement mixtures from clothing. Seek immediate medical attention if you have persistent or severe discomfort. In case of eye contact, flush with plenty of water for at least 15 minutes. Consult a physician immediately.

KEEP OUT OF REACH OF CHILDREN

USER AGREES TO CONVEY THIS WARNING TO ALL PERSONS WHO MAY PURCHASE, USE OR COME IN CONTACT WITH WET (UNHARDENED) CONCRETE, MORTAR, CEMENT OR CEMENT MIXTURES. Concrete contains crystalline silica in concentrations greater than 0.1%. Respirable silica is considered by IARC and NTP to be a human carcinogen. Crystalline silica in wet concrete is not respirable and does not pose a hazard when the concrete is in its unhardened state. However, respirable dust can be generated by grinding, sawing, drilling, breaking, etc. hardened concrete. Wear and appropriate NIOSH approved respirator during these activities.

Material	Design Qty	Required	Batched	% Var	% Moisture	Actual Wat	Trim
AG-I/II	510 lb	5100 lb	5100 lb	0.00%			
DURAPOZF	90.0 lb	900.0 lb	900.0 lb	0.00%			
3/4GRANITE	1699 lb	17160 lb	17100 lb	-0.35%	1.00% M	20 gl	
SAND-9	1267 lb	13113 lb	13120 lb	0.05%	3.50% M	53 gl	
H2OGL	30.50 gl	226.00 gl	226.00 gl	0.00%		226.00 gl	-50 gl
AEA-92S	.90 /C	54.00 oz	54.00 oz	0.00%			
P-6420	5.5 /C	330.0 oz	330.0 oz	0.00%			

Actual Load 38130 lb Slump: 5.00 in #
Num Batches: 1
Design W/C: 0.424
Water/Cement: 0.417 A
Water in Truck: 0.0 gl
Adjust Water: 0.0 gl / Load
Design 305.0 gl
Actual 299.5 gl
To Add: 5.5 gl
CYC