

EVERSTEAD  
SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


STATUS:  

APPROVED

08/30/2021

REVIEWED BY:  
BH


ENGINEER, EVERSTEAD

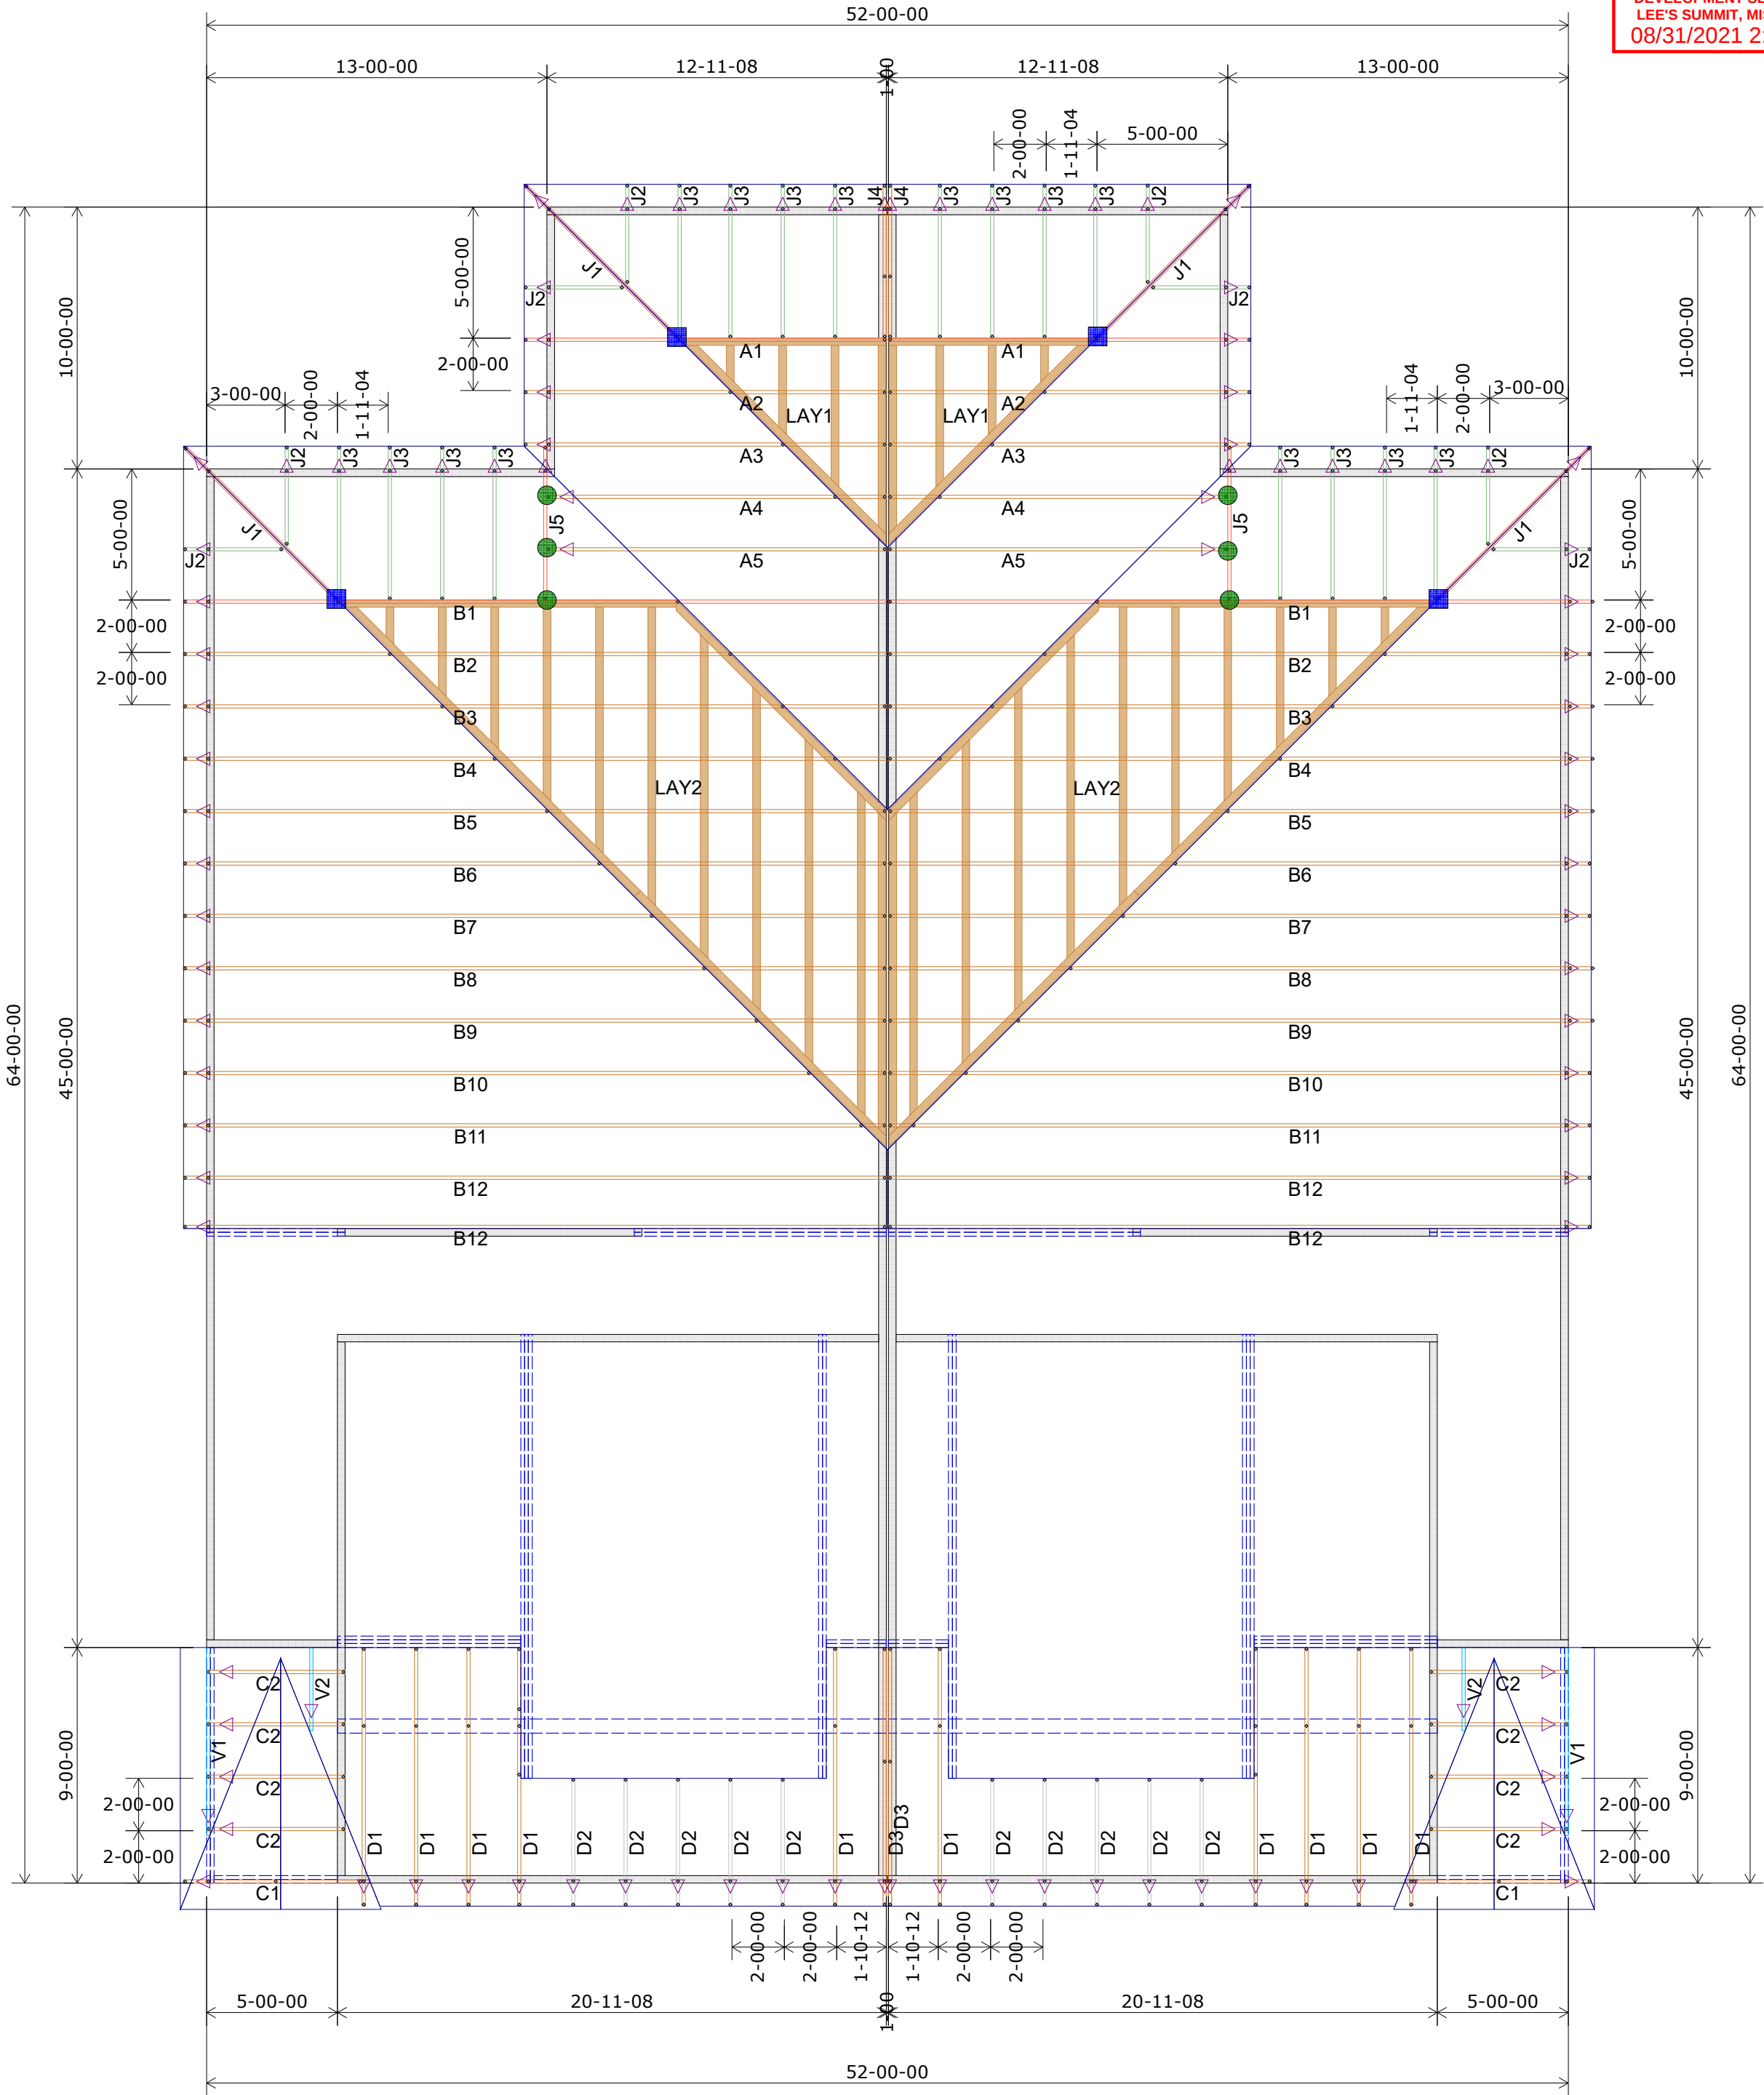

1st Floor Truss Layout  
Scale: 3/16" = 1'

| HANGER SCHEDULE | Quantity |
|-----------------|----------|
| LUS24           | 0        |
| LUS26           | 10       |
| HUS26           | 6        |
| HHUS26-2        | 0        |
| HGUS26-2        | 0        |
| HGUS28-3        | 0        |
| LTHJA26         | 0        |
| TJC37           | 4        |
| TJC57           | 0        |
| HTS20           | 0        |

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

|             |           |
|-------------|-----------|
| # of Uplift | Connector |
| 0 - 495:    | (1) H2.5A |
| 495 - 990:  | (2) H2.5A |
| 990 - 1245: | (1) HTS20 |

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Customer

Job Name

Job Site Address

City, State

Designer

8/18/2021

Clover & Hive

Lot 21 Osage

3822/3824 SW Walsh

Lee's Summit MO

Chance Lickteig (785) 746-4240

Job # B210211

Shop Drawing Approval

THIS IS A TRUSS LAYOUT FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Wheeler Lumber  
1959 Old Hwy 50 NE  
Waverly, KS 66871

THIS IS A TRUSS LAYOUT FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.


Wheeler Lumber  
1959 Old Hwy 50 NE  
Waverly, KS 66871

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.

APPROVED

REVIEWED BY:

ENGINEER, EVERSTEAD

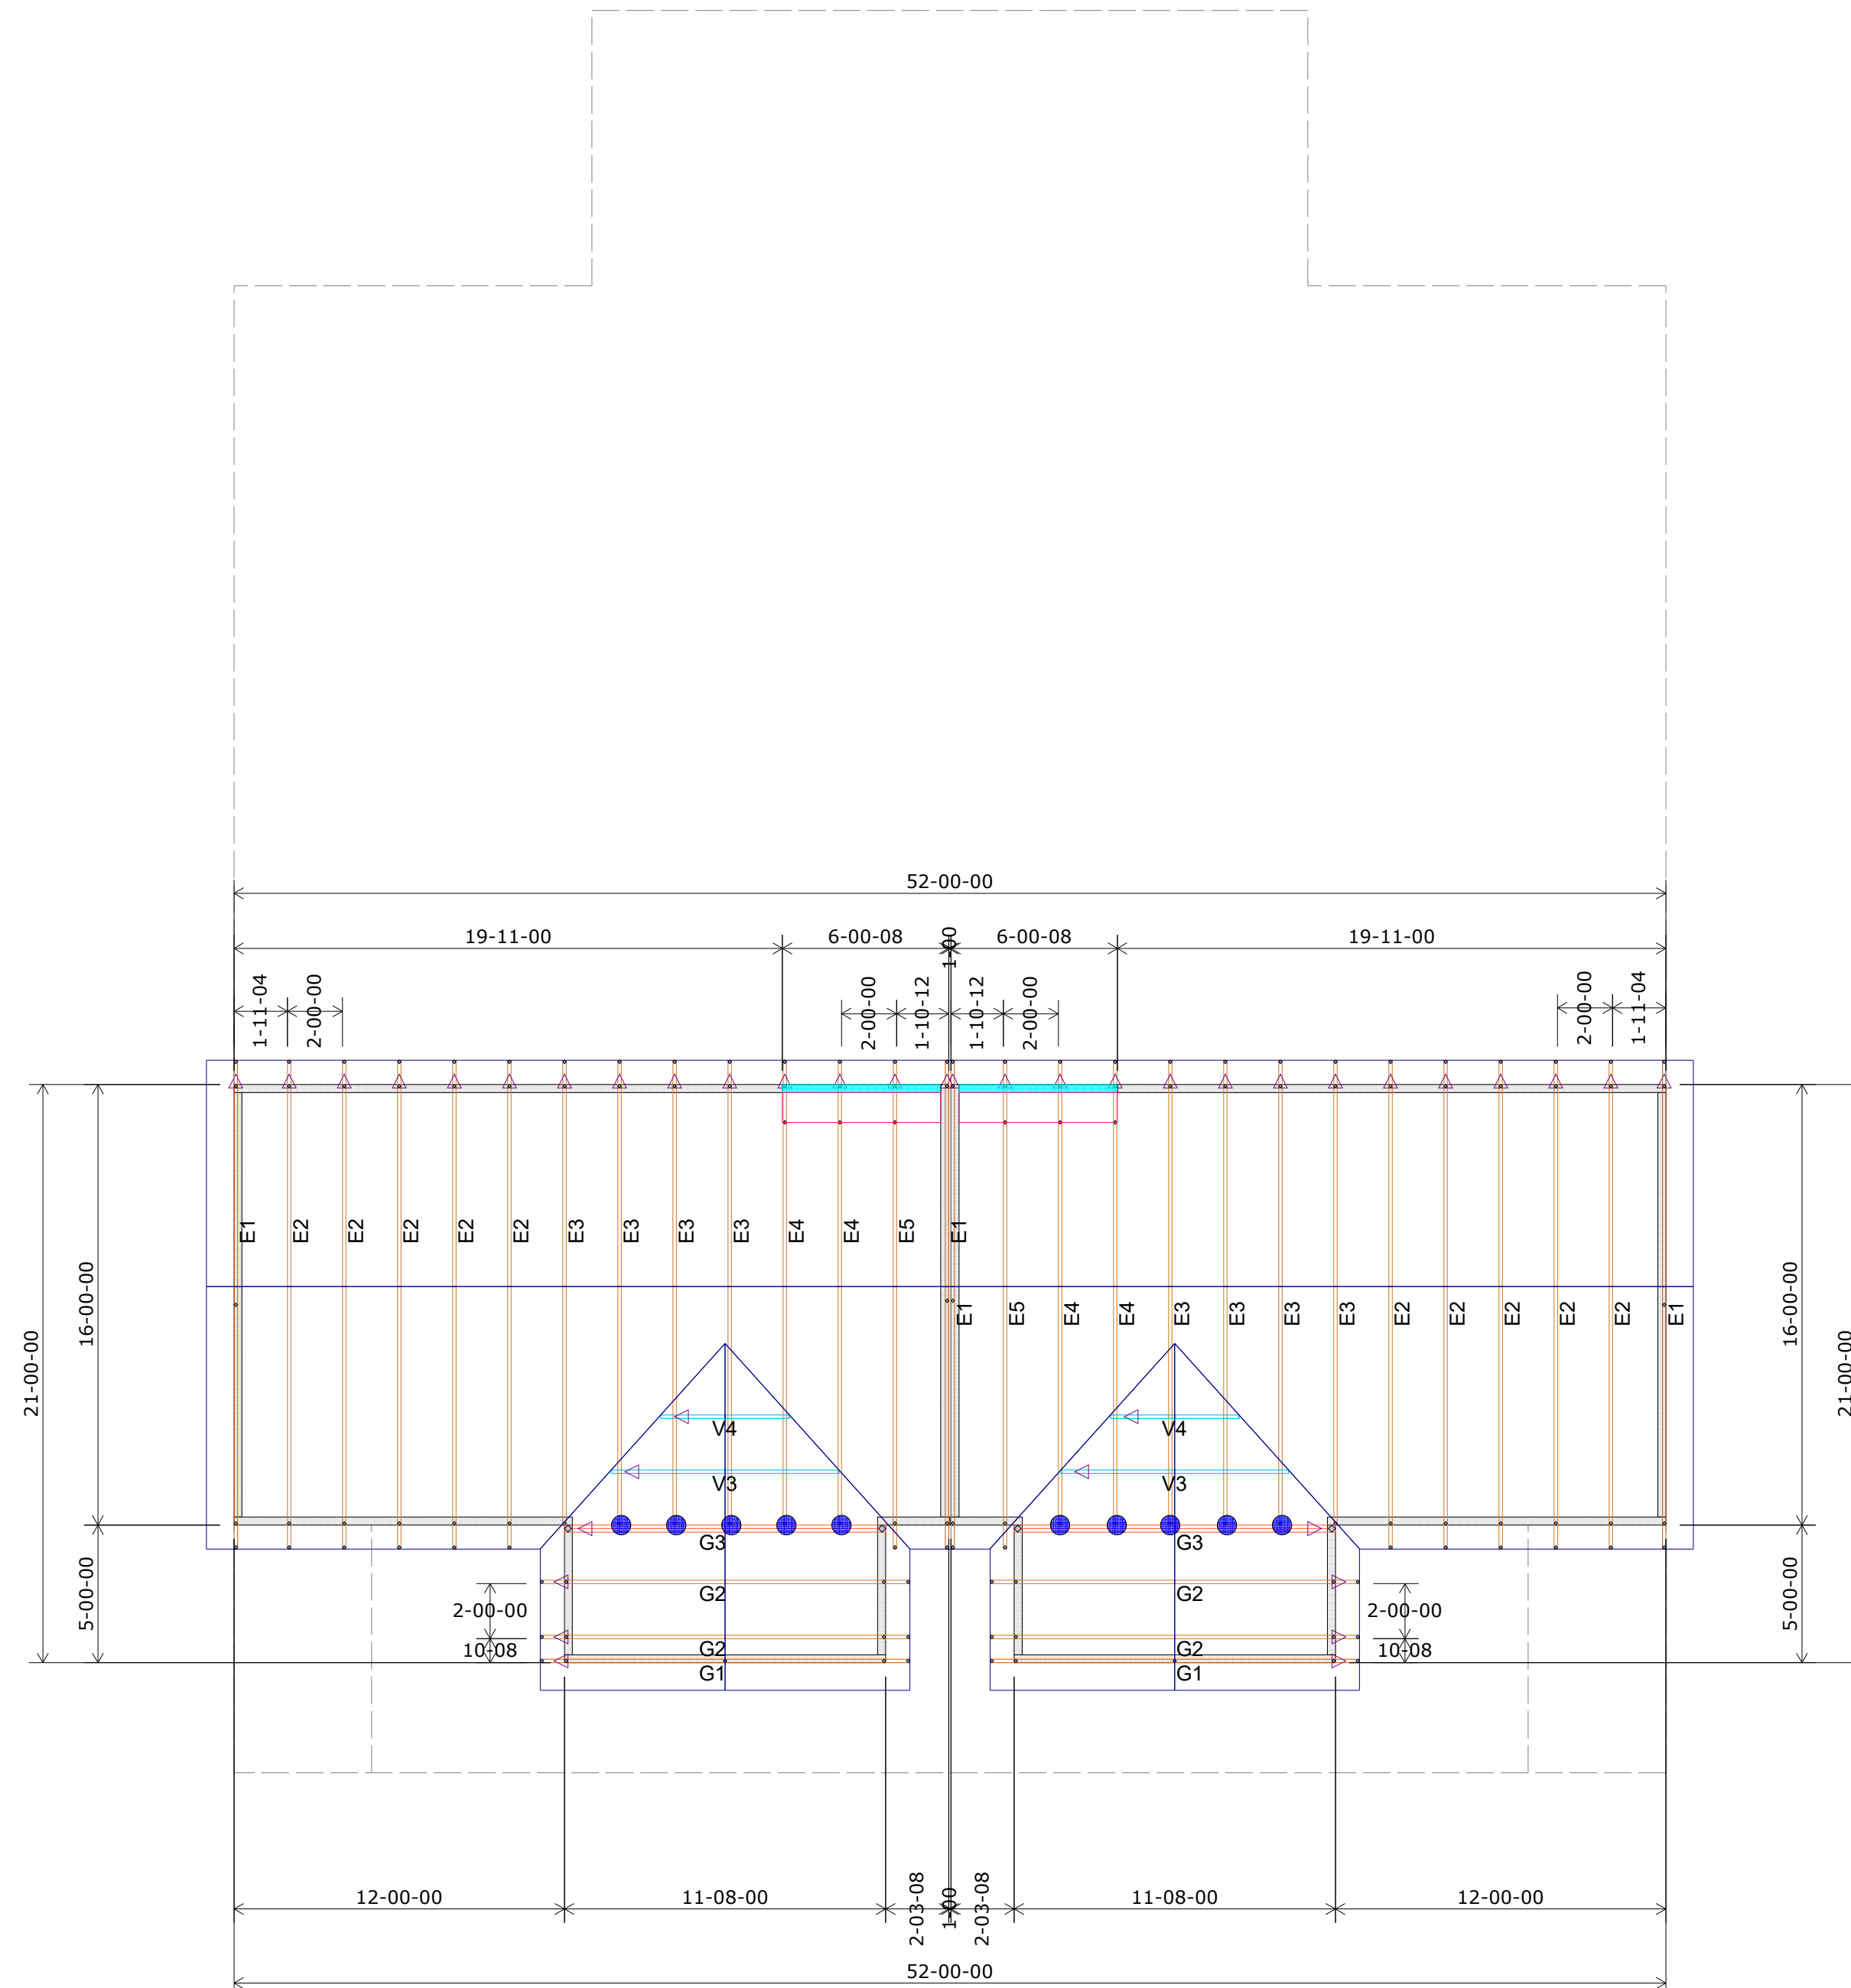

## 2nd Floor Truss Layout

Scale: 3/16" = 1'

|   | HANGER<br>SCHEDULE | Quantity |
|---|--------------------|----------|
| ● | LUS24              | 0        |
| ● | LUS26              | 10       |
| ● | HUS26              | 6        |
| ▲ | HHUS26-2           | 0        |
| ▲ | HGUS26-2           | 0        |
| ▲ | HGUS28-3           | 0        |
| ■ | LTHJA26            | 0        |
| ■ | TJC37              | 4        |
| ■ | TJC57              | 0        |
| ▲ | HTS20              | 0        |

A diagram showing a triangle with a vertical line passing through its center. The line is labeled with 'G' at the top and 'O' at the bottom, indicating the center of mass (G) and the point of suspension (O).

| # of Uplift | Connector |
|-------------|-----------|
| 0 - 495:    | (1) H2.5A |
| 495 - 990:  | (2) H2.5A |
| 990 - 1245: | (1) HTS20 |

Installation per Simpson  
Strong-Tie guidelines.

For Reactions greater than  
1245#, refer to EOR.

**THIS IS A TRUSS PLACEMENT DIAGRAM ONLY.** These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the Placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses," available from the Truss Plate Institute, 583 Doniford Drive, Madison, WI 53179.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

*Wheeler Lumber  
1959 Old Hwy 50 NE  
Waverly, KS 66871*

