


EVERSTEAD  
SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


STATUS:  
  
APPROVED  
  
11/29/2021  
  
REVIEWED BY:  
CPD  
  
ENGINEER, EVERSTEAD

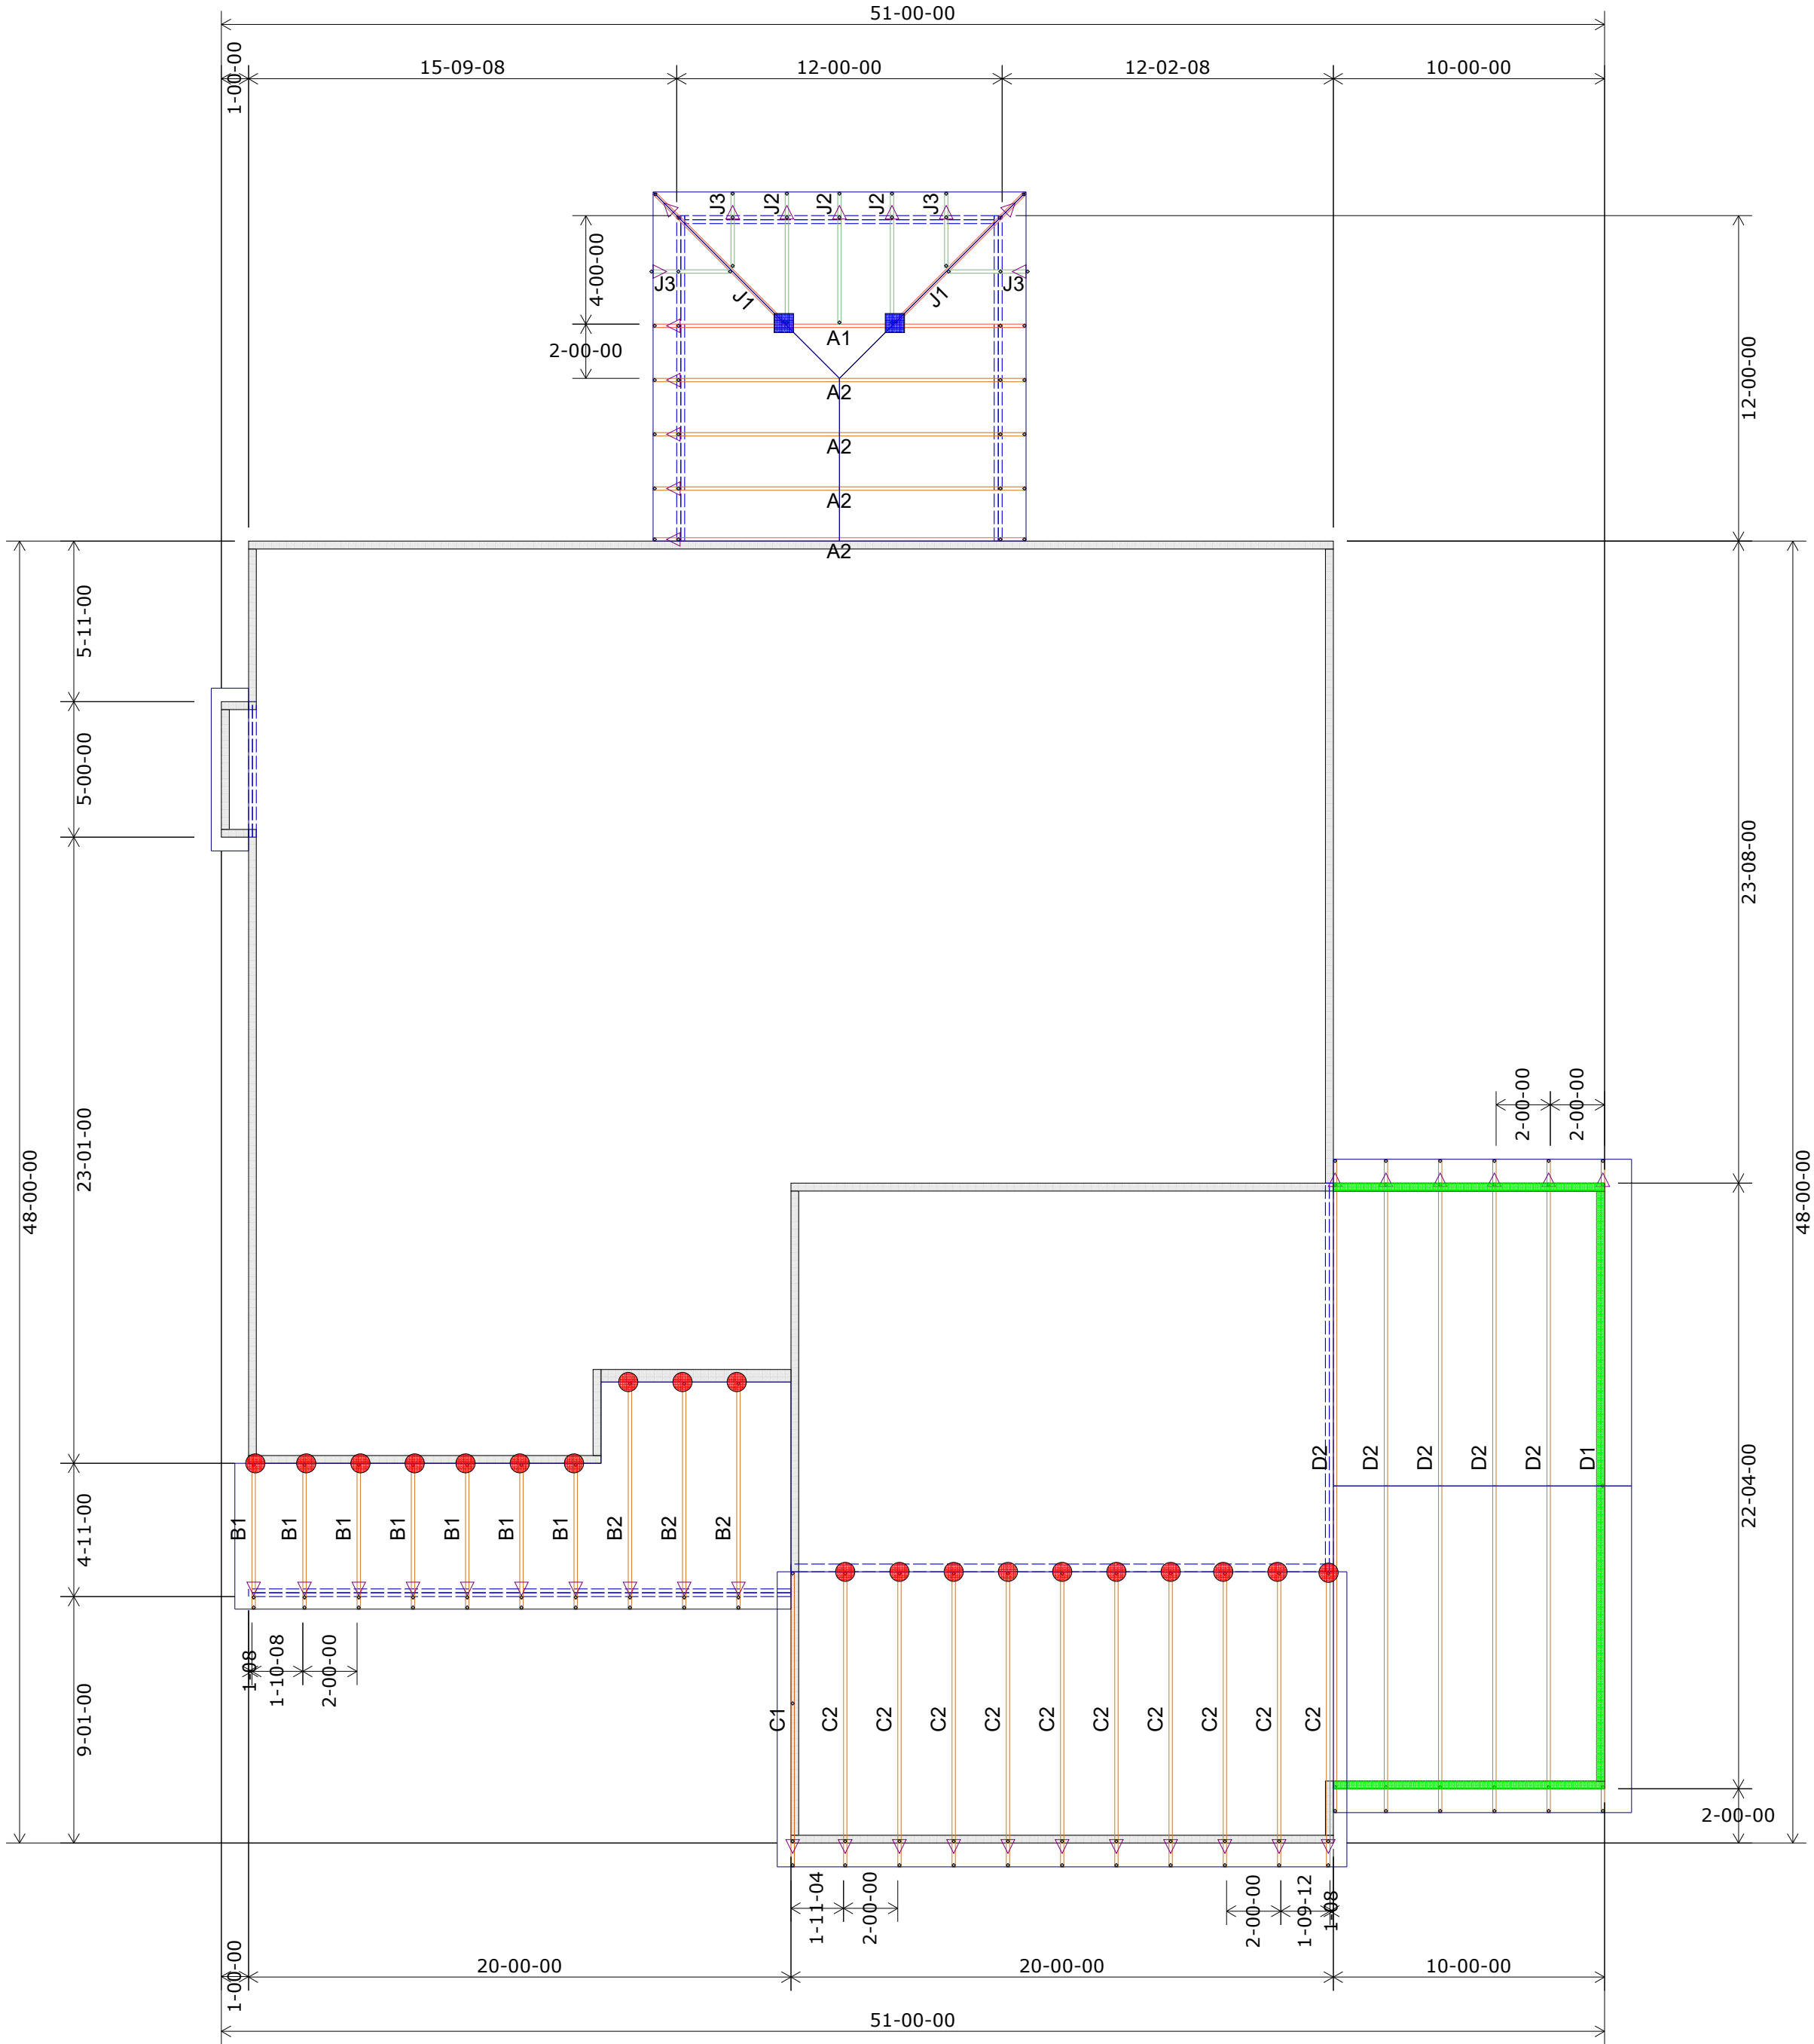

|                             |
|-----------------------------|
| Wall Heights 9-01-02 U.N.O. |
| 8-01-02                     |

| HANGER SCHEDULE | Quantity |
|-----------------|----------|
| LUS24           | 20       |
| LUS26           | 4        |
| HUS26           | 9        |
| HHUS26-2        | 0        |
| HGUS26-2        | 1        |
| HGUS28-3        | 0        |
| LTHJA26         | 0        |
| TJC37           | 2        |
| TJC57           | 0        |
| HTS20           | 0        |

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

|             |           |
|-------------|-----------|
| # of Uplift | Connector |
| 0 - 495:    | (1) H2.5A |
| 495 - 990:  | (2) H2.5A |
| 990 - 1245: | (1) HTS20 |

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Customer

Job Name

Job Site Address

City, State

Designer

11/16/2021

Summit Homes

Lot 120 The Manor at Stoney Creek

4400 SW Grindstone Circle

Lee's Summit MO

Chance Lickteig (785) 746-4240

Job # MN120

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses during construction. The building designer is responsible for ensuring that the trusses are properly supported by walls and columns in the responsibility of the building designer. For general guidelines regarding bearing capacity of wood trusses, available from the Truss Plate Institute, 581 Dornino Drive, Madison, WI 53179.

Shop Drawing Approval

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Wheeler Lumber  
1959 Old Hwy 50 NE  
Waverly, KS 66871

Approved By: \_\_\_\_\_ Date: \_\_\_\_\_


1st Floor Truss Layout  
Scale: 3/16" = 1'

RELEASE FOR  
CONSTRUCTION  
AS NOTED ON PLANS REVIEW  
Development Services  
LEE'S SUMMIT, MISSOURI

EVERSTEAD  
SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.


STATUS:  
  
APPROVED  
  
11/29/2021  
  
REVIEWED BY:  
CPD  
  
ENGINEER, EVERSTEAD

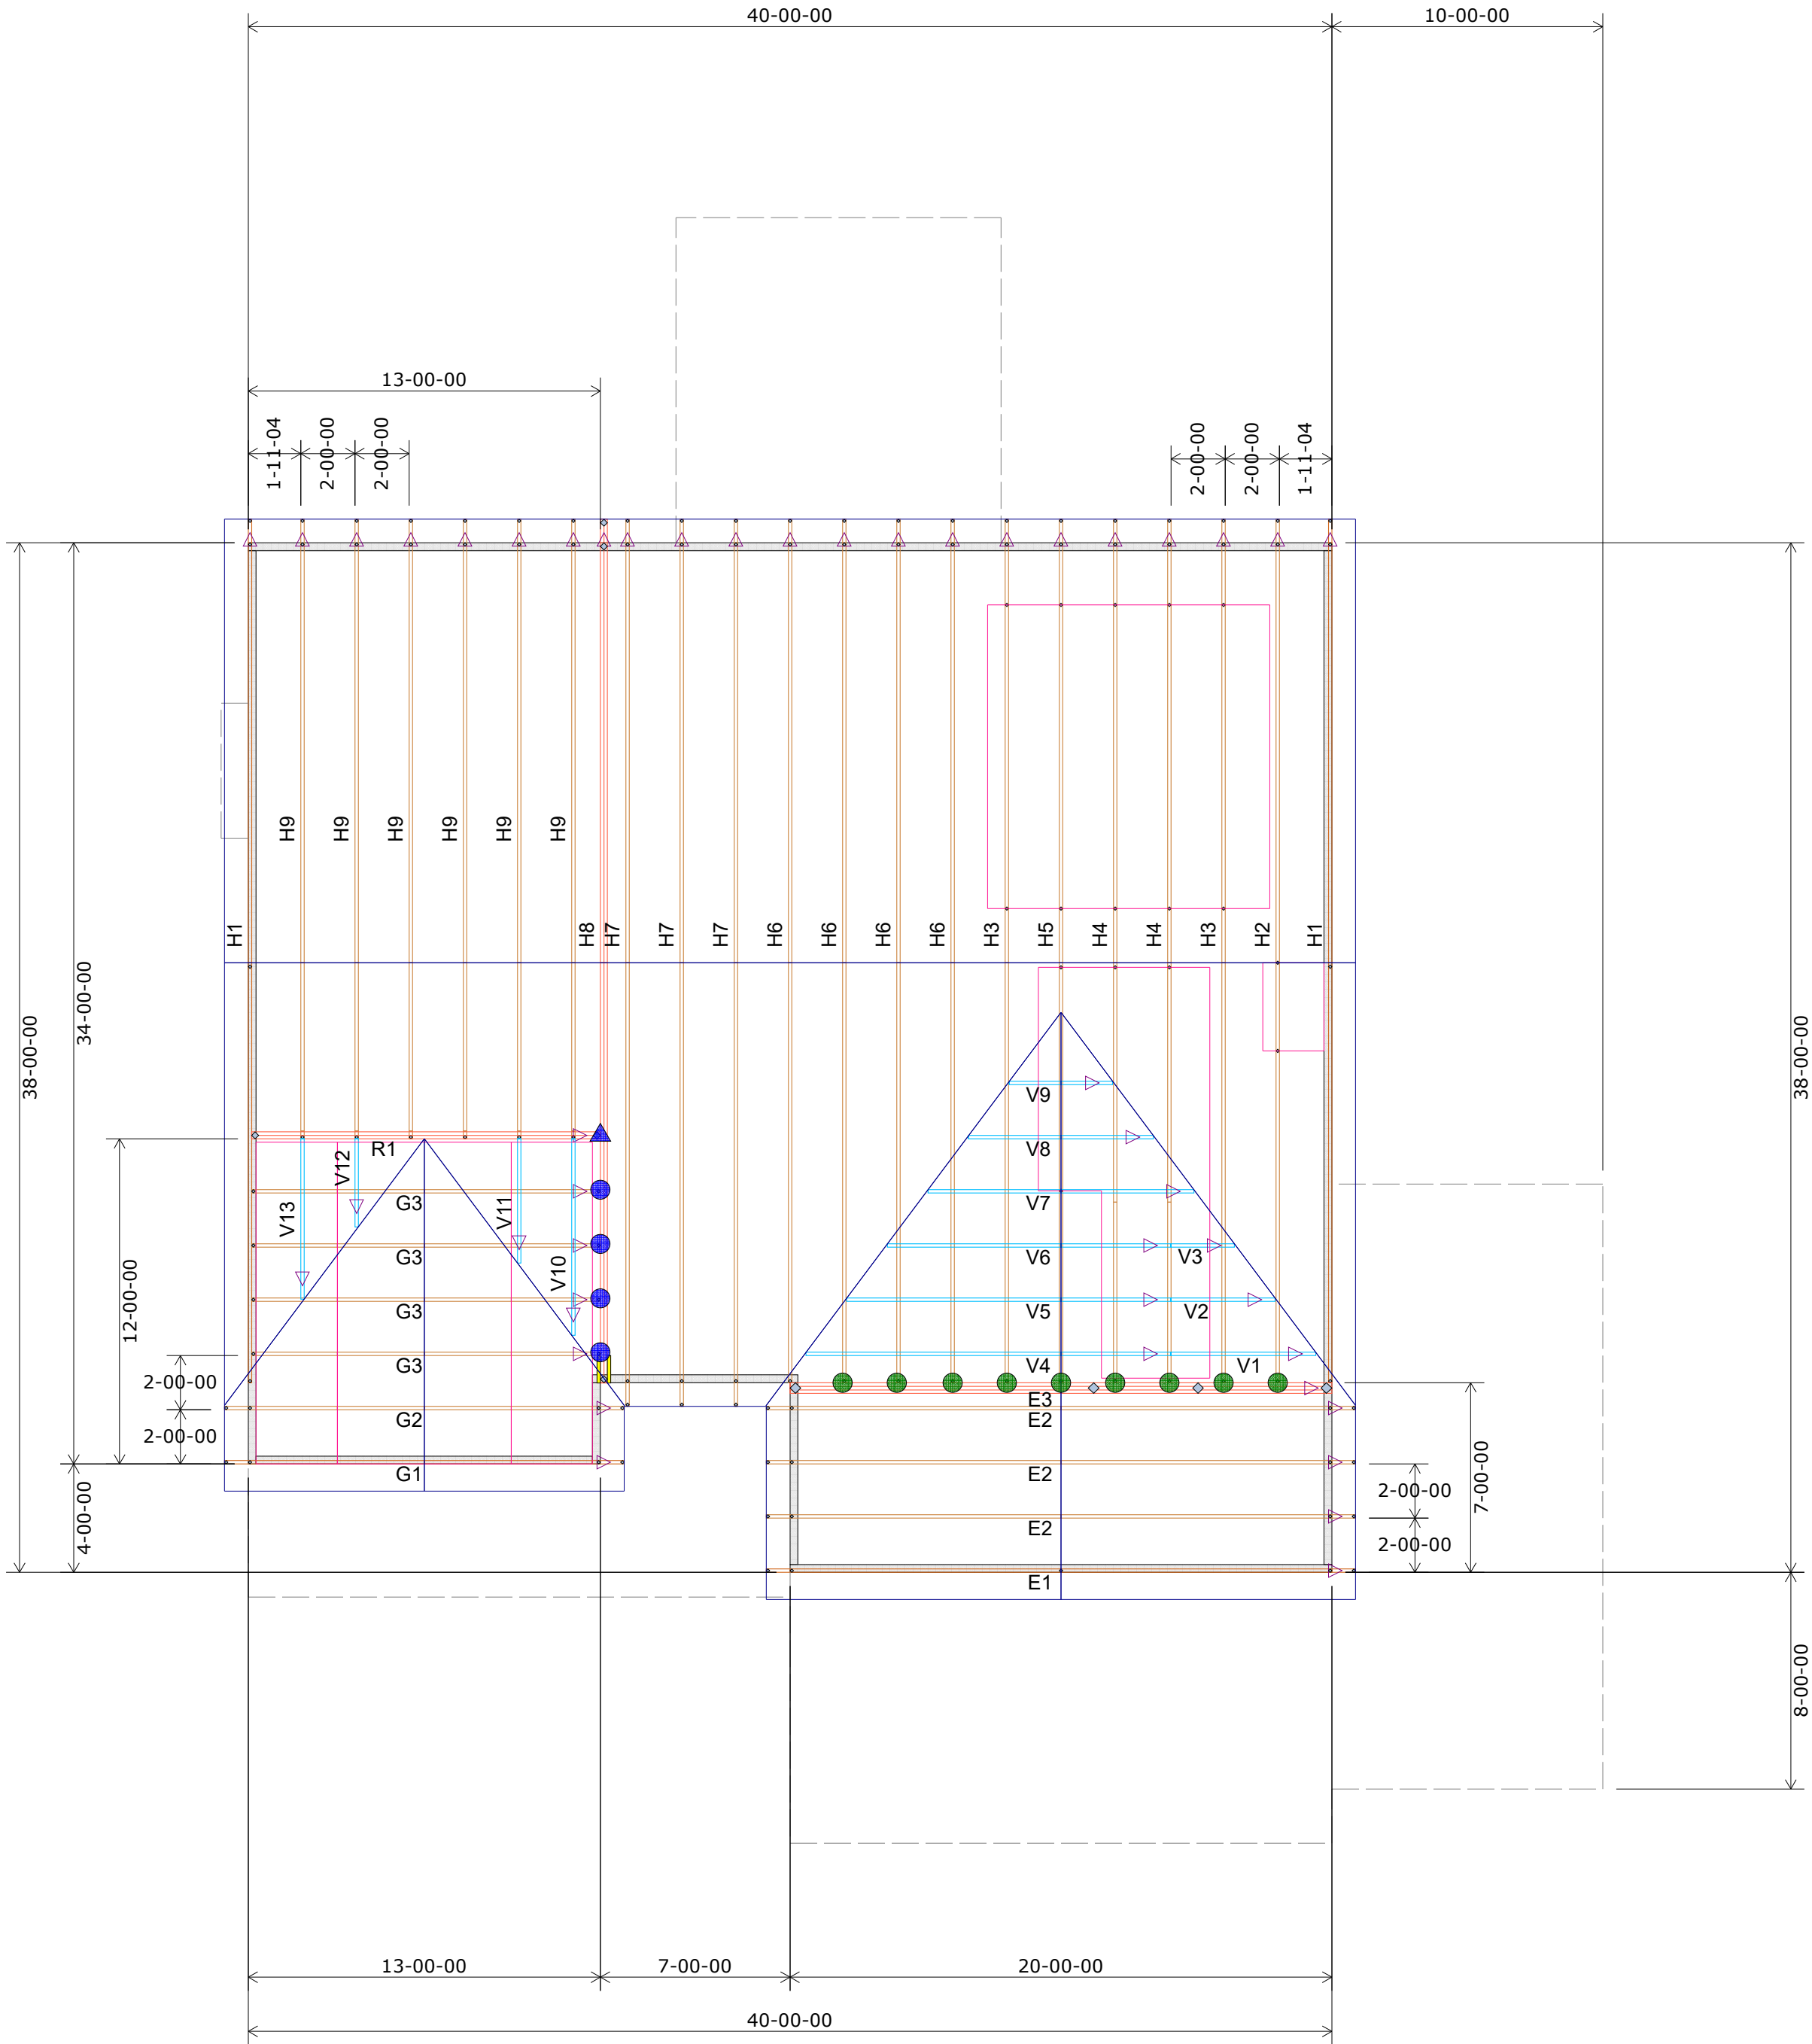

2nd Floor Truss Layout  
Scale: 3/16" = 1'

| HANGER SCHEDULE | Quantity |
|-----------------|----------|
| LUS24           | 20       |
| LUS26           | 4        |
| HUS26           | 9        |
| HHUS26-2        | 0        |
| HGUS26-2        | 1        |
| HGUS28-3        | 0        |
| LTHJA26         | 0        |
| TJC37           | 2        |
| TJC57           | 0        |
| HTS20           | 0        |

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

| # of Uplift | Connector |
|-------------|-----------|
| 0 - 495:    | (1) H2.5A |
| 495 - 990:  | (2) H2.5A |
| 990 - 1245: | (1) HTS20 |

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

| Customer     | Job Name                          | Job Site Address          | City,        | State | Designer        | Job # |
|--------------|-----------------------------------|---------------------------|--------------|-------|-----------------|-------|
| Summit Homes | Lot 120 The Manor at Stoney Creek | 4400 SW Grindstone Circle | Lee's Summit | MO    | Chance Lickteig | MN120 |

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |                       |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|
| THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the trusses during construction. The building designer is responsible for providing adequate bracing for the walls and columns in the responsibility of the building designer. For general guidelines regarding bracing consult "Bracing of wood trusses" available from the Truss Plate Institute, 583 Dornifro Drive, Madison, WI 53179. | Shop Drawing Approval |
| THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.                                                                                                                                                                                                                                                                                                                                                                                                         |                       |

Wheeler Lumber  
1959 Old Hwy 50 NE  
Waverly, KS 66871

RELEASE FOR  
CONSTRUCTION  
AS NOTED ON PLANS REVIEW  
Development Services  
LEE'S SUMMIT, MISSOURI