


EVERSTEAD
SHOP DRAWING / SUBMITTAL

REVIEW
SUBMITTAL WAS REVIEWED FOR DESIGN
CONFORMITY AND GENERAL CONFORMANCE TO
CONTRACT DOCUMENTS ONLY. THE CONTRACTOR
IS RESPONSIBLE FOR CONFIRMING AND
CORRELATING DIMENSIONS AT JOBSITE FOR
TOLERANCE, CLEARANCE, QUANTITIES,
FABRICATION, COORDINATION OF HIS OR HER
WORK WITH OTHER TRADES, AND FULL
COMPLIANCE WITH CONTRACT DOCUMENTS.

STATUS:
APPROVED
05/08/2024

REVIEWED BY:
CPD
ENGINEER, EVERSTEAD ENGINEERING & DESIGN
LLC.


RELEASE FOR CONSTRUCTION
AS NOTED ON PLANS REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
06/12/2024 4:31:16

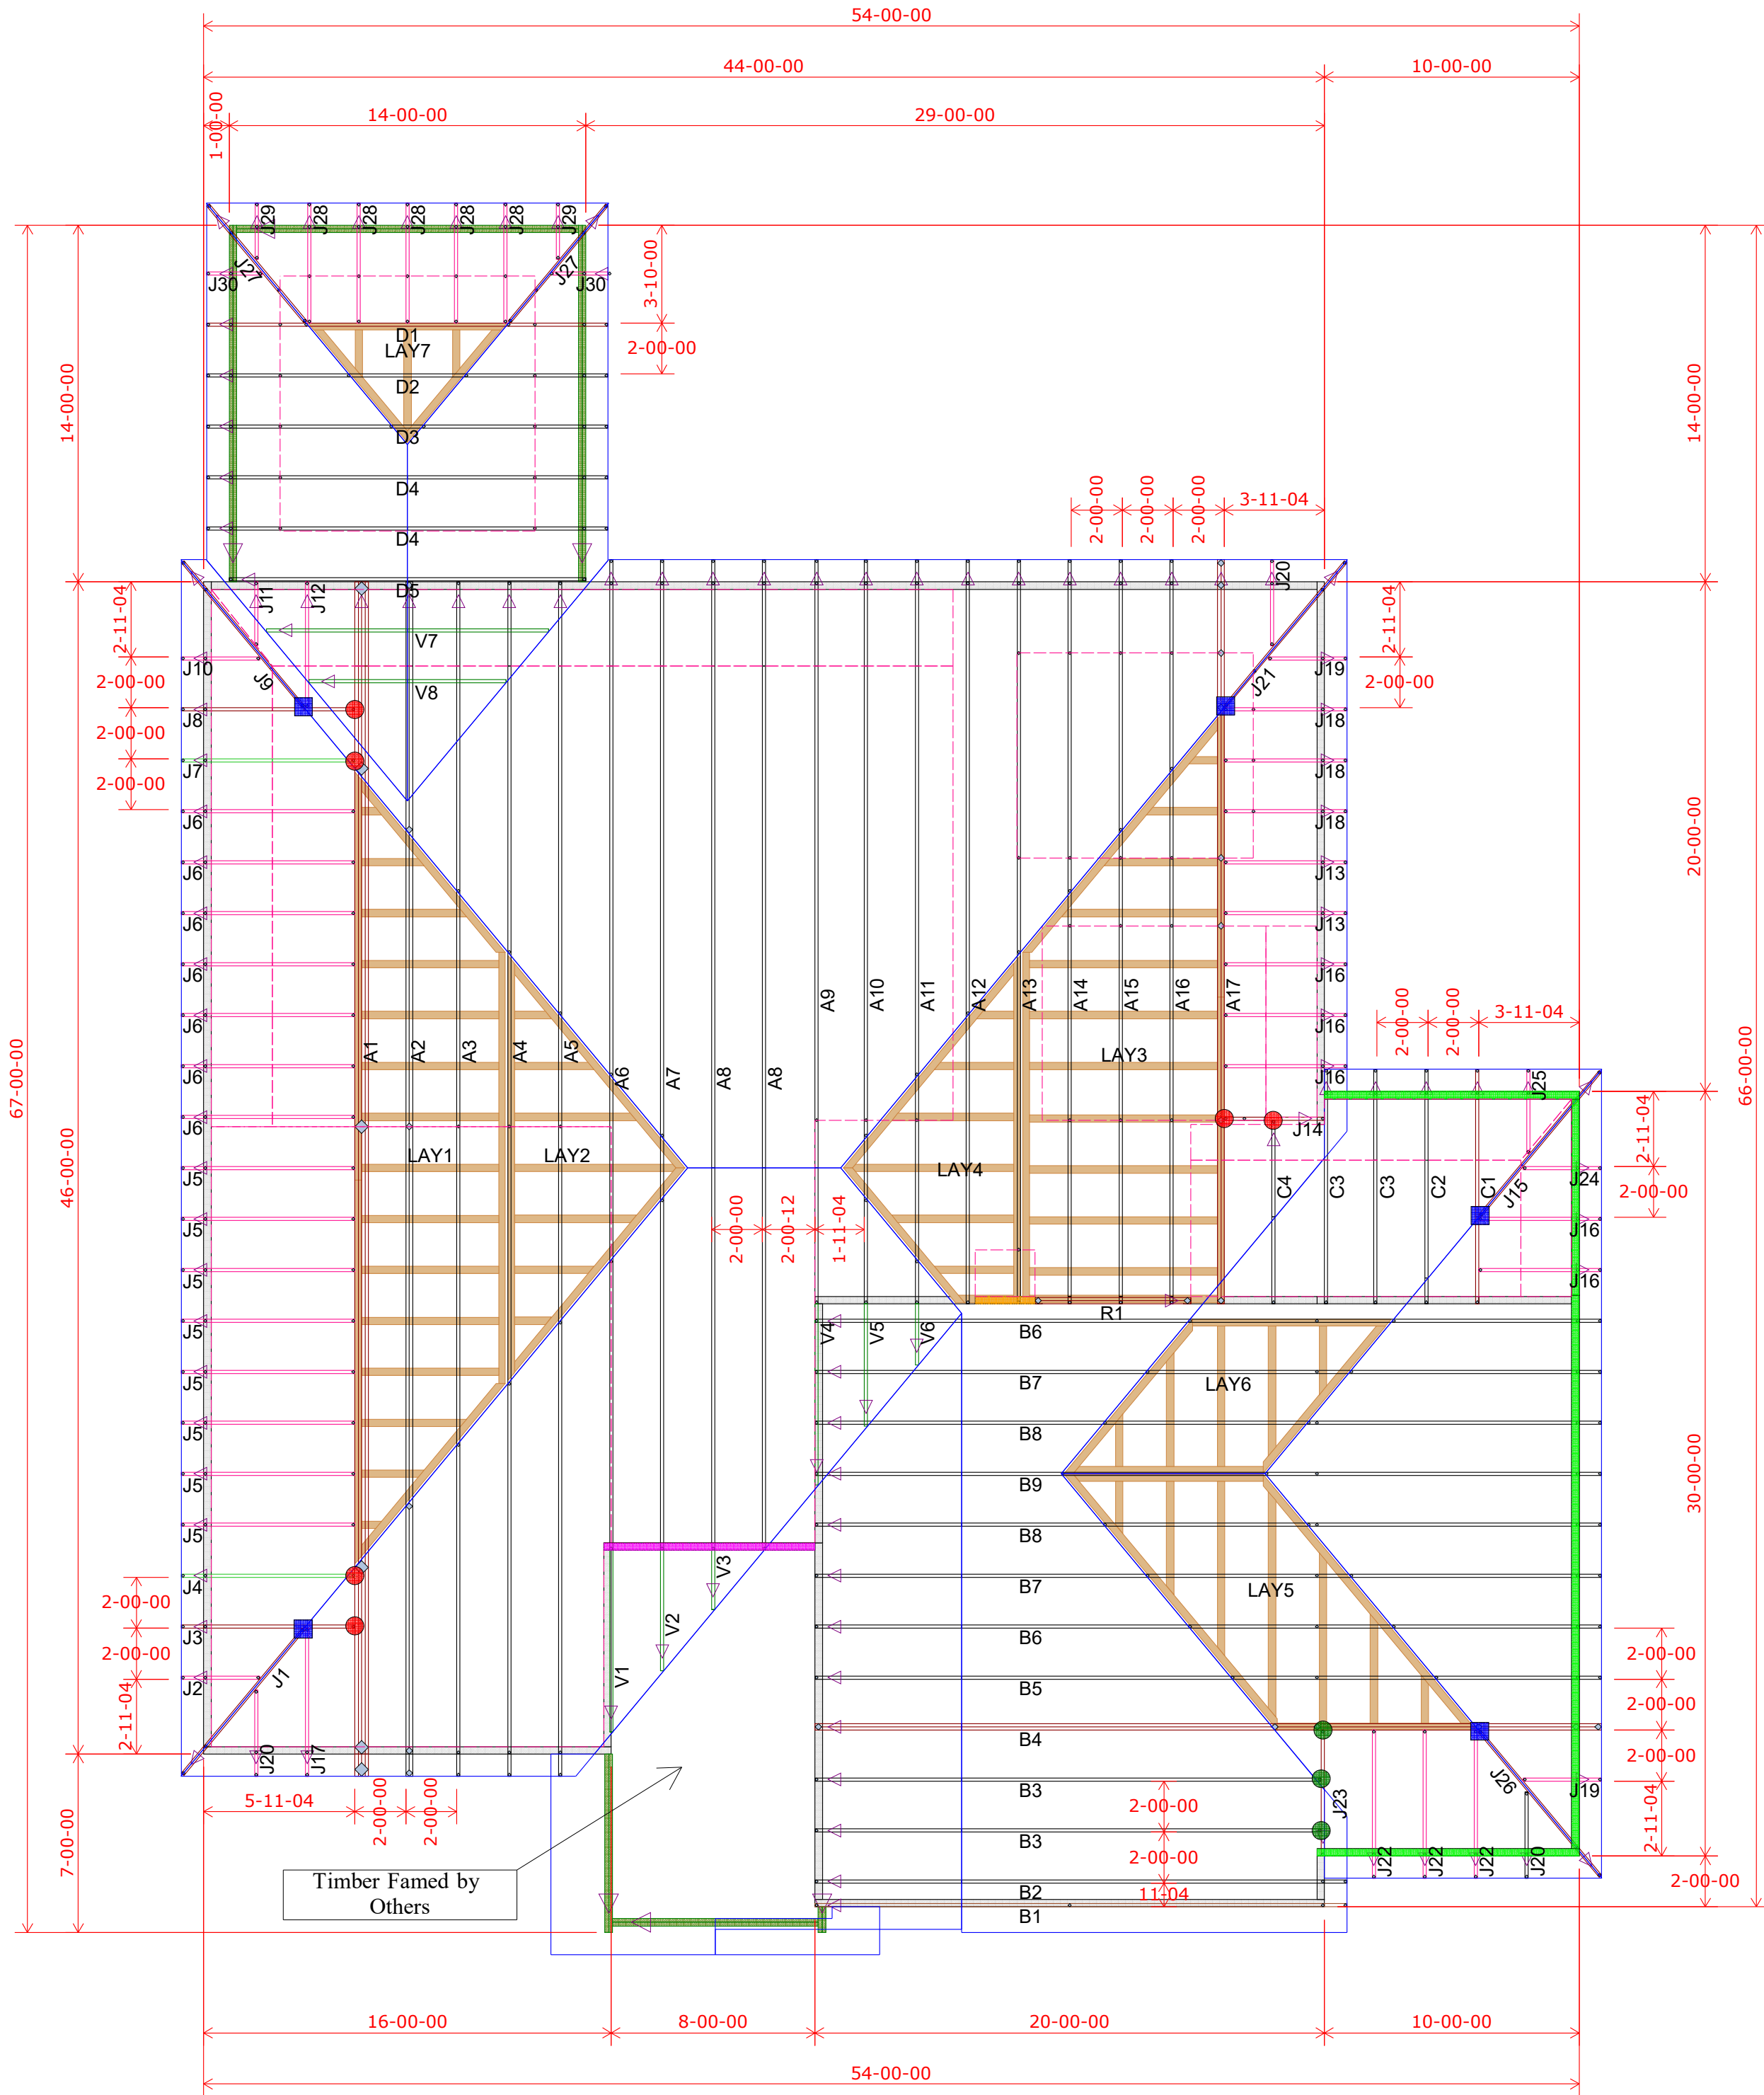

Roof Truss Layout
Scale: 3/16" = 1'

HANGER SCHEDULE	Quantity
LUS24	6
LUS26	0
HUS26	3
HHUS26-2	0
HGUS26-2	0
HGUS28-3	0
LTHJA26	0
TJC37	5
TJC57	0
HTS20	0
(2) H2.5A	

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

# of Uplift	Connector
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Plate Heights 9-01-02 U.N.O.	
8-01-02	
10-01-02	
13-01-02	

Customer		Summit Homes	
Job Name		Lot 180 Hawthorn Ridge	
Job Site Address		1625 SW Arborway Terr	
City, State		Lee's Summit MO	
Designer		Chuck Haspels (785) 746-4266	
Date		4/22/2024	
Job #		B240081	

Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871

