EVERSTEAD SHOP DRAWINGS/SUBMITTAL REVIEW

SUBMITTAL WAS REVIEWED FOR DESIGN CONFORMITY AND GENERAL CONFORMANCE TO CONTRACT DOCUMENTS ONLY. THE CONTRACTOR IS RESPONSIBLE FOR CONFIRMING AND CORRELATING DIMENSIONS AT JOBSITE FOR TOLERANCE, CLEARANCE, QUANTITIES, FABRICATION, COORDINATION OF HIS OR HER WORK WITH OTHER TRADES, AND FULL COMPLIANCE WITH CONTRACT DOCUMENTS.

STATUS:


APPROVED

02/10/2022

REVIEWED BY:


BH

ENGINEER, EVERSTEAD

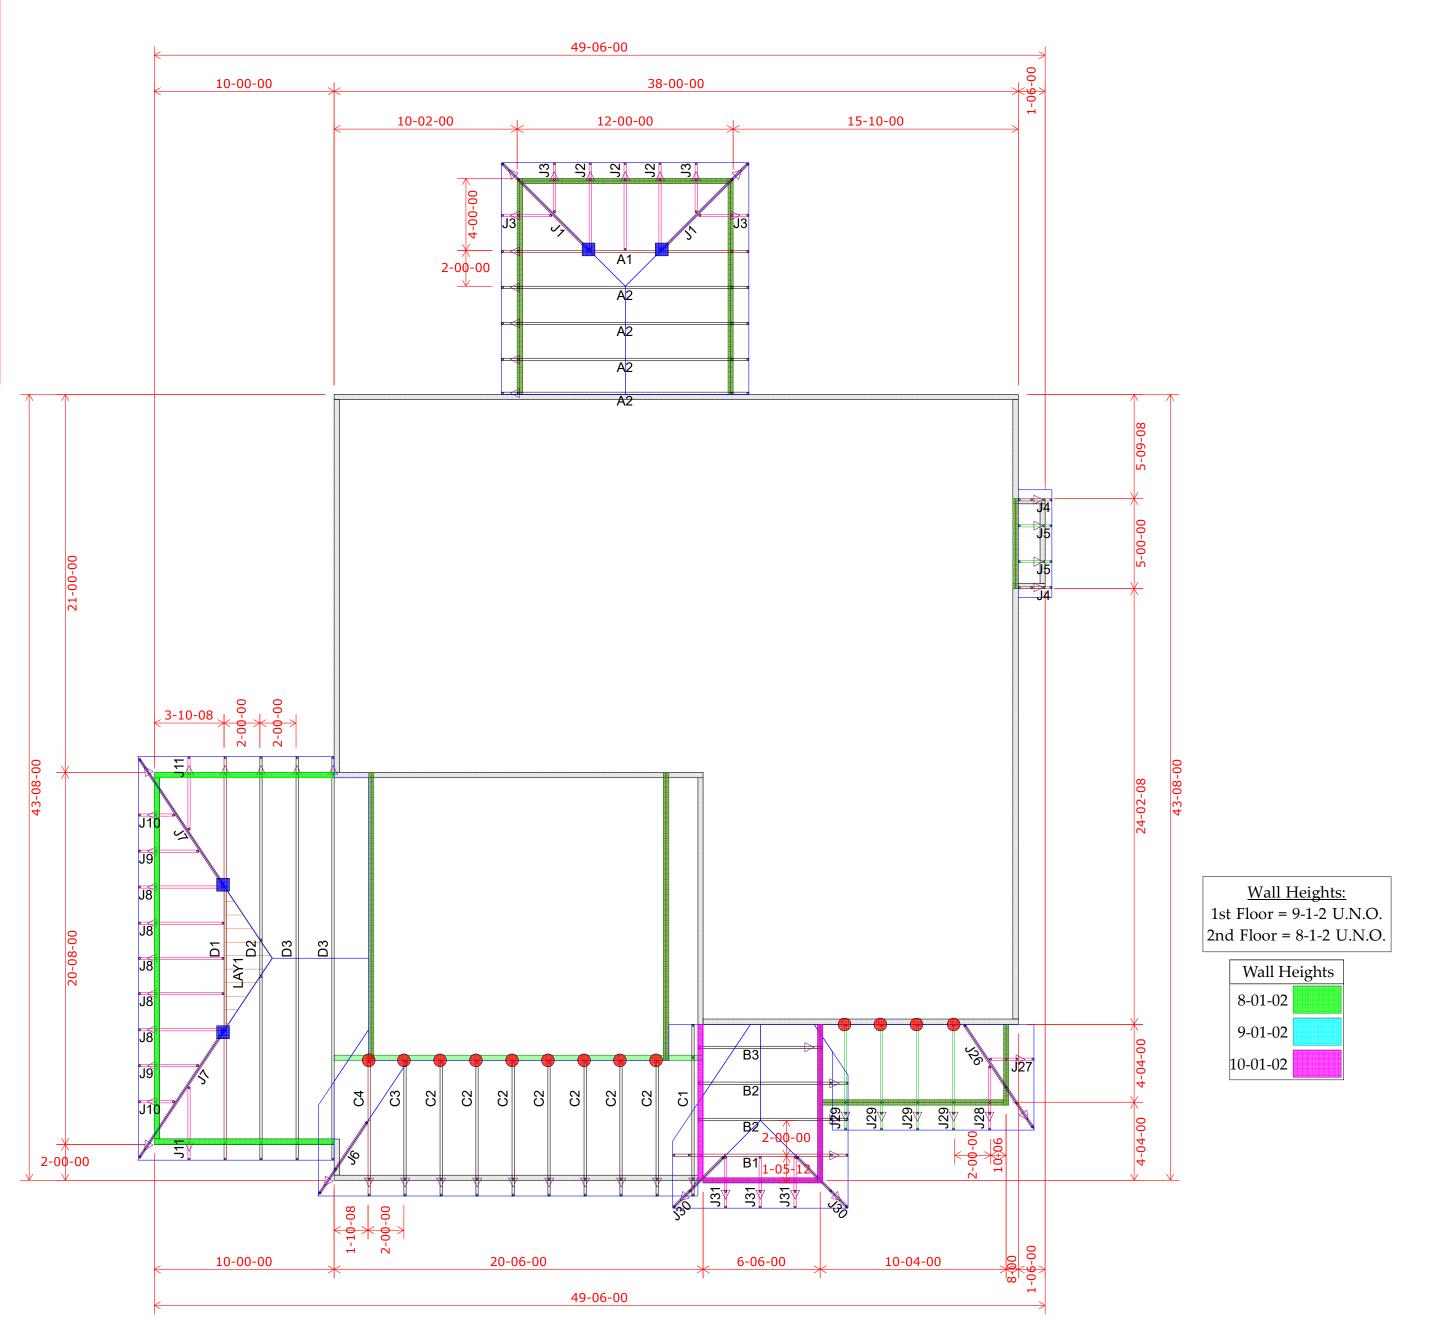

HANGER Quantity **SCHEDULE** LUS24 13 US26 0 HUS26 6 Lot 113 Hawthorn Ridge ▲ HHUS26-2 ▲ HGUS26-2 0 ▲ HGUS28-3 0 3217 SW Arbo LTHJA26 0 TJC37 7 TJC57 2 △ HTS20 0 (2) H2.5A Triangle denotes the left end of the Truss as it appears on Job Name the Engineered Drawings

provided.



Unless otherwise specified by Engineer Of Record, Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

of Uplift Connector 0 - 495: (1) H2.5A 495 - 990: (2) H2.5A 990 - 1245: (1) HTS20

Installation per Simpson Strong-Tie guidelines.


For Reactions greater than 1245#, refer to EOR.

HIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

heeler Lumber Old Hwy 50 NE verly, KS 66871 Wh₀ 1959 (Wave

RELEASE FOR CONSTRUCTION **AS NOTED ON PLANS REVIEW** Development Services LEE'S SUMMIT, MISSOURI

1st Floor Truss Layout Scale: 3/16" = 1'

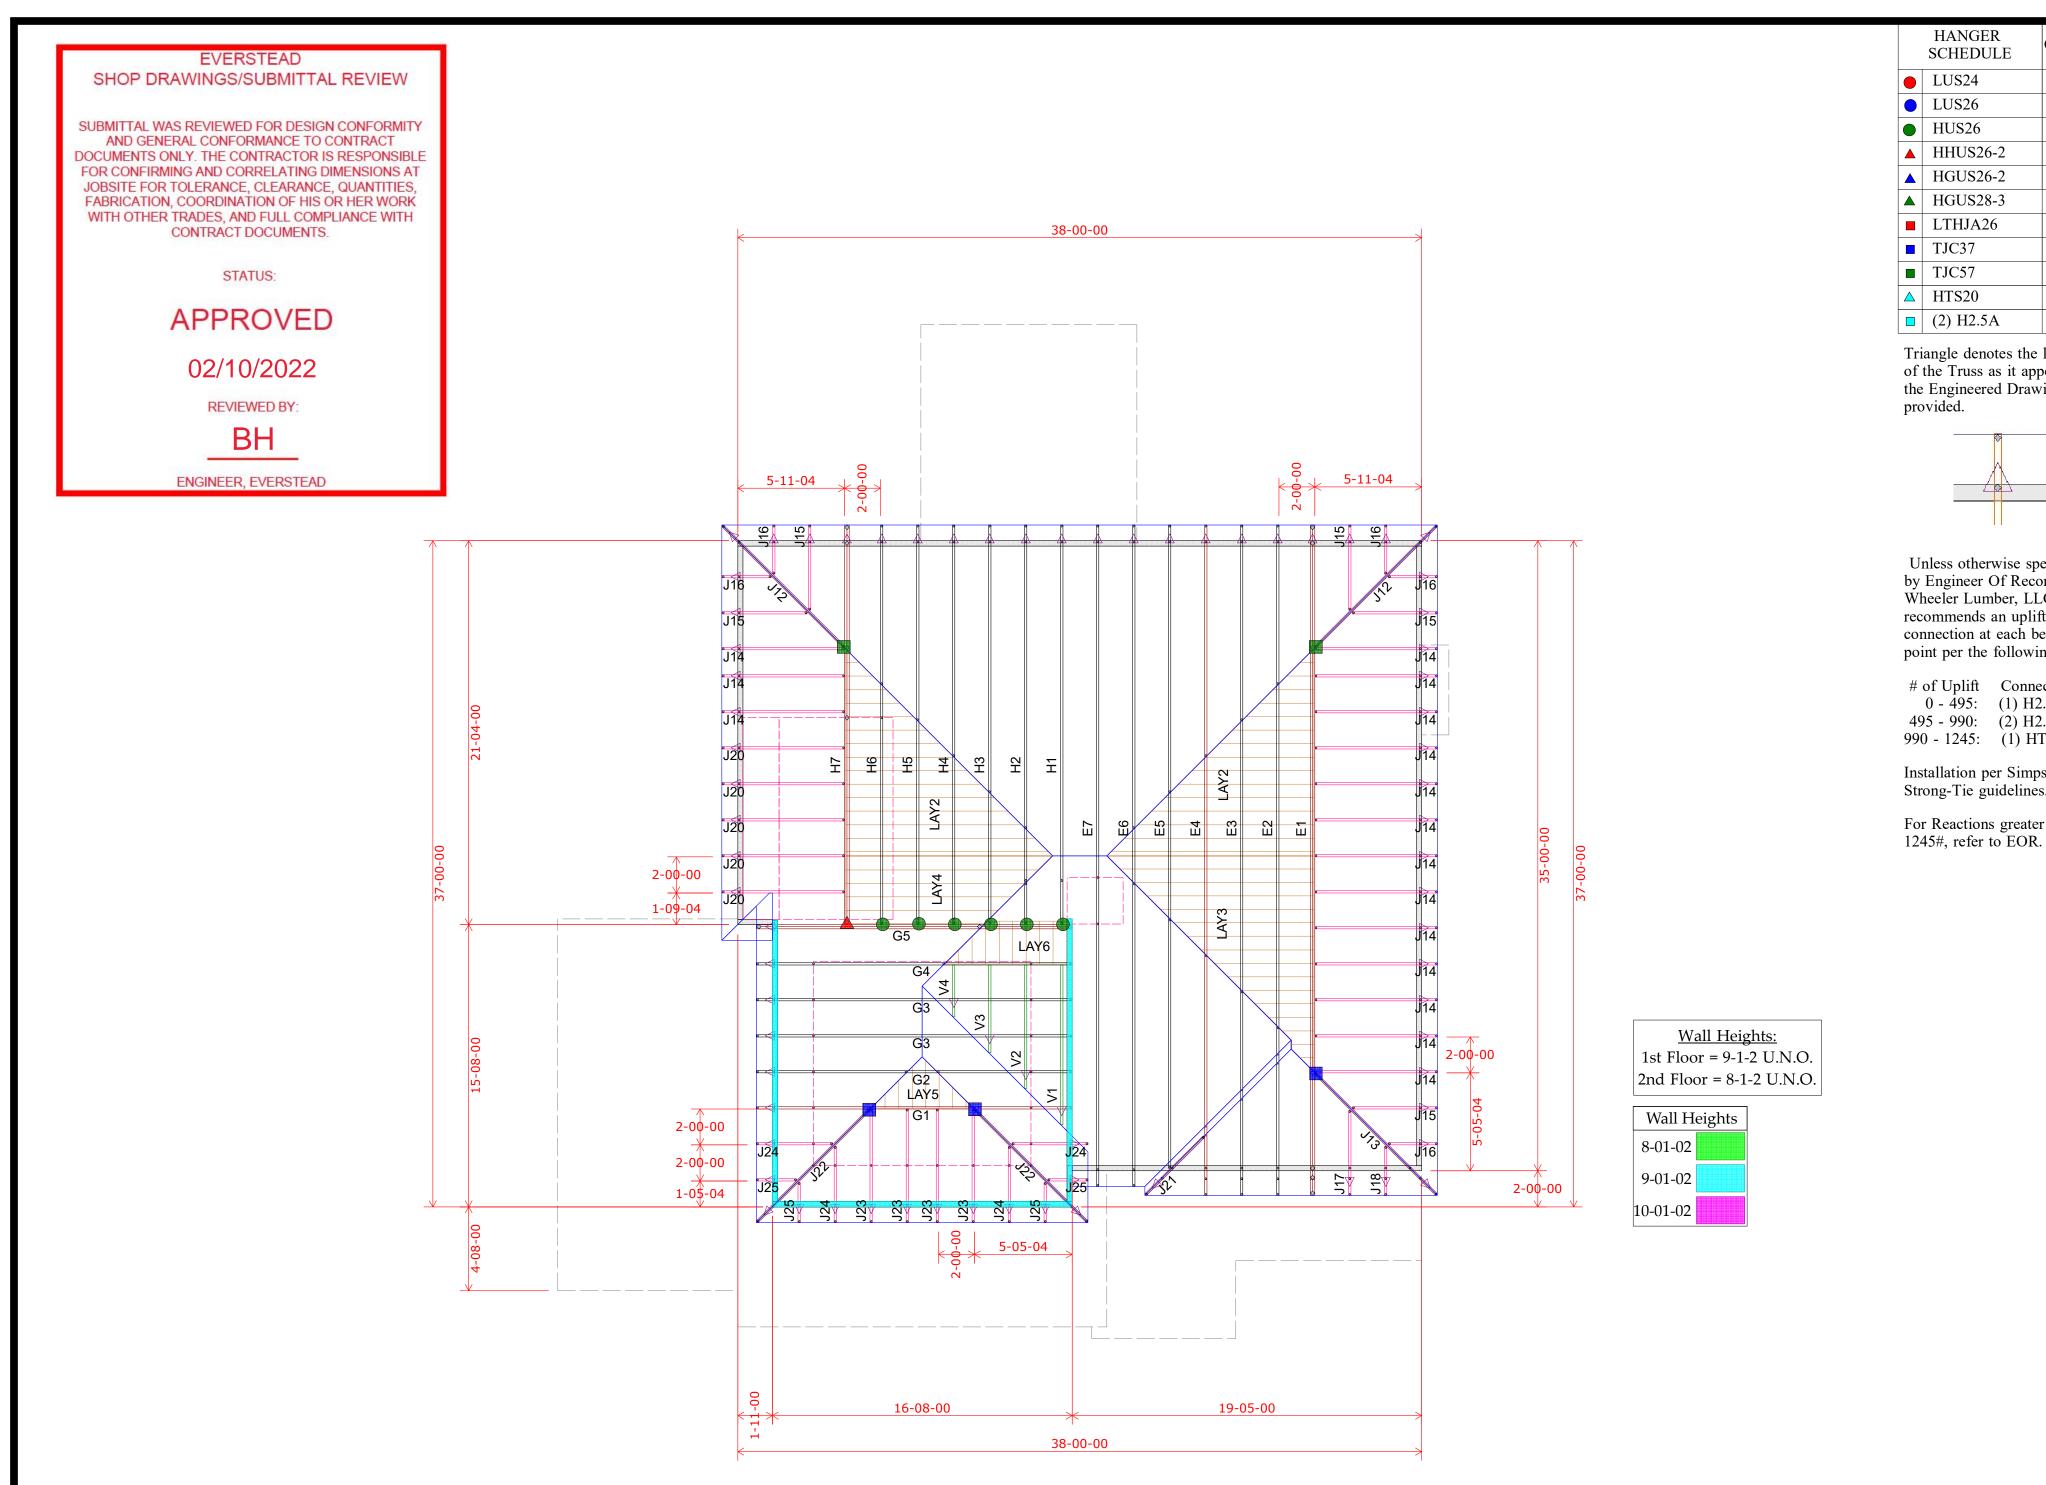

HANGER SCHEDULE LUS24 LUS26 HUS26	Quantity 13 0 6	s iorn Ridge		3217 SW Arbortree	МО	(785) 746-4266	
HHUS26-2 HGUS26-2 HGUS28-3	1 0 0		orn Ridge				3
LTHJA26	0	Home	Summit Homes Lot 113 Hawthorn Ridge		Lee's Summit	Chuck Haspels	Job # B220023
TJC37 TJC57	7 2	ummit					
HTS20 (2) H2.5A	0	N N	ı				Je
riangle denotes the left end f the Truss as it appears on			o	Address	State	-	7
ne Engineered Drawings rovided.		Customer	Job Name	Job Site Address	City,	Designer	1/27/2022
Unless otherwise specified y Engineer Of Record, Wheeler Lumber, LLC ecommends an uplift onnection at each bearing oint per the following: # of Uplift Connector 0 - 495: (1) H2.5A 495 - 990: (2) H2.5A 90 - 1245: (1) HTS20 Installation per Simpson trong-Tie guidelines. For Reactions greater than 245#, refer to EOR.		THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, 383 D/Onifito Drive; Madison, WI 53179.		Shop Drawing Approval	THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS. REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.		Aproved By: Date:

Wheeler Lumber, LLC recommends an uplift connection at each bearing point per the following:

of Uplift Connector 0 - 495: (1) H2.5A 495 - 990: (2) H2.5A 990 - 1245: (1) HTS20

Installation per Simpson Strong-Tie guidelines.

Wheeler Lumber 1959 Old Hwy 50 NE Waverly, KS 66871

RELEASE FOR CONSTRUCTION
S NOTED ON PLANS REVIEW
Development Services
LEE'S SUMMIT, MISSOURI

2nd Floor Truss Layout Scale: 3/16" = 1'