


**Notes for Concrete Washout:**

- Concrete washout must be installed prior to any concrete placement.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.

**Notes for Construction Entrance:**

- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.
- Concrete washout must be installed in accordance with the manufacturer's instructions.


**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-24**  
**ADOPTED: 10/24/2006**

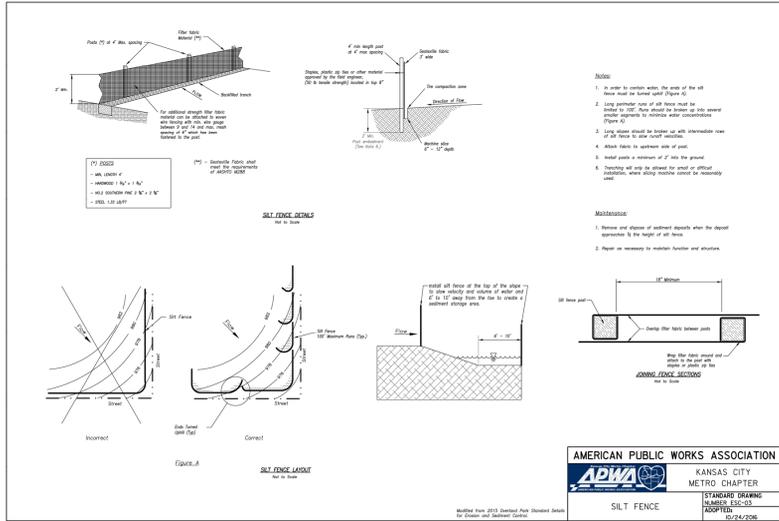

**Notes:**

- Silt fence must be installed in accordance with the manufacturer's instructions.
- Silt fence must be installed in accordance with the manufacturer's instructions.
- Silt fence must be installed in accordance with the manufacturer's instructions.
- Silt fence must be installed in accordance with the manufacturer's instructions.
- Silt fence must be installed in accordance with the manufacturer's instructions.


**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-25**  
**ADOPTED: 10/24/2006**

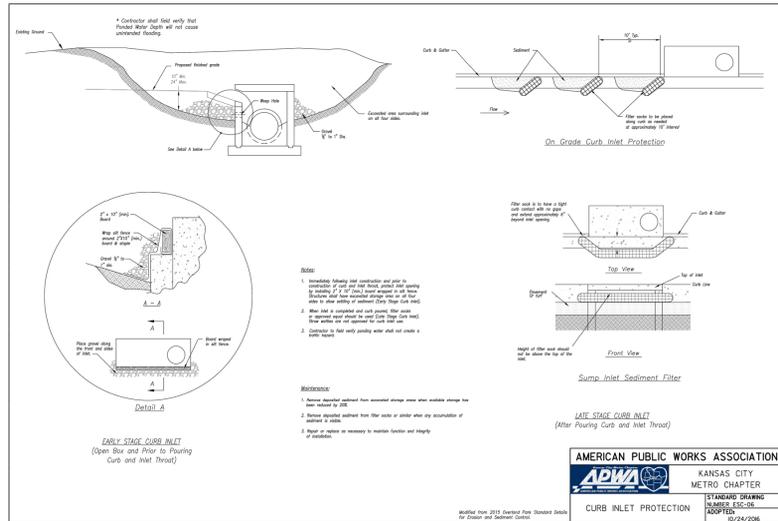

**Notes:**

- Contractor shall verify that proper filter depth will not cause uncontrolled flooding.
- Contractor shall verify that proper filter depth will not cause uncontrolled flooding.
- Contractor shall verify that proper filter depth will not cause uncontrolled flooding.
- Contractor shall verify that proper filter depth will not cause uncontrolled flooding.
- Contractor shall verify that proper filter depth will not cause uncontrolled flooding.

**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-26**  
**ADOPTED: 10/24/2006**

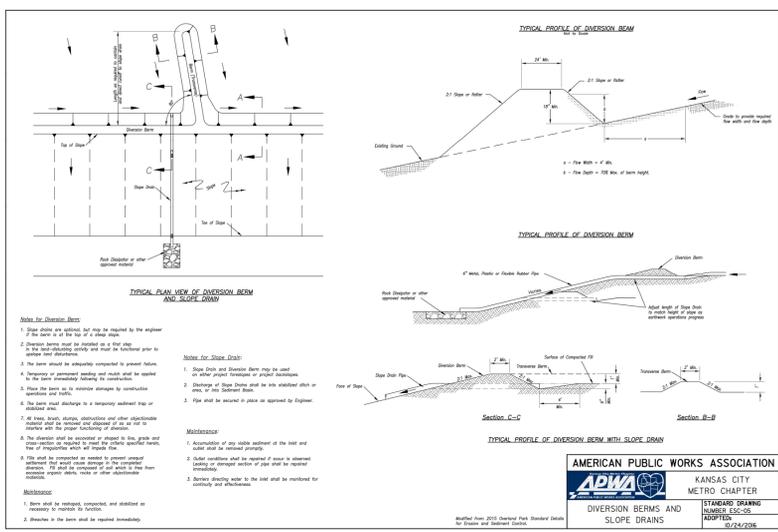


**Notes for Diversion Berms:**

- Diversion berms shall be installed in accordance with the manufacturer's instructions.
- Diversion berms shall be installed in accordance with the manufacturer's instructions.
- Diversion berms shall be installed in accordance with the manufacturer's instructions.
- Diversion berms shall be installed in accordance with the manufacturer's instructions.
- Diversion berms shall be installed in accordance with the manufacturer's instructions.

**Notes for Slope Drains:**

- Slope drains shall be installed in accordance with the manufacturer's instructions.
- Slope drains shall be installed in accordance with the manufacturer's instructions.
- Slope drains shall be installed in accordance with the manufacturer's instructions.
- Slope drains shall be installed in accordance with the manufacturer's instructions.
- Slope drains shall be installed in accordance with the manufacturer's instructions.

**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-28**  
**ADOPTED: 10/24/2006**

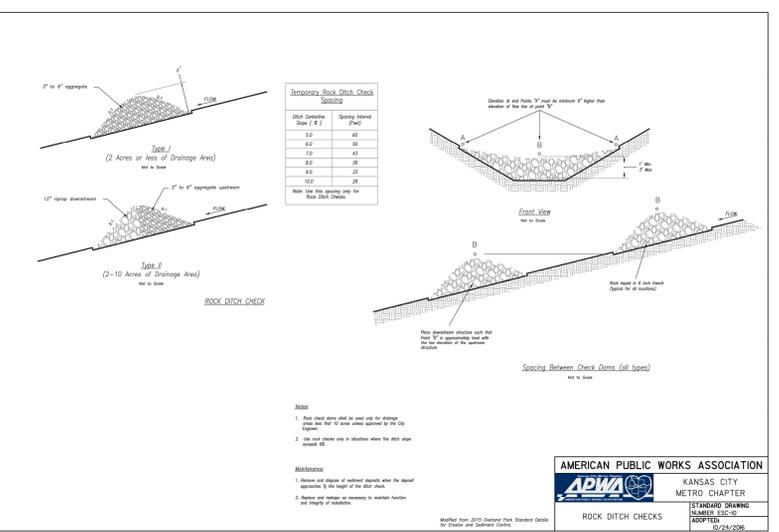


Check Dimensions (ft)	Spacing Interval (ft)
0.5	40
1.0	30
1.5	20
2.0	15
2.5	10
3.0	5

**Notes:**

- Rock ditch checks shall be installed in accordance with the manufacturer's instructions.
- Rock ditch checks shall be installed in accordance with the manufacturer's instructions.
- Rock ditch checks shall be installed in accordance with the manufacturer's instructions.
- Rock ditch checks shall be installed in accordance with the manufacturer's instructions.
- Rock ditch checks shall be installed in accordance with the manufacturer's instructions.

**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-29**  
**ADOPTED: 10/24/2006**

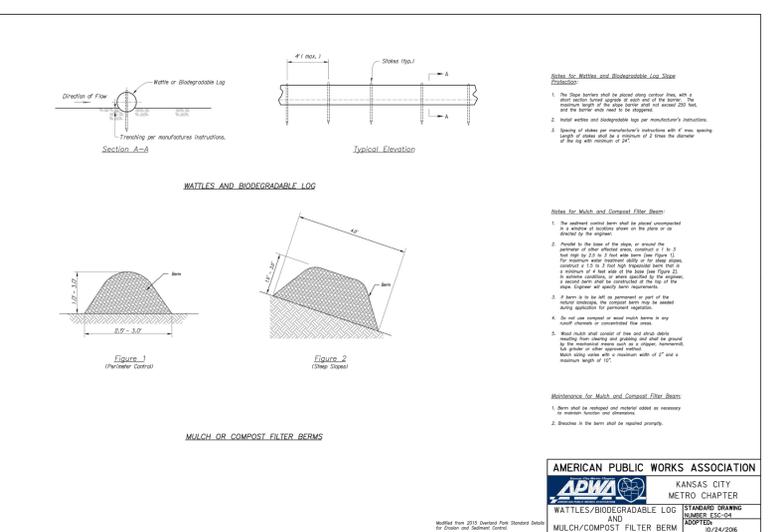

**Notes for Mattes and Biodegradable Log Berms:**

- Wattles and biodegradable logs shall be installed in accordance with the manufacturer's instructions.
- Wattles and biodegradable logs shall be installed in accordance with the manufacturer's instructions.
- Wattles and biodegradable logs shall be installed in accordance with the manufacturer's instructions.
- Wattles and biodegradable logs shall be installed in accordance with the manufacturer's instructions.
- Wattles and biodegradable logs shall be installed in accordance with the manufacturer's instructions.

**Notes for Mulch and Compost Filter Berms:**


- Mulch and compost filter berms shall be installed in accordance with the manufacturer's instructions.
- Mulch and compost filter berms shall be installed in accordance with the manufacturer's instructions.
- Mulch and compost filter berms shall be installed in accordance with the manufacturer's instructions.
- Mulch and compost filter berms shall be installed in accordance with the manufacturer's instructions.
- Mulch and compost filter berms shall be installed in accordance with the manufacturer's instructions.

**AMERICAN PUBLIC WORKS ASSOCIATION**  
**KANSAS CITY METRO CHAPTER**  
**STANDARD DRAWING NUMBER: ESC-30**  
**ADOPTED: 10/24/2006**

RELEASED FOR CONSTRUCTION  
 As Noted on Plans Review  
 Development Services Department  
 Lee's Summit, Missouri  
 03/15/2022

DRAWING INFO.	
DRAWN BY:	CVM
LICENSE NO.:	
CHECKED BY:	
LICENSE NO.:	
DATE:	03-14-2022
JOB NUMBER:	18CO10004

REVISIONS	
NO.	DESCRIPTION



SHEET NUMBER  
**C102**  
 3 OF 3

**ANDERSON ENGINEERING**  
 EMPLOYEE OWNED

ENGINEERS - SURVEYORS - LABORATORIES - DRILLING  
 4240 FULLER ROAD, JACKSON COUNTY, MISSOURI  
 MISSOURI CERTIFICATE OF AUTHORITY #000062 EXPIRES 12/31/2023

TOWNSEND SUMMIT LLC.  
 DETAILS  
 LEE'S SUMMIT, JACKSON COUNTY, MO