


1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081

GENERAL NOTES

- MAINTAIN ACCESS TO EXISTING WALKWAYS, CORRIDORS, AND OTHER ADJACENT OCCUPIED OR USED FACILITIES. DO NOT CLOSE OR OBSTRUCT WALKWAYS, CORRIDORS, OR OTHER OCCUPIED OR USED FACILITIES WITHOUT PERMISSION FROM TENANT.
2. DEFINITIONS:
- 2.1. REMOVE AND DISCARD: DETACH ITEMS FROM EXISTING CONSTRUCTION AND LEGALLY DISPOSE OF THEM OFF-SITE.
- 2.2. REMOVE AND SALVAGE: DETACH ITEMS FROM EXISTING CONSTRUCTION AND TURN OVER TO TENANT UNDAMAGED.
- 2.3. RELOCATE: DETACH ITEMS FROM EXISTING CONSTRUCTION, MOVE ITEMS REPAIR AND UNDEGRADE, AND REINSTALL THEM WHERE INDICATED.
- 2.4. EXISTING TO REMAIN: EXISTING ITEMS OF CONSTRUCTION THAT ARE NOT TO BE REMOVED, BUT ARE TO REMAIN IN PLACE AND BE UNDEGRADED. REMOVE AND RECLAIM: DETACH ITEMS FROM EXISTING CONSTRUCTION. AT CONTRACTORS OPTION ITEM MAY BE REUSED AS PART OF NEW WORK. IT SHALL BE THE CONTRACTORS RESPONSIBILITY TO INVENTORY ITEMS TO DETERMINE IF ITEMS WILL FUNCTION AND APPEAR LIKE THE NEW ITEMS SPECIFIED AND CALLED OUT ON THESE DOCUMENTS. IF ITEMS ARE REUSED, CONTRACTOR IS TO CLEAN, REPAIR, OR OTHERWISE BRING ITEMS TO LIKE NEW CONDITION. MODIFY REUSED ITEMS AS REQUIRED AND SUPPLEMENT WITH MATERIALS, AND INCIDENTALS NECESSARY TO EXECUTE A COMPLETE WORKMANLIKE JOB. IF CONTRACTOR CHOOSES TO NOT REUSE ITEM, LEGALLY DISPOSE OF ITEM OFF-SITE AND REPLACE WITH NEW TO MATCH EXISTING.
- 2.6. PROVIDE: THE MEANING OF THE WORD "PROVIDED" INCLUDES, BUT IS NOT LIMITED TO, FURNISHED, DELIVERED, INSTALLED, FINISHED, MADE FULLY OPERABLE AND COMPLETE. UNLESS SPECIFICALLY NOTED OTHERWISE, ALL WORK DESCRIBED IN THESE DOCUMENTS IS TO BE PROVIDED BY THE CONTRACTOR.
3. CONTRACTOR IS TO INCLUDE AS PART OF HIS SCOPE ALL CUTTING AND PATCHING REQUIRED THROUGH CAREFUL EVALUATION OF THE EXISTING SITE AND THE CONSTRUCTION DOCUMENTS. CONTRACTOR SHALL COORDINATE THE CUTTING AND PATCHING OF EXISTING CONSTRUCTION NECESSARY TO PERMIT INSTALLATION OR PERFORMANCE OF THE WORK INDICATED IN THESE CONSTRUCTION DOCUMENTS. SAW-CUT CONC. SLAB AS REQUIRED FOR UTILITY FOR EQUIPMENT AND BANK INTO SCOTCH AND TREND WITHIN FIELD. PATCH BACK WITH MATCHING SLAB THICKNESS OVER SAME MATERIAL, COMPACT UNDERLYING MATERIALS TO MEET BEST PRACTICES. DOVEL NEW TO EXISTING WITH #4 REBAR AT 30" OC.
4. WHERE WALLS, CASEWORK, FINISHES, EQUIPMENT OR OTHER ITEMS AND CONSTRUCTIONS HAVE BEEN REMOVED EXPOSING UNDERLYING WALL AND/OR FLOOR SURFACES, SUCH SURFACES ARE TO BE PATCHED AND REPAIRED AS REQUIRED TO ACCEPT NEW FINISHES. ALL HOLES, DAMAGES, DEFECTS, ETC. IN EXISTING SURFACES ARE TO BE PATCHED TO MATCH EXISTING CONDITIONS.
5. EXISTING CONDITIONS SHOWN ON THESE DRAWINGS ARE BASED UPON BASE BUILDING OR OTHER CONSTRUCTION DOCUMENTS MADE AVAILABLE TO THE DESIGNER BY THE BUILDING MANAGEMENT. ALL AS-BUILT CONSTRUCTION CONDITIONS HAVE NOT BEEN FIELD VERIFIED AND MAY VARY FROM THOSE SHOWN.
6. PRIOR TO BID, FIELD VERIFY ALL EXISTING CONSTRUCTION TO REMAIN AND INCLUDE COSTS FOR REPAIR AND RECONDITION OF ALL EXISTING CONSTRUCTION TO REITS TO MEET IT VISUALLY AS NEW AND FUNCTIONAL STANDARD OF QUALITY FOR NEW CONSTRUCTION. BLEND AND MATCH EXISTING CONSTRUCTION WITH NEW CONSTRUCTION. PRIOR TO BID, ADVISE TENANT OF ANY CONDITIONS WHICH CANNOT BE REPAIRED OR RECONDITIONED, BLENDED AND MATCHED. NOTE CONTRACT DOCUMENT REQUIREMENTS FOR EXISTING CONSTRUCTION AND INCLUDE COSTS FOR THIS WORK IN BID PROPOSAL.
7. THE GENERAL CONTRACTOR SHALL, IN THE BIDDING PROCESS, REQUIRE THAT MECHANICAL AND ELECTRICAL SUBCONTRACTORS MAKE A THOROUGH FIELD INSPECTION OF AS-BUILT CONDITIONS OF EXISTING SYSTEMS. AFTER SUCH FIELD VERIFICATION HAS BEEN COMPLETED, THE GENERAL CONTRACTOR AND SUBCONTRACTORS SHALL PROVIDE IN THEIR BIDS, ANY MODIFICATIONS TO THE EXISTING SYSTEMS WHICH MAY BE REQUIRED TO ACCOMMODATE THE PROPOSED REQUIREMENTS FOR THIS TENANT. IF A DETERMINATION OF SUCH MODIFICATIONS CANNOT BE MADE, THE GENERAL CONTRACTOR SHALL NOTIFY THE TENANT, AND AT THE DIRECTION OF THE TENANT, PROVIDE AN AGREED UPON ALLOWANCE TO COVER SUCH WORK.
8. COMMENCING WORK BY A CONTRACTOR OR SUBCONTRACTOR CONSTITUTES ACCEPTANCE OF THE UNDERLYING CONDITIONS AND SURFACES. PRIOR TO PROCEEDING WITH THE WORK, PREPARE EXISTING AND NEW UNDERLYING CONDITIONS AND SUBSTRATE TO COMPLY WITH THE CONTRACT DOCUMENTS, INDUSTRY STANDARDS AND MANUFACTURER'S RECOMMENDATION.
9. FIELD VERIFY ALL ROUGH OPENINGS AND WALL WIDTHS PRIOR TO ORDERING OR FABRICATION OF MATERIALS.
10. DIMENSIONS ARE NOMINAL AND TO THE FACE OF PARTITIONS
11. CLEAN-UP OF RUBBISH AND DEBRIS RESULTING FROM DEMOLITION AND NEW WORK SHALL BE COLLECTED REGULARLY FROM PROJECT SITE AND LEGALLY DISPOSED
12. ALL WEATHER EXPOSED SURFACES SHALL HAVE A WEATHER RESISTIVE BARRIER TO PROTECT THE INTERIOR WALL COVERING AND EXTERIOR OPENINGS SHALL BE FLASHED IN SUCH A MANNER AS TO MAKE THEM WEATHERPROOF
13. BUILDING ADDRESS NUMBERS SHALL BE PROVIDED AND PLACED IN A POSITION THAT IS PLAINLY LEGIBLE AND VISIBLE FROM THE STREET OR ROAD FRONTING THE PROPERTY. THESE NUMBERS SHALL CONTRAST WITH THEIR BACKGROUND. IN MULTI-TENANT COMMERCIAL BUILDINGS WHERE TENANTS HAVE MULTIPLE ENTRANCES LOCATED ON DIFFERENT SIDES OF THE BUILDING EACH DOOR SHALL BE ADDRESSED. ADDRESS NUMBERS SHALL BE ARABIC NUMERALS OR ALPHABET LETTERS. NUMBERS SHALL BE A MINIMUM OF 1/4 INCHES (102 MM) HIGH WITH A MINIMUM STROKE WIDTH OF 0.5 INCH (12.7 MM).
14. CONTRACTORS ARE RESPONSIBLE FOR ALL MATERIALS AND QUANTITIES SHOWN IN THESE DRAWINGS GRAPHICALLY AS WELL AS THOSE CALLED FOR BY NOTE
15. THE CONTRACTOR SHALL OBTAIN ALL NECESSARY PERMITS TO COMPLETE THE PROPOSED WORK AND SHALL COMPLY WITH ALL LOCAL, STATE, AND FEDERAL REGULATIONS
16. THE TENANT OR THE TENANT'S DESIGNATED REPRESENTATIVE WILL PROVIDE SERVICES IN CONNECTION WITH ADMINISTRATION OF THE CONTRACT
17. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL LOCAL LAWS, ORDINANCES, RULES AND REGULATIONS OF THE GOVERNING AGENCIES HAVING JURISDICTION
18. THE CONTRACTOR MUST TAKE ADEQUATE CARE TO PROTECT ALL AREAS OF THE BUILDING AND ITS SURROUNDINGS. THIS PROJECT IS LOCATED AS WELL AS THE AREAS ADJACENT TO THE AREA OF THE WORK OF THIS PROJECT SO AS TO PREVENT DAMAGE TO LIFE OR PROPERTY AS A RESULT OF THIS CONSTRUCTION PROJECT
19. ONLY MATERIALS THAT ARE NEW, UNUSED, FREE FROM DEFECTS, AND THE BEST OF THEIR RESPECTIVE KINDS SHALL BE USED. THE BASIS OF QUALITY SHALL BE THE LATEST STANDARDS OF AIA, ASHRAE, AND
20. THE CONTRACTOR SHALL COORDINATE HIS WORK WITH ALL OTHER TRADES INCLUDING THOSE OF THE TENANT WHO MAY BE ENGAGED UNDER A SEPARATE CONTRACT
21. INSTALL ALL WORK IN SUCH A MANNER AS TO BE READILY ACCESSIBLE FOR OPERATION, MAINTENANCE AND/OR REPAIRS
22. ALL WORK AND EQUIPMENT SHALL BE CLEANED TO THE SATISFACTION OF THE TENANT BEFORE BEING TURNED OVER FOR USE
23. A COPY OF THE LATEST SET OF CONSTRUCTION DOCUMENTS SHALL BE KEPT AT THE JOB SITE AT ALL TIMES
24. THE CONTRACTOR AND EACH SUBCONTRACTOR SHALL KEEP ACCURATE RECORDS OF ANY MODIFICATION OR DEVIATIONS FROM THE CONTRACT DRAWINGS
25. PROJECT CLOSE OUT DOCUMENTS SHALL BE PROVIDED TO THE TENANT. INCLUDE AS-BUILT DRAWINGS, WARRANTY/MAINTENANCE MANUALS AND TESTING AND SUPERVISION AS REQUIRED. PRESERVE ALL PRINTED INSTRUCTIONS AND WARRANTIES THAT ARE PROVIDED WITH EQUIPMENT OR MATERIALS USED, AND DELIVER SAID PRINTED MATTER TO THE TENANT AT THE TIME OF SUBSTANTIAL COMPLETION. IF REQUESTED BY THE TENANT, INSTRUCT THE MANAGEMENT IN THE PROPER USE AND MAINTENANCE OF ALL ITEMS OF WORK PROVIDED.
26. PROVIDE WORK IN ACCORDANCE WITH THE MANUFACTURER'S RECOMMENDATION. EXCEPT IN THE CASE WHERE THE CONTRACT DOCUMENTS ARE MORE STRINGENT. PROVIDE ANY MISCELLANEOUS ITEMS OR MATERIALS NOT SPECIFICALLY NOTED, BUT REQUIRED FOR PROPER INSTALLATION OF THE WORK.
27. ALL WORK SHALL BE WARRANTED BY THE CONTRACTOR TO BE SATISFACTORY, IN MATERIALS AND WORKMANSHIP, FOR A MINIMUM PERIOD OF ON (1) YEAR, OR FOR THE PERIOD OF WARRANTY CUSTOMARY, SPECIFIED FOR, THE TRADE, CRAFT OR PRODUCT, WHICHEVER IS LONGER.
28. SUBMIT REQUESTS FOR SUBSTITUTIONS OF SPECIFIED ITEMS IN WRITING, ACCOMPANIED BY THE ALTERNATIVE PRODUCT INFORMATION, TO THE TENANT. SUBSTITUTIONS MAY BE CONSIDERED ONLY IF THEY DO NOT SACRIFICE QUALITY, APPEARANCE AND FUNCTION. ACCEPTANCE OF SUBSTITUTIONS IS AT THE SOLE DISCRETION OF THE TENANT.

BUILDING KEY

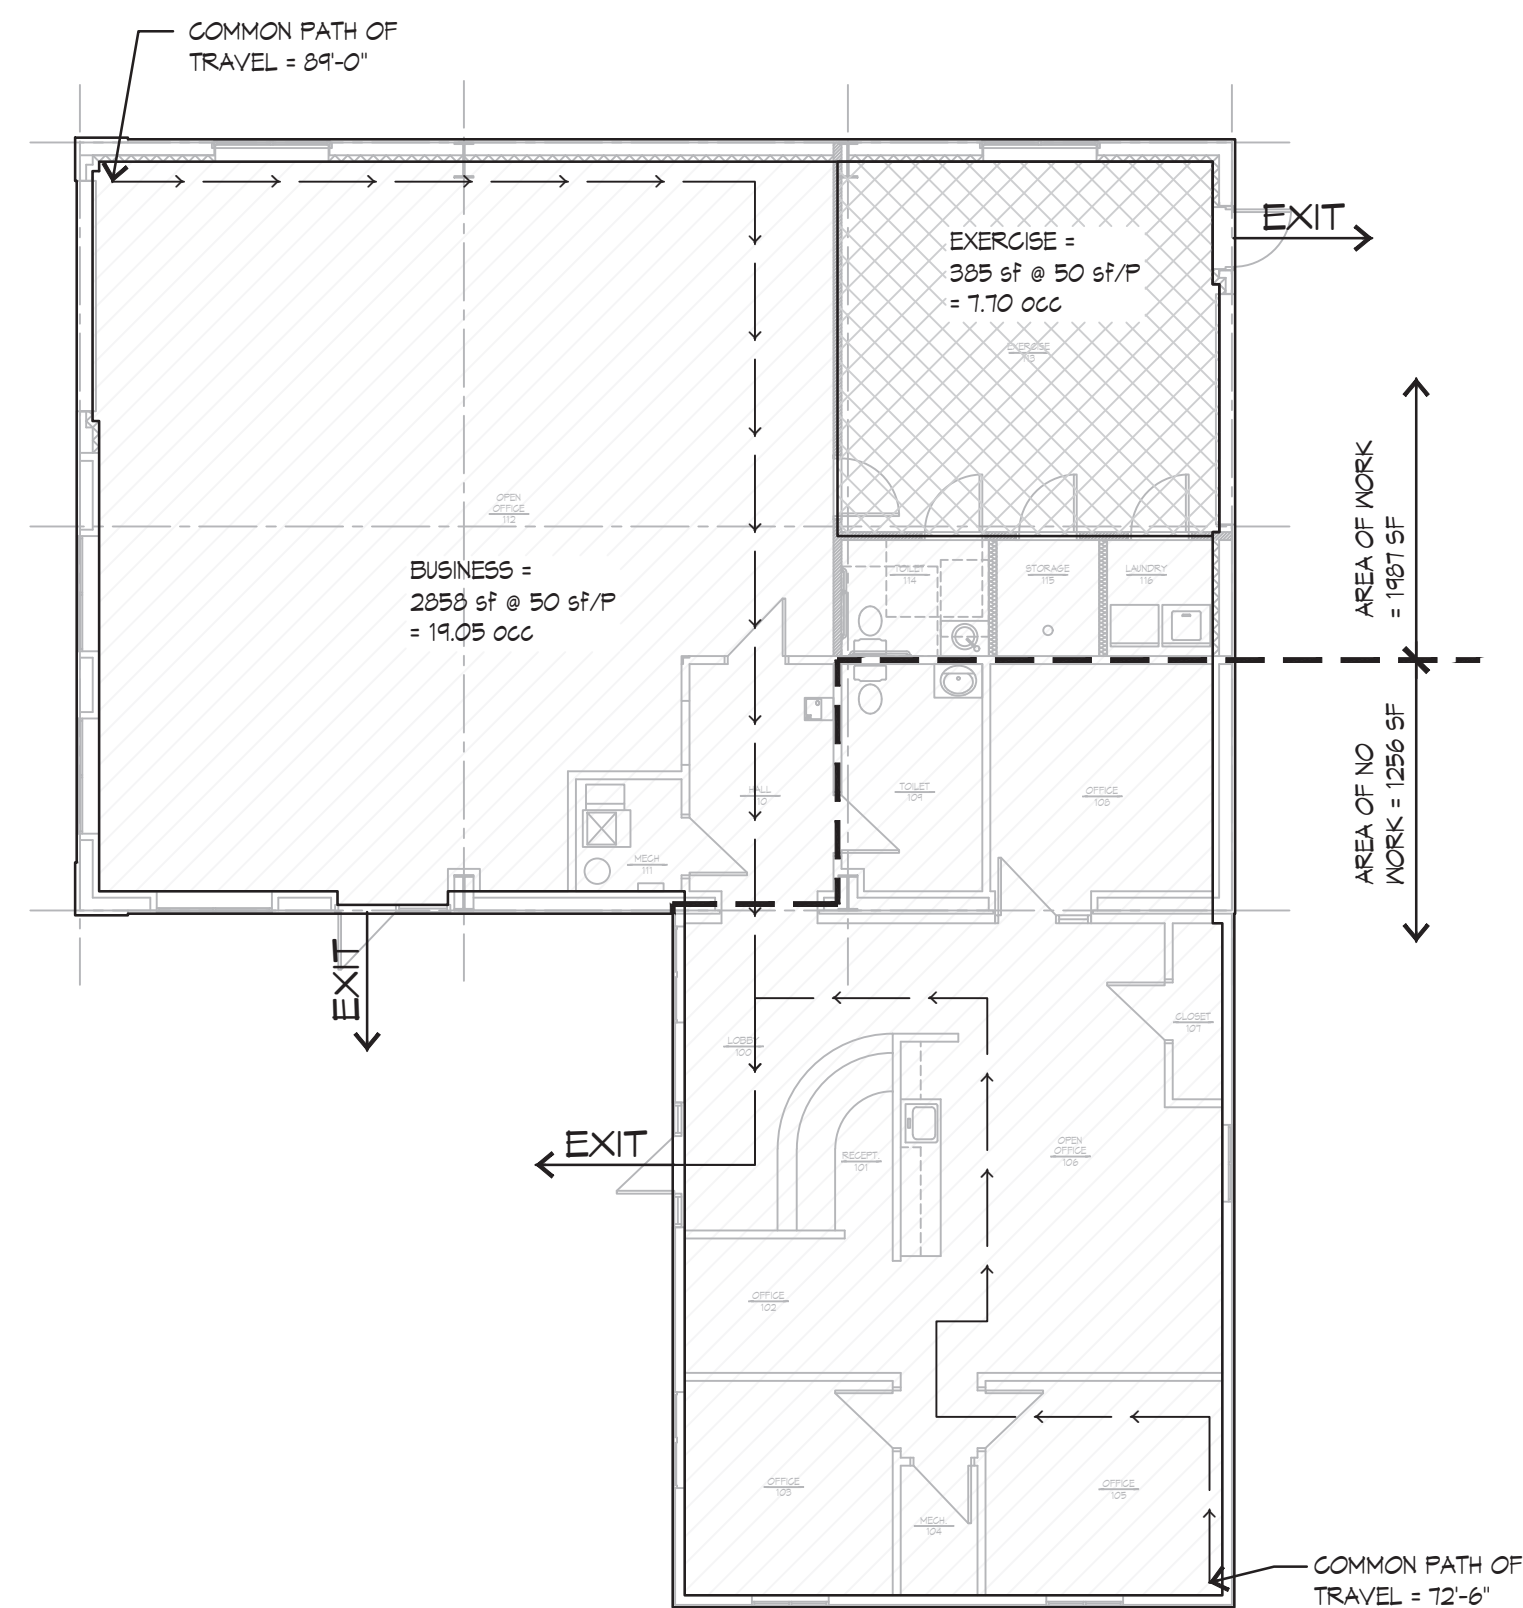

CODE NOTES

- A. ALL CONSTRUCTION FOR THIS PROJECT SHALL BE PERFORMED UNDER THE PROVISIONS OF FOLLOWING LIST OF CODES, AS AMENDED BY THE CITY OF LEES SUMMIT, MISSOURI:
 - A.1. 2010 INTERNATIONAL BUILDING CODE
 - A.2. 2010 INTERNATIONAL PLUMBING CODE
 - A.3. 2010 INTERNATIONAL MECHANICAL CODE
 - A.4. 2010 INTERNATIONAL FUEL GAS CODE
 - A.5. 2010 INTERNATIONAL RESIDENTIAL CODE
 - A.6. 2010 INTERNATIONAL FIRE CODE
 - A.7. 2017 NATIONAL ELECTRICAL CODE
 - A.8. ICC/ANSI A117.1-2017, ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES
- B. USE, OCCUPANCY CLASSIFICATION, AND TYPE OF CONSTRUCTION:
 - B.1. TENANT USE: BUSINESS OFFICE
 - B.2. TENANT OCCUPANCY CLASSIFICATION: B - BUSINESS
 - B.3. BUILDING TYPE OF CONSTRUCTION: VB
- C. TENANT SQUARE FOOT CALCULATIONS:
 - C.1. GROSS TENANT AREA (OUTSIDE FACE) = 3,491 SF
 - C.2. OCCUPIED AREA (INSIDE FACE) 3,243 SF
- D. FIRE PROTECTION SYSTEMS:
 - D.1. AUTOMATIC SPRINKLER SYSTEMS: NONE PROVIDED.
 - D.2. FIRE ALARM AND DETECTION SYSTEMS: NONE PROVIDED.
- E. TENANT OCCUPANT LOAD (TABLE 1003.2.2.2):
 - E.1. $19.05 \times 1.10 = 26.75 \approx 27$ OCCUPANTS
- F. SPACES WITH ONE EXIT OR EXIT ACCESS DOORWAY (TABLE 1006.2.1): COMMON PATH OF EGRESS TRAVEL IN GROUP B OCCUPANCY WITHOUT SPRINKLER SYSTEM IN A SPACE WITH OCCUPANT LOAD OF ≤ 30 , THE LENGTH OF COMMON EGRESS TRAVEL SHALL NOT BE MORE THAN 100 FEET.




**GUY GRONBERG
ARCHITECTS, P.C.**
113 SE 3rd St.
Lee's Summit, MO 64063
Phone 816.524.0818
Fax 816.524.0518



**1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081**

instrument of service by the architect, or under his supervision and is intended for use on this project only. Invariant to the Architecture Forum, Copyright Protection Act of 1990, this document is the property of the architect and is not to be reproduced, copied, or disseminated in any form, including the overall form, arrangement and compilation of the various elements appearing herein, constitute the original, copyrighted work of the Designer/Architect. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Architect is strictly prohibited.

© COPYRIGHT 2025 GUY
GRONBERG ARCHITECTS, P.C.

[illegible]

1. GENERAL REQUIREMENTS 01000
2. The General Conditions of the Contract for Construction of A.I.A. Document A201, latest edition, forms part of this contract as if herein bound.
3. Satisfy all applicable local codes and ordinances. Reference the cover sheet for list of codes.
4. Contractor to pay for Construction Permit Fees, Excise Tax, Tap Fees, Etc. as applicable to the local Municipalities and Utility Companies.
5. Contractor is to meet all Building Owner Standards and Instructions for work.

1. Where a specific manufacturer's product is named including make or model number or other designation, it has been selected to establish the significant qualities related to type, function, dimension, in-service performance, physical properties, appearance, and other characteristics of the product. Unless otherwise indicated, provided the named product or a product that is equal to or exceeds the specified product.
2. Deliver, store, and handle products using means and methods that will prevent damage, deterioration, and loss, including theft. Comply with manufacturer's written instructions.
3. Provide products complete with accessories, trim, finish, fasteners, and other items needed for a complete installation and indicated use and effect.
4. All products, and materials used in conjunction with, are to be installed in strict conformance with manufacturers instruction.

1. General Contractor shall provide all water, light, and power necessary during construction until the completion of the building. All extensions, controls, and equipment beyond the points of temporary service shall be provided under the work of the respective Division requiring the same.
2. The General Contractor shall do all final cleaning of the building construction areas and wash windows.

1. Contractor is to include as part of his scope all cutting and patching required through careful evaluation of the existing site and the construction documents. All holes, damages, defects, etc., in existing surfaces are to be patched to match existing conditions. Contractor shall coordinate the cutting of existing construction necessary to permit installation or performance of other Work.
2. Patching: Patch construction by filling, repairing, refinishing, closing up, and similar operations. Patch with durable seams that are as invisible as possible. Use materials identical to existing materials. If identical materials are unavailable or cannot be used, use materials that, when installed, will match the visual and functional performance of existing materials. For exposed surfaces, use materials that visually match existing adjacent surfaces to the fullest extent possible. Before patching, verify compatibility with and suitability of substrates, including compatibility with existing and new finishes or primers.
3. Cutting: Cut existing construction by sawing, drilling, breaking, chipping, grinding, and similar operations, including excavation, using methods least likely to damage elements retained or adjoining construction. In general, use hand or small power tools designed for sawing and grinding, not hammering and chopping. Cut holes and slots as small as possible, nearly to size required, and with minimum disturbance of adjacent surfaces. Temporarily cover openings when not in use. Provide temporary support of Work to be cut. Cut concrete using a cutting machine, such as an abrasive saw or a diamond-core drill.

REFER TO CUTTING AND PATCHING

METAL STUD FRAMING

1. Metal Studs and Runners: shall be as manufactured by Dietrich, Inryco/Milcor, USC, or approved equal. Studs shall be sized as indicated on the drawings and of gauge recommended by the manufacturers literature. Double studs at door jambs shall be 20 gauge minimum. Standard stud spacing at no more than 16" O.C. unless otherwise noted on drawings.
2. At all walls indicated to extend to underside of decking provide Dietrich SLP-TRK slotted deflection track. Install and finish per manufacturer's recommendations.

1. Each piece of framing lumber shall be identified by the trademark of an approved inspection agency or association. Wood framing and all rough carpentry items shall be installed in accordance with UBC and/or FHA requirements whichever is most restrictive.

1. Where insulating materials listed below will not be covered with gypsum board substitute specified insulation w/ product of same thickness and R-value and similar facing, but such shall have a flame spread rating of 25 or less and a smoke developed rating of 50 or less when tested in accordance with ASTM E84 unless more stringent requirements are listed for a specific product.
2. Insulation Schedule
 - 2.1. Exterior Walls: Unfaced batts of fiberglass vapor barrier in thickness to match stud cavity depth
 - 2.2. Gaps and voids around door and window areas and in built up wood lintels: Minimal expanding foam insulation shall be Dow Chemical Great Stuff. It is to be Tack Free in 20 minutes and with full cure in 8 hours at room temperature and 50% relative humidity. It is to be paintable and stainable.
 - 2.3. Interior non-loadbearing walls: Unfaced Fiberglass Batts - Certainted CertaPRO AcoustaTherm Batts in thickness to fill entire cavity.

1. Mildew-Resistant Silicone Rubber Sealant: Silicone rubber-based, one part elastomeric sealant, complying with FS TT-5-0021543, Class A, compounded specifically for mildew resistance and recommended by manufacturer for interior joints in wet areas; passing ANSI A136.1 test for mold growth.
2. Silicone Sealant: One-part nonacid-curing silicone sealant complying with ASTM C420; Type S, Grade NS, Class 25, paintable, for uses at casings, window casings and hollow metal to drywall and masonry.
3. Joints and spaces to be caulked shall be clean, dry and free of dust, loose mortar or other foreign materials. After joints have been filled, they shall be neatly tooled to eliminate air pockets or voids and to provide a smooth, neat appearing surface.
4. Non-Elastomeric Sealants and Caulking Compounds: 1-component acrylic sealant: FS-TT-5-00230, Class B, Type 11, solvent based solids 95% acrylic for uses at exterior window and door frame perimeters and flashing

1. Single swing interior doors shall be solid core premium grade flush slab doors prepped to receive paint finishes. Comply with requirements of ANSI/NFMA I.S. 1 and Section 1400 of AWI "Architectural Woodwork Quality Standards" except as otherwise indicated. Coordinate stain color with interior designer.

1. Provide finish hardware for all doors in project. The Contractor shall verify all keying requirements with owner prior to installation. Finish to be 26d. Hardware mounting heights by the door and hardware institute "Recommended Locations for Builders Hardware". Comply with all ADA requirements for hardware.

1. Materials shall meet the following standards:
 - a. Gypsum Wallboard - ASTM C36
 - b. Nails - ASTM C380
 - c. Metal Accessories - ASA A97.1
 - d. Water Resistant Gypsum Backing Board - ASTM C127B (paragraph 6.1)
2. Use gypsum board fasteners that are recommended by gypsum board manufacturer except as otherwise indicated.
3. Furnish and install all trim accessories, adhesives and joint treatments per manufacturer's recommendations.
4. All gypsum board to be finished to Level 4 unless noted otherwise.
5. Schedule: (basis of design)
 - 5.1. Interior side of exterior walls: $\frac{5}{8}$ " Gold Bond XP Gypsum Board. Gypsum Board is to be installed from floor to underside of deck above.
 - 5.2. Interior partitions, ceilings and soffits - general: $\frac{5}{8}$ " Gold Bond Gypsum Board.
 - 5.3. Interior partitions in wet areas/toilet rooms: $\frac{5}{8}$ " Gold Bond XP Gypsum Board.
 - 5.4. Interior partitions to receive wall tile: $\frac{5}{8}$ " Gold Bond EXP Tile Backer
 - 5.5. Where called out to receive sound board: $\frac{5}{8}$ " Gold Bond Sound Break gypsum board. When multiple layers are indicated all joints are to be staggered.

1. Patch, level and prepare all floors as recommended by flooring manufacturer for each type of flooring to be placed. Use trowelable leveling and patching compound to fill cracks, holes, and depressions in substrates. Trowelable Leveling and Patching Compounds shall be of Latex-modified portland cement based or blended hydraulic cement based formulation provided or approved by floor covering manufacturer for applications indicated.
2. Transitions between floor finishes: Floor finishes are to be tightly butted together (unless edge protection is specified or is required by the manufacturer). At all transitions where finished floor height of the flooring is higher than adjacent floor finish, raise adjacent flooring with **ROPPE SUBLEVELER TS-1** so floor heights are equal. Where flooring is to be tightly butted against ceramic or porcelain tile in addition to subleveler installation beneath the thinner floor material, edge protection is to be provided on tile as indicated in the Finish Legend.

1. Paint shall be as manufactured by Sherwin Williams Paints or approved equal.

1. **General:** Protect adjacent and underlying surfaces. Remove or mask electrical plates, hardware, light fixture trim, escutcheons, and fittings prior to preparing surfaces of finishing. Correct defects and clean surfaces capable of affecting work of this section. Seal marks that may bleed through surface finishes with compatible sealer.


2. **Galvanized Steel:** Remove surface contamination and oils and wash with solvent.
3. **Uncoated Ferrous Metals:** Remove grease, mill scale weld splatter, dirt and rust. Where heavy coatings of scale are evident, remove by hand or power tool wire brushing or sandblasting; wash with solvent. Apply treatment of phosphoric acid solution, ensuring weld joints, bolts and nuts are similarly cleaned. Spot Prime paint after repairs.
4. **Shop primed Ferrous Metals:** Sand and scrape to remove loose primer and rust. Feather edges to make patches inconspicuous. Clean with solvent. Prime bare steel surfaces.
5. **Other existing Surfaces:** Remove loose, flaking, powdery, and peeling paints. Light sand painted surfaces. Fill holes, cracks, depressions and other imperfections with compatible patching compound; sand flush with surface. Remove oil, grease, and wax by scraping; solvent wash and thoroughly rinse. Remove rust by wire brushing to expose base metal.

1. Paint all new and existing interior gypsum board walls:
 - 1.1. 1 ct. PrepRite 200 Latex Primer and
 - 1.2. 2 cts. ProMar 200 Int. Latex Eg-Shel
2. Paint all new and existing interior gypsum board walls in wet areas (Toilet and Janitor Rooms):
 - 2.1. 1 ct. PrepRite 200 Latex Primer and
 - 2.2. 2 cts. Waterbased Catalyzed Epoxy
3. Interior gypsum board ceilings and soffits (unless noted otherwise):
 - 3.1. 1 ct. PrepRite 200 Latex Primer
 - 3.2. 2 cts. ProMar 200 Int. Latex Flat
4. Interior and Exterior Ferrous metal and wood doors (metal frames, wood doors, exposed steel structure, misc. metal):
 - 4.1. Touch up factory prime coat with compatible Metal Primer or
 - 4.2. 1 ct. Sprayed All Surface Enamel oil Primer
 - 4.3. 2 cts. Sprayed ProMar 200 Int. Alkyd Eg-Shel Enamel

1. Provide fire extinguishers as indicated per plan. Fire extinguisher shall be Cosmic BE (2A,10B,C) by JLT Industries or approved equal. Cabinets to be Ambassadors by JLT Industries or approved equal, Not Fire-Rated, Tub - 10 1/2 x 24 x 5 1/2 inches. Trim Material - Steel, white epoxy primer finish, Trim Style Semi recessed 3" rolled edge. Door Style - Vertical Duo Panel with pull handle, Door Glazing - Clear Safety Glass, with Die Cut Letters - Vertical Red Reverse.

COORDINATE EQUIPMENT INSTALLATION WITH OWNER AND OWNER'S EQUIPMENT SUPPLIER


NO WORK THIS SECTION



1. PATCH, LEVEL AND PREPARE ALL FLOORS AS RECOMMENDED BY FLOORING MANUFACTURER FOR EACH TYPE OF FLOORING TO BE PLACED. USE TROWELABLE LEVELING AND PATCHING COMPOUND TO FILL CRACKS, HOLES, AND DEPRESSIONS IN SUBSTRATES. TROWELABLE LEVELING AND PATCH COMPOUNDS SHALL BE OF LATEX-MODIFIED, PORTLAND CEMENT BASED OR BLENDED HYDRAULIC CEMENT BASE FORMULATION PROVIDED OR APPROVED BY FLOOR COVERING MANUFACTURER FOR APPLICATIONS INDICATED.
2. INTERIOR FINISHES MUST CONFORM TO THE GOVERNING CODE FOR "GLASS III" MAX 25 FOR SMOKE DENSITY CLASSIFICATION. MAX FLAME SPREAD OF 200
3. COLOR OF ALL LIGHT SWITCHES, RECEPTACLES AND PLATE COVERS TO BE SELECTED BY OWNER.
4. PAINTING CONTRACTOR SHALL EXAMINE ALL SURFACES AFTER COMPLETION OF WORK OF ALL TRADES AND PROVIDE NECESSARY "TOUCH UP" PAINTING AND PATCHING. HE SHALL IMMEDIATELY REMOVE ANY PAINT SPILLAGE OR SPLATTER.
5. ALL PAINTING WORK SHALL BE DONE BY SKILLED WORKERS USING EITHER BRUSHES OR ROLLERS. POOR WORKMANSHIP WILL NOT BE ACCEPTED. ALL MATERIALS SHALL BE EVENLY SPREAD, SMOOTHLY FLOINED ON AND FREED FROM RUNS, BUBBLES, CRACKLING OR OTHER DEFECTS. FINISHED SURFACES SHALL BE UNIFORM IN COLOR, GLOSS, SHEEN AND MATTE FINISH AND FREE FROM BRUSH MARKS, BRISTLES, LINT OR DUST PIMPLES.

[illegible]

PT2 PAINT - SHERWIN WILLIAMS WATERBASED CATALYZED EPOXY



1. PROVIDE WATER CLOSET WITH SEAT HEIGHT BETWEEN 17 AND 19 INCHES MEASURED TO TOP OF THE SEAT. FLUSH CONTROLS SHALL BE LOCATED ON THE OPEN SIDE OF THE WATER CLOSET. CENTERLINE OF WATER CLOSET SHALL BE 16" TO 18" FROM THE SIDE WALL.
2. PROVIDE LAVATORY WITH RIM MOUNTED AT 34 INCHES MAXIMUM ABOVE THE FINISHED FLOOR OR GROUND. BOTTOM OF APRON TO BE 29 INCHES MINIMUM ABOVE THE FINISH FLOOR OR GROUND. FAUCET SHALL BE OPERABLE WITH ONE HAND AND SHALL NOT REQUIRE TIGHT GRASPING, PINCHING, OR TWISTING OF THE WRIST. WATER SUPPLY AND DRAIN PIPES UNDER LAVATORY SHALL BE INSULATED OR OTHERWISE CONFIGURED TO PROTECT AGAINST CONTACT. THERE SHALL BE NO SHARP OR ABRASIVE SURFACES UNDER LAVATORY. THE CENTERLINE OF THE LAVATORY SHALL BE A MINIMUM OF 15" FROM THE SIDE WALL.
3. PROVIDE MIRROR MOUNTED 40" MAXIMUM TO BOTTOM OF REFLECTIVE SURFACE.
4. PROVIDE TOILET PAPER DISPENSER. TOILET PAPER DISPENSER TO BE 1 INCHES FROM RIM OF TOILET TO CENTER OF TOILET PAPER ROLL (IN PLAN HORIZONTAL). TOILET PAPER TO BE 19" MINIMUM ABOVE FINISHED FLOOR.
5. PROVIDE GRAB BARS AS FOLLOWS: SIDE HORIZONTAL GRAB BAR TO BE 42 IN MIN LONG, 12" FROM BACK WALL, AND 33"-36" AFF. SIDE VERTICAL GRAB BARS TO BE 18" MIN LONG, 12" FROM BACK WALL, AND 40" AFF TO BOTTOM OF BAR. REAR HORIZONTAL GRAB BAR TO BE 36" MIN LONG, 6" MAX FROM SIDE WALL, AND 33"-36" AFF. ALL GRAB BARS TO HAVE 1/2" MAX DIA. AND 1/2" OFFSET FROM WALL.
6. SOAP AND PAPER TOWEL DISPENSERS (IF PROVIDED) TO BE INSTALLED AT 34" AFF TO SOAP SPOUT OR SOAP DISPENSER LOCATION.
7. PROVIDE ON EXTERIOR LATCH SIDE OF DOOR MATTE FINISH TOILET ROOM SIGN 60" A.F.F. WITH BRAILLE AND WITH RAISED CONTRASTING LETTERS 3/8" TO 2" TALL WITH SERIFS.
8. ALL WALL SURFACES ARE TO BE SCRUBABLE. PAINT WALLS WITH TWO PART EPOXY PAINT, OR PROVIDE OTHER SCRUBABLE SURFACE.

(F01)	INSTALL AND FINISH ONE LAYER OF 3/8" GYPSUM BOARD ON EXISTING WALL FRAMING.
(F02)	AT WINDOW OPENINGS RETURN AND FINISH JAMBS AND HEAD WITH 3/8" GYPSUM BOARD. PROVIDE ADDITION FRAMING AS NEEDED. PROVIDE PLASTIC LAMINATE GLAZ PLYNGOOD SILL WITH 1" HIGH FRONT LIP.
(F03)	EXTEND WALL FROM TOP OF EXISTING WALL TO UNDERSIDE OF STRUCTURE ABOVE WITH 3/8" 20 GAUGE MTL. STUDS @ 24" O.C. WITH 3/8" GYPSUM BOARD ONE SIDE AND 3/8" UNFACED ACOUSTICAL BATTS. PROVIDE DEEP LEAF DEFLECTION TRAP. INSTALL PER MANUFACTURERS INSTRUCTIONS.
(F04)	PROVIDE NEW DARK BRONZE ALUMINUM AND TEMPERED GLASS OVERHEAD GARAGE DOOR. COORDINATE PRODUCT SELECTION WITH OWNER.
(F05)	FIRE EXTINGUISHER AND CABINET PER SPECIFICATIONS.
(F06)	EXISTING TO REMAIN WALL MOUNTED FIRE EXTINGUISHER.



**1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081**

This drawing has been provided as an instrument of service by the architect, under his supervision and is intended for use on this project only. Pursuant to the Architectural Works Copyright Protection Act of 1990, the architect hereby reserves all rights and design, including the overall form, arrangement and composition of spaces and elements appearing herein, constitute the original, copyrighted work of the architect. No part of this drawing may be reproduced or disclosure of information contained herein without prior written consent of the Architect is strictly prohibited.

© COPYRIGHT 2025 GUY
GRONBERG ARCHITECTS, P.C.

[illegible]

A3

[illegible]

1. PAINT EXISTING DOOR AND FRAME.
2. IN EXISTING TO REMAIN DOOR PROVIDE NEW VIEW GLASS LITE TO MATCH DOOR TYPE 2.

NOTE: AT CONTRACTOR OPTION HARDWARE RECLAIMED PER DEMOLITION PLAN
NOTE 'DO3' MAY BE USED PROVIDED IT WILL FUNCTION LIKE THE NEW ITEMS
SPECIFIED BELOW.

Architectural floor plan of the second floor. The plan shows various rooms and their associated CO2 and CO4 sensors. The rooms and their sensor locations are as follows:

- OPEN OFFICE 112 (CO1):** Located in the center of the floor. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- EXERCISE 113 (CO1):** Located in the top right corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- TOILET 114:** Located in the bottom left corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- OBTORASEO 115:** Located in the bottom right corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- LAUNDRY 116:** Located in the bottom right corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- HALL 110:** Located in the bottom center. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- TOILET 109:** Located in the bottom left corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.
- OFFICE 108:** Located in the bottom right corner. CO1 is located in the center of the room. CO2 is located in the top left corner. CO3 is located in the bottom right corner. CO4 is located in the top right corner.

1 FLUSH SOLID CORE DOOR PREPPED TO RECEIVE PAINT

2 FLUSH SOLID CORE DOOR PREPPED TO RECEIVE PAINT

3 GALVANIZED METAL FLUSH DOOR WITH POLYURETHANE CORE PREPPED TO RECEIVE PAINT

A KNOCK DOWN HOLLOW METAL FRAME TO MATCH EXISTING FRAMES

B EXTERIOR GALVANIZED FULLY WELDED METAL FRAME - PAINT

9'-0"

ELEVATION OF CEILING ABOVE FINISHED FLOOR.

EXISTING TO REMAIN ACOUSTICAL CEILING TILES AND
EXPOSED T GIRD

3/8" GYP/SPK BOARD ON 3/8" METAL STUD FRAMING AT 16"
O.C.

125A UNISTRUT P3300 SURFACE MOUNTED TO UNDERSIDE
OF PURLINS. PRIOR TO INSTALLATION SPRAY FINISH WITH
WHITE PAINT.

- (C01) NO CEILING THIS ROOM. EXPOSED TO STRUCTURE ABOVE.
- (C02) EXISTING TO REMAIN OVERHEAD DOOR TRACKS, TRACK SUPPORTS, OPENER AND OPENER TROLLEY TRACK.
- (C03) EXPOSED GALVANIZED SPIRAL DUCTWORK PER MECHANICAL DRAWINGS. SUSPENDED DUCTWORKS BE HUNG FROM UNISTRUT MOUNTED TO UNDERSIDE OF ROOF PURLIN. BOTTOM OF DUCTWORK TO BE INSTALLED ABOVE OVERHEAD DOOR TRACK AT NE CORNER OF SPACE
- (C04) SUSPENDED LIGHT FIXTURES TO BE HUNG FROM UNISTRUT MOUNTED TO UNDERSIDE OF ROOF PURLIN.
- (C05) SURFACE MOUNTED LIGHT FIXTURES TO BE ATTACHED TO UNISTRUT MOUNTED TO UNDERSIDE OF ROOF PURLIN.
- (C06) WALL MOUNTED MINI-SPLIT SYSTEM ABOVE WINDOW PER MECHANICAL DRAWINGS.

1 CEILING PLAN
1/4"=1'-0"



GENERAL PROVISIONS:

A. PROVIDE ALL LABOR, MATERIALS, EQUIPMENT, NECESSARY FOR THE COMPLETE INSTALLATION OF THE PLUMBING AND MECHANICAL SYSTEMS OUTLINED.

B. OBTAIN ALL PERMITS, FEES, LICENSES, INSPECTIONS, AND CERTIFICATES OF COMPLIANCE OR APPROVAL, AS REQUIRED BY THE AUTHORITIES.

C. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH ALL APPLICABLE LAWS, CODES AND REGULATIONS OF THE GOVERNMENTAL BODIES HAVING JURISDICTION OVER THE SITE.

D. ALL TESTING REQUIRED BY AUTHORITIES SHALL BE CONSIDERED PART OF THIS WORK.

E. DURING CONSTRUCTION, ALL FUTURES, EQUIPMENT, PIPE, DUCT, ETC. SHALL BE COVERED, PLUGGED OR CAPPED AS REQUIRED TO KEEP CLEAN AND UNDamaged. ALL Damaged ITEMS SHALL BE RESTORED TO ORIGINAL CONDITION OR REPLACED. ALL PROTECTIVE COVERINGS SHALL BE REMOVED BEFORE FINAL ACCEPTANCE.

F. PROVIDE ALL NECESSARY CUTTING AND PATCHING OF WALLS, FLOORS, CEILINGS, AND ROOFS AS NECESSARY. PATCH AROUND ALL OPENINGS SHALL MATCH ADJACENT AREA. COORDINATE ALL ROOFING WORK WITH OWNER OR RESPONSIBLE PARTY, SO THAT THE EXISTING ROOFING WARRANTY WILL BE MAINTAINED.

G. CONTRACTOR SHALL GUARANTEE ALL WORK AND MATERIALS AGAINST DEFECTS FOR A PERIOD OF ONE YEAR FROM FINAL ACCEPTANCE.

2. OPERATION AND MAINTENANCE MANUALS:

A. DURING THE COURSE OF CONSTRUCTION, COLLECT AND COMPILE OPERATING INSTRUCTIONS, WIRING DIAGRAMS, CATALOG CUES, LUBRICATION AND PREVENTIVE MAINTENANCE INSTRUCTIONS, PARTS LISTS, ETC. FOR ALL EQUIPMENT FURNISHED UNDER THIS CONTRACT.

B. ALL LITERATURE AND INSTRUCTIONS SHIPPED WITH THE EQUIPMENT SHALL BE SAVED FOR INCLUSION IN THE OPERATION AND MAINTENANCE MANUALS.

C. ALL LITERATURE LISTED ABOVE AND ALL PAPERS LISTING WARRANTIES, ETC., SHALL BE BOUND IN A 3-RING BINDER AND LABELED WITH THE PROJECT NAME, ADDRESS, ARCHITECT, ENGINEER, CONTRACTORS, ETC.

3. MANUFACTURERS:

A. MANUFACTURERS, MODEL NUMBERS, ETC. INDICATED OR SCHEDULED ON THE DRAWINGS SHALL BE INTERPRETED AS HAVING ESTABLISHED A STANDARD OF QUALITY AND SHALL NOT BE CONSTRUED AS LIMITING COMPETITION. ALTERATIONS, FIXTURES, ETC. OF EQUAL QUALITY BY MANUFACTURERS SHALL BE ACCEPTABLE. SUBJECT TO STRUCTURAL AND ELECTRICAL CONSTRAINTS OF THE PROJECT DESIGN, UNLESS NOTED OTHERWISE.

4. MOTORS:

A. PROVIDE THEATER, OVERLOAD PROTECTION FOR EACH MOTOR PROVIDED BY THIS WORK.

5. TESTING, BALANCING, AND CLEANING:

A. ALL PIPING SHALL BE TESTED FOR LEAKS BEFORE BEING CONCEALED IN WALL CONSTRUCTION OR COVERED WITH INSULATION.

B. SEWER AND VENT PIPING SHALL BE HYDROSTATICALLY TESTED WITH NO LESS THAN 10 FEET OF HEAD FOR A PERIOD OF NOT LESS THAN 15 MINUTES, PER THE LOCAL PLUMBING CODE, WITH NO LEAKS.

C. DOMESTIC WATER PIPING SHALL BE HYDROSTATICALLY TESTED AT A PRESSURE OF NOT LESS THAN 1-1/2 TIMES THE OPERATING PRESSURE, BUT NOT LESS THAN 40 PSI, FOR A PERIOD OF NOT LESS THAN 2 HOURS, WITH NO LEAKS.

D. NATURAL GAS PIPING SHALL BE PNEUMATICALLY TESTED AT A PRESSURE OF NOT LESS THAN 1-1/2 TIMES THE OPERATING PRESSURE, BUT NOT LESS THAN 50 PSI, FOR A PERIOD OF NOT LESS THAN 2 HOURS, WITH NO LEAKS.

E. DUCTWORK AND PIPING SHALL BE BALANCED BY QUALIFIED INDEPENDENT BALANCING PERSONNEL, WHO HAVE PREVIOUS EXPERIENCE WITH BALANCING PROCEDURES AND ARE CERTIFIED BY THE ASSOCIATED AIR BALANCE SOCIETY (AASB) OR AN ENVIRONMENTAL BALANCING BUREAU (ENBB).

1) BALANCING SHALL INCLUDE THE BALANCING OF THE EQUIPMENT AND AIR DISTRIBUTION SYSTEMS TO PROVIDE DESIGN QUANTITIES INDICATED AND VERIFICATION OF PERFORMANCE OF ALL EQUIPMENT AND AUTOMATIC CONTROL.

2) WITHIN 30 DAYS OF THE COMPLETION OF THE TESTING AND BALANCING WORK, SUBMIT THE TEST AND ADJUSTMENT REPORT BEARING THE SIGNATURE OF THE TEST AND BALANCE ENGINEER. THE REPORTS SHALL BE CERTIFIED PROOF THAT THE SYSTEMS HAVE BEEN TESTED, ADJUSTED, AND BALANCED IN ACCORDANCE WITH THE REFERENCED STANDARDS. ARE AN ACCURATE REPRESENTATION OF HOW THE SYSTEMS HAVE BEEN INSTALLED AND ARE OPERATING. REPORTS SHALL BE BOUND IN A VINYL BINDER AND THE BINDER LABELED OR MAY BE AN ELECTRONIC PDF SUBMITTAL.

6. PLUMBING:

A. PROVIDE AN APPROVED WATER HAMMER ARRESTOR FOR EACH PLUMBING FIXTURE SUPPLY AS REQUIRED BY FIXTURE MANUFACTURER.

B. ALL EXPOSED WASTE PIPE SHALL BE CHROME PLATED BRASS PIPE, NO FERROUS PIPE.

C. PROVIDE CLEANOUTS AT EACH CHANGE OF DIRECTION AND AT 100 FOOT INTERVALS IN STRAIGHT RUNS.

D. PROVIDE ACCESS PANELS FOR ALL CONCEALED VALVES AND TRAPS.

E. CLEANOUTS:

1) MAIN, TIE FLOOR, JR. SMITH #4410, OR EQUAL.

2) GARAGE TIE FLOOR, JR. SMITH #4420, OR EQUAL.

3) CARPETED FLOOR, JR. SMITH #4430, OR EQUAL.

4) UNFINISHED FLOOR, JR. SMITH #4400, OR EQUAL.

5) WALL, JR. SMITH #4472, OR EQUAL, 2" ABOVE THE FLOOR.

F. PROVIDE DIELECTRIC UNIONS WITH APPROPRIATE END CONNECTIONS TO MATCH THE PIPE SYSTEM IN WHICH INSTALLED (SCREWED, SOLDERED, OR FLANGED). PROVIDE DIELECTRIC UNIONS ON ALL PIPING CONNECTIONS TO HOT WATER HEATERS AND DRINKAGE TANKS.

G. WATER HEATERS:

1) EVERY WATER HEATER SHALL HAVE AN APPROVED MEANS INSTALLED ON THE COLD WATER SUPPLY LINE ABOVE THE EQUIPMENT TO PREVENT SPRINKLING OF A STORAGE WATER HEATER OR TANK.

2) BOTTOM FED WATER HEATERS AND TANKS CONNECT TO WATER HEATERS SHALL HAVE A VACUUM RESIST VACUUM INSTALLED, AS NOTED.

3) STORAGE HEATERS OPERATING ABOVE ATMOSPHERIC PRESSURE SHALL HAVE AN APPROVED PRESSURE RELIEF VALVE AND/OR TEMPERATURE RELIEF VALVE.

H. ALL SEWER PIPING LOCATED INSIDE THE BUILDING SHALL BE INSTALLED WITH THE FOLLOWING SLOPES:

1) INSTALL 2" X 1/2" AND SMALLER PIPE AT 1/4" PER FOOT FALL.

2) INSTALL 3" AND LARGER PIPE AT 1/8" PER FOOT FALL.

3) INSTALL ALL GREASE WASTE PIPING AT 1/4" PER FOOT FALL.

I. ALL SEWER PIPING LOCATED EXTERIOR TO THE BUILDINGS SHALL BE INSTALLED WITH THE FOLLOWING SLOPES:

1) INSTALL 4" AND SMALLER PIPE AT A MINIMUM OF 2% SLOPE.

2) INSTALL 6" AND LARGER PIPE AT A MINIMUM OF 1% SLOPE.

7. PIPING:

A. DOMESTIC COLD, HOT, AND HOT WATER RECIRCULATING (AUGMENTED):

1) TYPE 1: HARD DRAWN COPPER TUBING, ASTM B-88.

2) WROUGHT COPPER SCHEDULED FITTINGS, ASTM A101 (A102) ANSI B12.2 MSS SP-104.

3) MECHANICAL PRESS COPPER FITTINGS FOR USE IN PLUMBING OR MECHANICAL APPLICATIONS, ASME B16.11, ASME B16.51, OR ASME B16.18. MECHANICAL PRESS COPPER FITTINGS SHALL CONFORM TO ASME B16.11 OR ASME B16.51.

4) PE-X, HIGH DENSITY CROSS-LINKED POLYETHYLENE TUBING SHALL BE MANUFACTURED TO THE REQUIREMENTS OF ASTM F855 AND MEET THE STANDARD GRADE HYDROSTATIC PRESSURE RATINGS FROM PLASTICS INSTITUTE IN ACCORDANCE WITH RA-4043.

5) PE-X/A AND PE-X/2225 FITTINGS ANSINSEI/F AND ANSINSEI/F32 STANDARDS FOR POTABLE WATER APPLICATIONS AND MEET THE STANDARDS AND MUST BE MARKED WITH "PVC" OR "NSF-61" OR OTHER NSF-APPROVED MARKING. ASTM F2023 FOR USE WITH CHLORINATED WATER.

6) PE-X MECHANICAL CRIMP/SPRINT OR EXPANSION FITTINGS INSTALLED IN ACCORDANCE WITH MANUFACTURERS' INSTRUCTIONS. PIPE SIZES GIVEN ON THE DRAWINGS ARE NOMINAL COPPER PIPE SIZE. INCREASE PE-X PIPE SIZE TO EQUAL OR EXCEED COPPER PIPE INSIDE DIAMETER FOR SUPPLY MAINS.

7) VALVES:

a) TO BE INSTALLED ON THE FIXTURE SUPPLY TO EACH PLUMBING FIXTURE.

b) TO BE INSTALLED ON THE WATER SUPPLY TO EACH APPLIANCE OR MECHANICAL EQUIPMENT.

c) TYPES:

1) GATE VALVE - JOMAR T5-3016 OR EQUAL, LEAD-FREE NSF 61, ANSI B1.01.

2) GLOBE VALVE - JOMAR T610 OR EQUAL.

3) BALL VALVE - JOMAR P100P/9 OR EQUAL, COMPACT LEAD FREE BRASS BALL VALVE. UL842, CSA 337.1-12 & 337.1-12, P, CALIFORNIA CODE AB953, NSF61 ANSI APPROVED.

4) BALL VALVE - JOMAR T1-100E OR EQUAL, UL842, FM, NSF 61, MSS SP-110.

d) THRUST BLOCKS IN ACCORDANCE WITH NFPA 24.

B. LEAD CONTENT OF WATER SUPPLY PIPE AND FITTINGS:

1) PIPE AND PIPE FITTINGS, INCLUDING VALVES AND FITTINGS UTILIZED IN THE WATER SUPPLY SYSTEM SHALL NOT HAVE MORE THAN 8% LEAD CONTENT.

2) PIPE AND FITTINGS, JOINTS, VALVES, FAUCETS, AND FIXTURES UTILIZED TO SUPPLY WATER FOR DRINKING OR COOKING PURPOSES SHALL COMPLY WITH NSF 372 AND SHALL HAVE A WEIGHTED AVERAGE LEAD CONTENT OF 0.25% OR LESS.

C. SANITARY SEWER AND VENTS:

(UNDERGROUND, INTERIOR TO THE BUILDING):

1) ABS PIPE AND FITTINGS, ABS PIPE AND FITTINGS SHALL COMPLY WITH NSF 14, "PLASTICS PIPING SYSTEMS COMPONENTS AND RELATED MATERIALS" FOR PLASTIC PIPING SYSTEMS COMPONENTS, INCLUDING MARKING WITH "NSF-DWV" FOR PLASTIC, DRAIN, WASTE, AND VENT PIPING AND "NSF-SSEW" FOR PLASTIC SEWER PIPING. SOLID-WALL, ABS PIPE ASTM D 2665, DRAIN, WASTE, AND VENT, PVC SOCKET FITTINGS: ASTM D 2686, DRAIN, WASTE, AND VENT PATTERNS AND TIE TO T1 SCHEDULE 40 PIPE. ADESHIVE PIPING: ASTM F 656, SOLVENT CEMENT, ASTM D 2564.

2) HUBLESS CAST IRON SOIL PIPE AND FITTINGS: HUBLESS CAST IRON PIPE AND FITTINGS SHALL BE MANUFACTURED FROM GRAY CAST IRON AND SHALL CONFORM TO ASTM A 888 AND CIP STANDARD 310. HUBLESS COUPLINGS SHALL CONFORM TO CIP STANDARD 310 AND BE CERTIFIED BY NSF® INTERNATIONAL.

3) HUB AND SPOCKET CAST IRON SOIL PIPE AND FITTINGS: HUB AND SPOCKET CAST IRON PIPE AND FITTINGS SHALL BE MANUFACTURED FROM GRAY CAST IRON AND SHALL CONFORM TO ASTM A 74.

D. SANITARY SEWER AND VENTS:

(ABOVE GROUND, INTERIOR TO THE BUILDING):

1) ABS PIPE AND FITTINGS, ABS PIPE AND FITTINGS SHALL COMPLY WITH NSF 14, "PLASTICS PIPING SYSTEMS COMPONENTS AND RELATED MATERIALS" FOR PLASTIC PIPING SYSTEMS COMPONENTS, INCLUDING MARKING WITH "NSF-DWV" FOR PLASTIC, DRAIN, WASTE, AND VENT PIPING AND "NSF-SSEW" FOR PLASTIC SEWER PIPING. SOLID-WALL, ABS PIPE ASTM D 2665, DRAIN, WASTE, AND VENT, PVC SOCKET FITTINGS: ASTM D 2686, DRAIN, WASTE, AND VENT PATTERNS AND TIE TO T1 SCHEDULE 40 PIPE. ADESHIVE PIPING: ASTM F 656, SOLVENT CEMENT, ASTM D 2564.

2) HUBLESS CAST IRON SOIL PIPE AND FITTINGS: HUBLESS CAST IRON PIPE AND FITTINGS SHALL BE MANUFACTURED FROM GRAY CAST IRON AND SHALL CONFORM TO ASTM A 888 AND CIP STANDARD 310. HUBLESS COUPLINGS SHALL CONFORM TO CIP STANDARD 310 AND BE CERTIFIED BY NSF® INTERNATIONAL.

3) HUB AND SPOCKET CAST IRON SOIL PIPE AND FITTINGS: HUB AND SPOCKET CAST IRON PIPE AND FITTINGS SHALL BE MANUFACTURED FROM GRAY CAST IRON AND SHALL CONFORM TO ASTM A 74.

CONDENSATE DRAINS & INDIRECT WASTE (ABOVEGROUND),
POLYVINYLCHLORIDE (PVC) DWV PIPE, SCHEDULE 40, SOLVENT JOINT (INDIRECT WASTE).

F. REFERENCING

- a) ASTM B 280, TYPE ACR, HARD-DRAWN STRAIGHT LENGTHS, AND SOFT-ANNEALED COILS, SEAMLESS COPPER TUBING.
- b) WRUGHTON COMPASS ANSI B12.2, STREAMLINED PATTERN, FITTINGS. BRAZED JOINTS, CLASS A, SIZE 4.8.
- c) CLASSIFICATION B4C (B4C).
- d) TURNING SHALL BE FACTORY CANTED, READY FOR INSTALLATION, AND HAVE ENDS CAPPED TO PROTECT CLEANLINESS OF PIPE INTERIORS PRIOR TO SHIPPING.
- e) SIZE AND INSTALLATION OF PIPE SHALL BE IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS.

G. NATURAL GAS

- a) BLACK STEEL PIPE, SCHEDULE 40, ASTM A53
 - i) PIPE 2" AND SMALLER: 10% LB MALLEABLE IRON, THREADED FITTINGS.
 - ii) PIPE 2" AND SMALLER, VEGE MEAGRIPS FOR HOT WATER AND GAS, CSA-C14, TSXASME E83 FOR USE WITH ASTM A53 SCHEDULE 40 BLACK IRON PIPE.
 - iii) PIPE 2 1/2" AND LARGER, WELDED.
- b) FLUG VALVE: ROCKWELL NORDSTROM FIGURE NO. 142 OR R.O.I.
- c) BALL VALVE, JOMAR 1-X, NSF-61 APPROVALS - UL84Z, FIC, MSS #1-8, MSS SP-110
- d) GAS PIPING LABELING:
 - i) ALL ELEVATED PRESSURE GAS PIPING SHALL BE LABELED EVERY 4 FEET WITH SIGNS INDICATING ELEVATED PRESSURE.
 - ii) GAS PIPING PAINTING:
 - a) IF BLACK STEEL GAS PIPING LOCATED EXTERIOR TO THE BUILDING SHALL BE PRIMED AND PAINTED TO EITHER MATCH EXISTING EXTERIOR WHERE LOCATED OR WITH NEAR EXTERIOR WALL AND PAINTED SAME COLOR WHERE LOCATED ON THE ROOF.
- e) ALL PIPE HANGERS AND SUPPORTS SHALL BE STANDARD PRODUCTS OF GRUNNELL, FEE AND MASON, OR EQUAL, HANGER SPACING SHALL BE IN ACCORDANCE WITH MSS SP-58.

I. SLEEVES

- 1) PROVIDE SET, AND PROPERLY LOCATE PIPE SLEEVES AS REQUIRED FOR THIS WORK. ALL SLEEVES SHALL BE OF SUFFICIENT SIZE TO PERMIT PIPE MOVEMENT DUE TO EXPANSION AND CONTRACTION AND TO ACCOMMODATE PIPE INSULATION.
- 2) INTERFERENCE TESTINGS: 16 GAUGE GALVANIZED STEEL PLATE BETWEEN PIPE AND SLEEVE WITH FIRE SAFING CALKS AT EACH END WITH FIRE RESISTANT SEALANT.
- 3) PROTECT OR COVER, MANUFACTURED PVC SCHEDULE 40 PIPE SLEEVE WITH WATERPROOF SEAL. COMPLY WITH ROOFING CONTRACTOR'S FLASH AS REQUIRED TO PREVENT LEAKAGE THROUGH PARAPETS.
- 4) PROTECTION AGAINST CORROSION: METALLIC PIPING, EXCEPT FOR CAST IRON, DUCTILE IRON AND GALVANIZED STEEL SHALL NOT BE PLACED IN DIRECT CONTACT WITH STEEL FRAMING MEMBERS, CONCRETE, OR CINDER WALLS AND FLOORS OR OTHER MASONRY. METALLIC PIPING SHALL NOT BE PLACED IN DIRECT CONTACT WITH CORRUGATED SHEATHING USED TO PREVENT DIRECT CONTACT SHALL HAVE A THICKNESS OF GREATER THAN .008" AND THE SURFACE SHALL BE MADE OF NON-METALLIC PLASTIC. ANY PIPE THAT PASSES THROUGH A FOUNDATION WALL OR FOOTING SHALL BE PROVIDED WITH A RELIEVING ANGLE, OR A PIPE SLEEVE SHALL BE BUILT INTO THE FOUNDATION WALL. THE SLEEVE SHALL BE TWO TIMES GREATER THAN THE PIPE PASSING THROUGH THE WALL OR FOOTING.
- 5) PLUMBING VENTS: FLASH ROOF VENT INTO ROOFING SYSTEM AS REQUIRED BY THE ROOFING CONTRACTOR TO MAINTAIN EXISTING ROOF WARRANTY. ALL PLUMBING VENT TERMINALS SHALL TERMINATE A MINIMUM OF 12" ABOVE ROOF OR EQUAL TO HEIGHT OF PARAPET, WHICHEVER IS GREATER.

J. PROVIDE CHROME PLATED ESCUTCHEONS ON WALL PIPE ENTERING FINISHED AREAS.

INSULATION AND DUCT LIFTING

- a) ALL INSULATIONS AND ACCESSORIES SHALL HAVE A FIRE HAZARD CLASSIFICATION WITH A FLAME SPREAD RATING OF NOT OVER 25, A FUEL CONTRIBUTION RATING OF NOT OVER 50, AND A SMOKE DEVELOPED RATING OF NOT OVER 50, IN ACCORDANCE WITH NFPA.
- b) PIPE INSULATION - ABOVE CEILING:
 - i) THE PIPING INSULATION USED SHALL HAVE A THERMAL CONDUCTIVITY OF 0.27 BUT FIBERGLASS® OR LESS.
 - ii) THE PIPING INSULATION WITH FACTORY APPLIED VAPOR BARRIER, AS JOINTED FACTORY APPLIED PRESSURE SEALING LONGITUDE LAP JOINT, NO STAPLES, ZESTON PRESUMPTUOUS PVC FITTING
 - iii) INSULATION SHALL BE IN ACCORDANCE WITH MANUFACTURER'S RECOMMENDATIONS.
 - iv) FLEXIBLE CLOSED CELL ELASTOMERIC THERMAL INSULATION, UNSUIT OR PRELUIT WITH PRESSURE SENSITIVE ADHESIVE SYSTEM FOR CLOSURE AND VAPOR SEALING, EQUAL TO ARMSTRONG AF ARMULEX OR ARMAFLEX 2000.
- c) FOR NON CIRCULATING SYSTEMS, THE FIRST 3 FEET OF INLET AND OUTLET PIPING BETWEEN THE TANK AND THE HEAT TRAP INCLUDING THE HEAT TRAP MUST BE INSULATED.
- d) FOR CIRCULATING SYSTEMS, ALL HOT WATER PIPING IN THE CIRCULATION LOOP MUST BE INSULATED AS SPECIFIED BELOW:
- e) INSULATION SCHEDULE:

i) DOMESTIC COLD WATER	1"
ii) DOMESTIC HOT WATER	1" FOR PIPING UP TO 1 1/4", & 1 1/2" FOR PIPING 1 1/2" AND LARGER
i) CONDENSATE PIPES INSIDE BUILDING	1"
ii) REFERENTIARY SUCTION	3/4" FOR PIPING UP TO 1 1/4", & 1" FOR PIPING 1 1/2" AND LARGER

C. EQUIPMENT INSTALLATION

- 1) FLEXIBLE FIBERGLASS, LAISSÉ FIBERGLASS, ASTM C 553, TYPE 1, CLASS B 4, SEMI-RIGID BOARD, WITH FACTORY GLASSMATT REINFORCED ALUMINUM FOIL SERVICE JOINT, VAPOR BARRIER, OVENCURING PIPES AND TANK INSULATION.

D. DUCTWORK: THERMAL INSULATION

- 1) DUCT COVERING: 3/4 LB/FT² FIBERGLASS BLANKET WITH FACTORY APPLIED VAPOR BARRIER AND FACING, THICKNESS AS SCHEDULED, INSTALLATION IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS.
- a) DUCT COVERING SCHEDULE: MINIMUM R-6
 - i) ROUND SUPPLY DUCT
 " |
- ii) OUTDOOR AIR
 " |

- 2) EXPOSED SPIRAL DUCT:
- a) DOUBLE WALL SPIRAL: DOUBLE WALL INSULATED SPIRAL DUCT AND FITTINGS WITH PERFORATED T-FITTERS WITH A VALUE OF 0.27.
- b) SPIRAL DUCT LINING: JOHNS MANVILLE SPRACROUST PLUS ROUNO DUCT LINER SYSTEM, VSD, SD, AND LD SERIES. IT'D AND UP ARETS ASTM A 820/51 FLANGE AND GASKET, 1/2" AND 1/4" MEAF32T-86.1A SMCMA APPLICATION STANDARDS FOR DUCT LINES, NAMA FIBERGLASS DUCT LINER STANDARD "T" THICKNESS, AIR STREAM SIDE COATED, INSTALL PER SMCMA STANDARDS.

E. DUCTWORK:

- a) ALL DUCTWORK, UNLESS OTHERWISE QUALITY, SHALL BE FABRICATED FROM GALVANIZED STEEL SHEET COMPLYING WITH ASTM A 653, LOCKFORMING QUALITY, WITH 30 ZINC COATING IN ACCORDANCE WITH ASTM A 653 AND MILL PHOSPHATIZED FOR EXPOSED LOCATIONS.
- b) WHERE DUCTWORK IS INDICATED TO BE EXPOSED TO VIEW IN OCCUPIED SPACES, PROVIDE MATERIALS WHICH ARE FREE FROM VISUAL IMPERFECTIONS INCLUDING PITTING, SCALE MARKS, ROLL MARKS, STAINS AND DISCOLORATIONS, AND OTHER IMPERFECTIONS, INCLUDING THOSE WHICH WOULD IMPAIR PAINTING.
- c) DUCTWORK: METAL, GAUGES, REINFORCEMENTS, SHALL BE CONSTRUCTED IN ACCORDANCE WITH SMCMA "HVAC DUCT GUIDANCE STANDARDS," LATEST EDITION FOR A 20 INCH WATER GAUGE STATIC PRESSURE.
- d) RECTANGULAR DUCT:
 - i) ELBOWS, UNLESS INDICATED OTHERWISE, SHALL BE CONSTRUCTED WITH CENTERLINE RADIUS OF SQUARE HALF OF SQUARE ELBOW WITH DOUBBLE WALL INSULATION.
 - ii) RETURN AIR ACoustical, ELBOWS AND SOUND BOOTS SHALL BE A SQUARE ELBOW WITH NO TURNING VANES.
- e) SLOPES FOR TRANSITIONS OR OTHER CHANGES IN DIMENSIONS SHALL BE MINIMUM 1 TO 3.
- f) ROUND AND Oval SPIRAL SECT DUCT:
 - i) PROVIDE RADIAL TYPE FITTINGS FABRICATED OF MULTIPLE SECTIONS WITH MAXIMUM 15 DEGREE CHANGE OF DIRECTION PER SECTION, UNLESS SPECIFICALLY DETAILED OTHERWISE.
 - ii) USE 45 DEGREE LATRALS FOR BRANCH TAKEOFF CONNECTIONS, WHERE 90 DEGREE BRANCHES ARE INDICATED PROVIDE CONICAL TYPE TEES.
 - iii) SLOPES FOR TRANSITIONS OR OTHER CHANGES IN DIMENSIONS SHALL BE MINIMUM 1 TO 3.
 - iv) AS AN OPTION, PROVIDE FACTORY FABRICATED DUCT AND FITTINGS WITH DOUBLY INSULATED FABRICATED DUCT AND FITTINGS.
 - v) ELBOWS: ONE PIECE CONSTRUCTION FOR 90 DEGREES AND 45 DEGREE ELBOW 14" AND SMALLER. PROVIDE MULTIPLE CORE CONSTRUCTION FOR LARGER DIAMETERS WITH STANDING SEAM CIRCUMFERENTIAL JOINT.
 - vi) DIVIDED FLOW FITTINGS: 90 DEGREE TEES, CONSTRUCTED WITH SADDLE TAP SPOT WELDED AND BONDED TO DUCT FITTING BODY.
- g) ROUND LONGITUDINAL SEAM DUCT: USE FOR RIGID METAL DUCT ON LEAVING SIDE OF DUCT IN CONCEALED LOCATIONS FOR EXTENSION TO EX FOR DIFFUSERS, UNLESS OTHERWISE INDICATED.
- h) DUCT SIZES SHOWN ON THE DRAWINGS ARE SHEETMETAL SIZES, ALLOWANCE FOR DUCT LINER MAKE WHERE APPLICABLE.

F. INSTALLATION OF METAL DUCTWORK:

- a) GENERAL: ASSEMBLE AND INSTALL DUCTWORK IN ACCORDANCE WITH RECOGNIZED INDUSTRY PRACTICES WHICH WILL ACHIEVE AIR-TIGHT SYSTEMS (MAXIMUM 5% LEAKAGE), WITH NO OBJECTIONABLE NOISE, AND CAPABLE OF PERFORMING INDICATED SERVICE. INSTALL EACH RUN WITH MINIMUM NUMBER OF JOINTS. ALIGN DUCTWORK ACCURATELY WITH THE DESIGN SURFACES SMOOTH. SUPPORT DUCTS RIGIDLY WITH SUITABLE STRAPS, BRACES, HANGERS AND ANCHORS IN ACCORDANCE WITH SMCMA "HVAC DUCT CONSTRUCTION STANDARDS" LATEST EDITION. PROVIDE HANGERS SHALL BE OF THE TYPE WHICH WILL HOLD DUCTS TRUE-TO-SHAPE AND TO PREVENT BUCKLING. SUPPORT VERTICAL DUCTS AT EVERY FOUR.
- b) ADDITIONAL STEEL AND VAPOR BARRIER AS REQUIRED TO ADEQUATELY SUPPORT INSULATED DUCTWORK.
- c) ROUTING: LOCATE DUCTWORK RUNS, EXCEPT AS OTHERWISE INDICATED, VERTICALLY AND HORIZONTALLY AND AVOID DIAGONAL RUNS WHERE POSSIBLE. LOCATE DUCTWORK AS SHOWN BY DIAGRAMS, DETAILS AND NOTATIONS OR, IF NOT OTHERWISE INDICATED, RUN DUCTWORK IN SHORTEST ROUTE WHICH DOES NOT OBSTRUCT USABLE SPACE OR BLOCK ACCESS FOR SERVISING MECHANICAL SHAFTS. FOLLOW WALL CONSTRUCTION OR ABOVE SUPERSEDING REQUIREMENTS TO ENCASE HORIZONTAL RUNS IN SOLID PARTITIONS, EXCEPT AS SPECIFICALLY SHOWN. COORDINATE LAYOUTS WITH SUSPENDED CEILING AND LIGHTING FIXTURES AND SIMILAR FINISHES.
- d) DO NOT ROUTE DUCTWORK THROUGH ELECTRICAL, EQUIPMENT SPACES AND ENCLOSURES, UNLESS INDICATED OTHERWISE.
- e) PENETRATIONS:
 - i) WHERE DUCTS PASS THROUGH INTERIOR PARTITIONS OR EXTERIOR WALLS, AND ARE EXPOSED TO VIEW, CONCAVE SPACE BETWEEN OPENING AND DUCT OR DUCT INSULATION WITH SHEET METAL FLANGES OF SAME GAUGE AS DUCT, OVERLAP OPENING AREA SIDES BY AT LEAST 1 1/2". FASTEN TO DUCT AND WALL.
 - ii) WHERE DUCTS PASS THROUGH FIRE-RATED WALLS, FLOORS, WALL OR PARTITIONS, PROVIDE FIRESTOPPING BETWEEN DUCT AND WALL.
- f) COORDINATION: COORDINATE DUCT INSTALLATIONS WITH INSTALLATION OF ACCESSORIES, DAMPERS, COIL FRAMES, EQUIPMENT, CONTROLS, AND OTHER ASSOCIATED WORK OF THE DUCTWORK SYSTEM.
- g) INSTALLATION: INSTALL METAL DUCTWORK IN ACCORDANCE WITH SMCMA "HVAC DUCT CONSTRUCTION STANDARDS," LATEST EDITION.

F. EQUIPMENT CONNECTIONS

- 1) CONNECT METAL DUCTWORK TO EQUIPMENT AS INDICATED, PROVIDE FLEXIBLE CONNECTION FOR EACH DUCTWORK CONNECTION TO EQUIPMENT MOUNTED ON VIBRATION ISOLATORS, AND/OR EQUIPMENT CONTAINING ROTATING MECHANISM. PROVIDE ACCESS DOORS AS REQUIRED.
- 2) SEAL: ALL CONCAVED DUCTWORK JOINTS WITH NON-HARDENING, NON-AGING ELASTIC SEALANT, AS RECOMMENDED FOR SEALING SEAMS AND JOINTS IN DUCTWORK. OIL BASED CAULKING AND GLAZING COMPOUNDS SHALL NOT BE ACCEPTABLE. DUCTS SHALL BE SEALED TO THE CLASS LEVEL LISTED BELOW.

UNCONDITIONED SPACES	CLASS B	CLASS A	CLASS C
----------------------	---------	---------	---------

1. FLEXIBLE DUCT:
A. ATCO #806 (R-6) OR EQUAL
2. FACTORY APPLIED INSULATION AND VAPOR BARRIER
3. MAXIMUM LENGTH OF 5' 0"

13. FLUES AND ACCESSORIES:
A. FLUE FOR GAS FIRED CONDENSING WATER HEATER OR FURNACE SHALL BE AS RECOMMENDED BY THE MANUFACTURER
B. CONDENSING MANUFACTURER: FLUES SHALL BE SCHEDULE 40, PVC OR CPVC PIPE WITH THE MANUFACTURER'S INSTALLATION REQUIREMENTS
C. PROVIDE MANUFACTURER'S STANDARD ACCESSORY ITEMS INCLUDING BIRD PROOF TOP, STORM COLLAR, ROOF FLASH, ETC. AS REQUIRED FOR A COMPLETE INSTALLATION. ROOF FLASHES THROUGH THE BUILDING ROOF SHALL BE SUITABLE FOR USE WITH THE ROOF PENETRATION.

14. EXHAUST FANS:
A. CENTRIFUGAL CEILING EXHAUSTERS SHALL BE ELECTRICALLY POWERED CENTRIFUGAL TYPE FAN SUITABLE FOR MOUNTING ON THE CEILING WITH A PERFORATED, OF WHITE METAL, GRILLE WITH A THREADED ATTACHMENT FOR EASY ACCESS TO FAN HOUSING. UNIT SHALL CONSIST OF A GALVANIZED STEEL HOUSING WITH ACoustICAL INSULATION AND SHALL INCLUDE AN INWARDLY DISCHARGING BACKFLOW DAMPER ON FAN DISCHARGE. MOTOR SHALL BE A PERMANENT SPLIT CAPACITOR TYPE MOTOR, PERMANENTLY LUBRICATED, WITH THERMAL OVERLOAD PROTECTION. PROVIDE DISCONNECT SWITCH OR OTHER MEANS OF DISCONNECT AT MOTOR IN FAN HOUSING.

15. FURNACE AND CONDENSING UNIT:
A. CONDENSING FURNACES:
1. GAS FIRED FURNACE SHALL BE FACTORY ASSEMBLED, PRE-WIRED UNIT CONSISTING OF SHEETMETAL CASING, SUPPLY FAN, GAS FIRED HEAT EXCHANGER, AND CONTROLS. CAPACITY SHALL BE AS SCHEDULED.
2. THE PRIMARY HEAT EXCHANGER SHALL BE ALUMINIZED STEEL CONSTRUCTION WITH A STAINLESS STEEL SECONDARY HEAT EXCHANGER.
3. THE FURNACE SHALL BE OF THE CONDENSING TYPE, UTILIZING A SEALED COMBUSTION CHAMBER. UNIT SHALL INCLUDE FINNED CAST IRON HEAT EXCHANGER, ALUMINIZED STEEL EXHAUST DISCHARGE SECTION, AND FINNED STAINLESS STEEL TURBO CONDENSER SECTION.
4. THE UNIT SHALL BE EQUIPPED WITH THE MANUFACTURER'S STANDARD CONTROLS INCLUDING 24 VOLT CONTROL, TRANSFORMER, AUTOMATIC SPARK IGNITION, AUTOMATIC GAS VALVE, THERM, HIGH TEMPERATURE LIMIT SWITCH, AND FAN TIED DELAY RELAY.
5. RETURN AIR INLET ON UNIT SHALL BE PROVIDED WITH A 1" THERMOVAC TYPE FILTER AND SLIDE IN FRAME, MOUNTED ON THE SIDE.
6. FAN SHALL BE A DIRECT DRIVE MULTI SPEED BLOWER, RESISTANTLY MOUNTED IN THE CASING. MOTOR SHALL BE PROVIDED WITH AUTOMATIC THERMAL OVERLOAD PROTECTION.
7. FURNACE SHALL BE A-GA APPROVED.
B. CONDENSING UNIT SHALL BE FACTORY ASSEMBLED AND TESTED AIR COOLED CONDENSING UNIT, CONSISTING OF COMPRESSOR, CONDENSER COIL, FAN MOTOR, REFRIGERANT RESERVOIR, OPERATING CONTROLS, ETC. CAPACITY AND ELECTRICAL CHARACTERISTICS SHALL BE AS SCHEDULED.
1. COMPRESSOR: HERMETICALLY SEALED WITH BUILT-IN OVERLOADS AND VIBRATION ISOLATION. COMPRESSOR MOTOR SHALL HAVE THERMAL AND CURRENT SENSITIVE OVERLOAD DEVICES. INTERNAL HIGH PRESSURE PROTECTION, HIGH AND LOW PRESSURE CUTOFF SWITCHES, START CAPACITOR AND RELAY, 2-POLE CONTACTOR, CRANKCASE HEATER, AND TEMPERATURE ACTUATED SWITCH AND THERM TO PREVENT COMPRESSOR RAMP CYCLE.
2. COIL SHALL BE COPPER TUBING WITH ALUMINUM FINS, COMPLETE WITH LIQUID ACCUMULATOR AND LIQUID SUBCOOLER. UNIT SHALL INCLUDE FLUID DRYER, SIGHT GLASS, COMPRESSOR SERVICE VALVE, LIQUID LINE SERVICE VALVE, AND REFRIGERANT PIPING EXTENDED TO EXTERIOR OF CASING.

16. SINGLE-ZONE MINI SPLIT SYSTEM WITH HEAT PUMP CONDENSING UNIT:
A. AIR HANDLING UNIT SHALL BE FACTORY ASSEMBLED, PRE-WIRED UNIT CONSISTING OF WIRING, PIPING, ELECTRONIC EXPANSION VALVE, AND CONTROLS. CAPACITY SHALL BE AS SCHEDULED.
1. THE UNIT SHALL BE EQUIPPED WITH THE MANUFACTURER'S STANDARD CONTROLS INCLUDING 24 VOLT CONTROL, TRANSFORMER AND A WIRELESS OR WIRED REMOTE CONTROLLER.
2. UNIT SHALL BE EQUIPPED WITH A FILTER THAT IS EASILY REMOVABLE AND WASHABLE.
3. FAN SHALL BE A D.C. MOTOR, CAPABLE OF OPERATING AT 3 FAN GRADES, LOW, MEDIUM AND HIGH. MOTOR SHALL BE PROVIDED WITH THERMAL OVERLOAD PROTECTION.
4. CONNECTIONS: UNIT SHALL BE EQUIPPED WITH LIQUID AND GAS FLARE FITTINGS. UNIT HAVE CONNECTIONS FOR BOTH REFRIGERANT PIPING AND DRAINAGE ON BOTH SIDES OF UNIT. UNIT SHALL OFFER MULTIPLE ACCESS POINTS FOR REFRIGERANT OUTLET PIPES.
B. HEAT PUMP CONDENSING UNIT SHALL BE FACTORY ASSEMBLED, PRE-WIRED AND TESTED AIR COOLED CONDENSING UNIT, CONSISTING OF COMPRESSOR, CONDENSER COIL, FAN MOTOR, REFRIGERANT RESERVOIR, SOLID-STATE DEFROST CONTROL, UTILIZING THERMISTERS, REFRIGERANT RESERVOIR, OPERATING CONTROLS, ETC. CAPACITY AND ELECTRICAL CHARACTERISTICS SHALL BE AS SCHEDULED.
1. HERMETICALLY SEALED COMPRESSOR WITH BUILT-IN OVERLOADS AND VIBRATION ISOLATION. COMPRESSOR MOTOR SHALL HAVE THERMAL AND CURRENT SENSITIVE OVERLOAD DEVICES. INTERNAL HIGH PRESSURE PROTECTION, HIGH AND LOW PRESSURE CUTOFF SWITCHES, START CAPACITOR AND RELAY, 2-POLE CONTACTOR, CRANKCASE HEATER, AND TEMPERATURE ACTUATED SWITCH AND THERM TO PREVENT COMPRESSOR RAMP CYCLE.
2. COIL SHALL BE COPPER TUBING WITH ALUMINUM FINS. A GRILLE GUARD SHALL BE INCLUDED. COIL SHALL BE FACTORY COATED FOR INCREASED CORROSION RESISTANCE.
3. ALUMINUM PROPELLER FAN SHALL BE DIRECT DRIVEN, WITH PERMANENTLY LUBRICATED FAN MOTOR HAVING THERMAL OVERLOAD PROTECTION.
4. UNIT SHALL HAVE AN OPERATING COOLING RANGE OF AT LEAST 55°F TO 122°F AND AN OPERATING HEATING RANGE OF AT LEAST -13°F TO 86°F.

17. CONTROL WIRING:
A. ELECTRICAL WIRING AND WIRING CONNECTIONS REQUIRED FOR THE INSTALLATION OF THE TEMPERATURE CONTROL SYSTEM, SHALL BE PROVIDED BY THIS CONTRACTOR, UNLESS SPECIFICALLY SHOWN ON THE ELECTRICAL DRAWINGS OR SPECIFICATIONS.
B. INSTALL CONTROL WIRING, WITHOUT SPICES BETWEEN TERMINAL POINTS, COLOR CODED, INSTALL IN NEAT WORKMANLIKE MANNER, SECURELY FASTENED. INSTALL IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND THE ELECTRICAL SPECIFICATIONS.
1. INSTALL CIRCUITS OVER 25 VOLT WITH COLOR CODED NUMBER 12 WIRE.
2. INSTALL CIRCUITS UNDER 25 VOLT WITH COLOR CODED NUMBER 18 WIRE WITH 0.031 INCH HIGH TENSILE 105 DEGREES F PLASTIC INSULATION ON EACH CONDUIT AND PLASTIC SHEATH OVER ALL.
3. INSTALL ELECTRONIC CIRCUITS WITH COLOR CODED NUMBER 22 WIRE WITH 0.023 INCH POLYETHYLENE INSULATION ON EACH CONDUIT WITH PLASTIC JACKETED COPPER SHEATH OVER ALL.
4. INSTALL LOW VOLTAGE CIRCUITS LOCATED IN CONCRETE SLABS AND MASONRY WALLS, OR EXPOSED IN CONCRETE AREAS, IN ELECTRIC CONDUIT.
5. ALL WIRING IN AREAS USED AS AIR PLenums SHALL BE IN ELECTRIC CONDUIT EXCEPT THAT LOW VOLTAGE WIRING MAY BE TIEPLIN CONDUIT, ALUMINUM SHEATHED CABLE OR OTHER WIRE SPECIALLY APPROVED FOR INSTALLATION IN AIR PLenums, WHERE ACCEPTABLE BY LOCAL CODES.
6. ALL WIRING IN AREAS NOT USED FOR AIR MOVEMENT SHALL BE IN ELECTRIC METALLIC TUBING EXCEPT LOW VOLTAGE WIRING MAY BE IN APPROVED SIGNAL CABLE WHERE ACCEPTED BY LOCAL CODES.
C. THERMOSTATIC CONTROLS TO HAVE A 5°F DEADBAND AND SETPOINT OVERLAP RESTRICTIONS.
1. TEMPERATURE CONTROLS SETBACK TO BE 55°F (HEAT) AND 80° (COOL), 2-HOUR OPERATION OVERIDE, 10-HOUR BACKUP.

18. WATER HEATERS:
A. STANDARD: ANSI Z21.10.3CSA 410 FOR GAS-FIRED, INSTANTANEOUS, DOMESTIC WATER HEATERS FOR INDOOR APPLICATION.
B. CONSTRUCTION: COPPER PIPING OR TUBING COMPLYING WITH NSF 61 AND NSF 372 BARRIER MATERIAL FOR POTABLE WATER, WITHOUT DRAINAGE CAPACITY.
1. PRESSURE RATING: 150 PSIG.
2. HEAT EXCHANGER: STAINLESS STEEL.
3. INSULATION: COMPLY WITH ASHRAES45.
4. JACKET: METAL WITH ENAMELED FINISH, OR PLASTIC.
5. BURNER: FOR USE WITH FANLESS, DOMESTIC-WATER HEATERS AND NATURAL-GAS FUEL.
6. AUTOMATIC IGNITION: MANUFACTURER'S PROPRIETARY SYSTEM FOR AUTOMATIC, GAS IGNITION.
7. TEMPERATURE CONTROL: ADJUSTABLE THERMOSTAT.
C. SUPPORT: BRACKET FOR WALL MOUNTING.

19. DOMESTIC WATER EXPANSION TANKS:
1. DESCRIPTION: STEEL, PRESSURE RATED TANK CONSTRUCTED WITH WELDED JOINTS AND FACTORY INSTALLED, BUTYL-RUBBER DIAPHRAGM. INCLUDE AIR PRECHARGE TO MINIMUM SYSTEM-OPERATING PRESSURE AT TANK.
2. CONSTRUCTION:
a. TANKPANS: FACTORY-FABRICATED STEEL, WELDED TO TANK BEFORE TESTING AND LABELING, INCLUDE ASME B1 20.1 PIPE THREAD.
b. INTERIOR FINISH: COMPLY WITH NSF 61 AND NSF 372 BARRIER MATERIALS FOR POTABLE WATER. TANK UNINGS, INCLUDING EXTENDING FINISH INTO AND THROUGH TANK FITTINGS AND OUTLETS.
c. AIR-CHARGING VALVE: FACTORY INSTALLED.
3. CAPACITY AND CHARACTERISTICS:
a. WORKING PRESSURE RATING: 150 PSIG.

20. REMODELING WORK:
A. IDENTIFICATION: DISCONNECT, DEMOLISH, AND REMOVE ABANDONED MECHANICALS AND EQUIPMENT INDICATED TO BE REMOVED AND NOT INDICATED TO BE SALVAGED OR REUSED.
B. EQUIPMENT TO BE SALVAGED:
1. DISCONNECT AND REMOVE, EXISTING MECHANICAL EQUIPMENT INDICATED TO BE REMOVED AND NOT INDICATED TO BE SALVAGED OR REUSED.
2. DELIVER EQUIPMENT TO THE LOCATION DESIGNATED BY THE OWNER FOR STORAGE.
3. ALL MATERIALS AND EQUIPMENT DESIGNATED TO BE REUSED OR RELOCATED SHALL BE CAREFULLY HANDLED AND STORED UNTIL NEEDED FOR REMODELING WORK.
4. ALL ITEMS TO BE REUSED OR RELOCATED SHALL BE MAINTAINED IN LIKE NEW CONDITION WITH RUST OR CORROSION REMOVED, SURFACE PAINT TOUCHED UP OR REPAINTED AS REQUIRED TO MATCH NEW CONSTRUCTION, AND THOROUGHLY CLEANED AND INSPECTED.
5. ANY ITEMS BECOME DAMAGED BEYOND REPAIR AS A RESULT OF CONSTRUCTION OR DEMOLITION ACTIVITY SHALL BE REPLACED WITH NEW MATERIAL, EQUIVALENT IN EVERY RESPECT.
C. DISPOSAL AND CLEANUP: REMOVE FROM THE SITE AND LEGALLY DISPOSE OF DEMOLISHED MATERIALS AND EQUIPMENT NOT INDICATED TO BE SALVAGED.
D. PROTECT ADJACENT MATERIALS: REMOVE FROM THE INSTALL, INSTALL AND MAINTAIN DUST AND NOISE CONTROL, KEEP DIRT, DUST, AND NOISE FROM BEING TRANSMITTED TO ADJACENT AREAS. REMOVE PROTECTION AND BARRIERS AFTER REMODELING OPERATIONS ARE COMPLETE.
E. LOCATE, IDENTIFY, AND PROTECT MECHANICAL SERVICES PASSING THROUGH REMODELING AREA AND SERVING OTHER AREAS OUTSIDE THE REMODELING UNITS. MAINTAIN SERVICES TO AREAS OUTSIDE REMODELING, WHERE MECHANICAL SERVICES ARE LOCATED IN A WALL, ETC. TO BE DEMOLISHED, REROUTE PIPING TO NEW OR EXISTING CONSTRUCTION TO MAINTAIN CONTINUITY OF THE SYSTEM, WHEN SERVICES MUST BE INTERRUPTED, INSTALL TEMPORARY SERVICES FOR AFFECTED AREAS.
F. REMOVE ALL PIPING TO BE DEMOLISHED BACK TO PIPE MAIN OR REMAIN OF PROJECT AREA, AND CAP PIPE.
G. PIPING AND DUCTS EMBEDDED IN FLOORS, WALLS, AND CEILINGS MAY REMAIN IF SUCH MATERIALS DO




PLUMBING GENERAL NOTES:

1. INSTALL ALL PIPE, ETC. AS HIGH AS POSSIBLE.
2. COORDINATE ALL WORK WITH OTHER TRADES AND EXISTING CONDITIONS AS REQUIRED TO PROPERLY INSTALL ALL SYSTEMS AS INTENDED, WITHIN THE CONFINES OF THE SPACES AVAILABLE, AND WITHOUT INTERFERENCES.
3. REFER TO ARCHITECTURAL DRAWINGS FOR EXACT LOCATIONS AND MOUNTING HEIGHTS OF FIXTURES.
4. REFER TO ARCHITECTURAL & STRUCTURAL DRAWINGS FOR REQUIREMENTS FOR SUPPORTING PIPING, EQUIPMENT, ETC. FROM THE STRUCTURE. PROVIDE ADDITIONAL STEEL AS REQUIRED TO PROPERLY SUPPORT SYSTEMS FROM THE STRUCTURE.
5. SAWCUT EXISTING FLOOR AS REQUIRED FOR INSTALLATION OF UNDERFLOOR PIPING. PATCH FLOOR TO MATCH EXISTING.
6. NO PIPING SHALL BE ROUTED OVER THE TOP OF ELECTRICAL PANELS.

PLUMBING SYMBOLS

	SOIL AND WASTE PIPING BELOW FLOOR/GRADE
	SOIL AND WASTE PIPING ABOVE FLOOR/GRADE
	SANITARY VENT PIPING ABOVE GRADE
	SANITARY VENT PIPING BELOW GRADE
	DOMESTIC COLD WATER PIPING
	DOMESTIC HOT WATER PIPING
	DOMESTIC HOT WATER RECIRCULATION PIPING
	GAS PIPING
	EQUIPMENT DRAIN LINE
	PIPING TURNING DOWN
	PIPING TURNING UP
	TEE TOP CONNECTION
	UNION
	BACKFLOW PREVENTER
	FLOOR DRAIN
	FLOOR CLEAN OUT
	WALL CLEAN OUT
	GRADE CLEAN OUT
	VALVE
	BALANCING VALVE
	SOLENOID VALVE
	PRESSURE REGULATOR
	CHECK VALVE
	CONNECT TO EXISTING
	INVERT ELEVATION OF PIPE
	MATCH MARKS ON PLUMBING RISER DIAGRAM

PIPE HANGER SCHEDULE		
PIPE MATERIAL	MAXIMUM HANGER SPACING	HANGER ROD DIAMETER
ABS (All sizes)	4'	3/8"
PVC (All Sizes)	4'	3/8"
CPVC, 1 inch and smaller	3'	1/2"
CPVC, 1-1/4 inches and larger	4'	1/2"
Cast Iron (All Sizes)	5'	5/8"
Cast Iron (All Sizes) with 10 foot length of pipe	10'	5/8"
Copper Tube, 1-1/4 inches and smaller	6'	1/2"
Copper Tube, 1-1/2 inches and larger	10'	1/2"
Steel, 3 inches and smaller	12'	1/2"
Steel, 4 inches and larger	12'	5/8"
Pex, 1" and below without support channel	32"	3/8"
Pex, 1-1/4" and above without support channel	48"	3/8"
Pex 3/4" and below with support channel	6'	3/8"
Pex 1" and above with support channel	8'	3/8"

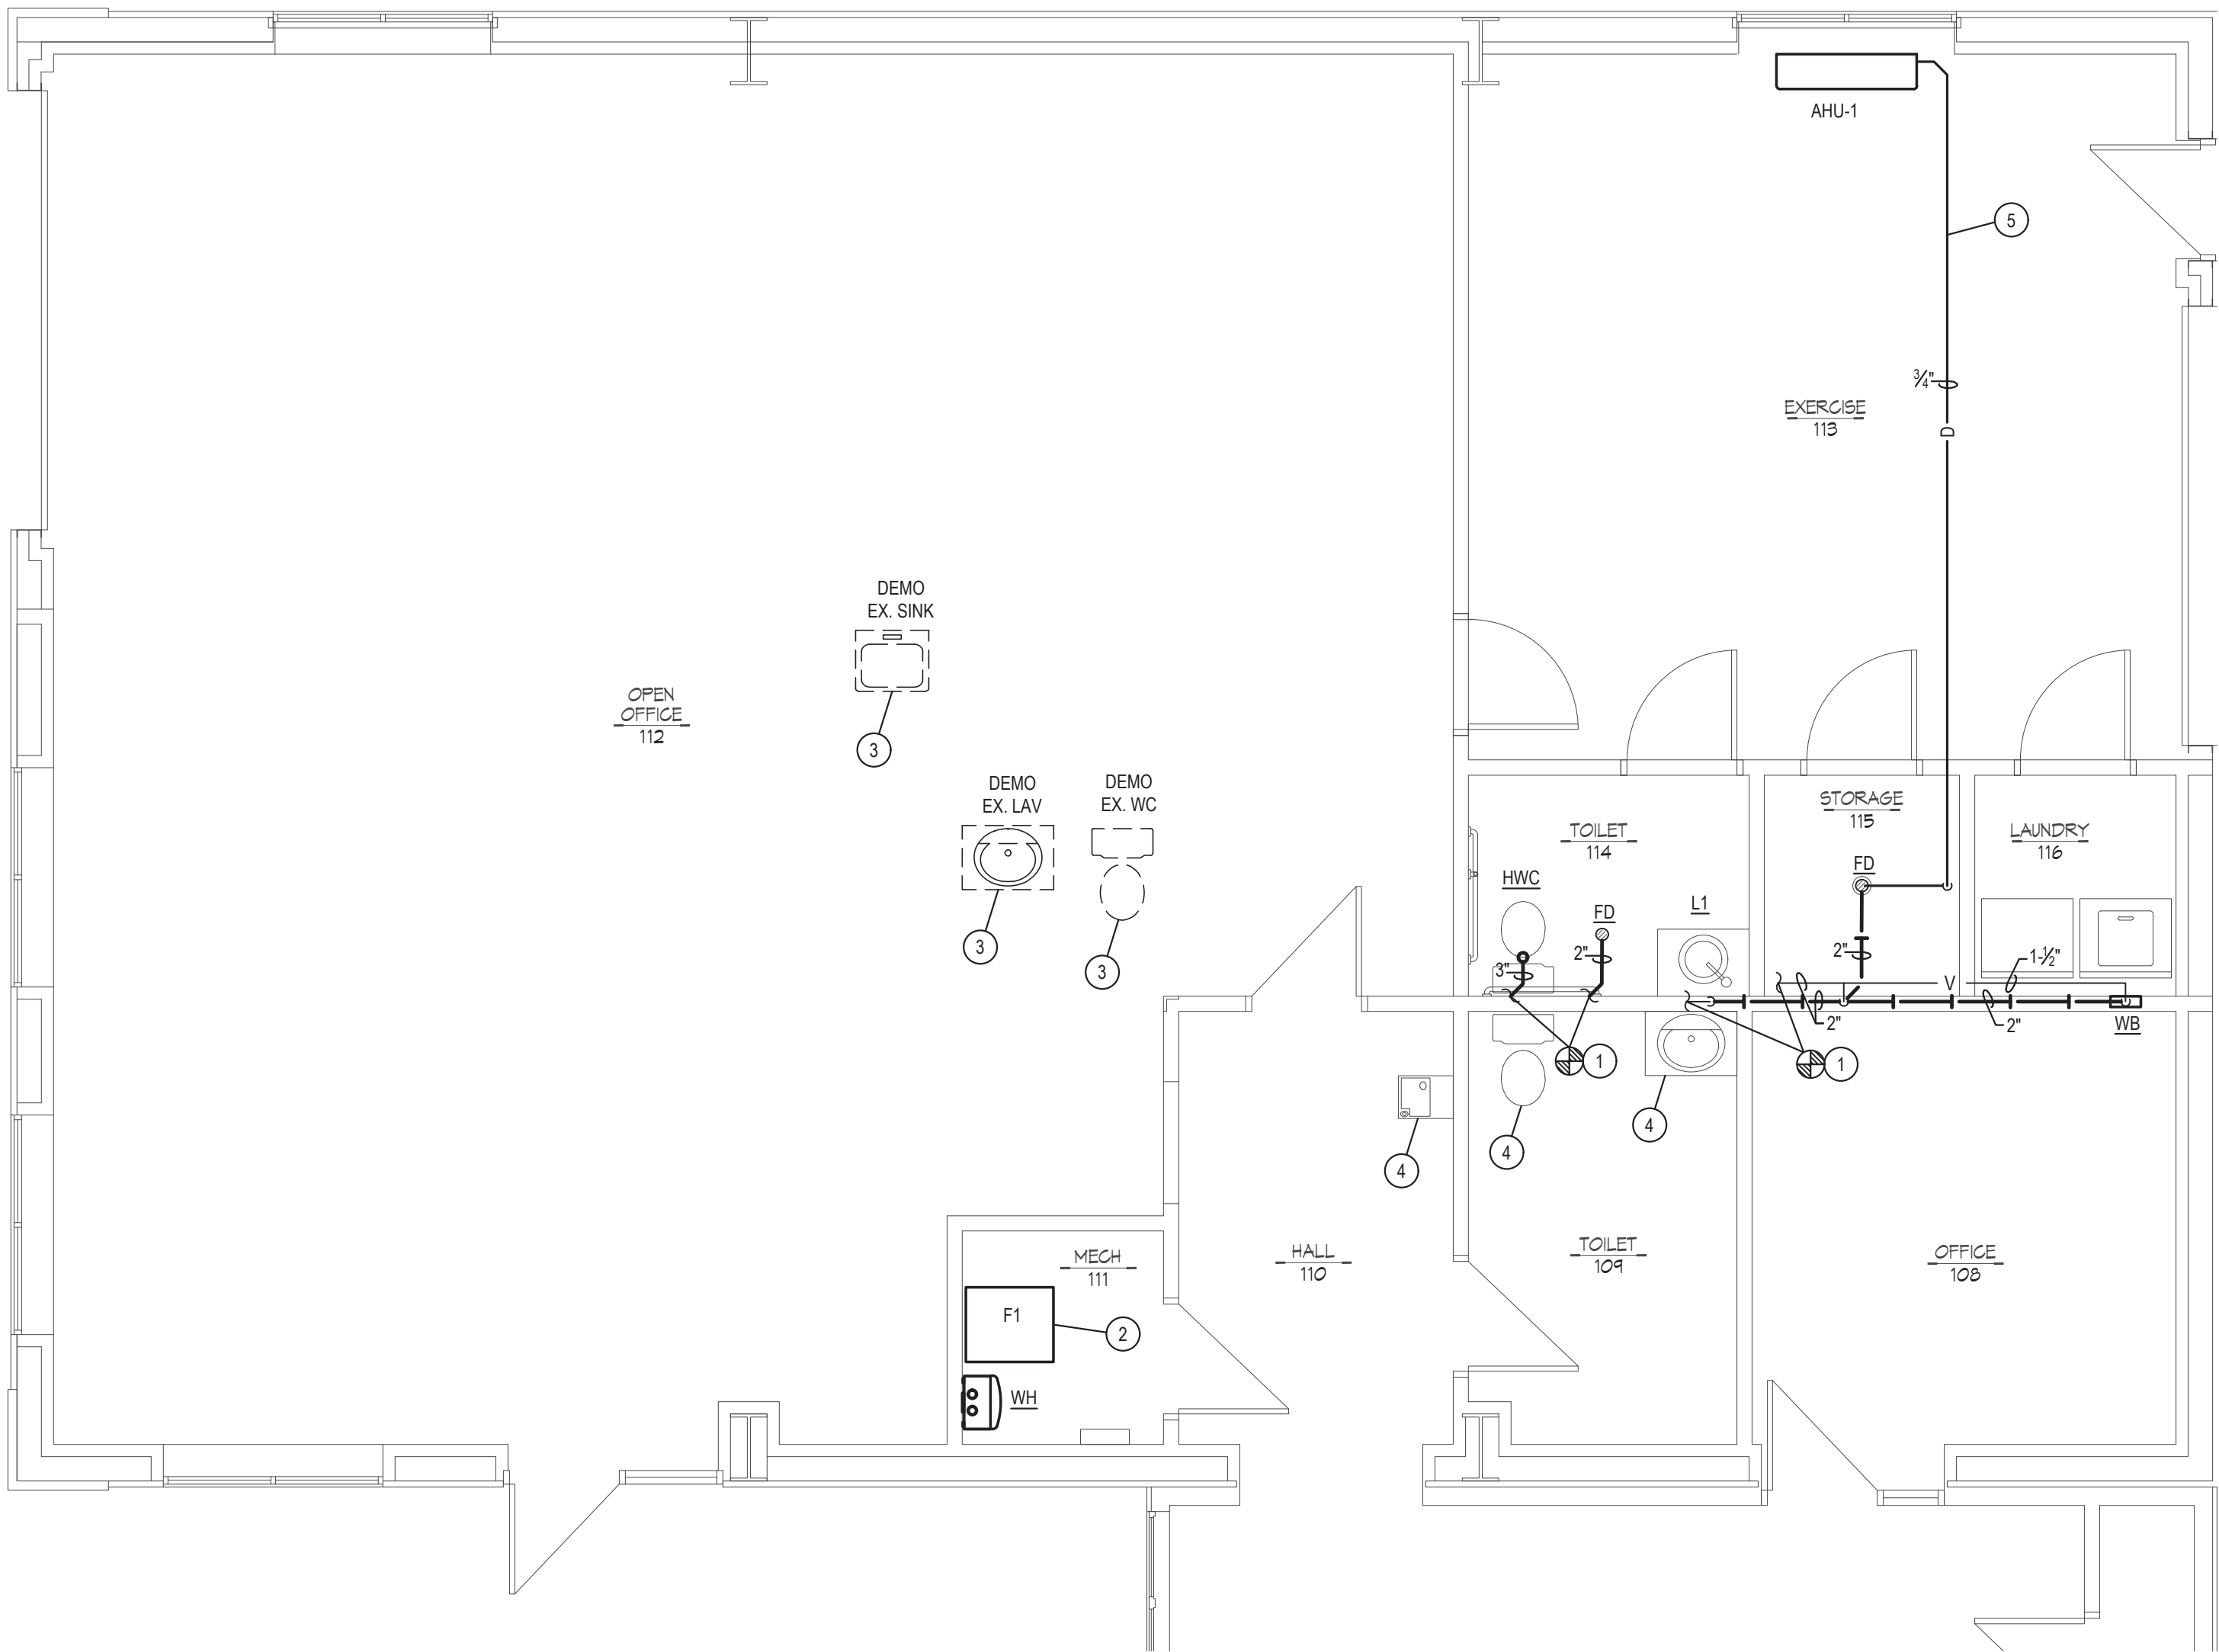

PLUMBING WASTE & VENT PLAN

SCALE: 1/4" = 1'-0"

PLUMBING PLAN NOTES:


1. CONNECT WASTE AND VENT PIPING TO EXISTING WASTE AND VENT LINE AS REQUIRED. VERIFY EXACT LOCATION PRIOR TO INSTALLATION OF ANY PIPING.
2. CONNECT CONDENSATE TO FURNACE FLUE AND COIL AS REQUIRED AND AS DETAILED. ROUTE TO EXISTING FLOOR DRAIN WITH AIR GAP.
3. DEMO EXISTING WASTE AND VENT PIPING TO BELOW FLOOR/BEHIND WALL, VENT TO BE REMOVED TO ABOVE CEILING AND CAP.
4. EXISTING TO REMAIN.
5. ROUTE 3/4" CONDENSATE DRAIN TO FLOOR DRAIN WITH AIR GAP.
6. SEE RISER DIAGRAM FOR WATER HEATER PIPING DIAGRAM. REFER TO MANUFACTURERS INSTRUCTIONS FOR EXACT REQUIREMENTS. PROVIDE THERMAL EXPANSION TANK.

PLUMBING FIXTURE BRANCH PIPING SCHEDULE				
FIXTURE	WASTE	VENT	CW	HW
WATER CLOSET (TANK TYPE)	3"	2"	1/2"	--
LAVATORY	1-1/4"	1-1/4"	1/2"	1/2"
WASHER BOX	2"	1-1/2"	1/2"	1/2"
FLOOR DRAIN	2"	2"	--	--

NOTE: INDIVIDUAL VENTS FOR FIXTURES ON PLANS AND RISER DIAGRAMS HAVE BEEN INCREASED WHERE HORIZONTAL VENT LENGTH IS IN EXCESS OF THE MAXIMUM DISTANCE INDICATED BY THE CODE.

PEX PIPING REQUIREMENTS

PIPE SIZES GIVEN ON THE DRAWINGS ARE NOMINAL COPPER PIPE SIZE. IF PEX PIPING IS USED, INCREASE PEX PIPING ONE SIZE ABOVE LISTED SIZES AS REQUIRED TO EQUAL OR EXCEED COPPER PIPE INSIDE DIAMETER.

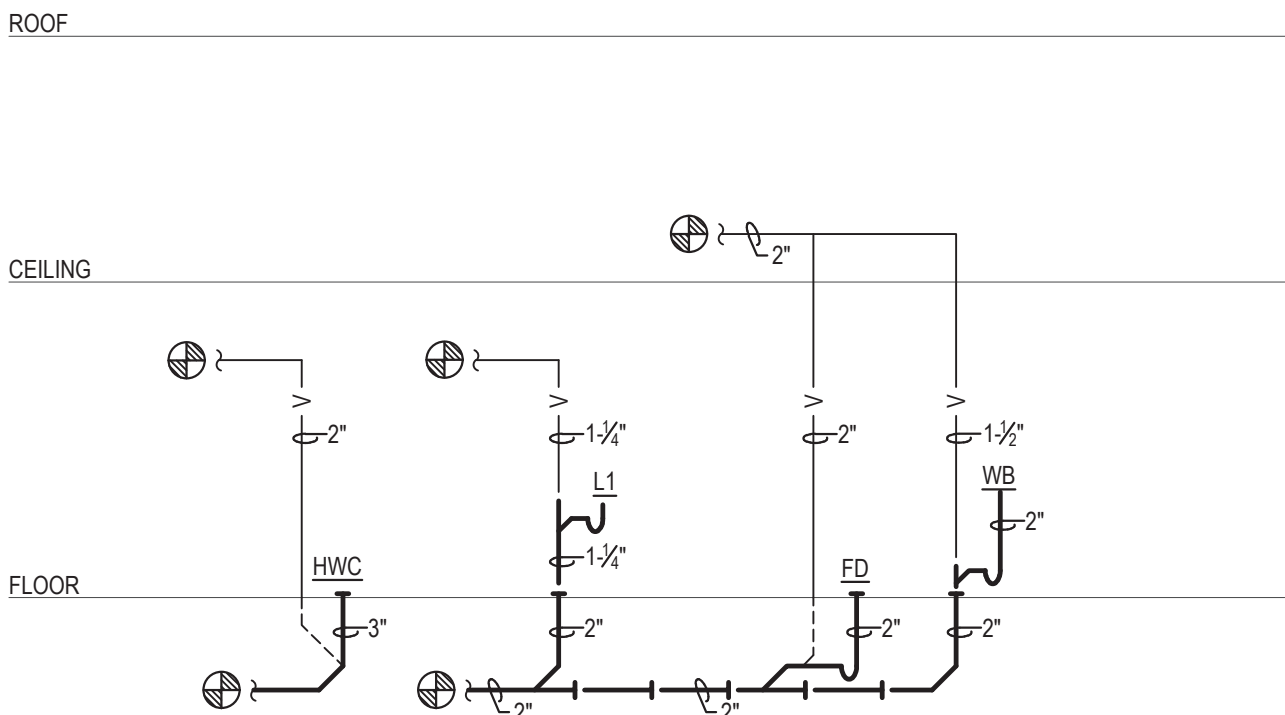

WASTE & VENT

PLUMBING RISER DIAGRAMS

SCALE: NONE

BC PROJECT #: 25202 VV/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service by the Designer/Engineer and is intended for use on the project only. Pursuant to the Accredited Works Copyright Protection Act of 1980, all drawings, specifications, notes and designs, including the overall form, arrangement and composition of spaces and elements appearing therein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.



GUY GRONBERG
ARCHITECTS, P.C.

119 SE 3rd St.
Lee's Summit, MO 64083
Phone 816.324.0516
Fax 816.324.0510



BC ENGINEERS
INCORPORATED

5720 Rendow Shawnee, KS 66203 (913) 262-1772

1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081

DESCRIPTION

REV# DATE

DATE: 03-31-2025

PROJECT# 25007

PLUMBING WASTE
& VENT PLAN


P1.0

PLUMBING PLAN NOTES:

- CONNECT 1/2" CW AND HW TO EXISTING CW AND HW LINES. VERIFY EXACT LOCATION SIZE OF EXISTING WATER LINE PRIOR TO INSTALLATION OF NEW PIPING.
- CONNECT 1/2" CW TO EXISTING CW LINE. VERIFY EXACT LOCATION SIZE OF EXISTING WATER LINE PRIOR TO INSTALLATION OF NEW PIPING.
- EXISTING TO REMAIN. VERIFY PROPER WORKING ORDER.
- DEMO EXISTING HOT AND COLD WATER TO MAIN BRANCH AND CAP.
- PROVIDE WITH MIXING VALVE IF NONE IS FOUND TO BE EXISTING.
- CONNECT 3/4" GAS PIPING TO EXISTING GAS LINE. VERIFY EXACT LOCATION AND ELEVATION OF EXISTING PIPING IN FIELD PRIOR TO INSTALLATION OF ANY NEW PIPING.
- CONNECT GAS TO EQUIPMENT AS REQUIRED AND AS DETAILED.
- CONNECT 1" GAS TO EXISTING GAS LINE. VERIFY EXACT LOCATION SIZE OF EXISTING GAS LINE PRIOR TO INSTALLATION OF NEW PIPING.
- CONNECT 3/4" CW TO EXISTING CW LINE. VERIFY EXACT LOCATION SIZE OF EXISTING WATER LINE PRIOR TO INSTALLATION OF NEW PIPING.
- CONNECT 3/4" HW TO EXISTING HW LINE. VERIFY EXACT LOCATION SIZE OF EXISTING WATER LINE PRIOR TO INSTALLATION OF NEW PIPING.

PLUMBING FIXTURE SCHEDULE (OR EQUAL):


HWC	HANDICAP WATER CLOSET: TOTO, #CST776CEFG (#01), "DRAKE CLOSE COUPLED TOILET", 1.28 GALLON FLUSH, 16-1/8" HIGH ELONGATED BOWL, FLOOR MOUNTED, FLOOR OUTLET, TANK TYPE, VITREOUS CHINA, SIPHON-JET ACTION, #SC534 OPEN FRONT SEAT WITH CHECK HINGE AND LESS COVER, CHROME PLATED ANGLE STOP AND RISER. HANDLE ON WIDE SIDE OF FIXTURE.
L1	LAVATORY, COUNTERTOP: KOHLER #K-2714-1, VITREOUS CHINA, 18-7/8" CIRCULAR BASIN, DELTA #501 FAUCET WITH SINGLE METAL LEVER HANDLE, GRID DRAIN WITH 1-1/4" TAILPIECE, CHROME PLATED P-TRAP, CHROME PLATED ANGLE STOPS AND RISERS. INSULATE EXPOSED DRAIN, WATER SUPPLIES, AND VALVES WITH PROWRAP SEAMLESS MOLDED CLOSED CELL VINYL INSULATION.
MV	MIXING VALVE: WATTS, #LFUSG-B, THERMOSTATIC CONTROLLED MIXING VALVE, LEAD FREE BRONZE BODY, LOCKED TEMPERATURE ADJUSTMENT CAP (VANDAL RESISTANT), COPPER ENCAPSULATED THERMOSTAT ASSEMBLY WITH BRASS SHUTTLE, STAINLESS STEEL SPRINGS, INTEGRAL CHECK VALVES ON HOT AND COLD INLETS. (SET TO 110°F). ASSE 1070 LISTED.
WB	WASHER BOX: GUY GRAY #B-150, WASHER BOX WITH 1-1/2" DRAIN OUTLET, WATER HAMMER ARRESTERS, TAILPIECE, AND 1/2" HOSE BIBBS. DO NOT INSTALL IN DEMISING WALL.
WH	HOT WATER HEATER: NAVIEN, #NPE-240-S2, GAS FIRED, 98% THERMAL EFFICIENCY, INSTANTANEOUS HEATER, 199 MBTUH INPUT, 3.8 GPM AT 100 DEGREES F RISE. PROVIDE WITH NAVIEN READY LINK COMMUNICATION CABLE, REMOTE CONTROLLER, NAVIEN PLUMB EASY VALVE SET, PRESSURE RELIEF VALVE, CONDENSATE DRAIN HOSE, CONDENSATE NEUTRALIZER, VENT TERMINATORS. SET TO 120°F.
ET	HOT WATER EXPANSION TANK: AMTROL, #ST-5, 2 GALLON EXPANSION TANK WITH DIAPHRAGM.
FD	FLOOR DRAIN: SIOUX CHIEF, #842, PVC FLOOR DRAIN WITH ADJUSTABLE TOP AND CAST BRASS STRAINER. PROVIDE WITH #2692 QUAD CLOSE TRAP SEAL DEVICE.

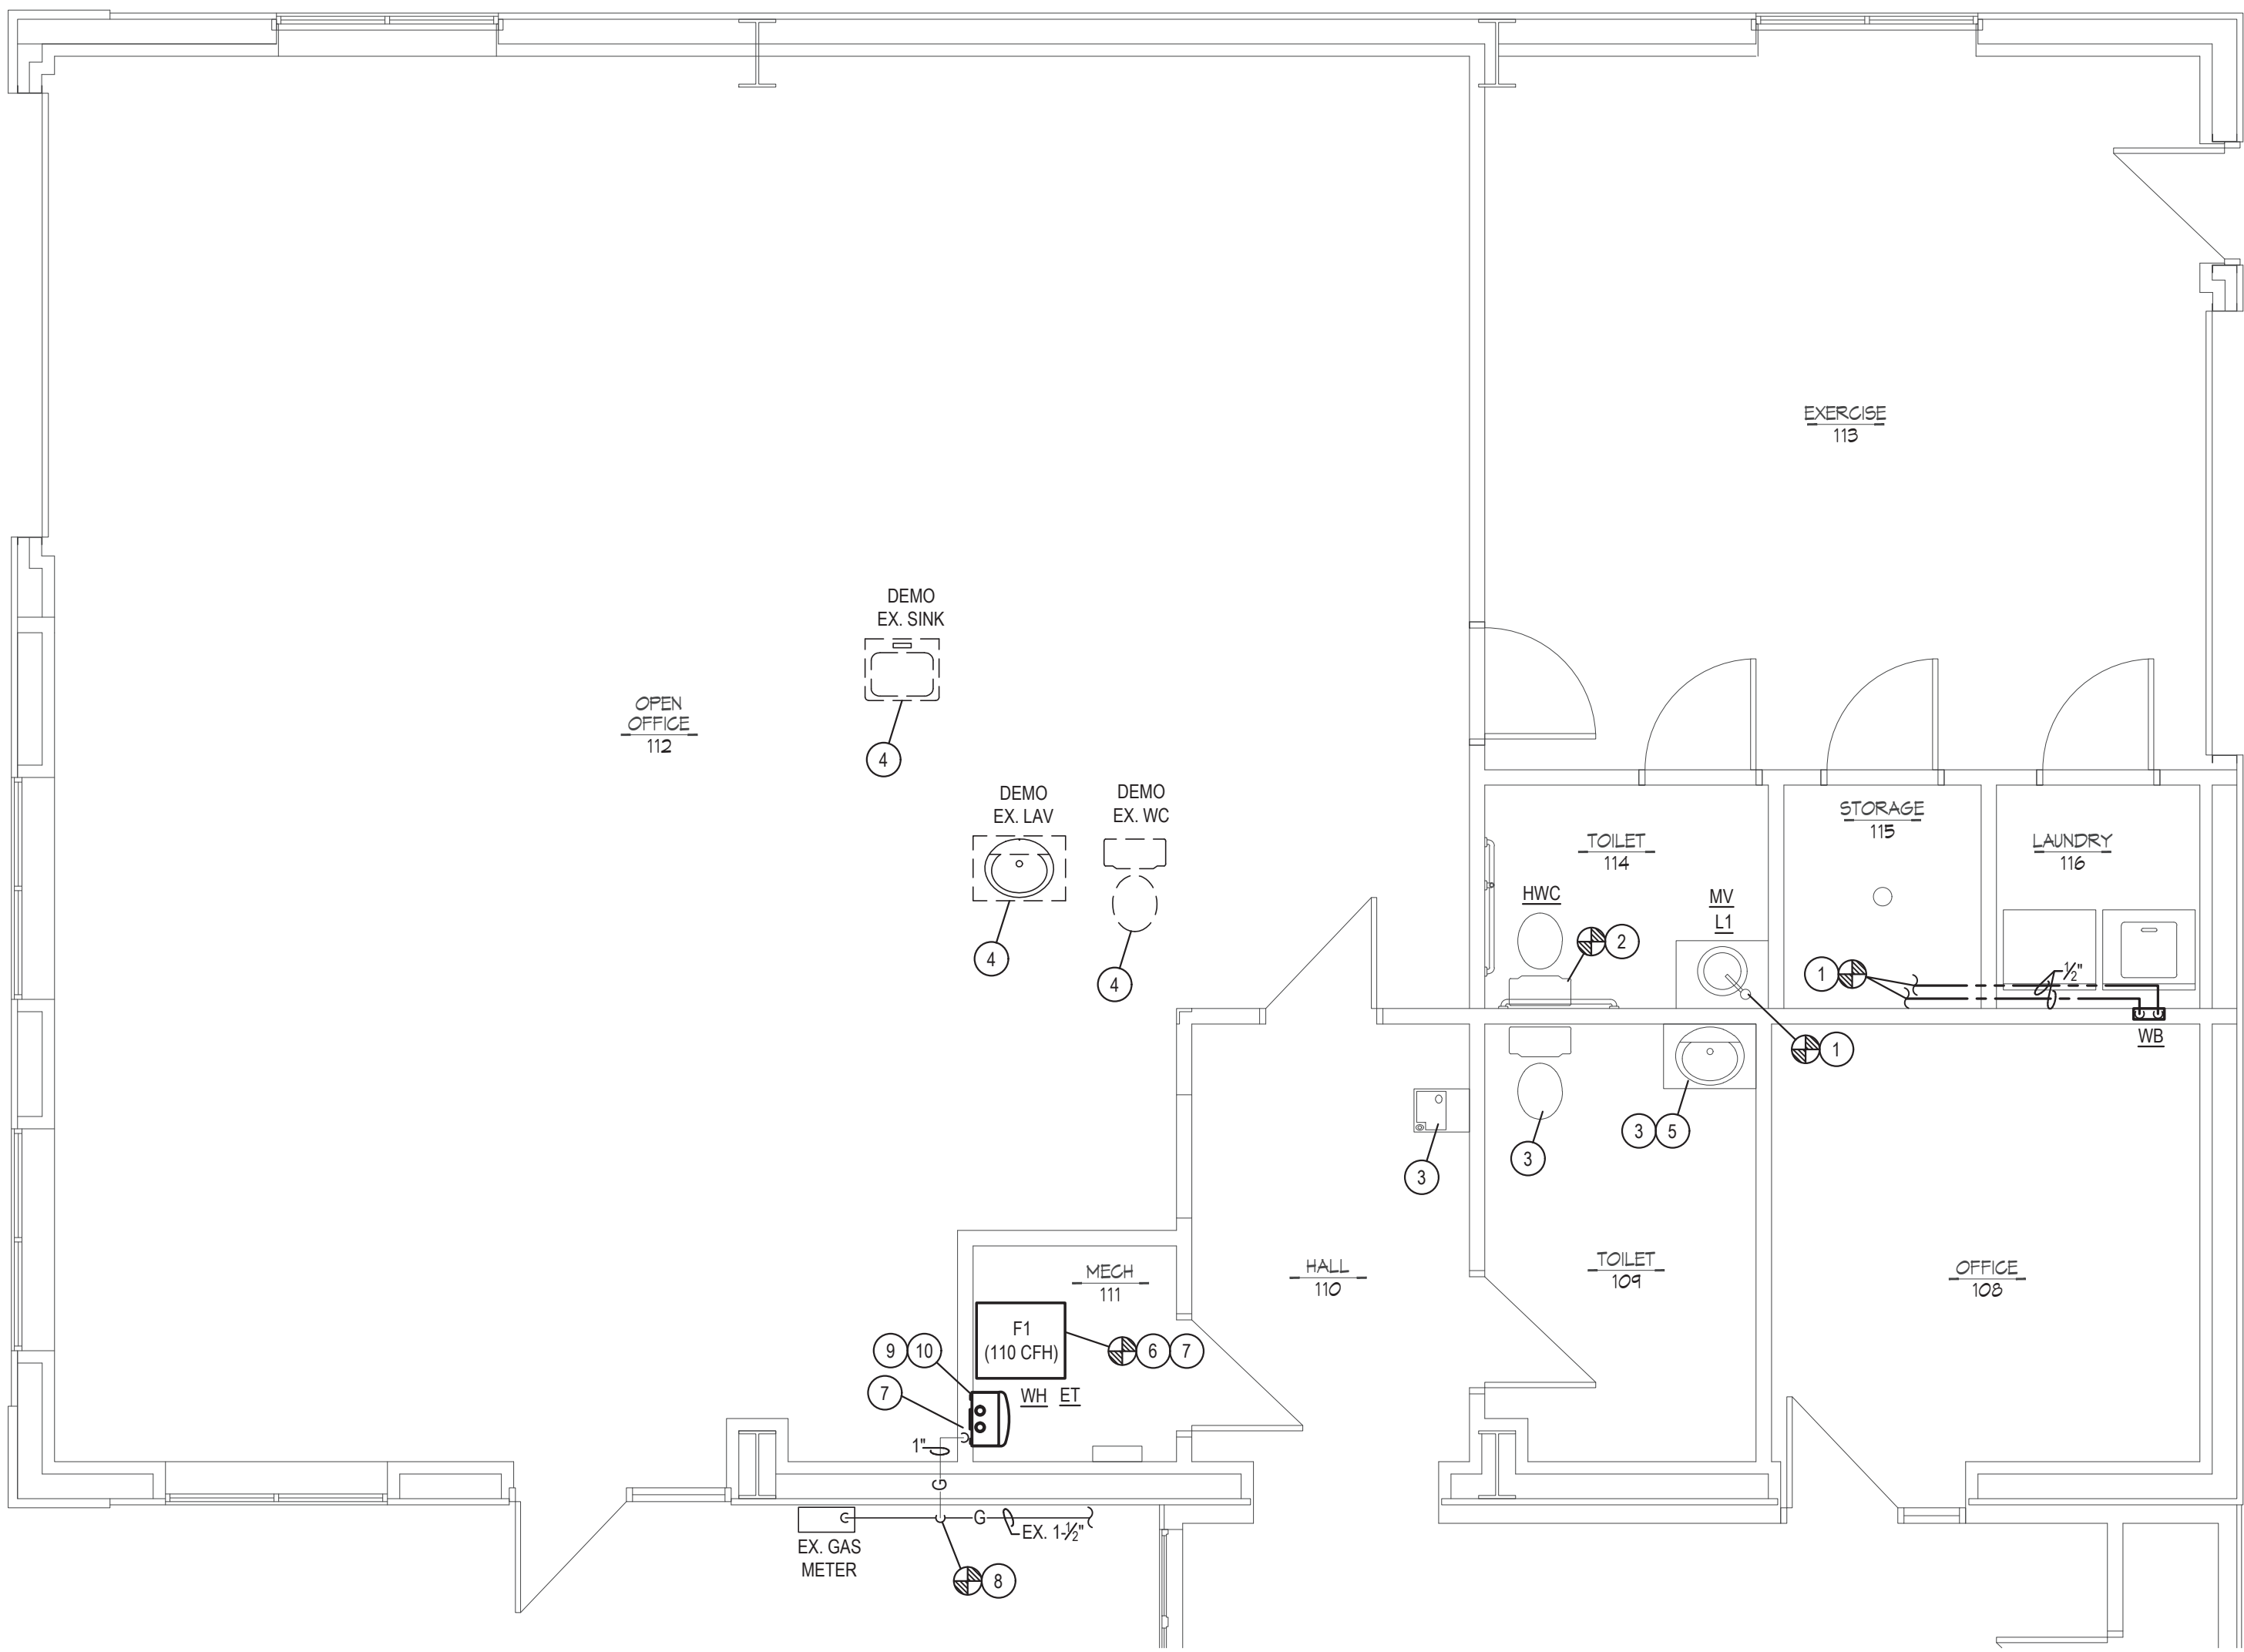

PLUMBING WATER & GAS PLAN


SCALE: 1/4" = 1'-0"

TERMINATE 3" CPVC INTAKE/EXHAUST PIPING PER MANUFACTURER'S REQUIREMENTS




PLUMBING RISER DIAGRAMS

SCALE: NONE



CONDENSATE DRAIN DETAIL

SCALE: NONE



GAS CONNECTION DETAIL

SCALE: NONE


BC PROJECT #: 25202 VJ/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service by the Designer/Engineer and is intended for use on this project only. Pursuant to the Accredited Works Copyright Protection Act of 1980, all drawings, specifications, notes and designs, including the overall form, arrangement and composition of spaces and elements appearing therein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.



GUY GRONBERG
ARCHITECTS, P.C.

113 SE 3rd St.
Lee's Summit, MO 64083
Phone: 816-524-0516
Fax: 816-524-0510



BC ENGINEERS
INCORPORATED

5720 Rendow Shawnee, KS 66203 (913) 262-1772

1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081

REV# DATE DESCRIPTION

DATE: 09-31-2025

PROJECT# 25007

PLUMBING WATER
& GAS PLAN

P2.0

MECHANICAL GENERAL NOTES:


- COORDINATE ALL WORK WITH OTHER TRADES AND EXISTING CONDITIONS AS REQUIRED TO PROPERLY INSTALL ALL SYSTEMS AS INTENDED, WITHIN THE CONFINES OF THE SPACES AVAILABLE, AND WITHOUT INTERFERENCES.
- THIS CONTRACTOR SHALL PERFORM ALL WORK INDICATED AND/OR AS REQUIRED FOR THE PROPER INSTALLATION AND OPERATION OF THE MECHANICAL SYSTEMS.
- REFER TO ARCHITECTURAL REFLECTED CEILING PLANS FOR EXACT LOCATIONS OF DIFFUSERS.
- INSTALL ALL DUCT, PIPE, ETC. AS HIGH AS POSSIBLE.
- DUCT SIZES SHOWN ARE ACTUAL SHEET METAL SIZES AND INCLUDE AN ALLOWANCE FOR DUCT LINER WHERE APPLICABLE.
- NO DUCT SHALL BE ROUTED OVER THE TOP OF ELECTRICAL PANELS.
- ALL MECHANICAL SYSTEMS SHALL BE BALANCED BY A CERTIFIED BALANCING CONTRACTOR. REFER TO SPECIFICATIONS FOR DETAILS.

MECHANICAL SYMBOLS

	NEW SUPPLY DIFFUSER
	NEW RETURN AIR GRILLE
	EXHAUST GRILLE/FAN
	REMOTE TEMPERATURE SENSOR
	THERMOSTAT, MOUNTED AT 48" AFF
	MOTORIZED DAMPER/LOUVER
	NEW DUCTWORK
	SIZE OF RECTANGULAR DUCT
	SIZE OF ROUND DUCT
	FLEXIBLE DUCTWORK
	FLEXIBLE CONNECTION TO FAN
	FLOOR PLAN NOTE DESIGNATION
	S.A. SUPPLY AIR
	R.A. RETURN AIR
	EXH. EXHAUST AIR
	TRANSITION IN DUCT SIZE
	ELBOW WITH TURNING VANES
	MANUAL VOLUME DAMPER
	MOTORIZED CONTROL DAMPER
	SUPPLY AIR DUCT UP/DOWN
	RETURN AIR DUCT UP/DOWN
	EXHAUST AIR DUCT UP/DOWN
	CHANGE IN ELEVATION UP (UP) DOWN (DN) IN DIRECTION OF FLOW
	SCHEDULED MECHANICAL EQUIPMENT

MECHANICAL PLAN NOTES:

- PROVIDE PREFABRICATED PAD FOR CONDENSING UNITS.
- CONNECT REFRIGERANT PIPING TO CONDENSING UNIT & COIL AS REQUIRED BY THE MANUFACTURER. PROVIDE AND INSTALL REFRIGERANT PIPING FOR CONDENSING UNIT AS REQUIRED BY MANUFACTURER.
- REFRIGERANT PIPING THROUGH EXTERIOR WALL AT 0-6" ABOVE GRADE. ROUTE IN EXTERIOR WALL. NO EXPOSED REFRIGERANT PIPING. SEAL WALL PENETRATION WEATHERTIGHT. ROUTE PIPE UP INSIDE CEILING AS HIGH AS POSSIBLE AND ROUTE TO UNITS.
- REUSE EXISTING PAD FOR NEW CONDENSER.
- SUPPORT EXHAUST FAN FROM STRUCTURE AS REQUIRED BY THE MANUFACTURER.
- CONNECT OUTDOOR AIR DUCT WITH BALANCING DAMPER TO RETURN AIR DUCT. REFER TO OUTDOOR AIR CALCULATIONS FOR MINIMUM OUTDOOR AIR VOLUME.
- PROVIDE ROOF VENT FOR OUTDOOR AIR INTAKE WITH BIRD SCREEN. SEAL PENETRATIONS WEATHER TIGHT.
- PROVIDE 7-DAY PROGRAMMABLE AUTO/HEAT/COOL THERMOSTAT AT 48" AFF.
- SUPPORT UNIT FROM WALL PER MANUFACTURE'S REQUIREMENTS AND INSTALLATION INSTRUCTIONS. MOUNT UNIT 6" ABOVE WINDOW.
- PROVIDE WALL VENT CAP WITH BACKDRAFT DAMPER FOR EXHAUST FAN. SEAL PENETRATIONS WEATHERTIGHT.
- ROUTE 4"Ø DRYER EXHAUST DUCT FROM DRYER AND ROUTE THROUGH WALL TO AN APPROVED DRYER TERMINATION WITH BACKDRAFT DAMPER. SEAL PENETRATION WEATHER TIGHT.
- EXISTING TO REMAIN.
- REBALANCE DIFFUSER TO LISTED CFM. CLEAN DIFFUSER/GRILLE TO "LIKE NEW" CONDITION AS REQUIRED.
- 3"Ø CPVC FLUE & COMBUSTION AIR INTAKE UP THROUGH EXISTING FLUE CUTOUT IN ROOF TO MANUFACTURER'S VENT TERMINATION AS REQUIRED. ROOFER TO MODIFY ROOF OPENING AND TERMINATION AS NECESSARY. OFFSET AS REQUIRED TO MAINTAIN 10" CLEARANCE FROM ALL OUTDOOR AIR INTAKES. ALL ROOFING WORK SHALL BE PERFORMED BY BUILDING OWNERS ROOFING CONTRACTOR (AT THIS CONTRACTOR'S EXPENSE) TO MAINTAIN EXISTING ROOF WARRANTY. VERIFY APPROVED ROOFING CONTRACTOR WITH BUILDING OWNER PRIOR TO PERFORMING WORK.
- CONNECT DUCT TO EXISTING SUPPLY DUCTWORK AS REQUIRED. VERIFY EXACT LOCATION PRIOR TO INSTALLATION OF ANY DUCTWORK.
- CONNECT DUCT TO EXISTING RETURN DUCTWORK AS REQUIRED. VERIFY EXACT LOCATION PRIOR TO INSTALLATION OF ANY DUCTWORK.
- REMOVE EXISTING FURNACE. FILL AND PACK WITH INSULATION AND CAP ABOVE AND BELOW ROOF FOR EXISTING FLUE CUTOUT AS REQUIRED.
- REMOVE EXISTING EXHAUST FAN. FILL AND PACK WITH INSULATION AND CAP ABOVE AND BELOW ROOF FOR EXISTING EXHAUST CUTOUT AS REQUIRED.
- ROUTE DUCT ABOVE GARAGE DOOR.

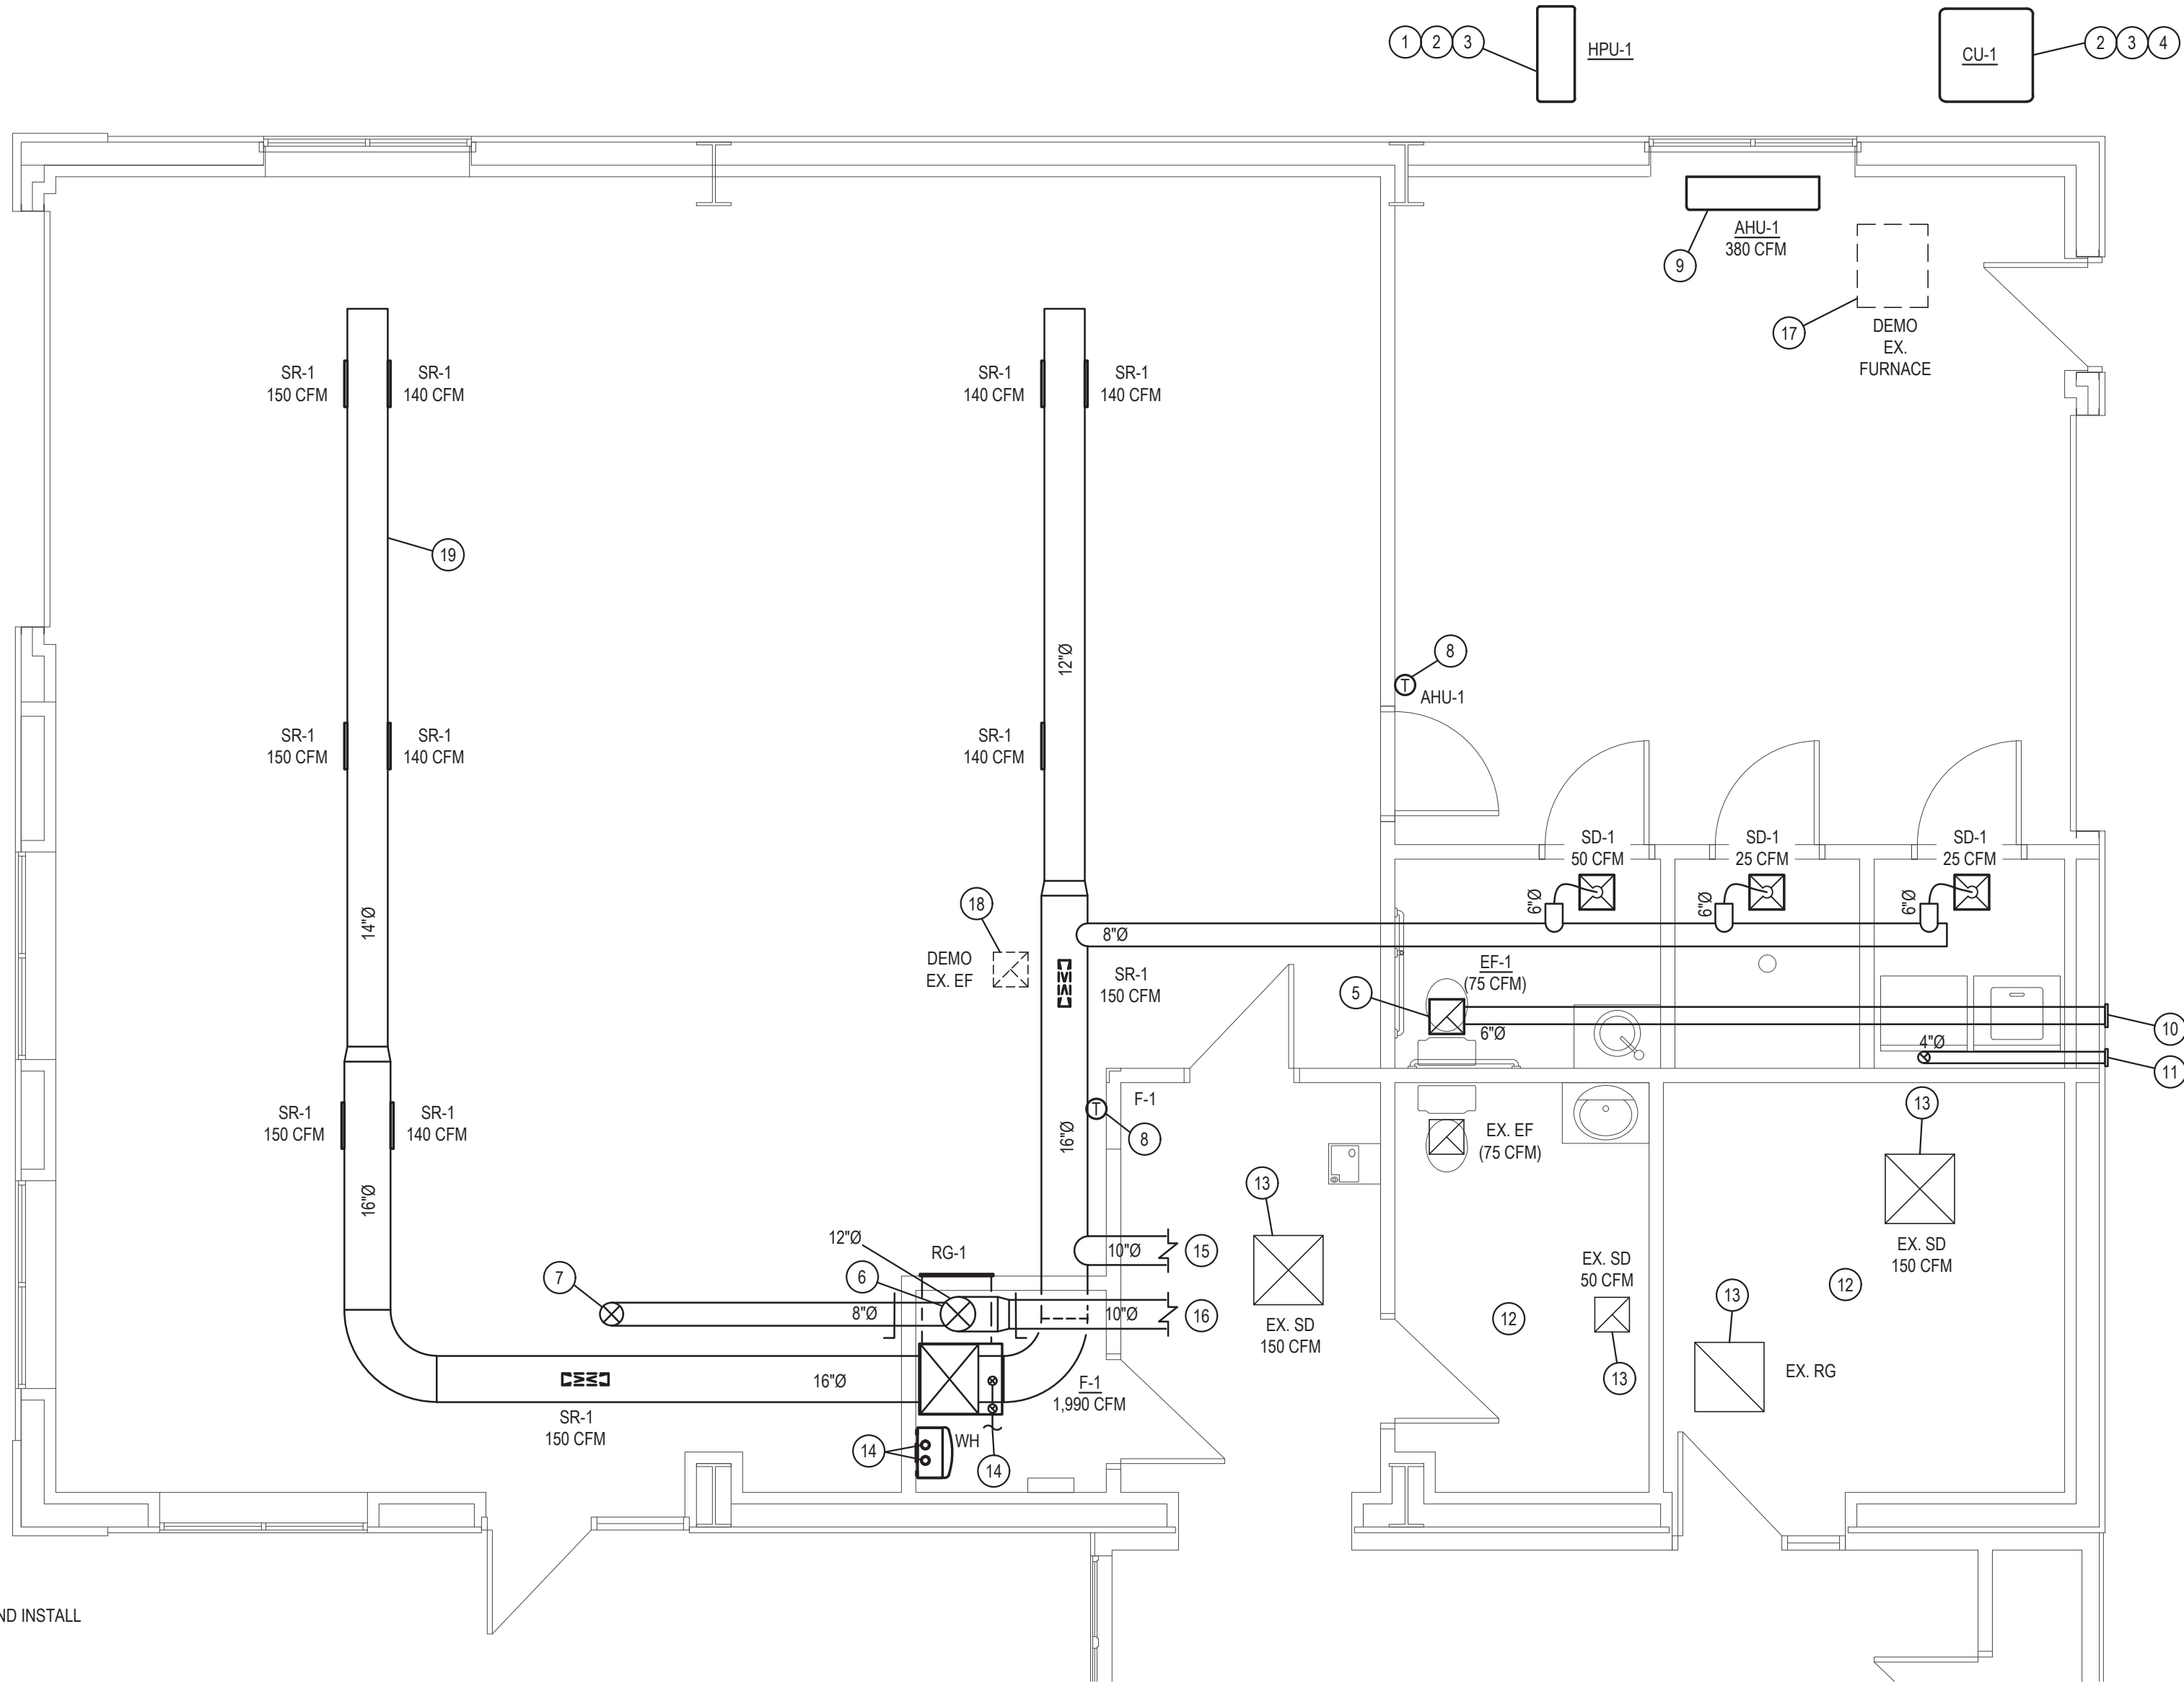

MECHANICAL FLOOR PLAN
SCALE: 1/4" = 1'-0"
NORTH

BC PROJECT #: 25202 VV/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service to the Designer/Engineer and is intended for use on the project only. Pursuant to the Accredited Works Copyright Protection Act of 1980, all drawings, specifications, lists and designs, including the overall form, arrangement and composition of spaces and elements appearing therein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.



GUY GRONBERG
ARCHITECTS, P.C.
113 SE 3rd St.
Lee's Summit, MO 64083
Phone: 816.524.0510
Fax: 816.524.0510



BC ENGINEERS
INCORPORATED
5720 Rendow Shawnee, KS 66203 (913) 262-1772

1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081

DESCRIPTION

REV#

DATE

DATE 03-31-2025

PROJECT# 25007

MECHANICAL
FLOOR PLAN

M1.0

OUTDOOR AIR CALCULATIONS									
UNIT	Area (sqft)	OCCUPANCY CLASSIFICATION	Occupant Density #/1000 sqft	People outdoor airflow rate in breathing zone, (Rp) cfm/person	Area outdoor airflow rate in breathing zone, (Ra) cfm/sqft	Exhaust airflow rate cfm/sqft	Breathing zone outdoor airflow (Vbz)	Zone air distribution effectiveness (Ez)	Zone outdoor airflow (cfm)
F-1	68	Storage rooms	0	0	0.12		8	0.8	10
	89	Corridors	0	0	0.06		5	0.8	7
	1450	Office spaces	5	5	0.06		123	0.8	154
	140	Toilet rooms public	0	0	0	5/10	0	0.8	0
Total									171

EXHAUST FAN SCHEDULE										
MARK	MFGR	MODEL	CFM	EXTERNAL STATIC P. IN. WG.	RPM	ELECTRICAL		FAN TYPE	CONTROLS	NOTES
						VOLT/Ø/HZ	PWR			
EF-1	COOK	GC-128	75	0.1	750	120/1/60	29 W	CEILING EXH.	SWITCH	1

NOTES: 1. PROVIDE CEILING GRILLE, INTEGRAL BACK DRAFT DAMPER, VARI-SPEED CONTROLLER (NEAR FAN AND ABOVE CEILING), FACTORY MEANS OF DISCONNECT AND WALL CAP.

DIFFUSER SCHEDULE							
MARK	MFGR	MODEL	NECK SIZE	FACE SIZE	FINISH	NOTES	
SD-1	TITUS	TMS/3	6"Ø	12"x12"	WHITE	1,2	
SR-1		S300FL	14"x16"	-	ANODIZED	3	
RG-1		350F	20"x14"	-	WHITE	3	

- NOTES:
- PROVIDE WITH TRIM KIT IN AREA WITH GYP CEILING.
 - PROVIDE WITH OPOSED BLADE DAMPER IN AREA WITH GYP CEILING.
 - PROVIDE WITH OPPOSED BLADE DAMPER.

FURNACE SCHEDULE										
MARK	MFGR	MODEL NO.	CFM	EXT. STATIC P. IN. WG.	HEATING (GAS)		ELECTRICAL		OUTSIDE AIR (CFM)	NOTES
					BTUH INPUT	BTUH OUTPUT	VOLT/Ø/HZ	HP		
F-1	LENNOX	EL196UH110X60C	1,990	0.8	110,000	107,000	120/1/60	1	275	1,2,3,4,5

- NOTES:
- PROVIDE 1" THICK THROWAWAY TYPE FILTER WITH HOLDING FRAME FOR EACH UNIT.
 - PROVIDE EACH UNIT WITH 7-DAY PROGRAMMABLE HEAT/COOL/AUTO CHANGEOVER THERMOSTAT WITH OPTIMUM START CONTROLS.
 - CONDENSING UNITS, COOLING COILS, AND FURNACES SHALL ALL BE OF THE SAME MANUFACTURER.
 - EXTERNAL STATIC PRESSURE LISTED REPRESENTS STATIC PRESSURE REQUIRED FOR DUCTWORK AND DIFFUSERS OUTSIDE THE HVAC UNIT COMPLETELY INDEPENDENT OF ANY PRESSURE DROP THROUGH THE HVAC EQUIPMENT INCLUDING BUT NOT LIMITED TO FILTERS AND COILS.
 - PROVIDE UNIT WITH 8"Ø ROUND BALANCING DAMPER CONTROL OF OUTDOOR AIR SUPPLY.

CONDENSING UNIT SCHEDULE											
MARK	MFGR	MODEL NO.	COOLING			ELECTRICAL			EVAP. COIL MODEL NO.	SEER2	NOTES
			TOTAL BTUH	AMB.	EVAP. EAT DB/WB	VOLT/Ø/HZ	MCA	MOCP			
CU-1	LENNOX	ML17XC1-060	58,000	95	80/67	208/1/60	31.3	50	CX35-51/61C	13.8	1,2,3


- NOTES:
- PROVIDE TIME DELAY ON COMPRESSOR RE-START, CRANKCASE HEATER, AND COMPRESSOR LOCK-OUT WITH AMBIENT BELOW 35 °F. PROVIDE INDOOR COIL WITH THERMAL EXPANSION VALVE (TXV).
 - MECHANICAL CONTRACTOR SHALL COORDINATE ALL UNIT MOCP'S OF ACTUAL INSTALLED EQUIPMENT WITH ELECTRICAL CONTRACTOR.
 - PROVIDE HAIL GUARDS FOR EACH UNIT.

MINI SPLIT SYSTEM AC/HEAT PUMP CONDENSING UNIT SCHEDULE											
MARK	MFGR	MODEL NO.	NOMINAL TONS	COOLING BTUH	HEATING BTUH	ELECTRICAL			SEER2	TOTAL WEIGHT	NOTES
						VOLT/Ø/HZ	MCA (AMPS)	MOCP (AMPS)			
HPU-1	MITSUBISHI	MUZ-GS36NA2	3	33,200	35,200	208/1/60	22	25	25	122 lbs	1,2


- NOTES:
- MECHANICAL CONTRACTOR SHALL COORDINATE ALL UNIT MOCP'S OF ACTUAL INSTALLED EQUIPMENT WITH ELECTRICAL CONTRACTOR.
 - PROVIDE HAIL GUARDS FOR EACH UNIT.

MINI SPLIT SYSTEM AC INDOOR UNIT SCHEDULE									
MARK	MFGR	INDOOR UNIT MODEL NO.	EVAP. CFM	NOMINAL TONS	ELECTRICAL		AHU WEIGHT (LBS)	OUTDOOR UNIT	NOTES
					MCA (A)	VOLT/Ø/HZ			
AHU-1	MITSUBISHI	MSZ-GS36NA2	380	3	1	208/1/60	45	HPU-1	1,2

- NOTES:
- PROVIDE WIRED THERMOSTAT CONTROL, REFRIGERANT LINE SETS, CONDENSATE PUMP, & ELECTRICAL WHIPS. COORDINATE UNIT MOCP WITH ELECTRICAL CONTRACTOR.
 - PROVIDE BLUE DIAMOND MicroBlue MINI CONDENSATE PUMP.



SUPPLY REGISTER DETAIL
SCALE: NONE



BRANCH DUCT TAKEOFF DETAIL
SCALE: NONE

BC PROJECT #: 25202 VV/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service by the Designer/Engineer and is intended for use on the project only. Pursuant to the Accredited Works Copyright Protection Act of 1980, all drawings, specifications, lists and designs, including the overall form, arrangement and composition of spaces and elements appearing herein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.



GUY GRONBERG
ARCHITECTS, P.C.
119 SE 3rd St.
Lee's Summit, MO 64083
Phone 816.524.0516
Fax 816.524.2516

BC ENGINEERS
INCORPORATED
5720 Readwin Shawnee, KS 66203 (913) 262-1772

1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081

DESCRIPTION

REV# DATE

DATE: 09-31-2025

PROJECT# 25007

MECH SCHEDULE
& DETAILS

M2.0



**GUY GRONBERG
ARCHITECTS, P.C.**
113 SE 3rd St.
Lee's Summit, MO 64063
Phone 816.324.0878
Fax 816.324.6576



**BC ENGINEERS
INCORPORATED**
5720 Rendow Shawnee, KS 66203 (913) 682-1772

**1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081**

DESCRIPTION

REV# DATE

DATE: 02-21-2025

PROJECT# 25007

ELECTRICAL
SPECIFICATIONS

E1.0

ELECTRICAL SPECIFICATIONS

1. GENERAL PROVISIONS:
- A. PROVIDE ALL LABOR, MATERIALS, EQUIPMENT, NECESSARY FOR THE COMPLETE INSTALLATION OF THE ELECTRICAL SYSTEMS OUTLINED.
- B. OBTAIN ALL PERMITS, FEES, LICENSES, INSPECTIONS, AND CERTIFICATES OF COMPLIANCE OR APPROVAL AS REQUIRED BY THE AUTHORITIES.
- C. ALL WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE LATEST APPROVED EDITION OF THE NATIONAL ELECTRIC CODE (NEC), AND ALL APPLICABLE LAWS, CODES AND REGULATIONS OF THE GOVERNMENTAL BODIES HAVING JURISDICTION OVER THE SITE.
- D. ALL TESTING REQUIRED BY AUTHORITIES SHALL BE CONSIDERED PART OF THIS WORK.
- E. DURING CONSTRUCTION, ALL FIXTURES, EQUIPMENT, CONDUIT, ETC. SHALL BE COVERED, PLUGGED, OR CAPPED AS REQUIRED TO KEEP CLEAN AND UNDAMAGED. ALL DAMAGED ITEMS SHALL BE RESTORED TO ORIGINAL CONDITION OR REPLACED. ALL PROTECTIVE COVERING SHALL BE REMOVED BEFORE FINAL ACCEPTANCE.
- F. PROVIDE ALL NECESSARY CUTTING AND PATCHING OF WALLS, FLOORS, CEILINGS, AND ROOFS AS NECESSARY. PATCH AROUND ALL OPENINGS SHALL MATCH ADJACENT AREA. COORDINATE ALL ROOFING WORK WITH OWNER OR RESPONSIBLE PARTY, SO THAT THE EXISTING ROOFING WARRANTY WILL BE MAINTAINED.
- G. CONTRACTOR SHALL GUARANTEE ALL WORK AND MATERIALS AGAINST DEFECTS FOR A PERIOD OF ONE YEAR FROM FINAL ACCEPTANCE.
- H. CONTRACTOR SHALL PROVIDE ACCESS PANELS WHERE NECESSARY FOR CONCEALED ELECTRICAL COMPONENTS.
- I. CONTRACTOR SHALL PROMPTLY CALL ENGINEERS ATTENTION TO ANY APPARENT CONTRADICTIONS, AMBIGUITIES, ERRORS, DISCREPANCIES, OR OMISSIONS IN THE PLANS OR SPECIFICATIONS.
2. OPERATION AND MAINTENANCE MANUALS:
- A. DURING THE COURSE OF CONSTRUCTION, COLLECT AND COMPILE OPERATING INSTRUCTIONS, WIRING DIAGRAMS, CATALOGS, LUBRICATION AND PREVENTIVE MAINTENANCE INSTRUCTIONS, PARTS LISTS, ETC. FOR ALL EQUIPMENT TURNED UNDER THIS CONTRACT.
- B. ALL LITERATURE AND INSTRUCTIONS SHIPPED WITH THE EQUIPMENT SHALL BE SAVED FOR INCLUSION IN THE OPERATION AND MAINTENANCE MANUALS.
- C. ALL LITERATURE LISTED ABOVE AND ALL PAPERS LISTING WARRANTIES, ETC. SHALL BE COLLATED AND LABELED WITH THE PROJECT NAME, ADDRESS, ARCHITECT, ENGINEER, CONTRACTORS, ETC. DOCUMENTS SHALL BE COMPILED AND BOUND IN DIGITAL FILE OR 3 RING BINDER.
3. MANUFACTURERS:
- A. MANUFACTURERS, MODEL NUMBERS, ETC. INDICATED OR SCHEDULED ON THE DRAWINGS SHALL BE INTERPRETED AS HAVING ESTABLISHED A STANDARD OF QUALITY AND SHALL NOT BE CONSIDERED AS LIMITING COMPETITION. ARTICLES, FIXTURES, ETC. OF EQUAL QUALITY BY MANUFACTURERS SHALL BE ACCEPTABLE, SUBJECT TO STRUCTURAL AND ELECTRICAL CONSTRAINTS OF THE PROJECT DESIGN, UNLESS NOTED OTHERWISE.
4. TESTING, AND BALANCING:
- A. ALL CIRCUITS SHALL BE TESTED FOR CONTINUITY, SHORTS, AND GROUNDS BEFORE CONNECTING TO THE PROPER PHASE AS DESIGNED TO BALANCE THE LOADING BETWEEN PHASES.
- B. POWER AND LIGHTING PANELS SHALL BE PROPERLY PHASED TO DISTRIBUTE THE LOAD AND SHALL BE CONNECTED AND ADJUSTED TO OPERATE AS SPECIFIED.
- C. ALL MOTORS AND SIMILAR EQUIPMENT SHALL BE CHECKED FOR PROPER PHASE ROTATION AND OPERATION.
5. RACEWAYS:
- A. CONDUIT INSIDE THE BUILDING SHALL BE METALLIC TUBING (EMT), BEARING THE UL LABEL, WITH COMPRESSION TYPE FITTINGS OR SCREW SET FITTINGS.
- B. CONDUIT EXPOSED TO THE WEATHER, INSTALLED UNDERGROUND, IN CONCRETE, OR USED FOR SERVICE ENTRANCE SHALL BE STANDARD RIGID CONDUIT (GALVANIZED) WITH THREADED FITTINGS.
- C. UNDERGROUND CONDUIT MAY BE POLYVINYL CHLORIDE WITH A DEFLECTION TEMPERATURE, UNDER LOAD AT 204 FRS, OF 78 DEGREES C, AND A TENSILE STRENGTH OF 5,200 PHS. JOINTS SHALL BE FLUSH SOLVENT WELDED IN ACCORDANCE WITH THE MANUFACTURER'S INSTRUCTIONS. CONDUIT SHALL BE EQUAL TO CARLON POWER AND COMMUNICATIONS DUCT TYPE DB (DIRECT BURIAL). CONDUIT AND FITTINGS SHALL BE PRODUCED BY THE SAME MANUFACTURER.
- D. FLEXIBLE METAL CONDUIT SHALL ONLY BE USED FOR CONNECTIONS TO MOTORS, TRANSFORMERS, AND LIGHT FIXTURES. MAXIMUM LENGTH SHALL BE 6'-0".
6. CONDUCTORS:
- A. WIRES SHALL BE CONTINUOUS WITHOUT SPLICES OR TAPS IN CONDUIT RUNS. ALL SPLICES SHALL BE MADE IN JUNCTION, PULL, OR OUTLET BOXES. ALL WIRE SHALL BE INSTALLED IN CONDUIT, WIREWAYS, OR OTHER PROTECTIVE COVER SANCTIONED BY CODES.
- B. CONDUCTORS FOR LIGHTING AND POWER SHALL BE COPPER, MINIMUM NO. 12 A.W.G., 600 VOLT.
- C. NO. 10 GAUGE AND SMALLER CONDUCTORS SHALL BE TYPE THHN (WET LOCATIONS) OR THHN (DRY LOCATIONS), SOLID CONDUCTOR, UNLESS OTHERWISE INDICATED.
- D. NO. 8 GAUGE AND LARGER CONDUCTORS SHALL BE TYPE THWN (WET LOCATIONS) OR THHN (DRY LOCATIONS), STRANDED, UNLESS OTHERWISE INDICATED.
- E. SERVICE ENTRANCE AND PANEL FEEDER CONDUCTORS, NO. 3 GAUGE AND LARGER SHALL BE TYPE XHHW-2 (WET LOCATIONS) OR THHN (DRY LOCATIONS), STRANDED COPPER, UNLESS OTHERWISE INDICATED.
7. MC CABLE:
- A. MC CABLE SHALL CONSIST OF INTERLOCK ARMORED CABLE MADE OF THREE OR FOUR TYPE THHN SOLID (88 AWG AND LARGER MAY BE STRANDED) COPPER CONDUCTORS RATED 90°C FOR DRY LOCATIONS, WITH NYLON OR EQUIVALENT UL LISTED JACKET, PER UL STANDARD 83. THE THREE CONDUCTORS SHALL BE TWISTED TOGETHER WITH THE COPPER GROUNDING CONDUCTOR, SUITABLE FILERS, AND WRAPPED IN BINDER TAPE. THE ASSEMBLY SHALL BE ARMORED WITH SPIRALLY WRAPPED INTERLOCKED ARMOR OF ALUMINUM OR GALVANIZED STEEL.
- B. CABLES SHALL BE TESTED IN ACCORDANCE WITH UL STANDARD 1569 FOR TYPE MC CABLE AND RATED AT 600 VOLTS, 90 DEG. C FOR DRY LOCATIONS AND 75 DEG. C FOR WET LOCATIONS.
8. WIRING DEVICES:
- A. WALL SWITCHES SHALL BE SPECIFICATION GRADE, QUIET TYPE, FLUSH TOGGLE SWITCH, RATED FOR 20 AMPS, WITH THERMOPLASTIC COVER PLATES.
- 1) SINGLE POLE: HUBBELL #CS1221-X, OR EQUAL.
- 2) THREE WAY: HUBBELL #CS1223-X, OR EQUAL.
- 3) AS SPECIFIED ON PLANS.
- B. RECEPTACLES SHALL BE SPECIFICATION GRADE, DUPLEX, GROUNDING, THREE-WIRE TYPE, RATED FOR 20 AMPS, WITH THERMOPLASTIC COVER PLATES. HUBBELL #C8350-X, OR EQUAL.
- C. GROUND FAULT INTERRUPTER RECEPTACLES (GFI) SHALL BE HUBBELL #GF20-XL. DEVICE COVER PLATES SHALL BE AS HEREINBEFORE SPECIFIED.
- D. ISOLATED GROUND RECEPTACLES (IG) SHALL BE HUBBELL #ORS3520, ORANGE COLOR. DEVICE COVER PLATES SHALL BE AS HEREINBEFORE SPECIFIED.
- E. RECEPTACLES OUTSIDE BUILDING AND WHERE NOTED AS WEATHERPROOF, SHALL BE LISTED "WEATHER-RESISTANT" HUBBELL #WF1200-X OR EQUAL AND SHALL BE INSTALLED IN A WEATHERPROOF ENCLOSURE WHICH SHALL BE INTERMATIC #WP10M00 OR #WP1010SHMO DECATAL METAL WEATHERPROOF RECEPTACLE COVER. COVER SHALL BE WEATHER PROOF RATED WHILE IN USE.
- F. VERIFY DEVICES AND DEVICE COVERPLATES COLOR AND STYLE WITH ARCHITECT.
9. BOXES:
- A. HOT DIPPED GALVANIZED STEEL BOXES. PROVIDE TYPE TO SUIT CONDITIONS FOR INSTALLATION.
- B. ALL BOXES SHALL BE FLUSH MOUNTED, UNLESS INDICATED OTHERWISE.
10. PANELBOARDS:
- A. PANELBOARDS ARE EXISTING AND SHALL BE REUSED. PROVIDE ADDITIONAL BREAKERS AS REQUIRED TO CONNECT CIRCUITS AS SHOWN ON THE DRAWINGS. ADDITIONAL BREAKERS SHALL BE THERMAL MAGNETIC, QUICK-BREAK BOLT ON CIRCUIT BREAKERS WITH ONE HANDLE FOR SINGLE OR MULTI-POLE RATINGS AND SHALL BE COMPATIBLE WITH EXISTING PANELS.
- B. COMPLETE EXISTING DIRECTORY AS REQUIRED TO IDENTIFY NEW CIRCUIT, LISTING LOAD SERVED AND OTHER PERTINENT DATA.
11. DISCONNECTS:
- A. DISCONNECTS SHALL BE EXTERNALLY OPERATED, QUICK-ACTING, QUICK-BREAK, SAFETY, WITH PROVISIONS FOR PAD LOCKING. FUSED AND NON-FUSED DISCONNECT SWITCHES SHALL BE PROVIDED AS INDICATED.
- B. INDOOR SWITCHES SHALL BE NEMA 1 AND OUTDOOR SWITCHES SHALL BE NEMA 3R, UNLESS INDICATED OTHERWISE.
12. FUSES:
- A. FUSES PROTECTING CIRCUIT BREAKER PANELS SHALL BE CURRENT LIMITING UL CLASS RK-1 FUSES WITH 200,000 AMPERES RMS SYM INTERRUPTING CAPACITY. FUSING ELEMENTS SHALL BE SILVER FOR RATINGS ABOVE 60 AMPERES.
- B. ALL OTHER FUSES SHALL BE UL CLASS RK-5, DUAL-ELEMENT WITH A MINIMUM TIME-DELAY OF 10 SECONDS AT 80% RATING. FUSES SHALL HAVE CURRENT LIMITING SHORT-CIRCUIT LINKS AND 200,000 AMPERES RMS SYM INTERRUPTING CAPACITY. FUSING ELEMENTS SHALL BE COPPER.

ELECTRICAL SPECIFICATIONS (CONTINUED)

13. LIGHT FIXTURES:
- A. WHERE LIGHT FIXTURES ARE MOUNTED IN A LAY-IN CEILING, PROVIDE A MINIMUM OF 2 SUPPORT WIRES ATTACHED DIRECTLY BETWEEN EACH LIGHT FIXTURE AND THE BUILDING STRUCTURE. SUPPORT WIRES SHALL BE A MINIMUM OF 12 GAUGE GALVANIZED STEEL WIRE, SOFT ANNEALED.
- B. FIXTURES ARE REQUIRED AT ALL LIGHTING OUTLETS SHOWN ON THE DRAWINGS. APPROVED LIGHTING FIXTURE WIRE IS REQUIRED IN ALL FIXTURES AND FIXTURE RACEWAYS. WEATHERPROOF WIRING IS REQUIRED FOR EXTERIOR FIXTURES. ALL PARTS OF FIXTURES AND WIRING SHALL BE IN ACCORDANCE WITH NEC REQUIREMENTS.
- C. ALL FIXTURES SHALL CARRY UL AND ETL LABELS.
14. SLEEVES:
- A. PROVIDE, SET, AND PROPERLY LOCATE PIPE SLEEVES AS REQUIRED FOR THIS WORK.
- B. INTERIOR PARTITIONS: 16 GAUGE GALVANIZED STEEL, PACK BETWEEN CONDUIT AND SLEEVE WITH FIRE SAFING AND CAULK AT EACH END WITH FIRE RESISTANT SEALANT.
- C. ROOF: PROSET OR EQUAL, MANUFACTURED PVC SCHEDULE 40 PIPE SLEEVE WITH WEATHERPROOF SEAL. COORDINATE WITH ROOFING CONTRACTOR AND FLASH AS REQUIRED TO MAINTAIN ROOF WARRANTY.
15. GROUNDING:
- A. GROUND ALL ELECTRICAL APPARATUS IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE (NEC) 250, AND ANY LOCAL REQUIREMENTS. INSURE CONTINUOUS BOND WHERE FLEXIBLE CONDUIT IS USED. PROVIDE BONDING JUMPER INSIDE ALL FLEXIBLE CONDUIT.
- B. BOND METAL PIPING SYSTEMS IN COMPLIANCE WITH NEC 250.4(A)(4).
16. REMODELING WORK:
- A. DEMOLITION: DISCONNECT, DEMOLISH AND REMOVE ABANDONED ELECTRICAL MATERIALS AND EQUIPMENT INDICATED TO BE REMOVED AND NOT INDICATED TO BE SALVAGED OR REMAIN.
- B. EQUIPMENT TO BE SALVAGED:
- 1) DISCONNECT AND REMOVE EXISTING ELECTRICAL EQUIPMENT INDICATED TO BE REMOVED AND SALVAGED. DELIVER EQUIPMENT TO THE LOCATION DESIGNATED BY THE OWNER FOR STORAGE.
- 2) ALL MATERIALS AND EQUIPMENT DESIGNATED TO BE REUSED OR RELOCATED SHALL BE CAREFULLY REMOVED, AND STORED UNTIL NEEDED FOR REMODELING WORK. ALL ITEMS SHALL BE RESTORED TO LIKE NEW CONDITION WITH RUST OR CORROSION REMOVED, SURFACE PAINT TOUCHED UP OR REPAINTED AS REQUIRED TO MATCH NEW CONSTRUCTION, AND THOROUGHLY CLEANED AND INSPECTED. ANY ITEMS WHICH BECOME DAMAGED BEYOND REPAIR AS A RESULT OF CONSTRUCTION OR DEMOLITION ACTIVITY SHALL BE REPLACED WITH NEW MATERIAL, EQUIVALENT IN EVERY RESPECT.
- C. DISPOSAL AND CLEANUP: REMOVE FROM THE SITE AND LEGALLY DISPOSE OF DEMOLISHED MATERIALS AND EQUIPMENT NOT INDICATED TO BE SALVAGED.
- D. PROTECT ADJACENT MATERIALS INDICATED TO REMAIN. INSTALL AND MAINTAIN DUST AND NOISE BARRIERS TO KEEP DIRT, DUST, AND NOISE FROM BEING TRANSMITTED TO ADJACENT AREAS. REMOVE PROTECTION AND BARRIERS AFTER REMODELING OPERATIONS ARE COMPLETE.
- E. PROVIDE ALL ALTERATIONS AND REWORK INDICATED AND/OR REQUIRED FOR THE PROPER INSTALLATION AND OPERATION OF ALL EXISTING ELECTRICAL SYSTEMS, INTEGRATING THE NEW AND EXISTING AREAS LOCATE, IDENTIFY, AND PROTECT ELECTRICAL SERVICES PASSING THROUGH REMODELING AREA AND SERVING OTHER AREAS OUTSIDE THE REMODELING LIMITS. MAINTAIN SERVICES TO AREAS OUTSIDE REMODELING LIMITS. WHEN SERVICES MUST BE INTERRUPTED, INSTALL TEMPORARY SERVICES FOR AFFECTED AREAS.
- 1) ABANDONED CONDUIT SHALL HAVE WIRE REMOVED AND SHALL BE CAPPED. ABANDONED OUTLETS IN WALLS OR PARTITIONS SHALL HAVE DEVICES AND WIRE REMOVED, AND SHALL BE COVERED.
- 2) WHERE EXISTING CONDUITS TERMINATE AT AN EXISTING OUTLET IN A WALL, CEILING, OR FLOOR TO BE REMOVED, DISCONNECT AND REMOVE DEVICE AND WIRE FROM CONDUIT. CONDUIT SHALL BE CUT BACK AND CAPPED (BELOW THE FLOOR OR ABOVE THE CEILING) SO NOT TO CREATE AN OBSTRUCTION. PATCH FLOOR TO MATCH EXISTING.
- 3) WHERE EXISTING CIRCUITS EXTEND BEYOND THE OUTLET IN THE EXISTING WALL, CEILING, OR FLOOR TO BE REMOVED, FURNISH AND INSTALL NEW CONDUIT AND WIRE TO EITHER REROUTE THE CIRCUIT OR FEED THE REMAINING OUTLET(S) FROM ANOTHER ELECTRICAL SOURCE, BUT IN SUCH A MANNER AS NOT TO REVERSE THE CIRCUIT. ALL REROUTED CONDUIT SHALL BE APPROVED BY THE ARCHITECT.
- 4) WHERE EXISTING OUTLETS IN A WALL, CEILING, OR FLOOR TO BE REMOVED ARE ESSENTIAL TO MAINTAIN OPERATION OF OTHER REMAINING OUTLETS, RELOCATE THE OUTLET TO A NEW CONVENIENT LOCATION. EXISTING WIRING DEVICES SHALL NOT BE REUSED, UNLESS OTHERWISE INDICATED.
- 5) WHERE LIGHTING FIXTURES ARE INDICATED TO BE DEMOLISHED, REMOVE ALL WIRE AND MODIFY THE EXISTING CONDUIT (IF APPLICABLE) FOR THE NEW LIGHTING. ALL UNUSED CONDUIT SHALL BE REMOVED.
- 6) WHERE A TELEPHONE CIRCUIT EXTENDS BEYOND AN OUTLET IN AN EXISTING WALL, CEILING, OR FLOOR TO BE REMOVED, PROVIDE NECESSARY EMPTY CONDUIT AND NOTIFY THE OWNER WHO WILL REQUEST THE OWNER TO ARRANGE WITH THE TELEPHONE COMPANY FOR NEW WIRING TO OUTLETS THAT REMAIN.
- 7) WHERE EXISTING CONDUIT AND WIRE RUNS ARE LOCATED IN OR ATTACHED TO AN EXISTING WALL, CEILING OR FLOOR TO BE REMOVED, THEY SHALL BE REROUTED IN EITHER NEW OR EXISTING CONSTRUCTION TO MAINTAIN CONTINUITY OF CIRCUITS UNLESS OTHERWISE INDICATED.
- 8) CONDUIT SHALL BE CONCEALED WITHIN THE EXISTING BUILDING CONSTRUCTION WHEREVER POSSIBLE, EXCEPT WHERE OTHERWISE INDICATED.
- 9) EXISTING WIRE SHALL BE DISCONNECTED AND REMOVED WHEREVER EXISTING CIRCUITS ARE ABANDONED.
17. BOXES IN FIRE RATED ASSEMBLIES:
- A. OUTLET BOXES THAT DO NOT EXCEED 1/2" SQUARE NOTCHES AND INSTALLED IN FIRE RATED WALLS SHALL NOT BE INSTALLED CLOSER THAN 1/4" HORIZONTAL NOTCHES TO OTHER OUTLET BOXES.
- B. IF BOXES MUST BE INSTALLED WITHIN 2" OF EACH OTHER THAN BOTH OUTLET BOXES SHALL BE PROTECTED WITH LISTED PUTTY PADS, 3M FIRE BARRIER MOLDABLE PUTTY + OR EQUAL.

ELECTRICAL SYMBOLS LIST

CIRCUITING & NOTES

+46"	SPECIAL MOUNTING HEIGHT FOR ASSOCIATED DEVICE (CENTERLINE OF DEVICE)
GFI	GROUND FAULT CIRCUIT INTERRUPTER DEVICE
EM	EMERGENCY BATTERY BACKUP
(TIE)	PARTIAL HOMERUN. REFER TO PLANS FOR ADDITIONAL DEVICES CONNECTED TO THIS CIRCUIT.
	ELECTRICAL FLOOR PLAN NOTE WITH DESIGNATION
	CONDUIT CONCEALED WHERE POSSIBLE OR AS NOTED, ARROWS INDICATE HOME RUN TO PANEL. CIRCUIT NUMBERS INDICATED
	#12 WIRE IN CONDUIT, UNLESS NOTED OTHERWISE ON DRAWINGS OR SPECIFICATION
	GROUNDING CONDUCTOR, #12 WIRE UNLESS NOTED OTHERWISE ON DRAWINGS OR SPECIFICATION
	CONDUIT ROUTED UNDER FLOOR/GRADE

LIGHTING

	EMERGENCY TWIN HEAD LIGHT FIXTURE
	EXIT LIGHT WITH DIRECTIONAL ARROWS INDICATED
	STRIP FIXTURE WITH TYPE DESIGNATION
	RECESSED OR SURFACE MOUNTED FIXTURE WITH TYPE DESIGNATION
	NIGHT LIGHT, CONNECT TO UNSWITCHED CIRCUIT
	CEILING OR RECESSED FIXTURE WITH TYPE DESIGNATION
	WALL MOUNTED FIXTURE WITH TYPE DESIGNATION

POWER DEVICES

	DUPLEX RECEPTACLE, BOTTOM OF BOX AT 16" AFF, UNLESS NOTED OTHERWISE
	FOURPLEX RECEPTACLE, BOTTOM OF BOX AT 16" AFF, UNLESS NOTED OTHERWISE
	DEVICE MOUNTED ABOVE COUNTER AND/OR SPLASH GUARD
	HEAVY DUTY OUTLET - NEMA CONFIGURATION SIZE PER EQUIPMENT MANUFACTURER'S RECOMMENDATION
	PANEL BOARD, TOP OF BOX 6'-0" AFF
	JUNCTION BOX
	NON-FUSED DISCONNECT SWITCH
	FUSED DISCONNECT SWITCH
	MAGNETIC STARTER
	MOTOR WITH DESIGNATION
	FLOOR BOX

CONTROLS

S	SINGLE POLE WALL SWITCH, TOP OF BOX AT 48" AFF
S 3	THREE-WAY WALL SWITCH, TOP OF BOX AT 48" AFF

COMMUNICATIONS

	DATA/TELEPHONE OUTLET WITH MINIMUM 3/4" CONDUIT STUBBED UP TO ABOVE ACCESSIBLE CEILING, BOTTOM OF BOX AT 16", UNLESS NOTED OTHERWISE. PROVIDE WITH PULL STRING
	FLAT SCREEN TELEVISION - PROVIDE AND INSTALL ONE (1) HUBBELL #RR1510X RECESSED TAMPER-RESISTANT DUPLEX RECEPTACLE WITH COVERPLATE AND ONE (1) HUBBELL #HBL260 TWO GANG LARGE CAPACITY WALL BOX (UP TO 2" KNOCKOUT) W/ MUD RING AND COVERPLATE FOR DATA. PROVIDE 2" WITH PULL STRING TO ABOVE ACCESSIBLE CEILING FOR DATA CABLES. MOUNT BOX AT 5'-6" AFF UNLESS NOTED OTHERWISE (VERIFY)

LIGHT FIXTURE SCHEDULE

MARK NO.	MANUFACTURER & CATALOG NUMBER	VOLTS WATTS	LIGHT SOURCE	DESCRIPTION	EQUIVALENT MANUFACTURERS
A	LSI ABP24-FS1-UNV	120 48	LED 4750 LUM 4000K	2FT X 4FT LED PANEL LIGHT WITH FIELD SELECTABLE LUMEN OUTPUT AND COLOR TEMPERATURE.	WILLIAMS LITHONIA OR EQUAL
B	LSI ADL-FS1-UNV-4R-XXX	120 19	LED 1800 LUM 3500K	40 ROUND RECESSED DOWNLIGHT WITH FIELD SELECTABLE LUMEN OUTPUT AND COLOR TEMPERATURE. COORDINATE FINISH WITH ARCHITECT/OWNER.	WILLIAMS LITHONIA OR EQUAL
C	LSI LAW2-W-2-07L-0L-835-FA-S-I-UNV-XXX	120 12	LED 1400 LUM 3500K	2FT WALL MOUNTED LED WITH FIELD SELECTABLE LUMEN OUTPUT AND COLOR TEMPERATURE. COORDINATE FINISH WITH ARCHITECT/OWNER.	WILLIAMS LITHONIA OR EQUAL
D4	LSI AST-4-FS-SPD-UNC-QCR35-SMK	120 40	LED 4200 LUM 4000K	4FT STRIP LIGHT WITH SQUARE POLYCARBONATE DIFFUSE LENS AND FIELD SELECTABLE LUMEN OUTPUT AND COLOR TEMPERATURE. SURFACE MOUNT FIXTURES TO UNISTRUT.	CLIENT SPECIFIED NO SUBSTITUTIONS
D8	LSI AST-8-FS-SPD-UNC-QCR35-SMK	120 81	LED 11000 LUM 4000K	8FT STRIP LIGHT WITH SQUARE POLYCARBONATE DIFFUSE LENS AND FIELD SELECTABLE LUMEN OUTPUT AND COLOR TEMPERATURE. SURFACE MOUNT FIXTURES TO UNISTRUT.	CLIENT SPECIFIED NO SUBSTITUTIONS
	LSI CEC-R-WH-SD2-RC WITH CRL-S-XX	120 5	INCL	COMBINATION EMERGENCY/EXIT LIGHT WITH LED LAMPS, RED LETTERS ON WHITE BACKGROUND, TWIN 1W EMERGENCY LIGHT HEADS, UNIVERSAL MOUNT, HIGH CAPACITY BATTERY BACKUP AND REMOTE TWIN HEAD OUTDOOR RATED FIXTURE.	DUAL-LITE LITHONIA OR EQUAL

NOTES:
UNLESS NOTED "NO SUBSTITUTION", OTHER MANUFACTURERS AND PRODUCTS OF EQUAL QUALITY AND PERFORMANCE SHALL BE ACCEPTABLE, EVEN IF NOT SPECIFICALLY LISTED

BC PROJECT #: 25202 VV/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service to the Designer/Engineer and is intended for use on the project only. Pursuant to the Architectural Rights Copyright Protection Act of 1986, all drawings, specifications, notes and designs, including the overall form, arrangement and composition of spaces and elements appearing herein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.

BC ENGINEERS INCORPORATED
5720 Reeder Shawnee, KS 66203 (913)262-1772

**1309 SW
JEFFERSON ST
LEES SUMMIT, MO 64081**

REV#	DATE	DESCRIPTION
DATE: 09-31-2025		
PROJECT# 25007		


E2.0



- 1 EXISTING LIGHTING TO REMAIN.
- 2 CONNECT TO EXISTING LIGHTING CIRCUIT IN SPACE.

BC PROJECT #:	25202 VV/AW
MISSOURI	PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service by the Designer/Engineer and is intended for use on this project only. Pursuant to the Architectural Works Copyright Protection Act of 1990, all drawings, specifications, ideas and designs, including the overall form, arrangement and composition of space and elements appearing herein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2005 BC Engineers, Inc.



**GUY GRONBERG
ARCHITECTS, P.C.**
113 SE 3rd St.
Lee's Summit, MO 64063
Phone 816.324.0878
Fax 816.324.6576



**BC ENGINEERS
INCORPORATED**
5720 Resden Shawnee, KS 66203 (913)262-1772


**1309 SW
JEFFERSON ST**
LEES SUMMIT, MO 64081

REV# DATE DESCRIPTION

DATE: 03-31-2025
PROJECT# 25007

ELECTRICAL
POWER PLAN

E3.0

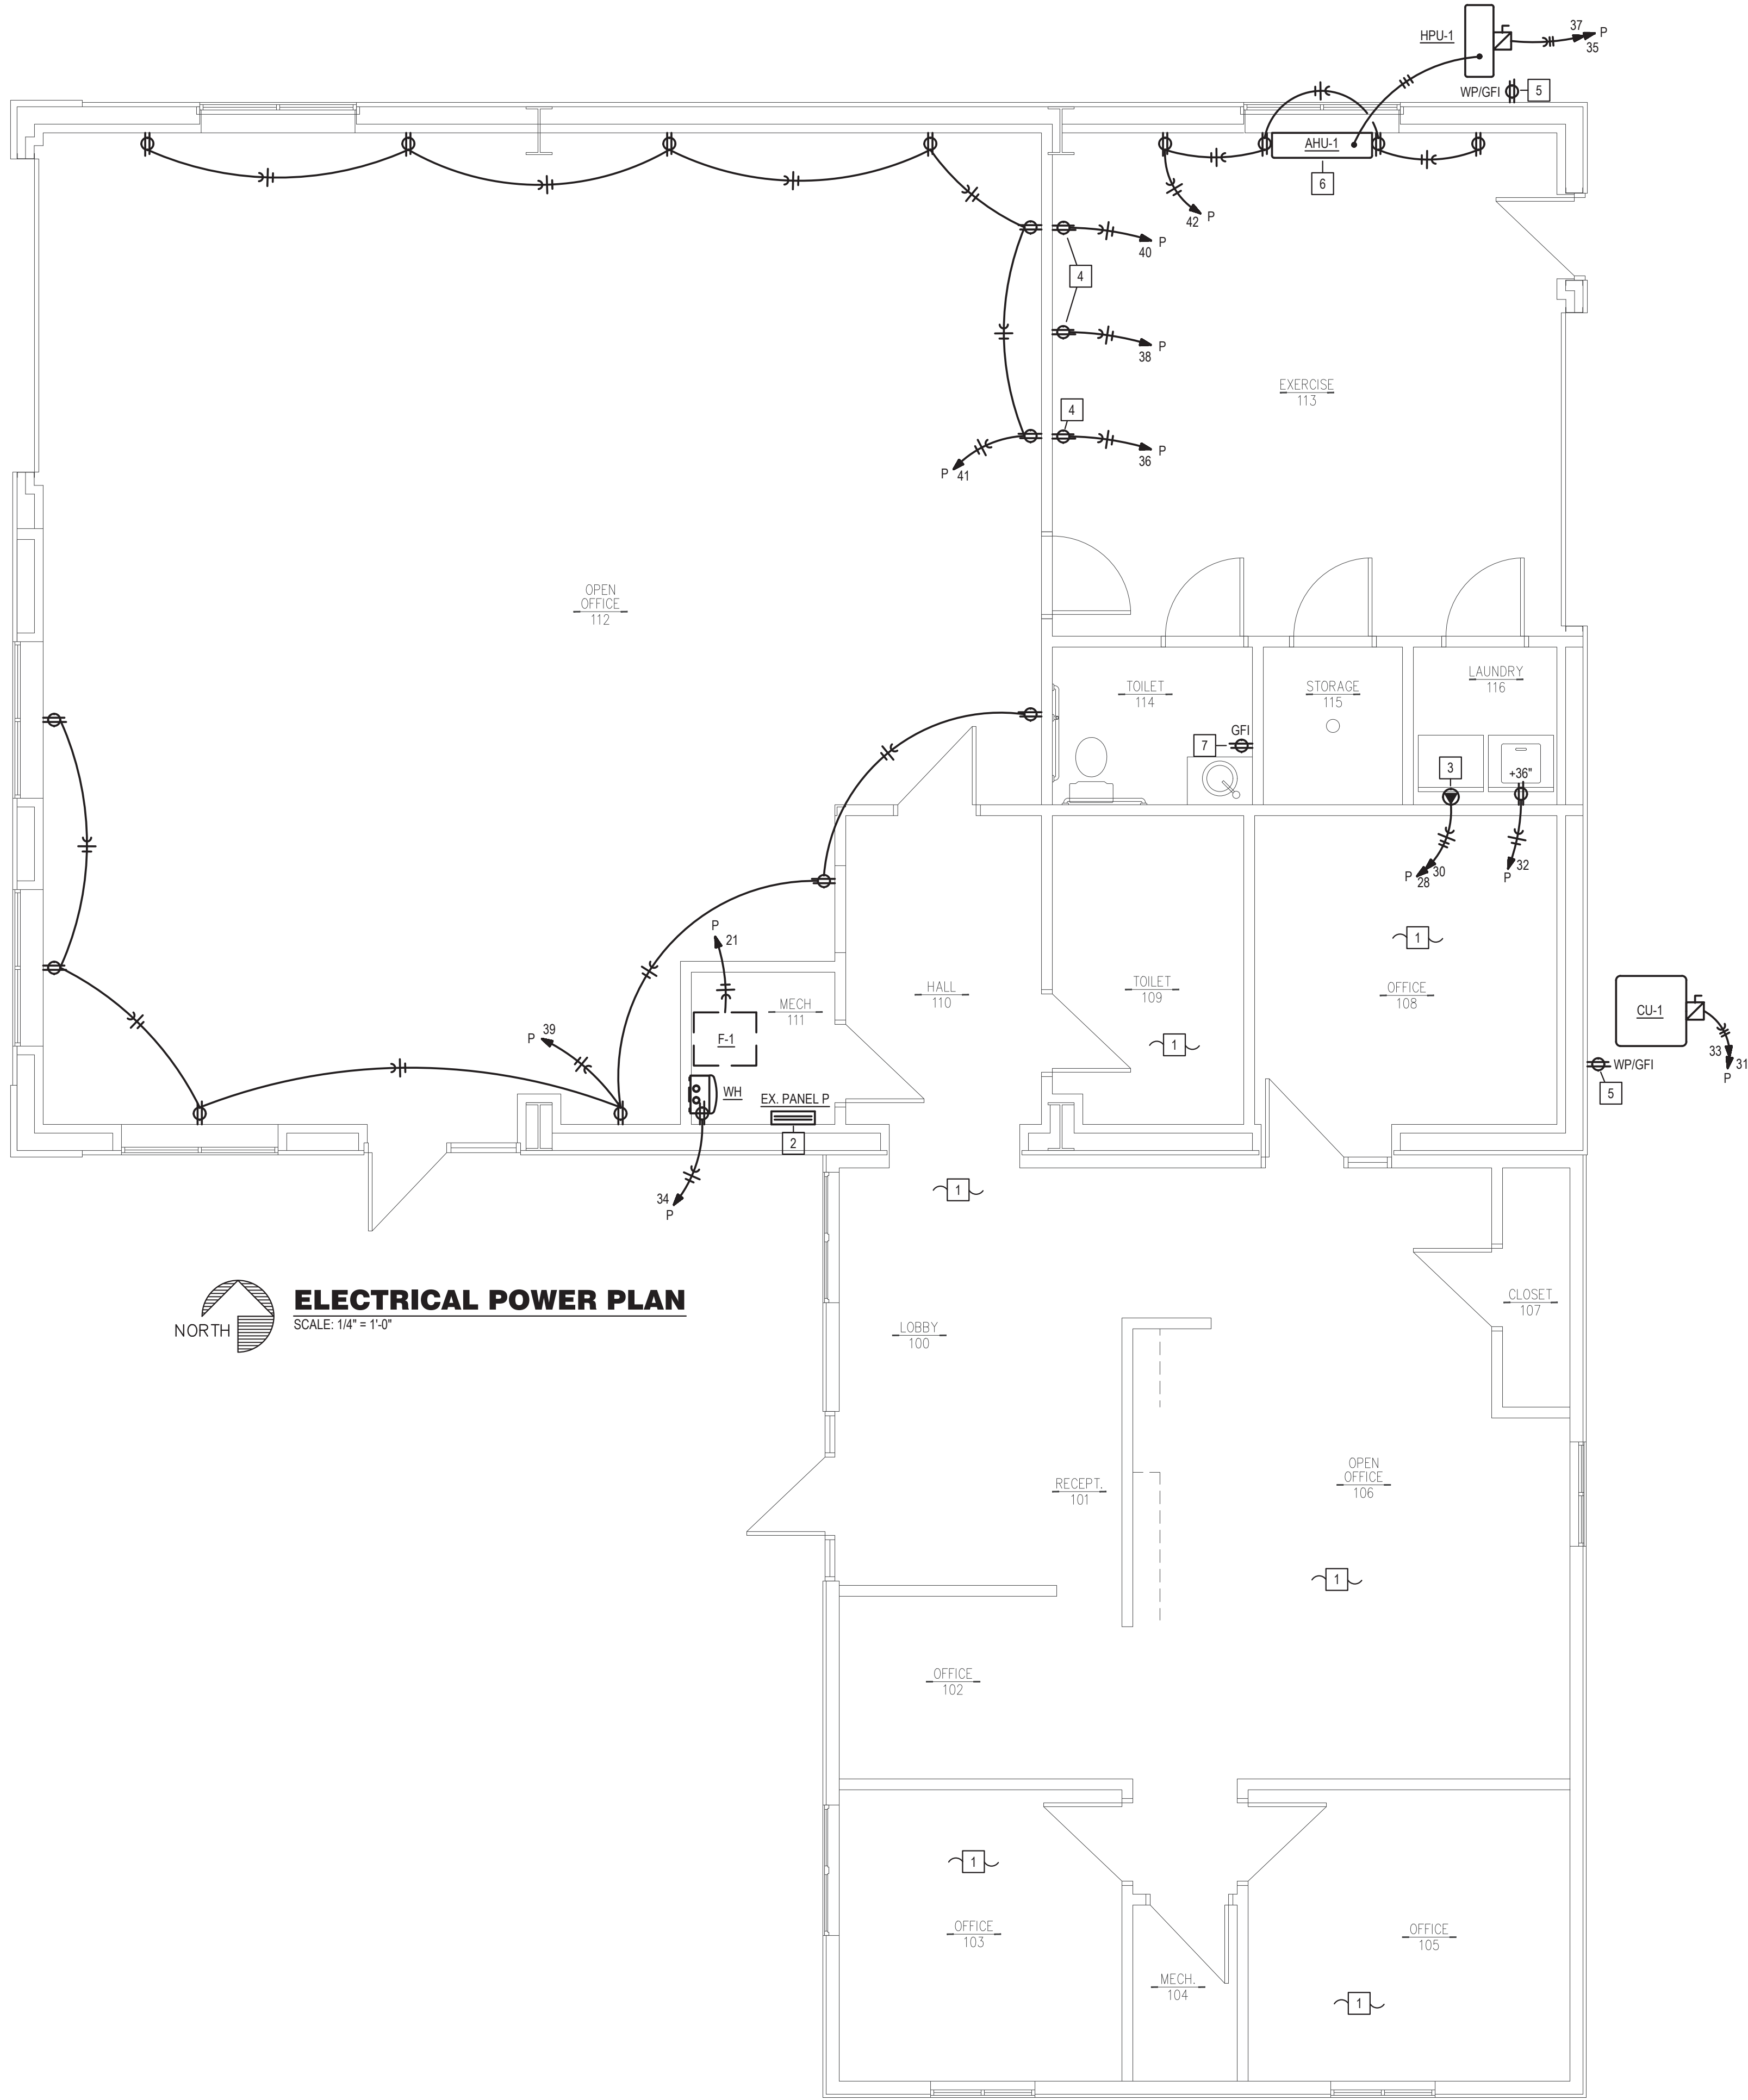

ELECTRICAL POWER PLAN
SCALE: 1/4" = 1'-0"
NORTH

POWER PLAN NOTES:

- 1 NO WORK IN THIS SPACE.
- 2 EXISTING 200A PANEL WITH NO VISIBLE LABEL TO REMAIN, REFERRED TO AS PANEL "P" IN THIS DRAWING.
- 3 PROVIDE HEAVY DUTY OUTLET FOR DRYER, FIELD VERIFY LOCATION AND ELECTRICAL REQUIREMENTS.
- 4 PROVIDE DEDICATED RECEPTACLES FOR TREADMILLS, COORDINATE QUANTITY AND LOCATION WITH ARCHITECT/OWNER.
- 5 VERIFY LOCATIONS OF EXISTING EXTERIOR RECEPTACLES, PROVIDE NEW AS INDICATED IF NONE ARE EXISTING WITHIN 25' OF NEW MECHANICAL EQUIPMENT. TIE NEW EXTERIOR RECEPTACLES TO EXISTING CIRCUIT FOR EXTERIOR RECEPTACLES.
- 6 CONNECT AHU-1 TO HPU-1 PER MANUFACTURER'S INSTRUCTIONS.
- 7 TIE NEW RESTROOM RECEPTACLE TO THE CIRCUIT FOR THE EXISTING RECEPTACLE IN THE EXISTING NEIGHBORING RESTROOM.

EXIST PANEL: P		VOLTS:		120/240V		PH: 1Ø		3W		LOCATION:		EX. MECH RM		MOUNTING:		SURFACE	
BUS: 225A		MAIN:		200A		MCB								FEEDER:		SEE RISER DIAGRAM	
CKT	DESCRIPTION	AMPS	POLE	WIRE	ØA	ØB	ØA	ØB	WIRE	POLE	AMPS	DESCRIPTION	CKT NO				
1	OPEN OFFICE / EXERCISE LIGHTS [EX]	20	1	12	1,378				12	1	20	EX. CIRCUIT [EX]	2				
3	EX. CIRCUIT [EX]	20	1	12					12	1	20	EX. CIRCUIT [EX]	4				
5	EX. CIRCUIT [EX]	20	1	12					12	1	20	EX. CIRCUIT [EX]	6				
7	EX. CIRCUIT [EX]	20	1	12					12	1	20	EX. CIRCUIT [EX]	8				
9	EX. CIRCUIT [EX]	30	1	10					12	2	20	EX. CIRCUIT [EX]	10				
11	EX. CIRCUIT [EX]	20	1	12									12				
13	EX. OFFICE FURN [EX]	15	1	12					10	2	30	EX. CIRCUIT [EX]	14				
15	EX. A/C [EX]	30	2	10									16				
17									12	1	20	EX. CIRCUIT [EX]	18				
19	EX. CIRCUIT [EX]	20	1	12					12	1	20	EX. CIRCUIT [EX]	20				
21	F-1	15	1	12	1,320				12	1	20	EX. CIRCUIT [EX]	22				
23	EX. CIRCUIT [EX]	20	1	12					10	2	30	EX. AC [EX]	24				
25	EX. CIRCUIT [EX]	20	1	12									26				
27	EX. CIRCUIT [EX]	20	1	12					2,500	10	2	30	CLOTHES DRYER	28			
29	EX. CIRCUIT [EX]	20	1	12				2,500					30				
31	CU-1	50	2	6		3,255		1,800	12	1	20	CLOTHES WASHER [GF]	32				
33						3,255		500	12	1	20	WATER HEATER [HL]	34				
35	HPU-1	25	2	10			2,392	1,800	12	1	20	TREADMILL	36				
37						2,392		1,800	12	1	20	TREADMILL	38				
39	OPEN OFFICE RECS	20	1	12			900	1,800	12	1	20	TREADMILL	40				
41	OPEN OFFICE RECS	20	1	12	1,080			720	12	1	20	EXERCISE CONV RECS	42				
NOTES:					9,425	6,547	5,520	7,900	TOTAL CONNECTED LOAD:					29,392 VA			
[EX] EXISTING BRKR, [GF] GFCI BRKR 5mA					14,945		14,447	NEG DEMAND LOAD:						28,417 VA			
PROVIDE ADDITIONAL COMPATIBLE BREAKERS AS REQUIRED., [HL] HANDLE LOCK										DEMAND AMPS @ 240 VOLT / 1Ø:					118.40 A		

BC PROJECT #: 25202 VV/AW
MISSOURI PE COA #2009003629

This drawing has been prepared by the Engineer, or under his supervision. This drawing is provided as an instrument of service by the Designer/Engineer and is intended for use on the project only. Pursuant to the Architectural Works Copyright Protection Act of 1990, all drawings, specifications, notes and designs, including the overall form, arrangement and composition of spaces and elements appearing therein, constitute the original, copyrighted work of the Designer/Engineer. Any reproduction, use, or disclosure of information contained herein without prior written consent of the Engineer is strictly prohibited. © 2025 BC Engineers, Inc.