ALURA APARTMENTS - VILLAGE AT DISCOVERY PARK GARAGE G11 TYPE "E"

GARAGE BUILDING "E"

LEE'S SUMMIT, JACKSON COUNTY, MISSOURI

PROJECT INFORMATION

SITE DATA		
SITE ZONING:	(SEE CIVIL)	
SITE SIZE:	(SEE CIVIL)	
SITE DENSITY:	(SEE CIVIL)	
NO. OF PARKING SPACES:	(SEE CIVIL)	
COD	ES AND REGULATIONS	
BLDG. & RELATED CODES:	2018 IBC, IPC, IMC & 2018 IECC	
ELECT. CODE:	2017 NEC	
FIRE CODE:		
ACCESSIBILITY:	ICC/ANSI A117.1- 2009	
MISC.:	ALL APPLICABLE FEDERAL, STATE & LOCAL CODES, LAWS & ORDINANCES	
BUILDING CODE DATA		
USE GROUP:	U (PRIVATE GARAGES)	
CONSTRUCTION TYPE:	VB	
EXT. WALL CONSTRUCTION:	NON-RATED	
OTHER WALL CONSTRUCTION:	SEPARATION WALLS = NON-RATED	
TOTAL ALLOW. AREA:	5,500 SF/FL00R	
TOTAL ACTUAL AREA:	2,264 SF	
ALLOW. HEIGHT & FLOORS:	40'-0" / 1 STORY	
ACTUAL HEIGHT & FLOORS:	22'-6 5/8" / 1 STORY	
HEIGHT/AREA ADJUSTMENTS:	NONE REQUIRED, NONE TAKEN	
SPRINKLER SYSTEM:	N/A	

INDEX TO DRAWINGS

	GARAGE BUILDING INI	DETT TO DIC	1	
Sheet Number	Sheet Name	Sheet Issue Date	Current Revision Date	Current Revision Description
1 - COVER S	HEET			
0.0GE	GARAGE BUILDING "E" COVER SHEET	15 APR 2025	15 APR 2025	ISSUE SET
SP1.0GE	SPECIFICATIONS	15 APR 2025	15 APR 2025	ISSUE SET
SP1.1GE	SPECIFICATIONS	15 APR 2025	15 APR 2025	ISSUE SET
SP1.2GE	SPECIFICATIONS	15 APR 2025	15 APR 2025	ISSUE SET
2 - STRUCTI	URAL (BY CROCKETT ENGINEERING CONSULTANTS)			
GS100	GENERAL STRUCTURAL DATA	15 APR 2025	15 APR 2025	ISSUE SET
G5200	FOUNDATION PLAN (BLDG. G11)	15 APR 2025	15 APR 2025	ISSUE SET
GS210	FOUNDATION DETAILS	15 APR 2025	15 APR 2025	ISSUE SET
GS211	FOUNDATION DETAILS	15 APR 2025	15 APR 2025	ISSUE SET
G5300	ROOF FRAMING PLAN	15 APR 2025	15 APR 2025	ISSUE SET
GS310	ROOF FRAMING DETAILS	15 APR 2025	15 APR 2025	ISSUE SET
3 - ARCHITE	ECTURAL			
A1.0GE	GARAGE "E" BUILDING PLAN/FINISH PLAN	15 APR 2025	15 APR 2025	ISSUE SET
A2.0GE	GARAGE "E" ROOF PLAN	15 APR 2025	15 APR 2025	ISSUE SET
A3.0GE	GARAGE "E" EXTERIOR ELEVATIONS	15 APR 2025	15 APR 2025	ISSUE SET
A4.0GE	WALL SECTIONS & DETAILS	15 APR 2025	15 APR 2025	ISSUE SET
4 - MEP (BY	J-SQUARED ENGINEERING)			
MEP1	ELECTRICAL PLAN COVER SHEET	15 APR 2025	15 APR 2025	ISSUE SET
MEP2	SITE UTILITIES PLAN	15 APR 2025	15 APR 2025	ISSUE SET
EP101	POWER PLAN	15 APR 2025	15 APR 2025	ISSUE SET
EL101	LIGHTING PLAN	15 APR 2025	15 APR 2025	ISSUE SET

ARCHITECT'S JOB NO. 4938

PROJECT LOCATION MAP



SIGNATURE AREAS

NOTE: PROJECT CONSTRUCTION MUST BE IN COMPLIANCE WITH ALL APPLICABLE CODES, ORDINANCES, LAWS, AND REGULATIONS AS ENUMERATED ELSEWHERE IN THE PLANS AND SPECIFICATIONS.

ARCHITECT: WALLACE ARCHITECTS, L.L.C. 302 CAMPUSVIEW DRIVE SUITE 208, COLUMBIA, MO 65201

DATE: OWNER: SPRINGBROOK PARK APARTMENTS, LLC

3622 ENDEAVOR AVE., STE. 101, COLUMBIA, MO 65201 DATE:

CONTRACTOR: INTRINSIC DEVELOPMENT, LLC 3622 ENDEAVOR AVE., STE. 101, COLUMBIA, MO 65201 DATE:

PM: <u>RS</u> DT: <u>TY</u> PC: <u>CD</u> QC: <u>MK</u>

PLAN SET NO.

ISSUE SET

ARCHITECT LICENSE#

WALLACE ARCHITECTS, LLC MISSOURI STATE CERTIFICATE OF AUTHORITY: 2003019614 COPYRIGHT © 2025 1ST ISSUE

15 APR 2025 ISSUE/REVISIONS 5 APR 2025 ISSUE SET



ACCESSORIES

compatible with roofing materials; 6 inches wide; self adhering.

Membrane Adhesive: As recommended by membrane manufacturer.

Insulation Adhesive: As recommended by insulation manufacturer.

Surface Conditioner for Adhesives: Compatible with membrane and adhesives.

Thinners and Cleaners: As recommended by adhesive manufacturer, compatible with

metal sheets to ensure drainage. Prevent contact with materials that could cause discoloration or staining. Pre-Finished Aluminum: ASTM B209 (ASTM B209M); 20 gauge, (0.032 inch) thick; plain finish shop pre-coated with modified silicone coating. General: Provide prefinished aluminum sheet metal flashing at changes in adjacent siding materials and other flashing indicated, color as selected by Owner/Architect. Form sections true to shape, accurate in size, square, and free from distortion or defects. Form pieces in longest possible lengths. Form material with flat lock seams, except where otherwise indicated; at moving joints, use sealed lapped, bayonet-type or interlocking hooked seams. COLLECTOR BOXES AND DOWNSPOUT FABRICATION Collector Boxes: SMACNA (ASMM), Rectangular profile with visable overflow. Downspouts: Rectangular profile. Collector box and Downspouts: Size for rainfall intensity determined by a storm occurrence of 1 in 10 years in accordance with SMACNA (ASMM). EXTERIOR PENETRATION FLASHING PANELS Flashing Panels for Exterior Wall Penetrations: Premanufactured components and accessories as required to preserve integrity of building envelope; suitable for conduits and facade materials Fasteners: Galvanized steel. with soft neoprene washers. Concealed Sealants: Non-curing butyl sealant. Exposed Sealants: ASTM C920; elastomeric sealant, with minimum movement capability as recommended by manufacturer for substrates to be sealed; color to match adjacent material. SECTION 07 71 23 - MANUFACTURED GUTTERS AND DOWNSPOUTS DELIVERY, STORAGE, AND HANDLING Stack material to prevent twisting, bending, or abrasion, and to provide ventilation. Slope to Prevent contact with materials that could cause discoloration, staining, or damage. Pre-Finished Aluminum Sheet: ASTM B209 (ASTM B209M); 0.027 inch thick. Finish: Plain, shop pre-coated with acrylic coating. Gutters: 6 inch K-style profile. Downspouts: 3 inch by 4 inch Rectangular profile, minimum. Anchors and Supports: Profiled to suit gutters and downspouts. Gutter Supports: Straps Downspout Supports: Straps Fasteners: Same material and finish as gutters and downspouts, with soft neoprene washers. Form gutters and downspouts of profiles and size indicated. Form sections square, true, and accurate in size, in maximum possible lengths, free of distortion or defects detrimental to appearance or performance. Allow for expansion at joints. Hem exposed edges of metal. Fabricate gutter and downspout accessories; seal watertight. Acrylic polyester coating: Baked enamel system complying with AAMA 2603. Offset Downspout Adapters: PVC adapter for connecting 3 inch x 4 inch downspouts to 4 inch solid white or green drain tile. SECTION 07 92 00 - JOINT SEALANTS Non-Sag Sealants: Permits application in joints on vertical surfaces without sagging or BASF Construction Chemicals-Building Systems: www.buildingsystems.basf.com. Dow Chemical Company: www.dow.com. GE Silicones Inc.: www.ge.com. Pecora Corporation: www.pecora.com Sika Corporation: www.usa-sika.com. nercial Sealants & Waterproofing: www.tremcosealants.com/#sle. JOINT SEALANT APPLICATIONS Do not seal exterior joints unless indicated on drawings as sealed. Seal the following joints: Wall expansion and control joints. Joints between doors, windows, and other frames or adjacent construction. Joints between different exposed materials Flashing and adjacent building materials. Vertical siding/masonry joints. Sleeves or pipes penetrating exterior walls. Sleeves or pipes penetrating masonry or concrete walls. Openings below ledge angles in masonry Lap joints in and penetrations through weather barriers. Exterior Siding: Fiber-Cement Siding. Do not seal interior joints indicated on drawings as not sealed. Do not seal gaps and openings in gypsum board and suspended ceilings Seal the following joints: Joints between door frames and window frames and adjacent construction. Gypsum board to wood or masonry. Metal to gypsum board, wood, or masonry. Perimeter of counter tops and vanity tops Perimeter of plumbing fixtures, shower surrounds, drains, or piping. Do not seal the following types of joints: Joints where sealant is specified to be furnished and installed by manufacturer of product to be sealed. Joints where sealant installation is specified in other sections. Additional Locations: In addition to locations listed or shown on the Drawings to receive continuous sealant materials, a continuous bead of sealant, appropriate to construction materials and locations, shall be provided/installed at: Horizontal joint between bottom of wood sill plate and top of foundation wall or slab on Horizontal joint(s) between double/triple top plates. Vertical joint(s) between double/triple studs in general framing and at door/window rough openings. Stud cavities blocked at change in ceiling heights. Penetrations through top and bottom plates. Seam(s) in band joists. Gaps in exterior wall sheathing. Penetrations in exterior wall sheathing. Penetrations in gypsum board of insulated exterior walls. Exterior Joints: Use non-sag polyurethane sealant, unless otherwise indicated. Masonry Expansion Joints: Two-part polyurethane. Metal to Masonry: Two-part polyurethane Lap Joints in Sheet Metal Fabrications: Two-part polyurethane, non-curing. General Flashing and Flashing to Brick: One-part polyurethane. Sleeves in Walls: One-part polyurethane. Interior Joints: Use non-sag acrylic sealant, unless otherwise indicated. Gypsum Board or Plaster to Masonry or Wood: Acrylic. Metal to Gypsum Board, Plaster or Masonry: Acrylic. Metal to Brick: Two-part polyurethane. Stack Boots: Prefabricated flexible boot and collar for pipe stacks through membrane; same Joints between Fixtures in Wet Areas and Floors, Walls, and Ceilings: Mildew-resistant silicone sealant; white. Cant and Edge Strips: Wood fiberboard, compatible with roofing materials; cants formed to 45 **JOINT SEALANTS - GENERAL** Sealants and Primers: Provide products having lower volatile organic compound (VOC) content Insulation Joint Tape: Glass fiber reinforced type as recommended by insulation manufacturer,

than indicated in SCAQMD 1168.

Sealant Backing Rod, Closed-Cell Type:

Cylindrical flexible sealant backings complying with ASTM C1330 Type C.

Size: 25 to 50 percent larger in diameter than joint width.

Nomaco, Inc; HBR: www.nomaco.com/#sle.

ACCESSORIES

Products:

M. RANDALL PORTER Hadall tota 15 APR 2025 M. RANDALL PORTER

ARCHITECT LICENSE# A-2012006244

WALLACE ARCHITECTS, LLC MISSOURI STATE CERTIFICATE OF AUTHORITY: 2003019614 COPYRIGHT (C) 2025

1ST ISSUE

15 APR 2025 ISSUE/REVISIONS 5 APR 2025 ISSUE SET

ISSUE SE

Minimum Requirements: Comply with ASTM F1700, of Class corresponding to type

Mold and Microbial Resistance: Highly resistant when tested in accordance with ASTM

Resilient Base: ASTM F1861, Type TV, vinyl, thermoplastic; top set Style B, Cove. Manufacturers:

Roppe Corporation: www.roppe.com.

Armstrong World Industries, Inc: www.armstrong.com. Johnsonite, a Tarkett Company: www.johnsonite.com.

WALLACE ARCHITECTS, LLC MISSOURI STATE CERTIFICATE OF AUTHORITY: 2003019614

COPYRIGHT (C) 2025 1ST ISSUE 15 APR 2025

ISSUE/REVISIONS

5 APR 2025 ISSUE SET

D6329; certified in accordance with UL 2824.

VOC Content Limits: As specified in Section 01 61 16. Plank Tile Size: 6 by 36 inch.

Wear Layer Thickness: 0.012 inch.

Total Thickness: 0.177 inch. Color: To be selected by Owner from manufacturer's full range.

RESILIENT BASE

Height: 4 inches. Thickness: 0.125 inch.

Finish: Satin.

Protect with resilient packaging; avoid humidity build-up under coverings; prevent corrosion and adverse effects on factory applied painted finish. MANUFACTURERS

Hollow Metal Doors and Frames: Fleming Door Products, an Assa Abloy Group company: www.assaabloydss.com. Republic Doors, an Allegion brand: www.republicdoor.com.

PERFORMANCE REQUIREMENTS

Steel Sheet: Comply with one or more of the following requirements; galvannealed steel complying with ASTM A653/A653M, cold-rolled steel complying with ASTM A1008/A1008M, or hot-rolled pickled and oiled (HRPO) steel complying with ASTM A1011/A1011M, commercial steel (CS) Type B, for each. Accessibility: Comply with ICC A117.1 and ADA Standards.

Zinc Coating for Typical Interior and/or Exterior Locations: Provide metal components zinc-coated (galvanized) and/or zinc-iron alloy-coated (galvannealed) by the hot-dip process in accordance with ASTM A653/A653M, with manufacturer's standard coating thickness, unless noted otherwise for specific hollow metal doors and frames. Based on SDI Standards: Provide at least A40/ZF120 (galvannealed) when

necessary, coating not required for typical interior door applications, and at least A60/ZF180 (galvannealed) for corrosive locations.

Based on SDI Standards: ANSI/SDI A250.8 (SDI-100). Level 1 - Standard-duty

Edge Seam: Model 1 - Full Flush. Door Face Metal Thickness: 20 gauge, 0.032 inch, minimum. Fire Rating: 3/4 hour, tested in accordance with UL 10C and NFPA 252 ("positive pressure fire tests").

Door Thickness: 1-3/4 inches, nominal. **HOLLOW METAL FRAMES** Comply with standards and/or custom guidelines as indicated for corresponding door in

accordance with applicable door frame requirements. Door Frames, Fire-Rated: Knock-down type. Fire Rating: Same as door, labeled.

Primer: Rust-inhibiting, complying with ANSI/SDI A250.10, door manufacturer's standard. SECTION 08 11 20 - RESIDENTIAL STEEL ENTRY DOORS

DELIVERY, STORAGE, AND HANDLING Package, deliver and store doors in accordance with specified quality standard. Protect doors with resilient packaging. Do not store in damp or wet areas, or in areas of direct sunlight.

MANUFACTURERS

Bayer Built Inc; Select Steel Series: www.bayerbuilt.com. Stanley Door Products; Sta-Tru Series: www.stanleydoors.com. COMPONENTS

Pool Building Machine Room Doors: Configuration: Double doors. Frames: Provided and assembled by third party fabricators to manufacturer's specifications. Frame: Milled from 5/4 kiln-dried white pine, finger-jointed composite at bottom of frame,

Frame Depth: 4-9/16 inch, minimum. Thresholds: Refer to Section 08 71 00 - Door Hardware.

Door Sweeps: Extruded thermoplastic elastomer, finned and chambered design, press-fit into

PERFORMANCE REQUIREMENTS Comply with AAMA/WDMA/CSA 101/I.S.2/A440 requirements in accordance with the

Performance Class (PC): R. Design Pressure (DP): In accordance with applicable codes Water Penetration Resistance: No uncontrolled leakage on interior face when tested in accordance with ASTM E547 at differential pressure of 15 percent of Performance Grade

Air Leakage: Maximum of 0.30 cu ft/minute/sq ft at 1.57 psf differential pressure, when tested in accordance with ASTM E283 Thermal Transmittance: U-factor of 0.35, maximum, that includes window glazing, door and

accordance with NFRC 100. Forced Entry Resistance (FER): Tested to comply with ASTM F476 requirements having at least Grade 10 performance for each required swinging door assembly.

FABRICATION Fabricate doors in accordance with door quality standard specified. Cores constructed with stiles and rails:

Provide solid blocks at lock edge for hardware reinforcement. Provide solid blocking for other thru-bolted hardware where scheduled. Factory machine doors for hardware other than surface-mounted hardware, in accordance with

hardware requirements and dimensions. Factory fit doors for frame opening dimensions identified on shop drawings, with edge clearances in accordance with specified quality standard.

Product Data: Show component construction, anchorage method, and hardware.

SUBMITTALS

SECTION 08 36 13 - SECTIONAL OVERHEAD DOORS

MANUFACTURERS Sectional Overhead Doors: Clopay Building Products; Value Plus Series, Classic Collection: www.clopaydoor.com.

Overhead Door Corp.; Series 183, Traditional Collection: www.overheaddoor.com

Provide units listed and labeled by UL (DIR).

HARDWARE For each door, include weatherstripping, sill sweep strip, and threshold.

Other Door Hardware: Storefront manufacturer's standard type to suit application. For each door, include butt hinges. SECTION 08 53 13 - VINYL WINDOWS

DELIVERY, STORAGE, AND HANDLING Protect finished surfaces with wrapping. Do not use adhesive papers or sprayed coatings that bond when exposed to sunlight or weather.

FIELD CONDITIONS Do not install sealants when ambient temperature is less than 40 degrees F. MANUFACTURERS

Type: Bored (cylindrical). Manufacturers; Surface Mounted:

Basis of Design: Falcon SC93/94; Jamb top. BEST, dormakaba Group; EHD9000: www.bestaccess.com. Falcon or LCN, an Allegion brand: www.allegion.com/us.

Auxiliary Locks (Deadlocks): Comply with BHMA A156.36, Grade 3.

Provide adapter plate where required.

Vinyl Windows: Alside, Inc; Series 1700: www.alside.com. All Temp Windows Inc.; Series 1800: www.alltempwindows.com Jeld-Wen Inc.; Builders Vinyl Series: www.jeldwen.com.

Manufacturers: Basis of Design: Schlage 'B60' & 'B680' Yale; an Assa Abloy Group company: www.assaabloydss.com. Hager Companies: www.hagerco.com Schlage, an Allegion brand: www.allegion.com/us.

Sargent, Yale, or AdamsRite; an Assa Abloy Group company: www.assaabloydss.com.

At outswinging exterior doors, mount closer on interior side of door.

Provide door closer on each exterior door of the common areas.

Closers: Comply with BHMA A156.4, Grade 3.

Type: Surface mounted to door.

Group No 07: Pool Building secure Interior Doors

3 EA Hinges - 3-1/2 inch x 3-1/2 inch

Group No 08: Pool Building Other Interior Doors

3 EA Hinges - 3-1/2 inch x 3-1/2 inch

1 EA Locking Leverset

1 EA Wall-mounted Stop

EA Passage Leverset

EA Wall-mounted Stop

ISSUE SET

FABRICATION direction before proceeding with work. Access Control Units - Basis of Design: DKS Door King; Series 1830. Computers Required: **ACCESSORIES**

Vanity Countertops: Post formed plastic laminate over particle board, coved to back splash. Colors/Patterns: To be selected by Owner from manufacturer's standard line. Self edged plastic laminate over particle board with, square front nosing and self-edged sides. Shop assemble casework for delivery to site in units easily handled and to permit passage through building openings. Fabricate tops and splashes in the largest sections practicable, with top surface of joints flush. Provide back/end splash wherever counter edge abuts vertical surface unless otherwise **DIVISION 28 - ELECTRONIC SAFETY AND SECURITY**

SECTION 28 10 00 - ACCESS CONTROL ADMINISTRATIVE REQUIREMENTS Coordination: Coordinate the work with other installers to provide suitable door hardware as required for both access control functionality and code compliance. Coordinate the work with other installers to provide power for equipment at required Notify Architect of any conflicts with or deviations from Contract Documents. Obtain

DELIVERY, STORAGE, AND HANDLING Receive, inspect, handle, and store products in accordance with manufacturer's instructions. Store products in manufacturer's unopened packaging, keep dry and protect from damage until ready for installation. MANUFACTURERS

Access Control Units: Bosch Security Systems: www.boschsecurity.us/#sle. DoorKing, Inc: www.doorking.com/#sle. Honeywell International, Inc: www.honeywellaccess.com/#sle. ACCESS CONTROL SYSTEM REQUIREMENTS

Provide new access control system consisting of required equipment, conduit, boxes, wiring, connectors, hardware, supports, accessories, software, system programming, etc. as necessary for a complete operating system that provides the functional intent indicated. Surge Protection:

Provide surge protection for readers and door strikes/locks. Access Control Points: **Exterior Doors:** Function: Operational and emergency.

Access: Controlled entry, free exit. Peripherals on Secure Side: Reader/Keypad: Contacless key fob reader. Locking Device: Electric strike. Configuration: Fail-secure.

Workstation Computer(s): Quantity: One. Location(s): Leasing Office. Peripherals required for each workstation computer: Mouse and keyboard.

Monitor(s): One.

Alarm/report printer. Interface with Other Systems: Provide products compatible with other systems requiring interface with access control

Interface with electrically operated door hardware as specified in Section 08 71 00. Provide products listed, classified, and labeled as suitable for the purpose intended.

Access Control Units and Readers: Listed and labeled as complying with UL 294. ACCESS CONTROL UNITS AND SOFTWARE

Provide access control units and software compatible with readers to be connected. Unless otherwise indicated, provide software and licenses required for fully operational system.

Access Control Unit: Control Capability: 15 doors/ 15 readers. Database: Quantity of Access Codes Supported: 8000.

Operating Modes Supported: Proximety key fob. Features: Dedicated power loss alarm input. Supports database and event exporting.

Supports database backup. Computers: Workstation Computers: Unless otherwise indicated, workstation computer hardware and associated peripherals not furnished by access control system manufacturer to be equipment manufacturer's recommended requirements.

provided by Contractor as part of work of this section, meeting access control system Servers: Unless otherwise indicated, server hardware and associated peripherals not furnished by access control system manufacturer to be provided by Contractor as part of work of this section, meeting access control system equipment manufacturer's recommended requirements.

ACCESS CONTROL POINT PERIPHERALS Provide devices compatible with control units and software.

Provide devices suitable for operation under the service conditions at the installed location. Readers and Keypads: General Requirements:

Provide readers compatible with credentials to be used. Proximity Readers: Utilize 125 kHz RF communication with compatible credentials. Proximity Reader: Read Range: Up to 12 inches. Features:

Tamper output.

Colors/Patterns: To be selected by Owner from manufacturer's standard line

Unless otherwise indicated, credentials to be provided by Contractor.

M. RANDALL PORTER Kadall tot 15 APR 2025 M. RANDALL PORTER ARCHITECT LICENSE# A-2012006244

WALLACE ARCHITECTS, LLC MISSOURI STATE CERTIFICATE OF AUTHORITY: 2003019614

COPYRIGHT (C) 2025 **1ST ISSUE** 15 APR 2025

ISSUE/REVISIONS 5 APR 2025 ISSUE SET



ISSUE SET

Alura Village Garage Building Type "E"

Lee's Summit, Jackson County, Missouri

GENERAL NOTES

SEE ARCHITECTURAL DRAWINGS OR SITE PLAN FOR FINISH FLOOR ELEVATIONS

DESIGN SPECIFICATIONS

2018 INTERNATIONAL BUILDING CODE

EARTHWOR

EARTHWORK OPERATIONS SHALL BE PERFORMED UNDER THE DIRECTION OF A PROFESSIONAL TESTING AGENCY TO ASSURE COMPLIANCE WITH THE RECOMMENDATIONS OF THE SOILS REPORT PREPARED BY OLSSON, INC. DATED AUGUST 22, 2019.

CONCRETE

CONCRETE WORK SHALL CONFORM TO ALL REQUIREMENTS OF THE CURRENT ACI 301, SPECIFICATIONS FOR STRUCTURAL CONCRETE FOR BUILDINGS, ACI 318 BUILDING CODE REQUIREMENTS FOR STRUCTURAL CONCRETE, ACI 305 SPECIFICATIONS FOR HOT WATER CONCRETE, AND ACI 306 SPECIFICATIONS FOR COLD WEATHER CONCRETE, WITH THE FOLLOWING ADDITIONAL REQUIREMENTS:

- 1. CONCRETE SHALL DEVELOP THE FOLLOWING 28—DAY MINIMUM COMPRESSIVE STRENGTH:
- AST-IN-PLACE WALLS 3,500 PSI
 LOOR SLAB 4.000 PSI
- EXTERIOR SLABS, WALLS AND CURBS 4,000 PSI
- 3. CHLORIDE— BASED ADMIXTURES ARE PROHIBITED IN ALL REINFORCED CONCRETE.
 4. REINFORCING STEEL SHALL CONFORM TO ASTM A615, A616, OR A617, GRADE 60.
- 4. REINFORCING STEEL SHALL CONFORM TO ASIM AGTS, AGT6, OR AGT7, GRADE 60.

 5. ALL CONTINUOUS REINFORCING STEEL THAT MEETS AT A CORNER SHALL BE TIED TOGETHER WITH A
- CORNER BAR THAT HAS SUFFICIENT LAP DISTANCE IN EACH DIRECTION
 6. CONTINUOUS REINFORCING BARS LAP LENGTH SHALL BE A MINIMUM OF 48 BAR DIAMETERS UNLESS
- NOTED OTHERWISE

 7. CONCRETE SLUMP SHALL BE A MAXIMUM OF 4" +/- 1" (ASTM C- 143) AS DELIVERED IN THE FIELD. CONTRACTOR MAY USE CHEMICAL ADMIXTURES TO ATTAIN A MAXIMUM SLUMP OF 8" FOR WORKABILITY.
- NO WATER MAY BE ADDED TO THE CONCRETE MIX ON SITE UNLESS WATER IS WITHHELD AT THE BATCHING FACILITY. IF WATER IS WITHHELD AT THE BATCHING FACILITY IT SHOULD BE REFLECTED ON THE LOAD TICKET. THE TOTAL AMOUNT OF WATER IN THE MIX SHALL NOT EXCEED WHAT IS NOTED ON THE APPROVED MIXED. THIS SHALL BE NOTED IN THE SPECIAL INSPECTOR'S RECORDS.
- 8. CONCRETE EXPOSED TO WEATHER, VEHICLES, AND/OR DEICING CHEMICALS SHALL BE AIR-ENTRAINED WITH 6% (+/-) 1.5% ENTRAINED AIR BY VOLUME AT POINT OF DISCHARGE. DO NOT ALLOW AIR CONTENT OF TROWELED FINISHED FLOORS TO EXCEED 3%.
- 9. SUBMIT CONCRETE MIX PROPORTIONS PRIOR TO START OF WORK. DO NOT BEGIN CONCRETE
- PRODUCTION UNTIL MIXES HAVE BEEN REVIEWED AND ARE ACCEPTABLE TO THE ENGINEER. 10.READY MIX CONCRETE SHALL COMPLY WITH REQUIREMENTS OF ASTM C94.
- 11.CONCRETE WORK EXECUTION
- A. CONSTRUCT FORMS TO CORRECT SIZE, SHAPE, ALIGNMENT, ELEVATION AND POSITION; AND TO SUPPORT VERTICAL AND LATERAL LOADS.
 B. POSITION, SUPPORT, AND SECURE REINFORCEMENT AGAINST DISPLACEMENT. MINIMUM CONCRETE

FINISH FLOOR COVERING.

- EXPOSED TO EARTH OR WEATHER......2 INCHES NOT EXPOSED TO WEATHER OR
- IN CONTACT WITH EARTH.......1 ½ INCHES
- C. PROVIDE CONTROL JOINTS IN SLABS-ON-GRADE AT NOT GREATER THAN 15 FEET ON CENTER IN EACH DIRECTION. SAW CUT CONTROL JOINTS MINIMUM ¼ OF SLAB DEPTH, AS SOON AFTER SLAB
- FINISHING WITHOUT DISLODGING AGGREGATE.

 D. STEEL TROWEL FINISH ALL INTERIOR CONCRETE SLABS, BROOM FINISH ALL EXTERIOR CONCRETE
- SLABS.
 E. CURE ALL CONCRETE IN COMPLIANCE WITH ACI 301, USING A LIQUID TYPE MEMBRANE,
 NON-RESIDUAL, CURING COMPOUND COMPLYING WITH ASTM C309. ASSURE COMPATIBILITY WITH

TIMBER

TIMBER WORK SHALL CONFORM TO ALL REQUIREMENTS OF THE CURRENT ANSI/AWC NATIONAL DESIGN SPECIFICATION (NDS) FOR WOOD CONSTRUCTION WITH 2018 NDS SUPPLEMENT FOR WOOD CONSTRUCTION, WITH THE FOLLOWING SUPPLEMENTAL REQUIREMENTS:

- 1. FOR COMMON MEMBER SIZES, THE SPECIES AND GRADES SHALL BE AS FOLLOWS, UNLESS NOTED OTHERWISE:
 - A. 2X4 SPF No.1/No.2
 - B. 2X6 SPF No.1/No.2
 - C. 2X8 DF-L No.2
 - D. 2X10 DF-L S.S.
 - E. 2X12 DF-L S.S.

EQUIVALENT (OR BETTER) GRADES & SPECIES MAY BE SUBMITTED FOR THE ENGINEER'S APPROVAL.

- 2. SIZES SHOWN FOR LUMBER ARE NOMINAL SIZES.
- 3. TIMBER EXPOSED TO WEATHER OR GROUND, OR IN CONTACT WITH CONCRETE OR MASONRY SHALL BE PRESSURE—IMPREGNATED BY AN APPROVED PROCESS AND PRESERVATIVE.
- 4. SPLICING OF JOISTS, STUDS, OR HEADERS IS PROHIBITED EXCEPT AS SHOWN.
- 5. BOLTS SHALL CONFORM TO ASTM A307. HOLES SHALL BE DRILLED PER SECTION 12.1.3 OF THE 2018 ANSI/AWC NDS FOR WOOD CONSTRUCTION NDS SUPPLEMENT.
- 6. LAG SCREWS AND WOOD SCREWS SHALL BE INSTALLED PER SECTIONS 12.1.4 & 12.1.5 RESPECTIVELY,
- OF THE 2018 ANSI/AWC NDS FOR WOOD CONSTRUCTION WITH 2018 NDS SUPPLEMENT.

 7. COMMON NAILS SHALL BE USED, UNLESS NOTED OTHERWISE. IN ADDITION, NAILS SHALL BE GALVANIZED, IF EXPOSED TO WEATHER OR MOISTURE. TOE—NAILS SHALL BE DRIVEN PER SECTION
- 12.1.6.3 OF THE 2018 ANSI/AWC NDS FOR WOOD CONSTRUCTION WITH 2018 NDS SUPPLEMENT.

 8. FASTENING SHALL BE PER THE IBC MINIMUM FASTENING SCHEDULE, TABLE 2304.10.1, UNLESS NOTED
- 9. CONNECTIONS/CONNECTORS SHALL BE INSTALLED PER MANUFACTURER'S SPECIFICATIONS.

POST-INSTALLED ANCHORS

- 1. ALL POST-INSTALLED ANCHORS SHALL MEET THE REQUIREMENTS OF THE CODE-CITED EDITION OF ACI 318. APPENDIX "D". AND SHALL BE ACCEPTABLE FOR BOTH CRACKED AND UNCRACKED CONCRETE.
- 2. EXPANSION ANCHORS HAVE BEEN DESIGNED AS HILTI KWIK BOLT TZ ANCHORS, UNLESS NOTED
- 3. ADHESIVE ANCHORS HAVE BEEN DESIGNED TO USE HILTI HIT HY 200 ADHESIVE IN CONCRETE OR SOLID MASONRY, UNLESS NOTED OTHERWISE.
- 4. EQUIVALENT ANCHORS MAY BE SUBMITTED FOR THE ENGINEER'S APPROVAL. SUBMITTALS ARE THE CONTRACTOR'S RESPONSIBILITY AND MUST INCLUDE ICC ES EVALUATION REPORTS FROM THE
- INTERNATIONAL CODE COUNCIL (ICC).

 5. EMBEDMENT DEPTH IS DEFINED AS THE DISTANCE FROM THE SURFACE OF THE LOAD—BEARING BASE MATERIAL TO THE DEEPEST PART OF THE ANCHOR AFTER THE ANCHOR HAS BEEN DRIVEN INTO THE
- HOLE BUT NOT YET EXPANDED.

 6. ADHESIVE ANCHORS SHALL BE ACCEPTABLE FOR LONG—TERM LOADING. WHEN BASE MATERIAL TEMPERATURES ARE BELOW 40 DEG F, ONLY NON—EPOXY—BASED ADHESIVES SHALL BE USED.
- 7. POST-INSTALLED ANCHORS SHALL ONLY BE USED WHERE SPECIFIED ON THE DRAWINGS. THE CONTRACTOR SHALL OBTAIN APPROVAL FROM THE ENGINEER PRIOR TO USING POST-INSTALLED ANCHORS FOR MISSING OR MISPLACED CAST-IN-PLANE ANCHORS. CARE SHALL BE TAKEN TO AVOID CONFLICTS WITH EXISTING REINFORCING BARS. HOLES SHALL BE DRILLED AND CLEANED PER ANCHOR MANUFACTURER'S SPECIFICATIONS.
- MANUFACTURER'S SPECIFICATIONS.

 8. STAINLESS STEEL ANCHORS ARE REQUIRED AT ALL PERMANENTLY EXPOSED WEATHER CONDITIONS.

PREFABRICATED WOOD TRUSSES

- 1. FLOOR & ROOF TRUSSES SHALL BE DESIGNED IN ACCORDANCE WITH THE TRUSS PLATE INSTITUTE (TPI) DESIGN SPECIFICATION FOR METAL PLATE CONNECTED WOOD TRUSSES, AND THE ANSI/AWC NATIONAL DESIGN SPECIFICATION (NDS) FOR WOOD CONSTRUCTION.
- 2. PROVIDE TEMPORARY AND PERMANENT BRACING ON ALL TRUSSES, AS REQUIRED TO PROVIDE MEMBER
- 3. FLOOR & ROOF TRUSSES SHALL BE DESIGNED AND CONSTRUCTED FOR A MAXIMUM TOTAL LOAD DEFLECTION OF L/360 AND TO SAFELY SUPPORT THE FOLLOWING LOADS:
- A. DEAD, LIVE, SNOW, WIND, EARTHQUAKE: SEE PROJECT DESIGN DATA ON COVER SHEET.

 B. MECHANICAL PIPE LOAD: TRUSSES SHALL BE DESIGNED FOR A CONCENTRATED LOAD OF 250
- C. OVER-FRAMING LOAD: TRUSSES SHALL ALSO BE DESIGNED TO SUPPORT ADDITIONAL OVERBUILD
- FRAMING, SUCH AS THAT WHICH FORMS VALLEYS AND HIPS ON ROOFS.

 D. DRIFTED SNOW LOAD: TRUSSES SHALL BE DESIGNED TO SUPPORT DRIFTED SNOW LOADS IN
- ACCORDANCE WITH THE APPROPRIATE BUILDING CODE.

 E. IN-PLANE LATERAL LOADS: TRUSSES SHALL BE DESIGNED TO SUPPORT ANY LATERAL LOADS
- CARRIED AXIALLY IN THE PLANE OF THE TRUSS, AS SHOWN ON THE PLANS.
- 4. GABLED END TRUSSES SHALL HAVE VERTICAL MEMBERS SPACED AT 16" O.C. MAXIMUM.
 5. SUBMITTALS SHALL INCLUDE THE FOLLOWING:
- 5. SUBMITTALS SHALL INCLUDE THE FOLLOWING:

 A. SHOP DRAWINGS PREPARED UNDER THE SUPERVISION OF, AND SIGNED AND SEALED BY
- A. SHOP DRAWINGS PREPARED UNDER THE SUPERVISION OF, AND SIGNED AND SEALED BY, A PROFESSIONAL ENGINEER REGISTERED IN THE STATE WHERE THE PROJECT IS BUILT. THESE DRAWINGS SHALL INDICATE SPECIES, GRADE, AND SIZES OF LUMBER TO BE USED; PITCH, SPAN, CAMBER, CONFIGURATION, AND SPACING FOR EACH TYPE OF TRUSS REQUIRED; TYPE, SIZE, MATERIAL, FINISH, AND LOCATION OF METAL CONNECTOR PLATES; AND BEARING DETAILS. SHOW TRUSS LAYOUT AND ALL REQUIRED TEMPORARY AND PERMANENT BRACING AFFECTING THE STRUCTURAL CAPACITY OF THE TRUSSES.

PROVIDE COMPLETE ENGINEERING DESIGN CALCULATIONS THAT INCLUDE DESIGN VALUES, DESIGN ANALYSIS INDICATING LOADING, ASSUMED ALLOWABLE STRESSES, STRESS DIAGRAMS, AND CALCULATIONS, AND ANY OTHER INFORMATION NEEDED FOR REVIEW. THE CALCULATIONS SHALL HAVE BEEN SIGNED AND SEALED BY A QUALIFIED PROFESSIONAL ENGINEER WHO IS REGISTERED IN THE STATE WHERE THE PROJECT IS BUILT AND WHO IS RESPONSIBLE FOR PREPARATION OF THE CALCULATIONS.

SPECIAL INSPECTIONS

THE FOLLOWING ITEMS REQUIRE SPECIAL INSPECTION IN ACCORDANCE WITH CHAPTER 17 OF THE INTERNATIONAL BUILDING CODE.

- a. CONCRETE GROUT DESIGN MIX (PERIODIC)
- b. PLACING OF CONCRETE AND REINFORCING STEEL (CONTINUOUS OF CONCRETE SAMPLING / PERIODIC OF REINFORCING)
- c. POST INSTALLED ANCHORS IN CONCRETE (CONTINUOUS)
- d. IN-SITU SOILS, EXCAVATIONS, FILLING & COMPACTION (PERIODIC)
- e. WOOD FRAMING:
- e.a. SHEAR WALLS; WALL SIZE, CONFIGURATION, BLOCKING, PANEL GRADE, PANEL THICKNESS, AND FASTENING. (PERIODIC)
- e.b. DIAPHRAGMS (FLOOR AND ROOF SHEATHING); SIZE, CONFIGURATION, BLOCKING, PANEL GRADE, PANEL THICKNESS, AND FASTENING. (PERIODIC)
- e.c. FRAMING MEMBERS AND DETAILS (PERIODIC)
- e.d. MATERIAL GRADE (PERIODIC)
- e.e. CONNECTIONS; HANGERS, HOLD DOWNS, BUILT-UP COLUMNS, BUILT-UP BEAMS (PERIODIC)
- e.f. PRE-ENGINEERED TRUSSES; FRAMING, CONNECTIONS, BRIDGING (PERIODIC)

THE CONTRACTOR SHALL REQUEST SPECIAL INSPECTION OF THE ITEMS LISTED ABOVE PRIOR TO THOSE ITEMS BECOMING INACCESSIBLE AND UNOBSERVABLE DUE TO PROGRESSION OF THE WORK.

DESIGN DATA 2018 INTERNATIONAL BUILDING CODE / ASCE 7-16 **BUILDING OCCUPANCY CATEGORY ROOF LOAD DATA** LIVELOAD ASPHALT SHINGLES + FELT 5/8" OSB ROOF SHEATHING PRE-ENGINEERED WOOD TRUSSES @ 2'-0" O.C. INSULATION (BLOWN) MECHANICAL ALLOWANCE 5/8" GYP. CEILING TOTAL TO TRUSSES 45 lbs/sq.ft RAIN LOADING DATA 15 MINUTE RAIN INTENSITY 7.49 in/hr 60 MINUTE RAIN INTENSITY 3.52 in/hr ROOF SNOW LOAD DATA* (*UNBALANCED & DRIFTING SNOW TO BE DETERMINED IN ADDITION TO UNIFORM LOAD, WHERE APPLICABLE) Ce = 14.00 lbs/sq.ft WIND DESIGN DATA 109 M.P.H. (3-SECOND GUST) V_{ult} = RISK CATEGORY **EXPOSURE** ± 0.18 INTERNAL PRESSURE COEFFICIENT = MAXIMUM COMPONENTS & CLADDING WIND +/-24.97 lbs/sq.ft EARTHQUAKE DESIGN DATA RISK CATEGORY Ss= S1= 0.068 SITE CLASS 0.086 SDS= 0.068 SEISMIC DESIGN CATEGORY BASIC SEISMIC-FORCE-RESISTING SYSTEM = LIGHT-FRAME (WOOD) WALLS SHEATHED WITH WOOD STRUCTURAL PANELS RATED FOR 6.5 3.0 V = 0.013 WDESIGN BASE SHEAR EQUIVALENT LATERAL FORCE PROCEDURE NET ALLOWABLE SOIL BEARING 2,500 lbs/sq.ft** (**PER GEOTECHNICAL REPORT BY OLSSON, INC. DATED AUGUST 22, 2019)

INDEX OF SHEETS	
COVER / GENERAL STRUCTURAL DATA	GS100
FOUNDATION PLAN	GS200
FOUNDATION DETAILS	GS210-GS211
ROOF FRAMING PLAN	GS300
ROOF FRAMING DETAILS	GS310

THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY

JARRED W.

VERSLUES

NUMBER

PE-2017000387

AUCIUKAL ENGINEEK:

ACINEERING CONSULTANTS
1000 W. Nifong Bivd., Bldg. 1
Columbia, Missouri 65203
(573) 447-0292

ww.crockettengineering.com

ckett Engineering Consultants, LLC

INTRINSIC

DEVELOPMENT

3622 ENDEAVOR AVE.

COLUMBIA, MISSOURI

Village Garage Building Type

DRAWING INCLUDES:

 $\boldsymbol{\sigma}$

Alur

GENERAL STRUCTURAL DATA


DESIGNED: JWV

DRAWN: SEH

PROJECT NO.: 230286


SHEET:


NOTE:
ALL DIMENSIONS ARE FROM FACE OF FOUNDATION WALL OR FRAMING;
EDGE OF SLAB OR TRUSS/RAFTER; OR CENTERLINE
OF COLUMN, BEAM, OR JOIST UNLESS NOTED OTHERWISE.

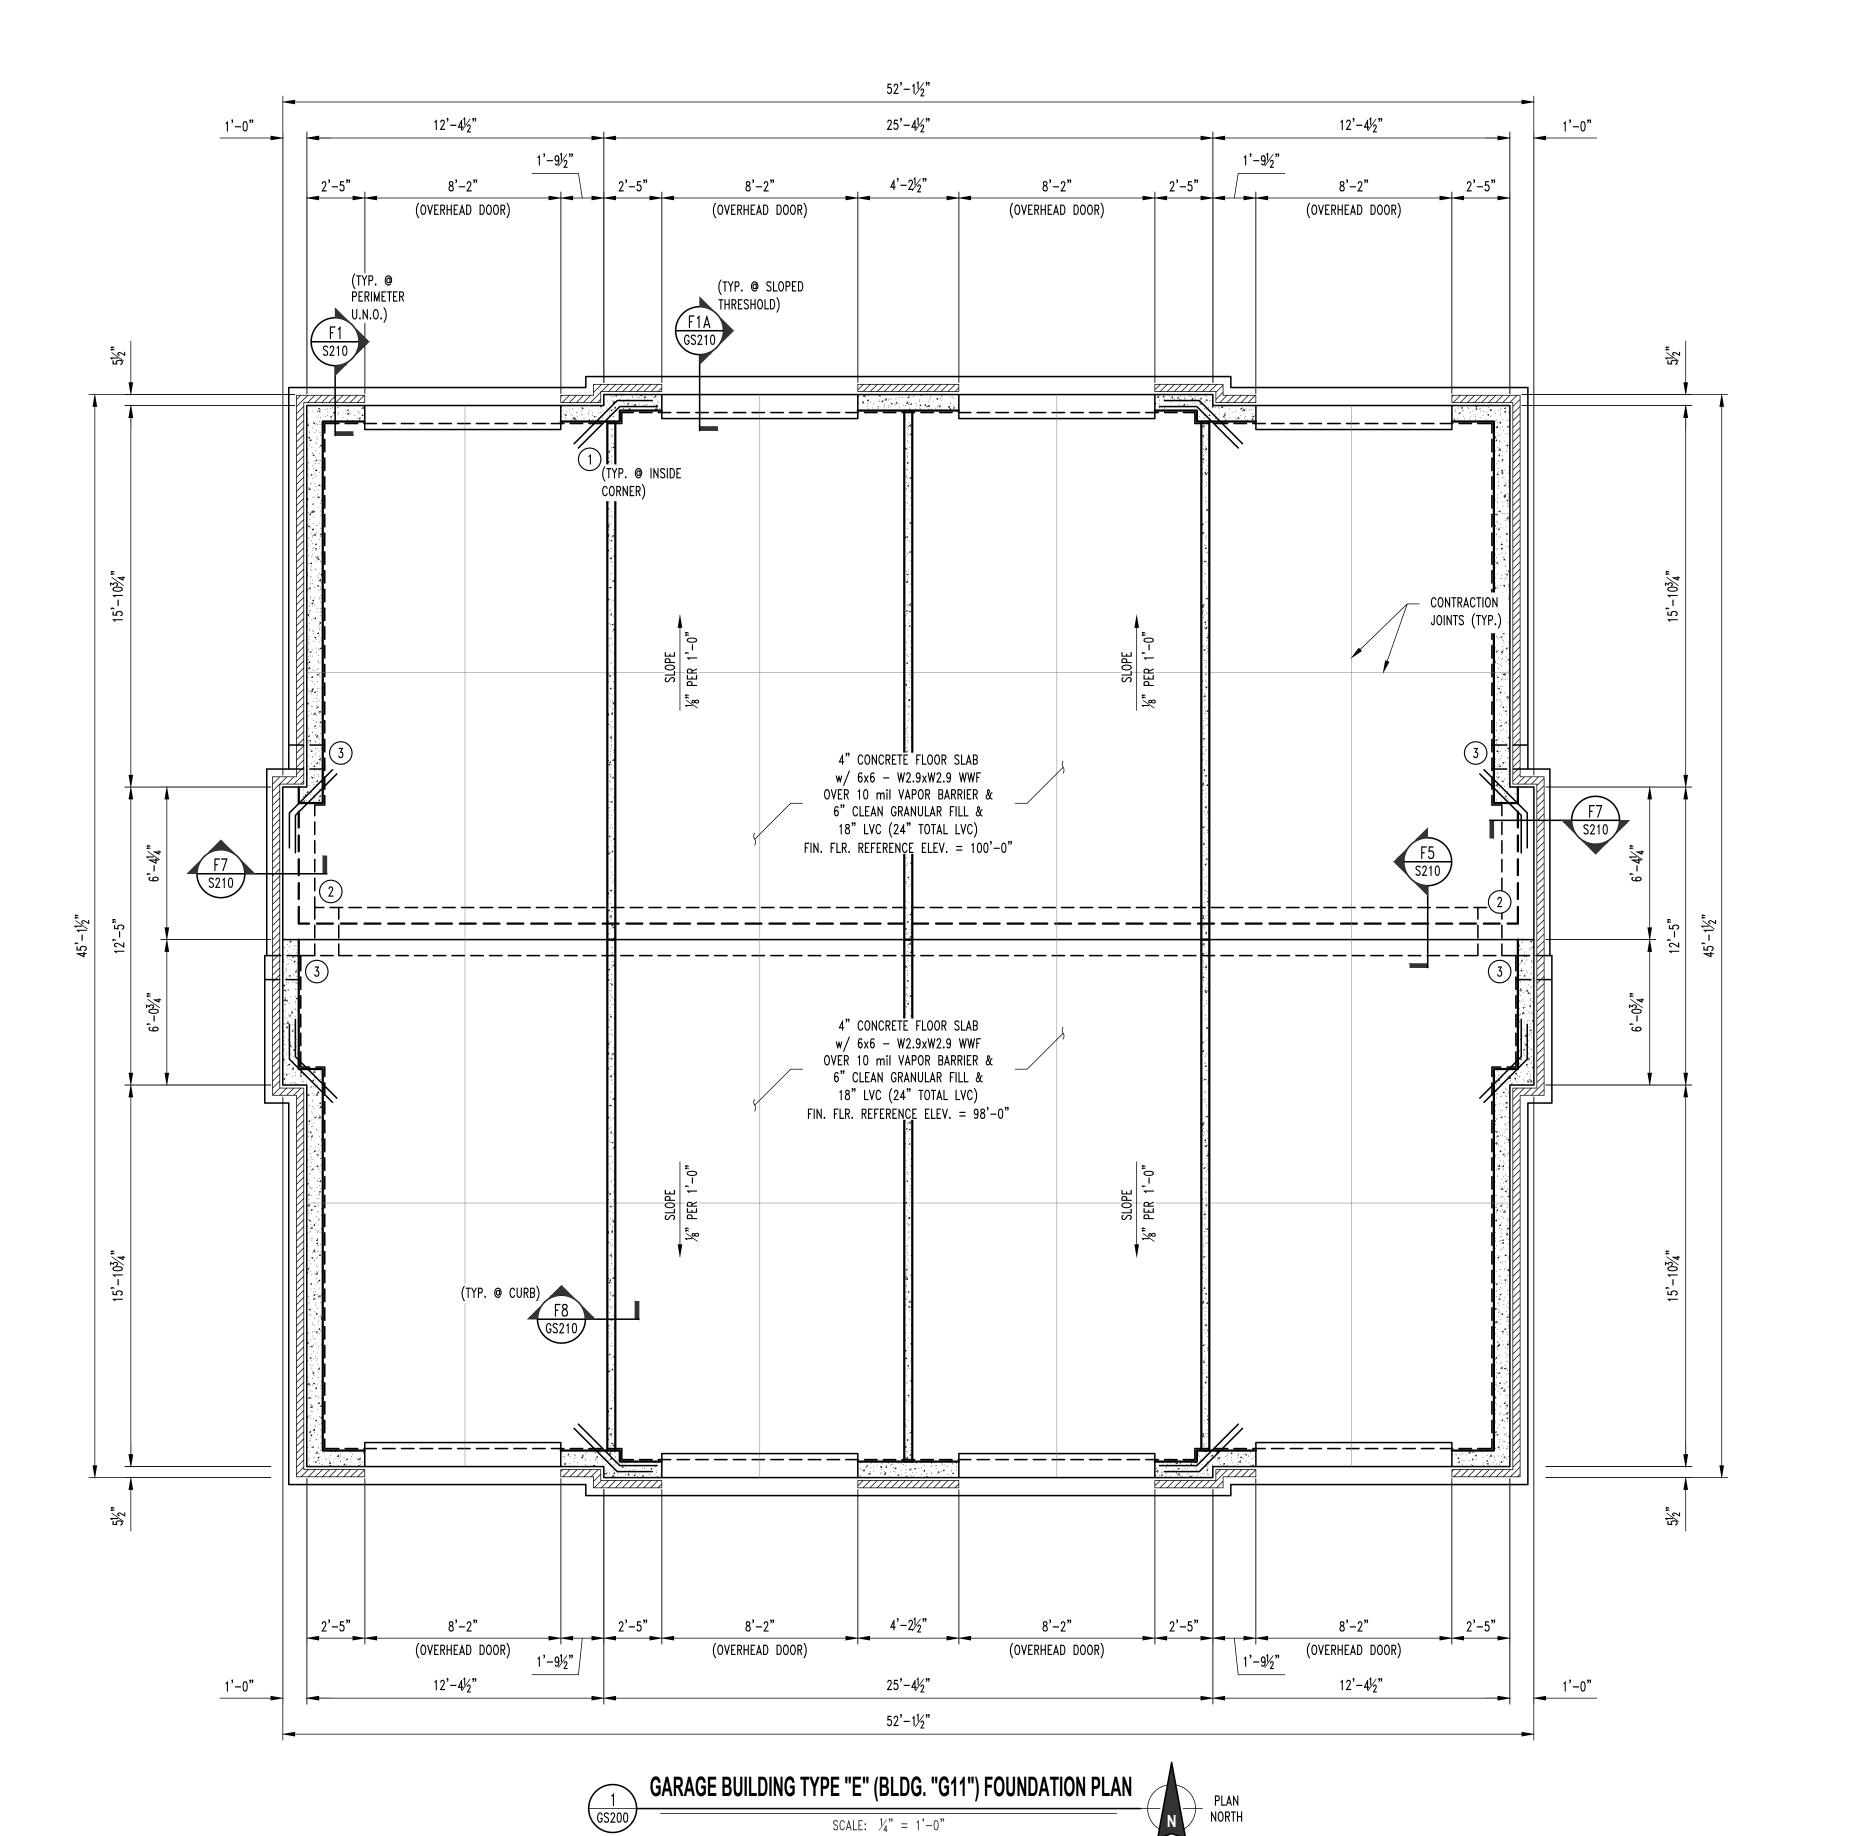

FOUNDATION NOTES

- 1 REENTRANT CORNER BARS, REFER TO TYPICAL CRACK CONTROL REINFORCING DETAIL ON SHEET GS210.
- 2 FOOTING STEP, REFER TO DETAIL FS1/GS211.
- 3) FOOTING STEP, REFER TO DETAIL FS2/GS211.
- 4) FOOTING STEP, REFER TO DETAIL FS3/GS211.







INTRINSIC ENG DEVELOPMENT 3622 ENDEAVOR AVE. COLUMBIA, MISSOURI Crock

Village Garage Building Type "E"

DRAWING INCLUDES:

FOUNDATION


DESIGNED: JWV


DRAWN: SEH


PROJECT NO.: 230286


SHEET:

GS200

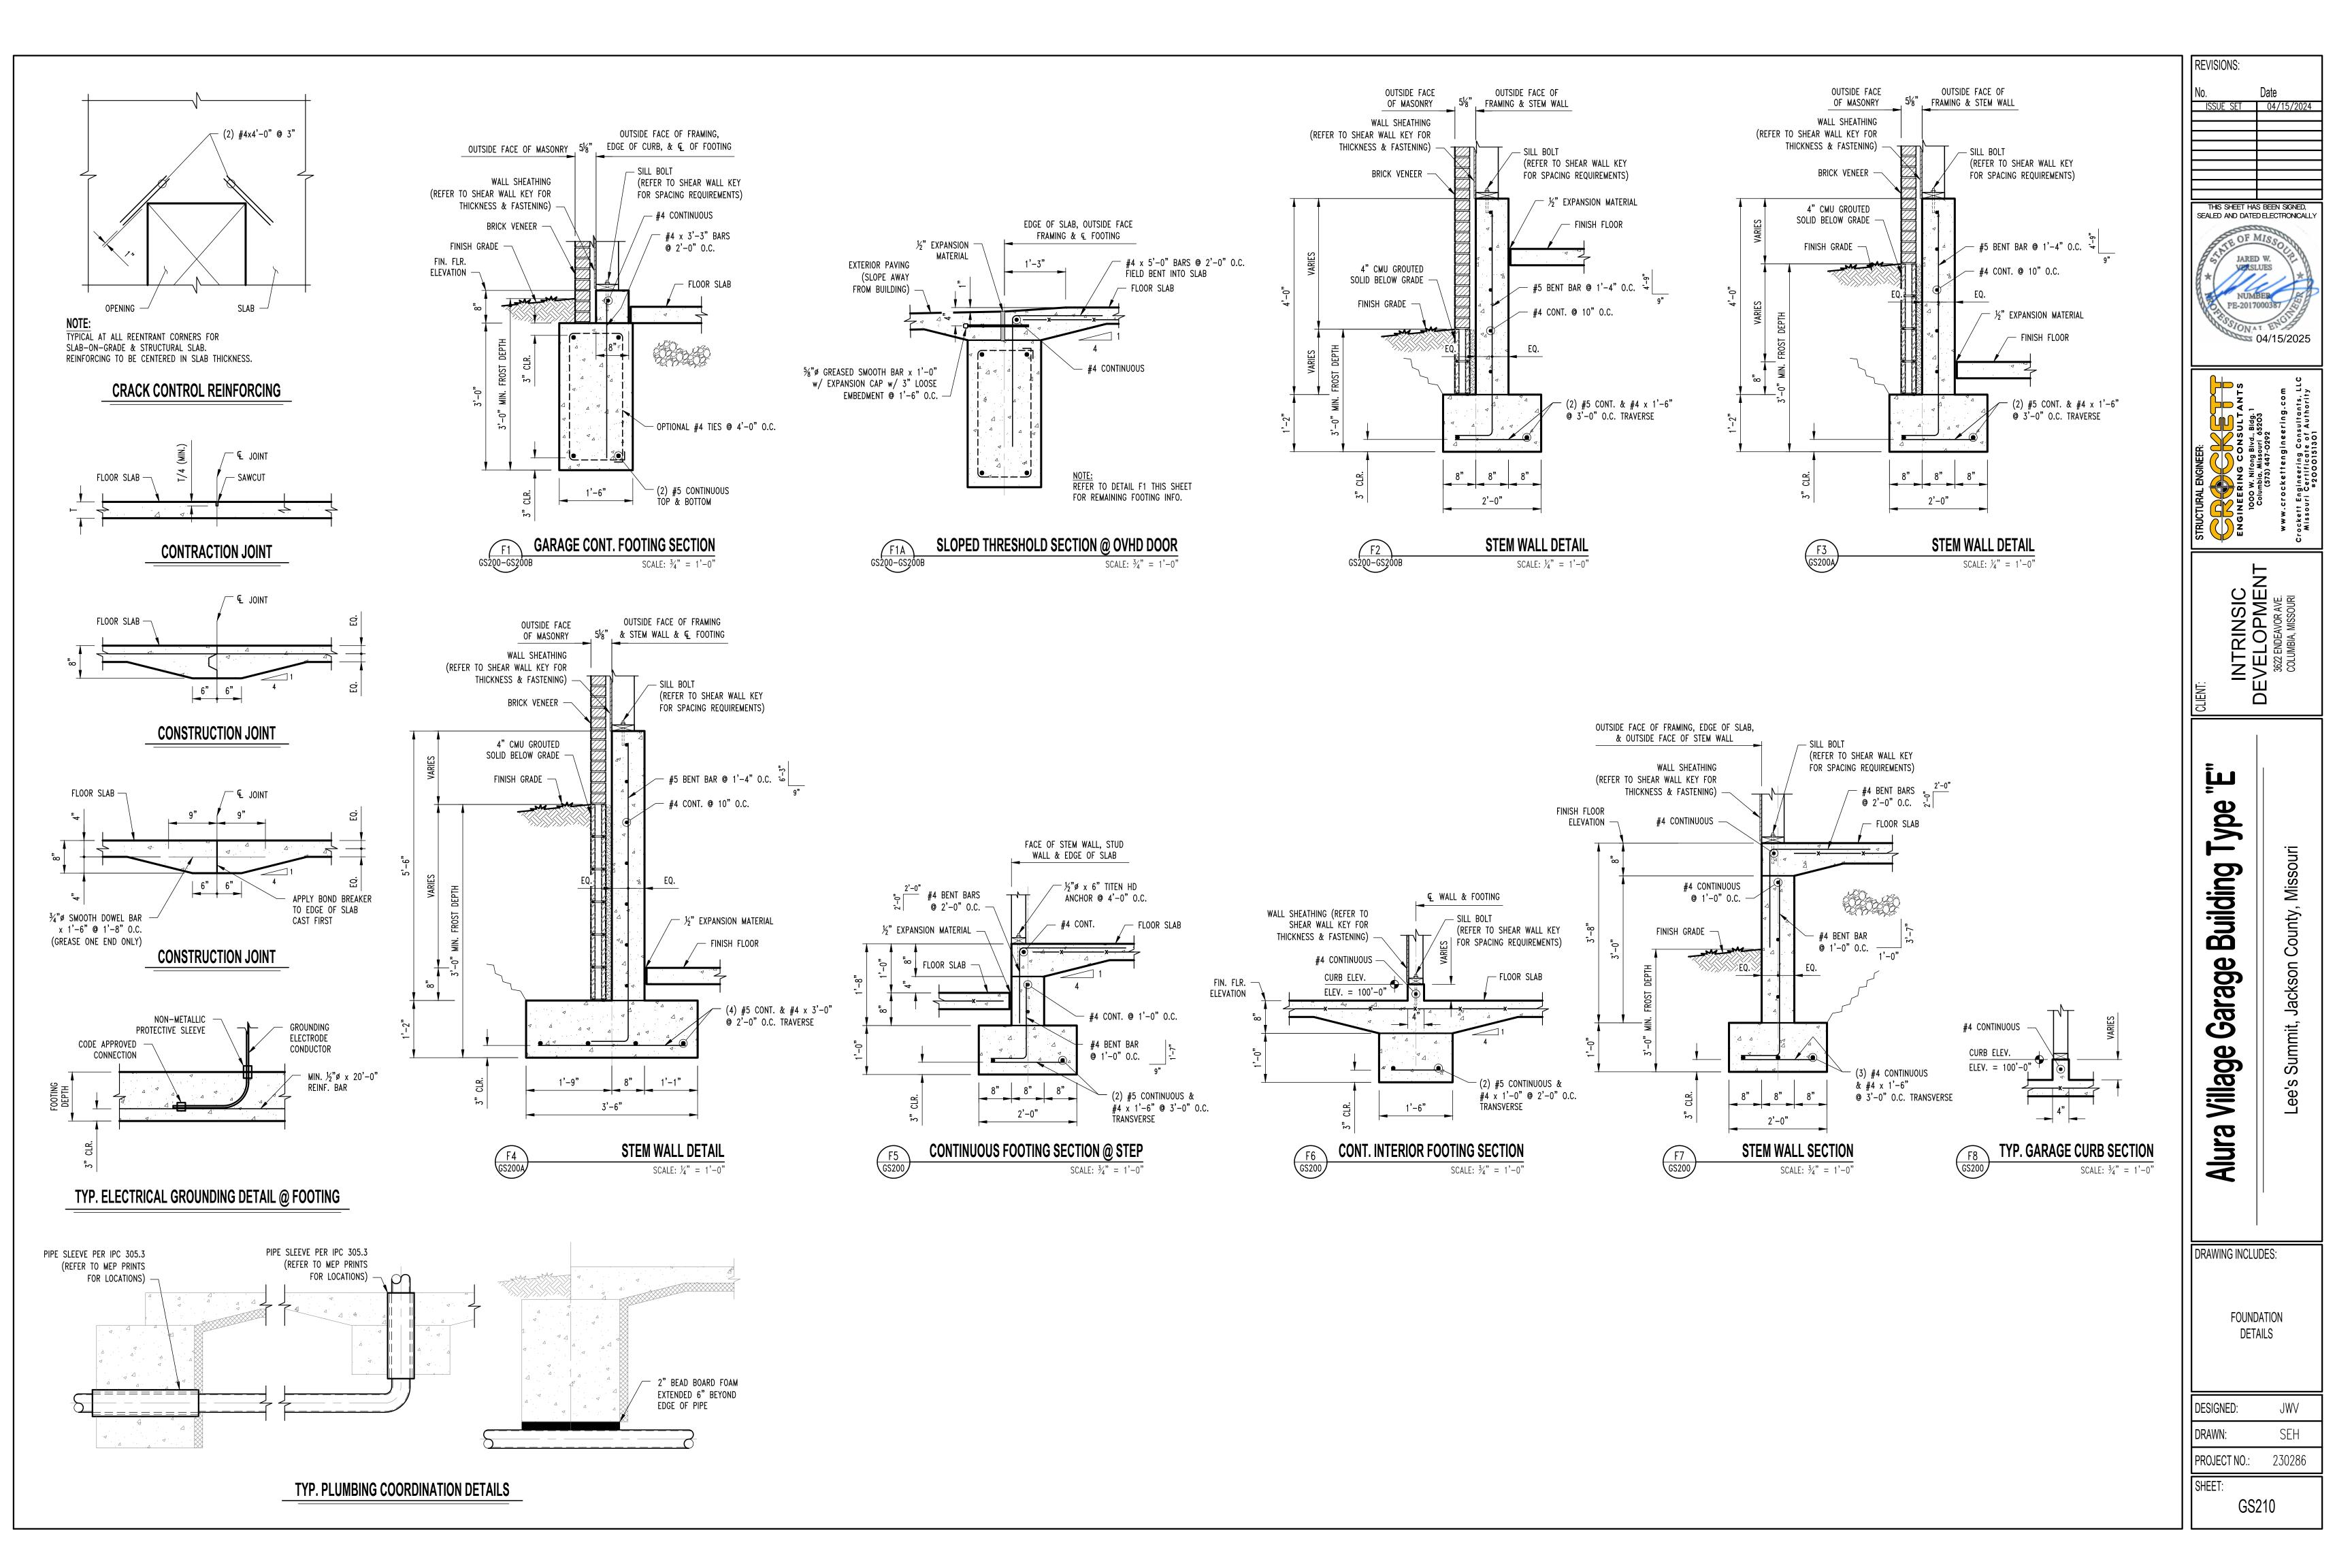

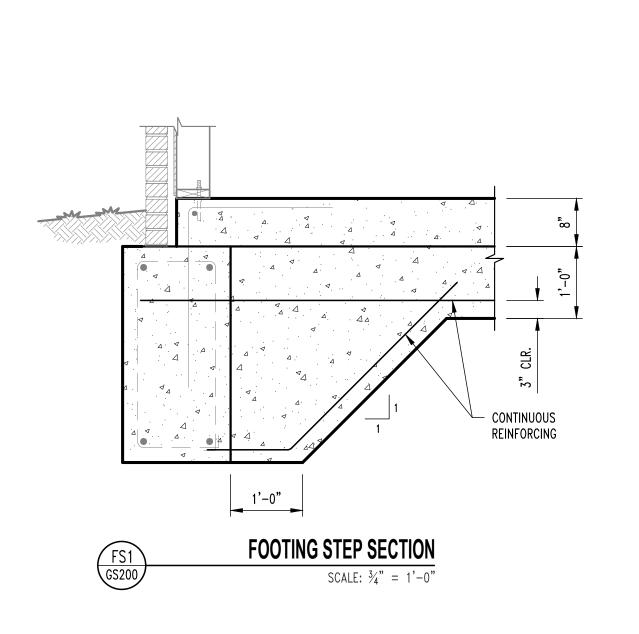

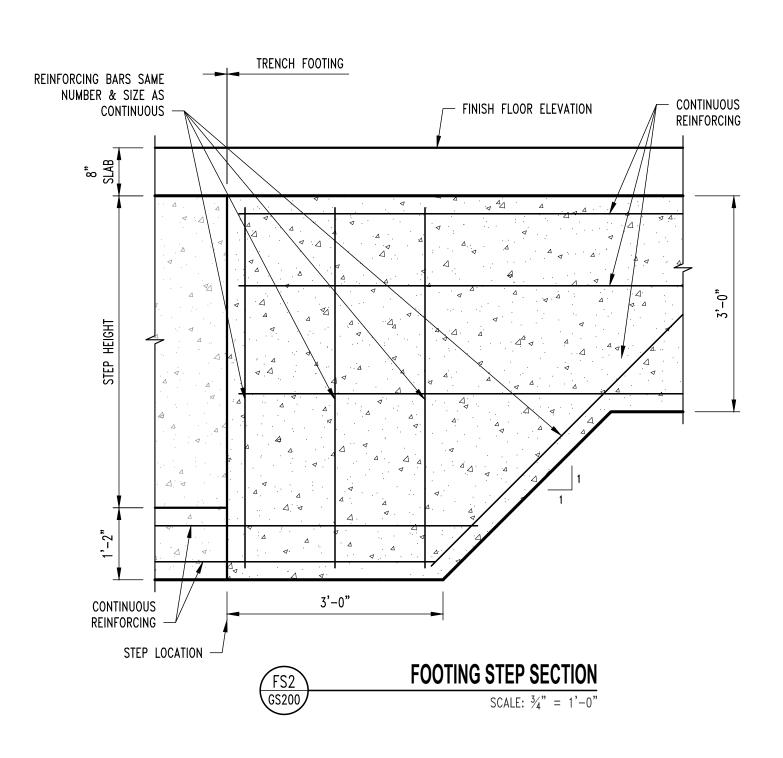

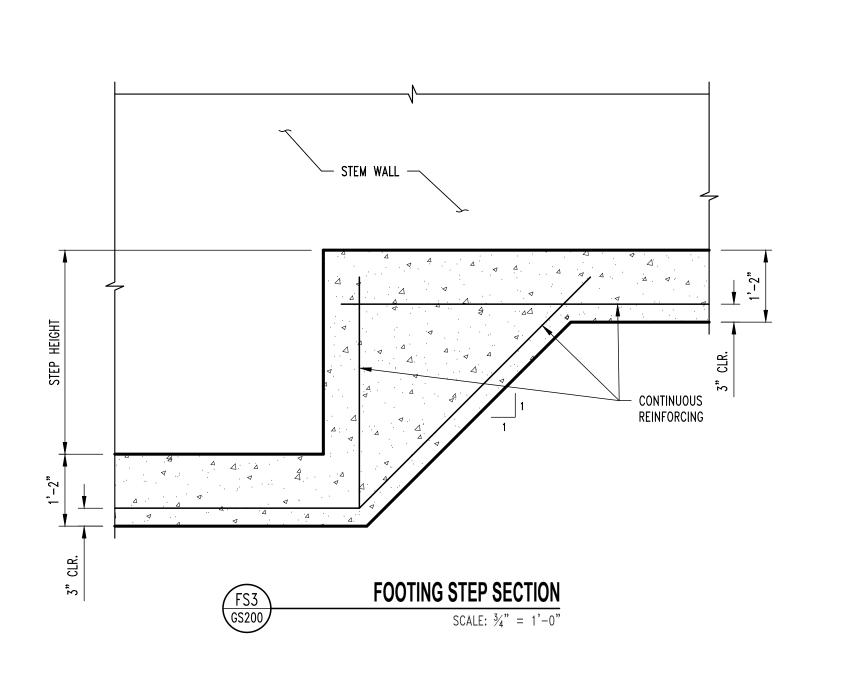




REVISIONS:


THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY


FOUNDATION DETAILS DESIGNED: JWV SEH DRAWN: PROJECT NO.:

SHEET: GS211

DRAWING INCLUDES:

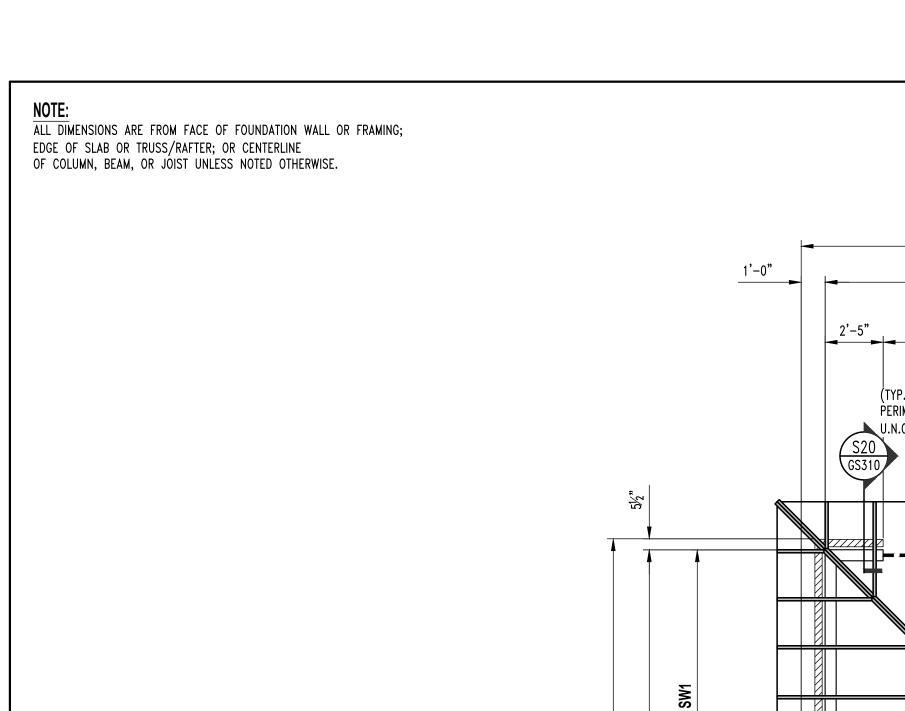

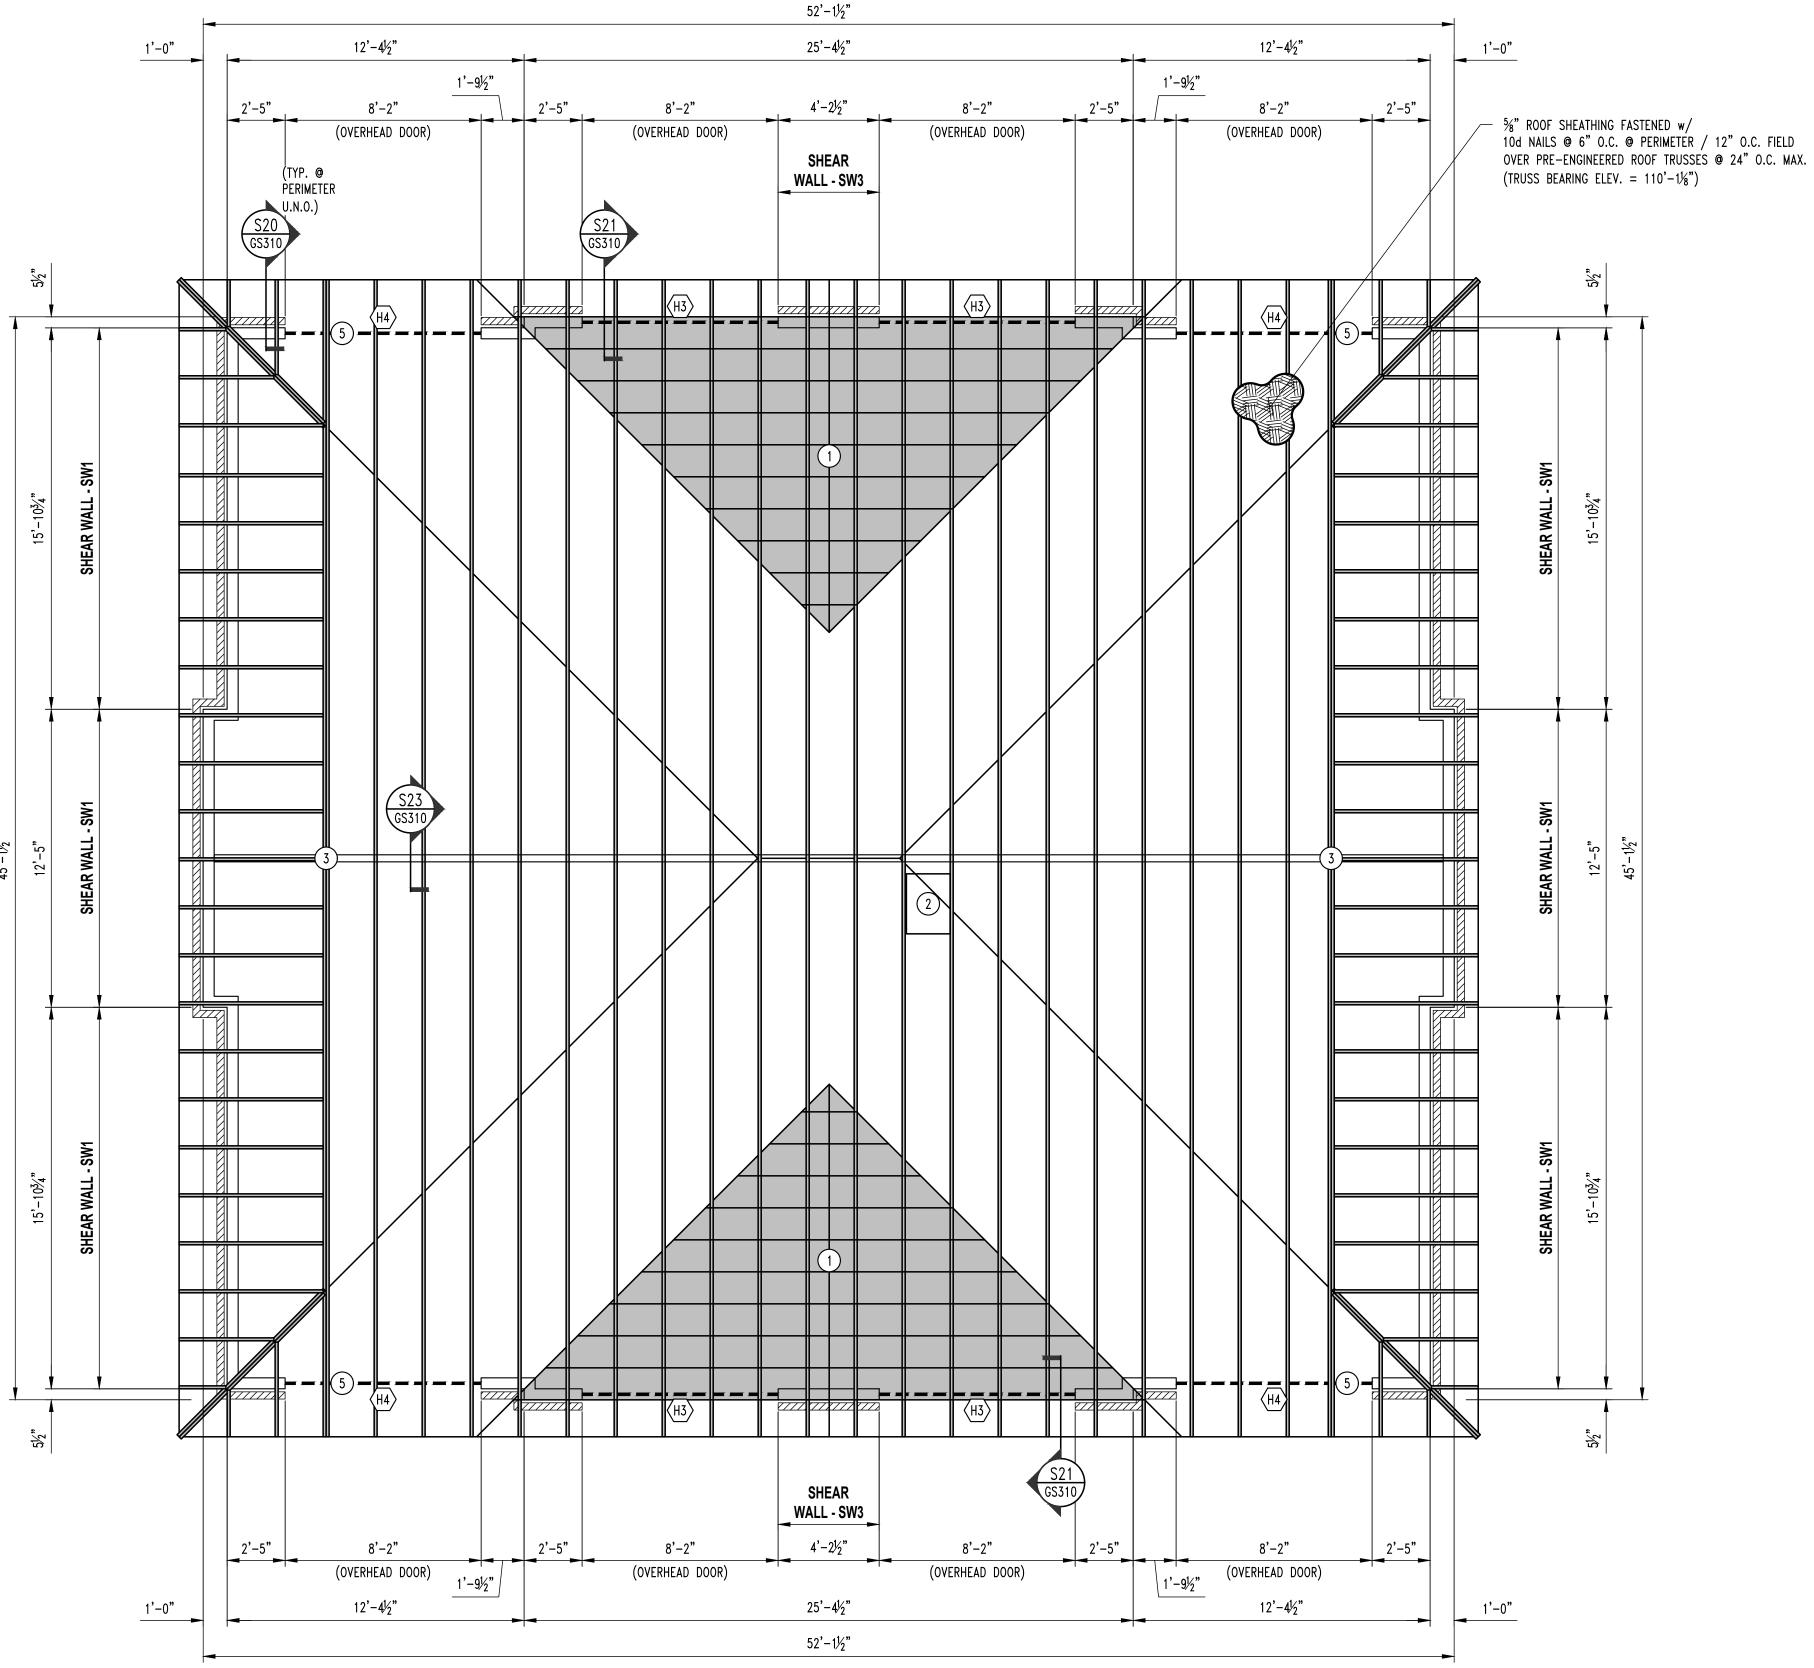

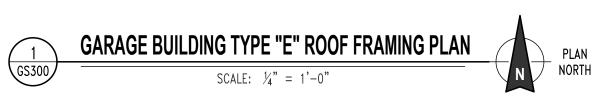

BRICK LINTEL SCHEDULE LENGTH MEMBER SIZE (GALVANIZED) L ≤ 4'-0" L4x4x3/8 WITH 6" BEARING EACH END L ≤ 8'-6" L6x4x3/8 (LLV) WITH 6" BEARING EACH END

	HEADER SCHEDULE				
BEL	HEADER	CRIPPLE/JACK	JAMB/KING		
1"	2 Ply 2x8 Doug. Fir No.2	Single Ply 2x6 SPF No.1/No.2	Single Ply 2x6 SPF No.1/No.		
2"	2 Ply 2x10 Doug. Fir Sel. Struct	2 Ply 2x6 SPF No.1/No.2	2 Ply 2x6 SPF No.1/No.2		
3"	3 Ply 2x10 Doug. Fir Sel. Struct	2 Ply 2x6 SPF No.1/No.2	2 Ply 2x6 SPF No.1/No.2		
4"	3 Ply 2x12 Doug, Fir Sel, Struct	2 Plv 2x6 SPF No.1/No.2	2 Plv 2x6 SPF No.1/No.2		

ROOF FRAMING NOTES

- 1) FRAME ROOF OVER PRE-ENGINEERED TRUSSES TO CREATE RIDGE, VALLEY, OR HIP AS SHOWN w/ 2x SPF No.1/No.2 RAFTERS @ 16" O.C. OR PRE-ENGINEERED TRUSSES @ 2'-0" O.C. MAX. (SHADED AREA)
- 2 ATTIC ACCESS; REFER TO ARCHITECTURALS FOR ADDITIONAL INFORMATION.
- 3 GIRDER TRUSS
- 4 3-PLY BUILT-UP POST BENEATH GIRDER TRUSS
 THIS LEVEL TO FLOOR SLAB CONNECTIONS ARE AS FOLLOWS: FLOOR SLAB: SIMPSON LTTP2. ROOF TRUSS: BY TRUSS MANUFACTURER
- 5 GIRDER TO HEADER CONNECTION. REFER TO TYPICAL DETAIL ON SHEET S310.
- 6) REFER TO TYPICAL SHEAR WALL DETAIL ON SHEET S310.

ISSUE SET 04/15/2024 THIS SHEET HAS BEEN SIGNED, SEALED AND DATED ELECTRONICALLY VERSLUES

REVISIONS:

04/15/2025

O

Building age क्र Village

DRAWING INCLUDES:

Alur

DESIGNED: JWV SEH 230286 PROJECT NO.:

GS300

SW3 SHEAR WALL

SHEAR WALL KEY

FIRST FLOOR:

SW1 SHEAR WALL

SW2 SHEAR WALL

• 7/16" OSB SHEATHING FASTENED WITH 8D NAILS @ 2" O.C. @ PERIMETER / 12" O.C. FIELD (**NOTE:** THIS SHEET FASTENING PATTERN REQUIRES 3X OR DOUBLE 2X FRAMING MEMBERS WHERE SHEETS MEET)

• 7/16" OSB SHEATHING FASTENED WITH 8D NAILS @ 4" O.C. @ PERIMETER / 12" O.C.

 REQUIRES SIMPSON DTT2Z-SDS2.5 HOLDOWN FASTENED TO 2-PLY STUDS W/ (8) ¼" X 1½" SDS SCREWS W/ 1/2" DIAMETER A307 THREADED ROD W/ 16" TOTAL (8" INTO

• 7/16" OSB SHEATHING FASTENED WITH 8D NAILS @ 4" O.C. @ PERIMETER / 12" O.C.

 REQUIRES SIMPSON HTT4 TENSION TIE FASTENED TO 2-PLY STUDS W/ (18) #10 X 1½" SDS SCREWS W/ 5/8" DIAMETER A307 THREADED ROD W/ 16" TOTAL (8" INTO FOOTING) SIMPSON "AT-3G" EPOXY EMBEDMENT AT EACH END OF THE SHEAR WALL

FOOTING) SIMPSON "AT-3G" EPOXY EMBEDMENT AT EACH END OF THE SHEAR WALL


• 1/2" DIAMETER X 6" SIMPSON TITEN HD ANCHOR SCREWS @ 3'-0" O.C.

• 1/2" DIAMETER X 6" SIMPSON TITEN HD ANCHOR SCREWS @ 2'-0" O.C.

- 1/2" DIAMETER X 6" SIMPSON TITEN HD ANCHOR SCREWS @ 1'-0" O.C.
- REQUIRES SIMPSON HDU8-SDS2.5 HOLDOWN FASTENED TO 3-PLY STUDS W/ (20) ¼" X 2½" SDS SCREWS W/ 7/8" DIAMETER A307 THREADED ROD W/ 20" TOTAL (12" INTO FOOTING) SIMPSON "AT-3G" EPOXY EMBEDMENT AT EACH END OF THE SHEAR WALL

TYPICAL SHEAR WALL UNLESS NOTED

- 7/16" OSB SHEATHING FASTENED WITH 8D NAILS @ 4" O.C. @ PERIMETER / 12" O.C.
- 1/2" DIAMETER X 6" SIMPSON TITEN HD ANCHOR SCREWS @ 3'-0" O.C.
- NO HOLDDOWNS REQUIRED

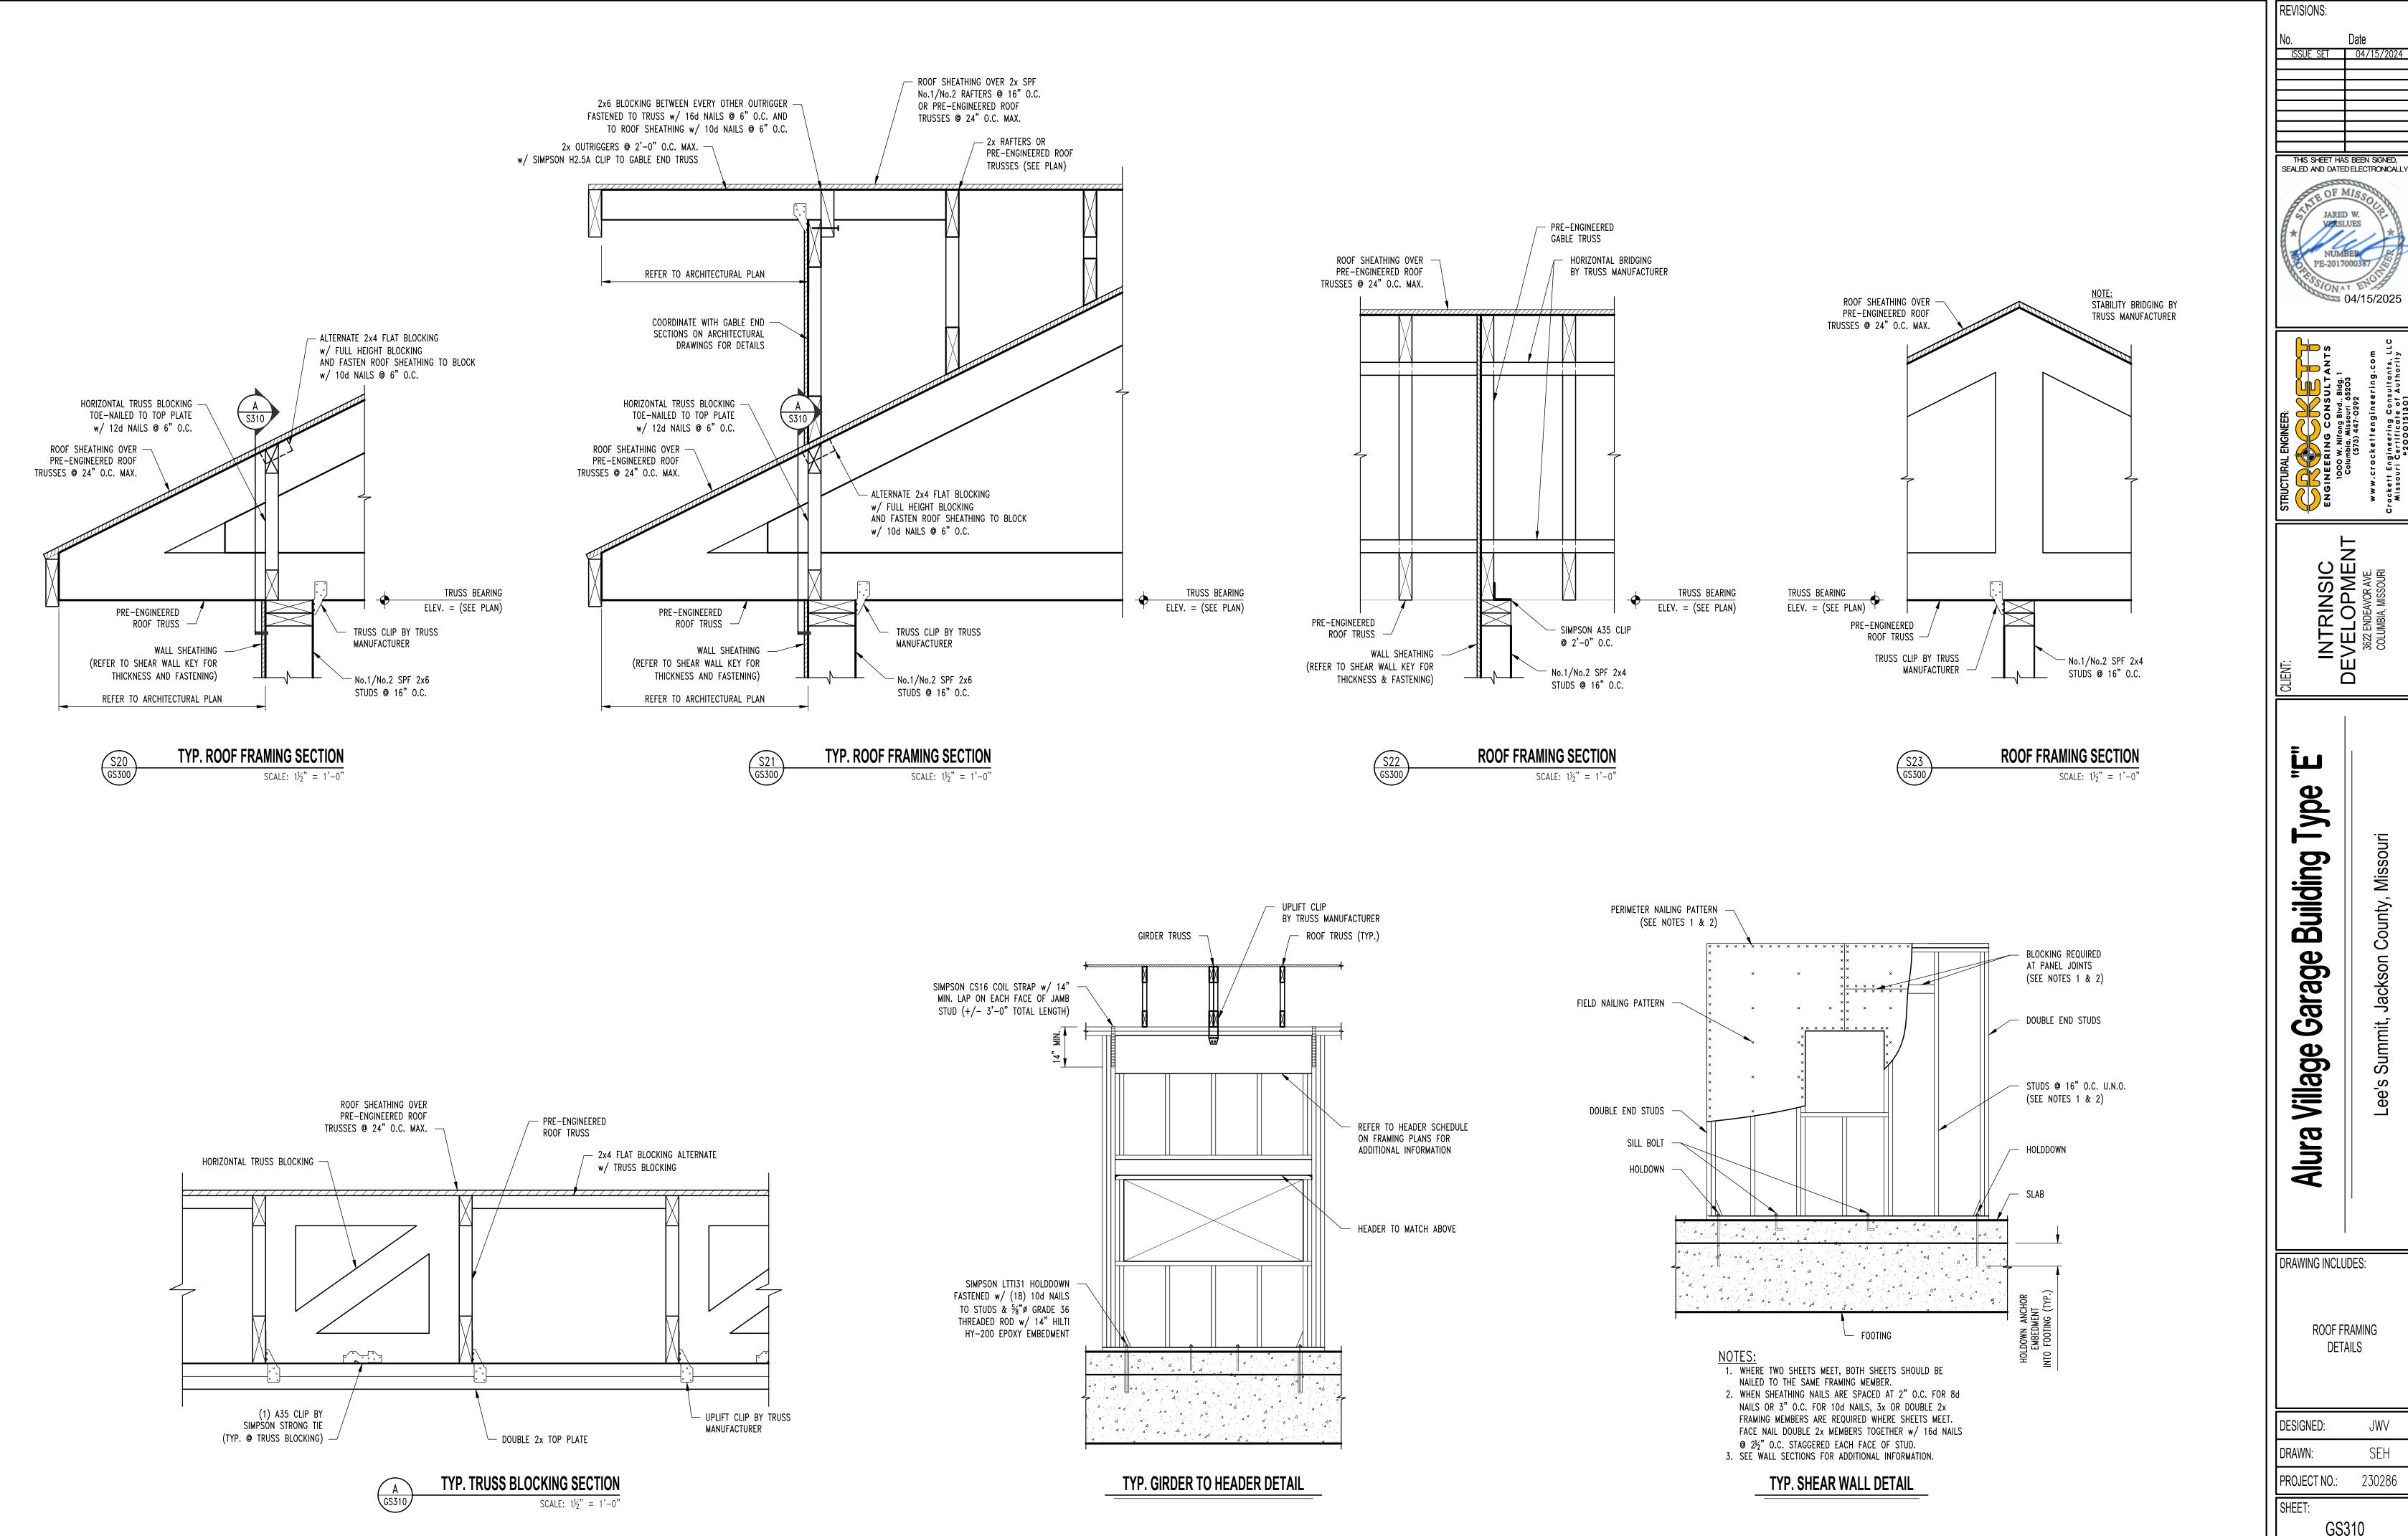

O Building Garage Village Alur


04/15/2025


DRAWING INCLUDES:


ROOF FRAMING DETAILS

JWV SEH


GS310

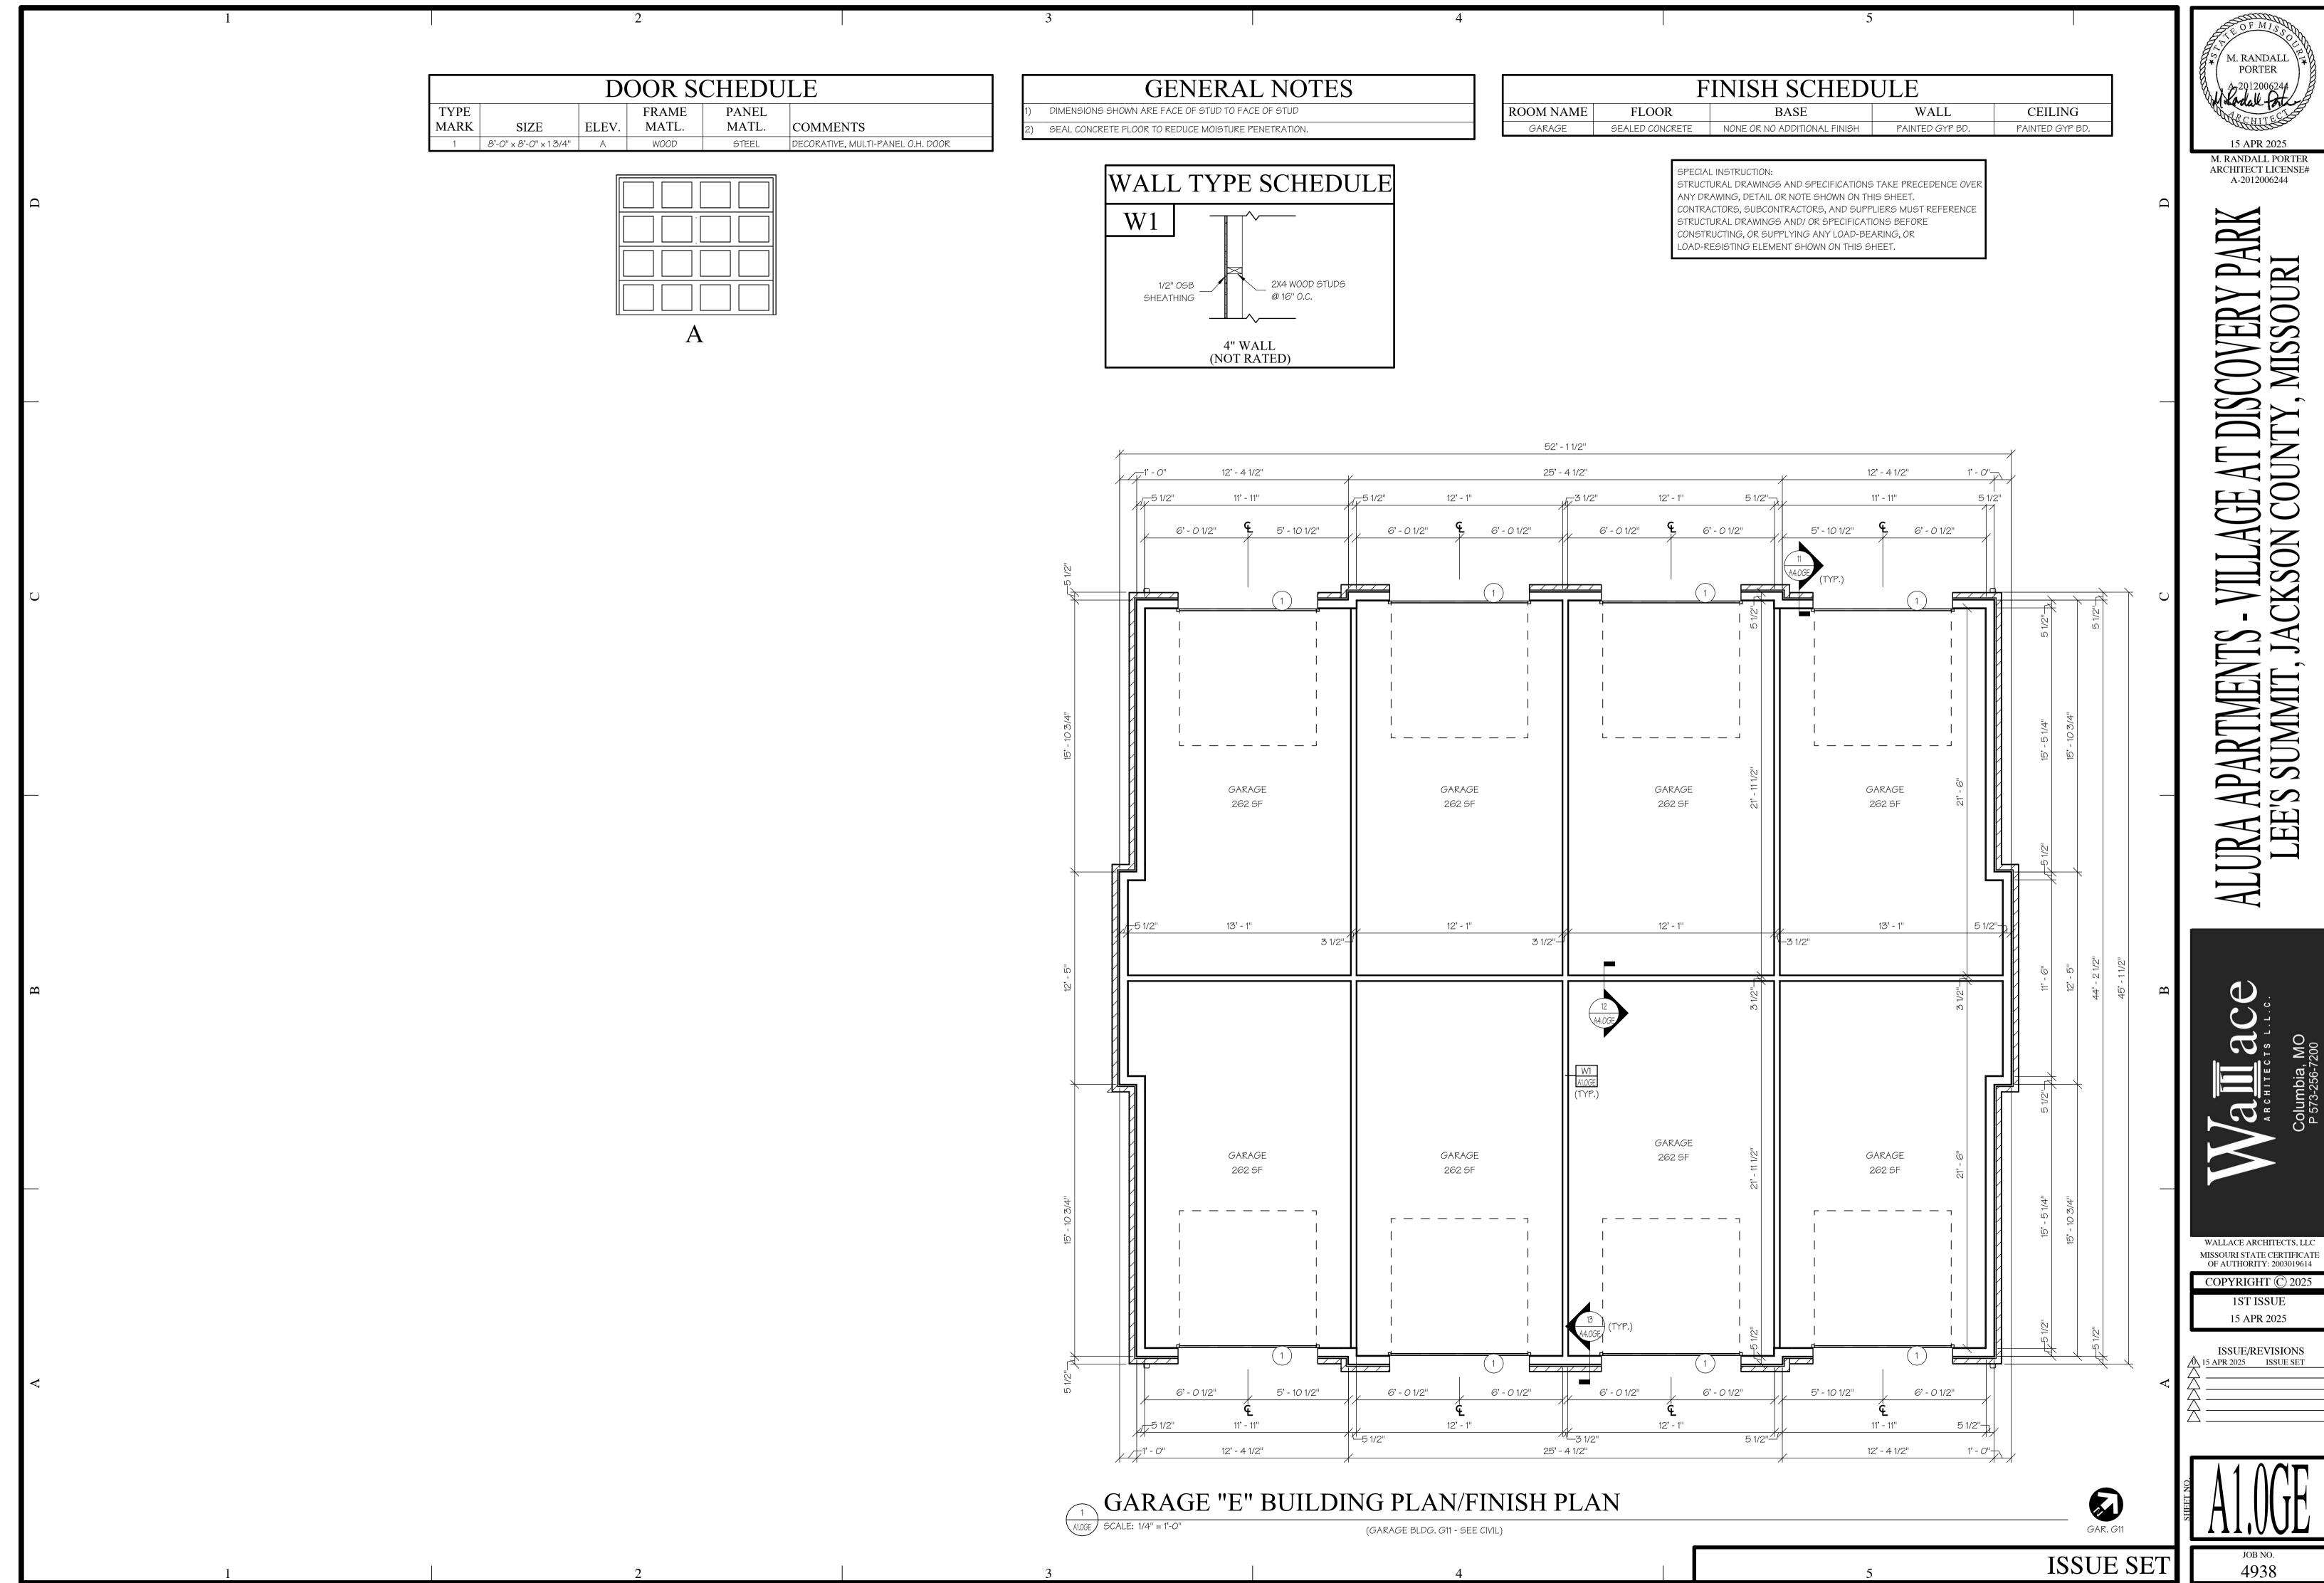



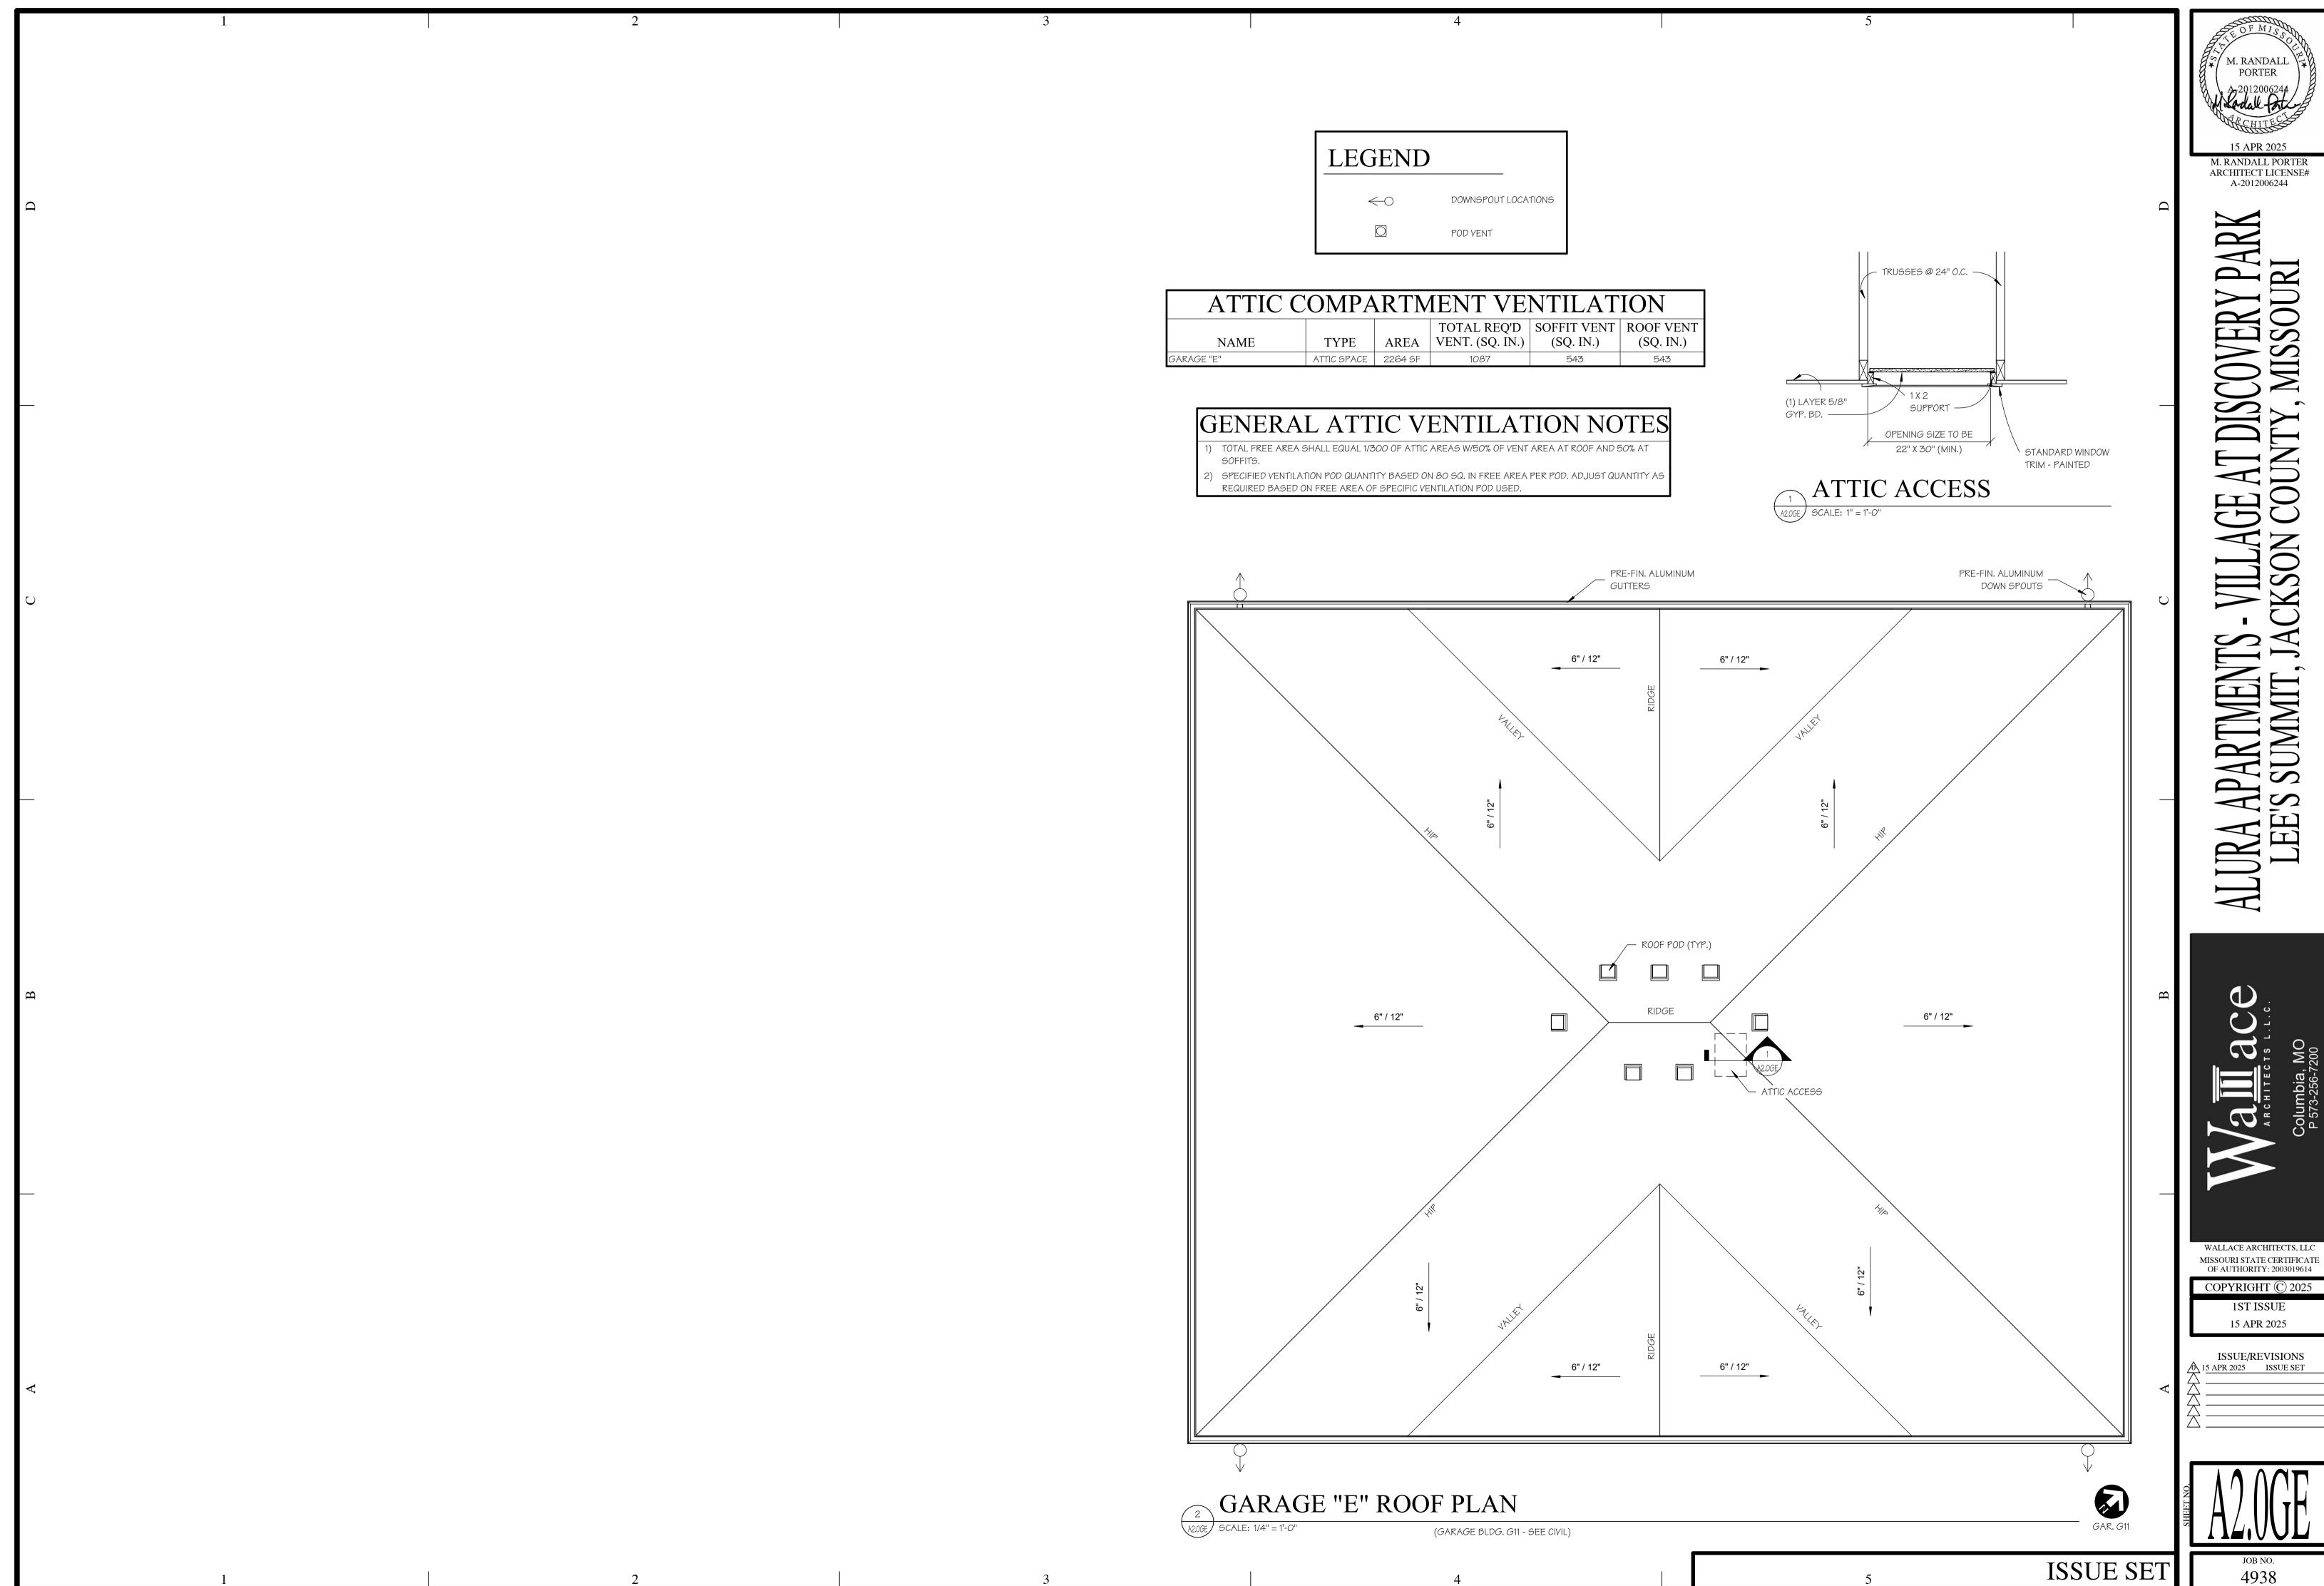




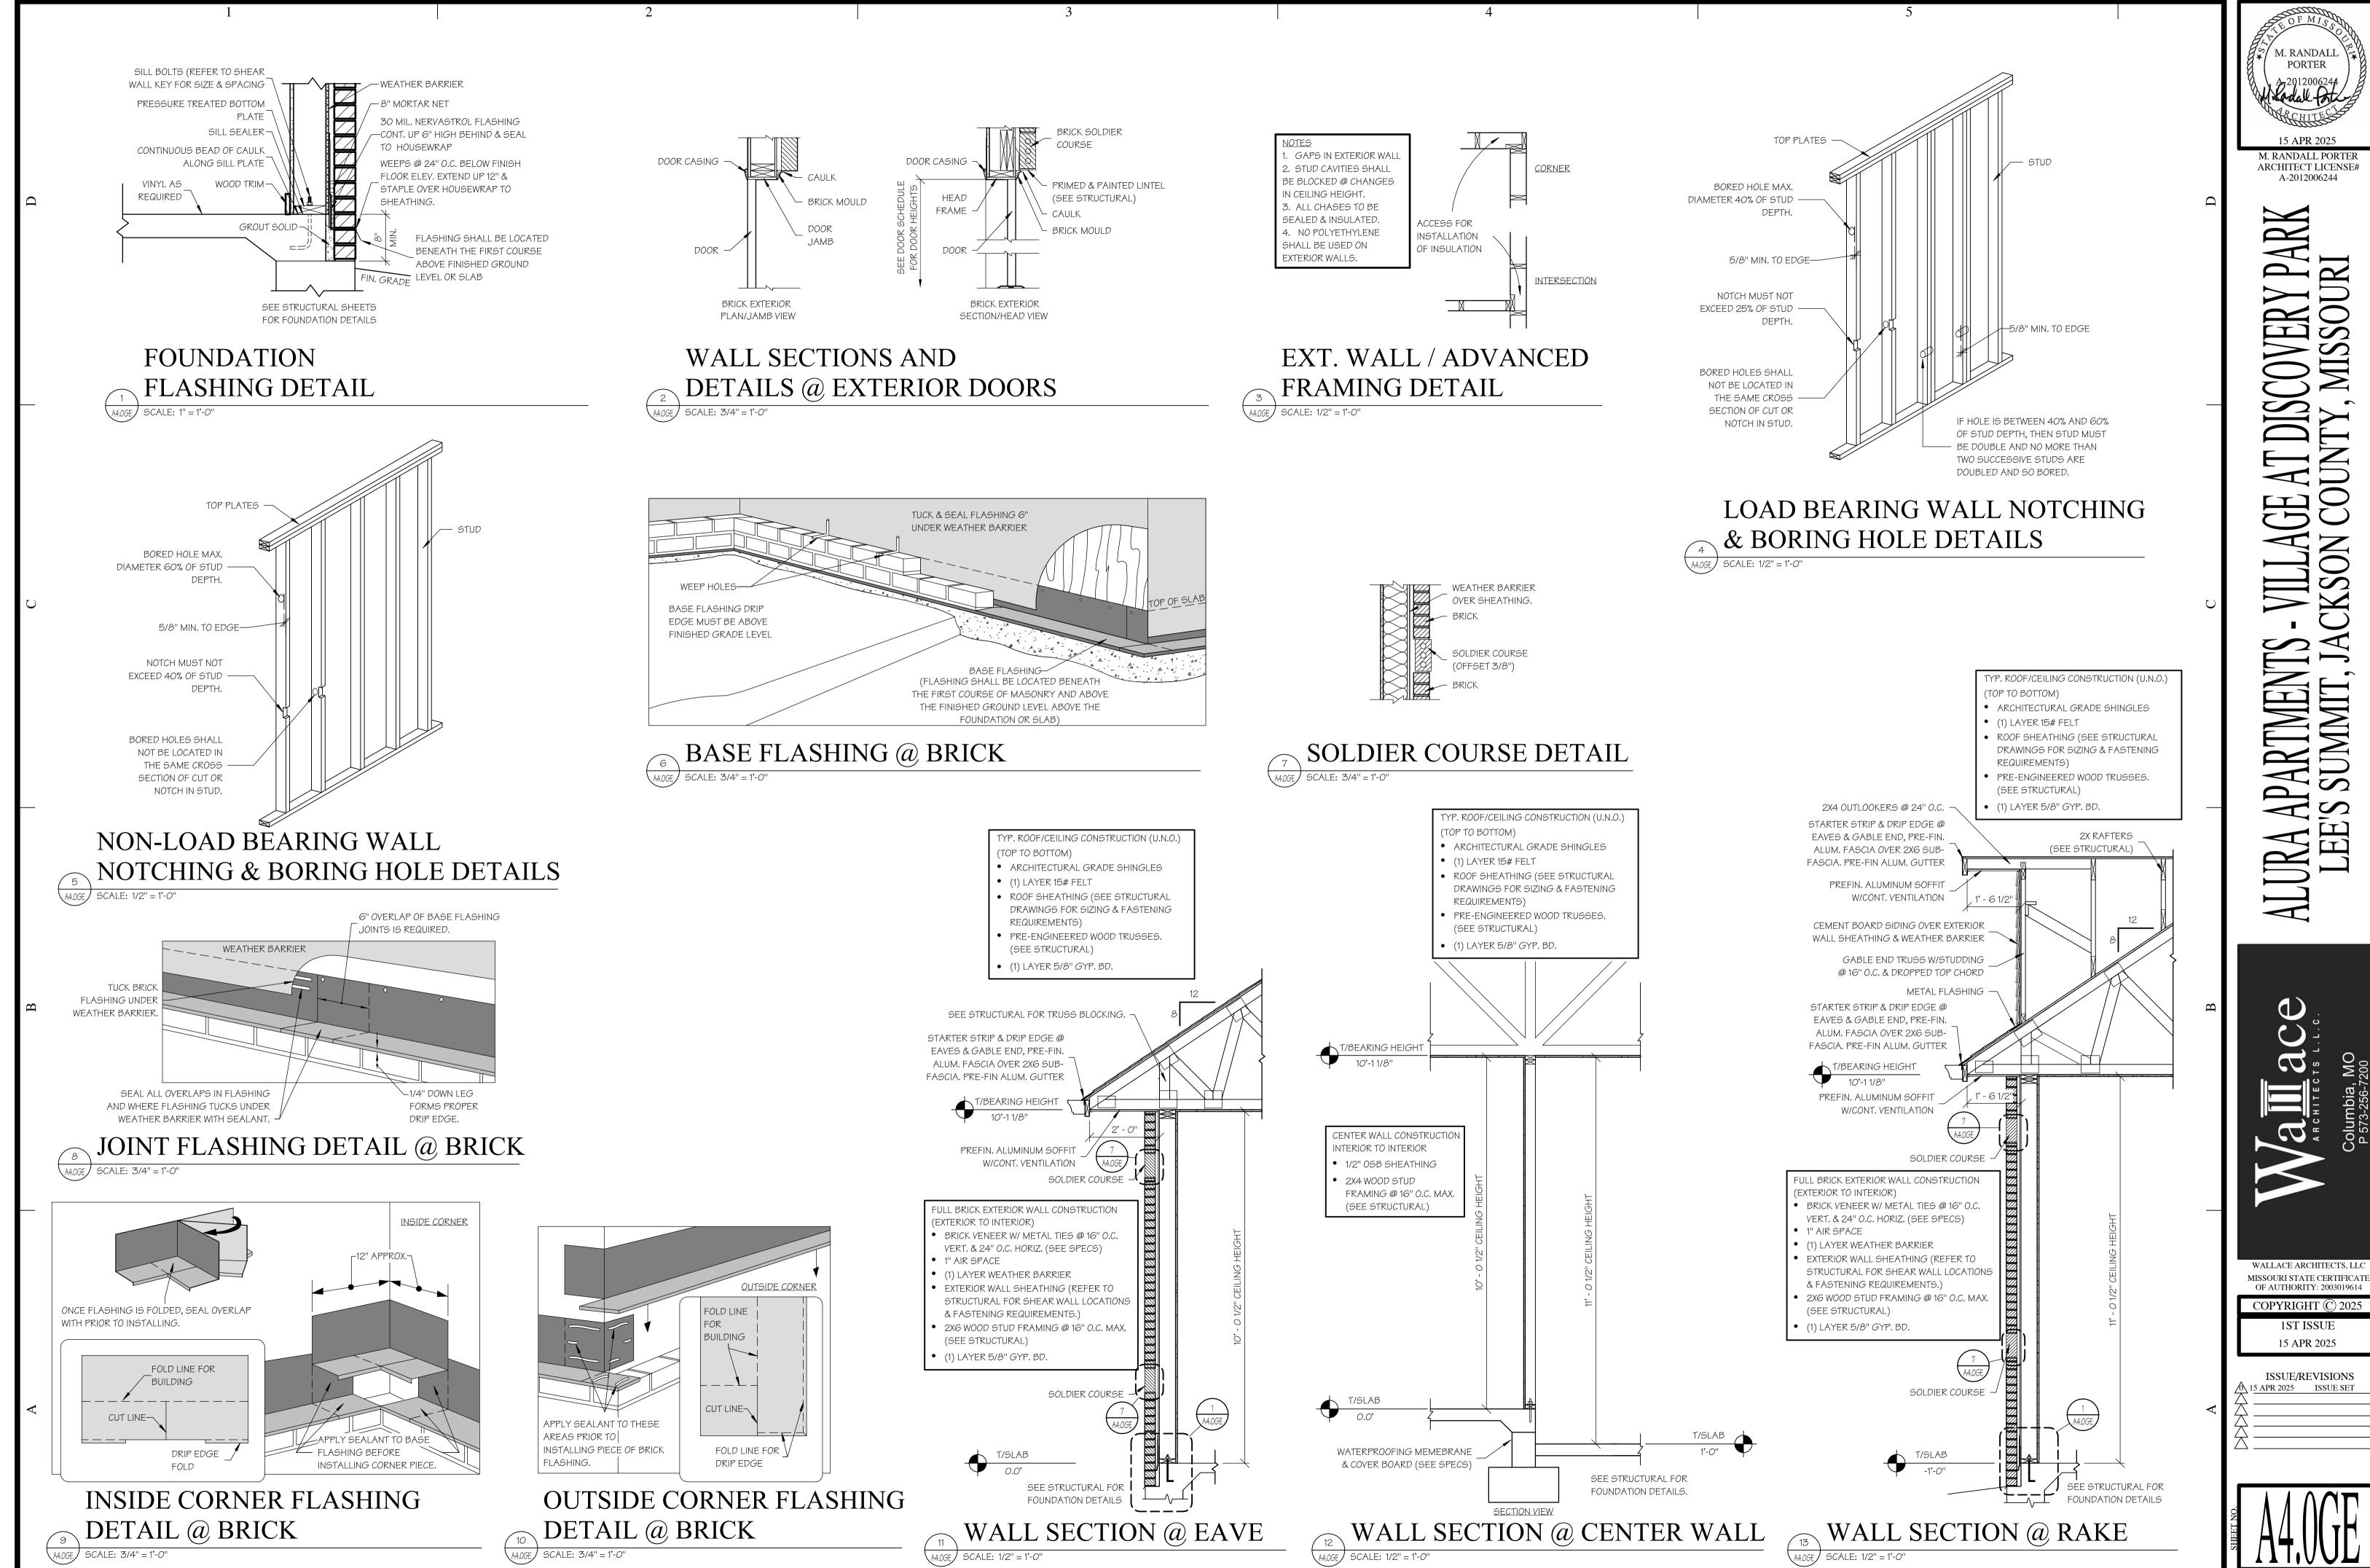

M. RANDALL PORTER ARCHITECT LICENSE#

ISSUE SET

4938

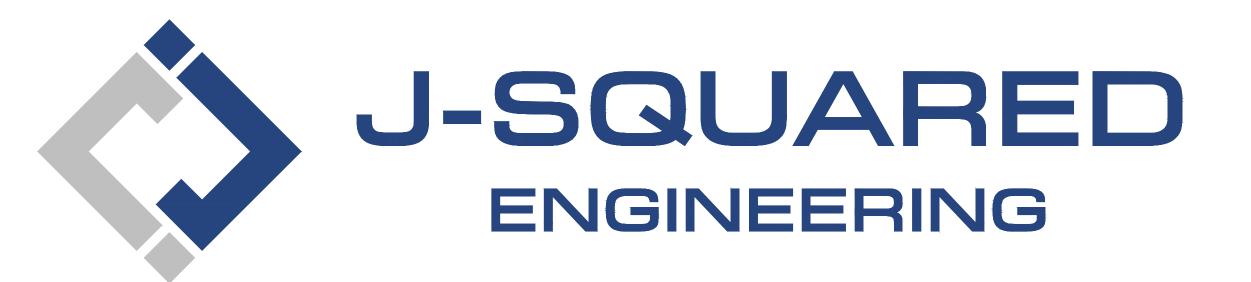

ELECTRICAL DESIGN DRAWINGS FOR:

The Village at Discovery Park Alura Apartments Garage #11

Northeast Douglas Street Lee's Summit, Jackson County, Missouri

GENERAL MEP SPECIFICATIONS

1. GENERA

- 1.1. ALL WORK SHALL BE PERFORMED IN COMPLIANCE WITH LOCALLY ADOPTED CODES AND ORDINANCE
 1.2. IT IS THE RESPONSIBILITY OF CONTRACTOR TO REVIEW AND UNDERSTAND ALL DRAWINGS AND
 SPECIFICATIONS IN CONTRACT DOCUMENTS. EACH CONTRACTOR IS RESPONSIBLE FOR ALL WORK
 ASSOCIATED WITH THEIR TRADE, REGARDLESS OF WHERE WORK IS DEPICTED IN PROJECT DRAWING
 OR SPECIFICATIONS.
- 1.3. LAYOUT OF SYSTEMS SHOWN ON PLANS ARE APPROXIMATE AND SCHEMATIC IN NATURE. ALL SYSTEMS WILL NEED TO BE FIELD-COORDINATED. CONTRACTOR SHALL INCLUDE THIS COORDINATION IN THEIR SCOPE AND INCLUDE ALL COSTS OF MODIFYING LAYOUT AS REQUIRED IN THEIR BID. PLANS ARE NOT INTENDED TO BE SHOP DRAWINGS FROM WHICH MATERIALS CAN BE ORDERED, FABRICATED, OR INSTALLED WITHOUT ADDITIONAL FIELD MEASUREMENTS AND COORDINATION.
- 1.4. NOT ALL SPECIFIC PIECES AND COMPONENTS OF EACH SYSTEM ARE DETAILED OR OUTLINED ON PLANS. CONTRACTOR IS RESPONSIBLE FOR PROVIDING ALL NECESSARY PARTS AND LABOR TO PRODUCE A COMPLETE AND FULLY OPERATIONAL SYSTEM UNLESS STATED OTHERWISE ON PLANS. CONTRACTOR IS TO PROVIDE AND INCLUDE ALL EQUIPMENT AND MATERIAL NEEDED TO COMPLETE WORK ASSOCIATED WITH THEIR BID UNLESS ANY ITEMS ARE SPECIFICALLY NOTED ON PLANS AS PROVIDED BY OTHERS. ALL MATERIALS TO BE NEW, FIRST CLASS, AND INSTALLED PER MANUFACTURER'S PUBLISHED INSTRUCTIONS.
- 1.5. WHERE CONFLICTS EXIST BETWEEN MEP PLANS AND CIVIL, ARCHITECTURAL, OR STRUCTURAL PLANS, NOTIFY MEP ENGINEER OF DISCREPANCIES FOR CLARIFICATION PRIOR TO PERFORMING ANY WORK THAT MAY CONTRADICT INFORMATION ELSEWHERE IN THE PROJECT PLANS.
- THESE PLANS ARE NOT TO BE SCALED. SEE ARCHITECTURAL PLANS FOR DIMENSIONS. WHERE THERE IS A CONFLICT BETWEEN ARCHITECTURAL DIMENSIONS AND MEP DIMENSIONS, ARCHITECTURAL SHALL GOVERN.
- 1.7. CONTRACTOR IS TO INCLUDE IN THEIR SCOPE THE COST OF ALL PERMITS, INSPECTIONS, METERING, TAPS, ETC. ASSOCIATED WITH THEIR WORK.
- 1.8. CONTRACTOR IS RESPONSIBLE FOR ALL EXCAVATION, CUTTING, CORING, PATCHING, AND BACKFILL REQUIRED TO COMPLETE THEIR WORK, UNLESS NOTED OTHERWISE ON PLANS.
- 1.9. SPECIFIC EQUIPMENT MANUFACTURERS AND/OR MODEL NUMBERS LISTED ON PLANS ARE TO ESTABLISH A BASIS-OF-DESIGN FOR QUALITY AND PERFORMANCE, VERIFY THAT SUBSTITUTIONS WILL BE ACCEPTABLE PRIOR TO PURCHASE & INSTALLATION.
- 1.10. NOTIFY ENGINEER OF ANY MAJOR PLAN DISCREPANCIES OR CONFLICTS PRIOR TO PROVIDING BIDS OR COMPLETING ANY WORK
- COMPLETING ANY WORK.

 1.11. SEE DISCIPLINE SHEETS FOR ADDITIONAL TRADE SPECIFIC SPECIFICATIONS.
- .12. WHERE SHUTDOWN OF ANY EXISTING UTILITY OR SERVICE TO BUILDING IS REQUIRED FOR COMPLETION OF WORK, COORDINATE OUTAGE WITH OWNER AS TO NOT DISRUPT TYPICAL OPERATIONS

2. WORKMANSI

- 2.1. SYSTEMS SHALL BE INSTALLED IN A FIRST-CLASS MANNER USING BEST ACCEPTABLE METHODS AND
- 2.2. ALL SYSTEMS SHALL BE INSTALLED PARALLEL OR PERPENDICULAR TO BUILDING ORIENTATION.

 COMPONENTS SHALL BE INSTALLED LEVEL AND PLUMB WITH ATTENTION GIVEN TO OVERALL
- 2.3. CONTRACTOR IS RESPONSIBLE FOR COORDINATING EQUIPMENT LOCATIONS AND SYSTEM ROUTING WITH OTHER TRADES PRIOR TO INSTALLATION.
- 2.4. CONTRACTOR TO GUARANTEE ALL MATERIALS AND WORKMANSHIP FOR A PERIOD OF ONE YEAR FROM THE DATE THE COMPLETED PROJECT IS RELEASED TO THE OWNER, UNLESS NOTED OTHERWISE ON PLANS.
- 2.5. DURING INSTALLATION OF MATERIALS OR ACTIVITIES IN NEW WORK SCOPE, AVOID DAMAGING EXISTING SURFACES AND EQUIPMENT TO REMAIN. ANY DAMAGE TO EXISTING SURFACES OR EQUIPMENT SHALL BE CORRECTED AT NO COST TO OWNER.

DEFERRED SUBMITTAL NOTES

1. FIRE ALARM SYST

- 1.1. FIRE ALARM CONTRACTOR SHALL PROVIDE DEFERRED SUBMITTAL PACKAGE FOR FIRE ALARM SYST SUBMITTAL SHALL INCLUDE BATTERY CALCULATIONS, VOLTAGE DROP CALCULATIONS, EQUIPMENT SPECIFICATIONS FOR DEVICES AND PANELS, ETC. DESIGN SHALL BE SEALED BY A QUALIFIED DESIGN SHALL BY A QUALIFIED DESIGN SHALL BY A QUALIFIED DESIGN SHALL BY A QUALIFIED BY THE STATE BY THE BY THE STATE BY THE BY THE
- FROIT ESSIONAL LICENSED BY THE STATE.

 2. FIRE ALARM SYSTEM COMPONENTS SHOWN (IF APPLICABLE) ARE GENERAL AND SCHEMATIC IN NATURE SHOWN FOR APPROXIMATE ROUGH-IN LOCATIONS AND QUANTITIES ONLY. CONTRACTOR TO VERIFY EXACT DEVICE LOCATIONS AND REQUIREMENTS WITH FIRE ALARM SYSTEM DESIGNER OF RECORD PRIOR TO ROUGH-IN.

2. FIRE SPRINKLER SYSTEM

- 1.1. FIRE SPRINKLER CONTRACTOR TO PROVIDE DEFERRED SUBMITTAL PACKAGE FOR FIRE SPRINKLER SYSTEM. SUBMITTAL SHALL INCLUDE HYDRAULIC CALCULATIONS AND SPRINKLER SYSTEM DRAWINGS SEALED BY A QUALIFIED DESIGN PROFESSIONAL LICENSED BY THE STATE.
- 2. WHERE COMBINED FIRE & DOMESTIC WATER SUPPLY LINES ARE SHOWN ON PLANS, INSTALLING CONTRACTOR SHALL VERIFY WITH FIRE SPRINKLER CONTRACTOR THAT INCOMING LINE SIZE IS ADEQUATE FOR FIRE SUPPRESSION SYSTEM.

REFERENCED CODES IN EFFECT

PROJECT HAS BEEN DESIGNED IN COMPLIANCE WITH THE FOLLOWING CODES LISTED BELOW, BUT THIS IS NOT AN EXHAUSTIVE LIST. PROJECT SHALL COMPLY WITH ALL APPLICABLE CODES, STANDARDS, AND LOCAL REQUIREMENTS

- 2018 INTERNATIONAL MECHANICAL COD
- 2018 INTERNATIONAL PLUMBING CODE
- 2018 INTERNATIONAL FUEL GAS CODE
 2018 INTERNATIONAL FIRE CODE
- 2018 INTERNATIONAL FIRE CODE
 2017 NATIONAL ELECTRIC CODE

FIRE RATED PENETRATION NOTES

- THIS BUILDING CONTAINS FIRE RATED ASSEMBLIES. SEE ARCHITECTURAL PLANS FOR LOCATIONS AND DETAILS.
 A UL-LISTED FIRESTOP SYSTEM SHALL BE INSTALLED AT EACH PENETRATION OF A HORIZONTAL OR VERTICAL
- RATED ASSEMBLY IN ACCORDANCE WITH ASTM E814 OR UL 1479.
- EACH CONTRACTOR IS RESPONSIBLE FOR PROVIDING PROTECTION FOR THEIR PENETRATIONS THRU RATED
- GENERAL CONTRACTOR IS RESPONSIBLE FOR PROVIDING AND MAINTAINING A CATALOG OF ALL UL LISTED
 FIRESTOP ASSEMBLIES, AND KEEPING A PHYSICAL COPY OF DETAILS FOR EACH USED FIRESTOP ASSEMBLY ON
 SITE FOR REFERENCE.

SHEET LIST TABLE

SHEET # SHEET TITLE

MEP1 ELECTRICAL PLAN COVER SHEET MEP2 SITE UTILITIES PLAN

101 POWER PLAN

01 LIGHTING PLAN

JAMES P. WATSON

NUMBER
PE-2015017071

James Watson, P.E. April 15, 2029 PE-2015017071 MO Certificate of Authority # 2018029680



J-SQUARED

2400 Bluff Creek Drive, Suite 10 Columbia, Missouri 65201 573.234.4492 www.j-squaredeng.com

ENGINEERING

J2 PROJECT No: J21357

J2 DESIGN: ACW

ISSUE TITLE DATE

PERMIT SET 04 - 15 - 2025

k partments

covery Park Alura A

illage at Discovery Par

AHJ APPROVAL STAMP

SHEET TITLE


ELECTRICAL
PLAN COVER
SHEET

SHEET NUMBE

MEP1



- 1. COORDINATE DETAILS & REQUIREMENTS OF NEW ELECTRIC SERVICE WITH EVERGY.

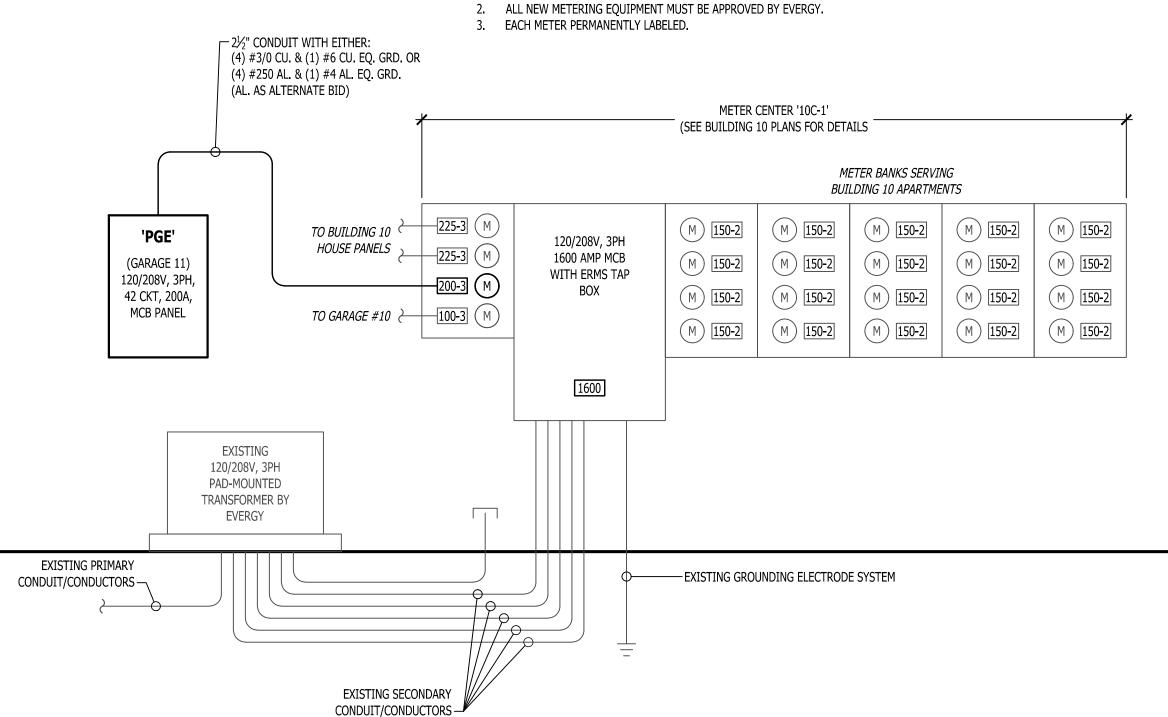

POWER RISER

SITE UTILITIES PLAN SYMBOL LEGEND


— — SANITARY SEWER PIPING ———— COLD WATER LINE WATER METER TIE INTO EXISTING **————** ELECTRIC

SITE UTILITIES PLAN GENERAL NOTES:

- 1. REFER TO CIVIL PLANS FOR EXACT UTILITY LOCATIONS, CONNECTIONS, DETAILS, ETC.
- 2. COORDINATE EXACT LOCATIONS OF ALL ELECTRICAL CONDUITS & EQUIPMENT WITH EVERGY.

SITE UTILITIES PLAN KEY NOTES:

1 UNDERGROUND CONDUIT/CONDUCTORS FROM APARTMENT METER CENTER TO GARAGE (SEE POWER RISER FOR DETAILS).

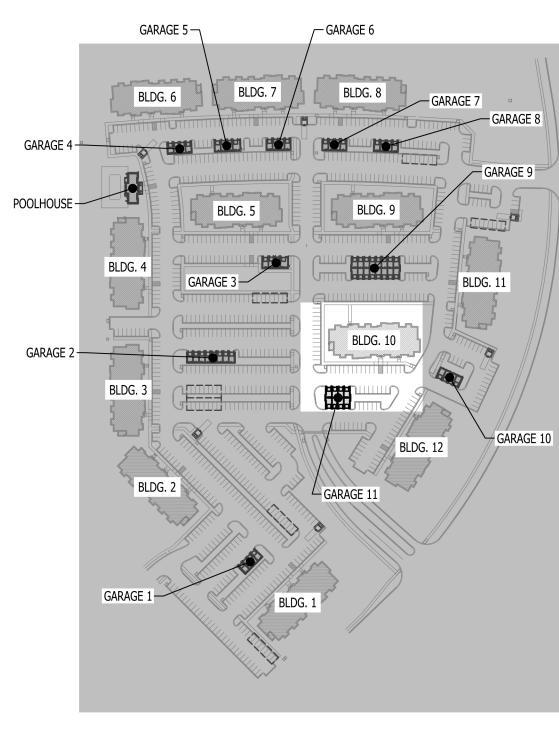


SITE KEY PLAN	
SCALE: 1" - 200 ft	

PA NEL SPECIFICATIONS							TOTAL CONNECTED	LOAD	
VO	DLTAGE: 120/208V 3-PH	NEMA RAT	TING: 3R					PHASE "A" LOAD:	106 AMPS
AMP	ACITY: 200A MCB	PANEL MOUNT	TING: SURFACE					PHASE "B" LOAD:	138 AMPS
A IC-R	RATING: 10kA							PHASE "C" LOAD:	138 AMPS
CIRCUIT NUMBER	DESCR	IPTION	BREAKER SIZE	AMPS	PHASE	AMPS	BREAKER SIZE	DESCRIPTION	
1	GARAGE R	RECEPTS.	20-1	6	Α	5	20-1	OVERHEAD DOOR OPENER	2
3	EXTERIOR	RECEPTS.	20-1	6	В	5	20-1	OVERHEAD DOOR OPENER	4
5	GARAGE R	RECEPTS.	20-1	6	С	5	20-1	OVERHEAD DOOR OPENER	6
7	OVERHEAD D	OOR OPENER	20-1	5	Α	5	20-1	OVERHEAD DOOR OPENER	8
9	OVERHEAD D	OOR OPENER	20-1	5	В	20	30-2	EV CHARGING RECEPT.	10
11	OVERHEAD D	OOR OPENER	20-1	5	С	20	-	-	12
13	OVERHEAD D	OOR OPENER	20-1	5	Α	20	30-2	EV CHARGING RECEPT.	14
15	EV CHARGIN	IG RECEPT.	30-2	20	В	20	-	-	16
17	-		-	20	С	20	30-2	EV CHARGING RECEPT.	18
19	EV CHARGIN	IG RECEPT.	30-2	20	Α	20	-	-	20
21	-		-	20	В	20	30-2	EV CHARGING RECEPT.	22
23	EV CHARGIN	IG RECEPT.	30-2	20	С	20	-	-	24
25			-	20	Α		20-1	SPARE	26
27	EV CHARGIN	IG RECEPT.	30-2	20	В	2	20-1	INTERIOR LIGHTING	28
29	-		-	20	С	2	20-1	EXTERIOR LIGHTING	30
31	SPA	RE	20-1		Α			OPEN	32
33	SPA		20-1		В			OPEN	34
35	SPA	RE	20-1		С			OPEN	36
37	SPA	RE	20-1		Α			OPEN	38
39	SPA	RE	20-1		В			OPEN	40
41	SPA	RE	20-1		l c			OPEN	42

NOTES: A: PANEL SHALL BE EQUAL TO SQUARE D MODEL "QO"

- B: ELECTRICIAN SHALL VERIFY EXACT EQUIPMENT OVERCURRENT PROTECTION REQUIREMENTS PRIOR TO PURCHASE & INSTALLATION OF EQUIPMENT.
- C: AFTER COMPLETION OF WORK, ELECTRICAN SHALL PROVIDE A TYPE WRITTEN PANEL DIRECTORY IN NEW PANEL.

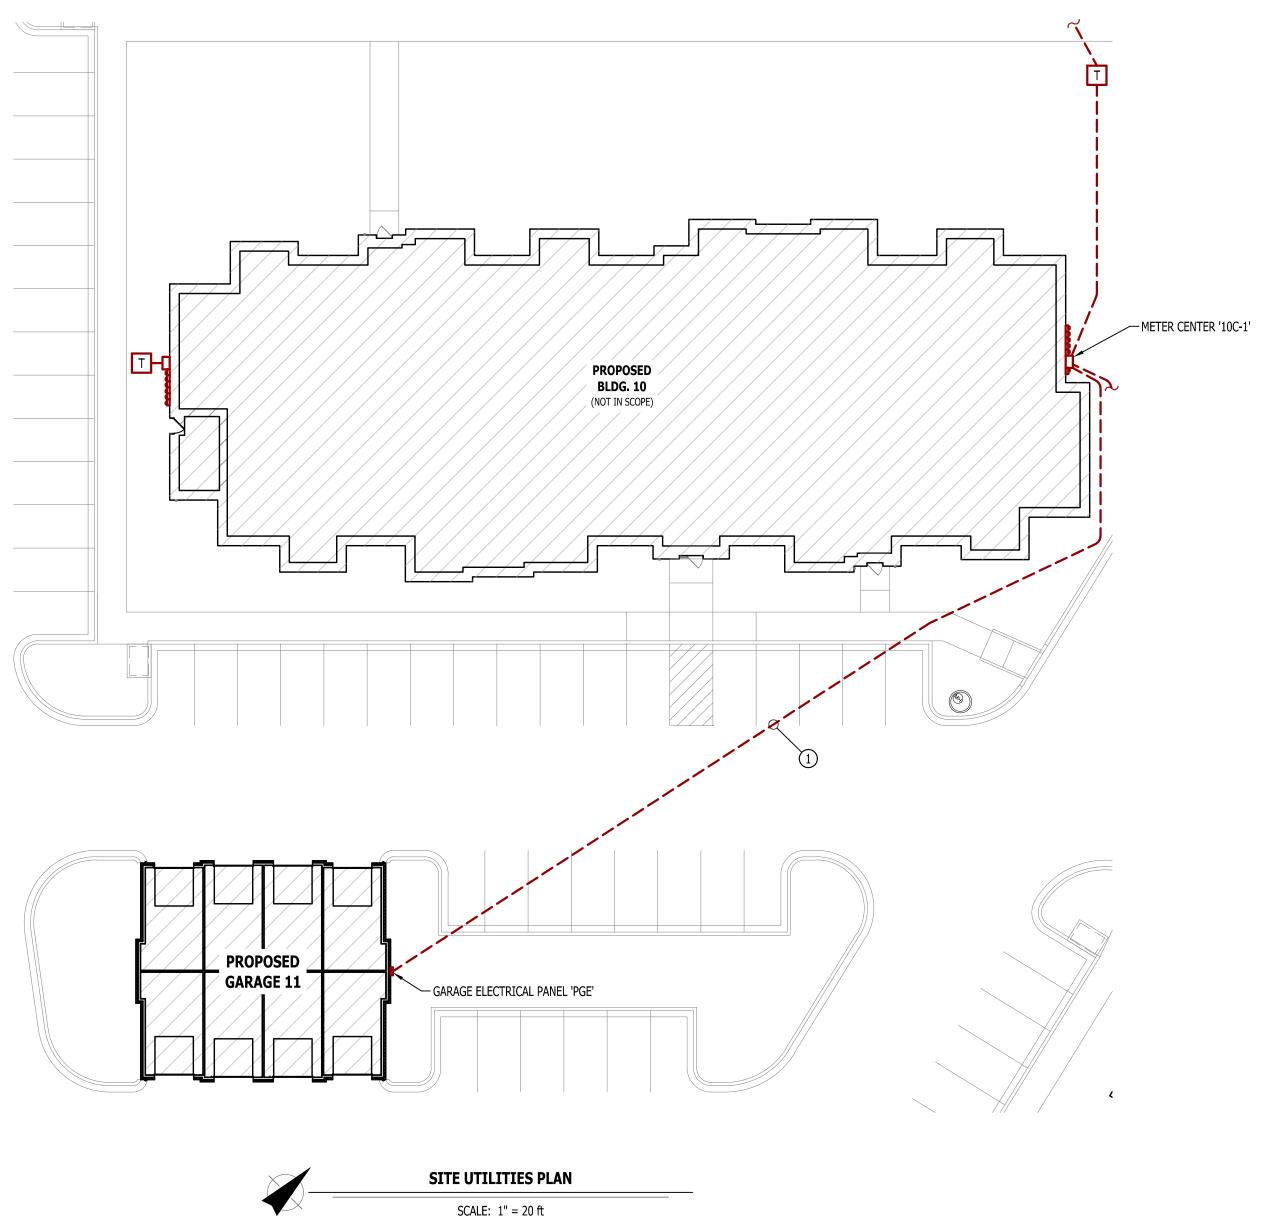



James Watson, P.E. April 15, 2025 PE-2015017071 MO Certificate of Authority # 2018029680



J-SQUARED **ENGINEERING**

2400 Bluff Creek Drive, Suite 101 Columbia, Missouri 65201 573.234.4492

www.j-squaredeng.com

2 PROJECT No:	J21357
2 DESIGN:	ACW
SSUE TITLE	DATE

PERMIT SET 04 - 15 - 2025

Dis

AHJ APPROVAL STAMP

SITE UTILITIES **PLAN**

SHEET NUMBER

120V IONIZATION SMOKE 520Hz LOW FREQUENCY ALARM WITH

DOWN AHU UPON FIRE DETECTION. COORDINATE WITH HVAC

(FIELD-COORDINATE)

SILENCING CAPABILITIES & LOW-VOLTAGE CONTACTS WIRED TO SHUT

CONTRACTOR. SMOKE DETECTOR MUST BE LOCATED AT LEAST 3' FROM CEILING FAN BLADES AND AT LEAST 10' FROM ANY COOKING APPLIANCE

______ L-----UNDERGROUND CONDUIT/CONDUCTORS PGE - 19,21 PGE - 23,25 PGE - 27,29 UP TO PANEL — (SEE SITE PLANS FOR CONTINUATION) PGE - 10,12 PGE - 3 PGE - 18,20 PGE - 14,16 GARAGE 262 SF PGE-11

POWER PLAN

SCALE: 1/4" = 1'-0"

POWER PLAN GENERAL NOTES:

 SEE E500 & E600 SERIES SHEETS FOR POWER SCHEDULES, DETAILS, REQUIREMENTS, ETC.
 ELECTRICAL CONTRACTOR SHALL REVIEW ALL PROJECT DOCUMENTS AND COORDINATE LOCATION OF ALL ELECTRICAL EQUIPMENT, WIRING, HANGERS / SUPPORTS, ETC. WITH HVAC AND PLUMBING TRADES BEFORE INSTALLATION OF ANY MATERIAL. ADDITIONAL COSTS ASSOCIATED WITH LACK OF COORDINATION WILL NOT BE REIMBURSED.

POWER PLAN KEY NOTES:

1) POWER IN CEILING FOR OVERHEAD DOOR OPENER. COORDINATE EXACT LOCATION & REQUIREMENTS WITH DOOR INSTALLER.

2) NEMA 6-30R RECEPTACLE FOR EV CHARGER, COORDINATE EXACT LOCATION WITH OWNER PRIOR TO

JAMES P. WATSON

NUMBER
PE-2015017071

James Watson, P.E. April 15, 2025 PE-2015017071 MO Certificate of Authority # 2018029680



J-SQUARED ENGINEERING

2400 Bluff Creek Drive, Suite 101 Columbia, Missouri 65201 573.234.4492 www.j-squaredeng.com

J2 PROJECT No:	J21357
J2 DESIGN:	ACW
ISSUE TITLE	DATE

ISSUE TITLE	DATE
PERMIT SET	04 - 15 - 2025

tments

k Alura Apartmen

Northeast Douglas Street

The Vi

Discovery

AHJ APPROVAL STAMP

SHEET TITLE

POWER PLAN

SHEET NUM

EP101




LIGHTING FIXTURE "X1" INDICATES FIXTURE TYPE (REFER TO SCHEDULE)

TOGGLE SWITCH - SWITCH TYPE

DIMMER SWITCH

LIGHTING PLAN GENERAL NOTES:

- SEE E500 & E600 SERIES SHEETS FOR ADDITIONAL ELECTRICAL NOTES, DETAILS, & SCHEDULES. OCCUPANCY/VACANCY SENSOR QUANTITIES AND GENERAL LOCATIONS SHOWN FOR REFERENCE ONLY. CONTRACTOR TO PROVIDE & INSTALL SENSOR WITH SPACING PER MANUFACTURER'S SPECIFICATIONS AND INCLUDE ADDITIONAL SENSORS IF NECESSARY. CEILING-MOUNTED SENSORS SHALL BE INSTALLED WITHIN MANUFACTURER'S ACCEPTABLE MOUNTING HEIGHT RANGE.
- 3. ELECTRICAL CONTRACTOR SHALL REVIEW ALL PROJECT DOCUMENTS AND COORDINATE LOCATION OF ALL FIXTURES, WIRING, HANGERS / SUPPORTS, ETC. WITH HVAC AND PLUMBING TRADES BEFORE INSTALLATION OF ANY MATERIAL. ADDITIONAL COSTS ASSOCIATED WITH LACK OF COORDINATION WILL NOT BE REIMBURSED.

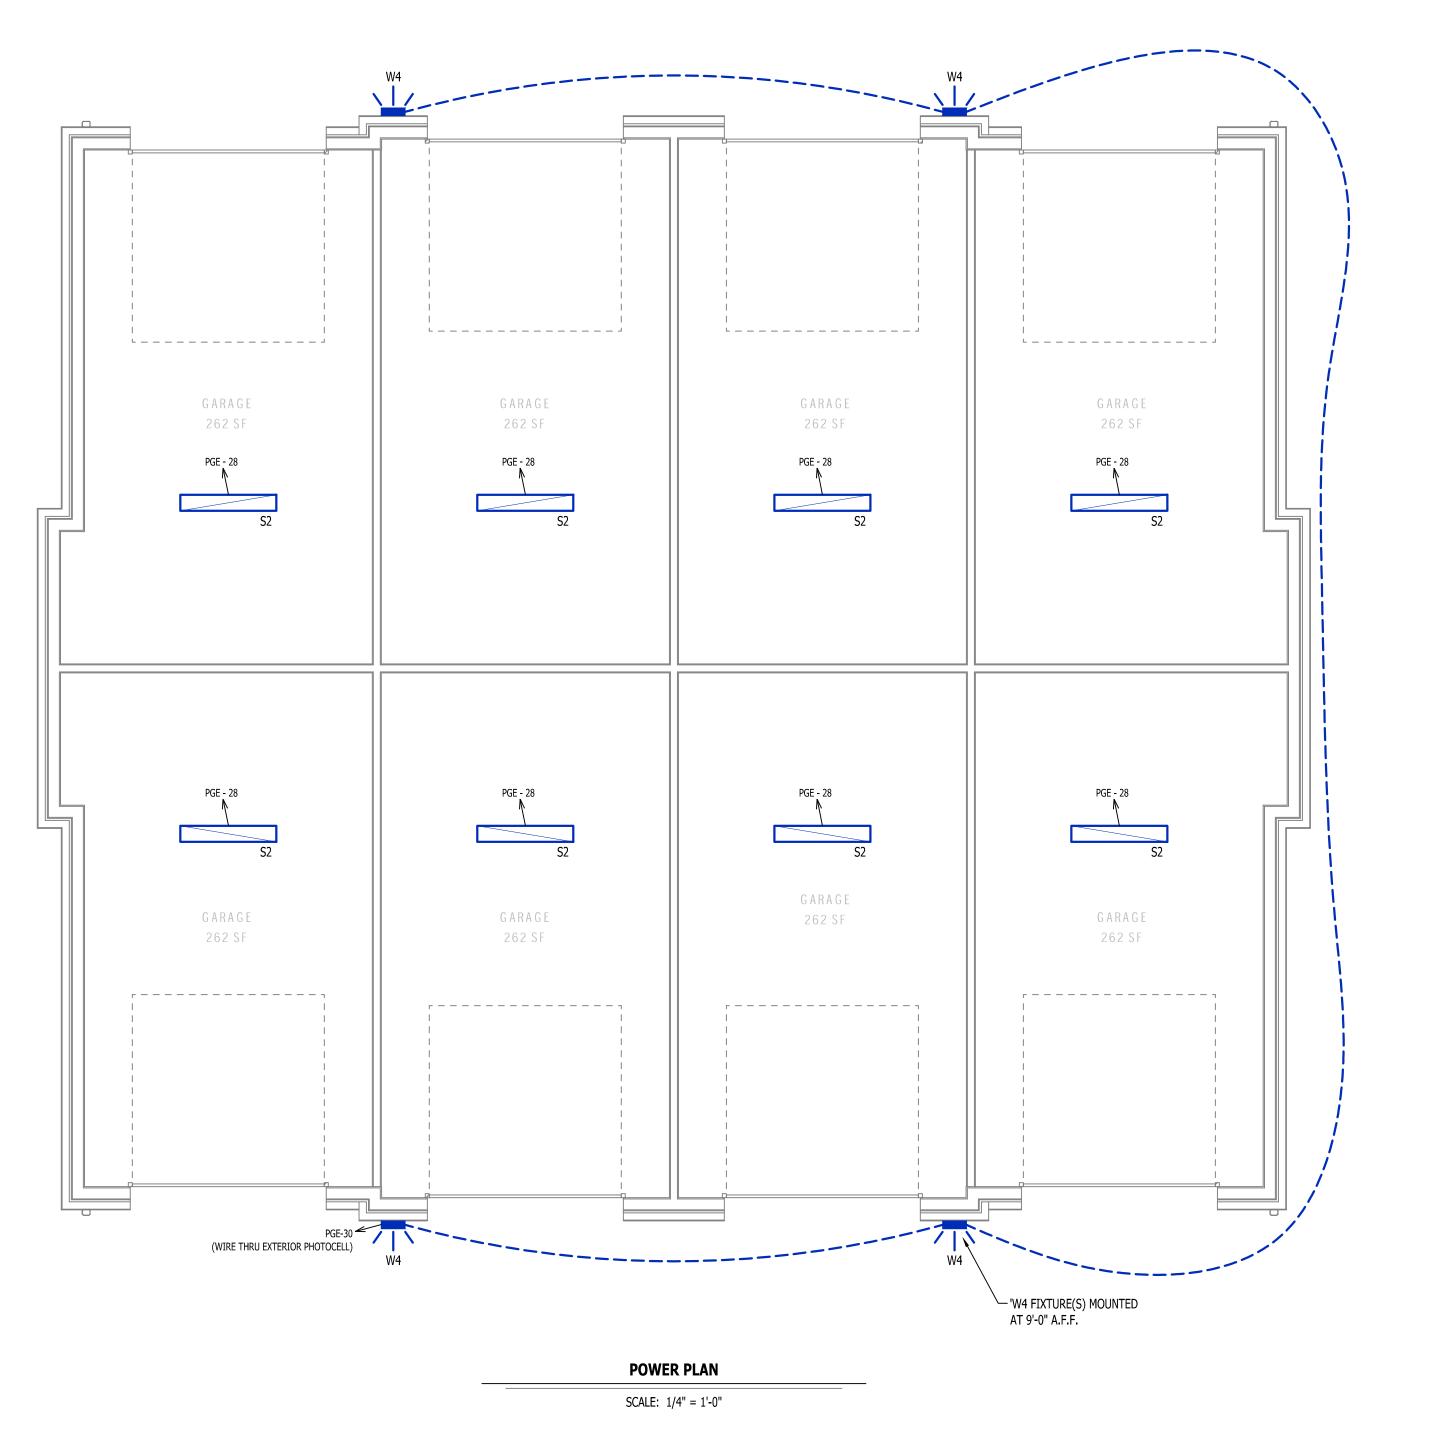

James Watson, P.E. April 15, 2025 PE-2015017071 MO Certificate of Authority # 2018029680



J-SQUARED **ENGINEERING**

2400 Bluff Creek Drive, Suite 101 Columbia, Missouri 65201 573.234.4492 www.j-squaredeng.com

J2 PROJECT No:	J21357
J2 DESIGN:	ACW
ISSUE TITLE	DATE

ISSUE TITLE	DATE
PERMIT SET	04 - 15 - 2025

Discovery

AHJ APPROVAL STAMP

LIGHTING PLAN

EL101