

September 16, 2022

Summit Homes
 120 SE 30th St.
 Lee's Summit, MO 64082

RE: Field Issue of rafters landing on blocks above top plate at covered porch for Lot #13 Cobey Creek – 537 SE Carter Rd. Lee's Summit, MO 64082 – Permit # PRRES20220859


Inspector Comments:
 Address rafters landing on blocks above top plate at covered porch.



Recommended modifications:

- **Attach rafter to top plate per IRC image shown below or with Simpson H2.5A hurricane ties per manufacturer's specs.**

6	Rafter or roof truss to plate	3-16d box nails (3 1/2" x 0.135"); or 3-10d common nails (3" x 0.148"); or 4-10d box (3" x 0.128"); or 4-3" x 0.131" nails	2 toe nails on one side and 1 toe nail on opposite side of each rafter or truss
---	-------------------------------	---	--

- **Install repair per image below:**

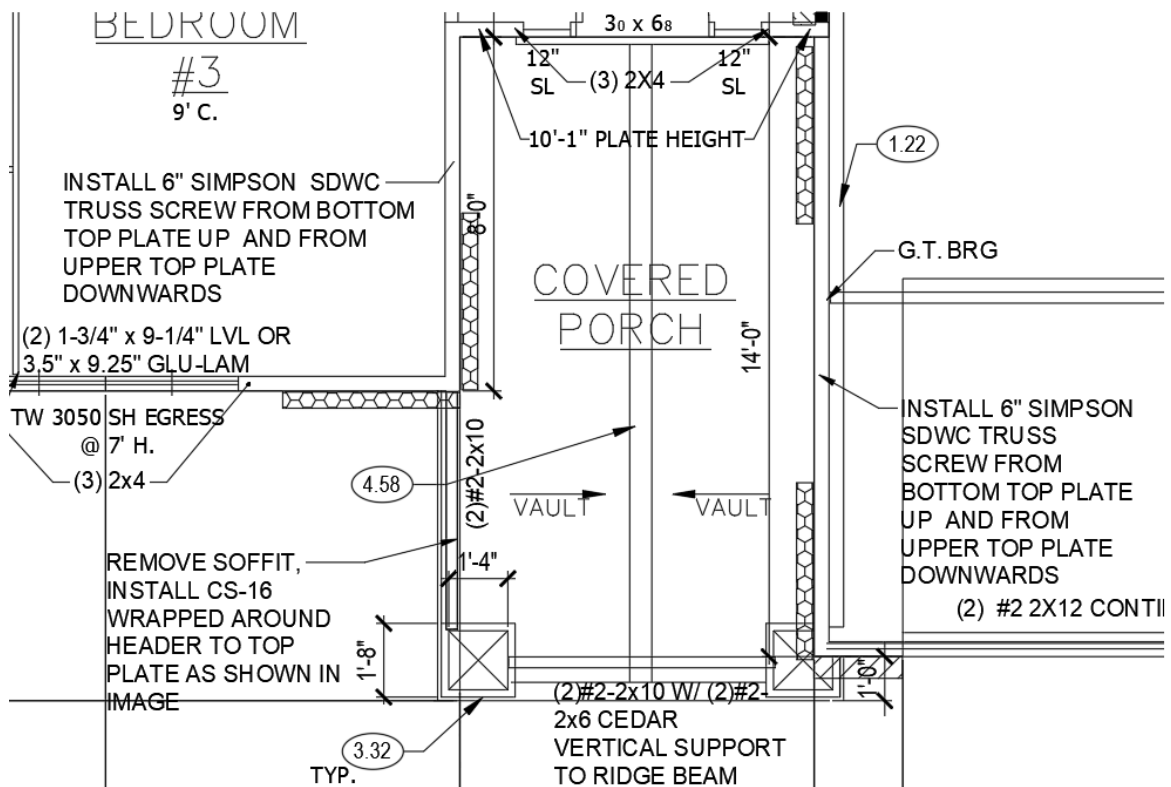

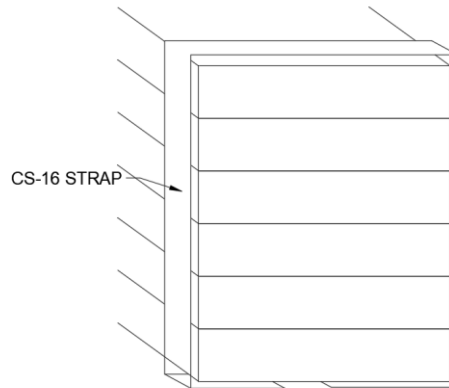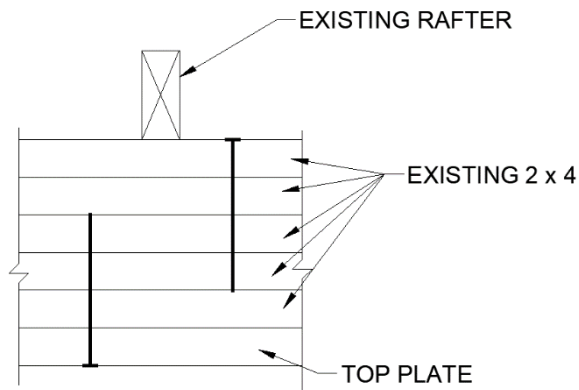

Model No.	Total L	Ca.	DF/SP		SPF/NF		Allowable Tension Loads (160)	Code Ref.
			Fasteners	End Length	Fasteners	End Length		
CMST12	40'	12	(74) 16d	33"	(84) 16d	38"	9,215	I4, L3, FL
			(86) 10d	39"	(98) 10d	44"	9,215	
CMST14	52'6"	14	(86) 16d	26"	(98) 16d	30"	6,490	
			(98) 10d	30"	(76) 10d	34"	6,490	
CMSTC16	54'	16	(50) 16d sinker	20"	(58) 16d sinker	25"	4,585	
CS14	100'	14	(26) 10d	15"	(30) 10d	16"	2,490	
			(30) 8d	16"	(36) 8d	19"	2,490	
CS16	150'	16	(20) 10d	11"	(22) 10d	13"	1,705	
			(22) 8d	13"	(26) 8d	14"	1,705	
CS18	200'	18	(16) 10d	9"	(18) 10d	11"	1,370	
			(18) 8d	11"	(22) 8d	12"	1,370	
CS20	250'	20	(12) 10d	6"	(14) 10d	9"	1,030	
			(14) 8d	9"	(16) 8d	9"	1,030	
CS22	300'	22	(10) 10d	7"	(12) 10d	7"	845	
			(12) 8d	7"	(14) 8d	8"	845	

1. Fastener quantities and end lengths are calculated using an increase for wind or seismic loading.
2. Use half of the required nails in each member being connected to achieve the listed loads.
3. Calculate the connector value for a reduced number of nails as follows:

$$\text{Allowable Load} = \frac{\text{No. of Nails Used}}{\text{No. of Nails in Table}} \times \text{Table Load}$$

Example: CMSTC16 in DF/SP with 40 nails total.
(Half of the nails in each member being connected)

$$\text{Allowable Load} = \frac{40 \text{ Nails (Used)}}{50 \text{ Nails (Table)}} \times 4,585 \text{ lb.} = 3,668 \text{ lb.}$$
4. Tension loads apply for uplift when installed vertically.
5. Nails: 16d = 0.162" dia. x 3 3/8" long, 10d = 0.148" dia. x 3 1/4" long, 8d = 0.131" dia. x 2" long. See pp. 26-27 for other nail sizes and information.



Sincerely,

Bradley Huxol, PE

