
NOTES:

- All signs, barricades and channelizing devices may be omitted when the work occupies an isolated shoulder location for less than one hour and it has little or no interference with traffic.
- An operation which moves between work spaces that are less than the decision sight distance along the shoulder should use a stationary or mobile shoulder closure.
- The ROAD WORK AHEAD sign may be omitted for short term daylight operations if:
 - a. the distance from curb face to the work space is at least 2 feet, or
 - b. the distance from the edge of the roadway to the work space is at least 15 feet
- and a vehicle displaying a 360-degree flashing beacon is operating.
- 4. This ROAD WORK AHEAD sign shall be installed on 2-lane, 2-way roads if traffic control devices are installed for a work space in the opposite shoulder.

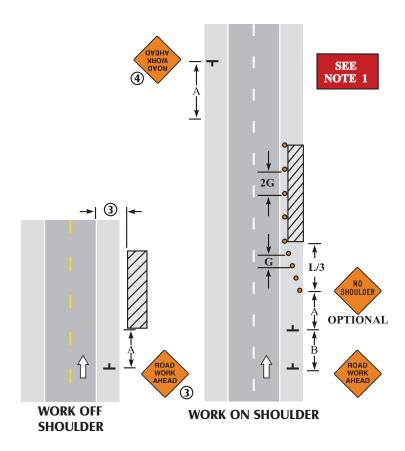

SHOULDER CLOSURE WORK ON OR NEAR SHOULDER