

Product data sheet


Characteristics

M800R

TYPE 3R 300 to 800A MOULDED CASE CIRCUIT BREAKER ENCLOSURE



Product availability: Stock - Normally stocked in distribution facility

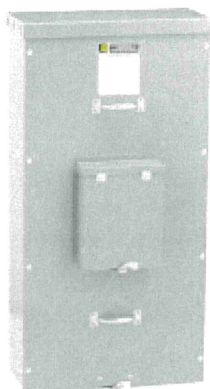

Main

Circuit breaker type	PJL MGL PKL MJL PLL PGL
Product destination	Circuit breaker M 2P Circuit breaker P 3P

Complementary

Enclosure Material	Steel
Width	21.00 In (533.4 mm)
Height	40.37 In (1025.52 mm)
Depth	9.75 In (247.65 mm)
Line Rated Current	300...800 A
Poles description	2P 3P

Environment

Product Certifications	CSA UL
------------------------	-----------

Environmental

NEMA Degree of Protection	NEMA 3R
NEMA degree of protection	NEMA 3R

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein. Prices are indicative






Ordering and shipping details

Category	00030-IND CB ENCL NEMA 1,3R
Discount Schedule	DE1
GTIN	785901658511
Nbr. of units in pkg.	1
Package weight(Lbs)	98.00 Lb(US) (44.45 kg)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	13.39 In (34 cm)
Package 1 width	22.40 In (56.9 cm)
Package 1 Length	41.81 In (106.2 cm)

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	 REACH Declaration
EU RoHS Directive	Compliant  EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	 Yes
China RoHS Regulation	 China RoHS Declaration
Environmental Disclosure	 Product Environmental Profile
PVC free	Yes
Halogen content performance	Halogen free plastic parts product

Contractual warranty

Warranty	18 months
----------	-----------

Product Life Status : Commercialised



PRODUCT-DETAILS

CSB 500-4

MULTI CABLEBLOCK 2WAY 500-4 4OUT



General Information

Extended Product Type	CSB 500-4
Product ID	7TAH006410R0041
EAN	0783786715008
Catalog Description	MULTI CABLEBLOCK 2WAY 500-4 4OUT
Long Description	Aluminum Multi-Tap Encapsulated Cable Blocks, Two-Way Configuration, Wire Range 500 kcmil-4 Str, Hex Size 3/8 Inch, Length 5.26 Inches, Width 3.0 Inches, Height 2.75 Inches, Outlets 4, Clear Insulation

Ordering

EAN	0783786715008
UPC	783786715008
Country of Origin	United States (US)
Customs Tariff Number	8536904000
Selling Unit of Measure	each

Container Information

Package Level 1 Units	10 piece
Package Level 1 Width	8 in 203 mm
Package Level 1 Height	7.5 in 191 mm
Package Level 1 Depth /	13 in

Length	330 mm
--------	--------

Additional Information

Brand / Label	Blackburn
Color	Clear
Effective Date	20080619
Material	Aluminum
Product Name	ELECTRICAL CONNECTOR,<1000V
Product Type	Above Ground Pedestal Connectors & Covers
Special Functions	Versatile design. Wide range of cable sizes and number of outlets available in one-way configurations.
Standards	UL E9809
Voltage Rating	600 V

Certificates and Declarations (Document Number)

Data Sheet, Technical Information	CSB 500-4
Instructions and Manuals	CSB 500-4

Classifications

UNSPSC	39121428
WEEE Category	Product Not in WEEE Scope
IDEA Granular Category Code (IGCC)	4600 >> Electrical taps

Categories

Low Voltage Products and Systems → Installation Products → Wire Management and Connectivity → Compression & Mechanical Connectors

