



SCALE: 1"=60'

Notes:

1. Erosion control devices shown are schematic in nature. Actual locations may change as portions of the Work are undertaken and completed.
2. MDNR Land Disturbance Permit #MOXXXXXXX.
3. In order to terminate a state operating permit, the Missouri Department of Natural Resources (MDNR) requires that the permittee submit a completed Form H (included with the approved permit) to the MDNR. A permit is eligible for termination when either perennial vegetation, pavement, buildings, or structures using permanent materials cover all areas that have been disturbed. Vegetative cover shall be at least 70% of fully established plant density over 100% of the disturbed area. A copy of Form H should be submitted to the City at which time the City will remove the project from its Inspection schedule.
4. Land disturbance sites should be inspected on a regular schedule and within a reasonable time period (not to exceed 48 hours) following heavy rains. Regularly scheduled inspections shall be at a minimum of once per week. Any deficiencies shall be noted in a weekly report of the inspection and corrected within seven calendar days of the report.
5. Contours reflect final mass grading. Temporary grading may be required for temporary berms, rock ditch checks, and sediment traps.
6. Remove temporary rock after vegetation is established on site.
7. Approximate acreage disturbed is 13.7 acres.
8. Compost/mulch berm (3\C505) can be substituted for sediment fences (1\C505).
9. Contractor shall provide temporary seed and straw in approximate limits where site has been disturbed and no work is to occur for a period of 2 weeks.
10. Site erosion & sediment control shall comply with APWA 2150 & 5100.
11. Erosion control devices shown on this sheet are existing devices that were installed by others. Contractor shall maintain existing erosion control devices throughout construction.

Legend

- x— Sediment Fence
- Diversions

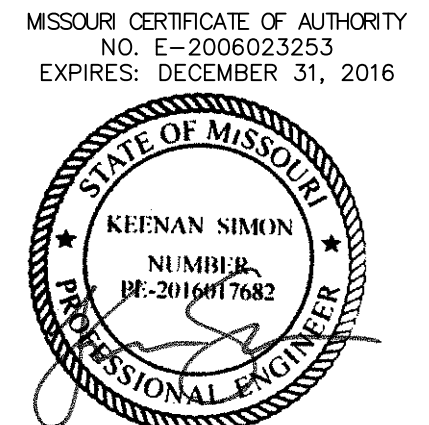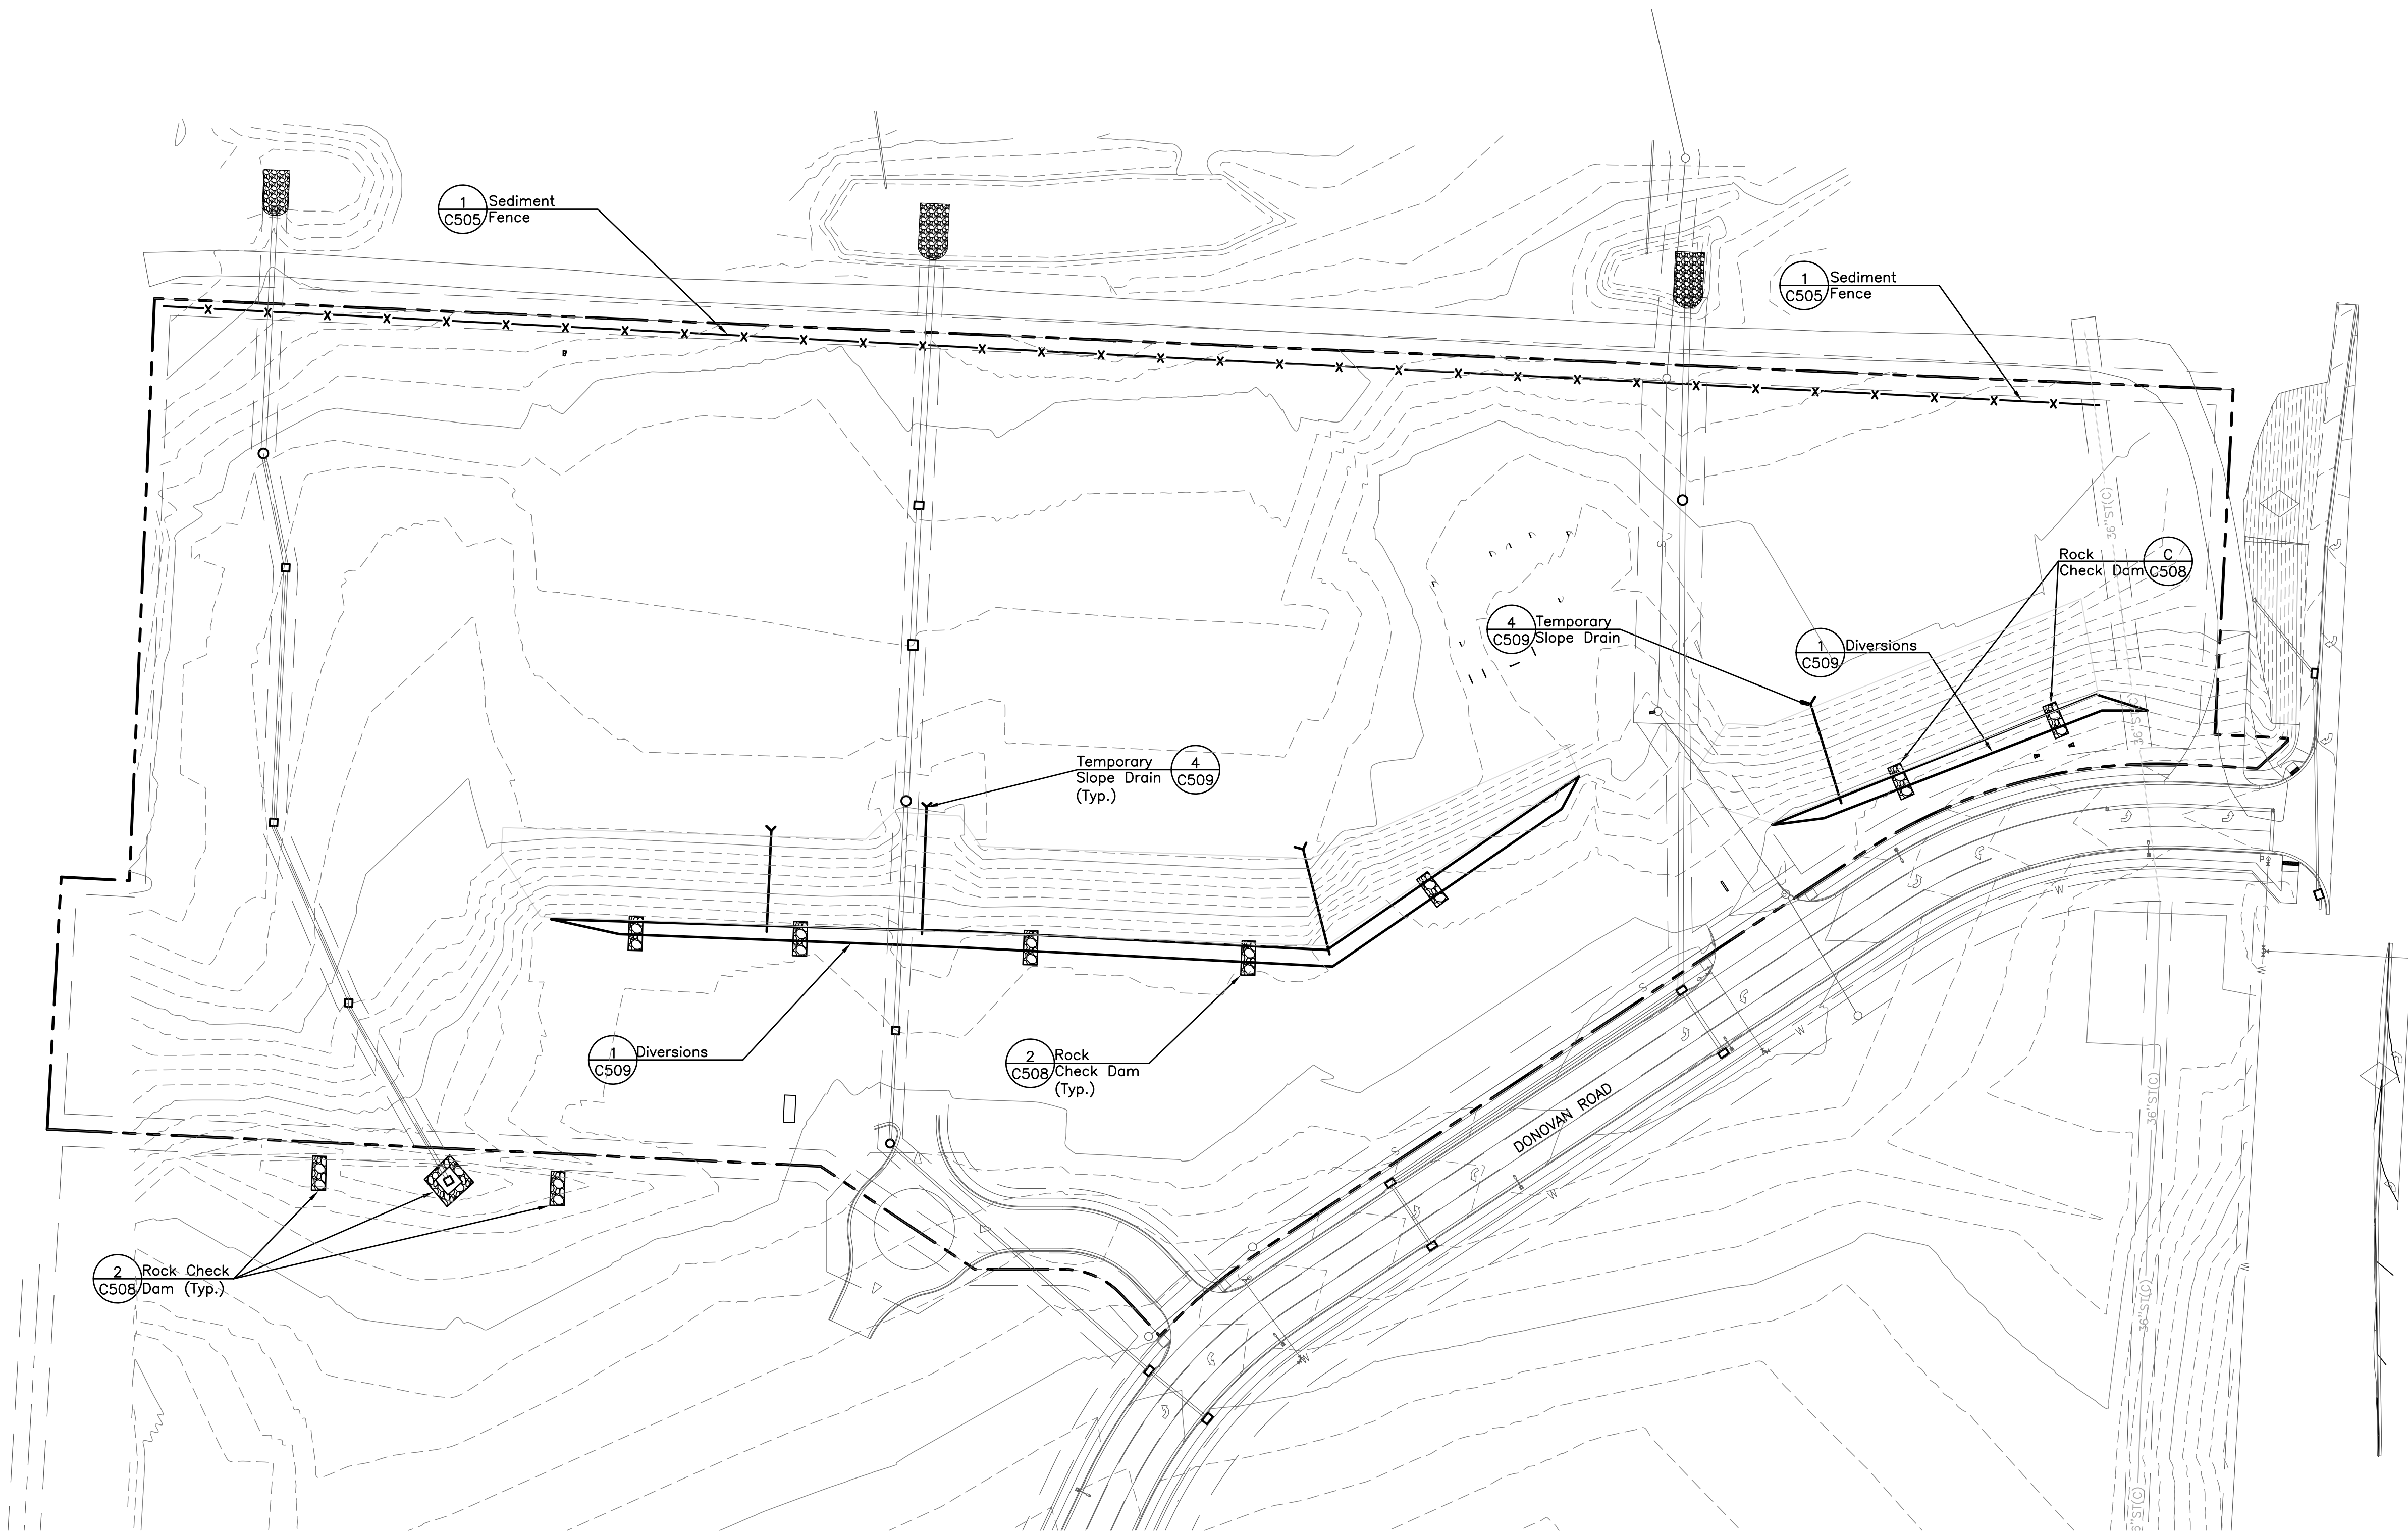

- 03.04.2016 - PDP SUBMITTAL
- 06.09.2016 - FDP SUBMITTAL
- 07.01.2016 - 80% PROGRESS SET
- 07.15.2016 - PERMIT SUBMITTAL
- 08.05.2016 - BID SET
- 09.15.2016 - BID SET

REVISIONS