


10-26-2017

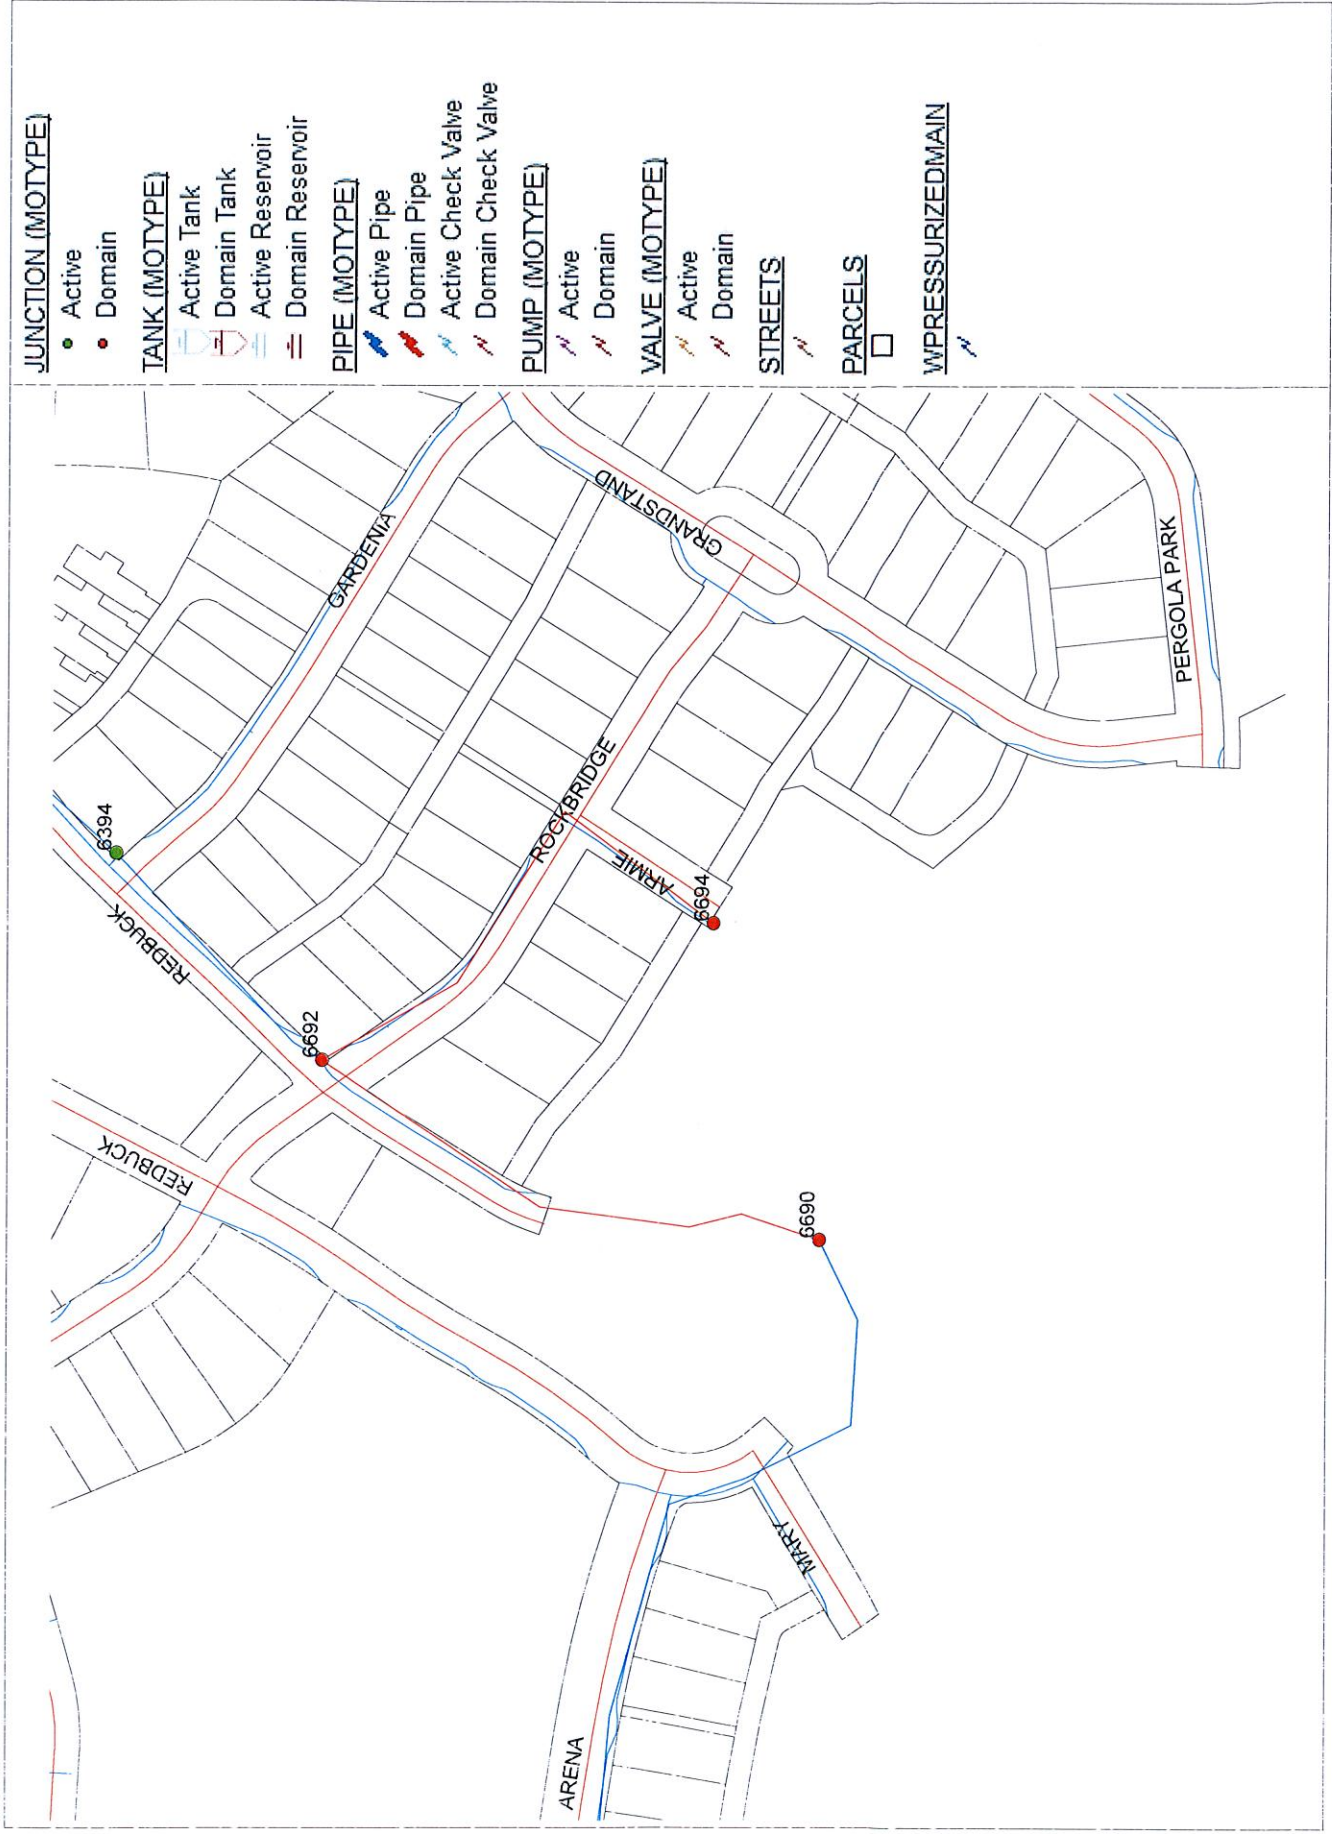

Post Pargola Park 4th

	ID	Total Demand (gpm)	Available Flow at Hydrant (gpm)	Critical Node ID	Critical Node Pressure (psi)	Critical Node Head (ft)	Design Flow (gpm)
1	☐ 6690	1,022.20	4,677.97	6690	20.00	996.16	4,677.77
2	☐ 6692	1,022.20	4,811.41	6692	20.00	996.16	4,811.29
3	☐ 6694	1,022.20	3,158.27	6694	20.00	991.16	3,158.27

	ID	Static Demand (gpm)	Static Pressure (psi)	Static Head (ft)	Fire-Flow Demand (gpm)	Residual Pressure (psi)	Available Flow at Hydrant (gpm)	Available Flow Pressure (psi)
1	☐ 6690	68.83	88.89	1,155.15	1,000.00	79.82	4,718.78	20.00
2	☐ 6692	0.00	88.93	1,155.25	1,000.00	80.07	4,787.89	20.00
3	☐ 6694	0.00	91.10	1,155.25	1,000.00	78.28	3,147.39	20.00