

Edward Jones

BRANCH REAL ESTATE

BRANCH OFFICE: 01643

**500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987**

PROJECT CONTACT INFORMATION

LEASING MANAGER
TATIANA ARIAS
p: 813.349.8358
e: tatiana.arias@cushwake.com

CONSTRUCTION MANAGER
HEATHER NORMAN
p: 314.396.2685
e: heather.norman@cushwake.com

BUILDING OWNER / PROPERTY MANAGER
PHYLLIS BRANSTETTER
p: 816.836.2600 | c: 816.564.7910
e: katwood.crm@gmail.com

FLOORING CONTACT:
INTERFACE SERVICES - MELANIE TAYLOR
<https://edwardjones.guides.interface.com/global-products-standards>
p: 770.975.4801 | e: EDWARDJONES@INTERFACE.COM

EDJ LOGO CONTACT:
METAL LOGOS - DEB GORAT
p: 402.339.3264 | e: DEB@METALLOGOS.COM

BRAND WALL REVEAL CONTACT:
FRY REGLET - DARIN BLASER
p: 1.800.237.9773 | e: DARINBLASER@FRYREGLET.COM

LIGHTING CONTACT:
VILLA LIGHTING - HEATHER WILKS
p: 314.633.0415 | e: HEATHER.WILKS@VILLALIGHTING.COM

GENERAL NOTES

- ALL ITEMS ARE TO BE COMPLETED PER EDWARD JONES SPECIFICATIONS UNLESS NOTED OTHERWISE.
- CONTRACTOR TO FIELD VERIFY ALL EXISTING CONDITIONS; IF THERE ARE ANY CHANGES, REVISIONS, OR DISCREPANCIES PLEASE CONTACT DESIGNER. *EXISTING AND NEW PARTITION DIMENSION MAXIMUM TOLERANCE IS 4" UNLESS NOTED AS HOLD.
- ALL REFERENCES TO "CODE" IN THIS DOCUMENT APPLY TO LOCAL, STATE, PROVINCIAL, NATIONAL, AND ALL OTHER APPLICABLE CODES.
- ALL CONSTRUCTION SHALL BE DONE IN ACCORDANCE WITH ALL LOCAL, STATE, PROVINCIAL, NATIONAL, AND ALL OTHER APPLICABLE BUILDING CODES.
- ALL NEW CONSTRUCTION AND MODIFICATIONS SHALL FULLY COMPLY WITH ADA AND BUILDING CODE ACCESSIBILITY REQUIREMENTS.
- CONTRACTOR TO CONTACT THE CITY TO DETERMINE IF ANY CHANGES ARE NEEDED TO COMPLY WITH ALL LOCAL, STATE, PROVINCIAL, AND/OR NATIONAL CODES, INCLUDING FIRE MARSHALL FOR SPRINKLER AND ALARM SYSTEMS. NOTIFY PROJECT MANAGER IF ANY DISCREPANCIES ARE FOUND OR REVISIONS ARE NEEDED.
- CONTRACTOR MUST SATISFY ALL LANDLORD REQUIREMENTS AND ALL WORK IDENTIFIED ON TENANT'S FINAL PUNCH LIST

TABLE OF CONTENTS

1	COVER SHEET
2	DEMO PLAN
3	PARTITION PLAN
4	FINISH PLAN
5	FURNITURE / EDJ EQUIPMENT PLAN
6	FINISH SPECIFICATIONS
7	FINISH SPECIFICATIONS
8	FINISH SPECIFICATIONS

LEGEND

E	EXISTING		DUPLEX RECEPTACLE
L	LANDLORD'S RESPONSIBILITY		QUADRUPLEX RECEPTACLE
---	DEMO PARTITION		DEDICATED SIMPLEX RECEPTACLE TO BE MARKED WITH "D" & ORANGE
—	EXIST. PARTITION	GFI	GFI DUPLEX RECEPTACLE
—	EXIST. DEMISING PARTITION		RECESSED DUPLEX RECEPTACLE
—	NEW PARTITION		ELECTRICAL PANEL
—	NEW PARTITION/ INSUL.		SINGLE GANG PHONE/ DATA BOX
—	NEW DEMISING PARTITION		DOUBLE GANG PHONE/ DATA BOX
—	HEADER	AV	SINGLE GANG BOX FOR AV CABLE PASS-THRU (AV CABLING TO BE PROVIDED BY FINANCIAL ADVISOR)
	EXISTING DOOR	\$	SWITCH
	NEW DOOR	\$ ³	3-WAY SWITCH
	WATER HEATER	T	THERMOSTAT LOCATION
	WATER COOLER (TO BE PROVIDED BY FINANCIAL ADVISOR)		FIRE EXTINGUISHER
	FURNACE		EXIT/EMERGENCY COMBO
			EXIT/EMERGENCY LIGHT

BUILDING INFORMATION

CONSTRUCTION TYPE: STEEL FRAMING / BRICK EXTERIOR
OF FLOORS: MULTI-STORY, EDJ ON LEVEL 1ST
FIRE PROTECTION: SPRINKLERED
OCCUPANCY USE GROUP: B-BUSINESS

CONSTRUCTION SCHEDULE: 7 DAYS, VARIES PER CONSTRUCTION TYPE

LOW VOLTAGE PERMIT REQ'D

PLAN NORTH VS TRUE NORTH

PLAN NORTH IS BASED ON THE PREDOMINANT AXIS OF THE BUILDING GEOMETRY. FOR THIS PROJECT, PLAN NORTH POINTS TOWARDS THE TOP OF THE DRAWING AREA. ALL VIEWS IN THIS DRAWING SET USE PLAN NORTH AS ITS ORIENTATION.

TRUE NORTH IS THE REAL-WORLD NORTH DIRECTION BASED ON SITE CONDITIONS. TRUE NORTH INFORMATION IS NOT USED OR PROVIDED FOR THESE DOCUMENTS.

EXTERIOR SIGN CIRCUIT INSTALLATION INSTRUCTIONS

GENERAL CONTRACTOR (GC) TO VERIFY EXISTENCE AND FUNCTIONALITY OF SIGN CIRCUIT ALONG SIGN BAND SERVING SUBJECT SPACE. EXISTING CIRCUIT MUST BE LOCATED IN/ON THE SIGN BAN ABOVE THE SUBJECT SPACE AND WITHIN SIX FEET (6') OF THE CENTERLINE OF THE SPACE. THE CIRCUIT SHOULD BE A DIRECT FEED FROM THE ELECTRICAL PANEL WITHIN THE TENANT SPACE AND BE FED THROUGH A PHOTOCELL. SHOULD THE CIRCUIT NOT EXIST AND/OR BE DEEMED NONFUNCTIONAL, GC TO PR... SIGN CIRCUIT, PHOTOCELL AND JUNCTION BOX TO BE M... THAN SIX FEET (6') FROM THE CENTERLINE OF THE SUBJECT SPACE. COST FOR INSTALLATION OF THE CIRCUIT, JUNCTION BOX AND PHOTOCELL TO BE INCLUDED IN THE BASE ELECTRICAL BID FOR THE PROJECT AS WELL AS FINAL CONNECTION OF SIGN BY ELECTRICIAN IF REQUIRED BY CODE. EXTERIOR SIGNAGE TO BE PROVIDED AND INSTALLED BY TENANT'S SIGN CONTRACTOR (UNDER A SEPARATE PERMIT) GENERAL CONTRACTOR TO COORDINATE ELECTRICAL REQUIREMENTS WITH SIGN VENDOR.

NOT AVAILABLE

ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY SHEETS, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987


Edward Jones
BRANCH REAL ESTATE

BRANCH OFFICE: 01643


DATE: 2023.04.05

EXHIBIT A
COVER SHEET

SQUARE FOOTAGE: 870 USF | 870 RSF

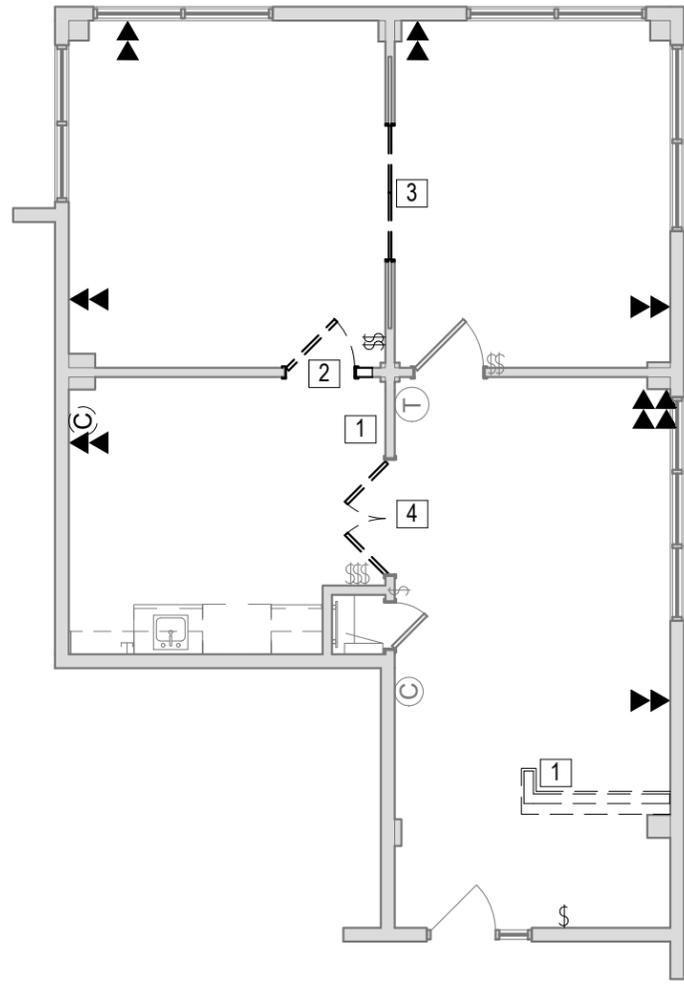

1 DEMOLITION PLAN
1/8" = 1'-0"



SITE SPECIFIC NOTES

SITE WORK

1. DEMO EXISTING OUTLETS OVER 18" A.F.F., UNLESS AT EXISTING, REMAINING COUNTERTOP.
2. DEMO ALL ABANDONED PIPING & VOICE/DATA WIRING.
3. REMOVE EXISTING FLOORING, WALL BASE, & FLOORING ADHESIVES IN THOUGHT THE SPACE. WOOD BASE TO BE SALVAGED FOR REUSE.
4. REMOVE EXISTING MILLWORK FROM PREVIOUS TENANT. PATCH AND REPAIR ADJACENT SURFACES.

DEMOLITION KEYED NOTES

1. REMOVE ALL EXISTING PARTITIONS/DOOR & CASEWORK THROUGHOUT TENANT SPACE, AS SHOWN. PATCH AND REPAIR TO ACCEPT NEW FINISHES.
2. FLIP DOOR SWING AS SHOWN ON PLAN TO ACHIEVE REQUIRED ADA CLEARANCES.
3. REMOVE EXISTING POCKET DOORS AND INFILL WITH NEW INSULATED PARTITION AS SHOWN ON PAGE 3.
4. REMOVE DOOR SWINGS AND HINGES. FINISH EXISTING CASED OPENING AS NEEDED.

ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

****DO NOT SCALE DRAWINGS****


****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY SHEETS, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

SQUARE FOOTAGE: 870 USF | 870 RSF

Edward Jones
BRANCH REAL ESTATE
BRANCH OFFICE: 01643
DATE: 2023.04.05

EXHIBIT A
DEMO PLAN

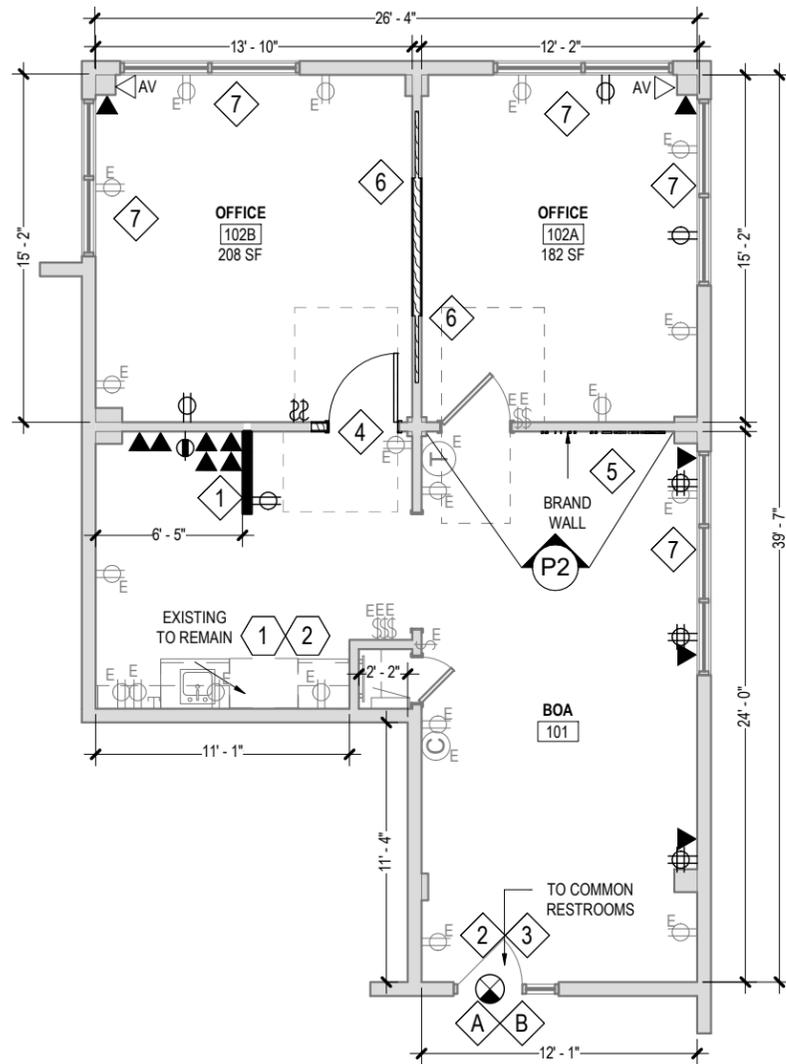

1 PARTITION PLAN
1/8" = 1'-0"

****BRANCH TO BE LOW-VOLTAGE PREWIRED**
REFER TO SPEC SHEET 8 FOR MORE DETAIL**



LANDLORD SCOPE OF WORK (X)

FOR REFERENCE IN LEASE AGREEMENT (- NOT TO BE INCLUDED IN GC'S SCOPE)

LANDLORD TO COMPLETE ALL INDICATED SCOPE OF WORK PRIOR TO DELIVERY OF SPACE OR ACCORDING TO LEASE TERMS. LANDLORD TO ENSURE ALL COMPLETED WORK IS DONE TO MEET ADA AND BUILDING CODE REQUIREMENTS.

- A. MODIFY EXISTING COMMON AREA RESTROOM TO MEET ALL ADA AND BUILDING CODE STANDARDS FOR ACCESSIBILITY. MODIFICATIONS INCLUDE, BUT ARE NOT LIMITED TO:
- REPLACE GRAB BARS IN BOTH BATHROOMS TO BE 36" LONG GRAB BAR. SEE PAGE 6 FOR DETAILS
 - GRAP BAR TO EXTEND AT LEAST 12" FROM THE CENTERLINE OF THE TOILET TO THE WALL AND AT LEAST 24" IN THE OTHER DIRECTION IN BOTH BATHROOMS. SEE PAGE 6 FOR DETAILS
 - REPLACE GRAB BARS TO BE 42" LONG IN BOTH BATHROOMS. SEE PAGE 6 FOR DETAILS
 - RELOCATE DISPENSER TO BE NO MORE THAN 42" AWAY FROM THE REAR WALL. SEE PAGE 6 FOR DETAILS
 - REPLACE REFLECTING SURFACE IN BOTH BATHROOMS. SEE PAGE 6 FOR DETAILS.
- B. MODIFY EXISTING CURB RAMP TO MEET CODE REQUIREMENTS. MODIFICATIONS INCLUDE, BUT ARE NOT LIMITED TO:
- MODIFYING CURB RAMP RUNS TO NOT EXCEED 1:12 (4.76 DEGREES) SLOPE (CURRENTLY AT 7 DEGREES AND 3.8 DEGREES). SIDE FLARES NOT TO EXCEED 1:10 (6 DEGREES) SLOPE.
 - MODIFYING CURB RAMP CROSS SLOPE TO BE 1:48 (1.19 DEGREES OR LESS)
 - MODIFYING BOTTOM LANDING OF RAMP TO (BE MINIMUM SIZE AND) NOT EXCEED 1:48 (1.19 DEGREES) SLOPE IN ALL DIRECTIONS (LOWER LANDING SLOPE CURRENTLY AT 2.7 DEGREES AND .2 DEGREES).
 - MODIFYING CURB RAMP TO HAVE AN UPPER LANDING OF 48"X48" WITH A SLOPE OF 1:48 (1.19 DEGREES OR LESS) SLOPE CURRENTLY TERMINATES TO LANDSCAPING. NO UPPER LANDING PRESENT.

PARTITION KEYED NOTES (X)

- PHONE COMPANY SERVICE TO BE INSTALLED AT BOC LOCATION PER DETAIL ON SHEET 8 OF 8 AND PER SPECIFICATIONS ON 1ST DAY OF CONSTRUCTION. **EMAIL PHOTO TO CONSTRUCTION MANAGER TO CONFIRM WORK ASAP.**
- INSTALL DOOR CHIME AT ENTRY DOOR. CHIME TO BE LOCATED IN 101. HEATH ZENITH WIRELESS DOOR ALERT WITH WHITE COVER & HORIZONTAL LINES - HOME DEPOT MODEL #SL- 7368-02 OR COMPARABLE ALTERNATIVE.
- IF LOCAL CODE WILL NOT ALLOW FOR THUMB-TURN LOCKSET AT ENTRY DOOR, **NOTIFY DESIGNER IMMEDIATELY** WITH ALTERNATIVE OPTIONS FOR LOCKSETS WITH INTERIOR LOCKING MECHANISMS.
- INSTALL NEW 3'-0" SOLID CORE WOOD DOOR AS SHOWN TO MATCH EXISTING. REFER TO SHEET 4 FOR FINISH SPECS.
- PROVIDE AND INSTALL KEYLESS ENTRY WITH BUZZER AT BOA DESK LOCATION AT ENTRY DOOR; ALL REQUIRED ELECTRICAL TO BE INCLUDED.
- ALIGN NEW PARTITION WITH EXISTING AS SHOWN ON PLAN. PATCH/REPAIR AND PREP FOR NEW FINISHES.
- ENSURE WINDOW AND TRIM ARE CLEAN & IN LIKE NEW CONDITION; TOUCH UP WITH WHITE PAINT AS NEEDED.

ALTERNATE KEYED NOTES (X)

- NON-STANDARD KITCHENETTE ALTERNATE: CONTRACTOR TO PROVIDE SEPARATE, BROKEN-OUT COST TO INSTALL 11'-10" LF OF BASE & UPPER CABINETS, COUNTERTOP, AND STAINLESS STEEL SINK & FAUCET. BASE CABINET TO HAVE LEAVE-OUT FOR UNDERCOUNTER REF. BROKEN-OUT COST TO INCLUDE (1) DUPLEX OUTLET AT 18" AFF FOR UNDERCOUNTER REF, (1) GFI OUTLET AT 42" AFF, AND ALL PLUMBING AS NEEDED FOR FIXTURES SHOWN INCLUDING HOOKUP TO EXISTING HOT WATER HEATER OR INSTALL OF NEW INSTA-HOT. REFER TO SHEET 8 FOR STANDARD SPECIFICATIONS AND BASIS OF DESIGN FOR PRICING. CONTACT FA FOR FINAL DESIGN & MATERIAL SELECTIONS - FAS | P: #816.333.4318.
- MODIFYING EXISTING KITCHENETTE ALTERNATE: CONTRACTOR TO PROVIDE SEPARATE, BROKEN-OUT COST TO MODIFY THE EXISTING KITCHENETTE ADA CODE REQUIREMENTS. MODIFICATIONS INCLUDE, BUT ARE NOT LIMITED TO:
 - ENSURE HEIGHT DOES NOT EXCEED 34" IN HEIGHT (CURRENTLY AT 36") AND IS NO LOWER THAN 28"
 - ENSURE ALL KNEE CLEARANCE REQUIREMENTS ARE MET.

SITE SPECIFIC SCOPE NOTES

GENERAL CONDITIONS

- SPACE TO BE DELIVERED IN AS-IS CONDITION.
- ALL ITEMS TO BE COMPLETED PER EDWARD JONES SPECIFICATIONS (**SEE SHEETS 6-8**) UNLESS OTHERWISE NOTED IN SITE SPECIFIC OR KEYED NOTES ON SHEETS 1-5, OR REQUIRED BUILDING STANDARD APPLIES.
- CONTRACTOR TO FIELD VERIFY ALL DIMENSIONS & WINDOW MULLION PLACEMENT PRIOR TO CONSTRUCTION; IF UNABLE TO VERIFY DIMENSIONS OR IF A DISCREPANCY OCCURS, NOTIFY DESIGNER IMMEDIATELY.
- VERIFY LOCATION OF ALL EXISTING DEMISING PARTITIONS. VERIFY THEY EXTEND TO THE DECK & ARE INSULATED; EXTEND & ADD INSULATION AS REQUIRED.

DEMOLITION

- REFERENCE SHEET 2 FOR ALL DEMOLITION RELATED SCOPE OF WORK.
- EXISTING BLINDS TO REMAIN; PROTECT DURING CONSTRUCTION AND CLEAN TO LIKE-NEW CONDITION PRIOR TO DELIVERY OF SPACE.

CONCRETE

- ENSURE ALL FLOORING SURFACES ARE CLEAN, DRY, SMOOTH, & LEVEL WITHIN 3/16" PER EVERY 10 FEET; READY TO ACCEPT NEW FINISHES PER FINISH SCHEDULE.

THERMAL & MOISTURE PROTECTION

- INSTALL 4FT LAY-IN BATT INSULATION ABOVE DROPPED CEILING AT ROOMS THROUGHOUT SPACE.
- GC REQUIRED TO COMPLETE MOISTURE TEST. IF MOISTURE READING IS ABOVE 95, NOTIFY INTERFACE FLOORING IMMEDIATELY.

DOORS / WINDOWS

- EXISTING DOORS TO REMAIN AS SHOWN. INSTALL NEW 3'-0" SOLID CORE DOORS AS SHOWN ON PLAN AND IN KEYED NOTES. SEE FINISH SCHEDULE ON SHEET 4 FOR SPECS.
- INSTALL NEW LEVER-STYLE HARDWARE ON ALL DOORS THROUGHOUT THE SPACE; TO MEET ALL ACCESSIBILITY CODES. FINISH TO BE BRUSHED NICKEL OR MATCH TO EXISTING FINISH. INSTALL LEVER-STYLE HARDWARE ON DOOR TO 102A AND 102B; MATCH TO EXISTING STYLE AND FINISH.

CEILING / PARTITIONS / FINISHES

- EXISTING CEILING TO REMAIN WHERE POSSIBLE; PATCH / REPAIR / REWORK GRID AS REQUIRED FOR NEW PARTITION LAYOUT AND TO ENSURE CONSISTENT GRID THROUGHOUT SPACE.
- PATCH/REPAIR & PREP EXISTING PARTITIONS AS REQUIRED FOR NEW FINISHES. ENSURE ALL PARTITIONS ARE SIMILAR IN TEXTURE, LAMINATE OR SKIMCOAT WALLS AS NEEDED FOR CONSISTENT FINISH.
- INSTALL NEW FLOORING AND PAINT PER FINISH SCHEDULE ON SHEET 4. REFER TO FINISH PLAN FOR FLOOR PATTERN INSTALL DIRECTION.
- REINSTALL EXISTING WOOD BASE AND CROWN MOLDING. PROVIDE NEW TO MATCH WHERE NEEDED. SEE FINISH SCHEDULE ON SHEET 4 FOR SPECS.
- REINSTALL EXISTING EDWARD JONES METAL LOGO AFTER PAINT, AS SHOWN ON SHEET 4.

MECHANICAL

- RELOCATE SUPPLY & RETURN GRILLES, INCLUDING DUCTWORK, AS REQUIRED FOR COMPLETE & BALANCED WORKING SYSTEM AND TO ACHIEVE ONE SUPPLY & ONE RETURN AT MINIMUM IN EACH ROOM.
- CLEAN & CHECK EXISTING HVAC UNIT AND SUPPLY/RETURN GRILLES THROUGHOUT. REPLACE ANY DISCOLORED OR NON-WHITE GRILLES WITH NEW WHITE GRILLES THROUGHOUT.
- MODIFY EXISTING SPRINKLER SYSTEM AND FIRE ALARMS AS REQUIRED BY LOCAL CODES.
- PROVIDE AND INSTALL FIRE EXTINGUISHER IN BRANCH AS REQUIRED BY LOCAL CODES.

ELECTRICAL

- VERIFY EXISTING ELECTRICAL PANEL MEETS EDJ SPECIFICATIONS; UPGRADE OR ADD SUB-PANEL AS REQUIRED.
- NEW SWITCHES, OUTLETS, AND FACE PLATES TO BE WHITE.
- EXISTING LIGHTING TO REMAIN THROUGHOUT. IF EXISTING LIGHTING IS T12 UTILIZE BALLAST BYPASS LED LAMPS. RELOCATE EXISTING AND PROVIDE/INSTALL NEW TO MATCH AS NEEDED TO ACCOMMODATE TO NEW PARTITION LAYOUT: ONE FIXTURE PER EVERY 75 USABLE SF, SO AS TO ACCOMMODATE MINIMUM 50 FOOTCANDLES AT DESK LOCATIONS. CLEAN EXISTING LIGHTING LENSES AS NEEDED THROUGHOUT; REPLACE BULBS AS NEEDED.
- (2) NIGHT LIGHTS TO BE HARDWIRED AT 101.
- INSTALL COMMERCIAL WALL WASH LIGHT FIXTURE TO ILLUMINATE INTERIOR LOGO AS PER KEYNOTE P2 ON SHEET 4; TO BE SEPARATELY SWITCHED.

ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY SHEETS, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

Edward Jones
BRANCH REAL ESTATE


BRANCH OFFICE: 01643

DATE: 2023.04.05

SQUARE FOOTAGE: 870 USF | 870 RSF

EXHIBIT A
PARTITION PLAN

SHEET **3** of 8

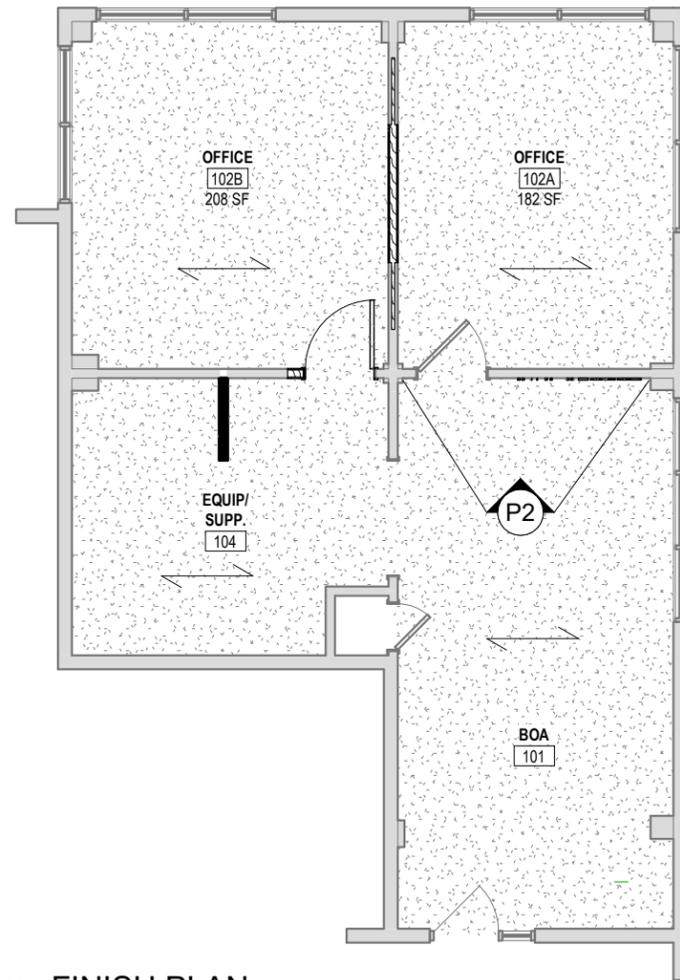

1 FINISH PLAN
1/8" = 1'-0"



FINISH KEYED NOTES



- WALL TO BE PAINTED WITH ACCENT COLOR P2, AND EDJ LOGO INSTALLED.
1. PROVIDE & INSTALL COMMERCIAL LED WALL WASH (SEE SPECIFICATIONS SHEET 7).
 2. EXISTING LOGO TO BE REINSTALLED AFTER PAINTING (SEE SPECIFICATIONS SHEET 8 FOR INSTALL INSTRUCTIONS ONLY).

ROOM FINISH SCHEDULE


RM. NO.	PAINT	ACCENT	FLOORING	BASE	DOOR PANEL	DOOR FRAME	CEILING	NOTES
101	P1	P2	CPT3	EXIST	EXIST	EXIST	EXIST	SEE NOTE "P2"
102A	P1		CPT3	EXIST	EXIST	EXIST	EXIST	
102B	P1		CPT3	EXIST	MATCH	MATCH	EXIST	
104	P1		CPT3	MATCH		EXIST	EXIST	
106	P1		CPT3	EXIST	EXIST	EXIST	EXIST	

FINISH KEY

EXIST = EXISTING FINISH TO REMAIN
 MATCH = NEW FINISH TO MATCH EXISTING
 BLDG STND = BUILDING STANDARD APPLIES
 RELO = RELOCATED

- CARPET TILE
- LUXURY VINYL TILE
- EXISTING TO REMAIN
- MATCH EXISTING
- NOT IN CONTRACT
- FLOOR PATTERN DIRECTION SYMBOL *SEE PLAN

SIGNAGE ELEVATION

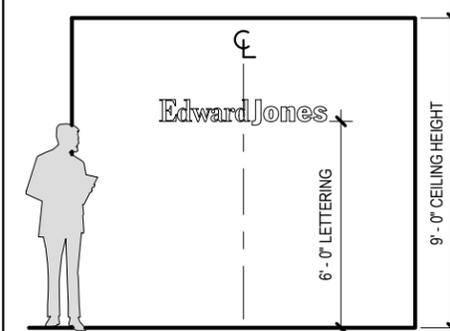

REFER TO KEYED NOTE ABOVE

**LOGO TO BE CENTERED ON WALL, U.N.O.

FINISH SPECIFICATIONS | SECURE PALETTE

WALLS

- P1** GENERAL WALL PAINT
MFR: SHERWIN WILLIAMS
COLOR: SW 7005 PURE WHITE
- P2** BRAND WALL PAINT
MFR: SHERWIN WILLIAMS
COLOR: SW 7075 WEB GRAY

WALL BASE

- EX-WD** EXISTING WOOD BASE
TO REMAIN, TO BE RE-PAINTED
COLOR: PAINTED SW7006
- MATCH** MATCH WOOD BASE
STYLE: TO MATCH EXISTING,
TO BE RE-PAINTED
COLOR: SW 7006 EXTRA WHITE

DOOR FRAMES

- EXIST** EXISTING TO REMAIN
- MATCH** MATCH FRAMES
TYPE: TO MATCH EXISTING

GENERAL NOTES:

- INSTALL SCHLUTER TRANSITION STRIPS BETWEEN DISSIMILAR FLOORS.
- REFER TO SPEC SHEETS FOR MORE INFO ON WALL AND FLOORING SPECS

FLOORING

- CPT3** GENERAL CARPET TILE
MFR: INTERFACE
STYLE: EJ BOUCLE
COLOR: 189213
SIZE: 25CM X 1M
INSTALL: ASHLAR
- LVT1** LUXURY VINYL TILE
MFR: INTERFACE
STYLE: STUDIO SET
COLOR: A00704 ESPRESSO
SIZE: 25CM X 1M
INSTALL: RANDOM STAGGERED

DOOR PANELS

- EX-D1** EXISTING TO REMAIN,
TO BE RE-PAINTED
COLOR: SW 7006 EXTRA WHITE
- MATCH** MATCH EXISTING DOOR
TYPE: TO MATCH EXISTING STYLE,
TO BE RE-PAINTED
COLOR: PAINTED SW7006

ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

****DO NOT SCALE DRAWINGS****

**CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY SHEETS, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987


Edward Jones
BRANCH REAL ESTATE

BRANCH OFFICE: 01643

DATE: 2023.04.05

SQUARE FOOTAGE: 870 USF | 870 RSF

EXHIBIT A
FINISH PLAN

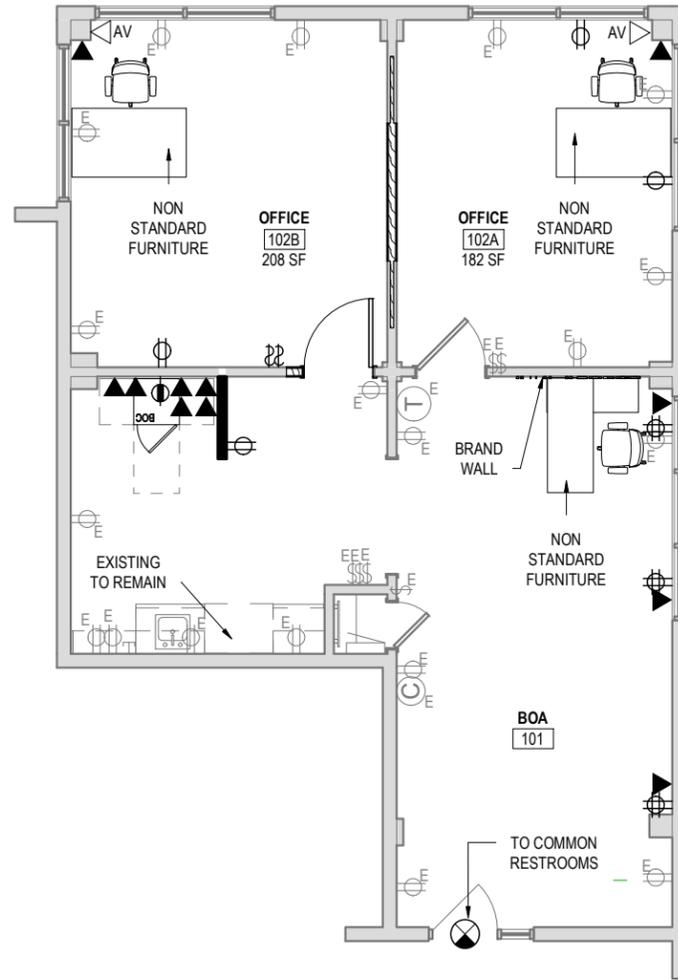

① FURNITURE / EDJ EQUIP. PLAN
1/8" = 1'-0"




EQUIPMENT LEGEND AND DETAILS

****EQUIPMENT SUPPLIED & INSTALLED BY EDWARD JONES**

- LASER PRINTER
- COPIER/FAX/SCANNER
- BOC (BRANCH OFFICE CONTROLLER)
PHONE SYSTEM

TYPICAL TV MOUNT DETAIL

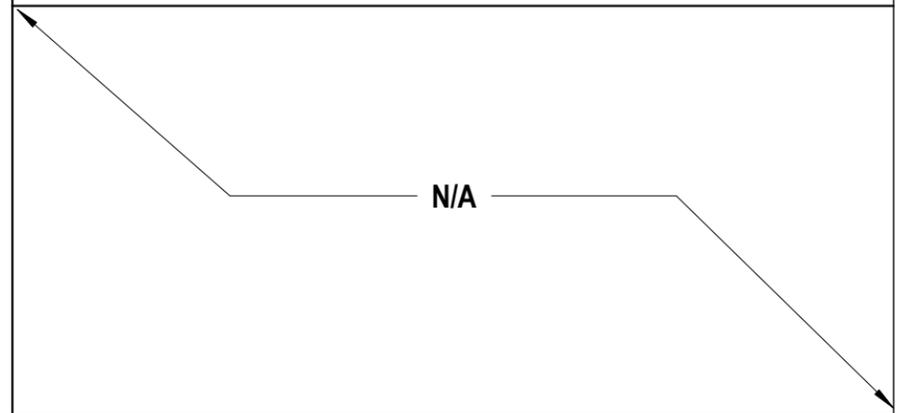

STANDARD FURNITURE

GENERAL NOTES

1. REFER TO PLAN FOR EXACT CONFIGURATION AND HANDEDNESS OF FURNITURE TO BE PROVIDED. HANDEDNESS CANNOT BE INTERCHANGED ONCE ORDER IS PLACED. CONFIRM HANDEDNESS WITH DESIGNER PRIOR TO ORDER.
2. EXACT ORDER TO BE VERIFIED WITH DESIGNER PRIOR TO PURCHASE.
3. ONCE ORDER IS PLACED, ANY CHANGES WILL RESULT IN ADDITIONAL CHARGES.
4. REFER TO PLAN FOR EXACT LOCATION OF WALL-MOUNTED ACCESSORIES, REFER TO ACCESSORY TAGS (X)
5. REFER TO MANUFACTURER SPECS FOR WALL-MOUNTED ACCESSORY HEIGHTS

FURNITURE SCHEDULE

DESCRIPTION	QUANTITY	ORDER?	MOVE?
CHAIRS			
Zonal Task Chair	3	0	



ISSUES / REVISIONS

NO.	DATE	DESCRIPTION

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY SHEETS, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

Edward Jones
BRANCH REAL ESTATE
BRANCH OFFICE: 01643

DATE: 2023.04.05

SQUARE FOOTAGE: 870 USF | 870 RSF

EXHIBIT A
FURNITURE / EDJ
EQUIPMENT PLAN

SHEET **5** of 8

EDWARD JONES GENERAL BUILDING AND FINISH SPECIFICATIONS

GENERAL NOTES

- THE FOLLOWING INFORMATION IS PROVIDED AS A GENERAL GUIDE. IN ALL CASES, IT IS PREFERRED THAT THE BUILDING STANDARD BE USED; OTHERWISE, USE THE INFORMATION PROVIDED BELOW AND ON THE DESIGN INTENT DRAWINGS, OFTEN REFERRED TO AS EXHIBIT A. IT IS THE INTENT THAT THESE MODIFICATIONS/ADDITIONS/IMPROVEMENTS WILL BE PERFORMED ON AN "AS NEEDED" BASIS, AT THE REASONABLE DISCRETION OF EDWARD D. JONES & CO., L.P. D/B/A EDWARD JONES, HEREIN AFTER REFERRED TO AS EDWARD JONES OR TENANT.
- ANY DISCREPANCIES ON SHEETS 1-5 TO BE BROUGHT TO DESIGNERS ATTENTION IMMEDIATELY.
- ALL WORK SHOULD BE PERFORMED BY G.C. (GENERAL CONTRACTOR) PER CITY, STATE, PROVINCIAL, AND NATIONAL CODES (ALL REFERENCES TO "CODE" IN THIS DOCUMENT TO APPLY TO CITY, STATE, PROVINCIAL, AND/OR NATIONAL CODES AS APPLICABLE). ALL CONSTRUCTION WILL BE COMPLETED SO THAT AN OCCUPANCY PERMIT (OBTAINED BY THE G.C.) WILL BE GRANTED PRIOR TO LEASE COMMENCEMENT.
- ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE LATEST ISSUED EDITION OF THE EDWARD JONES APPROVED EXHIBIT A INCLUDED WITH THE CONTRACT FOR SERVICES AT TIME OF BID AWARD.
- EXHIBIT A IS INTENDED FOR DESIGN INTENT ONLY AND IS NOT AN OFFICIAL CONSTRUCTION DOCUMENT. GENERAL CONTRACTOR (GC) TO OBTAIN ALL NECESSARY PERMIT DRAWINGS AS REQUIRED PER CODE; COST TO BE INCLUDED IN BID IF REQUIRED TO OBTAIN PERMITS.
- GENERAL CONTRACTOR MUST PROVIDE ALL SUBCONTRACTORS ALL 8 SHEETS AT TIME OF BID AND/OR PRIOR TO ANY CONSTRUCTION.
- ALL EXISTING ITEMS TO REMAIN IN BRANCH (AS SHOWN ON PLANS) MUST BE IN GOOD WORKING ORDER AND CONDITION, AND FREE OF MAJOR DEFECTS.
- EDWARD JONES' INSTALLERS MUST BE NOTIFIED OF ANY CHANGES IN PLACEMENT OF EQUIPMENT, PHONES, OUTLETS, OR FURNITURE. EDWARD JONES HAS AN ESTABLISHED RELATIONSHIP WITH NATIONAL VENDORS FOR FLOORING, PAINT, SIGNAGE, AND LOW VOLTAGE WIRING.
- FURNITURE, EQUIPMENT, BOTTLED WATER COOLER (IF REQUIRED BY CODE), PHONE AND DATA WIRING & ALL TERMINATIONS TO BE PROVIDED BY THE TENANT.
- THE SPACE SHOULD BE CLEANED AFTER CONSTRUCTION.
- WARRANTY DOCUMENTS SHALL BE PROVIDED TO THE BRANCH REAL ESTATE ONCE CONSTRUCTION IS COMPLETE.
- UPON PROJECT COMPLETION, CLOSE OUT DOCUMENTS TO BE SUBMITTED WITH FINAL INVOICE INCLUDE: CONSTRUCTION DOCUMENTS, APPROVED CHANGE ORDERS, CERTIFICATE OF OCCUPANCY, LIEN WAIVER, FINAL PHOTOS OF SPACE, COMPLETED PUNCH LIST WITH ALL OUTSTANDING ITEMS COMPLETED, AND AN AIR BALANCE REPORT.

INTERIOR CONSTRUCTION SPECIFICATIONS

- DEMOLITION**
 - DEMOLISH AND REMOVE FROM THE SITE ALL DEBRIS FROM THE AREAS AS SHOWN ON EXHIBIT A. LEAVE SPACE FREE OF ALL CONSTRUCTION DEBRIS.
 - REMOVE EXISTING FINISHES ONLY IN AREAS THAT ARE TO RECEIVE NEW FINISHES PER THE FINISH SCHEDULE SHOWN ON SHEET 4. ROOMS LISTED "NIC" OR "EXIST" SHALL REMAIN AS-IS UNLESS OTHERWISE NOTED ON FLOOR PLAN.
 - LEAVE AND/OR PREPARE FLOOR TO ACCEPT NEW GLUE DOWN FLOORING PER FINISH SCHEDULE. SURFACES THAT ARE TO ACCEPT NEW FLOORING ARE TO BE FREE OF ALL DEBRIS AND/OR RESINOUS DEPOSITS. FOR BRANCHES ON A SLAB FILL ALL FLOOR CUTS REMAINING FROM ANY PLUMBING OR OTHER TERMINATION WITH CONCRETE. DEMO ALL FLOOR OUTLETS AND PATCH AS REQUIRED. IF FLOOR HVAC VENTS ARE PRESENT IN A WALKWAY, PLEASE CONTACT DESIGNER FOR RELOCATION INSTRUCTIONS.
- PARTITIONS**
 - ALL NEW WALLS WILL BE CONSTRUCTED OF 3 5/8" METAL STUDS AT 16" O.C. (WOOD STUDS ACCEPTABLE IF APPROVED BY CODE) AND 5/8" DRYWALL MINIMUM, OR MATCH EXISTING TO REMAIN.
 - ALL NEW AND EXISTING WALLS SHALL BE TAPED AND SMOOTH, READY FOR PAINT, LEVEL 4 FINISH.
 - ALL DEMISING WALLS TO BE BUILT TO DECK STRUCTURE ABOVE, FIRE SEALING ALL PENETRATIONS AS REQUIRED. IF PROPERTY UTILIZES A PLENUM RETURN FOR ENTIRE BUILDING, IT IS REQUIRED TO TAKE DEMISING WALLS TO HEIGHT OF ADJACENT TENANT'S WALLS AND INSTALL 2" X 4" 12-GAUGE WIRE SECURITY FENCING FROM TOP OF WALL TO DECK TO PROVIDE A SECURE DEMISING WALL.
 - VERIFY DEMISING WALLS ARE INSULATED AND EXTEND TO DECK; EXTEND AND PROVIDE INSULATION AS REQUIRED
 - PROVIDE AND INSTALL SOUND BATT INSULATION ABOVE CEILING ALONG NEW DEMISING PARTITION. IF ADJACENT TENANT IS A RESTAURANT OR NAIL SALON, CAULK ALL OUTLETS AND PENETRATIONS AS WELL AS FLOOR LINE AND CONNECTION AT DECK TO AVOID SMELL TRANSFERENCE.
 - FINISH DEMISING WALL ON BOTH SIDES ONLY IF REQUIRED BY CODE, OR IF NOTED OTHERWISE ON PLANS. IT IS CONTRACTOR'S RESPONSIBILITY TO CONFIRM IF THIS IS REQUIRED DURING THE BIDDING PROCESS.
 - A MINIMUM OF 3" SOUND BATT INSULATION SHALL BE INSTALLED IN PARTITIONS AS INDICATED ON EXHIBIT A, BETWEEN STUDS AND ABOVE CEILING WHERE THE WALL AND CEILING MEET. IF WALLS ARE EXISTING, USE BLOW-IN INSULATION.
 - PROVIDE RUBBER MOLD/BREAK METAL AT WINDOW MULLION, CAULK ALL SEAMS. ALL WALLS THAT END AT EXTERIOR WALLS OR MULLIONS TO INCLUDE SOUND CAULK AND RUBBER GASKET AT POINT OF CONNECTION.

3. CEILING

- ACOUSTICAL CEILINGS: TILES TO BE FREE FROM STAINS, DIRT, CHIPS, AND BREAKS; ALL TILES TO BE SAME COLOR AND STYLE; GRID TO BE WHITE AND EVEN, FREE FROM HOLES (OR FILLED), AND SHOULD BE CLEAN. CONTIGUOUS AREAS MUST HAVE MATCHING TILE.
- MATCH EXISTING CEILING TILES AND GRID, OR BUILDING STANDARD, WHERE APPLICABLE.
- IF EXISTING GRID IS IN POOR CONDITION, OR COLOR OTHER THAN WHITE (AND NOT A BUILDING STANDARD), PAINT GRID WHITE, OR REPLACE AS REQUIRED.
- IF INSTALLING NEW, PROVIDE AND INSTALL 2 X 4' COMMERCIAL GRADE ACOUSTICAL CEILING TILE AND GRID. STANDARD HEIGHT FOR NEW CEILING TO BE 9'-0", UNLESS NOTED ON PLANS.
 - BASIS OF DESIGN:**
 - MFR: USG
 - PRODUCT: OLYMPIA MICRO 4753, NRC .60, SIZE: 2' X 4'
 - PROFILE: SHADOWLINE TAPERED
 - GRID: D, USG DX FLAT GRID
 - COLOR: WHITE
 - OR COMPARABLE ALTERNATE
- DRYWALL CEILINGS: TO BE LEVEL, HAVE AN EVEN TEXTURE (MATCH EXISTING WHERE APPLICABLE), AND BE PAINTED WHITE (SEE PAINT SPEC).

4. FIRE PROTECTION

- PROVIDE AND INSTALL NEW SPRINKLER SYSTEM ONLY AS REQUIRED BY CODE. IF EXISTING, MODIFY SPRINKLER LAYOUT AS REQUIRED PER CODE. INCLUDE NECESSARY PERMITS AND INSPECTIONS. HEADS MUST BE CENTERED IN TILE.
- PROVIDE APPROPRIATE COVERAGE OF HEADS FOR PARTITION LAYOUT AS REQUIRED BY CODE PER PARTITION LAYOUT AS SHOWN ON EXHIBIT A. QUANTITY AND LOCATION OF HEAD TO COMPLY WITH APPLICABLE CODES.
- PROVIDE/MODIFY FIRE ALARM SYSTEM IF REQUIRED BY LOCAL CODE.
- PROVIDE DESCRIPTION OF ANY LIFE SAFETY SYSTEM PROVIDED IN BUILDING AND ITS OPERATION.
- PROVIDE AND INSTALL SMOKE DETECTORS AS REQUIRED BY CODE.
- PROVIDE AND INSTALL FIRE EXTINGUISHER; TO MEET ALL LOCAL CODES.

5. TOILET/WASHROOM & PLUMBING (UNLESS COMMON FACILITIES PRESENT)


- PROVIDE AND INSTALL RESTROOM LAYOUT AND FIXTURES AS SHOWN ON EXHIBIT A. WASHROOM TO BE BARRIER FREE / HANDICAP ACCESSIBLE AS REQUIRED BY ADA STANDARDS, BUILDING CODES, AND AS SHOWN ON PLANS. GC TO ADHERE TO ANY CODES WHICH MIGHT REQUIRE MODIFICATION OF EXISTING RESTROOM NOT SHOWN ON PLANS; CONTACT DESIGNER IF CODE REQUIREMENTS DIFFER FROM PLANS.
- RESTROOM TO HAVE (1) OF EACH OF THE FOLLOWING: TOILET, SINK, WATER HEATER (DEDICATED TO EDJ SPACE), GRAB BARS, TOILET PAPER HOLDER, PAPER TOWEL DISPENSER, SOAP DISPENSER, & MIRROR. PROVIDE & INSTALL ANY OTHER ACCESSORY AS NOTED ON PLANS OR REQ'D BY CODE.
- EXISTING RESTROOM FIXTURES TO REMAIN IF DETERMINED TO BE IN GOOD CONDITION (I.E. IN GOOD OPERATION AND FREE OF STAINS OR CRACKS). CLEAN AND RESET FIXTURES AS REQUIRED.
- SINK(S) (ONLY IF SHOWN ON EXHIBIT A) TO HAVE HOT AND COLD-WATER SERVICE. IF UNABLE TO INSTALL WATER HEATER ABOVE CEILING, INSTALL INSTA-HOT UNDER SINK.
- PROVIDE AND INSTALL EXHAUST FAN WITH ADEQUATE DUCTING & SEPARATELY SWITCHED AS REQUIRED.
- PROVIDE AND INSTALL BARRIER-FREE UNDER-SINK PIPE PROTECTIVE COVER UNDER SINK IN 105.

EDJ PLUMBING FIXTURE SCHEDULE


ITEM	MODEL #	COMMENTS
18" GRAB BAR	BOBRICK #B-5806X18	
36" GRAB BAR	BOBRICK #B-5806X36	
42" GRAB BAR	BOBRICK #B-5806X42	
MIRROR**	24"WX36"H W/J-MOLD	
PAPER TOWEL DISPENSER	47260 - SCOTT MOD™	ELECTRONIC SLIMROLL, BLACK, PINK CODE
SINK FAUCET**	ZURN Z7440-XL	
SINK**	ZURN Z5340, WHITE	ADA- COMPLIANT WALL MOUNTED, CAULK AS REQ.
SOAP DISPENSER	32504 SCOTT MOD SKINCARE DISPENSER	WALL MOUNTED, TOUCHLESS BATTERY OPERATED
TOILET PAPER DISPENSER	09604 SCOTT SERIES INSIGHT	SURFACE MOUNTED DOUBLE ROLL TOILET TISSUE DISPENSER
TOILET SIGNAGE	PLASTIC ACCESSIBLE RESTROOM SIGN-UNISEX	
TOILET**	PF5112HEWH/PF1403TWH (LEFT FLUSH) PF5112RHEWH/PF1403TWH (RIGHT FLUSH)	ADA COMPLIANT, FLOOR MOUNTED CAULK AS REQ.

ITEMS SHOWN WITH ** MAY USE SIMILAR ALTERNATE MODEL, OTHERWISE GC TO USE SPECIFIED ITEM.


TYPICAL RESTROOM DETAILS




PLAN CLEARANCE AT WATER CLOSETS




DISPENSER LOCATION




REAR WALL GRAB BAR AT WATER CLOSETS

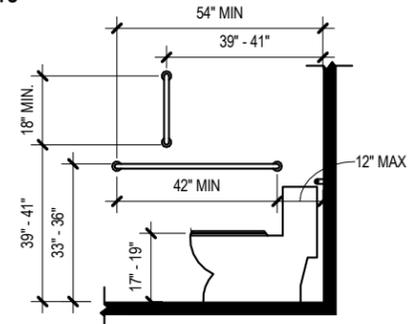


SIDE WALL GRAB BAR AT WATER CLOSETS/SEAT HEIGHT

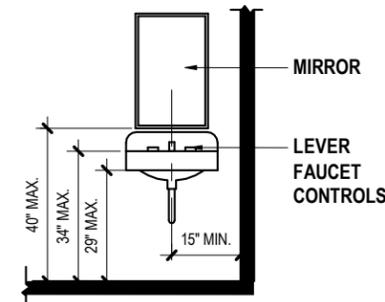

LAVATORY MOUNTING HEIGHTS AND CLEARANCE

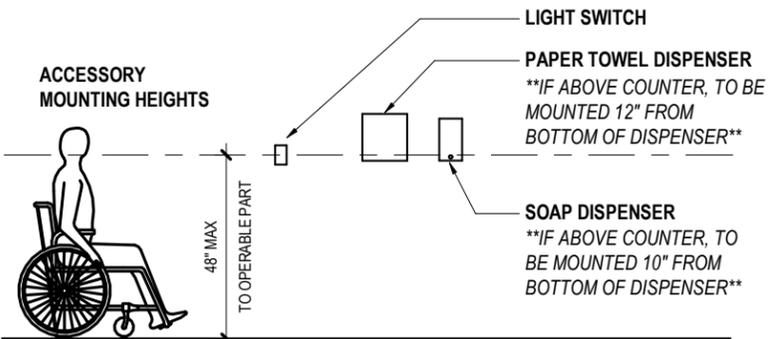

RESTROOM SIGNAGE



TACTILE AND BRAILLE ROOM ID SIGNAGE, ANSI A117.1 & 11B-703. ALL UPPER CASE TEXT 5/8"-2" HEIGHT, RAISED 1/32". CHARACTERS SHALL BE SAN SERIF CONTRACTED GRADE 2 BRAILLE, 703.3.4 & 11B-703.3. MINIMUM CHARACTER HEIGHT SHALL COMPLY WITH TABLE 703.2.4 & 11B-703.5.5.

RESTROOM IDENTIFICATION COLORS TO CONTRAST WITH DOOR COLOR. NO BRAILLE. UNISEX SIGN TO INCLUDE 12" DIAMETER CONTRASTING COLORS.

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY PAGES, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

Edward Jones
BRANCH REAL ESTATE

BRANCH OFFICE: 01643

DATE: 2023.04.05

SQUARE FOOTAGE: 870 USF | 870 RSF

EXHIBIT A
FINISH SPECIFICATIONS

EDWARD JONES GENERAL BUILDING AND FINISH SPECIFICATIONS

6. HVAC (UNLESS SHARED SYSTEM PRESENT)

- A. SYSTEM TO BE FULLY OPERATIONAL, IN GOOD CONDITION AND PROPERLY BALANCED UPON COMPLETION OF WORK. BALANCE BOTH HEATING AND COOLING. SYSTEM TO BE DEDICATED TO EDJ SPACE.
 - HVAC BALANCE SHEET MUST BE SUBMITTED WITH INVOICE AT PROJECT COMPLETION.
- B. ALL DUCTING, DIFFUSERS, GRILLES, AND THERMOSTATS SHALL BE CLEAN, IN GOOD CONDITION AND PROPERLY FUNCTIONING. LOCATION TO BE REVISED AS NECESSARY PER NEW PARTITION LAYOUT. VERIFY THAT ALL ROOMS IN EDWARD JONES SPACE AS SHOWN ON SHEET 3/4/5 HAVE A MINIMUM OF (1) RETURN AND (1) SUPPLY GRILLE AND MEET TEMPERATURE REQUIREMENTS TO ENSURE A COMFORTABLE WORKING ENVIRONMENT.
- C. IF SPACE IS BEING SUBDIVIDED, EDWARD JONES SPACE TO BE SEPARATELY CONTROLLED--SHARING OF THERMOSTAT WITH ADJACENT SPACES IS NOT ACCEPTABLE UNLESS IT IS AN OFFICE BUILDING THAT UTILIZES A PLENUM RETURN. IF SHARED SYSTEM EXISTS, THERMOSTAT MAY NOT BE LOCATED WITHIN EDWARD JONES LEASED SPACE.
- D. VERIFY THERMOSTAT IS LOCATED IN AN ACCESSIBLE AREA OF THE SPACE AS SHOWN ON FLOOR PLAN (TYPICALLY IN ROOM 101 OR 103).
- E. PROVIDE AND INSTALL A NEW WHITE-RODGERS 7-DAY PROGRAMMABLE THERMOSTAT, UNLESS OTHERWISE NOTED ON PLANS. PROVIDE APPROPRIATE STAT FOR UNIT SIZE AND TYPE. SET THERMOSTAT FOR M-F 8-5 HOURS OF OPERATION. LEAVE INSTRUCTIONS TAPED TO THERMOSTAT FOR FUTURE REFERENCE.
- F. HVAC SYSTEM SHOULD BE ABLE TO MAINTAIN 75 DEGREE F SUMMER AND 70 DEGREE F WINTER TEMPERATURES IN ACCORDANCE WITH THE ASHRAE DESIGN STANDARDS APPLICABLE TO THIS LOCATION. IF NECESSARY, A FORMAL INSPECTION TO VERIFY EQUIPMENT CONDITION SHOULD BE DONE.
- G. EDWARD JONES BOC (AS SHOWN ON EXHIBIT A) REQUIRES VENTILATION. INSTALL A SUPPLY GRILLE IN BOC ROOM (USUALLY ROOM 104) OR AREA IT IS LOCATED IN, TO MAINTAIN CONSTANT TEMPERATURE REQUIRED.
- H. IF BUILDING UTILIZES AN OPEN PELNUM SYSTEM, PROVIDE AND INSTALL SOUND BOOTS ON EACH RETURN GRILL (HERCULES INDUSTRIES SB222 SOUND BOOTS OR SIMILAR).

7. LIGHTING (UNLESS BUILDING STANDARD APPLIES)

- A. IF T12 LIGHTING IS EXISTING UTILIZE BALLAST BYPASS LED LAMPS, PROVIDE AND INSTALL COMMERCIAL GRADE 2X4 LIGHT FIXTURES AT ONE FIXTURE PER EVERY 75 USABLE SF, SO AS TO ACCOMMODATE MINIMUM 50 FOOTCANDLES AT DESK LOCATIONS.
- B. FOR NEW CONSTRUCTION OR NEW LIGHTING REQUIRED THROUGHOUT, PROVIDE AND INSTALL COMMERCIAL GRADE 2X4 LED FIXTURES AT ONE FIXTURE PER EVERY 75 USABLE SF, IN PLACE TO ACCOMMODATE MINIMUM 50 FOOTCANDLES AT DESK LOCATIONS.
 - BASIS OF DESIGN:
 - DEALER: VILLA LIGHTING (*SEE CONTACT ON SHEET 1)
 - STYLE: 2X4 LED, WITH ANGLED DIFFUSER
 - OUTPUT: W/40W, 4700 LUMENS, 3500K
 - OR COMPARABLE ALTERNATE (CONTACT PROJECT MANAGER FOR APPROVAL).
- C. EDWARD JONES HAS ESTABLISHED A PREFERRED VENDOR ARRANGEMENT WITH VILLA LIGHTING. PLEASE CONTACT VILLA LIGHTING FOR QUOTATION ON THE LIGHTING SPECIFICS.
- D. ALL NEW AND EXISTING LIGHTING SHOULD BE FULLY OPERATIONAL AND IN GOOD CONDITION.
- E. EXIT AND/OR EMERGENCY LIGHTING TO BE INSTALLED AS REQUIRED PER CODE.
- F. A SWITCH SHOULD OCCUR AT MAIN ENTRANCE AND WIRED TO OPERATE LIGHTING IN 101 AND PASSAGE 103 AS SHOWN ON PLAN, UNLESS EXISTING. IF SPACE HAS MORE THAN ONE EGRESS DOOR, SWITCH SHOULD BE 3-WAY TO OPERATE AT BOTH ENTRANCES; EXCLUDING BRANCHES IN CA.
- G. PROVIDE AND INSTALL EXIT LIGHTING AT EGRESS DOORS AS REQUIRED BY CODE.
- H. IF EXISTING, VERIFY THAT ALL LENSES AND LAMPS ARE CONSISTENT IN COLOR. LENSES TO BE FREE OF ANY VISIBLE DAMAGE, STAINS, OR DISCOLORATION OF ANY KIND.
- I. IN ROOMS 101 AND 103, HARD WIRE ONE LIGHT FIXTURE TO REMAIN ON AT ALL TIMES IF NOTED IN SITE SPECIFIC NOTES ON SHEET 3 OF 8. LIGHTS TO BE ORIENTED TO ALLOW ILLUMINATION OF INTERIOR COMMON AREAS FROM EXTERIOR DURING EVENING HOURS. (THIS ITEM TO BE ADJUSTED IN TITLE 24 REGIONS TO MEET LOCAL ENERGY REQUIREMENTS). SEE CONTRACTOR'S NOTES ON SHEET 3 OF 8.
- J. PROVIDE AND INSTALL (1) COMMERCIAL LINEAR SLOT WALL WASH LED TO ILLUMINATE INTERIOR LOGO. NEW CEILING TILE REQUIRED. INSTALL IN CEILING 3'-0" AWAY FROM WALL AND CENTERED ON PARTITION ABOVE INTERIOR LOGO IN 101 AS DETAILED ON SHEET 4. PROVIDE A SEPARATE SWITCH FOR LIGHT; SWITCH TO BE INSTALLED AT ENTRY DOOR UNLESS OTHERWISE SHOWN.
 - BASIS OF DESIGN:
 - PRODUCT: ELLIPTIPAR S222 WALL WASH
 - COLOR: MATTE WHITE
 - SPECS: L-MOUNT (ACT) OR P-MOUNT (DRYWALL), 3500K, 80+ CRI, NON-DIMMING
 - MOUNTING: FIXTURE TO BE CENTERED ON WALL LOGO.
 - CLG HTS UP TO 9' TALL = 30" OFF FACE OF WALL
 - CLG HTS BETWEEN 9'-10' TALL = 33" OFF FACE OF WALL
 - CLG HTS ABOVE 10' TALL 36" OFF FACE OF WALL
 - OR COMPARABLE ALTERNATE (CONTACT PROJECT MANAGER FOR APPROVAL).

8. DOORS (UNLESS BUILDING STANDARD APPLIES)

- A. ALL DOORS TO BE INSTALLED CLEAR OF ANY OBSTRUCTIONS.
- B. ALL DOOR CLEARANCES TO BE MET AS SHOWN ON SHEET 3 AND PER ACCESSIBILITY REQUIREMENTS.
- C. ALL DOORS TO HAVE WALL OR FLOOR MOUNTED STOPS, CONSISTENT WITH THE SPACE.
- D. REUSE / RELOCATE EXISTING DOORS AS NOTED ON SHEETS 2 AND 3. ANY EXISTING DOORS BEING REUSED SHALL BE REPAIRED OR REPAINTED AS REQUIRED. REPAIRED DOORS SHALL BE APPROVED FOR REUSE BY EDWARD JONES' DESIGNER.
- E. ANY NEW DOOR SHALL BE NO LESS THAN 3'-0" W, UNLESS OTHERWISE NOTED ON SHEET 3.
- F. ANY NEW DOOR SHALL MATCH EXISTING HEIGHT AND STYLE OF EXISTING, REMAINING DOORS. DOORS CAN NOT BE UNDERCUT FOR ANY REASON. THE MAXIMUM GAP ALLOWED IS 1/2".
- G. DOORS (BOTH INTERIOR AND EXTERIOR) AND OTHER WOODWORK SHOULD BE PAINTED OR STAINED TO MATCH EXISTING BUILDING STANDARD WHERE REQUIRED. IF NO STANDARD IS ESTABLISHED, USE PAINT OR STAIN AS LISTED IN THIS DOCUMENT ON SHEET 4.
- H. FINISHED DOORS WILL BE FREE FROM UNEVEN COLOR, DRIPS OR RUNS. ALL DOOR EDGES, INCLUDING TOP AND BOTTOM, TO BE FINISHED.
- I. EXTERIOR DOORS:
 - 1. ALL SUITE ENTRY DOORS, AND REAR DOORS LEADING TO BUILDING COMMON AREA, MUST HAVE CLOSERS, METAL PRY PLATES, AND THUMB-TURN DEADBOLT HARDWARE, ON OCCUPIED SIDE. COORDINATE WITH LANDLORD PRIOR TO INSTALLATION.
 - 2. ALL REAR DOORS LEADING TO THE EXTERIOR, MUST HAVE CLOSER, METAL PRY PLATES, CYLINDER GUARD, AT LEAST ONE SECURITY HINGE WITH NON-REMOVABLE PIN (MCKINNEY TA2314 OR APPROVED EQUAL), DEADBOLT, AND PEEPHOLE INSTALLED AT 5'-0" A.F.F. NOTIFY PROJECT MANAGER IMMEDIATELY IF PROPERTY MANAGER WILL NOT ALLOW PEEPHOLE TO BE INSTALLED.
 - 3. IF CODE DOES NOT ALLOW DEADBOLT, UTILIZE PANIC HARDWARE.
 - BASIS OF DESIGN:
 - PRODUCT: PHOENIX DOUBLE DEGENER
 - MODEL: DD-QR, QUICK RELEASE SECURITY BAR
 - NOTE: UL LISTED PANIC HARDWARE 2N43, CALL 913-723-3203 FOR LOCAL RETAILER.
 - OR COMPARABLE ALTERNATE (CONTACT PROJECT MANAGER FOR APPROVAL)
 - 4. WASHINGTON/OREGON: INSTALL LATCH PADDLES ON EXTERIOR ENTRY DOORS.
- J. INTERIOR DOORS:
 - 1. NO INTERIOR DOOR CLOSERS TO BE INSTALLED UNLESS OTHERWISE NOTED ON SHEET 3.
 - 2. WHERE ALL NEW INTERIOR DOORS ARE REQUIRED, PROVIDE AND INSTALL COMMERCIAL-GRADE, WOOD DOORS WITH HOLLOW METAL FRAMES.
 - BASIS OF DESIGN:
 - DOOR: PAINT-READY BIRCH WOOD, PAINTED/STAINED PER FINISH SPECS ON SHEET 4. ROOMS 102A, 102B, 104, 105, AND 106 TO BE SOLID CORE. ALL OTHERS MAY BE HOLLOW-CORE UNLESS NOTED OTHERWISE ON PLAN. REPLACE EXISTING AS REQUIRED.
 - FRAME: HOLLOW METAL, PAINTED PER FINISH SPECS ON SHEET 4.
 - SIZE: 3'-0" W X 6'-8" H.
 - 3. ALL DOOR HARDWARE TO BE HANDICAP ACCESSIBLE. REPLACE EXISTING, OR PROVIDE NEW.
 - BASIS OF DESIGN:
 - STYLE: LEVER-STYLE, ADA-COMPLIANT
 - FINISH: MATCH EXISTING OR BUILDING STANDARD, IF APPLICABLE. IF NO STANDARD, NEW HARDWARE TO BE BRUSHED NICKEL.
 - 4. PRIVACY LOCKSET TO BE PROVIDED FOR ROOM 105 (IF APPLICABLE, SEE SHEET 3)
 - 5. KEYLESS STOREROOM LOCKSET TO BE PROVIDED FOR ROOM 104 (IF APPLICABLE, SEE SHEET 3):
 - BASIS OF DESIGN:
 - VENDOR: HOME DEPOT
 - MODEL: KWIKSET #909HFL720-15SMT
 - COLOR: SATIN NICKEL
 - OR COMPARABLE ALTERNATE (CONTACT PROJECT MANAGER FOR APPROVAL).

9. FLOORING (UNLESS BUILDING STANDARD APPLIES)

- A. IF NEW CONSTRUCTION, GC REQUIRED TO COMPLETE MOISTURE TEST. IF MOISTURE READING IS ABOVE 95, NOTIFY INTERFACE FLOORING IMMEDIATELY.
- B. THE EDWARD JONES STANDARD CARPET, VINYL BASEBOARD, AND LUXURY VINYL PLANK SHALL BE INSTALLED PER MANUFACTURER'S INSTRUCTIONS. INSTALL METHOD FOR CARPET IS DIRECT GLUE IN AN ASHLAR PATTERN. SEE MANUFACTURER'S INSTRUCTIONS FOR POST-INSTALLATION /CLEANING INSTRUCTIONS. LUXURY VINYL PLANK JOINTS TO BE STAGGERED 6"+ IN RANDOM PATTERN. WHEN INSTALLING, CONTRACTOR SHOULD MIX TILES FROM MULTIPLE BOXES.
 - ADHESIVE: 2000 PLUS, SPREAD RATE: 35 SY/GAL
- C. PROVIDE A SMOOTH SURFACE FOR FLOORING INSTALLATION. IF FLOOR IS NOT LEVEL CONTACT DESIGNER IMMEDIATELY.
- D. PLEASE CONTACT INTERFACE SERVICES IMMEDIATELY AFTER AWARD OF CONTRACT TO COORDINATE FLOORING DELIVERY.
 - 1. GC: CARPET MATERIAL MUST BE ORDERED FROM INTERFACE SERVICES. EDWARD JONES HAS A NATIONAL CONTRACT WITH INTERFACE SERVICES. COORDINATION AND PURCHASE, AND INSTALLATION OF ALL FLOORING AND FINISHES AS LISTED IN EXHIBIT A, WILL BE THE FULL RESPONSIBILITY OF THE GC.
- E. ALL CARPET TO BE INSTALLED PER CRI STANDARDS (CARPET & RUG INSTITUTE).
- F. INSTALL SCHLUTER TRANSITION STRIP (ANODIZED ALUMINUM) BETWEEN ANY DISSIMILAR FLOORS.
- G. CARPET TO BE VACUUMED WITH NO PROTRUDING YARN AT SEAMS. IF CARPET IS EXISTING TO REMAIN IN SPACE, GC TO HAVE CARPET PROFESSIONALLY CLEANED.
- H. A FULL BOX OF CARPET TILE SHALL BE LEFT IN STORAGE AREA OF EDWARD JONES SPACE. ALL REMAINING LUXURY VINYL PLANK SHOULD BE LEFT IN EDWARD JONES' STORAGE AREA.

10. PAINT

- A. ALL EXPOSED SURFACES IN AREAS INDICATED IN FINISH SCHEDULE ON SHEET 4, SHALL BE PRIMED AND PAINTED WITH SHERWIN WILLIAMS PAINT.
- B. FOR ALL REPAINT AND REMODEL, THE PRIME COATS NOTED BELOW MAY BE EXCLUDED UNLESS COATING A BARE SURFACE. FOLLOW ALL MANUFACTURERS' RECOMMENDED SURFACE PREPARATION.
- C. ASSUME ONE TRIP FOR TOUCH UP PAINT AFTER FLOORING INSTALLATION AND FURNITURE DELIVERY. REMAINING TOUCH UP PAINT TO BE LEFT IN THE STORAGE AREA OF EDWARD JONES SPACE, CLEARLY LABELED.
- D. IF THERE ARE ANY QUESTIONS REGARDING PAINT COLORS, PLEASE CONTACT EDWARD JONES BRANCH DESIGN- DESIGNER NAME AND PHONE NUMBER LISTED ON EXHIBIT A.
- E. EXACT SPECIFICATIONS MAY BE OBTAINED FROM SHERWIN WILLIAMS: 1-800-474-3794.
- F. REFER TO PAINT SELECTION SHEET 4. COLORS MAY INCLUDE SEVERAL, BUT NOT ALL, OF THE FOLLOWING:

GYPSUM PARTITIONS (EXCEPT ACCENT WALLS & CEILINGS):
TWO FINISH COATS OVER AN EXISTING FINISH OR PRIMER.

- SHERWIN WILLIAMS:
 - PRIMER: SHERWIN-WILLIAMS PROMAR 200 ZERO VOC, INTERIOR LATEX PRIMER, BS28W02600.
 - 1ST & 2ND COATS: SHERWIN-WILLIAMS PROMAR 200 ZERO VOC EGGSHELL, A97-100 SERIES (IN ROLLER APPLICATIONS, USE ONLY A 1/2" NAP SYNTHETIC COVER).
 - COLOR: INDICATED ON SHEET 4

GYPSUM PARTITIONS (ACCENT WALLS): (NOTE Ax , SHEET 4)
TWO FINISH COATS OVER AN EXISTING FINISH OR A PRIMER.

- SHERWIN WILLIAMS:
 - PRIMER: SHERWIN-WILLIAMS PROMAR 200 ZERO VOC, INTERIOR LATEX PRIMER, BS28W02600.
 - 1ST & 2ND COATS: SHERWIN-WILLIAMS COLOR ACCENTS INTERIOR PROMAR 200 ZERO VOC EGGSHELL WALL FINISH, Y38 SERIES.
 - COLOR: INDICATED ON SHEET 4

GYPSUM CEILINGS: ONE FINISH COAT OVER AN EXISTING FINISH OR PRIMER.

- SHERWIN WILLIAMS:
 - PRIMER: SHERWIN-WILLIAMS PROMAR 200 ZERO VOC, INTERIOR LATEX PRIMER, BS28W02600.
 - FINISH COAT: SHERWIN-WILLIAMS PROMAR 400 INTERIOR LATEX FLAT, B30W451.
 - COLOR: SW7005 PURE WHITE

INTERIOR WOOD DOORS, JAMBS & FRAMES (METAL OR WOOD)

FOR PAINT ONLY: TWO FINISH COATS OVER A PRIMER
FOR STAIN: ONE COAT, UNLESS SECOND COAT IS NEEDED FOR A CONSISTENT FINISH THROUGHOUT.

- SHERWIN WILLIAMS:
 - PRIMER: SHERWIN-WILLIAMS PROMAR 200 ZERO VOC, INTERIOR LATEX PRIMER, BS28W02600.
 - 1ST & 2ND COATS: SHERWIN-WILLIAMS PROCLASSIC WATERBORNE INTERIOR ACRYLIC SEMI-GLOSS ENAMEL, B31W51 SERIES
 - COLOR: INDICATED ON SHEET 4
- OR
- SHERWIN WILLIAMS:
 - STAIN: SHERWIN-WILLIAMS MINWAX PERFORMANCE SERIES TINTABLE WOOD STAIN
 - COLOR: INDICATED ON SHEET 4.

EXTERIOR METAL DOORS, JAMBS & FRAMES

TWO FINISH COATS OVER A PRIMER.

- SHERWIN WILLIAMS:
 - PRIMER: SHERWIN-WILLIAMS DTM ACRYLIC PRIMER/FINISH, B66W1
 - 1ST & 2ND COATS: SHERWIN-WILLIAMS PROCLASSIC WATERBORNE INTERIOR ACRYLIC SEMI-GLOSS ENAMEL, B31W51 SERIES
 - COLOR: INDICATED ON SHEET 4

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY PAGES, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

SQUARE FOOTAGE: 870 USF | 870 RSF

Edward Jones
BRANCH REAL ESTATE

BRANCH OFFICE: 01643

DATE: 2023.04.05

EXHIBIT A
FINISH
SPECIFICATIONS

SHEET **7** of 8

EDWARD JONES GENERAL BUILDING AND FINISH SPECIFICATIONS

11. ELECTRICAL

- A. ELECTRICAL TO INCLUDE OUTLETS AS SHOWN ON EXHIBIT A, INCLUDING DEDICATED OUTLET AS SHOWN.
- GENERAL PURPOSE OUTLETS
 - ALL OUTLETS TO BE PLACED AS SHOWN ON DRAWING.
 - ONE (1) QUAD OR (2) DUPLEXES AT FUTURE WORKSTATION LOCATION AND (2) QUAD OUTLETS AT BOA WORKSTATION.
 - AT ALL TERMINALS AND OTHER OFFICE EQUIPMENT AS SHOWN ON THE PLAN.
 - DEDICATED OUTLET
 - DEFINITION: A DEDICATED OUTLET IS WIRED DIRECTLY TO THE MAIN POWER DISTRIBUTION PANEL THROUGH A DESIGNATED (DEDICATED) CIRCUIT BREAKER. THE DEDICATED OUTLETS ARE COLOR CODED TO DISTINGUISH THEM FROM GENERAL-PURPOSE OUTLETS. ONLY THE BOC SHOULD BE PLUGGED INTO THE DEDICATED OUTLET. THE TECHNICAL INFORMATION FOR THIS OUTLET IS AS FOLLOWS:
 - ONE DEDICATED OUTLET (SIMPLEX, NOT DUPLEX) REQUIRED FOR THE BOC
 - OUTLET TO BE STANDARD 3-PRONG, 120 VOLT, 20 AMP, DEDICATED CIRCUIT.
 - OUTLET TO BE SIMPLEX, ORANGE COLOR CODED RECEPTACLE (NEMA TYPE 5-15 R/I G OUTLET, GE5362-IG OR EQUIVALENT).
 - ALL GROUNDS MUST HAVE SAME GROUND POTENTIAL.
 - RECESSED OUTLET (IF APPLICABLE)
 - LEVITON RECESSED ONE-GANG DUPLEX RECEPTACLE (15A-125VAC 2-POLE, 3-WIRE-NEMA 5-15R) - CAT NO. 689 TO INCLUDE ELECTRICAL BOX.
 - CATALOG NO. 012-00689-00W; UPC NO. 07847731284 1
 - IF ABOVE SPECIFICATION IS UNAVAILABLE, FIND COMPARABLE ALTERNATIVE
- B. ALL OUTLETS TO BE 110 VOLT STANDARD 3-PRONG OUTLETS THAT MEET STATE AND LOCAL REQUIREMENTS (NEMA TYPE 5-15R). THE GROUNDING CONDUCTORS FOR THE BUILDING'S CIRCUITS SHOULD BE REFERENCED TO THE POINT OF "ZERO CURRENT" WITHIN THE ELECTRICAL SUPPLY SYSTEM, WHICH IS WHERE THE NEUTRAL AND GROUND FOR THE SYSTEM ARE TIED TOGETHER.
- C. EXISTING OUTLETS CAN BE USED TO MEET THE REQUIREMENTS FOR GENERAL-PURPOSE OUTLETS ONLY. VERIFY EXISTING OUTLETS TO REMAIN ARE IN WORKING ORDER, AND IF WITHIN 6" OF A NEW OUTLET LOCATION INDICATED, NO NEW OUTLET IS NEEDED.
- D. NEW ELECTRICAL OUTLETS TO BE INSTALLED WHERE SHOWN ON PLANS AT 18" A.F.F., U.N.O..
- E. DEMO/REMOVE OUTLETS ABOVE 18" A.F.F. U.N.O. ON PLANS.
- F. INSTALL OR REPLACE ALL OUTLET AND LIGHT COVERS/SOCKETS WITH WHITE THROUGHOUT, U.N.O..
- G. ALL COMPUTER EQUIPMENT FOR THIS OFFICE IS SENSITIVE TO HIGH ELECTROMAGNETIC INTERFERENCE (EMI). IT IS RECOMMENDED THAT THE AMBIENT EMI IN THE OFFICE DOES NOT EXCEED 2 MG. PLEASE NOTIFY DESIGNER IMMEDIATELY IF SITE IS LOCATED NEAR EXISTING POWER LINES, TRANSFORMERS, SUB-STATIONS, ETC.
- H. LANDLORD RESPONSIBLE FOR SETTING UP UTILITIES OR PROVIDING TEMPORARY ELECTRICAL IN SPACE THAT IS NEW CONSTRUCTION OR SPACE THAT IS BEING SUBDIVIDED. GENERAL CONTRACTOR IS RESPONSIBLE FOR ASSURING TEMPORARY POWER FOR ALL FINISH OUT WORK IF NOT ALREADY PROVIDED.
- I. ELECTRICAL CONTRACTOR TO VERIFY EXISTING ELECTRICAL PANEL WILL ACCOMMODATE EDWARD JONES REQUIREMENTS OF 200 AMPS; UPGRADE AS REQUIRED.
- J. CONTRACTOR TO INSTALL 2'X3' MINIMUM BACKER BOARD OF FRT PLYWOOD AT BOC LOCATION. BOARD TO BE PAINTED TO MATCH THE WALL WHEN THE WALL IS SCHEDULED FOR PAINT PER THE FINISH SCHEDULE. CONFIRM WITH FIRE MARSHALL PRIOR TO PAINTING AND LEAVE RATING STAMP EXPOSED WHENEVER REQUIRED. BOARD TO BE INSTALLED AT 36" A.F.F. TO THE BOTTOM AT THE LOCATION SHOWN ON THE PLAN. REFER TO SHEET 3 FOR LOCATION ON PLAN.
- K. ELECTRICIAN TO INSTALL 3/4" CONDUIT & BOX WITH PULL STRING OR MUD RING (EXISTING WALL) AT ALL LOCATIONS (SEE SECTION 12 BELOW) WITH LOW VOLTAGE COMMUNICATION CONNECTIONS. INSTALL (1) SINGLE GANG BOX AT EACH LOCATION INDICATED ON THE DRAWING WITH A TRIANGLE (▼ OR ▽). DO NOT INSTALL A DOUBLE GANG BOX AT LOCATIONS WHERE (2) SYMBOLS ARE ADJACENT. REFER TO LEGEND AND PLANS ON EXHIBIT A FOR LOCATIONS OF DOUBLE GANG BOXES.

12. LOW VOLTAGE (ALSO KNOWN AS PHONE/DATA CABLING)


- LOW VOLTAGE WIRING (ALSO KNOWN AS PHONE/DATA CABLING)
- A. LOW VOLTAGE IMPLIES THE ACTUAL WIRE OR CABLE THAT IS RUN FROM THE BOC TO EACH PHONE, COMPUTER, PRINTER, AND FUTURE WORKSTATION LOCATION, WITH THE EXCEPTION OF THE DEMARC EXTENSION. LOW VOLTAGE WORK IS DONE BY EDWARD JONES BRANCH INSTALL DEPT. THROUGH A PREFERRED NATIONAL VENDOR. THIS WORK IS DONE AFTER THE SPACE IS TURNED OVER TO CLIENT. CONTRACTOR ONLY RESPONSIBLE FOR GANG BOXES, AV FACEPLATES, CONDUIT, AND PULLSTRINGS AS NOTED IN NEXT SECTION.
- B. IF LOW VOLTAGE WORK IS REQUIRED TO BE PERMITTED AND INSPECTED AS NOTED ON EXHIBIT A, GENERAL CONTRACTOR IS TO COORDINATE THE INSTALLATION WITH EDWARD JONES; CONTACT LEASING COORDINATOR/PROJECT MANAGER LISTED ON SHEET 1. NOTE THAT PRE-WIRE IS NOT STANDARD AND IS ONLY DONE WHEN REQUIRED VS. BEING DONE FOR CONVENIENCE. PREWIRE WILL BE REQUIRED IF CEILING HEIGHT IS OVER 9'-0" IN U.S. AND OVER 10'-0" IN CANADA; AND/OR IF INDICATED ON SHEET 3. IF A PREWIRE IS INDICATED ON SHEET 3, GC TO CONTACT EDWARD JONES BRANCH INSTALL AT BRINSTALL@EDWARDJONES.COM WHEN PROJECT IS READY FOR LOW VOLTAGE PRE-WIRE.
- C. NOTIFY LEASING COORDINATOR/PROJECT MANAGER OF LOW VOLTAGE REQUIREMENTS NEEDED IN ORDER TO OBTAIN CERTIFICATE OF OCCUPANCY.
- ELECTRICAL BOXES - 4X2-1/8D HANDY BOX MUST BE USED, PER DIAGRAM BELOW FOR ALL LOW VOLTAGE APPLICATIONS IN NEW WALLS AND CONCRETE WALLS.
 - MUD RINGS - MPLS METAL SINGLE GANG DRYWALL MOUNTING PLATE, PER DIAGRAM BELOW FOR ALL LOW VOLTAGE APPLICATIONS IN EXISTING WALLS.

CONDUIT-DEMISED PREMISES

- A. CONDUIT STUB-UPS TO BE INSTALLED IN NEW WALLS WHERE PHONE/DATA/PRINTERS ARE SHOWN ON THE FLOOR PLAN (INDICATED BY TRIANGLE ▼) IF THE NEW CEILING IS DRYWALL, INSTALL CONDUIT FROM THE POINT OF CONNECTION (PHONES/DATA/PRINTER LOCATIONS INDICATED WITH ▼) AND STUB ABOVE CEILING WITH PULL STRING RUN TO THE POINT OF TERMINATION (CLIENT SERVER OR BOC).
- B. CONFIRM ACTUAL LOCATIONS ON EXHIBIT A PRIOR TO INSTALLATION. EXISTING CONSTRUCTION--CONDUIT NOT TO BE DONE IF IT REQUIRES REMOVAL OF DRYWALL PARTITIONS OR CEILINGS, UNLESS PRIOR APPROVAL RECEIVED FROM EDJ DESIGNER. IF WIREMOLD PRODUCT IS REQUIRED, INSTALL PANDUIT RACEWAY LD10E16-A.
- C. PROVIDE ONE SINGLE GANG BOX (ONE PER TRIANGLE ▼) AND PULL STRING AT EACH CONDUIT LOCATION. LABEL PULL STRINGS AT POINT OF TERMINATION (BOC) WITH ROOM NUMBER OF POINT OF CONNECTION. RECEPTACLES AND FACEPLATES TO BE PROVIDED BY EDWARD JONES BRANCH INSTALL.
- D. IF APPLICABLE, PROVIDE ONE SINGLE GANG BOX AND BRUSH CABLE PASS-THRU FACEPLATE (ONE PER TRIANGLE ▽) WITH PULL-STRING BETWEEN AV GANG BOXES FOR FUTURE FA-PROVIDED AV CABLING.
- E. IF WALLS ARE EXISTING AND CONDUIT IS NOT INSTALLED, PROVIDE PULL STRING AND CUT IN A NEW BOX AT THE SAME LOCATIONS.
- F. STANDARD STUB-UP QUANTITY: TEN (10) 3/4" DIAMETER LOCATIONS, UNLESS NOTED OTHERWISE ON PLANS - INDICATED BY TRIANGLE SYMBOL ON FLOOR PLANS.
- 3/4" CONDUIT LOCATIONS
 - (2) AT BOA (ROOM 101)
 - (1) AT OFFICE 102A
 - (1) AT OFFICE 102B
 - (4) AT BOC INTO DOUBLE GANG BOXES
 - (2) AT INCOMING PHONE/DATA LINES TO BOC PER PLAN (ONE ACTIVE FOR PHONES AND ONE W/ #6 GROUND WIRE RUN FROM BOX TO ELECTRICAL PANEL TO GROUND BOX FOR DATA)
 - (1) AT OPEN 106 + IF INDICATED ON PLAN
 - ADDITIONAL MAY BE NEEDED IF ADDITIONAL DATA PORTS ARE SHOWN ON PLAN.
- G. ALL BOXES AND CONDUIT AT BOC LOCATION TO BE INSTALLED PER DETAIL. #6 GROUND WIRE MUST BE INSTALLED AND TERMINATED ON A BUSBAR FOR #6 WIRE MOUNTED ON THE BOTTOM CORNER OF THE BACK BOARD. THE BUSBAR SHOULD HAVE 4 TO 6 TERMINALS.
- CONDUIT AND PHONE LINES FROM BUILDING SOURCE TO EXTENDED DEMARC (BOC)
- A. GENERAL CONTRACTOR TO INSTALL (2) 3/4" CONDUIT FROM THE BUILDING SOURCE TO THE EXTENDED DEMARC LOCATION WITHIN THE BRANCH (BOC LOCATION SHOWN ON PLAN).
 ****IF DATA LINES ENTER BUILDING AT A DIFFERENT LOCATION THAN PHONE LINES, (1) CONDUIT WILL NEED TO COME FROM THE DATA SOURCE TO THE GROUNDED BOX AT THE BOC LOCATION. REMAINING CONDUIT SHOULD BE RUN IN FROM THE PHONE LINE SOURCE TO THE BOC LOCATION****
- B. CONTACT BRANCH REAL ESTATE IMMEDIATELY IF THERE ARE ANY QUESTIONS REGARDING THE NUMBER OF PHONES LINES OR LOCATION OF DEMARC EXTENSION CONDUIT.

BOC REQUIREMENTS:

NOTE: CONDUIT IS INSTALLED INSIDE WALL. IF WALL IS EXISTING, CONDUIT MAY BE SURFACE MOUNTED. MUST HAVE ROOM FOR EQUIPMENT TO INSTALL ON PLYWOOD. (SEE KEYED NOTE #1 ON SHEET 3)

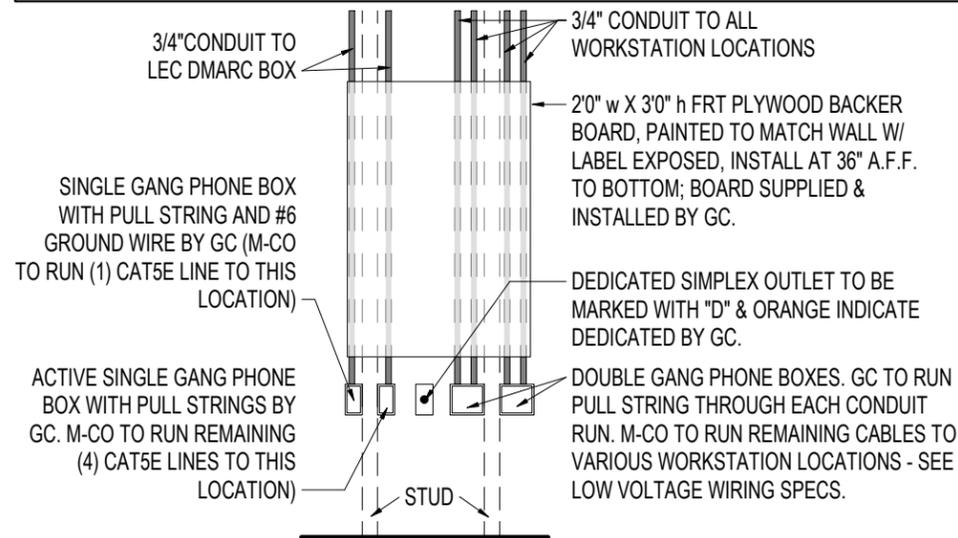


13. MISCELLANEOUS (ONLY IF SHOWN ON SHEET 3)

- A. FIXED WINDOW
- NEW INTERIOR WINDOW BETWEEN FA OFFICE AND BOA AREA TO BE A FIXED, 42"W X 30"H AND INSTALLED AT 42" A.F.F., UNLESS NOTED OTHERWISE; FRAME TO MATCH DOOR FRAMES.
 - GLASS TO BE CLEAR, 1/2" TEMPERED STATIONARY PANEL. GLIDERS AND MIRRORING WINDOWS NOT ALLOWED.
- B. FIREPLACES, STOVES, SHOWERS, TUBS
- ALL GAS AND PLUMBING LINES TO THESE ELEMENTS/FIXTURES TO BE RENDERED INOPERABLE AND ALL LINES TO BE CAPPED.
 - IF WOOD BURNING FIREPLACE EXISTING GC TO INSTALL COVER MADE FROM LUMBER AND DRYWALL THAT RESTS INSIDE THE OPENING AND DOES NOT DAMAGE THE FIREPLACE.

14. EDWARD JONES STANDARD SIGNAGE

- A. FOR ORDERING & INSTALL INSTRUCTIONS, SEE CONTACT INFO ON SHEET 1
- B. EDJ LOGO
- EDJ LOGO LETTERING TO BE ORDERED BY CONTRACTOR, BUT WILL BE PAID FOR BY EDWARD JONES. ONLY INSTALLATION SHOULD BE INCLUDED IN CONTRACTOR'S SCOPE OF WORK.
 - LETTERING TO BE CENTERED ON PARTITION AS SHOWN ON FINISH PLAN ON SHEET 4. REFER TO SIGNAGE ELEVATION FOR MOUNTING HEIGHT.
 - CONTRACTOR TO USE PROVIDED TEMPLATE FOR ACCURATE ALIGNMENT, ALLOW AT LEAST 2" ON EITHER SIDE OF LETTERING. IF PARTITION SELECTED DOES NOT MATCH ELEVATION, NOTIFY DESIGNER IMMEDIATELY.
- C. BRAND WALL METAL REVEAL (IF APPLICABLE, SEE SHEET 4)
- CONTRACTOR TO ORDER METAL REVEAL (EDJ-625-625) FROM FRY REGLET AND INSTALL PER MANUFACTURER INSTRUCTIONS. REFERENCE FINISH PLAN AND SIGNAGE ELEVATION ON SHEET 4.
 - REVEAL AVAILABLE IN 10' STANDARD LENGTHS ONLY. REVEAL TO BE CENTERED IF WALL IS SLIGHTLY LONGER THAN 10', OR WILL REQUIRE MULTIPLE REVEALS SEAMED TOGETHER IF INDICATED TO BE LONGER. SEE FINISH PLAN ON SHEET 4.
 - INSTALL END CAP CLIP WHERE APPLIES AT OPEN ENDS

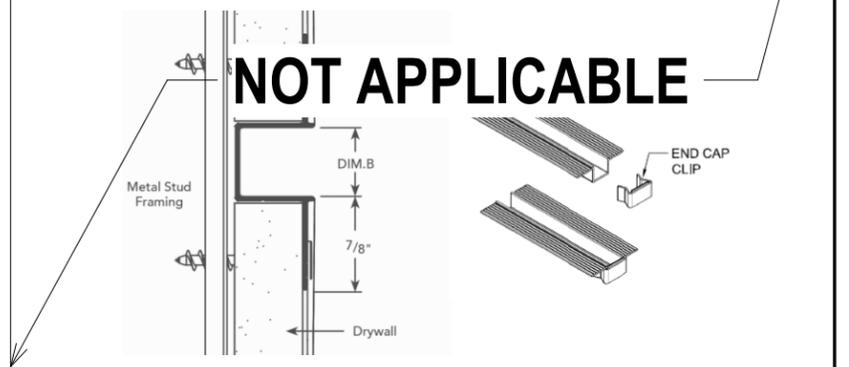

15. INTERIOR CASEWORK AND EQUIPMENT

- A. REFER TO SHEET 3 FOR CASEWORK SCOPE OF WORK. IF NOTED TO BE ALTERNATE SCOPE OF WORK, GC TO PROVIDE BROKEN-OUT COST IN BID BASED ON THE BELOW BASIS OF DESIGN. IF APPROVED TO PROCEED WITH THE ALTERNATE, GC TO COORDINATE DIRECTLY WITH THE FINANCIAL ADVISOR TO FINALIZE FINISH SELECTIONS AND COST ESTIMATE. PAYMENT FOR ANY ALTERNATE SCOPE WILL BE COORDINATED BETWEEN GC AND FINANCIAL ADVISOR.
- B. CASEWORK TO BE MADE UP OF 3/4" PLYWOOD WITH PLASTIC LAMINATE ON ALL EXPOSED EDGES, AND MELAMINE INTERIOR. INTERIOR ADJUSTABLE SHELVE TO BE MADE UP OF 3/4" PLYWOOD WITH MATCHING MELAMINE ON ALL EXPOSED EDGES.
- C. CASEWORK TO INCLUDE SOFT-CLOSE HINGES AND DRAWER SLIDES.
- D. CABINET PULLS TO BE 4" WIRE PULL, BRUSHED NICKEL.
- E. NEW CASEWORK TO MATCH EXISTING CASEWORK FINISHES, IF APPLICABLE. IF NO STANDARD IS IN PLACE, BASIS OF DESIGN TO BE PLASTIC LAMINATE CABINETS, AND PLASTIC LAMINATE COUNTERTOP.
- BASIS OF DESIGN:
 - CABINET EXTERIOR: WILSONART, FRENCH LINEN 5016
 - CABINET INTERIOR: BLACK MELAMINE
 - COUNTERTOP: WILSONART, CLASSIC LINEN 4943-38, EASED EDGE, BACKSPASH
- F. ALL ELECTRICAL, PLUMBING, AND PLUMBING FIXTURES TO BE PROVIDED AND INSTALLED BY CONTRACTOR. REFER TO SHEET 3 FOR SPECIFIC ELECTRICAL AND PLUMBING SCOPE OF WORK NEEDED.
- KITCHEN SINK BASIS OF DESIGN:
 - MFR: GLACIER BAY
 - MODEL: VT3322G2, ALL-IN-ONE, DUAL MOUNT
 - OR COMPARABLE ALTERNATE (CONTACT PROJECT MANAGER FOR APPROVAL).
- G. ALL APPLIANCES FOR KITCHENETTES AND COFFEE BARS TO BE PROVIDED AND INSTALLED BY FINANCIAL ADVISOR, UNLESS NOTED OTHERWISE ON SHEET 3.
- H. ALL CASEWORK TO BE BUILT TO COMPLY WITH ADA AND BUILDING ACCESSIBILITY CODE: CLIENT-FACING SERVICE COUNTERS (BOA DESK)
- SHALL COMPLY WITH SECTION 904, FOR EITHER PARALLEL OR FORWARD APPROACH
 - CLEAR FLOOR SPACE COMPLYING WITH SECTION 305 SHALL BE POSITIONED IN FRONT OF THE ADA COUNTER.
- WORK COUNTERS
- SHALL COMPLY WITH SECTION 902
 - CLEAR FLOOR SPACE COMPLYING WITH 305, AND KNEE AND TOE CLEARANCE COMPLYING WITH 306.
- KITCHENETTES
- SHALL BE 34" HIGH MAX COUNTERS
 - COMPLY WITH SECTIONS 305, 606, AND 808, AND PROVIDE EITHER PARALLEL OR FRONT APPROACH CLEARANCES AT SINKS AND ALL APPLIANCES

****DO NOT SCALE DRAWINGS****

****CONTRACTOR MUST HAVE (8) SHEETS FOR THIS SET OF DRAWINGS. IF YOU ARE MISSING ANY PAGES, PLEASE CONTACT DESIGNER: MONICA AZER AT: p: 314.515.1620**

500 SW MARKET ST., SUITE C,
LEE'S SUMMIT, MO
64063-3987

SQUARE FOOTAGE: 870 USF | 870 RSF

Edward Jones
BRANCH REAL ESTATE
BRANCH OFFICE: 01643

DATE: 2023.04.05

EXHIBIT A
FINISH
SPECIFICATIONS

SHEET **8** of 8