




Notes

1. Contractor is responsible for verifying all existing utility locations prior to excavation
2. There are no known natural or artificial water storage detention areas, or wetlands in the area designated for construction
3. No part of the project lies within the 100 year flood plain
4. All erosion and sediment control measures need to be implemented prior to construction
5. Additional erosion control may be required by the City Engineer, Design Engineer or Owner at any time problematic areas are noted in the field or existing measures are found to be ineffective
6. Soil Stabilization of disturbed areas shall be completed within 14 days of construction inactivity
7. Contractor responsible for all density testing of roadway subgrade and granular base.
8. Contractor responsible to provide Engineering Solutions an Asbuilt topographic survey of the site to verify grades.

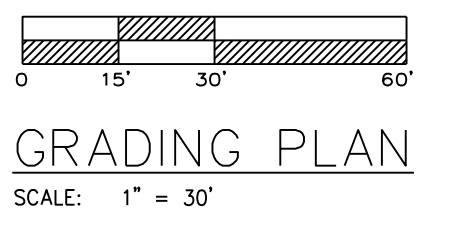

Professional Registration
 Missouri
 Engineering 2005002188-D
 Surveying 200500319-D
 Kansas
 Engineering E-1695
 Surveying LS-218
 Oklahoma
 Engineering 6254
 Nebraska
 Engineering CA2821

Newberry Landings First Plat
 Lee's Summit, Jackson County, Missouri

Project:
 NEWBERRY
 LANDINGS, LSN0
 Issue Date:
 July 19, 2018

GRADING PLAN
 Construction Plans for:
 Lot 295, Newberry Landings First Plat
 Lee's Summit, Jackson County, Missouri

Matthew J. Schlicht
 MO PE 2006019708
 KS PE 19071
 OK PE 25226

| REVISIONS | |
|-----------|---------------|
| △ | REV. 8/30/18 |
| △ | REV. 10/10/18 |
| | |
| | |
| | |
| | |