

ATTIC STORAGE COST ESTIMATE

LEE'S SUMMIT, JACKSON COUNTY, MISSOURI


Cost Estimate

DATE: 8/9/2019

Bid Item



No.	Item Description	Unit	Unit Price	Quantity	Extension
1	6" Asph. Concrete	S.Y.	\$28.00	204	\$5,712.00
2	6" Unreinforced concrete	S.Y.	\$47.00	1384	\$65,048.00
3	10" Crushed Stone (MoDOT Type 5 or Equivalent)	S.Y.	\$15.00	1775	\$26,625.00
4	Biaxial Geogrid	S.Y.	\$5.00	1775	\$8,875.00
5	Cut	C.Y.	\$3.00	1754	\$5,262.00
6	Fill	C.Y.	\$3.00	51	\$153.00
7	Sidewalk (4" Thick)	S.F.	\$5.00	155	\$775.00
8	Accessible Sidewalk Ramp (6" Thick)	EA.	\$700.00	1	\$700.00
9	Rip Rap (D50=12") 12" Deep	S.Y.	\$55.00	13	\$733.00
10	CG-1 Curb	L.F.	\$12.00	884	\$10,608.00
11	18" HDPE	L.F.	\$27.00	5	\$135.00
12	Catch Basin (5'x3')	EA.	\$3,000.00	1	\$3,000.00
13	6" DIP	L.F.	\$28.00	279	\$7,812.00
14	Fire Hydrant Assembly	EA.	\$3,800.00	1	\$3,800.00
15	Connection to Existing Water Main	EA.	\$1,000.00	2	\$2,000.00
16	6"-45 Degree Bend	EA.	\$300.00	2	\$600.00
17	Thrust Blocking	EA.	\$50.00	6	\$300.00
18	4" PVC SDR-26	L.F.	\$30.65	37	\$1,134.00
19	Service Line Checks	EA.	\$100.00	1	\$100
20	Silt Fence	L.F.	\$2.00	621	\$1,242
21	Seed and mulch	AC.	\$1,900.00	1	\$1,900
22	Flared End Section	EA.	\$600.00	1	\$600
23	Bends with Thrust Blocking	EA.	\$150.00	2	\$300
24	Inlet Protection	EA.	\$500.00	2	\$1,000
25	Temporary Construction Entrance	EA.	\$1,500.00	1	\$1,500
26	Outlet Protection	EA.	\$500.00	2	\$1,000
SUBTOTAL					\$150,914.00
TOTAL					\$150,914.00

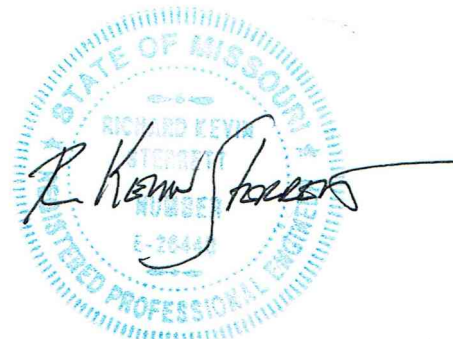

8/12/19