


DWG: F:\2024\00001-00500\024-00009\40-design\AutoCAD\msa phases\unite-24\_300 sw longview blvd\Final Plans\UPN-24\_300 SW Longview Blvd\_final plans.dwg  
DATE: Mar 14, 2024 4:32pm  
XREFS: 300 SW Long Blvd\_Base  
USER: rschulta

ADDRESS: 300 SW LONGVIEW BLVD, LEE'S SUMMIT, MO 64081  
PROJECT NUMBER: 48054

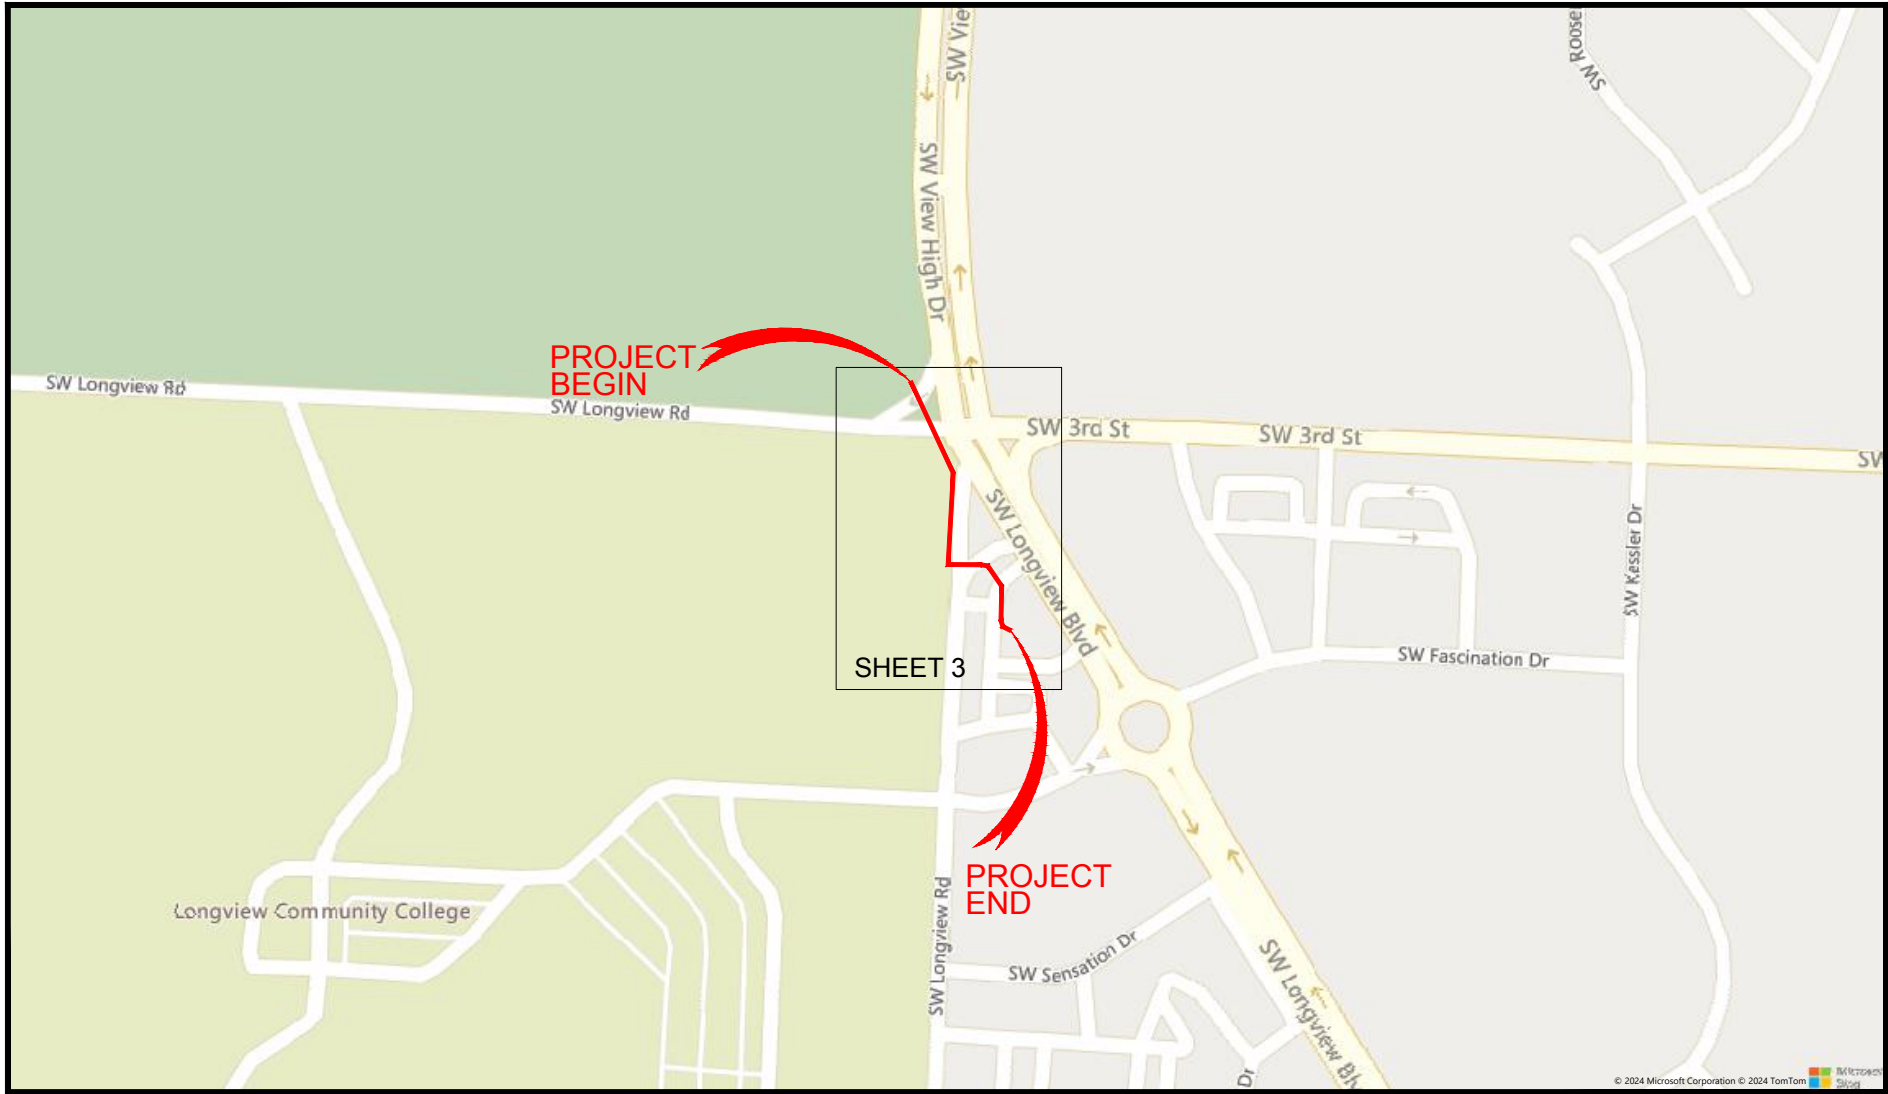

VICINITY MAP

JOB 7515

WORK PLAN INDEX	
SHEET	DESCRIPTION
1	COVER SHEET
2	GENERAL NOTES/LEGEND
3	DESIGN PLAN SHEETS
4	DETAIL SHEET
5	TYPICAL DETAILS
6	FINAL QUANTITIES

Bore 66 ft  
In Existing 521 ft  
HH 2

CONTACT INFO


















































RYAN CATRON  
CONSTRUCTION MANAGER  
816-381-0967  
RYAN.CATRON@UPNFIBER.COM

ADAM GRACE  
CONSTRUCTION TECHNICIAN  
816-730-1066  
ADAM.GRACE@UPNFIBER.COM



7301 West 133rd Street, Suite 200  
Overland Park, KS 66213-4750  
TEL 913.381.1170  
FAX 913.381.1174  
www.olsson.com

COVER SHEET		REVISIONS	
300 SW LONGVIEW BLVD		2024	
LEE'S SUMMIT, MO			
drawn by:	RMS		
checked by:	AFV		
approved by:	JMC		
project no.:	48054		
drawing no.:	UPN-24		
date:	3/14/2024		
SHEET			
1 OF 6			

LEGEND-KEY			
	UTILITY POLE		GAS
	UTILITY MANHOLE		WATER
	UTILITY HANDHOLE		TELEPHONE
	TELEPHONE PED - CROSS BOX		ELECTRIC
	EXISTING MANHOLE		SANITARY SEWER (SEW)
	EXISTING HANDHOLE		STORM SEWER
	EXISTING COIL		FENCE
	EXISTING AERIAL COIL		CABLE TV
	EXISTING DOWN GUY		STEAM
	EXISTING SPLICE POINT		OIL
	TREE		UNKNOWN UTILITY
	PROPOSED MANHOLE		RIGHT OF WAY
	PROPOSED HANDHOLE		EDGE OF PAVEMENT
	PROPOSED COIL		PROPERTY LINE
	PROPOSED AERIAL COIL		UTILITY EASEMENT
	PROPOSED DOWN GUY		WATER EASEMENT
	PROPOSED SPLICE POINT		EXISTING CONDUIT
	PROPOSED FIBER DISTRIBUTION PANEL		EXISTING AERIAL FIBER
	PROPOSED BORE PIT		EXISTING STRAND
	PROPOSED PULL BOX		PROPOSED CONDUIT
	PROPOSED RUNNING LINE		PROPOSED AERIAL FIBER
	FLOW LINE		PROPOSED STRAND
	FIBER OPTIC CABLE		
	EDGE OF PAVEMENT		
	CUT & RESTORE CONC./ASPH.		
	INLET		
	INLET GRATE		

1. CONTRACTOR MUST OBTAIN LOCATES PRIOR TO ANY TYPE OF EXCAVATION.
2. CONTRACTOR IS RESPONSIBLE FOR OBTAINING THE NECESSARY REQUIRED PERMITS PERTAINING TO ALL ASPECTS OF THE PROJECT AND MUST HAVE THE APPROPRIATE PERMITS AT THE JOB SITE.
3. ALL CABLE WILL BE PLACED AT STANDARD MINIMUM DEPTH OF 36" IN UNPAVED AREAS AND 48" MINIMUM BELOW STREETS AT ALL TIMES, UNLESS OTHERWISE NOTED IN THE PLANS.
4. ANY LANDSCAPING WILL BE REPLACED TO EQUAL OR BETTER THAN THAT WHICH EXISTED PRIOR TO WORK.
5. PROJECT SITE WILL BE PROPERLY SECURED PRIOR TO THE END OF EACH DAY.
6. ALL WORK IS TO BE IN ACCORDANCE WITH AUTHORITIES HAVING JURISDICTION IN THE WORK ZONE.
7. CONTRACTORS ARE ADVISED TO CONTACT UPN FOR ANY ADDITIONAL INFORMATION OR CLARIFICATION CONCERNING SCOPE OF WORK OR THE REQUIREMENTS NECESSARY FOR PROJECT COMPLETION.
8. ANY FIELD ADJUSTMENTS TO THE PROPOSED PLAN MUST BE APPROVED BY AN APPROPRIATE UPN REPRESENTATIVE.
9. BEFORE CONSTRUCTION BEGINS, CONTRACTOR SHALL TAKE THE APPROPRIATE PRECAUTIONS TO AVOID ANY POTENTIAL OBSTRUCTIONS PRIOR TO PROCEEDING WITH WORK.
10. OLSSON ASSUMES NO RESPONSIBILITY FOR EXISTING UTILITY LOCATIONS (HORIZONTAL OR VERTICAL) OR RIGHT-OF-WAY LOCATION. THE EXISTING UTILITIES AND RIGHT-OF-WAY SHOWN ON THESE PLANS HAVE BEEN PLOTTED FROM THE BEST INFORMATION AVAILABLE. IT IS HOWEVER , THE RESPONSIBILITY OF THE CONTRACTOR TO FIELD VERIFY THE LOCATION OF ALL UTILITIES AND RIGHT-OF-WAY PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION.

[illegible]


00009\40-design\AutoCAD\msa phases\unit-24 300 sw longview blvd\Final Plans\UPN-24\_300 SW Longview Blvd\_final plans.dwg  
XREFS: 300 SW Long Blvd\_base




2



3

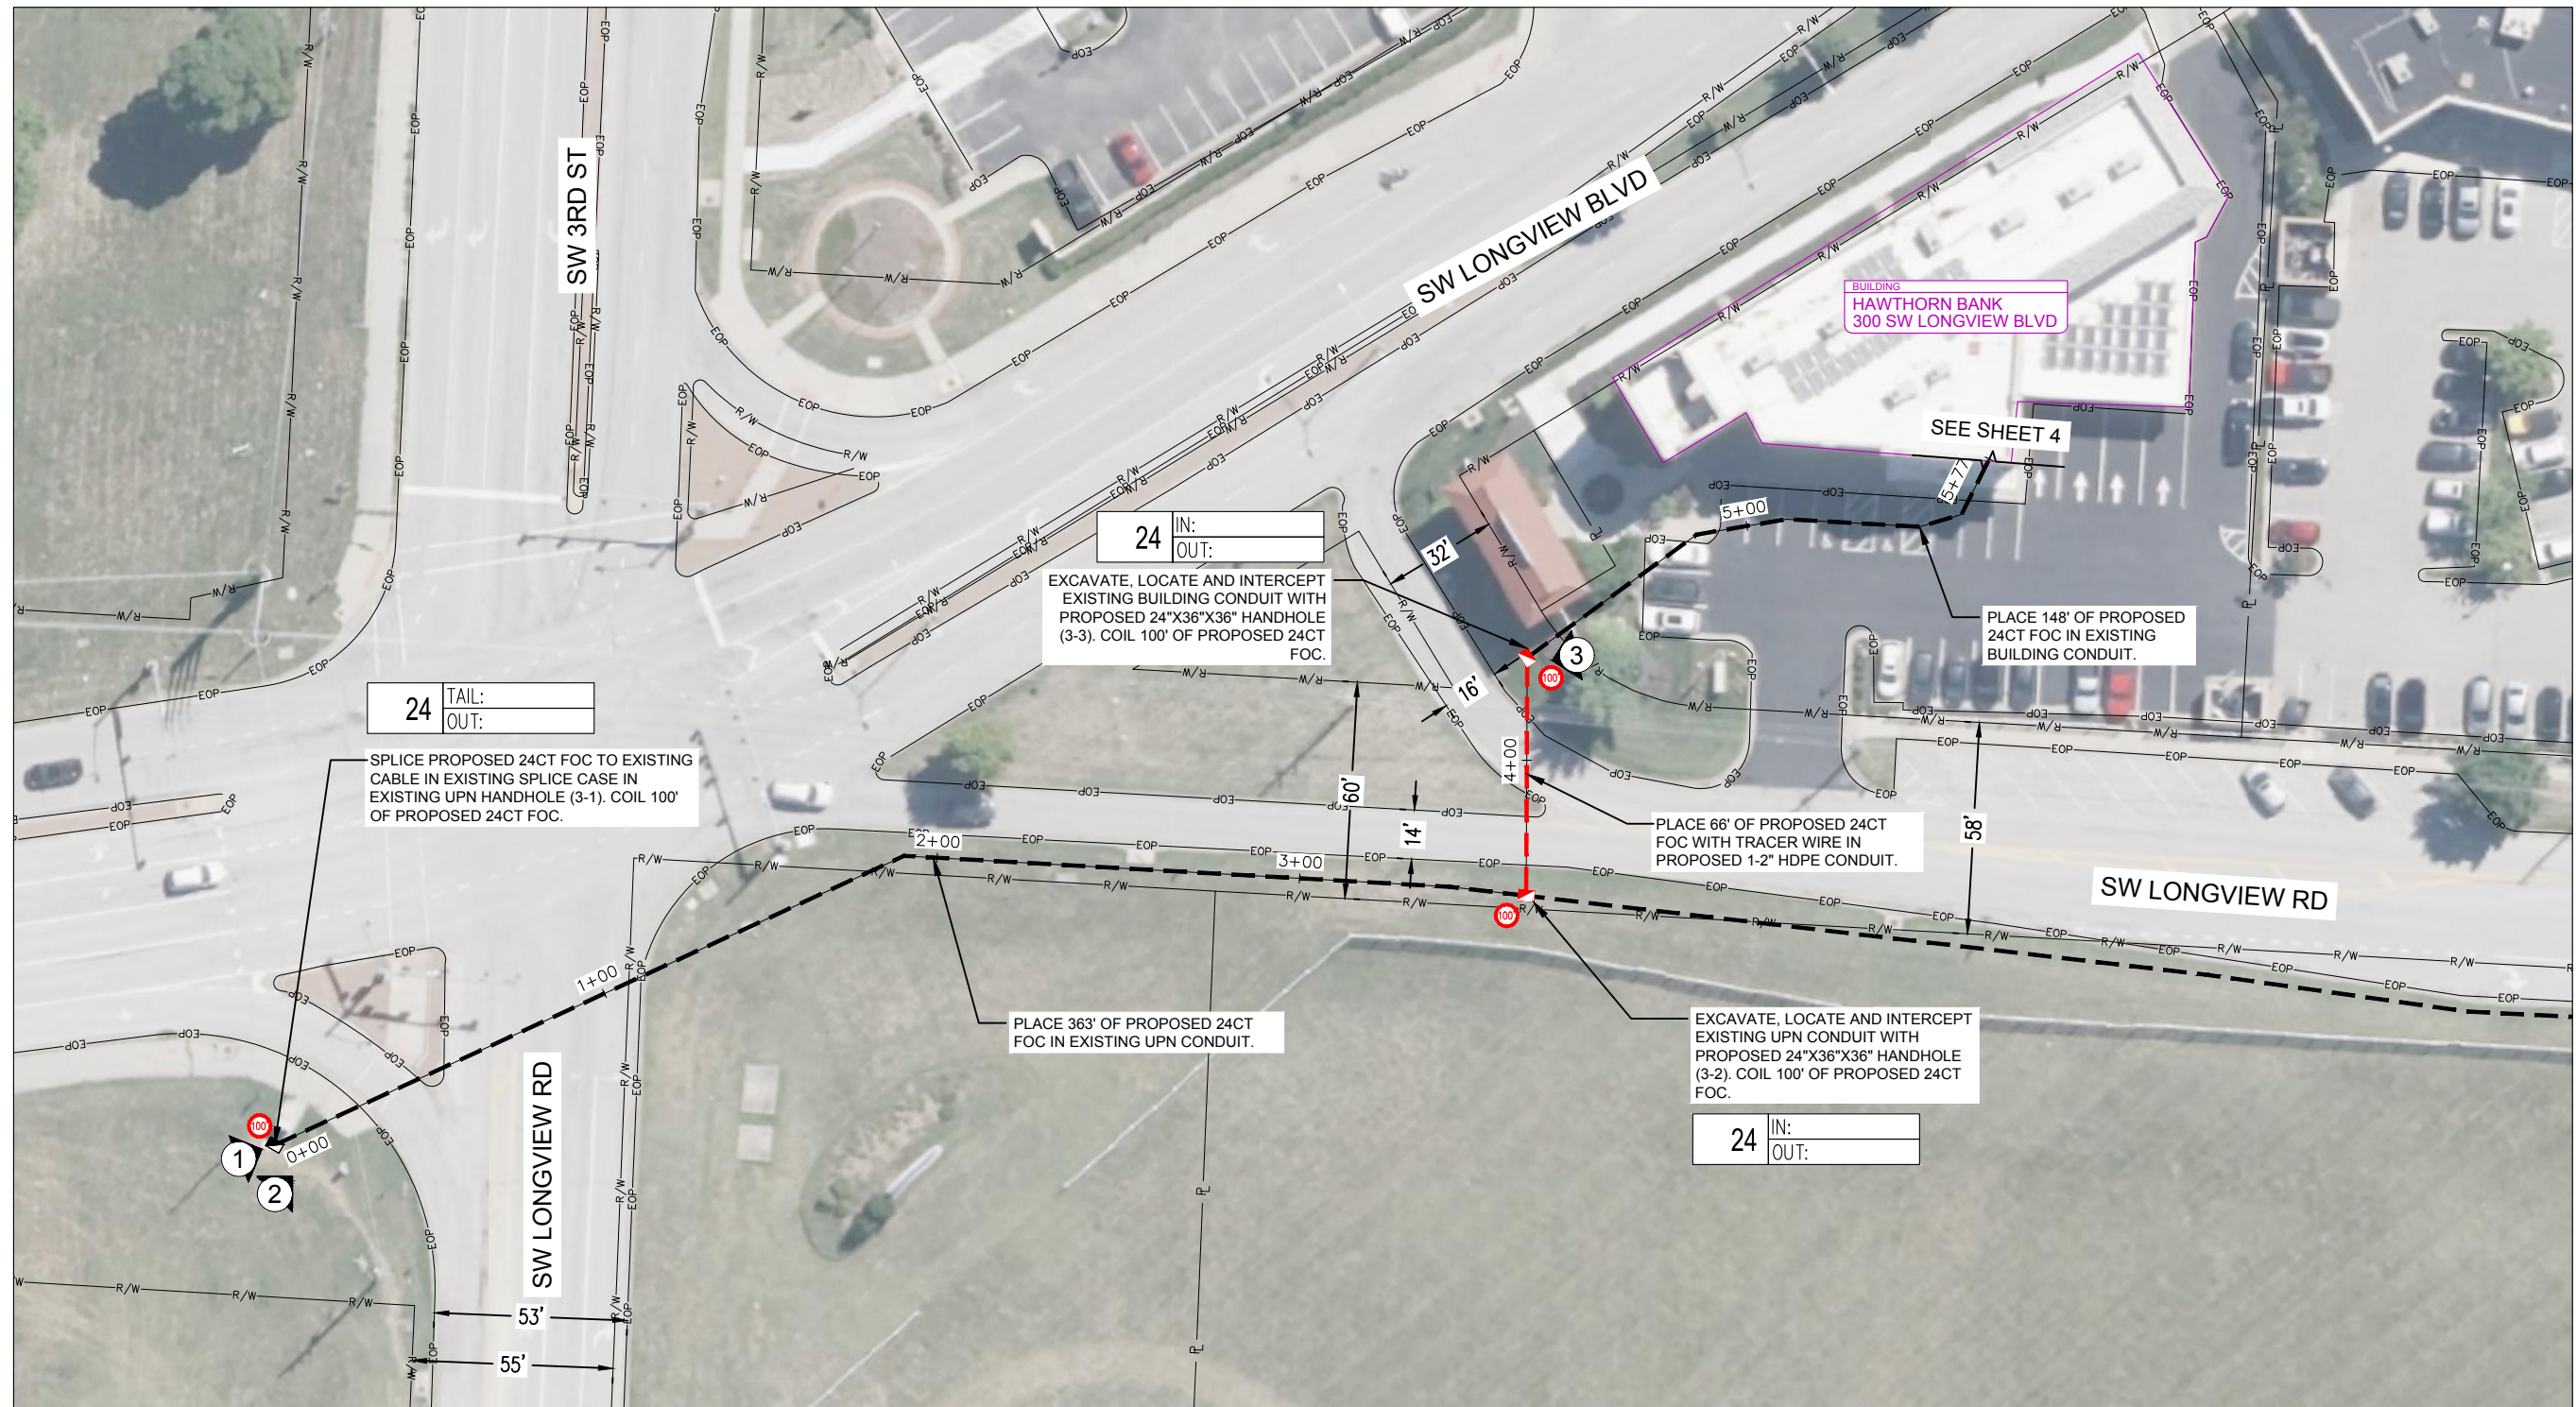

Know what's **below**.  
Call before you dig.




drawn by: _____ checked by: _____ approved by: _____ project no.: _____ drawing no.: _____ date: _____	PROJECT SHEET		REV. NO.	DATE	REVISIONS DESCRIPTION
	300 SW LONGVIEW BLVD		2024	LEE'S SUMMIT, MO	
RMS					
AFV					
JMC					
48054					
UPN-24					
3/14/2024					
SHEET					
3 OF 6					



**olsson**

7301 West 133rd Street, Suite 200  
Overland Park, KS 66213-4750  
TEL 913.381.1170  
FAX 913.381.1174  
[www.olsson.com](http://www.olsson.com)


## DETAILS

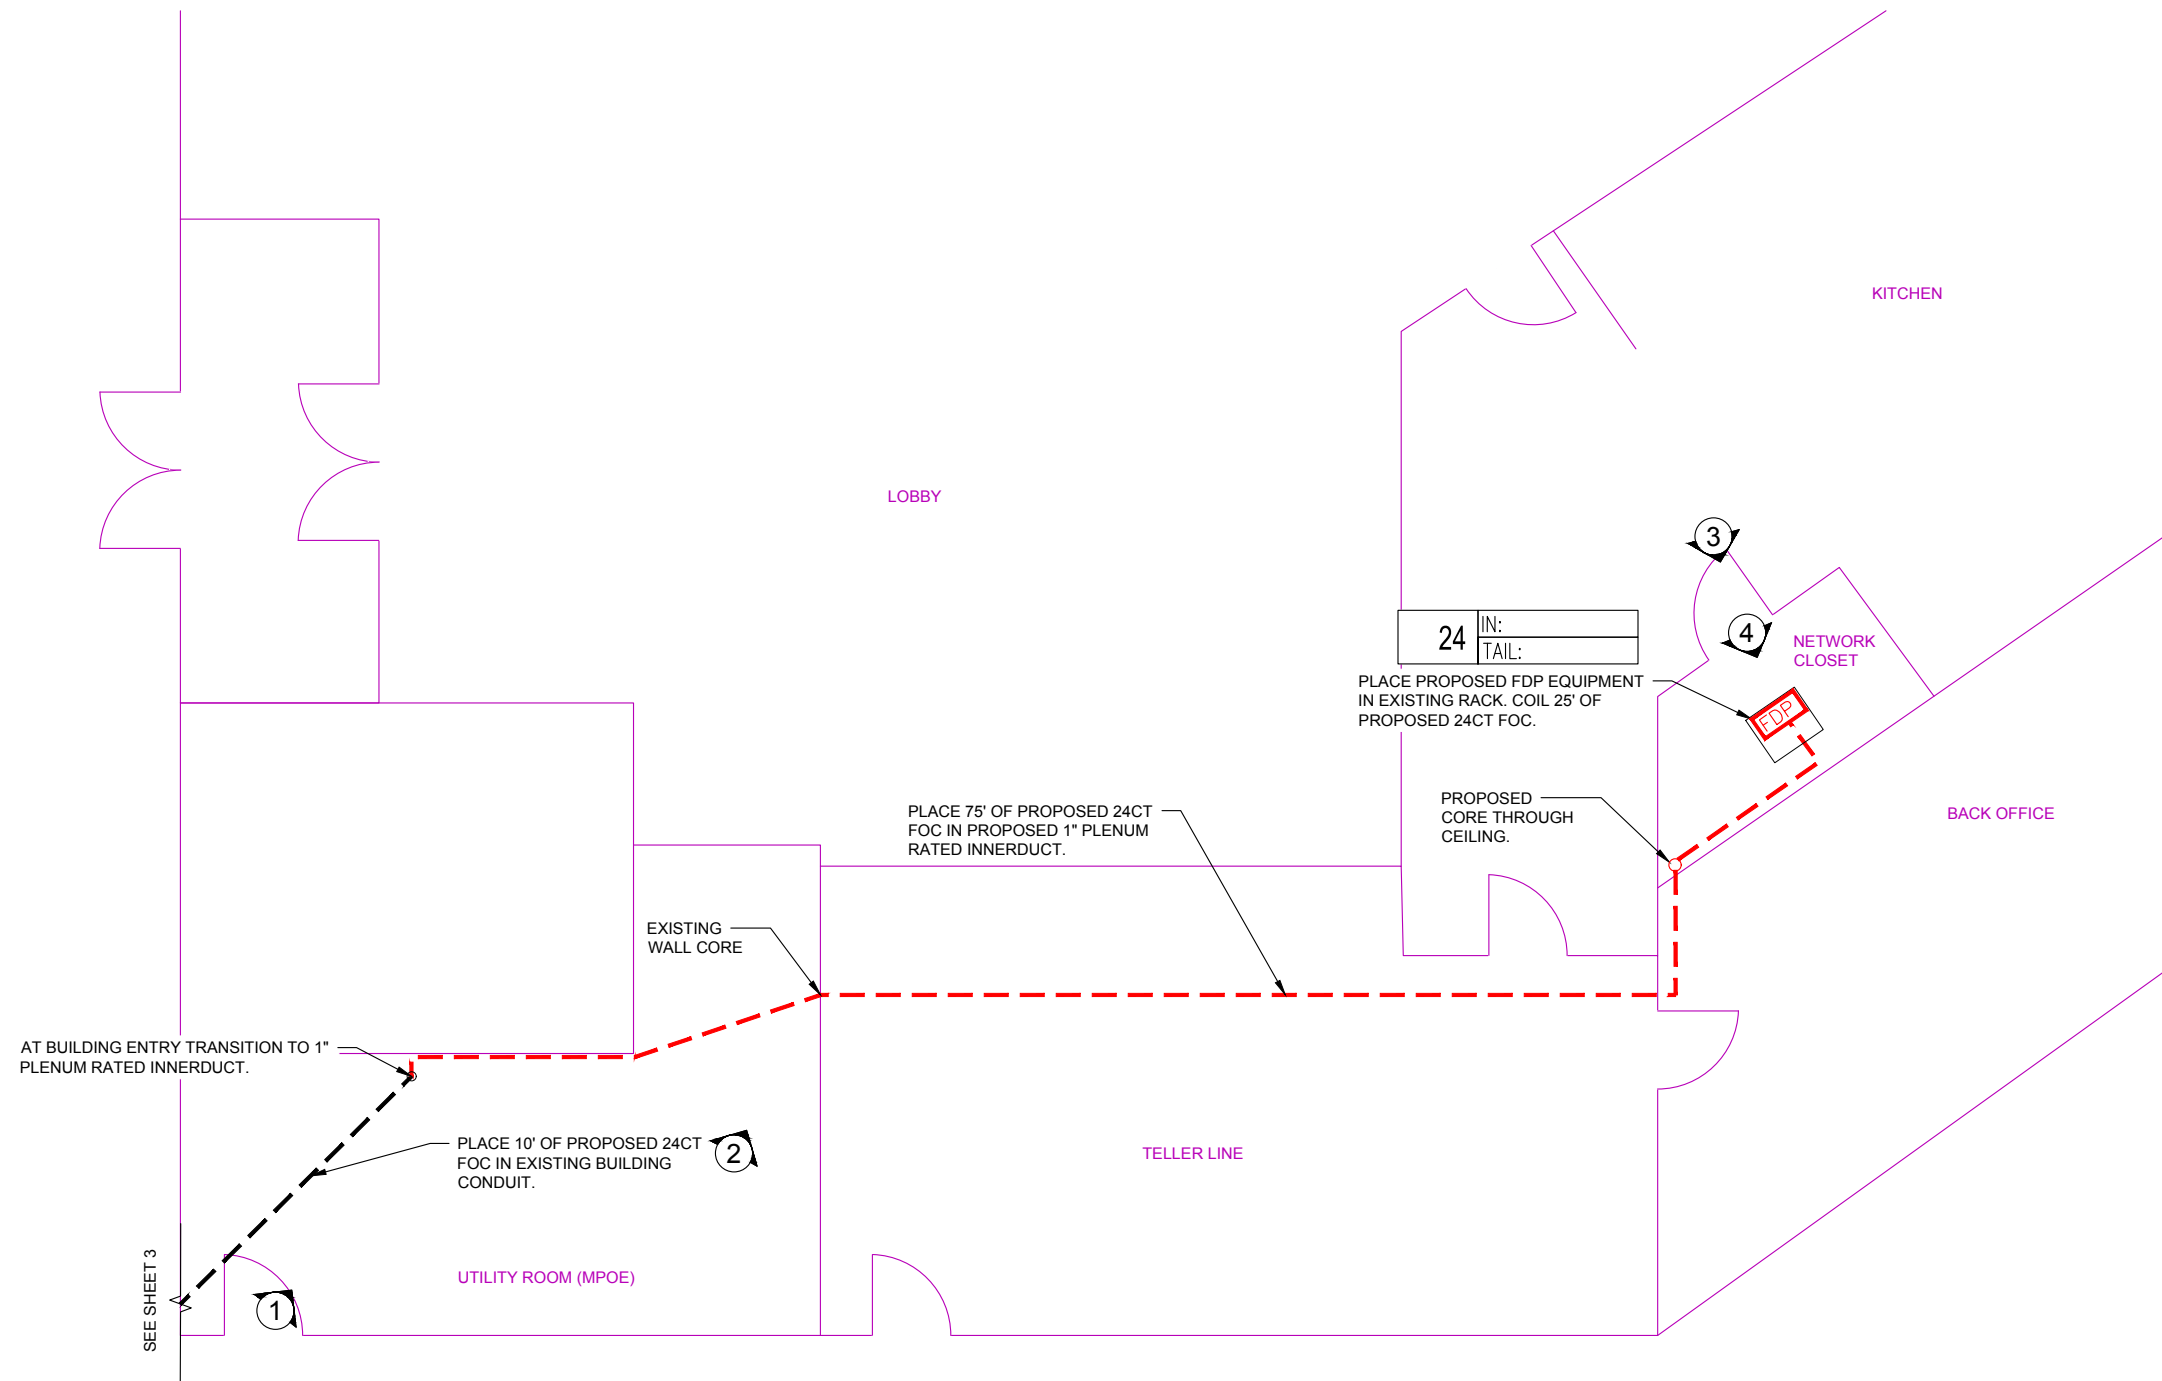



DETAIL A (ISP PLAN)  
NTS



PROPOSED PATH 

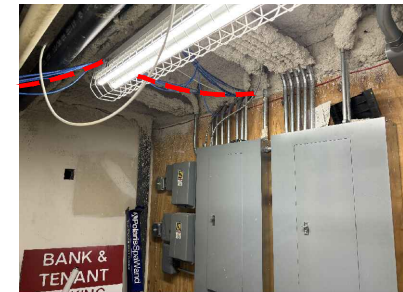

PROPOSED PATH 

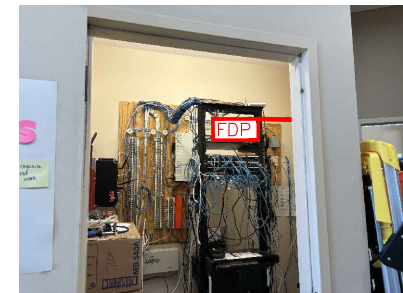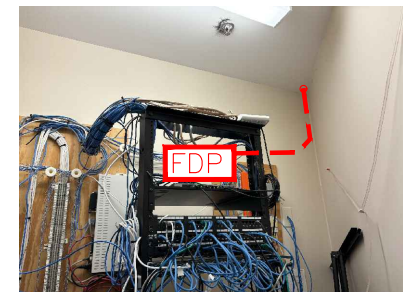PROPOSED FDP LOCATIONPROPOSED FDP LOCATION

# TYPICALS

# PCA243636-00006

## PCX POLYMER CONCRETE ASSEMBLY

24" x 36" x 36"

(For actual dimensions see drawing)

Polymer Concrete Assembly, Straight Sides, No Floor, WUC 3.6, ANSI/SCTE 77 - "T15/20K" 3/8" Hex Bolts, Standard Nameplate (Specify at time of order) Installed

### LOAD RATINGS

Incidental Traffic - Parking Lot, Sidewalk  
Conforms to:

- WUC 3.6
- ASTM C 857
- ANSI/SCTE 77

### FEATURES:

- Drop-in nameplate
- Shipped assembled
- Skid resistant cover
- Stainless steel bolts
- Cast-in floating nut box
- Integral drain holes

Additional product information  
continued on the reverse

**newbasis**  
Composites for Infrastructure

2626 Kansas Avenue  
Riverside, California 92507

951.787.0600

951.787.0632 (fax)

info@newbasis.com


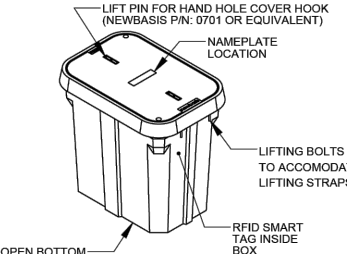

newbasis.com

**PCX**<sup>TM</sup>  
POLYMER CONCRETE  
The Next Generation

### Inside Dimensions

Length	Width	Depth
33 9/16"	21 15/16"	33"
27 1/8"	15 1/2"	

Rev: C.2

<h1>PCA243636-00006</h1>	<h1>PCX POLYMER CONCRETE ASSEMBLY</h1>	
<p>Polymer Concrete Assembly, Straight Sides, No Floor, WUC 3.6, ANSI/SCTE 77 - T15/20K," 3/8" Hex Bolts, Standard Nameplate (Specify at time of order) Installed</p>	<p>24" x 36" x 36"</p>	<p>For actual dimensions, see drawing on front side.</p>
<h2>AVAILABLE OPTIONS</h2> <ul style="list-style-type: none"> <li><input type="checkbox"/> Tier 22 Load Rating</li> <li><input type="checkbox"/> Penta Bolts</li> <li><input type="checkbox"/> Telephone EMS</li> <li><input type="checkbox"/> Power EMS</li> <li><input type="checkbox"/> Custom Nameplate Installed</li> <li><input type="checkbox"/> Custom Nameplate Shipped Separately</li> <li><input type="checkbox"/> Standard Nameplate Installed</li> <li><input type="checkbox"/> Standard Nameplate Shipped Separately</li> </ul>	<h2>NAMEPLATES</h2> <p>One standard nameplate included with each assembly, installed at the factory or easily installed in the field. Custom nameplates are available. Contact customer service.</p> <h3>Standard Nameplates</h3> <ul style="list-style-type: none"> <li>• Electric</li> <li>• Telephone</li> <li>• Fiber Optic</li> <li>• Water</li> <li>• Street Lighting</li> <li>• Broadband</li> <li>• Traffic</li> <li>• CATV</li> <li>• Traffic Signal</li> <li>• Communications</li> </ul>	 <p>LIFT PIN FOR HAND HOLE COVER HOOK (NEWBASIS P/N: 0701 OR EQUIVALENT)</p> <p>NAMEPLATE LOCATION</p> <p>LIFTING BOLTS TO ACCOMMODATE LIFTING STRAPS</p> <p>RFID SMART TAG INSIDE BOX</p> <p>OPEN BOTTOM</p>
<p><input checked="" type="checkbox"/> - Indicates a selected option</p>		
<h2>MATERIAL PROPERTIES AND ATTRIBUTES</h2> <h3>Compressive Strength</h3> <p>Polymer Concrete - 11500 PSI Per ASTM D695</p> <h3>Flexural Strength</h3> <p>Polymer Concrete - 4000 PSI Per ASTM D790</p> <h3>Coefficient of Friction (Dry)</h3> <p>1.085 Per ASTM C1028</p> <p>Polymer Concrete</p> <ul style="list-style-type: none"> <li>- Advanced composite: Very high strength to weight ratio</li> <li>- Non-metallic</li> <li>- Non-conductive</li> <li>- UV Resistant</li> <li>- High impact resistant</li> <li>- Impervious to chemicals and moisture</li> </ul> <p>Materials tested in accordance with ASTM D-543 and ASTM D-570</p>	<h2>WEIGHTS AND SHIPPING</h2> <p>COVER WEIGHT: 98.0 lbs.</p> <p>BOX WEIGHT: 330.1 lbs.</p> <p>ASSEMBLY WEIGHT: 428.1 lbs.</p> <p>LOADED PALLET WEIGHT: 1,775 lbs.</p> <p>Standard shipping includes van delivery of pallet quantities to the lower 48 states. Partial pallet quantities and flat bed shipping available at an additional cost.</p>	<h2>PACKAGING (Steel Banding, Edge Protection)</h2> <p>PALLET QUANTITY: 4</p>  <p>76 1/2"</p> <p>55"</p> <p>40"</p>
		<p>Rev. C.2</p>

DWG: F:\2024\00001-00500\024-00009\40-design\AutoCAD\msa phases\unite-24\_300 sw longview blvd\UPN-24\_300 SW Longview Blvd\_final plans.dwg  
DATE: Mar 14, 2024 4:32pm XREFS: 300 SW Long Blvd\_base USER: rschultz

TOTAL QUANTITIES			
ITEM	ITEM DESCRIPTION	UNITS	QUANTITY
1.	ROD & PROOF EXISTING DUCT	LF	521
2.	SUPPLY & INSTALL 1-2" HDPE DUCT	LF	66
3.	SUPPLY & INSTALL 2-2" HDPE DUCT	LF	
4.	SUPPLY & INSTALL 1-1.25" HDPE DUCT	LF	
5.	SUPPLY & INSTALL 2" PVC DUCT	LF	
6.	SUPPLY & INSTALL 4" PVC DUCT	LF	
7.	SUPPLY & INSTALL 2" RIGID STEEL ON A STRUCTURE	LF	
8.	SUPPLY & INSTALL 3-CELL MAXCELL	LF	
9.	SUPPLY & INSTALL TRACER WIRE	LF	66
10.	SUPPLY & INSTALL 24"X36"X36" HANDHOLE	EACH	2
11.	SUPPLY & INSTALL UNDERGROUND SPLICE ENCLOSURE	EACH	
12.	INSTALL 432CT ARMORED FIBER OPTIC CABLE - UNDERGROUND	LF	
13.	INSTALL 288CT ARMORED FIBER OPTIC CABLE - UNDERGROUND	LF	
14.	INSTALL 96CT ARMORED FIBER OPTIC CABLE - UNDERGROUND	LF	
15.	LASH 432CT ARMORED FIBER OPTIC CABLE - AERIAL	LF	
16.	LASH 288CT ARMORED FIBER OPTIC CABLE - AERIAL	LF	
17.	LASH 96CT ARMORED FIBER OPTIC CABLE - AERIAL	LF	
18.	SUPPLY & INSTALL 6.6M STRAND	LF	
19.	SUPPLY & INSTALL FIBER SNOWSHOE	EACH	
20.	SUPPLY & INSTALL 2" PVC STAND OFF RISER	EACH	
21.	SUPPLY & INSTALL 4" PVC STAND OFF RISER	EACH	
22.	SUPPLY & INSTALL DOWN GUY AND ANCHOR	EACH	
23.	SUPPLY & INSTALL AERIAL SPLICE ENCLOSURE	EACH	
24.	SUPPLY & INSTALL 1" EMT CONDUIT	LF	
25.	SUPPLY & INSTALL 2" EMT CONDUIT	LF	
26.	SUPPLY & INSTALL 1" PLENUM RATED INNERDUCT	LF	75
27.	SUPPLY & INSTALL WYE CAST CONNECTOR	EACH	
28.	SUPPLY & INSTALL LB	EACH	
29.	PROPOSED WALL CORE	EACH	1
30.	SUPPLY & INSTALL 2'X2'X3/4" PLYWOOD BACKBOARD	EACH	
31.	INSTALL 24CT INDOOR/OUTDOOR RATED FIBER OPTIC CABLE - UNDERGROUND	LF	987
32.	INSTALL 24CT INDOOR/OUTDOOR RATED FIBER OPTIC CABLE - AERIAL	LF	
33.	REMOVE & REPLACE SIDEWALK	SQ FT	
34.	REMOVE & REPLACE ASPHALT	SQ FT	
* 35.	TRAFFIC PERMIT	AGENCIES	1
* 36.	RIGHT OF WAY PERMIT	AGENCIES	1

\* CITY, COUNTY, AND STATE.

**olsson**

7301 West 133rd Street, Suite 200  
Overland Park, KS 66213-4750

TEL 913.381.1170  
FAX 913.381.1174

www.olsson.com



Know what's below.  
**Call** before you dig.

drawn by:	RMS
checked by:	AFV
approved by:	JMC
project no.:	48054
drawing no.:	UPN-24
date:	3/14/2024

SHEET

6 OF 6

## FINAL QUANTITIES

300 SW LONGVIEW BLVD

LEE'S SUMMIT, MO

2024

[illegible]

## REVISIONS



olson

7301 West 133rd Street, Suite 200  
Overland Park KS 66213-4750  
TEL 913.381.1170  
FAX 913.381.1174  
www.olsson.com