


Roof Truss Layout

Scale: 3/16" = 1'

Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.

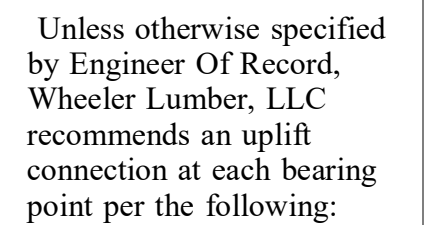

Installation per Simpson
Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.


Wall Heights	
8-01-02	
9-01-02	

THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of Wood Trusses" available from the Truss Plate Institute, 383 Donlin Drive, Madison, WI 53719.


*Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871*



Customer	Summit Homes		
Job Name	Lot 173 Hawthorn		
Job Site Address	3220 SW Arbor		
City,	State	Lee's Summit	
Designer	Chuck Haspels		
3/13/2024	Job # B240039		



Triangle denotes the left end of the Truss as it appears on the Engineered Drawings provided.



Unless otherwise specified
by Engineer Of Record,
Wheeler Lumber, LLC
recommends an uplift
connection at each bearing
point per the following:

<u># of Uplift</u>	<u>Connector</u>
0 - 495:	(1) H2.5A
495 - 990:	(2) H2.5A
990 - 1245:	(1) HTS20

Installation per Simpson
Strong-Tie guidelines.

For Reactions greater than 1245#, refer to EOR.

Roof Truss Layout

Scale: 3/16" = 1'

RELEASE FOR CONSTRUCTION
AS NOTED FOR PLAN REVIEW
DEVELOPMENT SERVICES
LEE'S SUMMIT, MISSOURI
04/10/2024

*Wheeler Lumber
1959 Old Hwy 50 NE
Waverly, KS 66871*



THIS IS A TRUSS PLACEMENT DIAGRAM ONLY. These trusses are designed as individual building components to be incorporated into the building design at the specification of the building designer. See individual design sheets for each truss design identified on the placement drawing. The building designer is responsible for temporary and permanent bracing of the roof and floor system and for the overall structure. The design of the truss support structure including headers, beams, walls, and columns is the responsibility of the building designer. For general guidance regarding bracing, consult "Bracing of wood trusses" available from the Truss Plate Institute, 263 D'Ontorio Drive, Madison, WI 53719.

THIS LAYOUT IS THE SOLE SOURCE FOR FABRICATION OF TRUSSES AND VOIDS. ALL PREVIOUS ARCHITECTURAL OR OTHER TRUSS LAYOUTS, REVIEW AND APPROVAL OF THIS LAYOUT MUST BE RECEIVED BEFORE ANY TRUSSES WILL BE BUILT. VERIFY ALL CONDITIONS TO INSURE AGAINST CHANGES THAT WILL RESULT IN EXTRA CHARGES TO YOU.

Shop Drawing Approval

Customer	Summit Homes	
Job Name	Lot 173 Hawthorne	
Job Site Address	3220 SW Arbor	
City, State	Lee's Summit	
Designer	Chuck Haspels	
3/13/2024	Job # B240039	